

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199742347 B2**
(10) Patent No. **710062**

(54) Title
Integrated microwave terrestrial radio with dovetail attachment

(51)⁶ International Patent Classification(s)
H01Q 023/00

(21) Application No: **199742347** (22) Application Date: **1997.08.22**

(87) WIPO No: **WO98/10487**

(30) Priority Data

(31) Number	(32) Date	(33) Country
707228	1996.09.03	US

(43) Publication Date : **1998.03.26**

(43) Publication Journal Date : **1998.05.21**

(44) Accepted Journal Date : **1999.09.09**

(71) Applicant(s)
Raytheon Company

(72) Inventor(s)
Jeffrey A. Paul; Roy Wien; Richard P. Mintzlaiff

(74) Agent/Attorney
GRIFFITH HACK,GPO Box 3125,BRISBANE QLD 4001

OPI DATE 26/03/98 APPLN. ID 42347/97
AQJP DATE 21/05/98 PCT NUMBER PCT/US97/14858



AU9742347

IN


(51) International Patent Classification ⁶ : H01Q 23/00		A1	(11) International Publication Number: WO 98/10487
			(43) International Publication Date: 12 March 1998 (12.03.98)
(21) International Application Number: PCT/US97/14858		(81) Designated States: AU, CA, IL, JP, KR, MX, NO, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 22 August 1997 (22.08.97)			
(30) Priority Data: 707,278 3 September 1996 (03.09.96) US		Published With international search report	
(71) Applicant: HE HOLDINGS, INC., doing business as HUGHES ELECTRONICS (US/US); 7200 Hughes Terrace, Los Angeles, CA 90045-0066 (US).		(11) Raytheon Company 200 E. El Segundo Blvd El Segundo, CA 90245 USA	
(72) Inventors: PAUL, Jeffrey, A.; 2027 W. 233rd Street, Torrance, CA 90501 (US). WIEN, Roy; 18728 Stefani Avenue, Cerritos, CA 90703 (US). MINTZLAFF, Richard, P.; 17250 Van Gogh Street, Granada Hills, CA 91344 (US).			
(74) Agents: DURAISWAMY, Vijayalakshmi, D. et al.; Hughes Electronics, 7200 Hughes Terrace, Los Angeles, CA 90045-0066 (US).			



(54) Title: INTEGRATED MICROWAVE TERRESTRIAL RADIO WITH DOVETAIL ATTACHMENT

(57) Abstract

The radio frequency unit (60) of a millimeter wave terrestrial radio includes a housing (62) with a front face (64a) and a back face (64b), a microwave radio frequency transceiver electronics package within the housing (62), an antenna (68) affixed to the front face (64a) of the housing (62), and appropriate signal connections and feeds. One portion of a dovetail support structure, preferably the male dovetail fitting (74), is affixed to the back face (64b) of the housing (62). The other portion of the dovetail support structure, preferably the female dovetail fitting (80), is mounted to a mounting structure. The dovetail support structure (74, 80) allows the radio frequency unit (60) to be readily mounted to and demounted from the mounting structure. A reference plane (83a, 83b) defined between the radio frequency unit (60) and the mounting structure (80) allows the radio frequency unit (60) to be precisely oriented relative to the mounting structure (80).

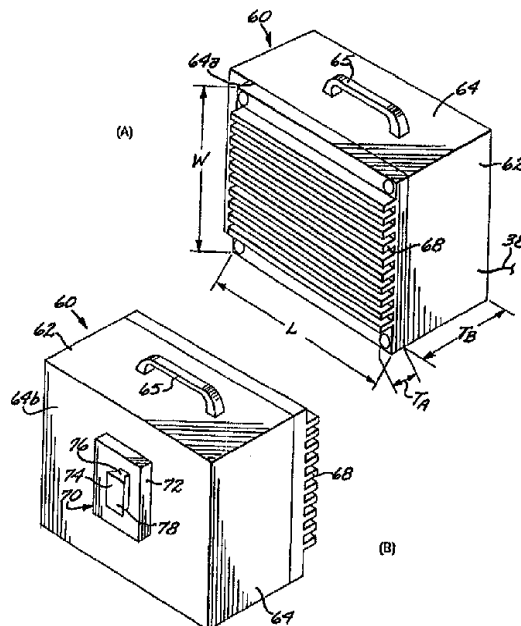

INTEGRATED MICROWAVE TERRESTRIAL RADIO WITH DOVETAIL ATTACHMENT

BACKGROUND OF THE INVENTION

This invention relates to microwave radios, and, more particularly, to a
5 radio frequency unit for a microwave radio.

Microwave radio communications are widely used to transfer large
amounts of data, such as in earth and space microwave long-distance
communications links. They are also of interest for shorter-range, lower-power
applications such as the basic voice, video, and data links between, for
10 example, a cellular base station and a central telephone office. In such
applications, the microwave transmission distance is typically about 1/2-5 miles,
the microwave signal is at a specific frequency within the range of about 2-94
GHz, and the power output of the microwave transmitter is about 100
milliwatts. Such microwave communications system are generally termed
15 "point-to-point" systems.

Corresponding to the high-power microwave communications systems,
a conventional point-to-point system has three basic physical parts: a signal
processing unit (SPU), sometimes termed an "indoor" unit having the baseband
radio components, a radio frequency (RF) unit (RFU), sometimes termed an
20 "outdoor" unit having the microwave-frequency radio components, and an
antenna. Because a microwave feed is required between the components
operating at microwave frequency, the radio frequency unit is located within
a few feet of the antenna, which ordinarily is mounted outside and aimed at
another point-to-point terminal located some distance away. The antenna is
25 typically a parabolic antenna of the cassegrain type. The signal processing unit
may be located quite some distance from the radio frequency unit. An ordinary
coaxial cable set extends between the signal processing unit and the radio
frequency unit, but a microwave coaxial feed is required between the radio
frequency unit and the antenna.

As point-to-point systems become more popular, their physical packaging becomes more important. The existing radio frequency units and antennas are bulky, heavy, and in any cases, difficult to mount, align and maintain in alignment. With the proliferation of point-to-point systems in large cities, new mounting space on existing masts and elsewhere has become more difficult to find. Installers must hoist the later-installed radio frequency unit and antenna to ever-more-precious locations in order to establish line-of-sight contact with the remote terminal. The radio frequency unit and the antenna must be mounted in close proximity to each other. Conventional mounting systems for the radio frequency unit and the antenna include arrangements of brackets, guy wires and tumbuckles. Great care must be taken in the alignment of the antenna with a remote antenna by adjustment of the mounting system. If the antenna must be replaced at a later time, the new antenna must again be aligned.

To overcome these problems, the assignee of the present invention is developing an integrated point-to-point microwave radio frequency unit and antenna, which is much more compact and lighter in weight than conventional systems. However, the problem remains of supporting the integrated unit in a manner so as to make installation and replacement simple and convenient. There is a need for a mounting approach to be used in conjunction with the improved integrated radio frequency unit and antenna which overcomes these problems. The present invention fulfils this needs, and further provides related advantages.

SUMMARY OF THE INVENTION

According to one aspect of the present invention there is provided an integrated point-to-point microwave radio frequency unit/antenna operable in conjunction with a mounting structure having a mounting structure reference plane surface and a mounting structure support element, comprising:

- a housing having a front face and a back face, the back face having a housing reference plane surface thereon;
- a microwave radio frequency transceiver electronics



3782XA/703

package within the housing, the electronics package having an external connection and an antenna connection;

an antenna affixed to the front face of the housing;

5 a microwave radio frequency feed communicating between the antenna and the antenna connection of the microwave transceiver electronics package; and

10 a housing support element affixed to the housing, the housing support element and the mounting structure support element being engageable to each other such that the housing reference plane surface is positioned in contact with the mounting structure reference plane surface in a face to face relationship.

According to another aspect of the present invention there is provided an integrated point-to-point microwave radio frequency unit/antenna comprising:

15 a housing having a front face and a back face;

a microwave radio frequency transceiver electronics package within the housing, the electronics package having an external connection and an antenna connection;

20 an antenna affixed to the front face of the housing;

a microwave radio frequency feed communicating between the antenna and the antenna connection of the microwave transceiver electronics package; and

25 a first portion of a dovetail fitting affixed to the back face of the housing.

According to a further aspect of the present invention there is provided a method for mounting a radio frequency unit/antenna comprising the steps of:

30 providing a mounting structure having a mounting structure reference plane surface and a mounting structure support element;

providing a radio frequency unit/antenna comprising:

a housing having a front face and a back face, the back face having a housing reference plane surface thereon;

35 a microwave radio frequency transceiver electronics package within the housing, the electronics package having an external connection and an antenna connection;

an antenna affixed to the front face of the housing;

a microwave radio frequency feed communicating between



62XA/703

the antenna and the antenna connection of the microwave transceiver electronics package; and

a housing support element affixed to the housing;

engaging the housing support element and the mounting
5 support structure element to each other such that the housing reference plane surface is positioned in contact with the mounting structure reference plane surface in a face-to-face relationship.

The support unit is preferably a dovetail structure
10 wherein one of the dovetail portions, preferably the male portion, is affixed to the back face of the housing. The other of the dovetail portions, preferably the female portion into which the male portion is slidably received, is affixed to the structure to which the integrated radio
15 frequency unit/antenna is mounted. The two dovetail portions are held in a fixed relationship to each other by any convenient approach, preferably a screw set. A lock may also be provided to prevent the theft of the integrated radio frequency unit/antenna.

The housing is preferably installed by sliding the two
20 portions of the support element together and setting the set screw. The antenna is aimed at a remote terminal by aligning the portion of the support that is affixed to the structure. If at a later time the integrated radio frequency unit/antenna element must be replaced, the set
25 screw is retracted and the dovetail structure is separated by sliding the elements apart. A new integrated radio frequency unit/antenna is installed by sliding the dovetail elements and setting the set screw. The antenna of the
30 integrated radio frequency is thereby aligned, because the two reference planes are held in a fixed region to each other.

Although this procedure may seem straightforward when
described, it must be recalled that the replacement is
35 often performed in a precarious position and under difficult circumstances such as great height above the ground, high wind and significant exposure of personnel. When considered in light of these conditions, the present approach provides a great advance by reducing the weight



3782XA/703

that must be carried by the technician and simplifying the installation, alignment and replacement procedures as compared with prior approaches.

5 A preferred embodiment of the present invention will now be described by way of example only with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic diagram of a microwave radio transmitter and receiver;

10 Figure 2 is a perspective view of a conventional microwave radio frequency unit and antenna;

Figure 3A is a front perspective view of an integrated radio frequency unit/antenna according to the invention;

15 Figure 3B is a back perspective view of the integrated radio frequency unit/antenna of Figure 3A;

Figure 4 is an enlarged schematic sectional elevational view of a detail of the support structure of the integrated radio frequency unit/antenna of Figure



782XA/703

-5-

3B, taken generally at a location along lines 4-4;

Figure 5 is a view like that of Figure 4, but at a different vertical position illustrating a set screw to hold the male and female dovetail elements in a fixed relation;

5 Figure 6 is a view like that of Figure 5, illustrating another form of the set screw arrangement;

Figure 7 is a view like that of Figure 4, but at yet a different vertical position illustrating one form of a lock;

10 Figure 8 is a sectional view taken along lines 8-8 of Figure 4, illustrating another locking approach;

Figure 9 is a schematic perspective view of a conventional radio frequency unit and antenna and an integrated radio frequency unit/antenna mounted to a mast; and

15 Figure 10 is a block flow diagram for a method of utilizing the mounting approach according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is a schematic diagram of a microwave radio transceiver system 20. The general electronic structure of such systems 20 is known in the art and is described in greater detail, for example, in "RF Components for PCS Base Stations", published by Strategies Unlimited, 1996. The present invention resides not in a change to this basic, known electronic approach, but in its packaging and mounting in a highly advantageous form.

25 The system 20 includes a signal processing unit 22 (sometimes termed an "indoor unit") that processes baseband signals, a radio frequency unit 24 (sometimes termed an "outdoor unit") that processes microwave signals, and a microwave antenna 26. The signal processing unit has an input/output 28 of voice, video, and/or data link information. This input/output 28 is processed through baseband circuitry 30 and a modulator/demodulator 32. A controller 34 and a power supply 36 are also provided in the signal processing unit 22.

30 The signal processing unit 22 communicates with the radio frequency unit 24 at low frequencies through a conventional coaxial signal cable 38.

-6-

The radio frequency unit 24 includes a microwave transceiver 40 that operates in a selected microwave frequency band within the broad band extending from about 2 to about 94 GHz (Gigahertz) by converting the low-frequency signal of the signal processing unit 22. A controller 42 and a power supply 44 are provided in the radio frequency unit 24. The microwave transceiver 40 has an antenna connection 46 into which a microwave radio frequency feed 48 is connected to provide a signal to the antenna 26, or to receive a signal from the antenna. The microwave radio frequency feed 48 may be a coaxial cable or waveguide which cannot be more than a few feet long without suffering substantial signal attenuation.

Figure 2 depicts the implementation of a conventional prior radio frequency unit 24 and antenna 26, connected by the microwave feed 48, which utilizes the electronics approach of Figure 1. The radio frequency unit 24 typically has measurements of 12 inches by 12 inches by 12 inches and weighs about 35 pounds. The antenna 26 is a cassegrain parabolic antenna having a dish diameter of about 12 inches or more and a weight of about 15 pounds. Both components must be mounted at a location such that the antenna 26 may be aimed at a similar but remotely located terminal. The installer must find a way to mount the antenna 26 so that it is aligned with the antenna of the remote unit, and to mount the radio frequency unit 24 so that it is secure yet is within the range permitted by the length of the microwave feed 48. Other versions of the prior approach of Figure 2 are known wherein the parabolic antenna is affixed directly to the radio frequency unit, but such a combined approach remains awkward to handle and heavy.

Figures 3A and 3B show an integrated radio frequency unit/antenna of the invention in front and back perspective views. This apparatus uses the general electronics approach of Figure 1, but with a different architecture and antenna that offer important advantages. An integrated radio frequency unit/antenna 60 includes a housing 62 having an exterior wall 64 with a front face 64a and a back face 64b. A handle 65, which may be integral or detachable, extends from the housing 62 and permits the radio frequency unit/antenna 60 to be easily carried. A microwave radio frequency transceiver electronics package (not visible) is fixed within the housing 62. The electronics

-7-

package includes the microwave transceiver 40, the controller 42, and the power supply 44. Part of the exterior wall 64, in this case the front face 64a, includes an integral flat antenna 68. The flat antenna 68 may be formed separately and attached to the wall 64, as illustrated, or it may be formed integrally as part of the wall itself. That portion of the wall 64 which is not the antenna 68 may be made of any operable material, such as a metal or a plastic. A radome (not shown) in the form of a plastic sheet may be mounted over the face of the flat antenna 68 to protect it. The flat antenna 68 is preferably a continuous transverse stub (CTS) antenna. The CTS microwave antenna is known in the art and is described, for example, in US Patent 5,266,961, whose disclosure is incorporated by reference.

The integrated radio frequency unit/antenna 60 has an antenna connection and a microwave radio frequency feed cable extending from the antenna connection to the back side of the flat antenna 68. The radio frequency feed is at most 1-2 inches long and contained entirely within the housing 62, and accordingly is not visible in Figures 3A and 3B. There is very little microwave attenuation as the signal passes through this short feed. The installer is only required to position and fix in place the single integrated radio frequency unit/antenna 60, and is not concerned with moving and positioning two units in a compatible manner.

Figure 3B illustrates a portion of a support element 70 by which the housing 64 and attached components may be mounted to a mounting structure. The support element 70 includes a raised portion of the housing 64 in the form of a hat section 72 that extends rearwardly from the back face 64b. Fixed to the hat section 72 and extending further rearwardly therefrom is a first portion of the support element 70, illustrated as a preferred male dovetail fitting 74. The male dovetail fitting 74 includes a relatively narrow base 76 and a laterally enlarged tenon 78.

Figure 4 illustrates the support element 70 in greater detail, with both the first portion, as previously discussed, and a second portion shown. The preferred second portion is a female dovetail fitting 80 having a mortise 82 that slidably receives therein the tenon 78 of the male dovetail fitting 74. (In Figures 4-8, the clearance between the tenon and the mortise is exaggerated so

as to be visible.) The female dovetail fitting 80 is affixed to a structure (not shown here, but which will be discussed in relation to Figure 9). Equivalently, the female dovetail fitting may be affixed to the housing and the male dovetail fitting affixed to the structure.

5 The hat section 72 has a rearwardly facing face that defines a housing reference plane surface 83a. The female dovetail fitting 80 has a forwardly facing face that defines a mounting structure reference plane surface 83b. When the support elements in the form of the male dovetail fitting 74 and the female dovetail fitting 80 are slidably engaged to each other, the reference
10 plane surfaces 83a and 83b are in a facing relationship to each other. When the engagement between the support elements is complete, the two reference plane surfaces 83a and 83b are drawn into a face-to-face contact.

 The contacting between the two plane surfaces reliably and reproducibly establishes the angular orientation of the radio frequency unit/antenna 60. The
15 dovetail or other type of support element between the radio frequency unit/antenna 60 and the mounting structure does not inherently yield a closely reproducible angular orientation, due to the tolerances necessary when two elements must be capable of mounting together in adverse conditions. That is, if the dovetail portions have sufficiently large tolerances to make their sliding
20 together and apart sufficiently easy to be useful, the resulting angular tolerances are unacceptably large. For example, the present radio frequency unit/antenna 60 is to be reproducibly alignable to within $1/4^\circ$. The tolerances inherent in the dovetail support element do not, in themselves, permit this degree of reproducibility.

25 The contacting of the reference plane surfaces 83a and 83b establishes a highly precise and repeatable angular orientation for the radio frequency unit/antenna 60. In the preferred embodiment, the length of contacting of the surfaces 83a and 83b is about 4 inches. Controlling the angular orientation of the surfaces 83a and 83b to within limits of about 0.015 inches over that 4-inch
30 distance during manufacturing results in the required precision and repeatability for the orientation between the two reference plane surfaces 83a and 83b. Placing the housing reference plane 83a on the hat section 72 positions it further away from the centerline of the radio frequency unit/antenna 60,

permitting greater tolerances in the orientation and planarity of the reference plane surfaces 83a and 83b. This care in achieving the largest possible manufacturing tolerances, while still ensuring that the angularity specification is met, is important in view of the manner in which the radio frequency unit/antenna 60 is used, to be discussed subsequently. If an already-aligned radio frequency unit/antenna is removed and replaced, the replacement unit will be aligned to within the $1/4^\circ$ specification if its reference plane surface 83a meets the plane-orientation tolerance discussed above. The larger that tolerance is, the easier it is to satisfy in commercial-scale manufacturing operations.

After the male dovetail fitting 74 is slidably engaged to the female dovetail fitting 80, the relative positions of the two are fixed. The preferred approach to fixing the relative positions, as shown in Figures 5 and 6, is with a set screw 84 extending through a threaded bore in the female dovetail fitting 80. One or more set screws 84 may be provided as needed. When the set screw 84 is tightened, an end 86 of the set screw abuts the tenon 78 and fixes the position of the fittings 74 and 80. The set screw 84 is loosened and retracted to permit the two fittings 74 and 80 to be disengaged. The set screw 84 may be positioned to lie roughly perpendicular to the side face of the tenon with the head of the set screw 84 in a recess 88 in the female dovetail fitting 80, as shown in Figure 5. It may instead be positioned to lie parallel to the top of the tenon with its head against the side of the female dovetail fitting 80, as shown in Figure 6. The end 86 of the screw 84 may abut directly against the side of the tenon 78 when tightened, as shown in Figure 5, or it may abut against a vane 90 that distributes the axial loading of the set screw 84 over the side of the tenon, as shown in Figure 6. Either approach of Figures 5 and 6 may be used with or without the vane.

In the embodiments of Figures 4 and 5, the base 76 of the male dovetail fitting is permanently affixed to the hat section 72 and thence to the back face 64b of the housing 62. In another embodiment illustrated in Figure 6, the base 76 may be removably affixed to the back face 64b with machine screws 92 extending through the base 76 and tenon 78, or other operable fastener.

The set screw 84 fixes the positions of the two fittings 74 and 80 relative to each other. The two fittings 74 and 80 may also be locked together

-10-

to prevent the theft of the integrated outdoor unit/antenna 60. In one approach, as illustrated in Figure 7, bores 94a and 94b extend through the male dovetail fitting 74 and the female dovetail fitting 80, respectively, in an axially aligned relationship, forming a continuous bore 94 therethrough. The bore 94 is positioned at a different location along the length of the fittings 74 and 80 than the locking screw 84, so that there is no interference between the two. A locking element 96, which may be, for example, a pin with locks at both end, a strap that whose ends lock together, or an elongated padlock, is placed through the bore 94 to lock the fittings 74 and 80 together.

Figure 8 illustrates another locking approach. An ear 120 is attached to one end of the tenon 78, and a plate 122 with an aperture 124 therethrough is attached to the corresponding end of the female dovetail fitting 80. The plate 122 has an aperture 124 therethrough, and the ear 120 fits through the aperture 124 when the dovetail fittings 74 and 80 are engaged to each other in the installed position. The ear 120 has a bore 126 therethrough, which receives a padlock or other locking element therethrough (not shown). The two dovetail fittings 74 and 80 are thereby easily locked to each other with a standard padlock

Figure 9, which is schematic and not drawn to scale, illustrates the mounting of a conventional radio frequency unit 100 and its antenna 102, connected by their microwave feed 104, on a mast 106. The antenna 102 is affixed to the mast by a combination of brackets, struts, and guy wires (collectively, support 108) whose positions may be adjusted by turnbuckles, adjustment screws, or the like. Alignment is relatively difficult. The support approach does not permit easy locking of the antenna to the mast, as with the present approach. Moreover, if the antenna must be replaced for any reason, the support structure must be disassembled to such a degree that a complete realignment of the replacement antenna is usually necessary.

Also shown in Figure 9 is an integrated radio frequency unit/antenna 60 of the invention and its support 70, and Figure 10 illustrates a preferred use of the structure. The mounting structure is provided, numeral 130, and the radio frequency unit/antenna is provided, numeral 132. The female dovetail fitting 80 is affixed to the mounting structure mast 106 using an angularly adjustable

-11-

arm 110 or other support element whose angular position is adjustable during the alignment of the antenna toward the remote antenna. The male dovetail fitting 74 is engaged into the female dovetail fitting 80 to the correct position and the set screw 84 is tightened, numeral 134. The radio frequency unit/antenna 60 is aligned with the corresponding remote unit by changing the angular orientation of the arm 110 until the signal strength transmitted between the two antennas is maximized, numeral 136. The initial alignment of the radio frequency unit/antenna 60 may be viewed as establishing the angular orientation of the reference plane 83b, which is thereafter not changed.

If the integrated radio frequency unit/antenna 60 must later be replaced, the lock (if any) is removed, the set screw is loosened, and the dovetail fittings 74 and 80 are slidably disengaged, numeral 138. A new integrated radio frequency unit/antenna 60 is provided and installed, numeral 140, by slidably engaging its dovetail fitting 74 to the dovetail fitting 80 whose position has not been changed by the removal of the old integrated radio frequency unit/antenna 60, setting the set screw, and reinstalling the lock (if any). During this installation, the reference plane surface 83a of the replacement unit is brought into closely facing contact with the reference plane surface 83b, which is already aligned relative to the remote terminal. Realignment of the replacement radio frequency unit/antenna is therefore typically not required. By contrast, to replace the conventional antenna 100, the support structure 108 must be disassembled and replaced, and the entire antenna must be realigned.

The support approach of the invention has been reduced to practice with a prototype integrated radio frequency unit/antenna 60 for operation at a microwave frequency of 37-40 GHz, as shown in Figure 3A. The flat antenna has a width W of about 10-1/2 inches, a length L of about 10-1/2 inches, and a thickness T_A of about 1 inch. The remaining components, the microwave transceiver 40, controller 42, and power supply 44 fit into a housing having the same length and width, and a thickness T_B of about 2 inches. The total size of the housing and antenna package is about 12 inches by 12 inches by 3 inches. The weight of the integrated radio frequency unit/antenna 60 is about 13 pounds. It is highly desirable that this weight be less than about 15 pounds, as larger weights become much more difficult for personnel to carry to exposed

-12-

mounting locations. The support approach described herein is fully satisfactory for mounting this device.

Although a particular embodiment of the invention has been described in detail for purposes of illustration, various modifications and enhancements
5 may be made without departing from the spirit and scope of the invention. Accordingly, the invention is not to be limited except as by the appended claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An integrated point-to-point microwave radio frequency unit/antenna operable in conjunction with a mounting structure having a mounting structure reference plane surface and a mounting structure support element,
5 comprising:

a housing having a front face and a back face, the back face having a housing reference plane surface thereon;

a microwave radio frequency transceiver electronics package within the housing, the electronics package having
10 an external connection and an antenna connection;

an antenna affixed to the front face of the housing;

a microwave radio frequency feed communicating between the antenna and the antenna connection of the microwave transceiver electronics package; and
15

a housing support element affixed to the housing, the housing support element and the mounting structure support element being engageable to each other such that the housing reference plane surface is positioned in contact
20 with the mounting structure reference plane surface in a face to face relationship.

2. The radio frequency unit/antenna of claim 1, further including the mounting structure.

3. The radio frequency unit/antenna of claim 2, further including:
25

a lock extending between the housing support element and the mounting structure.

4. The radio frequency of claim 1, wherein the housing is a rectangular prism in exterior shape.

5. The radio frequency unit/antenna of claim 1, wherein the housing, the electronics package, the antenna, and the radio frequency feed, and the housing support element together have a weight of no more than about 15 pounds.
30

6. The radio frequency unit/antenna of claim 1, wherein the housing support element includes a first portion of a dovetail support.
35

7. The radio frequency unit/antenna of claim 6, wherein the first portion of the dovetail support comprises



8:03782XA/703

a male dovetail fitting.

8. The radio frequency unit/antenna of claim 7, further including the mounting structure having the mounting structure support element, the mounting structure support element comprising a female dovetail fitting sized to receive the male dovetail fitting therein.

9. The radio frequency unit/antenna of claim 8, further including:

a lock extending between the first portion of the dovetail support and the mounting structure.

10. An integrated point-to-point microwave radio frequency unit/antenna comprising:

a housing having a front face and a back face;

a microwave radio frequency transceiver electronics package within the housing, the electronics package having an external connection and an antenna connection;

an antenna affixed to the front face of the housing;

a microwave radio frequency feed communicating between the antenna and the antenna connection of the microwave transceiver electronics package; and

a first portion of a dovetail fitting affixed to the back face of the housing.

11. The radio frequency unit/antenna of claim 10, further including

a mounting structure having thereon a second portion of a dovetail fitting dimensioned to receive the first portion of the dovetail fitting therein.

12. The radio frequency unit/antenna of claim 11, further including:

a lock extending between the first portion of the dovetail fitting and the second portion of the dovetail fitting.

13. The radio frequency unit/antenna of claim 11, further including:

an engagement extending between the first portion of the dovetail fitting and the second portion of the dovetail fitting.

14. The radio frequency unit/antenna of claim 13, wherein the engagement includes:



03782XA/703

a set screw in at least one portion of the dovetail fitting and the second portion of the dovetail fitting, the set screw being positioned to set against the other of the portions of the dovetail fittings.

5 15. The radio frequency unit/antenna of claim 11, wherein the back face of the housing includes a housing reference plane surface thereon and the mounting structure includes a mounting structure reference plane surface thereon and wherein an engagement between the first portion
10 of the dovetail fitting and the second portion of the dovetail fitting places the housing reference plane surface and the mounting structure reference plane surface into facing contact.

15 16. A method for mounting a radio frequency unit/antenna comprising the steps of:

providing a mounting structure having a mounting structure reference plane surface and a mounting structure support element;

20 providing a radio frequency unit/antenna comprising:
a housing having a front face and a back face, the back face having a housing reference plane surface thereon;

a microwave radio frequency transceiver electronics package within the housing, the electronics package having an external connection and an antenna connection;

25 an antenna affixed to the front face of the housing;
a microwave radio frequency feed communicating between the antenna and the antenna connection of the microwave transceiver electronics package; and

30 a housing support element affixed to the housing;
engaging the housing support element and the mounting support structure element to each other such that the housing reference plane surface is positioned in contact with the mounting structure reference plane surface in a face-to-face relationship.

35 17. The method of claim 16, including the additional steps, after the step of engaging;

disengaging the housing support element from the mounting structure support element to remove the radio frequency unit/antenna.



82XA/703

providing a second radio frequency unit/antenna having substantially the same structure as the radio frequency unit/antenna;

engaging a housing support element of the second radio frequency unit/antenna and the mounting structure support element to each other such that a housing reference plane surface of the second radio frequency unit/antenna is positioned in contact with the mounting structure reference plane surface in a face-to-face relationship.

18. The radio frequency unit/antenna of claim 1, wherein the microwave radio frequency/transceiver electronics package comprises a microwave transceiver.

19. The radio frequency unit/antenna of claim 1, wherein the antenna is a flat antenna.

20. The radio frequency unit/antenna of claim 10, wherein the first portion of the dovetail fitting comprising a male dovetail fitting having a tenon thereon.

21. The radio frequency unit/antenna of claim 10, wherein the microwave radio frequency transceiver electronics package comprise a microwave transceiver.

22. The radio frequency unit/antenna of claim 10, wherein the antenna is a flat antenna.

23. The method of claim 16, wherein the microwave radio frequency transceiver electronics package comprises a microwave transceiver.

24. The method of claim 16, wherein the antenna is a flat antenna.

25. The method of claim 16, wherein the mounting structure support element comprises a first portion of a dovetail fitting and the housing support element comprises a second portion of the dovetail fitting.

26. An integrated point to point microwave radio frequency unit/antenna, substantially as hereinbefore described with reference to the accompanying drawings.

Dated this 6th day of July 1999

RAYTHEON COMPANY

By its Patent Attorney

GRIFFITH HACK



782XA/703




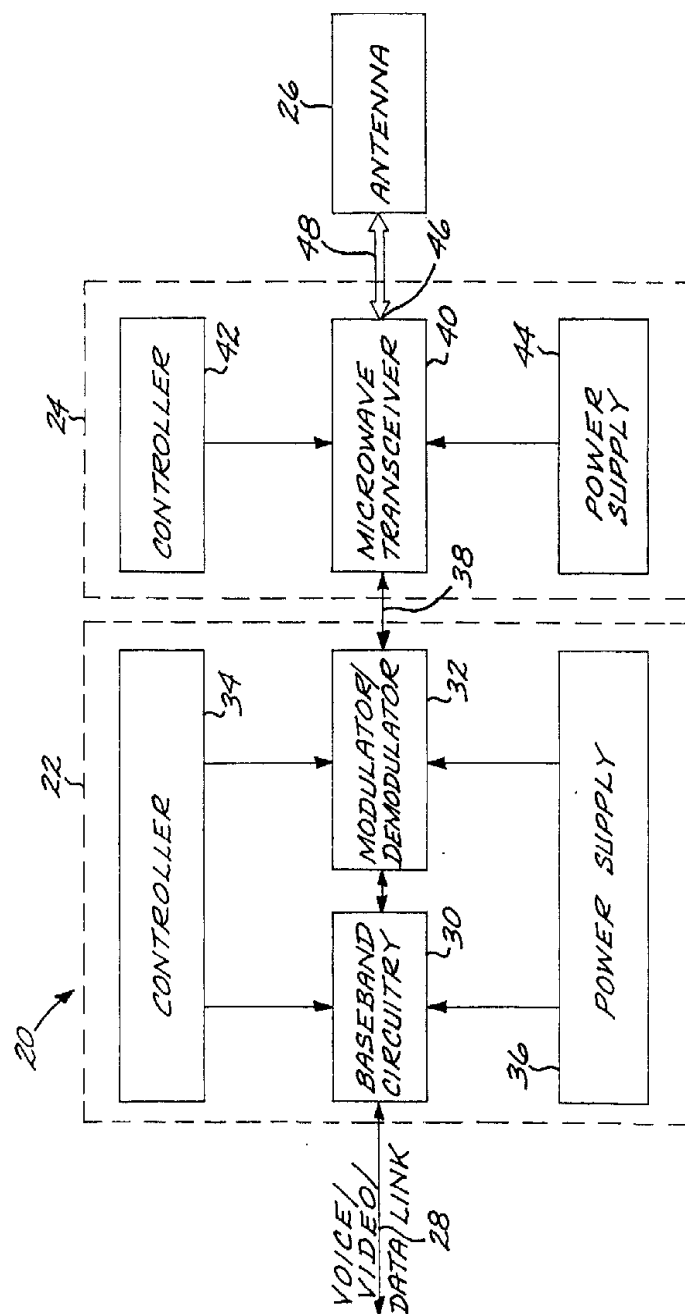


FIG. 1

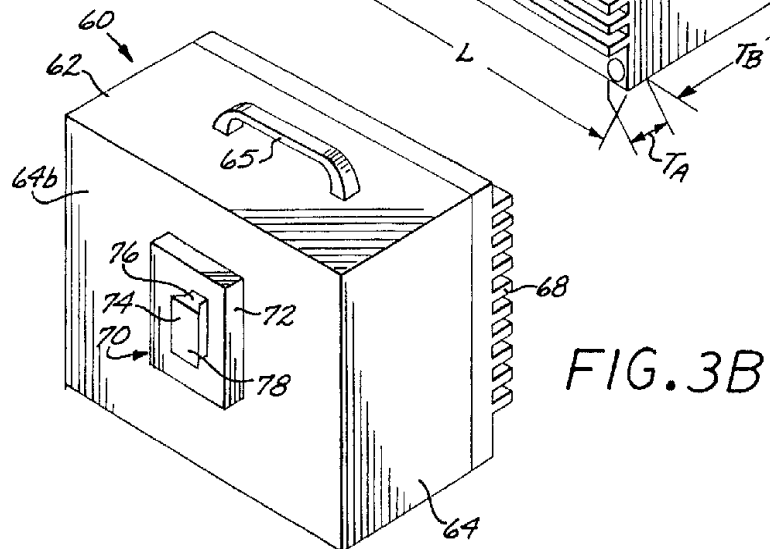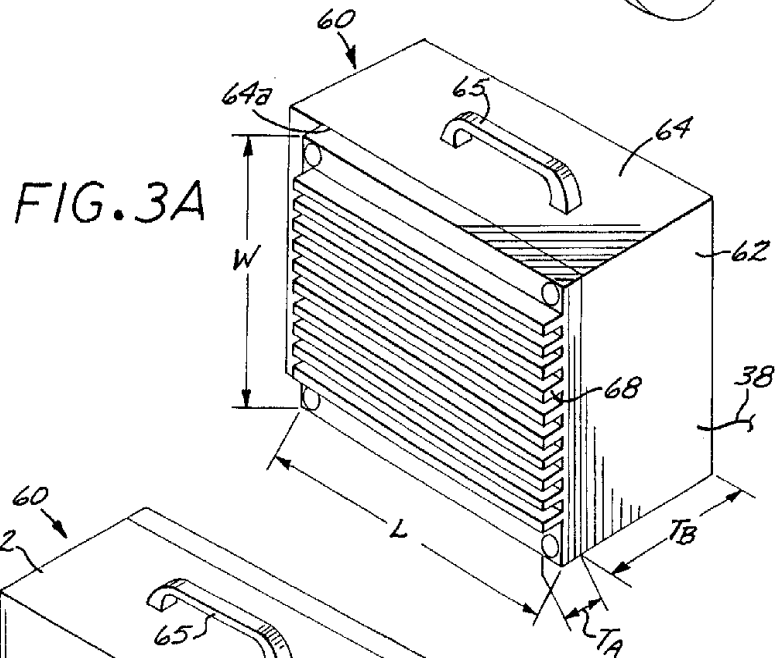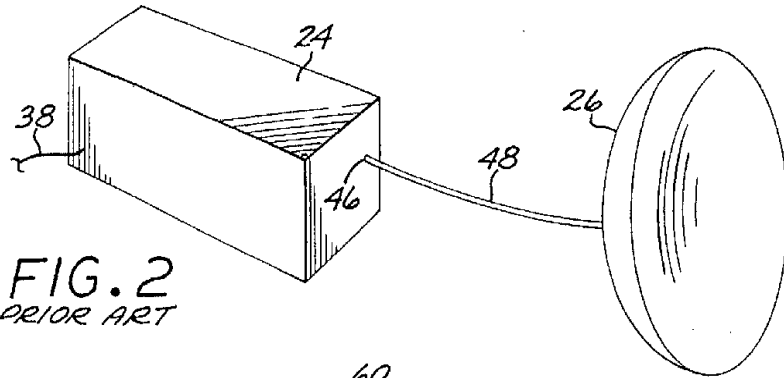

3/6

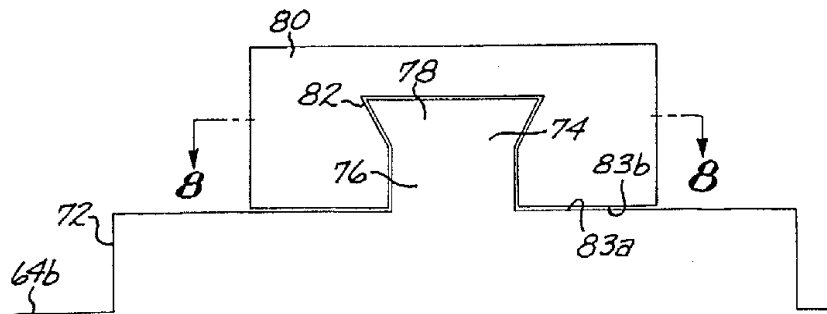


FIG. 4

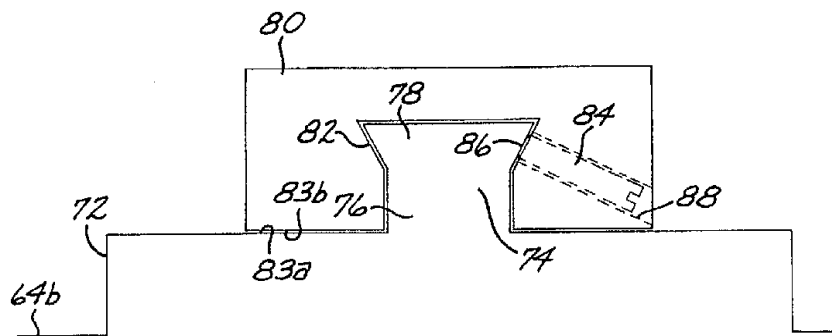


FIG. 5

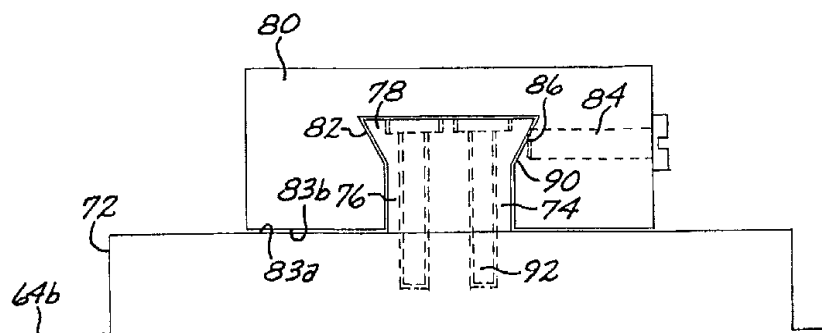


FIG. 6

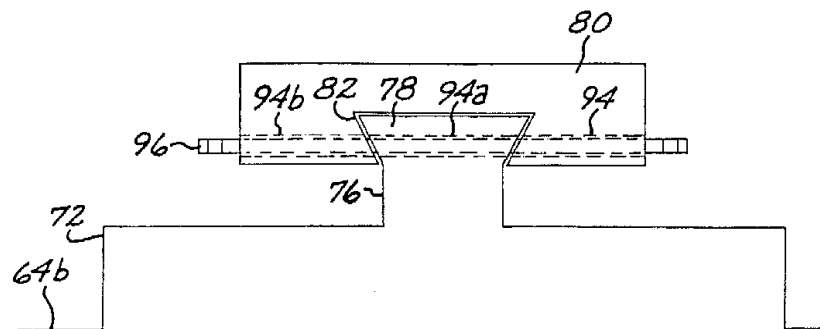


FIG. 7

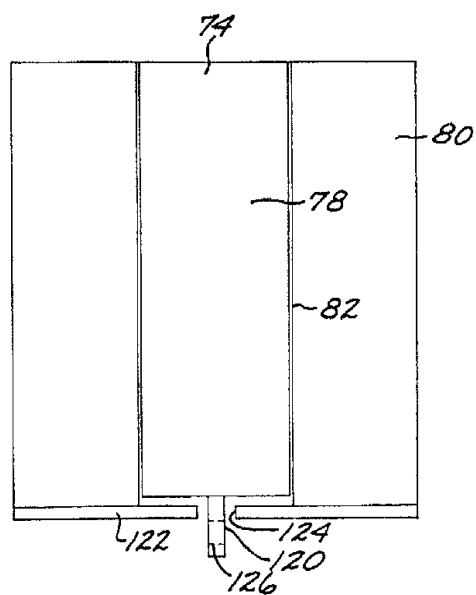


FIG. 8

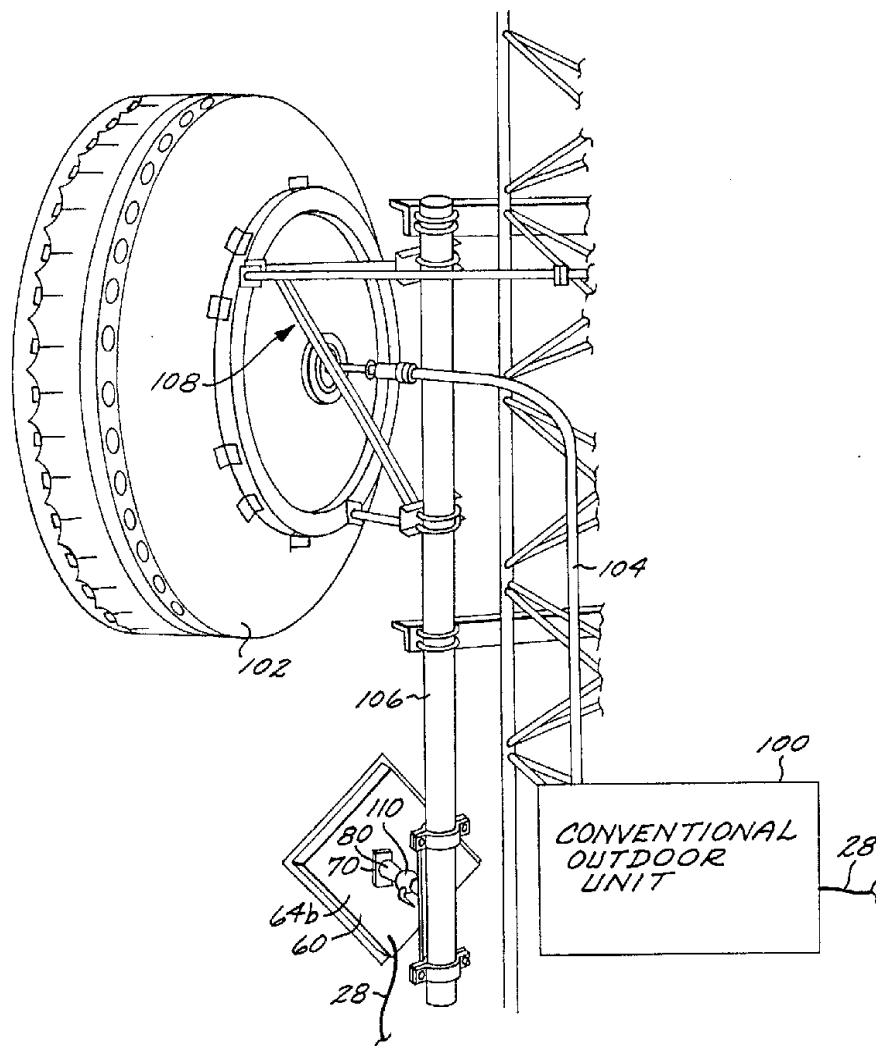


FIG. 9

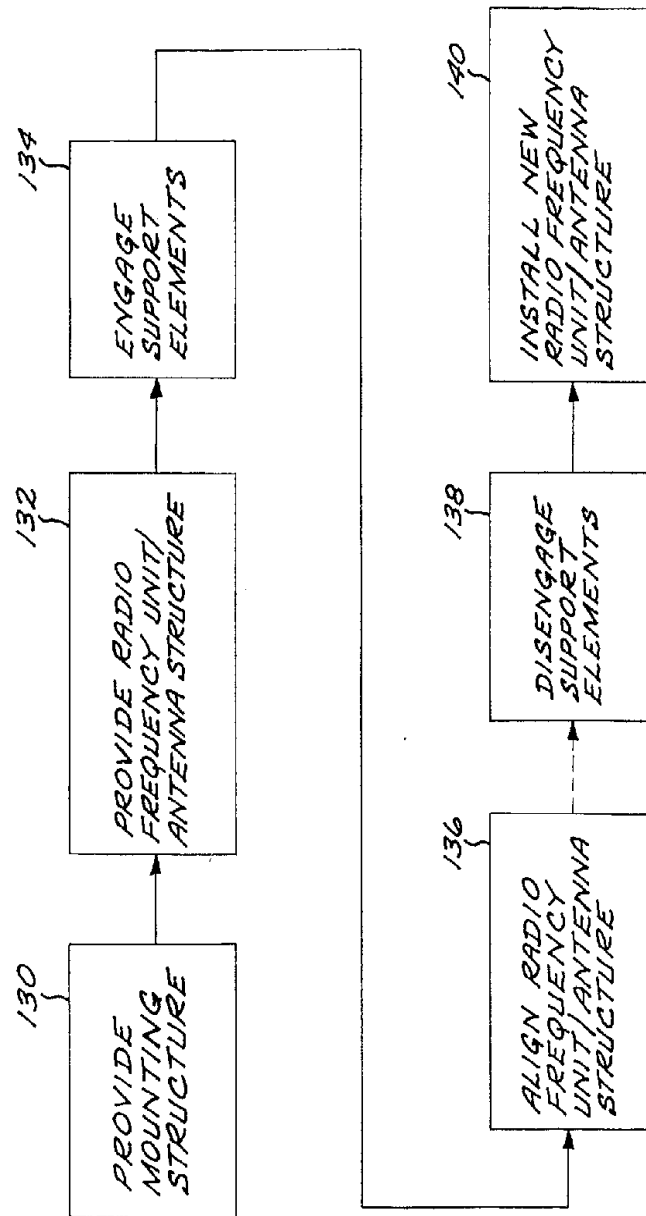


FIG. 10