



(22) Date de dépôt/Filing Date: 2014/04/11

(41) Mise à la disp. pub./Open to Public Insp.: 2014/10/12

(45) Date de délivrance/Issue Date: 2021/03/09

(30) Priorité/Priority: 2013/04/12 (IT MI2013A 000609)

(51) Cl.Int./Int.Cl. *B61F 5/12* (2006.01),
B61B 12/00 (2006.01), *B61B 9/00* (2006.01),
B61F 5/24 (2006.01)


(72) Inventeurs/Inventors:
BAVARESCO, FEDERICO, IT;
COCO, FRANCO, IT;
MOLLET, ALAIN, FR;
CONTE, GIUSEPPE, IT

(73) Propriétaire/Owner:
LEITNER S.P.A., IT

(74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : BOGIE DE SYSTEME DE TRANSPORT PAR CABLE ET SYSTEME DE TRANSPORT PAR CABLE
COMPORTANT UN TEL BOGIE

(54) Title: CABLE TRANSPORTATION SYSTEM BOGIE, AND CABLE TRANSPORTATION SYSTEM COMPRISING
SUCH A BOGIE

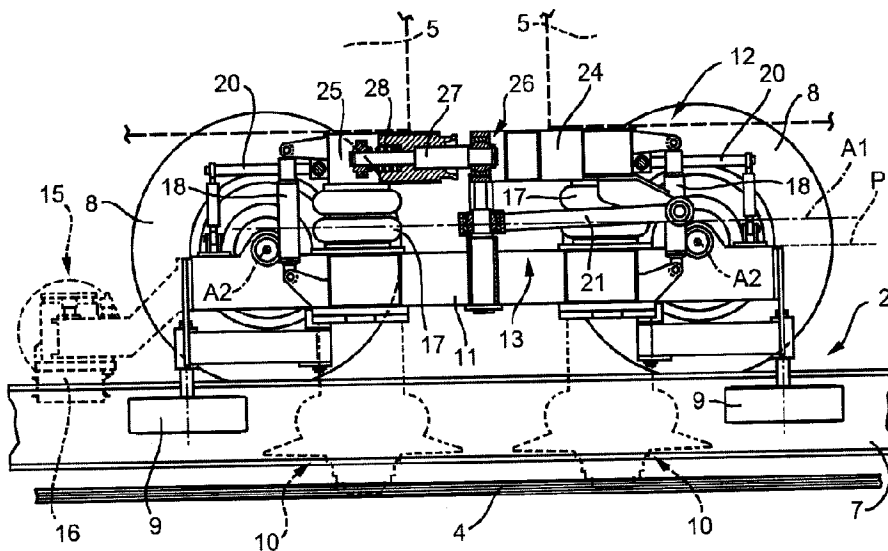

(57) Abrégé/Abstract:

A cable transportation system bogie extends along a longitudinal axis and has a main frame defining a supporting surface; a platform for supporting at least one car; and an articulated mechanism connected to the main frame and the platform, and designed to transmit pulling force between the main frame and the platform, and to permit movement of the platform with respect to the main frame in any direction.

ABSTRACT

A cable transportation system bogie extends along a longitudinal axis and has a main frame defining a supporting surface; a platform for supporting at least
5 one car; and an articulated mechanism connected to the main frame and the platform, and designed to transmit pulling force between the main frame and the platform, and to permit movement of the platform with respect to
10 the main frame in any direction.

(Figure 5)

CABLE TRANSPORTATION SYSTEM BOGIE, AND CABLE
TRANSPORTATION SYSTEM COMPRISING SUCH A BOGIE

The present invention relates to a cable
5 transportation system bogie.

More specifically, the present invention relates
to a cable transportation system bogie for supporting
at least one car and connected to rails defining a
given track along which to move the car and the bogie.

10 A cable transportation system of the above type
is described in EP 2,455,268 A1, in which the bogie
comprises a main frame connected to the haul cable; a
platform supporting a car; and a block of elastomer
interposed between the main frame and the platform.

15 Increasing use of transportation systems of the
above type, particularly for city transport, has led
to increased demand for improved passenger comfort,
which known cable transportation system bogies fail to
satisfy.

20 It is an object of the present invention to
provide a bogie for cable transportation systems of
the above type, designed to greatly enhance passenger
comfort.

According to the present invention, there is

provided a bogie for a cable transportation system,
the bogie extending along a longitudinal axis and
comprising a main frame defining a supporting surface;
a platform connectable to at least one car; and an
5 articulated mechanism connected to the main frame and
the platform, and designed to transmit pulling force
between the main frame and the platform, and to permit
movement of the platform with respect to the main
frame in any direction.

10 By virtue of the present invention, the
articulated mechanism provides for transmitting
pulling force between the main frame and the platform
without compromising the freedom of movement, within
given limits, of the platform with respect to the main
15 frame. In other words, the articulated mechanism
allows the platform to move to and from the main
frame, to move laterally with respect to the main
frame, to move back and forth with respect to the main
frame, to pitch with respect to the main frame, and to
20 roll with respect to the main frame.

In a preferred embodiment of the present
invention, the bogie comprises a plurality of
suspensions arranged on the supporting surface of the
main frame, located between the main frame and the

platform, and designed to absorb forces perpendicular to the supporting surface, and to adjust the platform with respect to the main frame.

The suspensions between the main frame and the
5 platform provide for improving passenger comfort in the car and, to a certain extent, for limiting movement of the platform with respect to the main frame.

The suspensions are preferably four in number and
10 equally spaced along the interface between the main frame and the platform.

In a preferred embodiment of the present invention, the suspensions are height-adjustable, possibly even automatically, according to the
15 passenger load.

In a preferred embodiment, the bogie comprises a plurality of shock absorbers between the main frame and the platform to decelerate movements perpendicular to the supporting surface.

20 Again for the purpose of improving passenger comfort, the shock absorbers are arranged close to the suspensions.

In a preferred embodiment of the present invention, the bogie comprises a plurality of lateral

shock absorbers located between the main frame and the platform and designed to decelerate movements crosswise to the longitudinal axis and parallel to the supporting surface.

5 In the present invention, lateral movements of the platform are also controlled and to a certain extent limited by the lateral shock absorbers.

In a preferred embodiment of the present invention, the bogie comprises at least one and
10 preferably two torsion bars, each connected to the main frame and the platform.

The torsion bar also serves to limit movement of the platform with respect to the main frame. More specifically, the torsion bar serves to limit roll of
15 the platform.

The articulated mechanism preferably comprises a longitudinal bar connected to the main frame and the platform by two respective universal joints.

Accordingly, the articulated mechanism may
20 conveniently be made from a small number of component parts.

In a preferred embodiment of the present invention, the platform comprises a first and second auxiliary frame arranged successively along the

longitudinal axis to support a first and second car respectively.

Dividing the platform into a first and second auxiliary frame permits movement between the first and
5 second car for greater passenger comfort.

More specifically, the first and second auxiliary frame are hinged to each other, preferably by a further universal joint, to allow the first and second auxiliary frame to pitch and roll with respect to each
10 other.

The first and second auxiliary frame are also connected elastically to each other in a direction parallel to the longitudinal axis.

This elastic connection also allows movements
15 substantially parallel to the longitudinal axis, so that two adjacent cars on the same bogie can move to and from each other.

Preferably, the first and second auxiliary frame each have two connecting points to a respective car.

20 In a preferred embodiment of the present invention, the bogie comprises lateral rollers, each connected elastically to the main frame to push the lateral roller outwards.

This configuration reduces lateral movement of

the bogie, especially around bends.

Preferably, each lateral roller is actually connected to the main frame by an arm hinged to the main frame.

5 The present invention also relates to a cable passenger transportation system designed for a high degree of passenger comfort.

According to the present invention, there is provided a cable passenger transportation system, the
10 system comprising a train comprising at least one car, and wherein each car is supported on two bogies, each as claimed in any one of the foregoing claims.

In a preferred embodiment of the present invention, the train comprises at least two cars, and
15 at least one bogie supports two cars.

The system preferably comprises at least one haul cable; and a coupling device for connecting the train to the haul cable. The coupling point of the coupling device is offset with respect to the longitudinal axis
20 of the bogie.

This configuration allows the cable transportation system to be equipped with two haul cables, preferably operated in opposite directions.

The train may be connected to the haul cable by

the bogie, by a coupling device fitted to the bogie,
or by a coupling device fitted directly beneath the
car.

Neither of the above coupling configurations
5 involves alterations to the bogie, and the articulated
mechanism is able to transfer pulling force from the
frame to the platform and from the platform to the
frame.

A number of non-limiting embodiments of the
10 present invention will be described by way of example
with reference to the attached drawings, in which :

Figure 1 shows a side view, with parts removed
for clarity, of a cable transportation system
employing bogies in accordance with the present
15 invention;

Figure 2 shows a larger-scale view in
perspective, with parts removed for clarity, of the
Figure 1 cable transportation system;

Figure 3 shows a section, with parts removed for
20 clarity, of the Figure 1 system;

Figure 4 shows a larger-scale plan view, with
parts removed for clarity, of the Figure 1 system
bogie;

Figure 5 shows a section, with parts removed for

clarity, of the Figure 4 bogie;

Figure 6 shows a larger-scale section, with parts removed for clarity, of a detail of the Figure 5 bogie;

5 Figures 7 and 8 show a plan view and section respectively, with parts removed for clarity, of a bogie in accordance with a variation of the present invention;

Figure 9 shows a side view, with parts removed
10 for clarity, of a cable transportation system in accordance with an alternative embodiment of the present invention.

Number 1 in Figure 1 indicates as a whole a cable transportation system.

15 Cable transportation system 1 comprises a track 2; a train 3 on track 2; and a haul cable 4 for moving train 3 along track 2. Train 3 comprises a plurality of cars 5, each for transporting passengers, and each supported at opposite ends on two bogies 6. In the
20 Figure 1 example, each bogie 6 supports the adjacent ends of two communicating cars 5 connected in articulated manner by bogie 6.

Train 3 runs along the track in a direction D1 and in the opposite direction.

With reference to Figure 2, track 2 is defined by two parallel rails 7. Each rail 7 is preferably defined by an HE beam. Bogie 6 preferably comprises four wheels 8, which rest on rails 7; and four lateral
5 rollers 9 contacting the sides of rails 7. Wheels 8 rotate about respective axes A2. Lateral rollers 9 rotate about respective axes A3. Bogie 6 comprises coupling devices 10 for connecting bogie 6 to haul
10 cable 4. In the example shown, bogie 6 comprises two fixed-clamping coupling devices 10 with a cable coupling point offset with respect to the centreline of bogie 6.

In an embodiment not shown of the present invention, the bogie is connected to the haul cable by
15 a releasable coupling device.

With reference to Figure 3, bogie 6 extends along a longitudinal axis A1. Bogie 6 comprises a main frame 11 defining a supporting surface P; a platform 12
11 connectable to at least one car 5; and an articulated
20 mechanism 13 connected to main frame 11 and platform 12, and designed to transmit pulling force between main frame 11 and platform 12. Articulated mechanism 13 also allows platform 12 to move with respect to main frame 11 with a plurality of degrees of freedom,

and at the same time transmits pulling force effectively between haul cable 4 and car 5 in travelling direction D1.

With reference to Figure 4, main frame 11 supports wheels 8 about respective axes A2 parallel to supporting surface P, and lateral rollers 9 about respective axes A3 perpendicular to supporting surface P. Lateral rollers 9 are connected elastically to main frame 11 so as to exert outward thrust - in the example shown, against rails 7 - to ensure bogie 6 engages and is positioned correctly with respect to rails 7.

Construction-wise, each lateral roller 9 is supported for rotation about respective axis A3 by an arm 14, in turn hinged to main frame 11. A spring, not shown in the attached drawings, serves to push arm 14 and lateral roller 9 outwards.

Bogie 6 also comprises a brake 15 fitted to main frame 11. Brake 15 interferes with a rail 7, and preferably comprises a brake calliper 16 for gripping part of rail 7.

Bogie 6 comprises a plurality of suspensions 17 between main frame 11 and platform 12. More specifically, bogie 6 has four, preferably air-

powered, selectively adjustable suspensions 17. Suspensions 17 are evenly distributed along main frame 11, preferably at the corners of a rectangle. Suspensions 17 are designed to absorb forces
5 perpendicular to supporting surface P.

Bogie 6 comprises a plurality of shock absorbers 18 for decelerating movements perpendicular to supporting surface P. More specifically, bogie 6 comprises four shock absorbers 18, each located next
10 to a respective suspension 17 and hinged at the ends to main frame 11 and platform 12.

Bogie 6 comprises a plurality of lateral shock absorbers 19 for decelerating movement, crosswise to longitudinal axis A1 and substantially parallel to
15 supporting surface P, between platform 12 and the main frame. More specifically, bogie 6 comprises two lateral shock absorbers 19, each connecting main frame 11 to platform 12, and each having two ends hinged to main frame 11 and platform 12 respectively.

20 Bogie 6 comprises at least one and preferably two torsion bars 20, as shown in the attached drawings. Each torsion bar 20 is connected to main frame 11 and platform 12, and serves to limit roll of platform 12 with respect to main frame 11.

With reference to Figure 5, articulated mechanism 13 comprises a longitudinal bar 21 connected to main frame 11 and platform 12 by two respective universal joints 22 and 23.

5 As shown more clearly in Figure 6, platform 12 comprises two auxiliary frames 24 and 25 for respectively supporting two adjacent cars 5 arranged successively along longitudinal axis A1.

Each auxiliary frame 24, 25 is connected to two
10 suspensions 17, two shock absorbers 18, and a torsion bar 20. Auxiliary frame 24 is also connected to lateral shock absorbers 19 (Figure 4) and to articulated mechanism 13.

Auxiliary frames 24 and 25 are also connected to
15 each other.

As shown more clearly in Figure 6, auxiliary frames 24 and 25 are preferably hinged to each other by a universal joint 26.

Auxiliary frames 24 and 25 are connected
20 elastically to each other in a direction parallel to longitudinal axis A1.

More specifically, a pin 27 for connecting auxiliary frames 24 and 25 extends parallel to longitudinal axis A1, and has one end connected to

auxiliary frame 24 by universal joint 26, and the other end fitted to auxiliary frame 25 to slide parallel to it and with the interposition of a spring 28.

5 In the Figure 7 and 8 variation, bogie 6 is equipped with a one-piece platform 29.

 In this configuration, bogie 6 is connected to only one car 5 (Figure 1).

 Number 30 in the Figure 9 embodiment indicates a
10 cable transportation system comprising a track 31; a train 32 on track 31; and a haul cable 33 for moving train 32 along track 31. Train 32 comprises a plurality of cars 34, each for transporting passengers, and each supported at opposite ends on two
15 bogies 6. In the Figure 1 example, each bogie 6 only supports one car 34.

 One of cars 34 comprises a coupling device 35 for connecting train 32 to haul cable 33. Each bogie 6 is equipped with vertical and/or horizontal and/or
20 inclined deviator systems 36 for the haul cable 33.

 Clearly, changes may be made to the bogie and system as described and claimed, without, however, departing from the scope of the accompanying Claims.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS
CLAIMED ARE DEFINED AS FOLLOWS:

1) A bogie for a cable transportation system, the bogie
5 extending along a longitudinal axis and comprising a main frame
defining a supporting surface; a platform located over the main
frame and designed to support at least one car; and an
articulated mechanism connected to the main frame and the
platform, and designed to transmit pulling force between the
10 main frame and the platform, and to permit movement of the
platform with respect to the main frame in any direction.

2) The bogie as claimed in Claim 1, and comprising a
plurality of suspensions located between the main frame and the
platform, and designed to absorb forces perpendicular to the
15 supporting surface, and to adjust the platform with respect to
the main frame.

3) The bogie as claimed in Claim 1, and comprising a
plurality of shock absorbers located between the main frame and
the platform, and designed to decelerate movements,
20 perpendicular to the supporting surface, between the main frame
and the platform.

4) The bogie as claimed in Claim 1, and comprising a
plurality of lateral shock absorbers located between the main
frame and the platform, and designed to decelerate movements,

crosswise to the longitudinal axis and parallel to the supporting surface, between the platform and the main frame.

5 5) The A bogie as claimed in Claim 1, and comprising at least one torsion bar connected to the main frame and the platform.

6) The bogie as claimed in Claim 1, and comprising at least two torsion bars connected to the main frame and the platform.

10 7) The bogie as claimed in Claim 1, wherein the articulated mechanism comprises a longitudinal bar connected to the main frame and the platform by two respective universal joints.

8) The bogie as claimed in Claim 1, wherein the platform comprises a first and second auxiliary frame arranged successively along the longitudinal axis to support a first and second car respectively.

15 9) The bogie as claimed in Claim 8, wherein the first and second auxiliary frame are hinged to each other.

10) The bogie as claimed in Claim 9, wherein the first and second auxiliary frame are hinged to each other by a further universal joint.

20 11) The bogie as claimed in Claim 8, wherein the first and second auxiliary frame are connected elastically to each other in a direction parallel to the longitudinal axis.

25 12) The bogie as claimed in Claim 8, wherein the first and second auxiliary frame each have two connecting points to a respective car.

13) The bogie as claimed in Claim 1, and comprising lateral rollers, each lateral roller connected elastically to the main frame to push the lateral roller outwards.

14) The bogie as claimed in Claim 13, wherein said each
5 lateral roller is connected to the main frame by an arm hinged to the main frame.

15) The cable passenger transportation system, the system comprising a train comprising at least one car, and wherein each car is supported on two bogies, each as claimed in Claim 1.

10 16) The system as claimed in Claim 15, wherein the train comprises at least two cars, and at least one bogie supports two cars.

17) The system as claimed in Claim 15, and comprising at least one haul cable; and a coupling device for connecting the
15 train to the haul cable.

18) The system as claimed in Claim 17, wherein a coupling point of the coupling device is offset with respect to the longitudinal axis of the bogie.

19) The system as claimed in Claim 17, wherein the coupling
20 device is mounted on the bogie.

20) The system as claimed in Claim 18, wherein the coupling device is mounted on the main frame.

21) The system as claimed in Claim 17, wherein the coupling
device is mounted on a car.
25

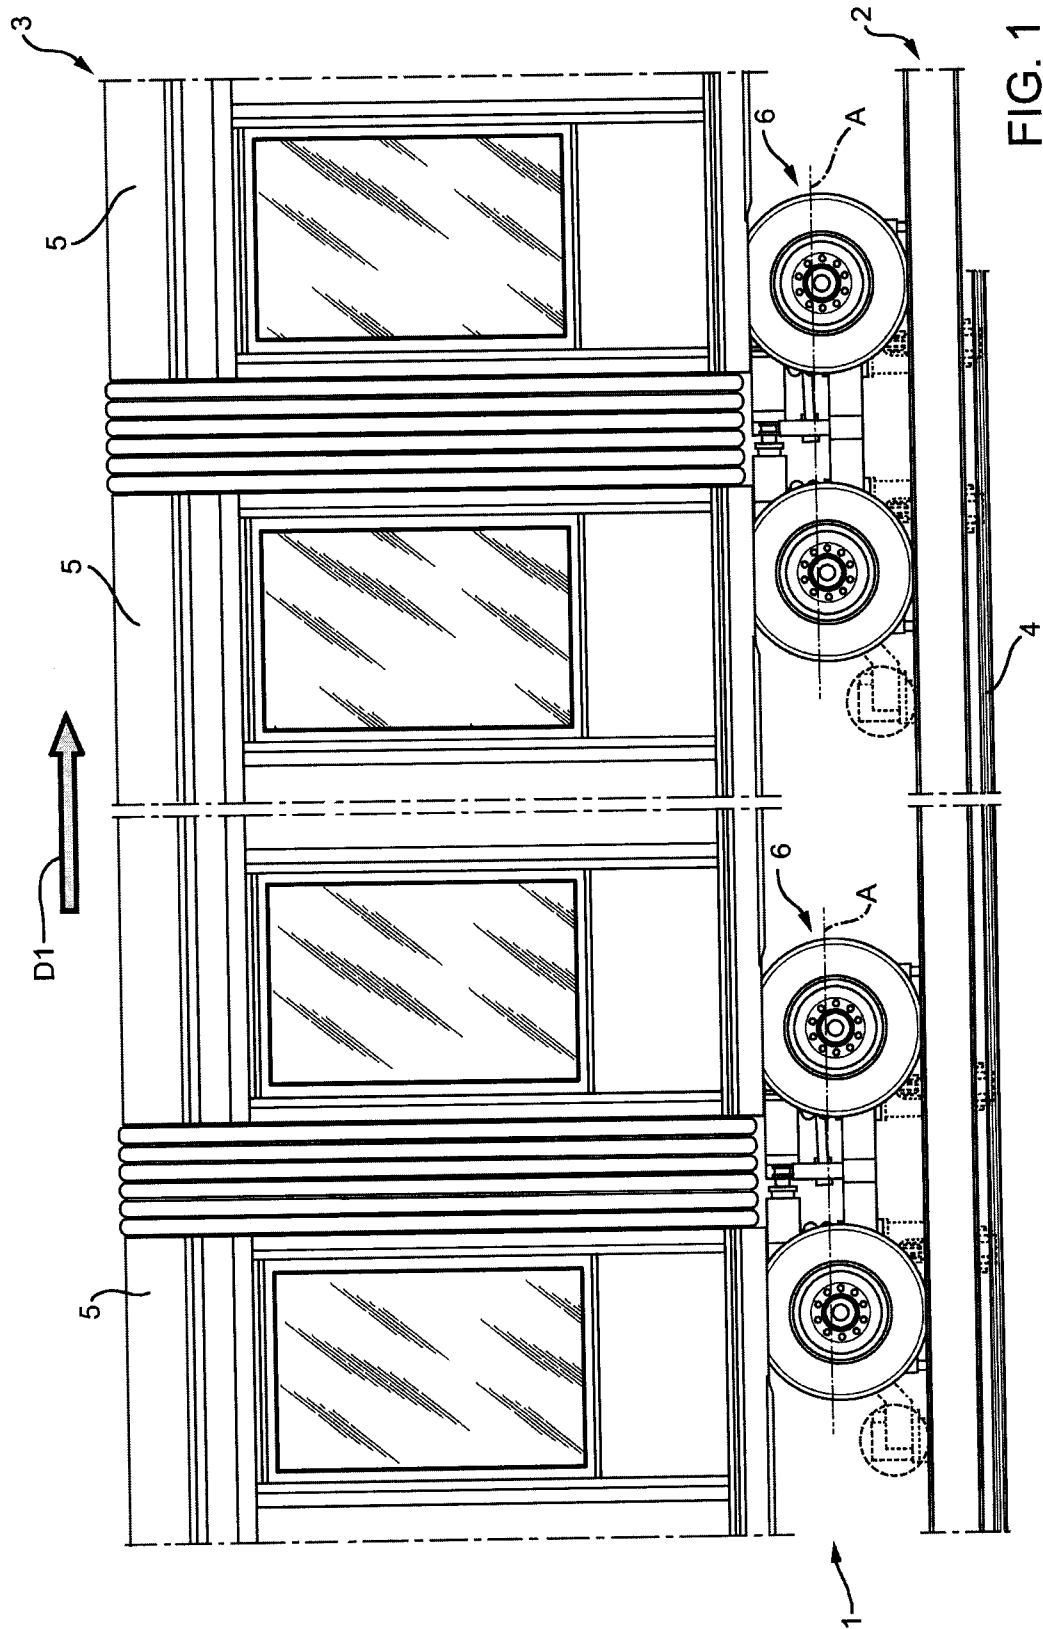
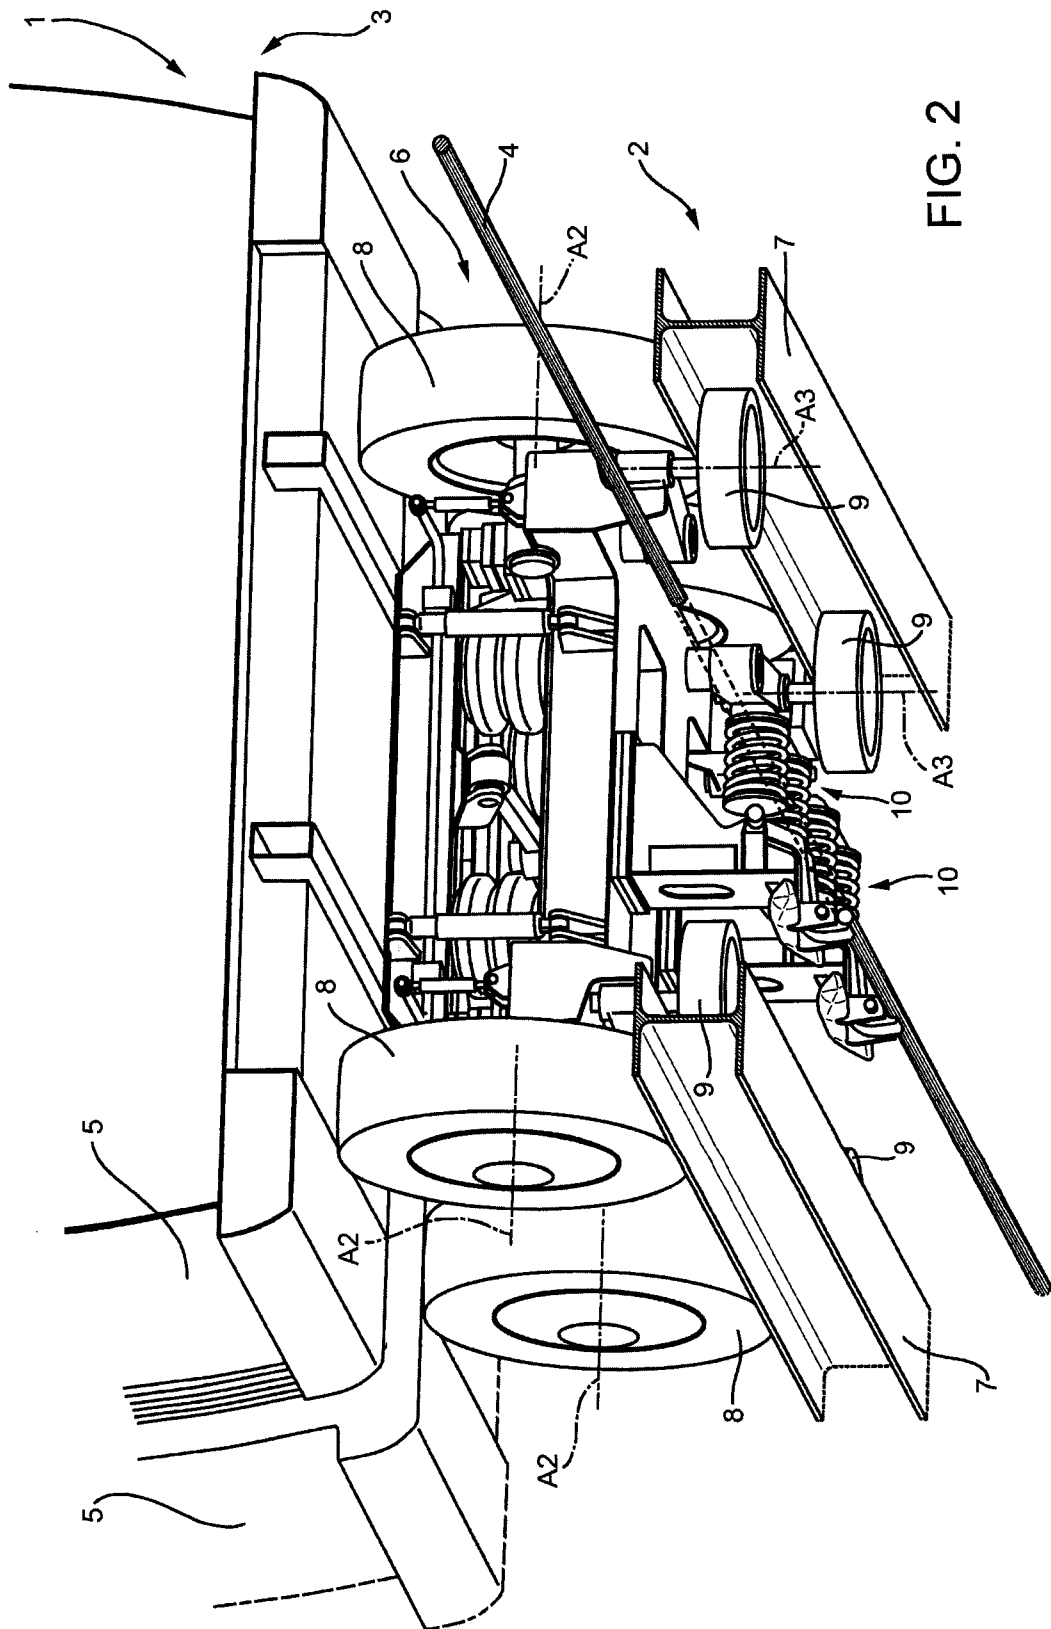
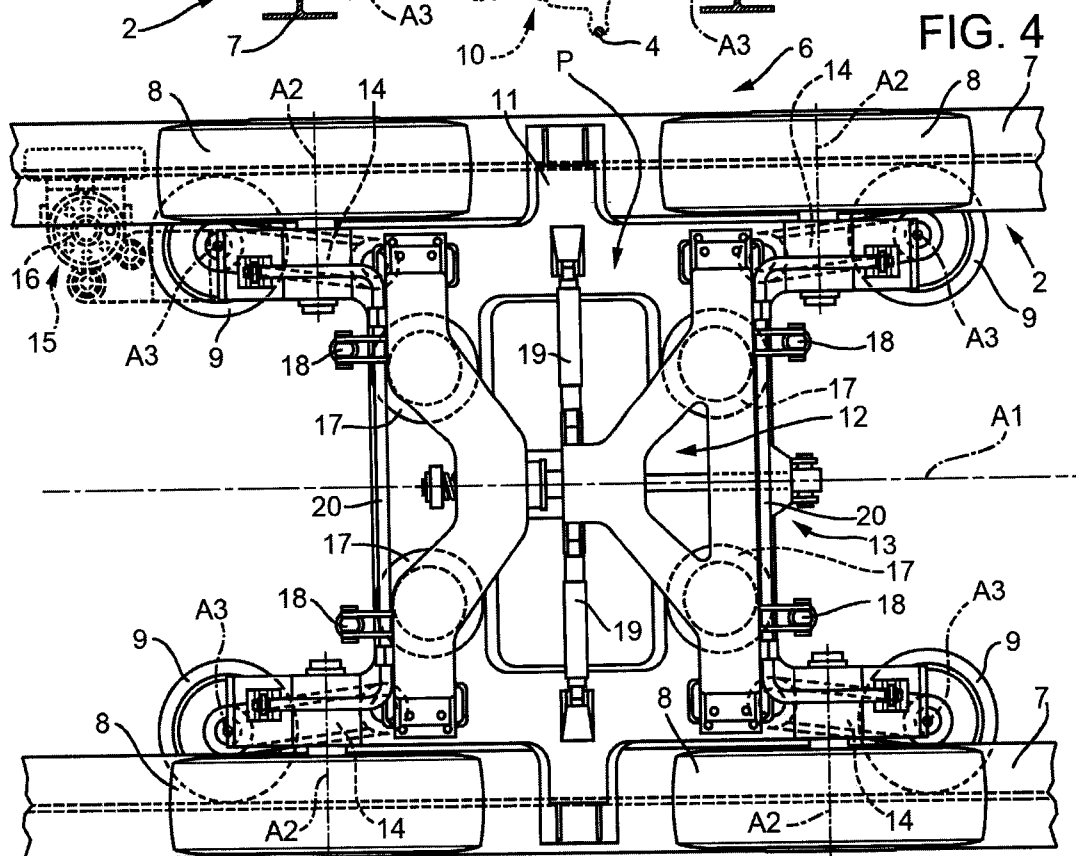
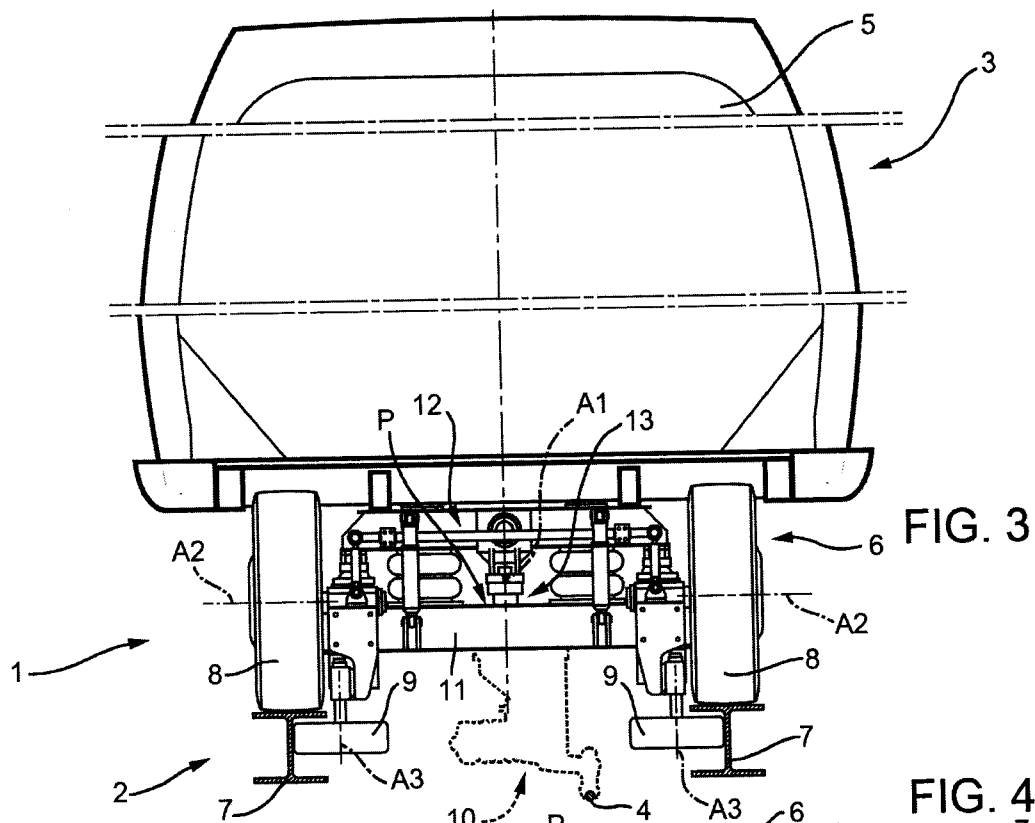


FIG. 1





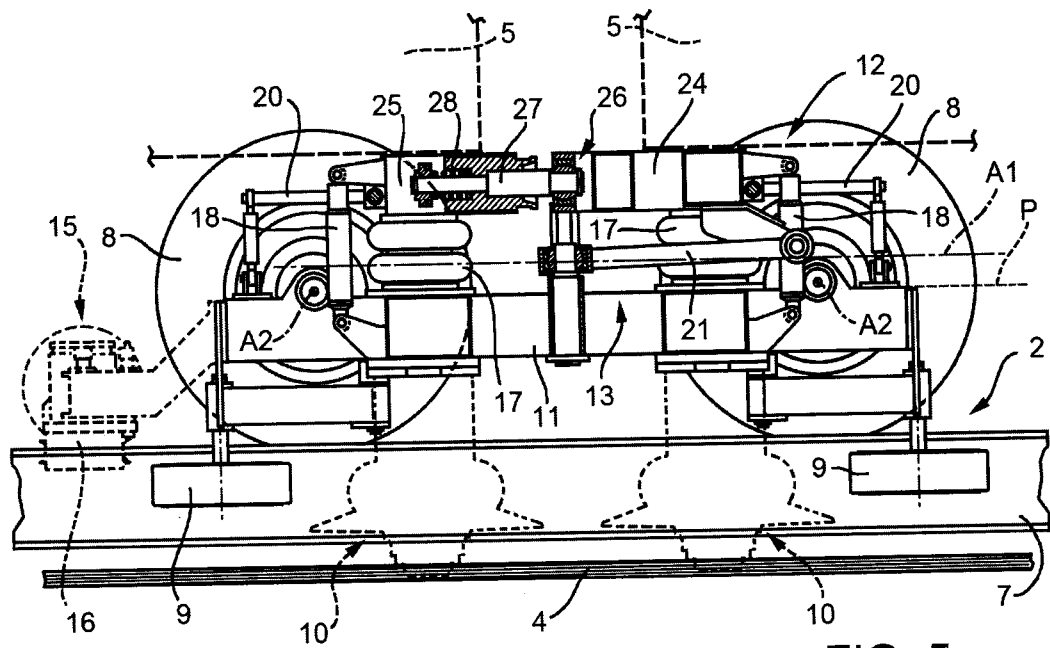


FIG. 5

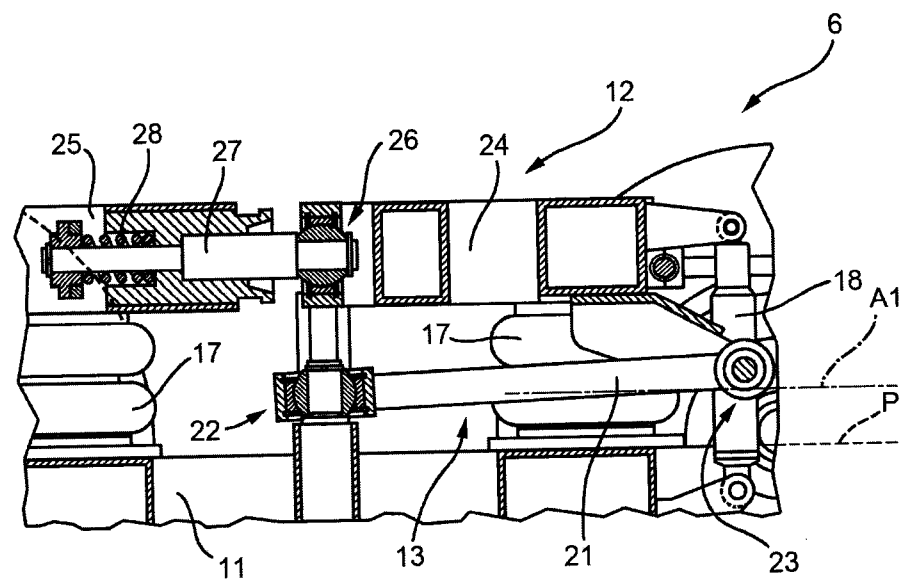


FIG. 6

