CONVENTION - COMPANY - PCT
(By Employment Contract & Applicant is Applicant in Basic Appln)

68738/94

P/00/008b
Section 29 (1)
Regulation 3.1(2)

AUSTRALIA

PATENTS ACT 1990

NOTICE OF ENTITLEMENT

We, BRITISH TELECOMMUNICATIONS public limited company, of 81 Newgate Street, London, EC1A 7AJ, England, United Kingdom, being the applicant and nominated person in respect of Application No. 62866/94, state the following:-

1. The person nominated for the grant of the patent has entitlement from the actual inventors as follows:

If a patent were granted to the actual inventors in respect of the invention the nominated person would be entitled to have the patent assigned to it.

2. The person nominated for the grant of the patent is the applicant of the basic application listed in the declaration under Article 8 of the PCT.

3. The basic application listed in the declaration under Article 8 of the PCT is the first application made in a Convention country in respect of the invention.

For and on behalf of
BRITISH TELECOMMUNICATIONS public limited company

..... 13 FEBRUARY 1996

(Signature) (Date)

Name: ROBERTS, SIMON CHRISTOPHER

Title: PATENT ATTORNEY

File: 18491

SHELSTON WATERS
60 MARGARET STREET, SYDNEY, AUSTRALIA

AU9462866

(12) PATENT ABRIDGMENT (11) Document No. AU-B-62866/94
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 687384

(54) Title
DISPERSION COMPENSATION IN AN OPTICAL COMMUNICATIONS SYSTEM

International Patent Classification(s)
(51)[5] H04B 010/18 H01S 003/25

(21) Application No. : 62866/94 (22) Application Date : 23.03.94

(87) PCT Publication Number : WO95/03653

(30) Priority Data

(31) Number	(32) Date	(33) Country
9315011	20.07.93	GB UNITED KINGDOM

(43) Publication Date : 20.02.95

(44) Publication Date of Accepted Application : 26.02.98

(71) Applicant(s)
BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY

(72) Inventor(s)
MARTIN CHRISTOPHER TATHAM; GERARD SHERLOCK

(74) Attorney or Agent
SHELSTON WATERS , Level 21, 60 Margaret Street, SYDNEY NSW 2000

(56) Prior Art Documents
EP 375253
JP 04-081724

(57) Claim

1. A method of compensating for dispersion in an optical communications system, the method comprising the steps of

i) positioning a semiconductor optical amplifier between a first and a second length of optical fibre,

ii) launching optical signals into the first length of optical fibre,

iii) directing optical signals emerging from the first length of optical fibre into the semiconductor optical amplifier,

iv) supplying optical pump radiation to the semiconductor optical amplifier so that the optical signals and the pump radiation interact within the semiconductor optical amplifier and generate the phase conjugate of the optical signals, and

.../2

v) launching the phase conjugate optical signals into the second length of optical fibre.

15 An optical communications system comprising a transmission path including a first optical fibre and a second optical fibre, an optical signal source for launching optical signals into the first optical fibre, an optical pump source for generating pump radiation and a semiconductor optical amplifier having an input from the first optical fibre and an output to the second optical fibre, wherein in use, the semiconductor optical amplifier receives the pump radiation and the optical signals after said signals have propagated through the first optical fibre, and generates phase conjugate replicas of the optical signals, which replicas are launched into the second optical fibre

OPI DATE 20/02/95 APPLN. ID 62866/94
AOJP DATE 30/03/95 PCT NUMBER PCT/GB94/00602

AU9462866

CT)

(51) International Patent Classification 6 :
H04B 10/18, H01S 3/25

A1

(11) International Publication Number: WO 95/03653

(43) International Publication Date: 2 February 1995 (02.02.95)

(21) International Application Number: PCT/GB94/00602

(22) International Filing Date: 23 March 1994 (23.03.94)

(30) Priority Data:
9315011.8 20 July 1993 (20.07.93) GB

(71) Applicant *(for all designated States except US)*: BRITISH TELECOMMUNICATIONS PUBLIC LIMITED COMPANY [GB/GB]; 81 Newgate Street, London EC1A 7AJ (GB).

(72) Inventors; and
(75) Inventors/Applicants *(for US only)*: TATHAM, Martin, Christopher [GB/GB]; 73 Rosebery Road, Ipswich, Suffolk IP4 1PR (GB). SHERLOCK, Gerard [IE/GB]; 54E Westerfield Road, Ipswich, Suffolk IP4 2UT (GB).

(74) Agent: ROBERTS, Simon, Christopher; BT Group Legal Services, Intellectual Property Dept., 13th floor, 151 Gower Street, London WC1E 6BA (GB).

(81) Designated States: AU, CA, FI, JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published
With international search report.

687384

(54) Title: DISPERSION COMPENSATION IN AN OPTICAL COMMUNICATIONS SYSTEM



(57) Abstract

A method of compensating for dispersion in an optical communications system, the method comprising the steps of: positioning a semiconductor optical amplifier between a first and a second length of optical fibre, launching optical signals into the first length of optical fibre, directing optical signals emerging from the first length of optical fibre into the semiconductor optical amplifier, supplying optical pump radiation to the semiconductor optical amplifier so that the optical signals and the pump radiation interact within the semiconductor optical amplifier and generate the phase conjugate of the optical signals, and launching the phase conjugate optical signals into the second length of optical fibre.

DISPERSION COMPENSATION IN AN OPTICAL COMMUNICATIONS SYSTEM

The present invention relates to methods and apparatus for compensating for dispersion in optical communications systems, and in particular to methods and apparatus employing optical phase conjugation.

In order to have a high transmission capacity, an optical communications system must have low dispersion, this means that pulses of light travelling along the waveguide, generally an optical fibre, of the optical communications system should not suffer significant distortion. This distortion may arise from a number of sources. If the optical communications system employs multi-mode fibre, each of the different modes will have a different group velocity, thus modulated signals, i.e. pulses of light passing down the multi-mode optical fibre, which are made up of a number of different modes of the waveguide will experience a different group delay from each of their modes. This causes a pulse formed from more than one mode to spread out as it propagates, and is called intermodal dispersion. Once consecutive pulse have spread out so that they are no longer distinguishable, one from the other, the information transmission limit of the optical communications system has been reached. This limit is expressed as a bandwidth distance product since it will be reached at a higher bit rate for a shorter optical communications link. Intermodal dispersion between the modes of multi-mode fibres is one of the reasons why modern optical communications systems have moved to the use of single mode optical fibre which, since it only supports one optical mode, does not suffer from intermodal dispersion.

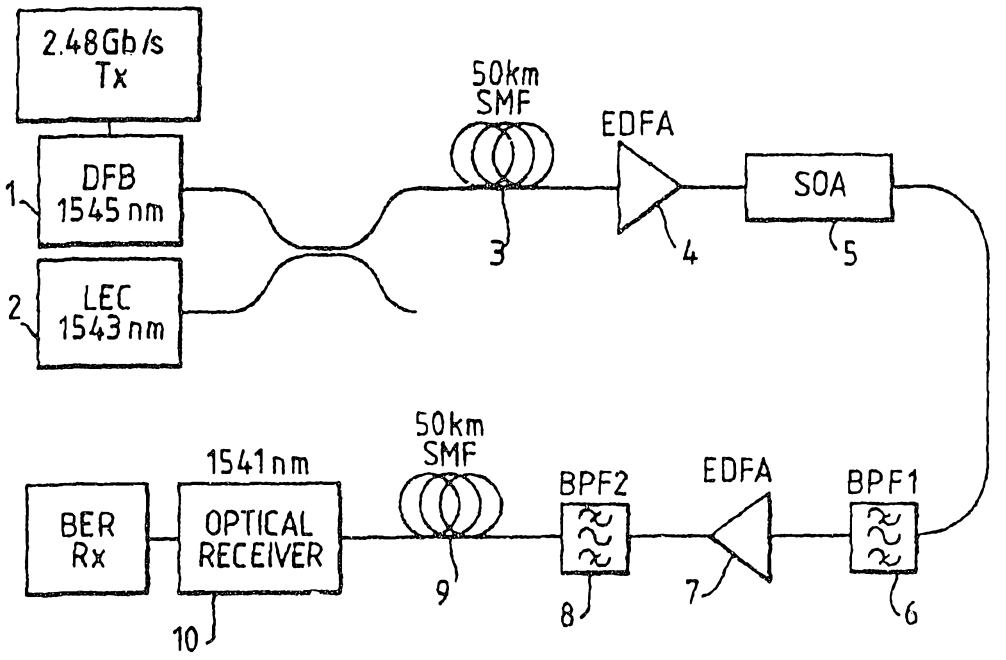However single mode optical communications systems do suffer from pulse spreading due to the small, but finite bandwidth of the optical source employed. This type of pulse spreading is called chromatic dispersion, and is due to two effects. Firstly, material dispersion is present because the refractive index of a dispersive medium, such as silica from

which optical fibres are typically made, depends on wavelength. Secondly, waveguide dispersion, since the propagation characteristics of the single mode supported by a single mode fibre also depend on wavelength. Since the material dispersion of silica is positive at most wavelengths of interest for optical communications systems, and the waveguide dispersion for single mode fibres is negative, these two effects can be carefully balanced in a well designed optical fibre so as to give zero total, chromatic dispersion at the operating wavelength of the optical communications system.

The vast majority of optical communications systems which have been installed worldwide contain single mode optical fibre which has been designed for use in the 1.3μm low loss window, and as such has low chromatic dispersion at this wavelength. In recent years the rapid development of erbium doped fibre amplifiers (EDFA) has meant that fibre loss, and thus the power budget of optical communications systems, is no longer the fundamental limit to achievable transmission distance. However these EDFAs are only operable in the 1.55μm optical transmission window so that if existing optical communication links are to be upgraded, for example to operate at higher bit rates, these systems must operate in the 1.55μm at window, over optical fibre designed for use at 1.3μm. Thus the fundamental bandwidth distance product transmission limit when upgrading an existing optical communications system is that imposed by dispersion. Furthermore, even for systems having fibre designed for use at 1.55μm, as very high bit rates are approached, unless very narrow linewidth, externally modulated lasers are employed, dispersion again is the fundamental limit to transmission capacity.

A number of methods of compensating for dispersion are known. In one such technique the optical signal, at the transmitter end of the optical communications system, is deliberately distorted before being launched into the optical fibre. The distortion imposed upon the optical signal must

be calculated so as to be compensated by the dispersion that the optical signal subsequently suffers during propagation along the optical fibre. An example of such a technique is that disclosed by Koch and Alferness in "Dispersion Compensation By Active Predistorted Signals Synthesis" Journal of Lightwave Technology, volume LT-3, no. 4, August 1985. In order to successfully apply these techniques the transmission characteristics of the particular optical fibre employed, and the length of the transmission link need to be known so that the predistorted signal can be correctly synthesised. Generally the optical source employed in these systems needs to be sophisticated, and thus complex, so as to allow independent control of the amplitude and frequency of the optical signal. The problems inherent in predistortion dispersion compensation systems are considerably exacerbated for higher bit rate systems, where indeed dispersion compensation is of greatest importance.

In a second, known dispersion compensation technique a negative dispersion optical fibre is employed to compensate either at the transmission end, or at the receiver end of the optical link for the positive dispersion suffered by optical signals propagating along the transmission optical fibre. When optical signals at 1.55μm are transmitted along a transmission optical fibre having a dispersion zero at 1.3μm, the signals will suffer positive dispersion i.e. the sign of the differential of their group delay with wavelength, will be positive, and will typically be of the order of 17ps/km/nm. Single mode optical fibre can be specifically designed to have a large negative chromatic dispersion, by choosing the waveguide parameters to give large negative waveguide dispersion, for example a fibre having a core of small diameter and high refractive index will have negative waveguide dispersion. Such a scheme was employed by Izadpanah et al in "Dispersion Compensation In 1310nm Optimised SMFs Using Optical Equaliser Fibre, EDFAs And 1310/1550nm WDM" Electronics Letters, 16 July 1992, volume 28, no. 15, page 1469. Izadpanah et al employed a specially

designed negative dispersion fibre having a dispersion of -45ps/km/nm. The length of negative dispersion fibre required was approximately one third of the length of the transmission link over which dispersion was being compensated. Such large lengths of additional fibre are clearly inconvenient and expensive. Furthermore due to the high level of doping used in the core, and the small core size this fibre had a relatively high loss, so that amplification of the optical signal is essential, even if the bit rate of the system is not increased.

A third form of dispersion compensation has been theoretically proposed by Yariv et al in "Compensation For Channel Dispersion By Non-linear Optical Phase Conjugation" Optics Letters, volume 4, no. 2, February 1979. Yariv et al proposed that by generating an optical phase conjugate replica of the optical signal after it has passed through one half of the optical transmission link, and launching this phase conjugate replica into the second half of the optical transmission link, the effects of the dispersion suffered by the optical signal in the first half of the link will be reversed and the optical signal will be restored to its original shape. This technique relies on the time inversion of the group velocity dispersion of the optical signal caused by phase conjugation, and thus requires that the dispersion in the second half of the optical transmission link is the same as the dispersion in the first half, if it is to be fully compensated for.

Yariv's proposal has been implemented in an optical communications system by employing non-degenerate four wave mixing (NDFWM) in dispersion shifted fibre (DSF) to provide the necessary optical phase conjugation. In this case the phase conjugate optical signals travel in the same direction as the copropagating pump light and original optical signal. This technique has been demonstrated by Watanabe et al in "Compensation Of Chromatic Dispersion In A Single Mode Fibre BY Optical Phase Conjugation" IEEE Photonics Technology Letters, volume 5, no. 1, January 1993 and by Jopson et al in

"Compensation Of Fibre Chromatic Dispersion By Spectral Inversion" Electronics Letters, 1 April 1993, volume 29, no. 7. In both cases long lengths, over 20km, of carefully designed DSF were required. A DSF is a fibre which has been designed to have zero dispersion in the 1.55μm telecommunications window, i.e. its dispersion zero has been shifted from 1.3μm to around 1.55μm. In addition to this requirement, Watanabe and Jopson furthermore needed to arrange for the wavelength of the pump light required for NDFWM in the DSF to be the same as the zero dispersion wavelength of the DSF, in order to achieve sufficient phase matching between the pump and the optical signals. This requirement for phase matching over the 20km of the DSF is severe, and means that the wavelength of the pump light must be carefully controlled e.g. over 20km with a pump and signal separation of 2nm the pump wavelength must be within approximately 1nm of the dispersion zero wavelength. Furthermore this requirement becomes more severe as the length of the DSF increases, and rapidly more severe as the wavelength separation of the pump and signal is increased. The efficiency of conversion of the optical signal to its phase conjugate replica achieved by both Watanabe and Jopson is low, approximately -25dB in both cases. Thus the phase conjugate signal to be launched into the second half of the optical transmission link is at a very low level.

It has been suggested by Murata et al in "THz Optical Frequency Conversion Of 1 Gb/s Signals Using Highly Non-degenerate Four Wave Mixing In An InGaAsP Semiconductor Laser" IEEE Transactions Photonics Technology Letters, volume 3, no. 11, November 1991, that Yariv's phase conjugation technique for dispersion compensation could be implemented by employing a semiconductor Fabry-Perot laser as the phase conjugating device. This suggestion has not, however been demonstrated.

Another known technique for dispersion compensation is described in "Chirping Compensation Using a Two-Section Semiconductor Laser Amplifier" - Journal of Lightwave Technology, vol. 10, no. 9, Sept 1992, pages 1247-1254.

The present invention provides a method of compensating for dispersion in an optical communications system, the method comprising the

AUSTRALIAN PATENT OFFICE

AMENDED SHEET

steps of

i) positioning a semiconductor optical amplifier between a first and a second length of optical fibre,

ii) launching optical signals into the first length of optical fibre,

iii) directing optical signals emerging from the first length of optical fibre into the semiconductor optical amplifier,

iv) supplying optical pump radiation to the semiconductor optical amplifier so that the optical signals and the pump radiation within the semiconductor ptical amplifier and generate the phase conjugate of the optical signals, and

v) launching the phase conjugate optical signals into the second length of optical fibre.

The method of the present invention thus overcomes the disadvantages inherent in using DSF to provide optical phase conjugation, by employing a semiconductor optical amplifier. These devices are of a short length, of order one hundred microns, so that phase matching between the pump radiation and the optical signal may be easily achieved. Since semiconductor optical amplifiers have gain, the efficiency of the optical phase conjugation process is far higher than for passive DSFs.

The applicants have surprisingly found the method of the present invention successful in compensation for dispersion in optical communications systems, despite the fact that there is substantially no cavity enhancement of the optical phase conjugation in a semiconductor optical amplifier. The theoretical suggestion by Murata et al leads

the skilled man to expect that substantial cavity enhancement of the four wave mixing process by a resonant structure, for example a Fabry-Perot laser, is essential to the achievement of sufficient optical phase conjugation efficiency. The applicants have discovered, not only that this is not the case, but that there are significant advantages in employing a semiconductor optical amplifier rather than a semiconductor laser. When a significant degree of cavity, or resonance, enhancement is employed the pump and optical signal must both be accurately controlled in wavelength so that they are coincident with one of the cavity modes, thus requiring accurate wavelength control over these signals. The pump radiation wavelength in particular must coincide with that of one of the cavity modes of the Fabry-Perot laser to injection lock it, and these modes typically have an injection locking bandwidth of only a few GHz. Furthermore the use of resonance enhancement inherentl places a limitation on the modulation bandwidth that can be imposed on the optical signal. This is because if the bandwidth of the optical signal begins to approach the bandwidth of the cavity resonance, the cavity resonance will act as a spectral filter to the optical signal, causing distortion of the modulation pattern of the optical signal. This effect will become more severe as the modulation bandwidth of the optical signal increases, and particular far more severe if the optical signals are not transform-limited, for example if the transmitter has significant linewidth or suffers from chirp. A further disadvantage, inherent to all resonant devices, is their instability under temperature variations or mechanical vibration.

Preferably a semiconductor optical amplifier employed in the method of the present invention has a variation in gain with wavelength, caused by facet reflections, of less than 5dB i.e. the amplitude of the so called "gain ripple" is less than 5dB. The Applicants have determined that semiconductor optical amplifiers having a gain ripple less than 5dBs will not suffer substantially from the

disadvantages of cavity enhancement, for example the optical signal bandwidth restriction discussed above. As will be described hereinafter such semiconductor optical amplifiers do, however, benefit to a small degree from some cavity enhancement.

Preferably the semiconductor optical amplifier employed in the present invention has facet reflectivities of less than 10^{-3}. This effectively ensures that, for single pass gains of up to 20 dB, the semiconductor optical amplifier is a travelling wave amplifier, having no cavity enhancement.

Preferably the wavelength of the optical signal and the wavelength of the pump radiation are separated by at least 1nm. This ensures that the four wave mixing undergone by the optical signals and the pump radiation is highly non-degenerate. This is desirable since highly non-degenerate FWM (NDFWM) is based on an ultra-fast intraband optical non-linear gain process which has a very short response time, less than 1ps, and thus allows the present wavelength dispersion compensation technique to be applicable to optical communications systems operating at bit rates up to tera bits per second.

Advantageously the gain of the semiconductor optical amplifier is saturated by the pump radiation. The applicants have surprisingly discovered that operating the semiconductor optical amplifier under saturation increases the ratio of the phase conjugated signal to the background spontaneous emission.

In addition, or alternatively, the semiconductor optical amplifier is advantageously operated with a high injection current. Although both the level of the phase conjugated optical signals, and the background spontaneous emission increase with increasing injection current, it has been found that the rate of increase in the level of the phase conjugated optical signal is greater than that of the background spontaneous emission, so that the signal to background ratio may be increased by increasing the injection

current.

Although the optical pump radiation may be supplied to the semiconductor optical amplifier via the first length of optical fibre, advantageously the optical pump radiation is supplied to the semiconductor optical amplifier from an optical pump source co-located with the semiconductor optical amplifier. This arrangement ensures that the optical pump radiation does not suffer, for example from Brillouin scattering in the first optical fibre.

Advantageously, the optical pump radiation supplied to the semiconductor optical amplifier is generated within the semiconductor optical amplifier. This may be achieved, for example, if both the semiconductor optical amplifier and the optical pump source are comprised by a semiconductor device having wavelength selective feedback means, for example a distributed feedback (DFB) laser, or a distributed Bragg reflector laser. In this case the pump radiation for four wave mixing, rather than being supplied to the semiconductor optical amplifier from an optical pump source distinct from the semiconductor optical amplifier, is generated by the interaction of the wavelength selective feedback means with the gain medium of the semiconductor optical amplifier. Thus, in this case, a single semiconductor device, for example a DFB laser, acts as both a source of narrow linewidth pump radiation, and the non-linear medium in which four wave mixing occurs. Hence only the optical signals are injected into the single semiconductor device, and the phase conjugated optical signals are extracted from the semiconductor device. Preferably the wavelength selective feedback means provide strong optical feedback only at the pump wavelength, so as to avoid causing spectral filtering of the optical signals, or the phase conjugate optical signals.

According to a second aspect of the present invention there is provided an optical communications system comprising a transmission path including a first optical fibre and a second optical fibre, an optical signal source for launching optical signals into the first optical fibre, an optical pump

source for generating pump radiation, and a semiconductor optical amplifier having an input from the first optical fibre and an output to the second optical fibre, wherein, in use, the semiconductor optical amplifier receives the pump radiation and the optical signals, after said signals have propagated through the first optical fibre, and generates phase conjugate replicas of the optical signals, which replicas are launched into the second optical fibre.

According to a third aspect of the present invention a semiconductor optical amplifier is used to provide phase conjugation of optical signals in an optical communication link and thereby to substantially compensate for dispersion suffered by the optical signals during propagation along the optical communications link.

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying figures, in which

Figure 1(a) shows the output spectrum of a 500μm Fabry-Perot laser with the laser free-running, with 64mA injection current, (b) shows the injection-loced spectrum of the same laser with -6.7dBm light coupled into the device from an LEC laser operating at 1.557249μm;

Figure 2 shows non-degenerate four-wave mixing in an injection locked Fabry-Perot laser around the 5th resonance, (a) shows the spectrum off-resonance, with the probe laser wavelength between two FP modes, (b) shows the spectrum on resonance, with the probe laser wavelength tuned to the peak of the FP resonance;

Figure 3 shows non-degenerate four-wave mixing in an injection locked Fabry-Perot laser around the 14th resonance, (a) shows the spectrum off-resonance, (b) shows the spectrum on resonance;

Figure 4 shows resonance profiles for (a) the NDFWM conjugate signal, and (b) the probe laser signal, in an injection-locked Fabry-Perot laser;

Figure 5 shows facet output powers, from a FP laser, of the pump, probe and NDFWM conjugate signals(to short and

long wavelengths) at the peak of each resonance, as a function of the pump probe detuning;

Figure 6 shows resonance lineshapes for a FP laser for the pump, probe and NDFWM conjugate signal (short wavelength) for (a) the 5th and (b) the 14th resonance away from the FP resonance at which the pump is injected, the abscissae showing the pump-probe detuning frequencies;

Figure 7 shows the theoretical variation of the resonance enhancement and the bandwidth of cavity-enhanced NDFWM with gain ripple;

Figure 8 shows the experimental arrangement for an embodiment of the invention;

Figure 9 shows optical spectra measured at the output of the SOA shown in Figure 8, (a) with the DFB signal, and (b) without the DFB signal (offset by -10dB);

Figure 10 shows eye diagrams for the arrangement of Figure 8 for (a) the back-to-back arrangement, (b) 100km transmission without dispersion compensation, and (c) 100km transmission with dispersion compensation (measurements were made using a 2.5Gbit/s optical receiver, with -26dBm received power);

Figure 11 shows bit error rate curves for the back-to-back arrangement, 100km transmission without dispersion compensation, and 100km transmission with dispersion compensation 2.488Gbit/s (2^{15}-1) NRZ pseudo-random sequence;

Figure 12 shows the power of the phase conjugate signal and signal-to-background ratio as a function of the chip gain of a travelling wave amplifier (TWA).

Figure 13 shows phase conjugate power and signal-to-background ratio as a function of the total fibre input power (pump+signal). (The curve is a guide to the eye).

The applicants have carried out experiments, and a theoretical analysis, to determine the effect of cavity enhancement on NDFWM. These experiments and analysis will first be described, followed by a description of an optical communications system according to an embodiment of the present invention.

A number of experiments have been carried out with Fabry-Perot lasers i.e. devices having very high levels of cavity enhancement, by injecting two signals, a pump and a probe into these lasers, and tuning the wavelength of the pump and the probe across the Fabry-Perot (FP) resonances of the lasers. Figure 1a shows the output spectrum from a 500μm Fabry-Perot laser, having 16 multiple quantum wells (MQW), when the laser is free running, with 64mA injection current. It can be seen from this figure that the output on resonance is some 30dBs greater than off resonance. Figure 1b shows the output spectrum from the same Fabry-Perot laser following injection locking with -6.7dBm light from the tunable pump source.

Light from the probe source was coupled into the Fabry-Perot laser, maintaining the input power constant at -13.6dBm (coupled-in power). With the wavelength of the pump maintained at 1.557249μm, the wavelength of the probe was tuned through the FP resonances of the pump to longer wavelengths, with up to 9.7nm (1.19Thz) detuning between the two inputs. Output spectra with two inputs are shown in Figures 2(a) & (b) (for ~3nm, 370GHz detuning between the pump and probe and in Figures 3(a) & (b) (for ~9nm, 1.1THz detuning); in both cases Figure (a) shows the spectrum off resonance and (b) the spectrum on resonance. The effect of the cavity FP resonances on the NDFWM is, qualitatively, very clear: when the wavelength of the probe lies in between two FP resonances (off resonance), no conjugate signals could be observed, but tuning the probe to the peak of the FP resonance causes a dramatic increase in the conjugate beam power.

The optical power in the NDFWM conjugate beam (to shorter wavelengths) and the probe laser outputs are shown in Figures 4(a) & (b), respectively, as a function of the pump-probe detuning. The powers were determined from the measured spectra, but the system was calibrated to obtain actual facet powers. Both the conjugate and probe beams show resonances, corresponding to each of the 14 FP resonances, with narrow

linewidth. Though the peak-to-trough ratios for the probe beam resonances are approximately equal to those of the residual FP modes of the FP laser spectrum, the magnitude of the conjugate beam resonances correspond to the square of these amplitudes.

The optical powers of the pump, probe and NDFWM conjugate beams (to both longer and shorter wavelengths) at the peak of the resonances is shown in Figure 5. The most important feature of the figure is the roll-off of the power of the short wavelength conjugate beam. For detunings of up to 0.9THz(7.2nm) the conjugate beam strength decreases at the rate of approximately 10dB/decade. Above 0.9THz (7.2nm) the conjugate beams strength decreases at the rate of approximately 10db/decade. Above 0.9THz there is a much more rapid drop in optical power. The absolute power level of the conjugate beam is at least an order of magnitude higher than measured in similar experiments on travelling wave amplifiers for similar input powers. In fact, for detunings up to ~0.6THz (4.8nm) the power of the conjugate beam at the output facet is higher than the injected power in the probe beam.

The solid line shows the theoretically predicted NDFWM gain (arbitrary scale) given by:

$$gFWM(\omega)\alpha\left|\frac{P_{sat}/(P+P_{sat}}{1-i\omega\tau R}+\frac{\varepsilon NL}{1-i\omega\tau_{in}}\right|^2 \qquad (1)$$

where P_{sat} is the gain saturation power of the amplifier and P is the total optical power, εNL is the non-linear gain parameter, ω is the pump-probe detuning, τR and τ_{in} are the characteristic times of the physical processes giving rise to the two terms, that is, carrier density 'population pulsations' and non-linear gain. τR is the effective recombination lifeline (including stimulated emission), and τ_{in} is the intraband relaxation time. The theoretical curve shown gave a good fit to the experimental data for a 16-well strained layer travelling wave amplifier under similar experimental conditions, with parameters τR=0.08ns and

τ_{in}=0.5ps. The curve gives a reasonable fit to the data for detunings up to 0.9THz, the relatively slow decay (~10dB/decade) arising from the combination of the fast decay (20dB/decade) of the NDFWM due to population pulsations ($\omega >> 1/\tau R$), and the almost constant level of NDFWM from non-linear gain ($\omega \leq 1/\tau R$).

The rapid decay of the conjugate signal for frequencies above 0.9THz is due to two effects: (1) the broadening of the resonance resulting from reduced modal gain, and (2) the dispersion of the mode index, resulting in a varying FP mode spacing. Since the enhancement in the conjugate beam power results from the coincidence of both the probe and conjugate beams with FP resonances, the latter effect results in the two beams not being at resonance simultaneously. This effect appears to be dominant, since effect (1) would result in a sharp reduction in the probe output power beyond 0.9THz detuning, which is not observed.

In order to quantify the enhancement in NDFWM efficiency resulting from cavity resonances, the results described in the previous section will be compared with results on travelling wave amplifiers (TWAs) and DFB lasers. For the TWAs, a pump and a probe beam were injected into a device which had been anti-reflection coated on both facets to ≤0.2%; the devices gave high single-pass gain (~20dB) with <2dB residual Fabry-Perot ripple. For the DFB, a single probe input was injected into the device, which was operated well above threshold, emitting >10mW power.

It is necessary, however, to compare the results in a way which removes the dependence on experimental details, e.g. input powers and single-pass gain . Since the power in the conjugate beam is, in general, described by the relation $P_{FWM} \propto P_1^2 P_2$, where P_1, P_2, P_{FWM} are the optical powers of the pump, probe and FWM conjugate beams, coefficients $\acute{\eta}_{out}$ and $\acute{\eta}_{in}$ are defined for the purposes of comparison in the following way:

$$P_{FWM,\,out} = \acute{\eta}_{out} \cdot (P_{1,\,out})^2 \cdot P_{2,\,out} \quad (2)$$

$$P_{FWM,\,out} = \acute{\eta}_{in} \cdot (P_{1,\,in})^2 \cdot P_{2,\,in} \quad (3)$$

where the subscripts 'out' and 'in' denote whether the power

is the output facet power or the coupled-in input power. $\acute{\eta}_{in}$ indicates the basic efficiency of a device for phase conjugation, through this will depend on the single-pass gain at which the device is operated. $\acute{\eta}_{out}$ gives a better indication of the intrinsic efficiency of each type of device, since this removes the dependence on single-pass gain, and therefore will more clearly show the effect of FP cavity resonances. Table 1 shows the values of $\acute{\eta}_{out}$ and $\acute{\eta}_{in}$ for 1THz pump-probe detuning, for five measurements. Devices numbered 1, 2 and 3 are two facet anti-reflection coated amplifiers, device 4 is a DFB laser, and device 5 is a Fabry-Perot laser. (In all the measurements, the weaker probe beam was to longer wavelength of the pump beam).

	Type	Coupled Input Powers P1(dBm)	P2(dBm)	($\acute{\eta}_{out}$/mW^2) (dB)	($\acute{\eta}_{in}$/mW^2) (dB)
1	2FC Amplifier	-4.5	-9.2	-62.2	-14.2
2	2FC Amplifier	-6.1	-10.1	-56.6	-2.6
3	2FC Amplifier	-7.7	-12.2	-56.1	-2.1
4	3-Section DFB	--- -9.3		-60.7	----
5	Uncoated, Injection-Locked	-6.7		-30.7	+7.7

The most remarkable feature of the table is that, while the values of $\acute{\eta}_{out}$ for the TWA and DFB measurements are relatively uniform, the value for the FP device at resonance is ~30dB greater. This indicates that the effect of the FP cavity is to give roughly three orders of magnitude enhancement in the NDFWM efficiency. There is considerably less difference in the values of $\acute{\eta}_{in}$ owing to the much lower gain in the F-P device, though as expected, there is less uniformity for the TWA and DFB results.

The results shown in Figure 4 reveal that the resonance enhancement in the NDFWM occurs over a narrow bandwidth, and this imposes a severe limitation on the use of the effect, both with regard to the maximum bit rates and to the ease of use. The output intensities of the pump, probe and conjugate beam (short wavelength) for a small range of detunings around the resonance are shown in Figure 6 for (a) the 5th resonance and (b) the 14th resonance. The experimental points for the probe and conjugate beams are fitted using the following Airy-like functions:

$$I_{pr} = I_{pr,0} \{[1-RG]^2 + 4RG\sin^2(\Delta k.L)\}^{-1} \quad (4)$$

$$I_{FWM} = I_{FWM,0} \{[1-RG]^2 + 4RG\sin^2(\Delta k.L)\}^{-2} \quad (5)$$

where $RG=\sqrt{(R_1R_2)}.\exp(gL)$ and R_1, R_2 are the facet reflectivities, g is the single-pass gain and L is the device length. Δk is the wavevector detuning from the FP resonance, and $\Delta k.L=\pi(\Delta f/\Delta f_{FSR})$ where Δf is the frequency detuning and Δf_{FSR} is the free spectral range of the FP modes. Equations (4) and (5) are obtained assuming equal, uniform modal gain and effective index for probe and conjugate beams, and uniform pump power.

The parameter RG indicates the degree of feedback within the Fabry-Perot cavity, and in particular the magnitude of the gain ripple (i.e. ratio of the maximum to minimum gain over one cavity mode) in the amplifier is given by

$$\text{Gain Ripple} = \frac{(1+RG)^2}{(1-RG)^2}$$

In both figures, the probe and conjugate beam resonance lineshapes were fitted using the same value of RG (the only variable parameter, apart from the peak intensity), and the measured value of 82.4GHz was used for Δf_{FSR}. The full-width at half maximum intensity (FWHM) for the probe and conjugate signals was found to be 4.3GHz and 2.8GHz respectively for the 5th resonance; the resonance bandwidth for the 14th resonance was substantially broader, with FWHM values of 8.2GHz and 5.2GHz for the probe and conjugate signals respectively. For the 14th resonance, there is also

significant difference of 4-5GHz in the resonance peak positions for the probe and conjugate signals, which support the conclusion drawn previously that the modal dispersion degrades the cavity enhancement at detunings of ≥1THz.

The narrow bandwidth of the resonance enhancement clearly places a considerable restriction on the usefulness of the effect. Equation (5) shows, however, that there is a trade-off between the resonance bandwidth and the magnitude of the enhancement, and Figure 7 shows the dependence of the peak resonance enhancement and of the resonance FWHM (as a fraction of Δf_{FSR}) on the gain ripple. The point where gain ripple =0 corresponds to the case of a TWA with gain g. The figure shows that, in order to obtain a substantial enhancement, say>10, the resonance linewidth would need to be less than $0.18\Delta f_{FSR}$ (~15GHx for a 500μm device). In the present case, $\Delta f(FWHM)/\Delta f_{FSR}$ lies in the range 0.033-0.06, corresponding to a resonance enhancement of 250-2000, which is consistent with the value of deduced in the previous section.

The experiments described have shown that extremely large enhancements in the efficiency of wavelength translation of NDFWM may be obtained using cavity-enhancement. Under the experimental conditions, an increase of approximately three orders of magnitude was observed in the NDFWM efficiency, for modest pump powers, for pump-probe detunings of up to 0.9THz (9.2nm) phase conjugate.

The usefulness of the effect is, however, limited by the following considerations: (1) the bandwidth for injection-locking is small, typically a few GHz, and therefore requires high stability in the pump and mixing devices. In addition, with two optical inputs, there are regimes in which the injection-locking becomes unstable, when the device tries, in effect, to lock to two signals simultaneously. (2) The bandwidth for resonance enhancement is also small. In the measurement, this bandwidth was found to be as small as 2.8GHz (FWHM). There is a trade-off between the resonance bandwidth and the enhancement obtained,

and it is predicted that to obtain a factor of 10 increase in the NDFWM efficiency (compared with that for a travelling wave amplifier) one would be restricted to a bandwidth of ~15GHz. This not only means that the wavelength of the input signal needs to be finely tunable and stable, but that the maximum bit rate for signals which are to be phase conjugated is limited to ~15Gbit/s.

These problems can be overcome by using a semiconductor optical amplifier (such as a TWA) which has little cavity enhancement. The main difficulties then encountered lie in obtaining sufficient power and signal-to-background ratio in the phase conjugate signal. Since NDFWM is highly non-linear, these two quantities are strongly dependent on the powers of pump and signal beams within the TWA. To determine the optimum working conditions, these two parameters were measured as a function of (a) the gain of the TWA, and (b) the optical input power.

Figure 12 shows the phase conjugate power (measured at the output facet) and the signal-to-background ratio (measured by optical spectrum analyser with 0.1nm resolution) as a function of the chip gain, for constant input power of +4.8dBm (total fibre power, pump + signal). The phase conjugate power increases as the cube of the gain of the TWA, giving up to -16dBm at high injection currents. The signal-to-background ration also increases strongly with the gain, but as the square of the gain. At the highest gains, the ratio is close to 20dB. The signal-to-background increases less rapidly with the gain than the phase conjugate power owing to the linear dependence of the background spontaneous emission on the gain.

The dependence of the phase conjugate power and the signal-to-background ration on the input power is shown in Figure 13 for constant TWA injection current of 250mA (the ratio between pump and signal input power being held constant). Surprisingly, the phase conjugate power level is quite insensitive to the input power. This, however, may be explained by the small change in the output power of the TWA

under strong saturation. The input power, however, does have a strong effect on the signal-to-background ratio. This increases sharply with increasing input power, owing to the reduction in background spontaneous emission. This is an important consideration when attempting to minimise the noise introduced in the phase conjugation.

An embodiment of the present invention will now be described in which FWM in a semiconductor optical amplifier (SOA) is employed to compensate for dispersion in an optical communications system. With reference to Figure 8, a DFB laser 1 is used as the transmitter, directly modulated with a 2.488Gbit/s pseudo-random NRZ 2^{15}-1 pattern. The DFB laser 1 has a wavelength of λ_s=1544.7nm. The bias and modulation of the DFB 1 were chosen to give good extinction ratio but, consequently, large chirp. The signal is combined at the transmitter end of the system with CW light from a pump laser 2, a long external cavity (LEC) laser operating at λ_p=1543.1nm. The combined pump and signal is transmitted across 50km normal-dispersion single-mode fibre 3, with a dispersion of 17ps/nm.km at the signal wavelength. After amplification by an Erbium-doped fibre amplifier 4 (EDFA), the light was coupled into an SOA 5. The SOA is an etched-mesa buried hetrostructure device with an active layer of InGaAsP and both facets anti-reflection coated to less than 10^{-3} reflectivity. The SOA is operated at high injection current (300mA), but the gain is saturated by the injected light with less than 1dB residual Fabry-Perot ripple. The phase-conjugate signal is generated by NDFWM within the SOA, with a wavelength given by $\lambda_{pc}=\{2\lambda p^{-1}-\lambda_s^{-1}\}^{-1}$ = 1541.4nm. An optical bandpass filter 6 (1.3nm bandwidth) follows the SOA and allows only the phase-conjugate signal to be transmitted. This signal is amplified by a further EDFA 7 and further filtered by filter 8 (0.6nm filter) then transmitted across a second 50km length of single-mode fibre 9. The signal is detected using a PIN-FET optical receiver 10.

Spectra at the output of the SOA are shown in Figure 9, (a) with and (b) without the signal beam. With the signal

and pump both present and with polarisations aligned, the phase-conjugate signal at 1541.4nm is generated, with the inverted spectral profile of the DFB signal beam. The fibre input powers of the pump and signal beams into the SOA are +2.7dBm and -4.1dBm respectively. The background to the spectra is from amplified spontaneous emission from both the EDFA and the SOA and causes a reduction in the signal-to-noise ratio. In order to maximise both the signal-to-noise ratio and conversion efficiency the SOA is operated with high gain and moderately high input optical power. Taking into account the coupling loss into and out of the SOA, the conversion efficiency of the phase conjugation (i.e. ratio of the power of the phase conjugate beam at the output facet to signal power coupled into the SOA) is +2.4dB, with a phase-conjugate of -5.6dBm at the output facet of the SOA. This conversion efficiency is at least 20dB greater than using DSF, and can be further increased by using a SOA with higher output power.

The effect of the dispersion compensation is clearly seen by comparison of the eye diagrams of Figure 10, where (a), (b) and (c) correspond to the back-to-back measurement, and 100km transmission without and with dispersion compensation, respectively. The figures are all taken from the receiver output with -26dBm received optical power. The effects of fibre chromatic dispersion are evident from the distortion of the eye diagram (b), but the clean eye is completely recovered by the dispersion compensation (Figure (c)).

Bit error rate (BER) measurements were performed for back-to-back transmission, and 100km transmission with and without dispersion compensation, and the results are shown in Figure 11. The back-to-back measurement, with the DFB signal directly into the receiver, shows a sensitivity of -27.5dBm. The inclusion of a 0.6nm bandpass filter results in a power penalty of less than 0.1dB. Transmission of the DFB signal over 100km without compensation (with a single EDFA at the transmitter) results in a considerable dispersion penalty,

and BERs as low as 10^{-9} could not be achieved. A similar eye diagram and BER characteristic were obtained using the arrangement of Figure 8, but with the filters tuned to transmit the DFB signal. With dispersion compensation, a dramatic improvement in the BER characteristic is seen, with 10^{-9} BER at -25.5dBm. The 2dB penalty results both from a reduction in extinction ratio and the introduction of signal-spontaneous beat noise, both arising from the introduction of amplifier spontaneous emission.

Thus chromatic dispersion compensation using optical phase conjugation in a semiconductor optical amplifier has removed the dispersion penalty in the transmission of a directly-modulated 2.5Gbit/s signal at 1.5μm over 100km of normal dispersion fibre. The efficiency of the phase conjugation is high at +2.4dB, despite the lack of cavity enhancement.

In an alternative embodiment the SOA 5 is provided by a DFB laser having a wavelength of 1543nm, thus allowing the pump laser 2 to be dispensed with. In this embodiment the pump radiation at 1543nm is generated within the SOA 5. Again, in order to maximise the efficiency of phase conjugation the SOA (in this case a DFB) is operated to provide maximum output power, i.e. with a high injection current, typically more than 10 times the threshold current. Furthermore the average power of the optical signal injected into the SOA 5 is limited to a level such that the degree of gain modulation caused in the SOA is small, typically less than 1dB.

CLAIMS

1. A method of compensating for dispersion in an optical communications system, the method comprising the steps of

i) positioning a semiconductor optical amplifier between a first and a second length of optical fibre,

ii) launching optical signals into the first length of optical fibre,

iii) directing optical signals emerging from the first length of optical fibre into the semiconductor optical amplifier,

iv) supplying optical pump radiation to the semiconductor optical amplifier so that the optical signals and the pump radiation interact within the semiconductor optical amplifier and generate the phase conjugate of the optical signals, and

v) launching the phase conjugate optical signals into the second length of optical fibre.

2. A method as claimed in claim 1, wherein the variation in gain ripple of the semiconductor optical amplifier with wavelength is less than 5dB.

3. A method as claimed in claim 1 or claim 2, wherein the reflectivity of the facets of the semiconductor optical amplifier is less than 10^{-3}.

4. A method as claimed in any preceding claim, wherein the wavelength of the optical signals and the wavelength of the pump radiation differ by at least 1nm.

5. A method as claimed in any preceding claim, wherein the wavelength of the optical signals and the wavelength of the pump radiation differ by less than 20nm.

6. A method as claimed in any preceding claim, wherein the gain of the semiconductor optical amplifier is saturated by the pump radiation.

7. A method as claimed in any preceding claim, wherein the semiconductor optical amplifier is operated with a high injection current density.

8. A method as claimed in claim 7, wherein the semiconductor optical amplifier is operated with an injection current density of more than $5kA/cm^2$.

9. A method as claimed in claim 7, wherein the semiconductor optical amplifier is operated with an injection current density of more than $10kA/cm^2$.

10. A method as claimed in any preceding claim, wherein the optical pump radiation supplied to the semiconductor optical amplifier is generated within the semiconductor optical amplifier.

11. A method as claimed in any preceding claim, wherein the first and second lengths of optical fibre have similar levels of dispersion at the operating wavelength of the optical communications system.

12. A method as claimed in any preceding claim, wherein the optical signals and the pump radiation are arranged to be co-propagating within the semiconductor optical amplifier.

13. A method as claimed in any preceding claim, wherein the optical signals and the generated phase conjugate optical signals are co-propagating.

14. A method as claimed in any preceding claim, wherein in step iv) the optical pump radiation is supplied to the semiconductor optical amplifier from a pump source which is co-located with the semiconductor optical amplifier.

15. An optical communications system comprising a transmission path including a first optical fibre and a second optical fibre, an optical signal source for launching optical signals into the first optical fibre, an optical pump source for generating pump radiation, and a semiconductor optical amplifier having an input from the first optical

AUSTRALIAN PATENT OFFICE

fibre and an output to the second optical fibre, wherein, in use, the semiconductor optical amplifier receives the pump radiation and the optical signals, after said signals have propagated through the first optical fibre, and generates phase conjugate replicas of the optical signals, which replicas are launched into the second optical fibre.

16. An optical communications system as claimed in claim 15, wherein both the semiconductor optical amplifier and the optical pump source are comprised by a semiconductor device having wavelength selective feedback means.

17. An optical communications system as claimed in claim 16, wherein said semiconductor device is a distributed feedback laser.

18. An optical communication system as claimed in claim 15, 16 or 17, further comprising an optical filter for filtering the remnant optical signals and pump radiation from the output of the semiconductor optical amplifier before it is launched into the second optical fibre.

19. A method of compensating for dispersion in an optical communication system substantially as herein described.

DATED THIS 27th day of November, 1997

BRITISH TELECOMMUNICATIONS public limited company

Attorney: PETER R. HEATHCOTE
Fellow Institute of Patent Attorneys of Australia
of SHELSTON WATERS

AUSTRALIAN PATENT OFFICE

propagation along the optical communications link.

Fig. 1.

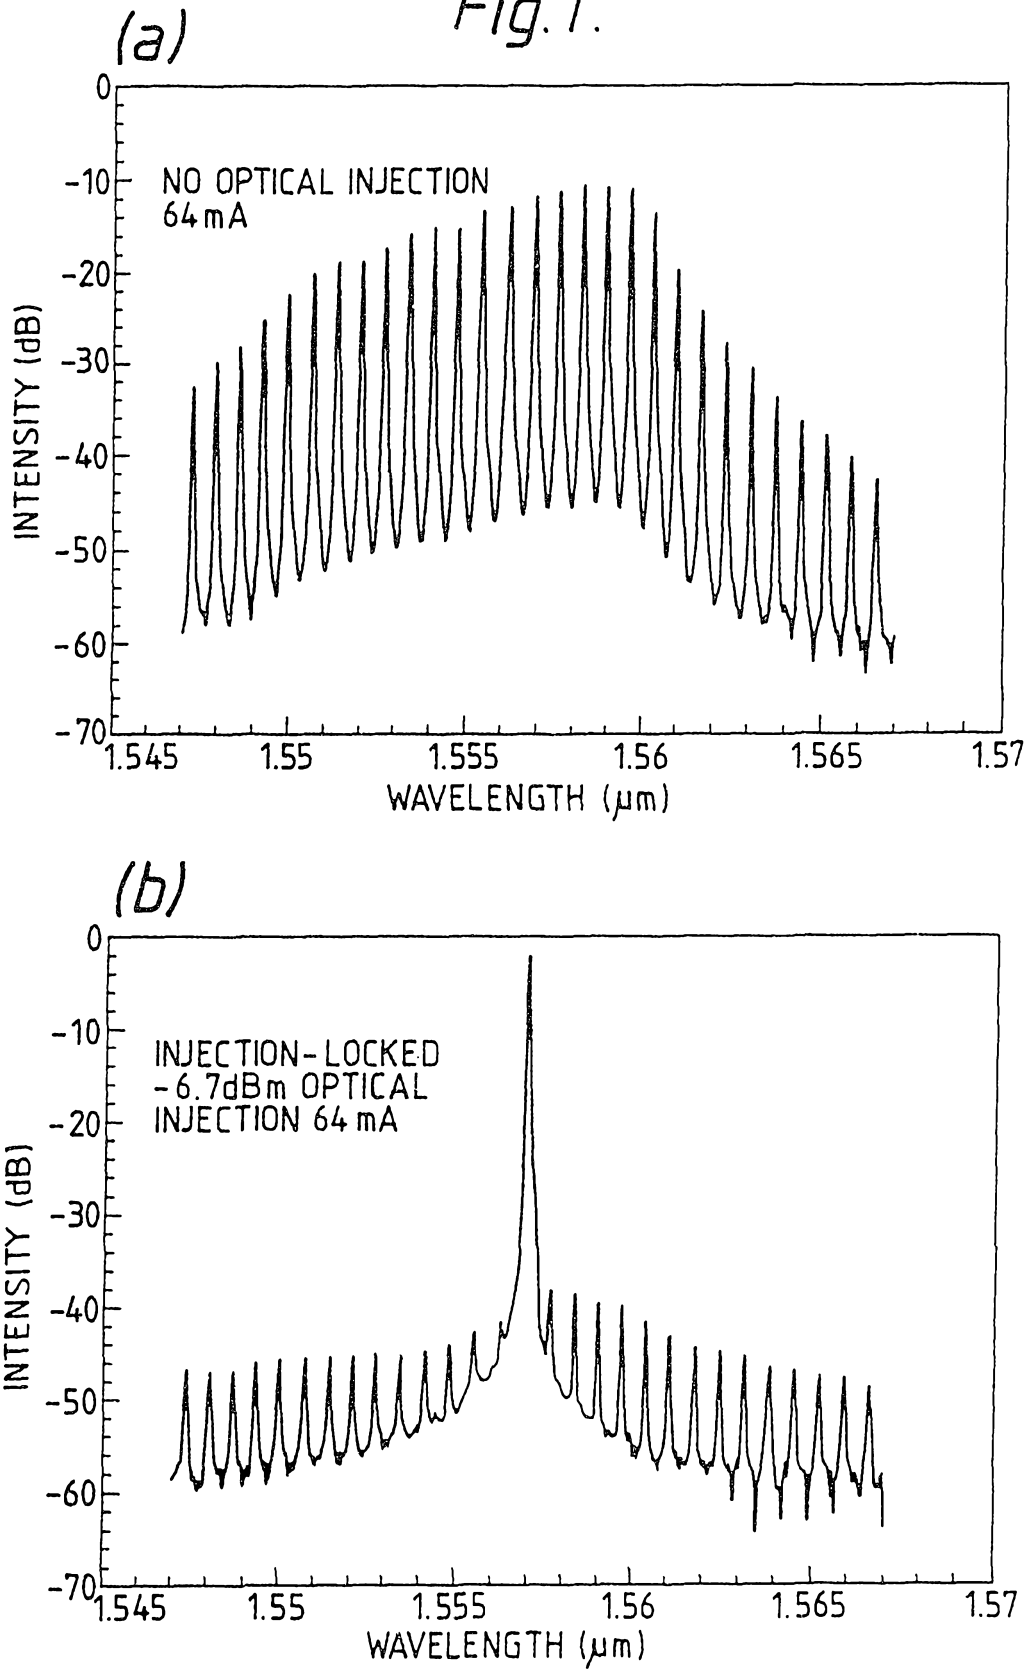
(a)
NO OPTICAL INJECTION
64 mA
INTENSITY (dB)
0
-10
-20
-30
-40
-50
-60
-70
1.545
1.55
1.555
1.56
1.565
1.57
WAVELENGTH (μm)
(b)
INJECTION-LOCKED
-6.7dBm OPTICAL
INJECTION 64 mA
INTENSITY (dB)
0
-10
-20
-30
-40
-50
-60
-70
1.545
1.55
1.555
1.56
1.565
1.57
WAVELENGTH (μm)

Fig.2.

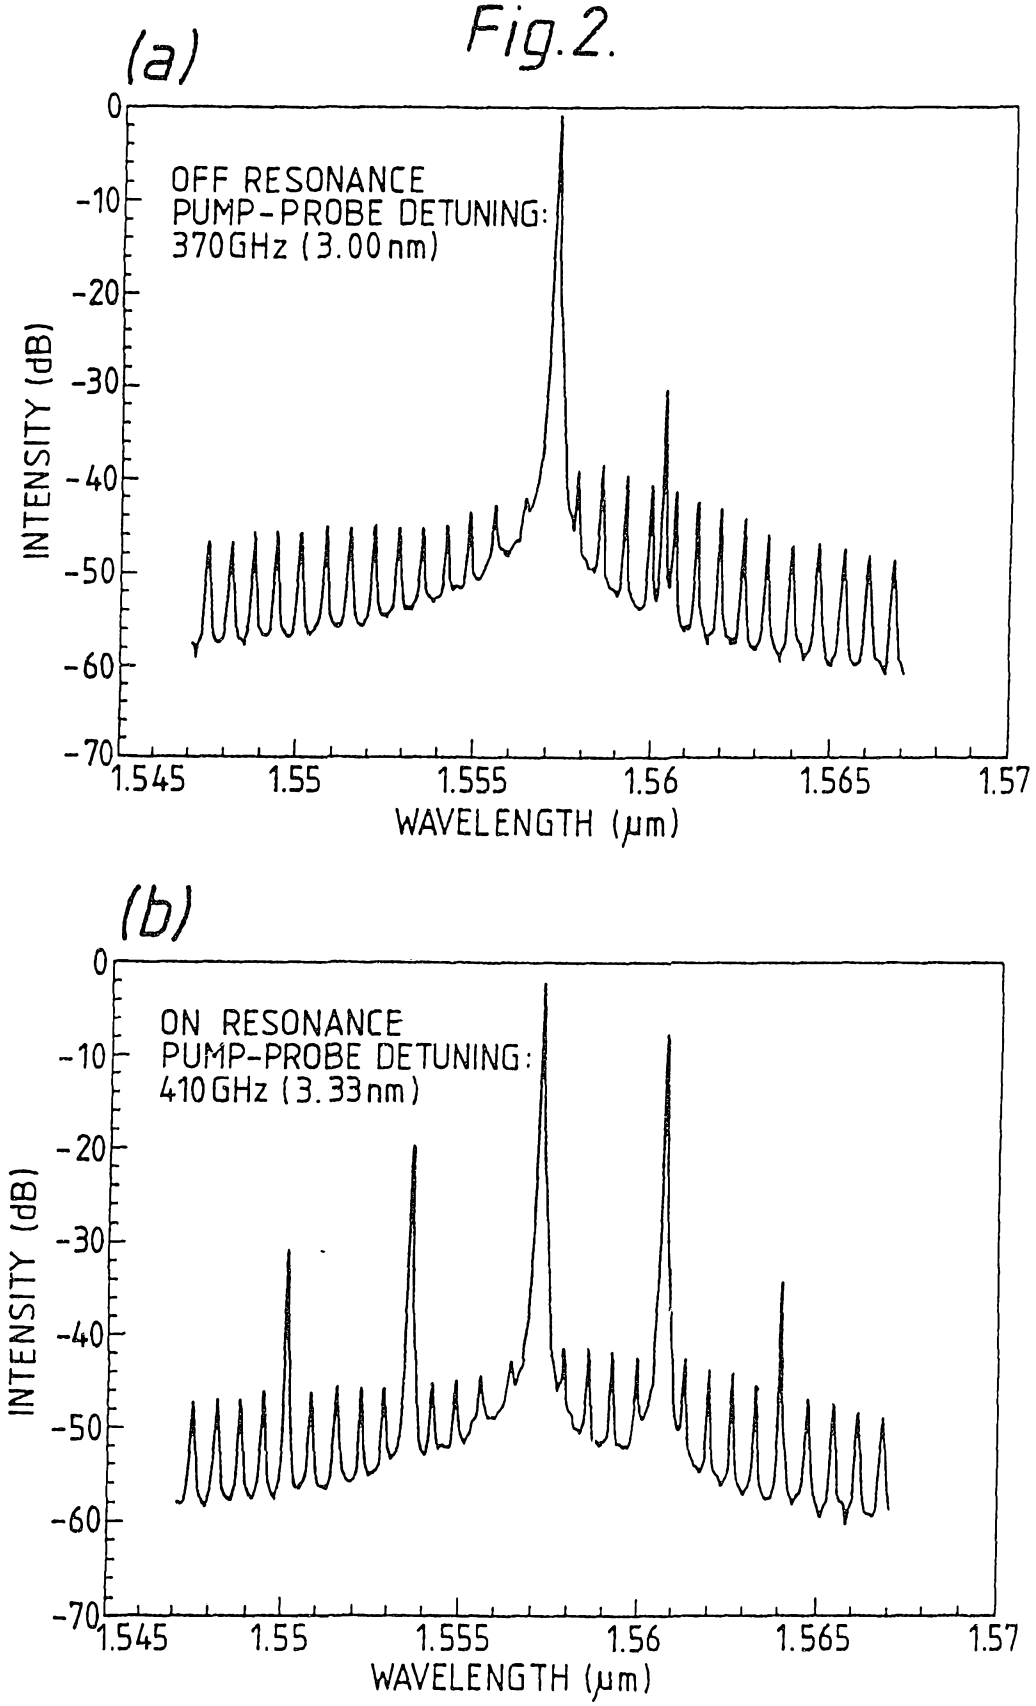
(a)
OFF RESONANCE
PUMP-PROBE DETUNING:
370GHz (3.00nm)
INTENSITY (dB)
0
-10
-20
-30
-40
-50
-60
-70
1.545
1.55
1.555
1.56
1.565
1.57
WAVELENGTH (μm)
(b)
ON RESONANCE
PUMP-PROBE DETUNING:
410GHz (3.33nm)
INTENSITY (dB)
0
-10
-20
-30
-40
-50
-60
-70
1.545
1.55
1.555
1.56
1.565
1.57
WAVELENGTH (μm)

Fig.3.

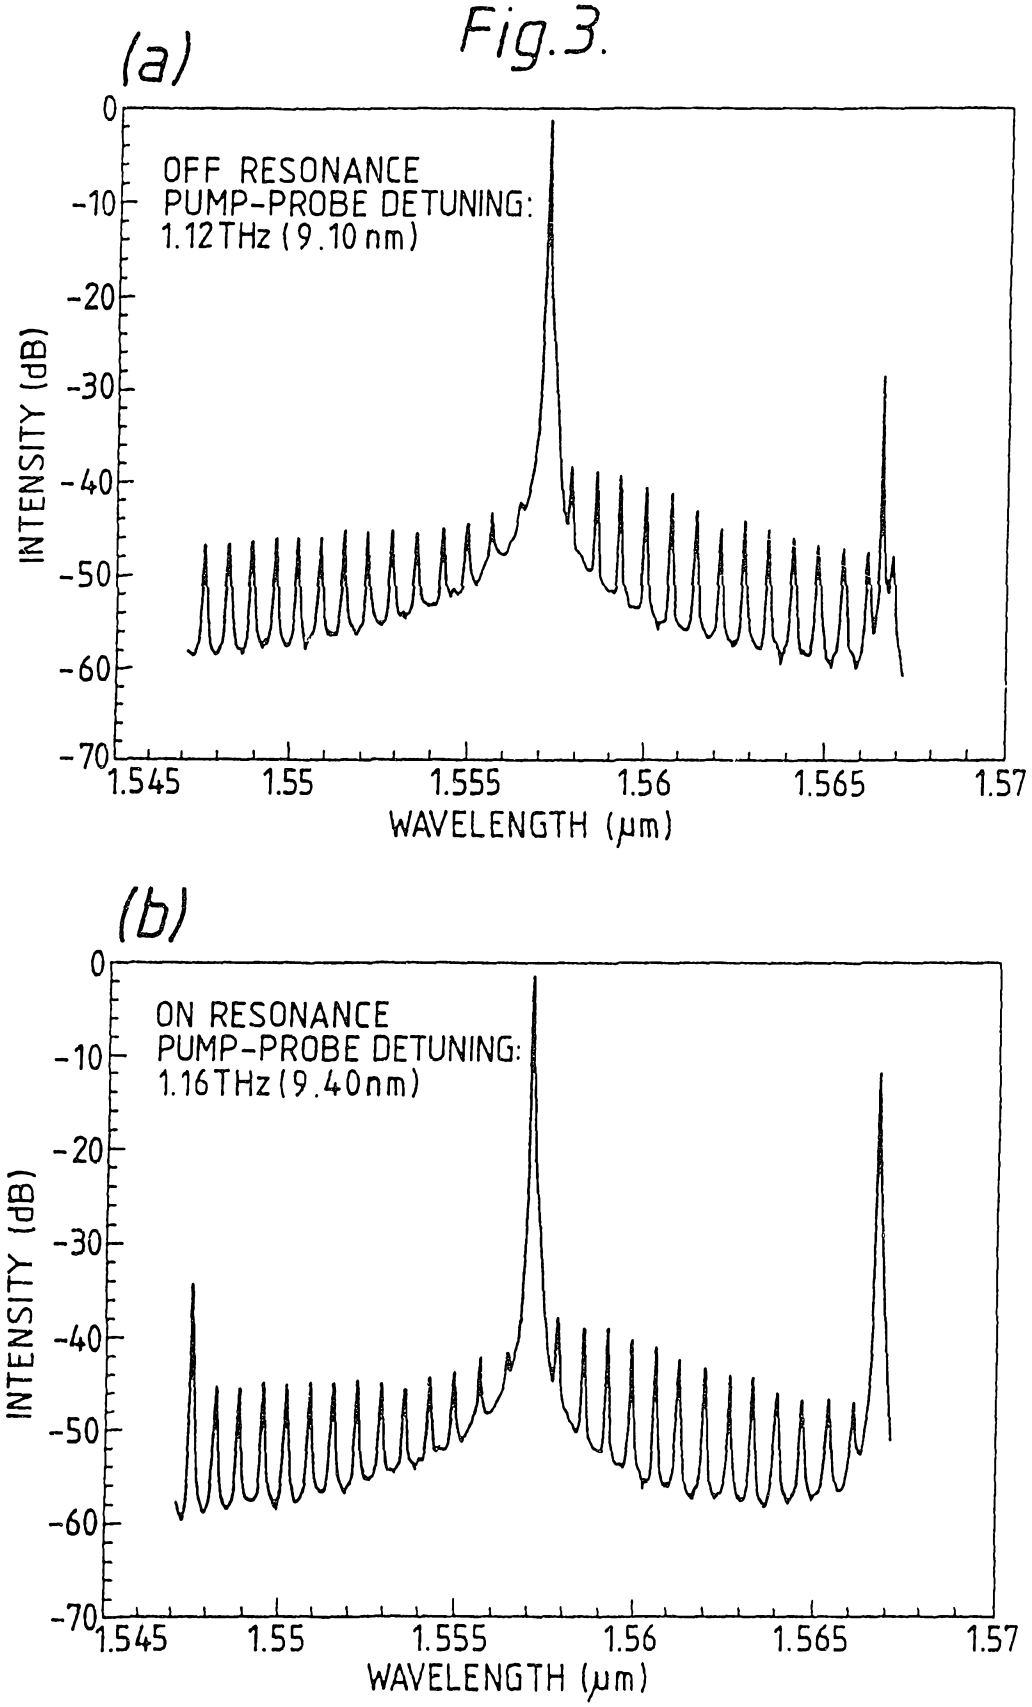
(a)
OFF RESONANCE
PUMP-PROBE DETUNING:
1.12THz (9.10nm)
INTENSITY (dB)
0
-10
-20
-30
-40
-50
-60
-70
1.545
1.55
1.555
1.56
1.565
1.57
WAVELENGTH (μm)
(b)
ON RESONANCE
PUMP-PROBE DETUNING:
1.16THz (9.40nm)
INTENSITY (dB)
0
-10
-20
-30
-40
-50
-60
-70
1.545
1.55
1.555
1.56
1.565
1.57
WAVELENGTH (μm)

Fig. 4.

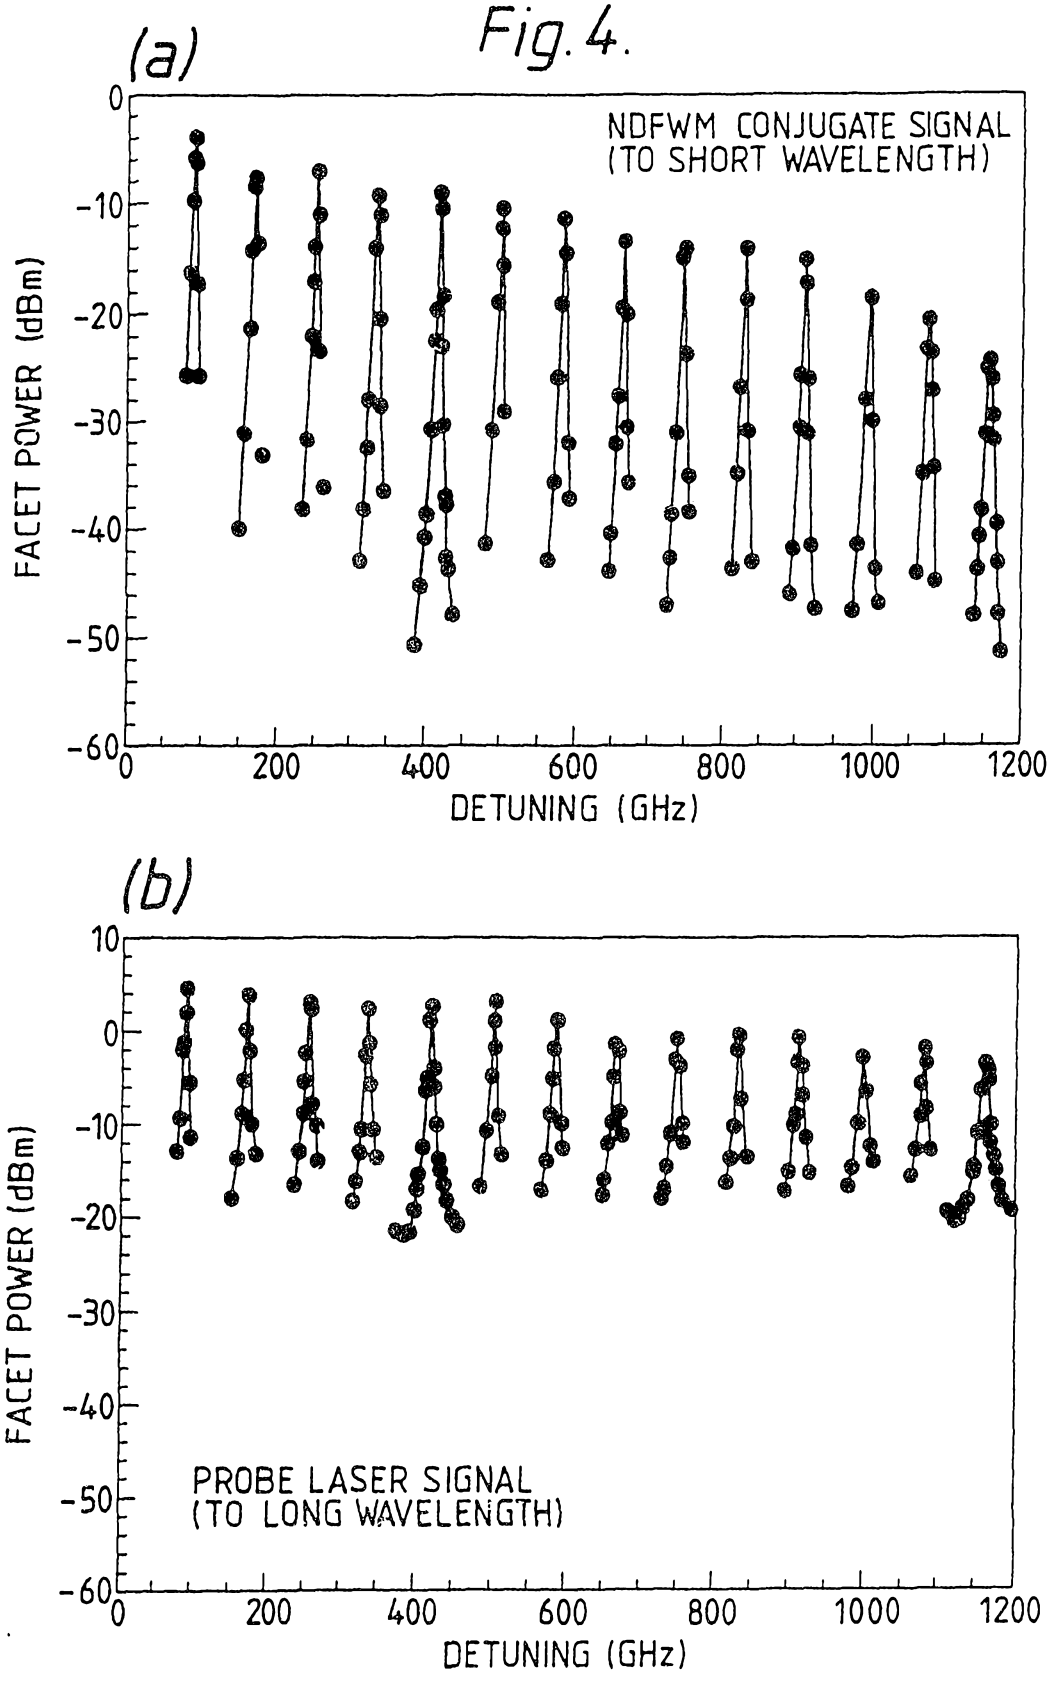
(a)
NDFWM CONJUGATE SIGNAL
(TO SHORT WAVELENGTH)
FACET POWER (dBm)
0
-10
-20
-30
-40
-50
-60
0
200
400
600
800
1000
1200
DETUNING (GHz)
(b)
10
0
-10
-20
-30
-40
-50
-60
PROBE LASER SIGNAL
(TO LONG WAVELENGTH)
FACET POWER (dBm)
0
200
400
600
800
1000
1200
DETUNING (GHz)

Fig. 5.

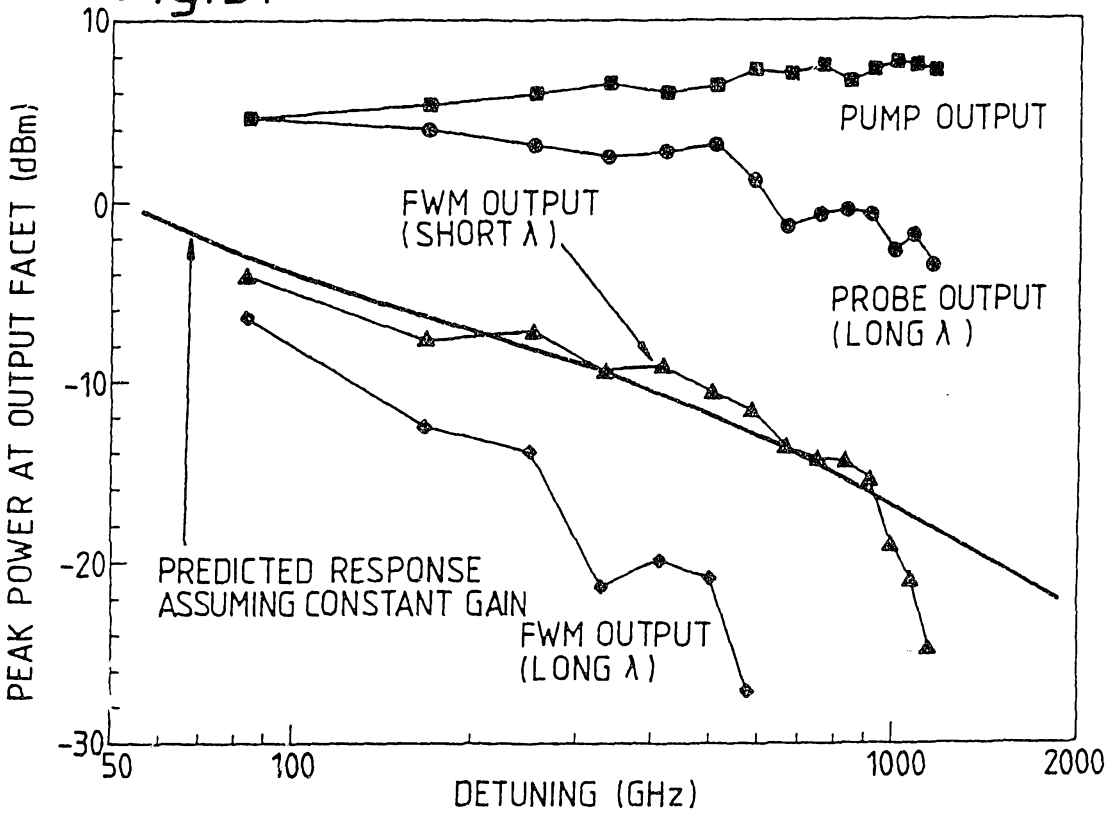
PEAK POWER AT OUTPUT FACET (dBm)
10
0
-10
-20
-30
50
100
1000
2000
DETUNING (GHz)
PUMP OUTPUT
FWM OUTPUT
(SHORT λ)
PROBE OUTPUT
(LONG λ)
PREDICTED RESPONSE
ASSUMING CONSTANT GAIN
FWM OUTPUT
(LONG λ)

Fig. 7.

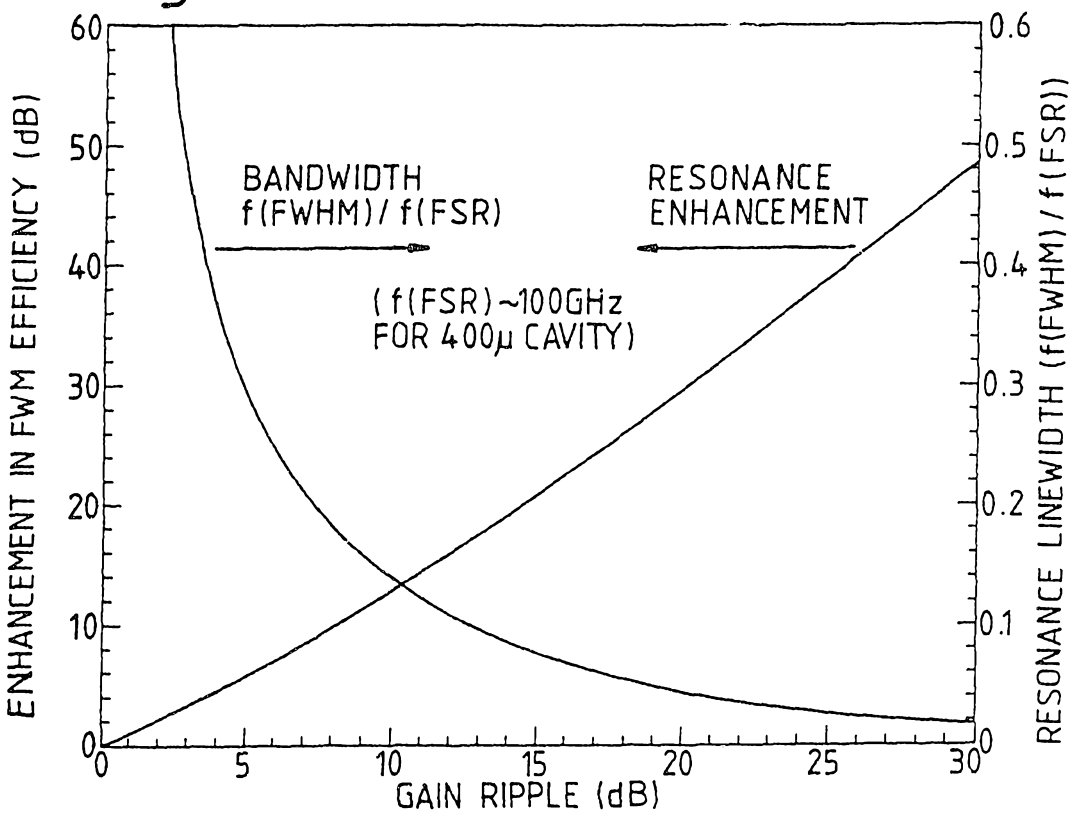
ENHANCEMENT IN FWM EFFICIENCY (dB)
60
50
40
30
20
10
0
0
5
10
15
20
25
30
GAIN RIPPLE (dB)
0.6
0.5
0.4
0.3
0.2
0.1
0
RESONANCE LINEWIDTH (f(FWHM)/f(FSR))
BANDWIDTH
f(FWHM)/f(FSR)
RESONANCE
ENHANCEMENT
(f(FSR)~100GHz
FOR 400μ CAVITY)

Fig.6.

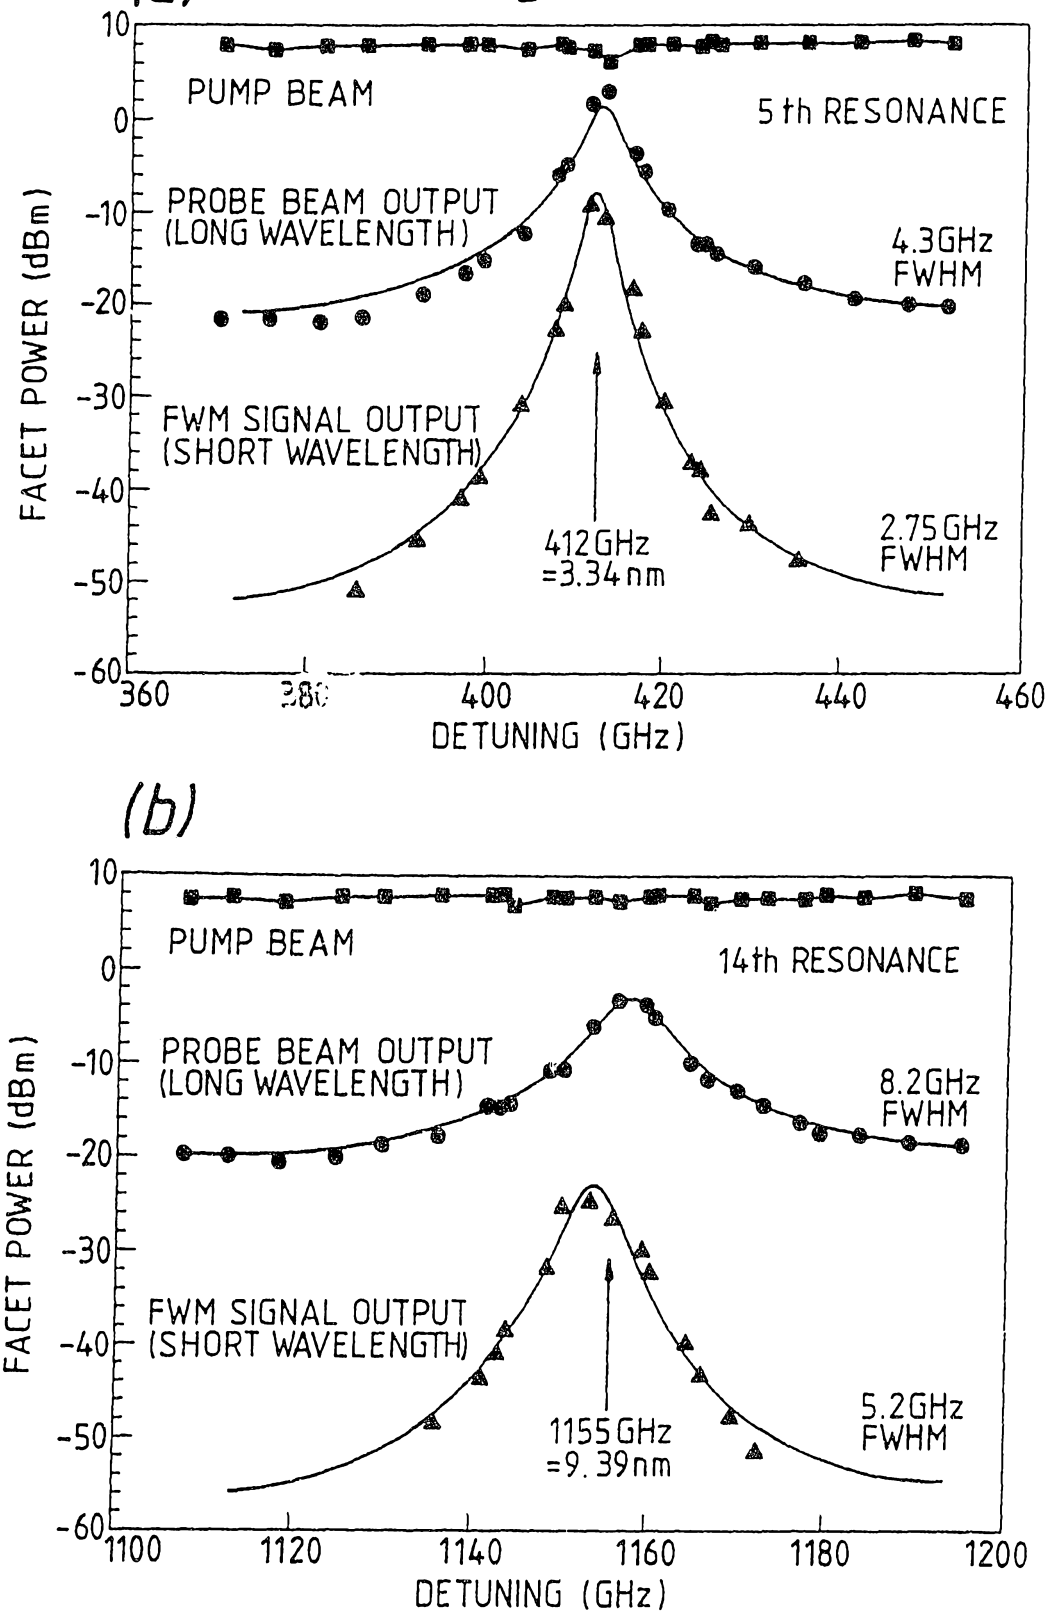
(a)
PUMP BEAM
5th RESONANCE
PROBE BEAM OUTPUT
(LONG WAVELENGTH)
4.3GHz
FWHM
FWM SIGNAL OUTPUT
(SHORT WAVELENGTH)
412GHz
=3.34nm
2.75GHz
FWHM
FACET POWER (dBm)
DETUNING (GHz)
(b)
PUMP BEAM
14th RESONANCE
PROBE BEAM OUTPUT
(LONG WAVELENGTH)
8.2GHz
FWHM
FWM SIGNAL OUTPUT
(SHORT WAVELENGTH)
1155GHz
=9.39nm
5.2GHz
FWHM
FACET POWER (dBm)
DETUNING (GHz)

Fig. 8.

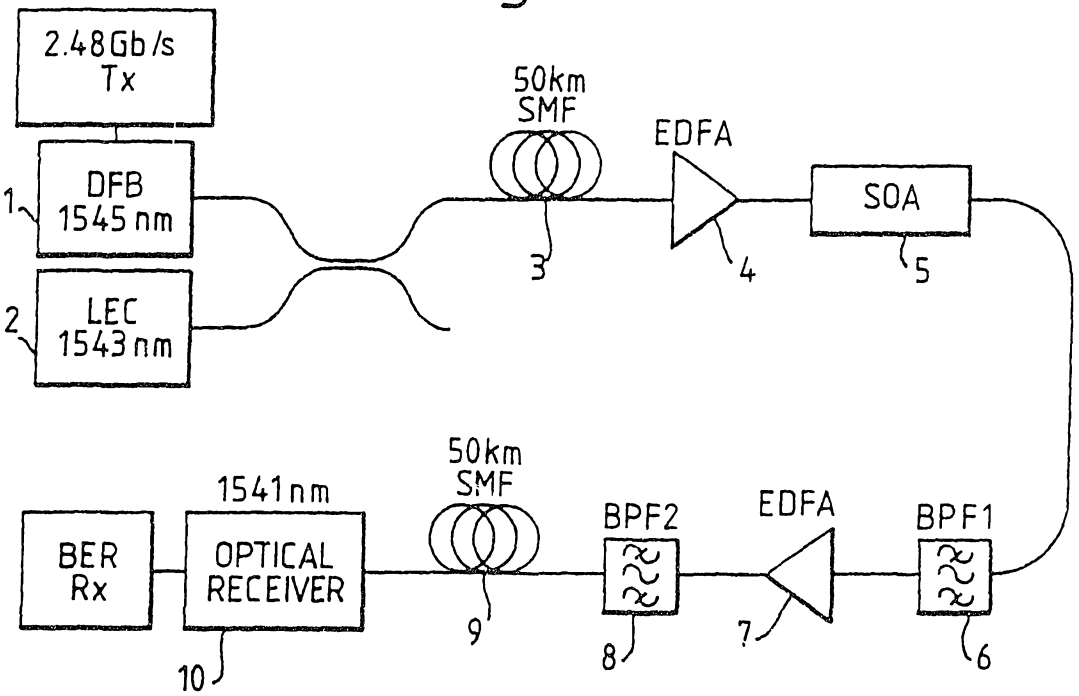
2.48Gb/s
Tx
DFB
1545 nm
LEC
1543 nm
1
2
50km
SMF
3
EDFA
4
SOA
5
BER
Rx
1541 nm
OPTICAL
RECEIVER
10
50km
SMF
9
BPF2
8
EDFA
7
BPF1
6

Fig. 9.

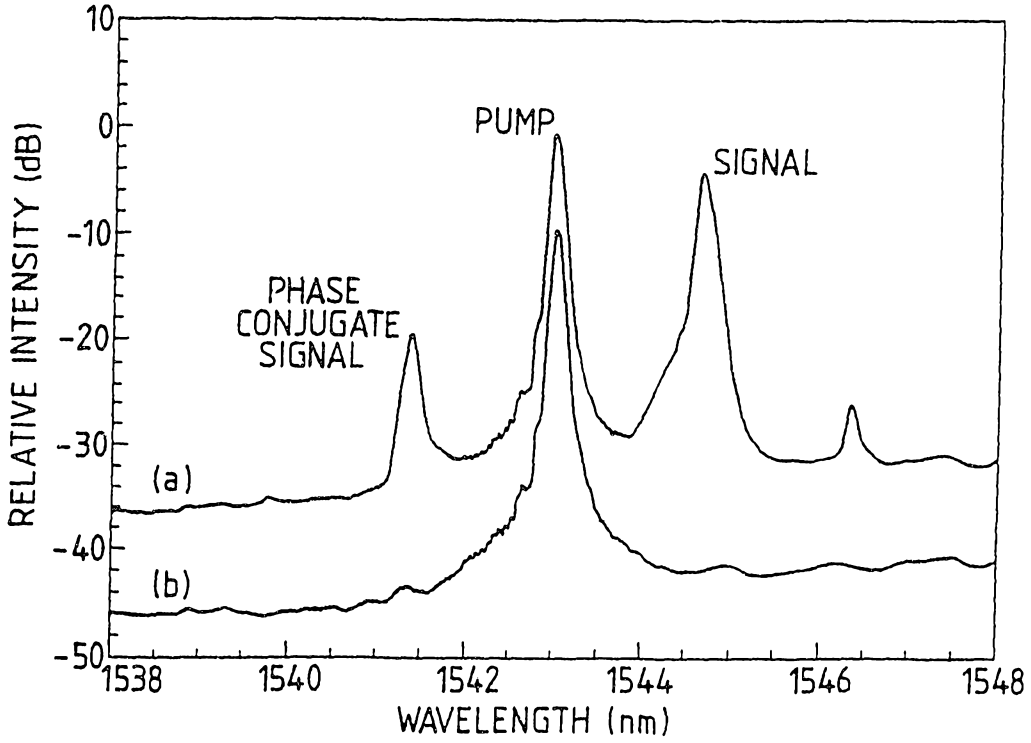
RELATIVE INTENSITY (dB)
10
0
-10
-20
-30
-40
-50
PUMP
SIGNAL
PHASE
CONJUGATE
SIGNAL
(a)
(b)
1538
1540
1542
1544
1546
1548
WAVELENGTH (nm)

Fig. 10.

(a)



(b)



(c)



Fig.11.


BIT ERROR RATE
10-3
10-4
10-5
10-6
10-7
10-8
10-9
10-10
10-11
10-12
-32
-30
-28
-26
-24
-22
-20
-18
RECEIVED OPTICAL POWER (dBm)
100 km WITHOUT COMPENSATION
100 km WITH COMPENSATION
BACK-TO-BACK
2.0dB

Fig. 12.

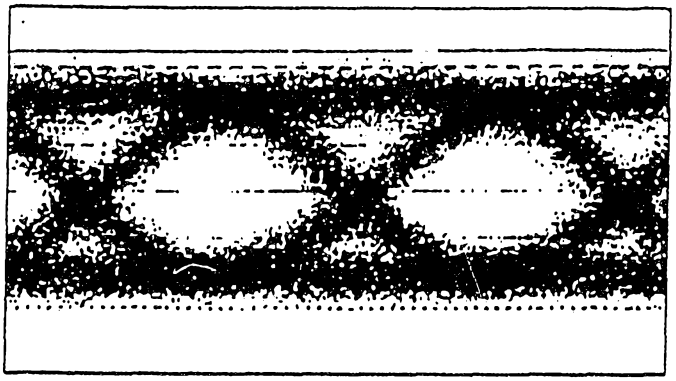
PHASE CONJUGATE POWER (dBm)
-10
-20
-30
-40
-50
-60
(S/B)α(Gs)2
POWERα(Gs)3
0
4
8
12
16
SATURATED CHIP GAIN, Gs(dB)
30
20
10
0
-10
-20
SIGNAL-TO-BACKGROUND RATIO (dB)

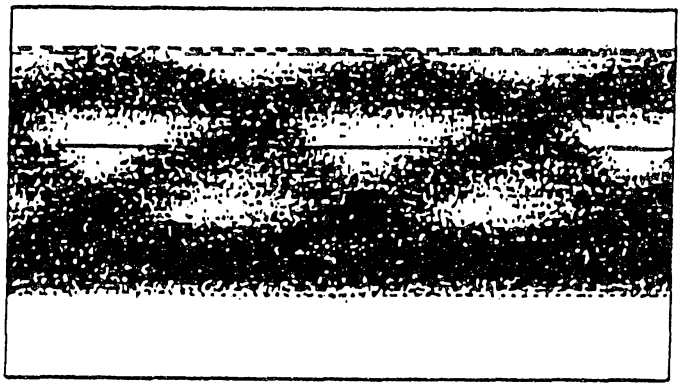Fig. 13.

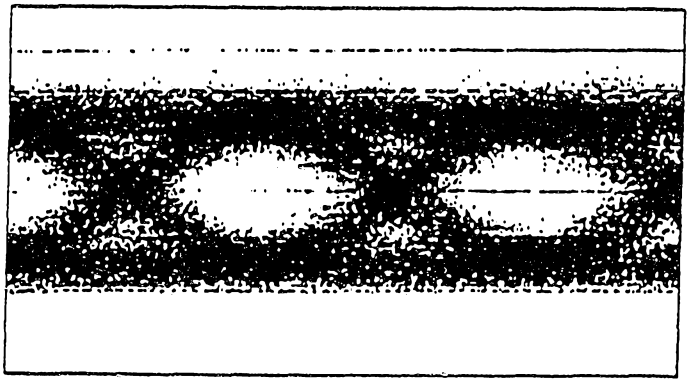
PHASE CONJUGATE POWER (dBm)
-12
-16
-20
-24
-28
-8
-6
-4
-2
0
2
4
FIBRE INPUT POWER (dBm)
16
12
8
4
0
SIGNAL-TO-BACKGROUND RATIO (dB)

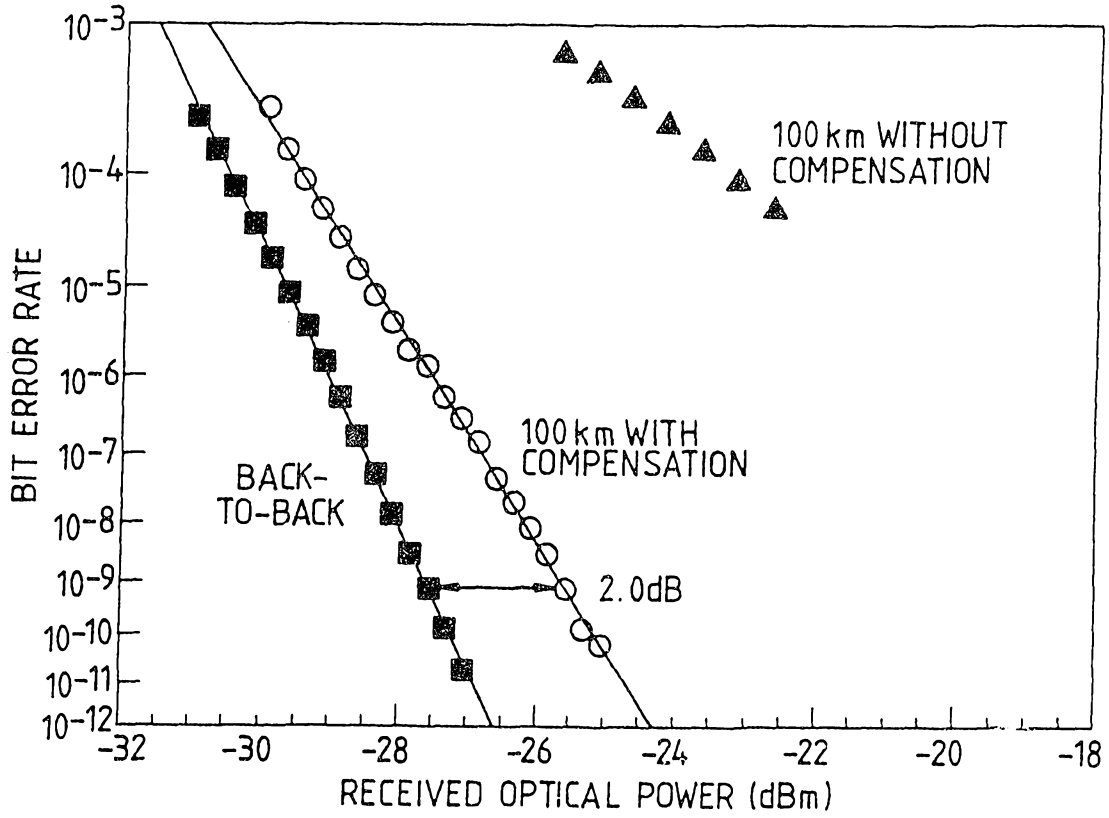INTERNATIONAL SEARCH REPORT

Int nal Application No
PCT/GB 94/00602

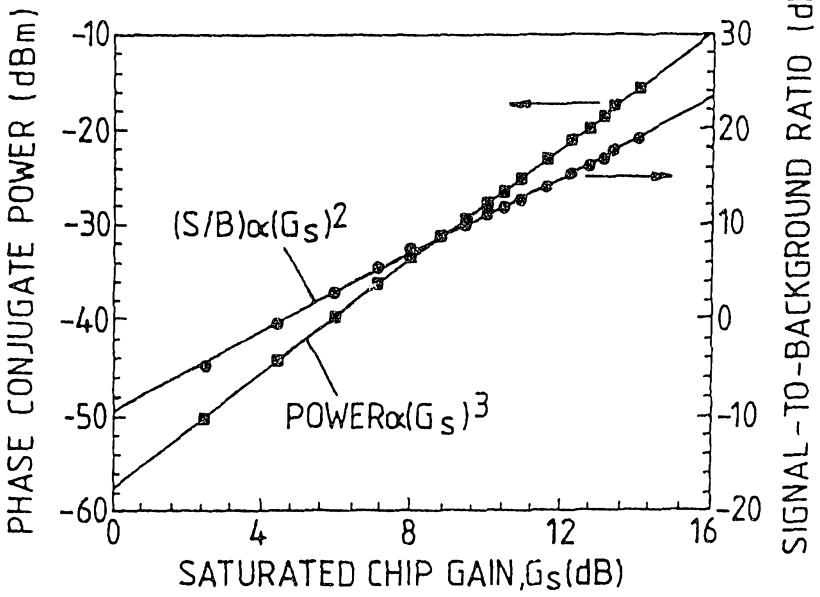A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04B10/18 H01S3/25

According to International Patent Classification (IPC) or to both national classification and IPC

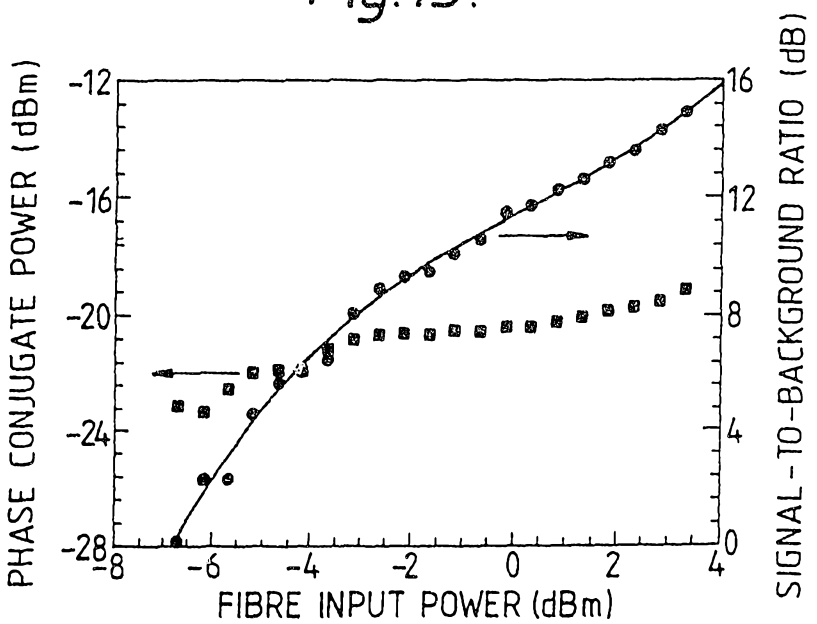B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04B H01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	JOURNAL OF LIGHTWAVE TECHNOLOGY., vol.10, no.9, September 1992, NEW YORK US pages 1247 - 1254 PAULO AKIHUMI YAZAKI ET AL 'Chirping Compensation Using a Two-Section Semiconductor Laser Amplifier'	1,4,5, 15,19
A	see abstract; figure 1 see page 1252, left column, paragraph 2 - right column, paragraph 1 --- -/--	6,13

[X] Further documents are listed in the continuation of box C. [X] Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
22 June 1994	08. 07. 94

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+ 31-70) 340-3016	Goudelis, M

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 94/00602

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	ELECTRONICS LETTERS., vol.29, no.7, 1 April 1993, STEVENAGE GB pages 576 - 578 R.M.JOPSON ET AL 'Compensation of fibre chromatic dispersion by spectral inversion' cited in the application	1,4,5, 15,19
A	see page 576, right column, last paragraph - page 577, left column, paragraph 1; figure 1	13
A	EP,A,0 375 253 (ATT) 27 June 1990 see abstract; figure 1	1,6,10, 13,15,19
A	PATENT ABSTRACTS OF JAPAN vol. 16, no. 301 (P-1379) 3 July 1992 & JP,A,04 081 724 (NEC) see abstract	15,16

Form PCT ISA 210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. nal Application No
PCT/GB 94/00602

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP-A-0375253	27-06-90	US-A-	4979234	18-12-90
		JP-A-	2223938	06-09-90
		SE-A-	8903258	21-06-90