

(51) International Patent Classification:
G06F 3/044 (2006.01)(21) International Application Number:
PCT/US2012/052715(22) International Filing Date:
28 August 2012 (28.08.2012)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
13/591,136 21 August 2012 (21.08.2012) US(71) Applicant (for all designated States except US):
CYPRESS SEMICONDUCTOR CORPORATION
[US/US]; 198 Champion Court, San Jose, CA 95134 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MURUGESAN, Saravanan** [IN/IN]; 215, Flat No G2, Pristine Silver Oak Apts, 1st A Cr, Bangalore 560043 (IN). **WALSH, Paul** [IE/IE]; 7 The Walk, Rockfield, Church Road, Blackrock (IE). **BALDWIN, Gerard** [IE/IE]; Apt 4, St Patricks House, Lower Glanmire Road, Cork (IE). **HOSSEINI, Kaveh** [IE/IE]; 28 Hartys Quay, Rochestown (IE).(74) Agents: **JOHNSON, Larry, J.** et al.; Cypress Semiconductor Corporation, 198 Champion Court, San Jose, CA 95134 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: SLEW RATE AND BANDWIDTH ENHANCEMENT IN RESET

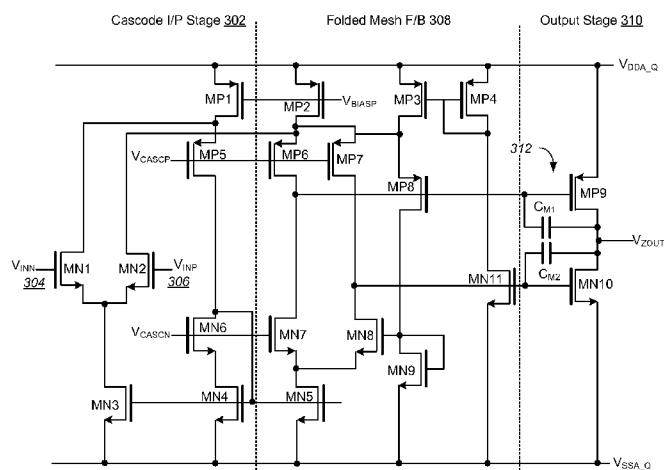


FIG. 3

(57) Abstract: Embodiments of a capacitance sensing system including an integrating amplifier and methods for operating the same to provide a higher slew rate and bandwidth are described. In one embodiment, the integrating amplifier comprises an input stage including an inverting input coupled to an electrode of a capacitor to sense a capacitance and a non-inverting input coupled to a reference potential, and an output stage including a compensating capacitor coupled to an output. The compensating capacitor comprises two smaller capacitors coupled in parallel and a switching element configured to open when the integrating amplifier is operated in a RESET mode decoupling one of the two smaller capacitors from the output to decrease capacitance of the compensating capacitor.

SLEW RATE AND BANDWIDTH ENHANCEMENT IN RESET

TECHNICAL FIELD

[0001] The present disclosure relates generally to circuits and methods for sensing capacitance, and more particularly to sensing and measuring circuits and methods for use with capacitive touchscreens.

BACKGROUND

[0002] Touchscreens are widely used in devices, such as personal computers, tablet computers, entertainment systems, game consoles, and cellular telephones for data input and/or controlling cursor movement. One common type of touchscreen uses a capacitive sensing system, to sense and measure proximity, position, displacement or acceleration of an object, such as a finger or stylus. The capacitive sensing system generally may include a matrix or array formed by etching parallel layers of conductive material separated by a layer of insulating material to form lines of receive and transmit electrodes with a sensing capacitor at each intersection of the receive and transmit electrodes. A voltage pulse (Tx) is applied to a transmit electrodes and the accumulated charge on each receive electrode or channel sensed and measured to detect a change in capacitance due to proximity of a conductor, such as a finger, to the touchscreen.

[0003] One way to sense a capacitance is to convert it to charge and measure the charge quantity. Charge and capacitance are related by $Q=CV$ where Q =charge, C =capacitance and V =voltage. These capacitance sense solutions convert the capacitance into charge by modulating the voltage across it and integrating the resulting current. One conventional capacitance sensing system uses two parallel integration capacitors in feedback with a switched capacitor (SC) integrator. One capacitor is always integrating while the second can be reset in parallel. Thus, each receive (RX) channel may include two relatively large capacitors. This results in increased circuit complexity, cost and, more important, increased circuit size.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] The present invention will be understood more fully from the detailed description that follows and from the accompanying drawings and the appended claims provided below, where:

[0005] FIG. 1 is a schematic block diagram of a touchscreen;

[0006] FIG. 2 is a schematic block diagram illustrating an integrating amplifier for converting a sensed capacitance to charge and measuring the charge quantity in a single receive channel;

[0007] FIG. 3 is a schematic diagram of an embodiment of the integrating amplifier;

[0008] FIG. 4 is a schematic diagram of an embodiment of diode connected device MN9 of the integrating amplifier in FIG. 3;

[0009] FIG. 5 is a schematic diagram of an embodiment of a compensating capacitor of the integrating amplifier in FIG. 3;

[0010] FIG. 6 is a time-line of a conversion illustrating modes of operation of the integrating amplifier illustrated in FIGs. 2 and 3;

[0011] FIG. 7A is a simplified schematic block diagram illustrating an embodiment of operation of the integrating amplifier in Integration mode;

[0012] FIG. 7B is a simplified schematic block diagram illustrating an embodiment of operation of the integrating amplifier in RESET mode;

[0013] FIG. 8 are plots of some waveforms of the operation of the circuit in FIGs. 7A and 7B; and

[0014] FIG. 9 is a flow chart of an embodiment of a method for operating a capacitance sensing system including an integrating amplifier to provide a higher slew rate and bandwidth.

DETAILED DESCRIPTION

[0015] FIG. 1 shows a touchscreen for which a capacitance sensing system including an integrating amplifier with a high slew rate and bandwidth in RESET mode is particularly useful. Referring to FIG. 1, in one embodiment, the touchscreen **100** may include a matrix or capacitive sensor array **102** of capacitive sensor elements or sense capacitors **104**, each formed from an intersection of one of a plurality of receive electrodes **106** and transmit electrodes **108**. The sensor array **102** is coupled to a controller **110**, typically embodied in a separate, distinct integrated circuit (IC). The controller **110** may include a capacitive drive circuit or system **112** electrically coupled to each of the transmit electrodes **108**, and a capacitance sensing system **114** electrically coupled to each of the receive electrodes **106**. The capacitance sensing system **114** may include a plurality of substantially identical receive (Rx) channels **116**, each coupled to one of the plurality of receive electrodes **106**. Among embodiments, the controller **110** further may include one or more counters or timers to measure a length of time over which capacitance is integrated, and processing logic implemented in software or hardware to convert sensed capacitance values into data representing a position, displacement or acceleration of a conductive object, such as a finger or stylus, in proximity to the touchscreen **100**.

[0016] To sense and measure capacitance or a change in capacitance of the sense capacitors **104**, in one embodiment a voltage pulse (Tx) is applied sequentially to each of the transmit electrodes **108** resulting in an accumulation of charge on the receive electrodes **106**, which is sensed and measured by the Rx channels **116**, each coupled to one of the plurality of receive electrodes **106**. By comparing any changes in sensed capacitance on several of the Rx channels **116**, the controller **110** is able to generate data representing a position, displacement or acceleration of a finger relative to the touchscreen **100**.

[0017] A schematic block diagram of a single Rx channel **200** is illustrated in FIG. 2. Referring to FIG. 2, in one embodiment the Rx channel **200** may include an integrating amplifier

202, such as an integrator operational transconductance amplifier (OTA), having an inverting input coupled to a receive electrode of a capacitor for which capacitance is to be sensed, a non-inverting input coupled to a reference voltage (V_{REF}), and an output (V_{ZOUT}). The Rx channel **200** further may include a feedback or integration capacitor (C_{INT}) **204** coupled between the inverting input of the integrating amplifier **202** and the output to accumulate charge from the sense capacitor. In integration mode, according to one embodiment, as the C_{INT} **204** charges V_{ZOUT} increases until the integrating amplifier **202** is driven into saturation or is reset. A switch **206** coupled in parallel with the integration capacitor **204** may be configured to be open when the integrating amplifier **202** is operated in integration mode and closed when the integrating amplifier is operated in RESET mode to reset the capacitor.

[0018] A schematic block diagram of the integrating amplifier is illustrated in FIG. 3. Referring to FIG. 3, in one embodiment the integrating amplifier may include a cascode input stage **302** including an inverting input (V_{INN}) **304** coupled to an electrode of a sense capacitor to sense a capacitance thereof and a non-inverting input (V_{INP}) **306** coupled to a reference potential, a folded mesh feed back stage **308**, and an output stage **310** including one or more Miller or compensating capacitors ($CM1$ and $CM2$) **312** coupled to an output (V_{ZOUT}).

[0019] In one embodiment the slew rate of the integrating amplifier is determined by the drain current (ID) of $MN3$ divided by the compensating capacitance ($CM1+CM2$); while the bandwidth of the integrating amplifier is proportional to the transconductance of the first, input stage ($GM1$) divided by the compensating capacitance ($CM1+CM2$). Hence decreasing the compensating capacitor in reset mode gives an increase in both slew rate and gain bandwidth product (GBW).

[0020] However, decreasing the compensating capacitor can also lower the phase margin and cause instability in the integrating amplifier in RESET mode as the unity-gain-bandwidth (UGB) is pushed closer to the second pole which is given by $GMN10+GMP9/CL$. Increasing the

output stage current will increase the GMN10+GMP9 and hence push the second pole still farther from the UGB and increasing stability. Generally, the output stage current is increased from about 150uA to about 300uA, or from 1.5 to 2 times.

[0021] In one embodiment, this is achieved by optioning in one more parallel diode connected devices with diode connected device (MN9) in an output stage current path, effectively increasing the width (channel width) of MN9. Generally, the width of MN9 is increased by at least about 100%, or from about 1000 nm to about 2000 nm. A detailed schematic diagram of one version of this embodiment is illustrated in FIG. 4. Referring to FIG. 4, MN9 may include two diode connected devices, MN9A and MN9B, connected in parallel between MP8 and MN8 and the negative supply voltage to the integrating amplifier (V_{SSA_Q}), and a switching element **402**. The switching element **402** is configured to open when the integrating amplifier is operated in an integration mode, decoupling one of the diode connected devices, MN9B, and to close in reset mode to increase the output stage current when the integrating amplifier is operated in RESET mode to provide greater stability.

[0022] In another embodiment, the output stage current can be increased by increasing the width of the output devices MP9 and MN10. In yet another embodiment, the output stage current can be increased by changing biasing of the integrating amplifier.

[0023] A detailed schematic diagram of a compensating capacitor (CM1/CM2) **500** in the integrating amplifier of FIG. 3 is illustrated in FIG. 5. Referring to FIG. 5, in one embodiment each of the compensating capacitors **500** may include two smaller capacitors, CMA and CMB, coupled in parallel and a switching element **502** configured to open when the integrating amplifier is operated in a RESET mode, decoupling one of the two smaller capacitors from the output (V_{ZOUT}) to decrease capacitance of the compensating capacitor **500**. The switching element **502** can be controlled by the same or a contemporaneous reset signal used to close switch **206** in the Rx channel **200**. In certain embodiments, the capacitances of the two smaller capacitors (CMA and

CMB) are selected so that the capacitance of the compensating capacitor **500** is decreased by at least 10% when the integrating amplifier is operated in RESET mode. In one embodiment, the capacitances of the two smaller capacitors (CMA and CMB) are selected so the capacitance of the compensating capacitor **500** is decreased by about at least 50% in RESET mode, and in another embodiment by about 65%.

[0024] Embodiments for the configuration of an Rx channel **700** of the capacitive sensing system will now be described with reference to FIGs. 6, 7A and 7B. Referring to FIG. 6, INIT **602** represents an initialization phase of an embodiment of an integrating amplifier **702** lasting from about 2000 nanoseconds (ns) to about 10000 ns, during which an output (V_{ZOUT}) is allowed to settle to a voltage of V_{REF} , while having the integrator in reset mode.

[0025] Referring to FIGs. 6 and 7A, TX_RAMP_UP **604**, represents a first integration mode during which a rising edge voltage pulse (Tx) is applied sequentially to each of the transmit electrodes in the touchscreen **704** resulting in an accumulation of charge on the receive electrodes, according to one embodiment, which is sensed and measured by the Rx channel **700**. The time or duration for the TX_RAMP_UP **604** is determined by parasitics of the touch screen **704**, and generally lasts for about 800 ns. According to one embodiment, during the TX_RAMP_UP **604** switch **706** is opened enabling the integration capacitor **708** to accumulate charge from a sensor capacitor array (not shown in these figures) in the touchscreen **704** and to allow the current in the integrator to settle to about 95%.

[0026] The from VX node from touchscreen **704** may then be applied to an inverting input of the integrating amplifier **702**, and compared to reference voltage (V_Y) applied to a non-inverting input. An exemplary reference voltage is about 1.3V. As the C_{INT} **708** charges V_{ZOUT} increases until the integrating amplifier **702** is driven into saturation or is reset.

[0027] Next, after a predetermined period of time, generally before the Tx voltage is removed or reversed, the Rx channel **700** is reset (RESET **606**). As shown in the embodiment of

FIG. 7B, during RESET mode switch **706** is closed resetting the integration capacitor **708** and placing the integrating amplifier **702** in a unity gain configuration. As noted above, during RESET capacitance of compensating capacitors (e.g., compensating capacitors (CM1/CM2) **500** of FIG. 5) in the integrating amplifier **702** is decreased, thereby increasing the slew rate and substantially reducing the time the Rx channel must remain in RESET mode. The time or duration for RESET **606** is determined by a current budget, parasitics of the touch screen **704** and the process technology used to fabricate the integrating amplifier **702**. According to one embodiment, the RESET **606** lasts for less than or equal to about 200 ns.

[0028] TX_RAMP_DN **608**, represents a second integration mode during which, according to one embodiment, a falling edge voltage pulse (Tx) is applied sequentially to each of the transmit electrodes in the touchscreen **704** resulting in an accumulation of charge on the receive electrodes, which is sensed and measured by the Rx channel **700**. As with TX_RAMP_UP **704**, the time or duration for TX_RAMP_DN **608** is determined by parasitics of the touch screen **704**. According to one embodiment, TX_RAMP_DN **608** may last about 800 ns, during which switch **706** is opened enabling the integration capacitor **708** to accumulate charge from the sensor capacitor array in the touchscreen **704**.

[0029] Finally, after another predetermined period of time, which in one embodiment, may be the same as for TX_RAMP_UP **604**, the Rx channel **700** is reset (RESET **610**). As shown in FIG. 7B and described above, during RESET **610** switch **706** is closed resetting the integration capacitor **608** and placing the integrating amplifier **702** in a unity gain configuration, and the capacitance of compensating capacitors in the integrating amplifier **702** is decreased. As with RESET **606**, the time or duration for RESET **610** is determined by current budget, parasitics of the touch screen **704** and the process technology used to fabricate the integrating amplifier **702**, and according to one embodiment may last for less than or equal to about 200 ns.

[0030] FIG. 8 shows plots of some waveforms of the operation of an embodiment of the circuit in FIGs. 6, 7A and 7B. The graph or line labeled **802** represents the voltage pulse (Tx) applied to the transmit electrodes. Line **804** represents a reset signal (Vc_rst) applied to the switch **706** to close the switch during RESET mode and to the integrating amplifier **702** to decrease capacitance of compensating capacitors. Line **806** represents V_{ZOUT} during both RESET mode and integration mode. Referring to FIG. 8, it is noted that during a first time, identified on the horizontal axis as TX RAMP UP, the integrating amplifier **702** is in integration mode with a rising edge voltage pulse (Tx) applied to the transmit electrodes of the touch screen **704**, while the reset signal (Vc_rst) is de-asserted or not applied to switch **706**. As the C_{INT} **708** charges V_{ZOUT} decreases until the integrating amplifier **702** is driven into saturation. During a second time, identified on the horizontal axis as RESET 1, the reset signal (Vc_rst **804**) is asserted closing switch **706**, resetting C_{INT} **708** and decreasing the capacitance of compensating capacitors in the integrating amplifier **702**. It is noted the high slew rate of the integrating amplifier **702** enables an extremely fast reset during which V_{ZOUT} **806** returns rapidly to an initial value. Finally, after the first reset (RESET 1), TX RAMP DN, the reset signal (Vc_rst) is de-asserted, the integrating amplifier **702** is again operated in integration mode and a falling edge voltage pulse (Tx) is applied to the transmit electrodes of the touch screen **704**. As the C_{INT} **708** charges V_{ZOUT} increases until the integrating amplifier **702** is driven into saturation.

[0031] An embodiment of a method for operating a capacitance sensing system including an integrating amplifier to provide a higher slew rate and bandwidth will now be described with reference to the flow chart of FIG. 9. Referring to FIG. 9, the method begins with initializing the capacitance sensing system (**902**) during which an output (V_{ZOUT}) of the integrating amplifier is allowed to settled to a voltage of VREF by programming the integrating amplifier in reset mode. After initialization, a voltage pulse (Tx) may then be applied to the transmit electrodes of the touch screen (**904**). Next, a charge received on a receive electrode of the touch screen is accumulated on

the integration capacitor (906). The capacitance sensing system is reset after a period of time, wherein resetting the capacitance sensing system comprises closing the switch to reset the integrator capacitor and increasing the slew rate and gain-bandwidth (GBW) of the integrating amplifier (908). In some embodiments, such as those described above, increasing the slew rate and gain-bandwidth (GBW) of the integrating amplifier is accomplished by decreasing capacitance of the compensating capacitor while the integrating amplifier is operated in a RESET mode. Resetting the capacitance sensing system may further include increasing an output stage current of the integrating amplifier to further increase stability of the integrating amplifier in RESET mode (910).

[0032] Thus, embodiments of an integrating amplifier and methods for operating the same to sense capacitance in a touchscreen while providing enhanced slew rate and bandwidth in RESET mode have been described. Although the present disclosure has been described with reference to specific exemplary embodiments, it will be evident that various modifications and changes may be made to these embodiments without departing from the broader spirit and scope of the disclosure. Accordingly, the specification and drawings are to be regarded in an illustrative rather than a restrictive sense.

[0033] The Abstract of the Disclosure is provided to comply with 37 C.F.R. §1.72(b), requiring an abstract that will allow the reader to quickly ascertain the nature of one or more embodiments of the technical disclosure. It is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims. In addition, in the foregoing Detailed Description, it can be seen that various features are grouped together in a single embodiment for the purpose of streamlining the disclosure. This method of disclosure is not to be interpreted as reflecting an intention that the claimed embodiments require more features than are expressly recited in each claim. Rather, as the following claims reflect, inventive subject matter lies in less than all features of a single disclosed embodiment. Thus, the following claims are hereby incorporated into the Detailed Description, with each claim standing on its own as a separate

embodiment.

[0034] Reference in the description to one embodiment or an embodiment means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the circuit or method. The appearances of the phrase one embodiment in various places in the specification do not necessarily all refer to the same embodiment. The term to couple as used herein may include both to directly electrically connect two or more components or elements and to indirectly connect through one or more intervening components.

IN THE CLAIMS**WHAT IS CLAIMED IS:**

1. An integrating amplifier comprising:

an input stage including an inverting input coupled to an electrode of a sense capacitor to sense a capacitance thereof and a non-inverting input coupled to a reference potential; and

an output stage including a compensating capacitor coupled to an output, the compensating capacitor comprising two smaller capacitors coupled in parallel and a switching element configured to open when the integrating amplifier is operated in a RESET mode decoupling one of the two smaller capacitors from the output to decrease capacitance of the compensating capacitor when the integrating amplifier is operated in RESET mode.

2. The integrating amplifier of claim 1, further comprising a plurality of diode connected devices coupled in parallel when the integrating amplifier is operated in RESET mode to provide greater stability.

3. The integrating amplifier of claim 3, wherein the integrating amplifier comprises parallel diode connected devices, and wherein one of the parallel diode connected devices is switched into an output stage current path when the integrating amplifier is operated in RESET mode to provide greater stability.

4. The integrating amplifier of claim 1, further comprising an integration capacitor and switch coupled in parallel between the inverting input of the integrating amplifier and the output, wherein the switch is opened when the integrating amplifier is operated in an integration mode to accumulate charge from the sense capacitor, and closed during RESET mode to reset the

integration capacitor.

5. The integrating amplifier of claim 1, wherein the two smaller capacitors of the compensating capacitor comprise capacitances selected so that the capacitance of the compensating capacitor is decreased by at least 10% when the integrating amplifier is operated in RESET mode.

6. The integrating amplifier of claim 1, wherein the two smaller capacitors of the compensating capacitor comprise capacitances selected so that the capacitance of the compensating capacitor is decreased by about 50% when the integrating amplifier is operated in RESET mode.

7. A capacitance sensing system comprising:

an integrating amplifier including an input stage including an inverting input coupled to an electrode of a sense capacitor to be sensed and a non-inverting input coupled to a reference voltage, and an output stage including a compensating capacitor coupled to an output;

an integration capacitor coupled between the inverting input of the integrating amplifier and the output to accumulate charge from the sense capacitor when the integrating amplifier is operated in an integration mode; and

a switch coupled in parallel with the integration capacitor between the inverting input of the integrating amplifier and the output, the switch configured to be open in integration mode and closed when the integrating amplifier is operated in RESET mode to reset the capacitor,

wherein the integrating amplifier further comprises a device to increase an output stage current when the integrating amplifier is operated in RESET mode.

8. The capacitance sensing system of claim 7, wherein the device to increase the output stage current comprises a plurality of diode connected devices coupled in parallel.

9. The capacitance sensing system of claim 7, wherein the device to increase the output stage current comprises parallel diode connected devices, and wherein one of the parallel diode connected devices is switched into an output stage current path when the integrating amplifier is operated in RESET mode to provide greater stability.

10. The capacitance sensing system of claim 7, wherein the compensating capacitor comprises two smaller capacitors coupled in parallel and a switching element configured to open when the integrating amplifier is operated in a RESET mode decoupling one of the two smaller capacitors from the output to decrease capacitance of the compensating capacitor when the integrating amplifier is operated in RESET mode.

11. The capacitance sensing system of claim 10, wherein the two smaller capacitors of the compensating capacitor comprise capacitances selected so that the capacitance of the compensating capacitor is decreased by at least 10% when the integrating amplifier is operated in RESET mode.

12. The capacitance sensing system 10, wherein the two smaller capacitors of the compensating capacitor comprise capacitances selected so that the capacitance of the compensating capacitor is decreased by about 50% when the integrating amplifier is operated in RESET mode.

13. A method for sensing capacitance of a capacitor, comprising:

accumulating a charge received on a receive electrode of a sense capacitor using a capacitance sensing system including an integrating amplifier comprising an input stage including an inverting input coupled to the receive electrode, and an output stage including a compensating capacitor coupled to an output; and

resetting the capacitance sensing system after a period of time, wherein resetting the capacitance sensing system comprises increasing the slew rate and gain-bandwidth (GBW) of the integrating amplifier.

14. The method of claim 13, wherein increasing the slew rate and GBW of the integrating amplifier comprises decreasing capacitance of the compensating capacitor while the integrating amplifier is operated in a RESET mode.

15. The method of claim 14, wherein the compensating capacitor comprises two smaller capacitors coupled in parallel and a switching element configured to open when the integrating amplifier is operated in RESET mode, and wherein decreasing capacitance of the compensating capacitor comprises opening the switching element to decouple one of the two smaller capacitors from the output to decrease capacitance of the compensating capacitor.

16. The method of claim 14, wherein decreasing capacitance of the compensating capacitor while the integrating amplifier is operated in a RESET mode comprises decreasing capacitance of the compensating capacitor by about 50%.

17. The method of claim 13, wherein the capacitance sensing system further comprises an integration capacitor and switch coupled in parallel between the inverting input of the integrating amplifier and the output, and wherein resetting the capacitance sensing system further

comprises closing the switch to reset the integration capacitor.

18. The method of claim 13, wherein resetting the capacitance sensing system further comprises increasing an output stage current of the integrating amplifier to provide greater stability.

19. The method of claim 18, wherein the capacitance sensing system further comprises a first diode connected device, and wherein increasing an output stage current of the integrating amplifier comprises enabling a second diode connected device in parallel with the first first diode connected device when the integrating amplifier is operated in RESET mode.

20. The method of claim 13, wherein resetting the capacitance sensing system does not comprise decoupling the receive electrode from the capacitance sensing system.

200

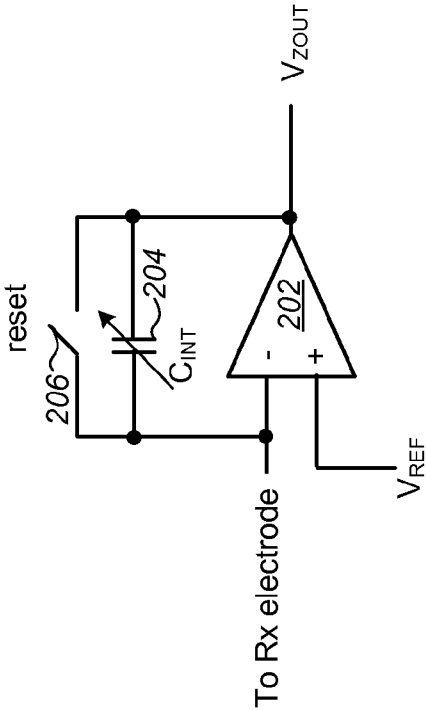
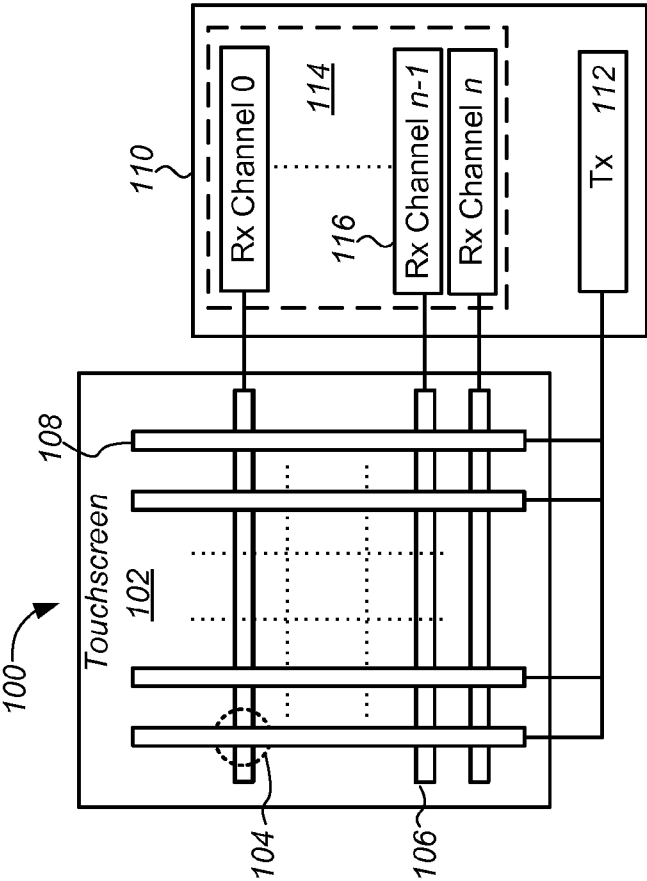


FIG. 2

FIG. 1

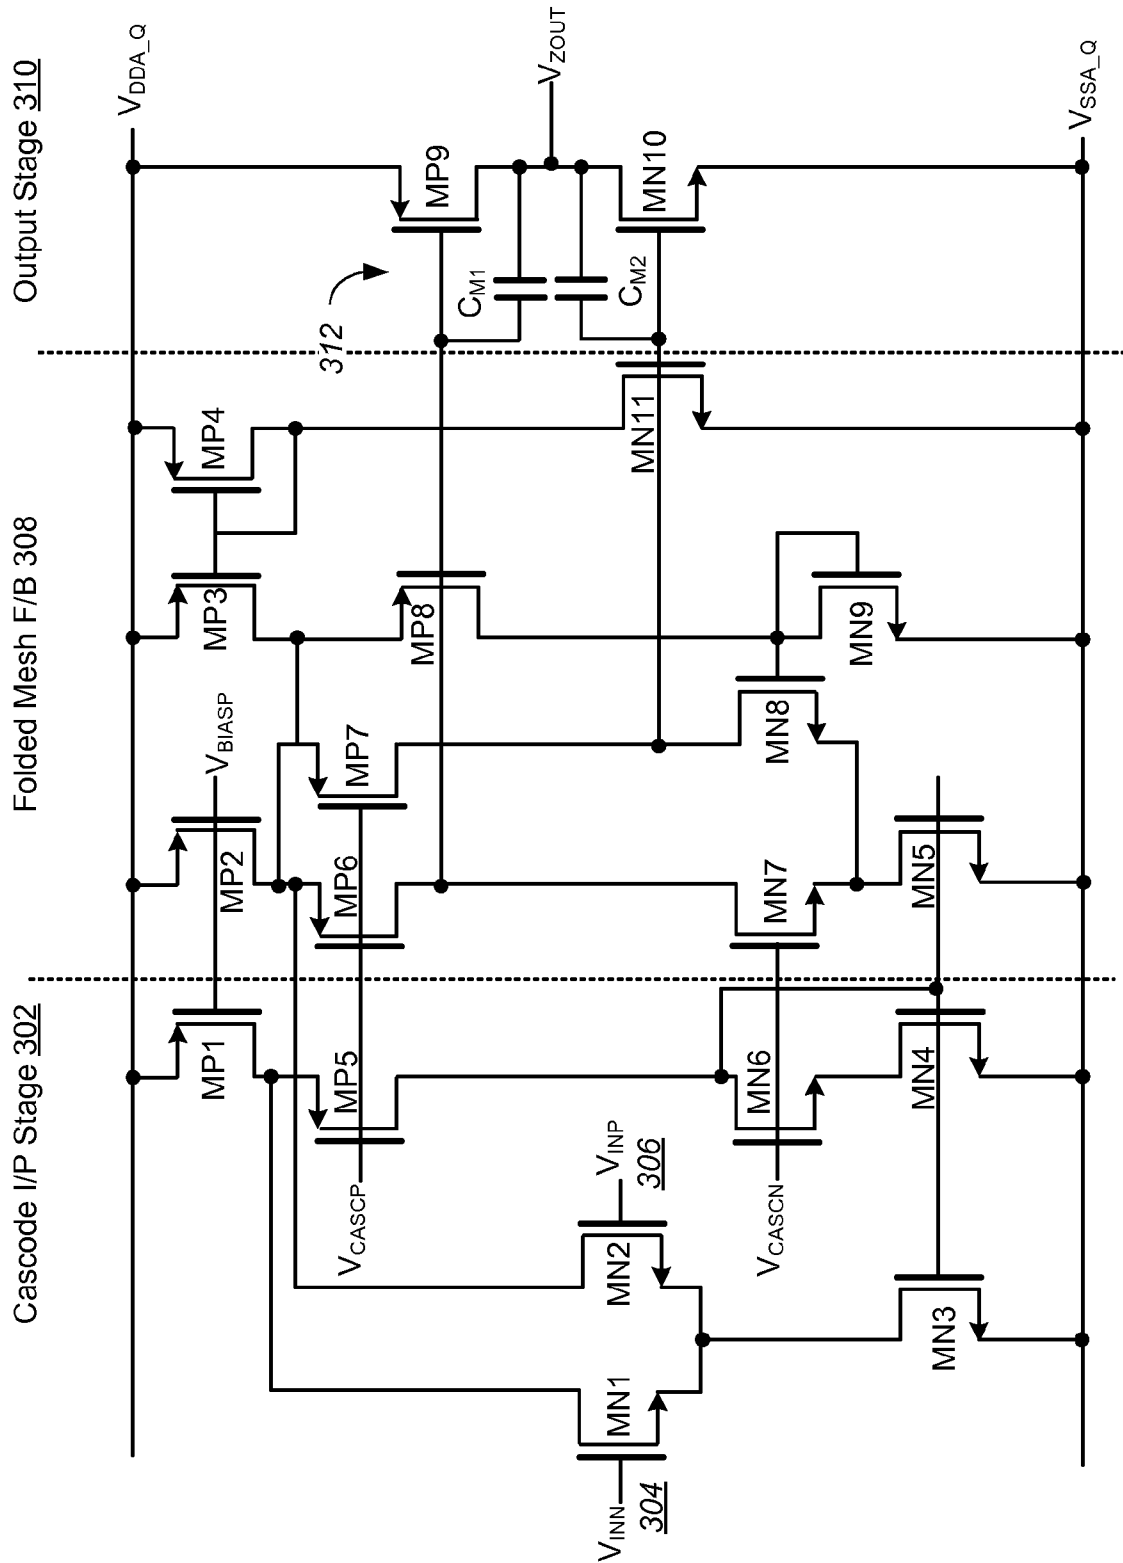


FIG. 3

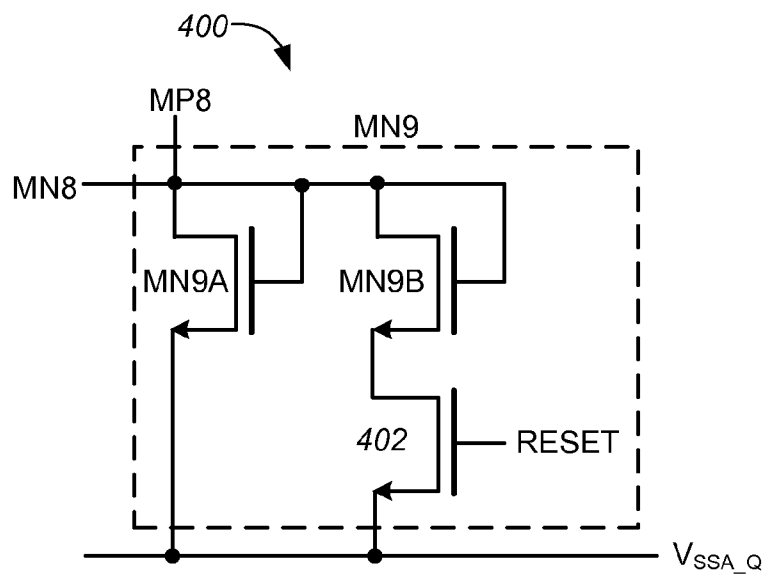


FIG. 4

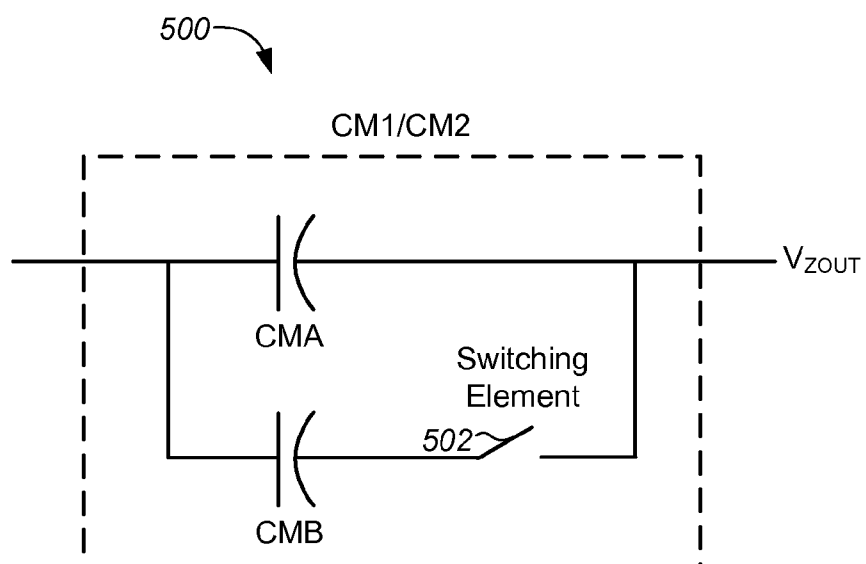


FIG. 5

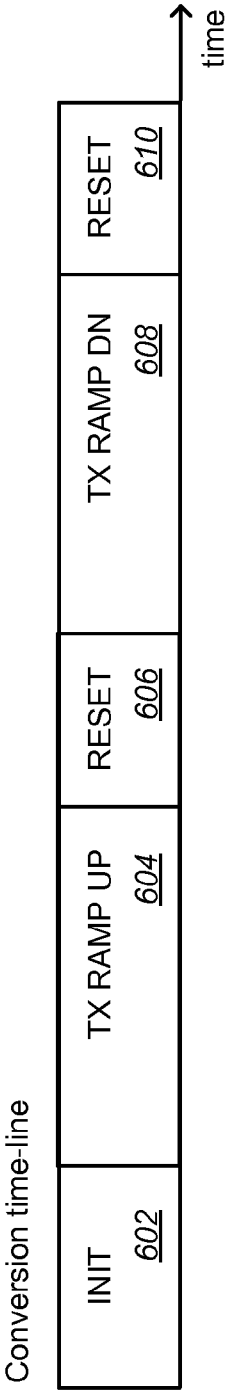


FIG. 6

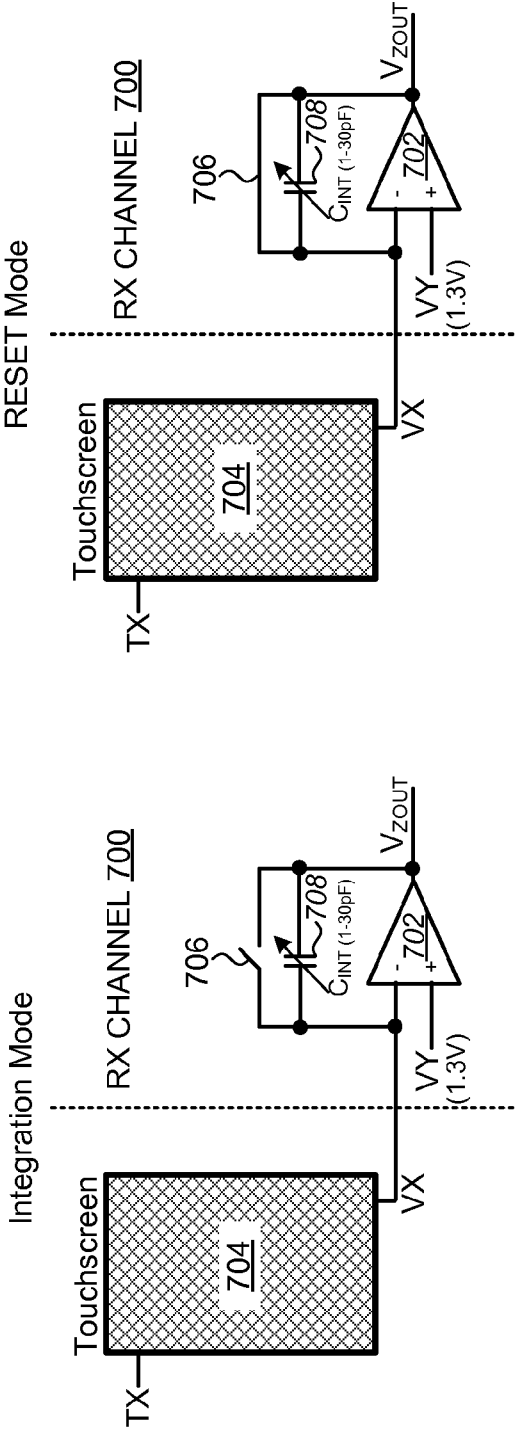


FIG. 7A

FIG. 7B

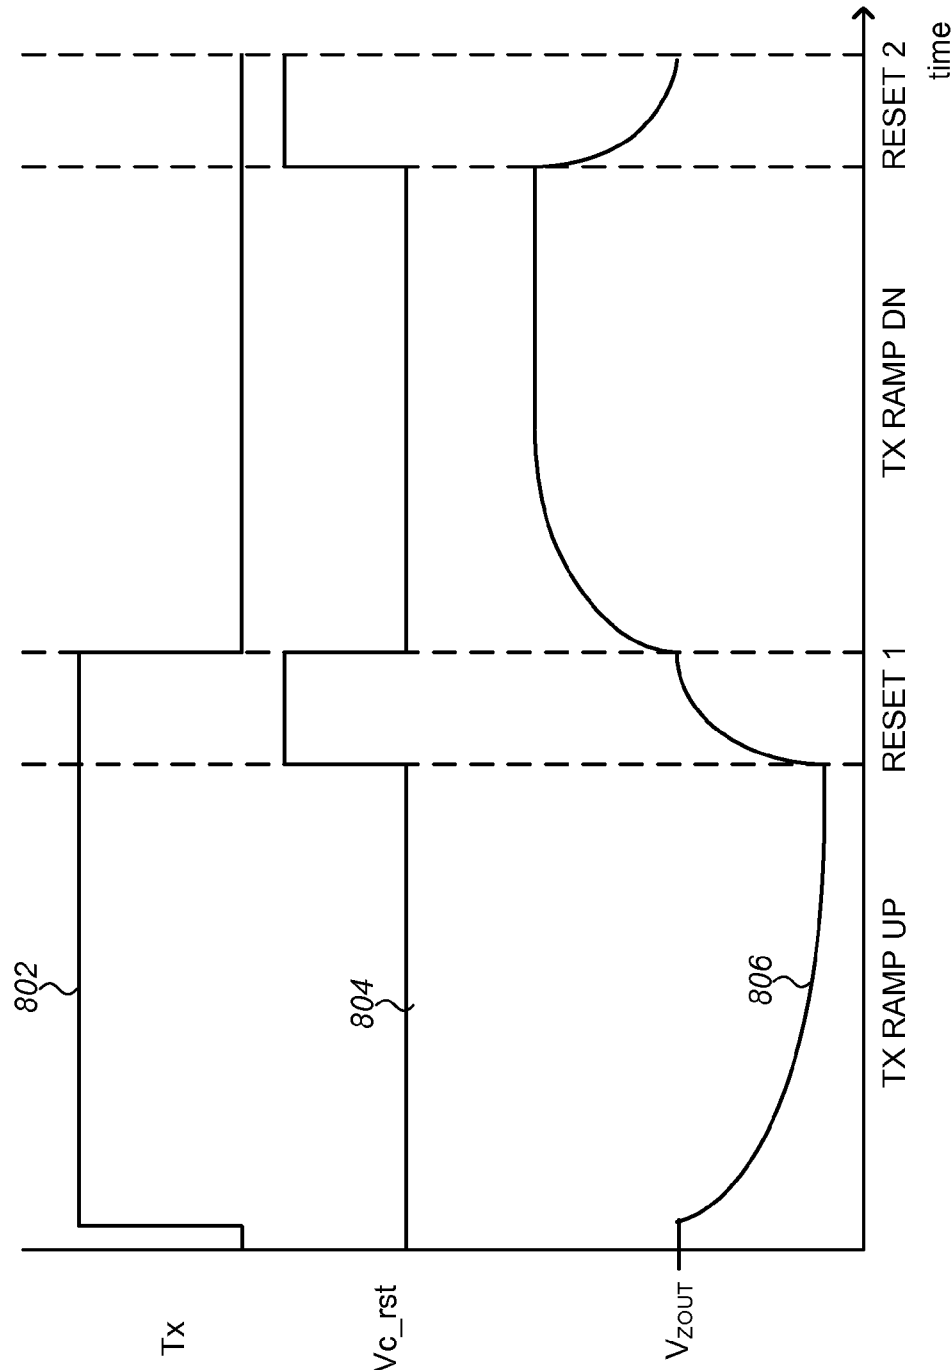


FIG. 8

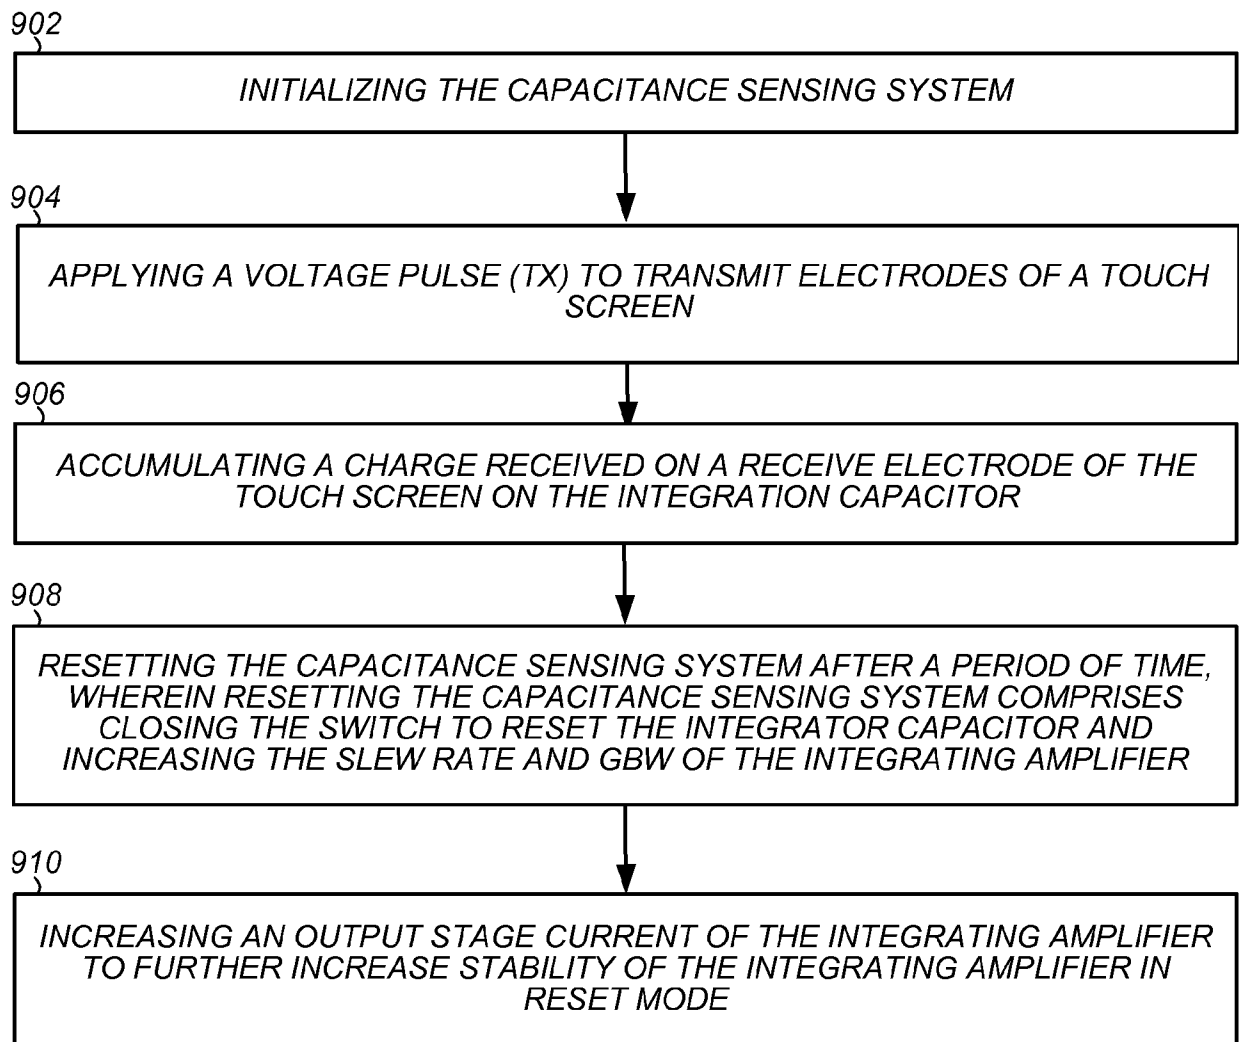


FIG. 9

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2012/052715

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - G06F 3/41 (2012.01)

USPC - 345/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - G01R 25/00, 29/26; G06F 3/41 (2012.01)

USPC - 324/76.77, 613; 345/173

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

MicroPatent, Google Patents, Google Scholar

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2012/0206154 A1 (PANT et al) 16 August 2012 (16.08.2012) entire document	1-20
Y	WO 2005/008776 A2 (BECKER et al) 27 January 2005 (27.01.2005) entire document	1-6, 10-12, 14-16
Y	US 7,482,843 B2 (TSUCHI et al) 27 January 2009 (27.01.2009) entire document	2, 3, 7-12, 18, 19
Y	US 6,140,871 A (TAFT) 31 October 2000 (31.10.2000) entire document	13-20

☐ Further documents are listed in the continuation of Box C.



* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

25 October 2012

Date of mailing of the international search report

13 NOV 2012

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-3201

Authorized officer:

Blaine R. Copenheaver

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774