

(43) International Publication Date
7 January 2016 (07.01.2016)(51) International Patent Classification:
G10L 19/008 (2013.01) *G10L 19/02* (2013.01)
H04S 3/00 (2006.01)(21) International Application Number:
PCT/EP2015/065089(22) International Filing Date:
2 July 2015 (02.07.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14306081.2 2 July 2014 (02.07.2014) EP
14194187.2 20 November 2014 (20.11.2014) EP

(71) Applicant: THOMSON LICENSING [FR/FR]; 1-5 rue Jeanne d'Arc, F-92130 Issy-les-Moulineaux (FR).

(72) Inventors: KRUEGER, Alexander; Feuerbachstrasse 16, 30655 Hannover (DE). KORDON, Sven; Mühlenkampstraße 50 A, 31515 Wunstorf (DE).

(74) Agent: KÖNIG, Uwe; Deutsche Thomson OHG, European Patent Operations, Karl-Wiechert-Allee 74, 30625 Hannover (DE).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR DECODING A COMPRESSED HOA REPRESENTATION, AND METHOD AND APPARATUS FOR ENCODING A COMPRESSED HOA REPRESENTATION

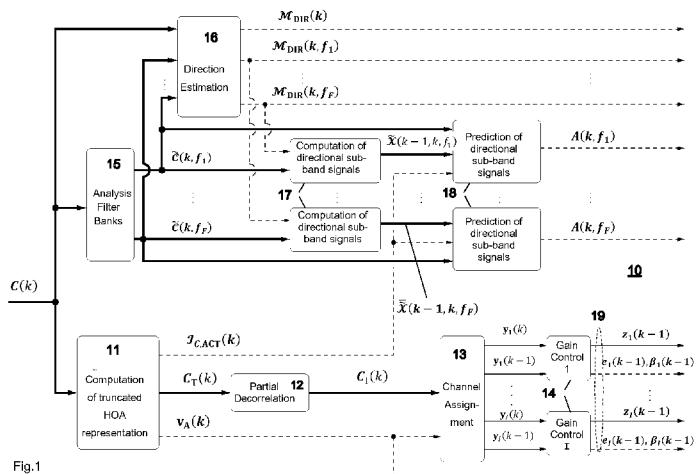

(57) **Abstract:** Encoding of Higher Order Ambisonics (HOA) signals commonly results in high data rates. A method for low bit-rate encoding frames of an input HOA signal having coefficient sequences comprises computing (s110) a truncated HOA representation ($C(k)$), determining (s111) active coefficient sequences ($C_{ACT}(k)$), estimating (s16) candidate directions ($M_{DIR}(k)$), dividing (s15) the input HOA signal into a plurality of frequency subbands (f_1, \dots, f_F), estimating (s161) for each of the frequency subbands a subset of candidate directions ($M_{DIR}(k)$) as active directions ($M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$) and for each active direction a trajectory, computing (s17) for each frequency subband directional subband signals from the coefficient sequences of the frequency subband according to the active directions, calculating (s18) for each frequency subband a prediction matrix ($A(k, f_1), \dots, A(k, f_F)$) that can be used for predicting the directional subband signals from the coefficient sequences of the frequency subband using the respective active coefficient sequences (K), and encoding (s19) the candidate directions, active directions, prediction matrices and truncated HOA representation.

Method and apparatus for decoding a compressed HOA representation, and method and apparatus for encoding a compressed HOA representation

This invention relates to a method for encoding frames of an input HOA signal having a given number of coefficient sequences, a method for decoding a HOA signal, an apparatus for encoding frames of an input HOA signal having a given number of coefficient sequences, and an apparatus for decoding a HOA signal.

Background

Higher Order Ambisonics (HOA) offers one possibility to represent three-dimensional sound, among other techniques like wave field synthesis (WFS) or channel based approaches like the one known as "22.2". In contrast to channel based methods, a HOA representation offers the advantage of being independent of a specific loudspeaker set-up. This flexibility comes at the expense of a decoding process that is required for the playback of the HOA representation on a particular loudspeaker set-up. Compared to the WFS approach, where the number of required loudspeakers is usually very large, HOA may also be rendered to set-ups consisting of only few loudspeakers. A further advantage of HOA is that the same representation can also be employed without any modification for binaural rendering to head-phones.

HOA is based on the representation of the so-called spatial density of complex harmonic plane wave amplitudes by a truncated Spherical Harmonics (SH) expansion. Each expansion coefficient is a function of angular frequency, which can be equivalently represented by a time domain function. Hence, without loss of generality, the complete HOA sound field representation actually can be understood as consisting of O time domain functions, where O denotes the number of expansion coefficients. These time domain functions will be equivalently referred to as HOA coefficient sequences or as HOA channels in the following.

The spatial resolution of the HOA representation improves with a growing maximum order N of the expansion. Unfortunately, the number of expansion coefficients O grows quadratically with the order N , and in particular $O = (N + 1)^2$. For example, typical HOA representations using order $N = 4$ require $O = 25$ HOA (expansion) coefficients. According to the above considerations, a total bit rate for the transmission of a HOA representation, given a desired single-channel sampling rate f_S and the number of bits N_b per sample, is determined by $O \cdot f_S \cdot N_b$. Consequently, transmitting a HOA representation e.g. of order $N = 4$ with a sampling rate of $f_S = 48kHz$ employing $N_b = 16$ bits per sample

results in a bit rate of 19.2MBits/s , which is very high for many practical applications such as e.g. streaming. Thus, a compression of HOA representations is highly desirable. Various approaches for compression of HOA sound field representations were proposed in [4, 5, 6]. These approaches have in common that they perform a sound field analysis and decompose the given HOA representation into a directional and a residual ambient component. The final compressed representation comprises, on the one hand, a number of quantized signals, resulting from the perceptual coding of so called directional and vector-based signals as well as relevant coefficient sequences of the ambient HOA component. On the other hand, it comprises additional side information related to the quantized signals, which is necessary for the reconstruction of the HOA representation from its compressed version.

A reasonable minimum number of quantized signals for the approaches [4, 5, 6] is eight. Hence, the data rate with one of these methods is typically not lower than 256kbit/s, assuming a data rate of 32kbit/s for each individual perceptual coder. For certain applications, like e.g. audio streaming to mobile devices, this total data rate might be too high. Thus, there is a demand for HOA compression methods addressing distinctly lower data rates, e.g. 128kbit/s.

Summary of the invention

20 A new method and apparatus for a low bit-rate compression of Higher Order Ambisonics (HOA) representations of sound fields is disclosed.

One main aspect of the low-bit rate compression method for HOA representations of sound fields is to decompose the HOA representation into a plurality of frequency sub-bands, and approximate coefficients within each frequency subband (ie. sub-band) by a 25 combination of a truncated HOA representation and a representation that is based on a number of predicted directional subband signals.

The truncated HOA representation comprises a small number of selected coefficient sequences, where the selection is allowed to vary over time. E.g. a new selection is made for every frame. The selected coefficient sequences to represent the truncated HOA 30 representation are perceptually coded and are a part of the final compressed HOA representation. In one embodiment, the selected coefficient sequences are de-correlated before perceptual coding, in order to increase the coding efficiency and to reduce the effect of noise unmasking at rendering. A partial de-correlation is achieved by applying a spatial transform to a predefined number of the selected HOA coefficient sequences. For 35 decompression, the de-correlation is reversed by re-correlation. A great advantage of

such partial de-correlation is that no extra side information is required to revert the de-correlation at decompression.

The other component of the approximated HOA representation is represented by a number of directional subband signals with corresponding directions. These are coded by a parametric representation that comprises a prediction from the coefficient sequences of the truncated HOA representation. In an embodiment, each directional subband signal is predicted (or represented) by a scaled sum of the coefficient sequences of the truncated HOA representation, where the scaling is, in general, complex valued. In order to be able to re-synthesize the HOA representation of the directional subband signals for decompression, the compressed representation contains quantized versions of the complex valued prediction scaling factors as well as quantized versions of the directions.

In one embodiment, a method for encoding (and thereby compressing) frames of an input HOA signal having a given number of coefficient sequences, where each coefficient sequence has an index, comprises steps of

determining a set of indices of active coefficient sequences $I_{C,ACT}(k)$ to be included in a truncated HOA representation,

computing the truncated HOA representation $C_T(k)$ having a reduced number of non-zero coefficient sequences (i.e. less non-zero coefficient sequences and thus more zero coefficient sequences than the input HOA signal),

estimating from the input HOA signal a first set of candidate directions $M_{DIR}(k)$,

dividing the input HOA signal into a plurality of frequency subbands, wherein coefficient sequences $\tilde{C}(k-1, k, f_{1,...,F})$ of the frequency subbands are obtained,

estimating for each of the frequency subbands a second set of directions $M_{DIR}(k, f_1)$,

..., $M_{DIR}(k, f_F)$, wherein each element of the second set of directions is a tuple of indices with a first and a second index, the second index being an index of an active direction for a current frequency subband and the first index being a trajectory index of the active direction, wherein each active direction is also included in the first set of candidate directions $M_{DIR}(k)$ of the input HOA signal (i.e. active subband directions in the second set of directions are a subset of the first set of full band directions),

for each of the frequency subbands, computing directional subband signals

$\tilde{X}(k-1, k, f_1), \dots, \tilde{X}(k-1, k, f_F)$ from the coefficient sequences $\tilde{C}(k-1, k, f_{1,...,F})$ of the frequency subband according to the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$ of the respective frequency subband,

for each of the frequency subbands, calculating a prediction matrix $A(k, f_1), \dots, A(k, f_F)$ that is adapted for predicting the directional subband signals $\tilde{X}(k-1, k, f_{1,...,F})$ from the

coefficient sequences $\bar{C}(k-1, k, f_1, \dots, f_F)$ of the frequency subband using the set of indices of active coefficient sequences $I_{C,ACT}(k)$ of the respective frequency subband, and encoding the first set of candidate directions $M_{DIR}(k)$, the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$, the prediction matrices $A(k, f_1), \dots, A(k, f_F)$ and the truncated HOA representation $C_T(k)$.

The second set of directions relates to frequency subbands. The first set of candidate directions relates to the full frequency band. Advantageously, in the step of estimating for each of the frequency subbands the second set of directions, the directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$ of a frequency subband need to be searched only among the directions $M_{DIR}(k)$ of the full band HOA signal, since the second set of subband directions is a subset of the first set of full band directions. In one embodiment, the sequential order of the first and second index within each tuple is swapped, ie. the first index is an index of an active direction for a current frequency subband and the second index is a trajectory index of the active direction.

A complete HOA signal comprises a plurality of coefficient sequences or coefficient channels. A HOA signal in which one or more of these coefficient sequences are set to zero is called a truncated HOA representation herein. Computing or generating a truncated HOA representation comprises generally a selection of coefficient sequences that will or will not be set to zero. This selection can be made according to various criteria, e.g. by selecting as coefficient sequences not to be set to zero those that comprise a maximum energy, or those that are perceptually most relevant, or selecting coefficient sequences arbitrarily etc. Dividing the HOA signal into frequency subbands can be performed by Analysis Filter banks, comprising e.g. Quadrature Mirror Filters (QMF).

In one embodiment, encoding the truncated HOA representation $C_T(k)$ comprises partial decorrelation of the truncated HOA channel sequences, channel assignment for assigning the (correlated or decorrelated) truncated HOA channel sequences $y_1(k), \dots, y_l(k)$ to transport channels, performing gain control on each of the transport channels, wherein gain control side information $e_i(k-1), \beta_i(k-1)$ for each transport channel is generated, encoding the gain controlled truncated HOA channel sequences $z_1(k), \dots, z_l(k)$ in a perceptual encoder, encoding the gain control side information $e_i(k-1), \beta_i(k-1)$, the first set of candidate directions $M_{DIR}(k)$, the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$ and the prediction matrices $A(k, f_1), \dots, A(k, f_F)$ in a side information source coder,

and multiplexing the outputs of the perceptual encoder and the side information source coder to obtain an encoded HOA signal frame $\tilde{\mathbf{B}}(k - 1)$.

In one embodiment, a computer readable medium has stored thereon executable

5 instructions to cause a computer to perform said method for encoding or compressing frames of an input HOA signal.

In one embodiment, an apparatus for frame-wise encoding (and thereby compressing) frames of an input HOA signal having a given number of coefficient sequences, where
10 each coefficient sequence has an index comprises a processor and a memory for a software program that when executed on the processor performs steps of the above-described method for encoding or compressing frames of an input HOA signal.

Further, in one embodiment, a method for decoding (and thereby decompressing) a

15 compressed HOA representation comprises

extracting from the compressed HOA representation a plurality of truncated HOA coefficient sequences $\hat{\mathbf{z}}_1(k), \dots, \hat{\mathbf{z}}_I(k)$, an assignment vector $\mathbf{v}_{\text{AMB,ASSIGN}}(k)$ indicating (or containing) sequence indices of said truncated HOA coefficient sequences, subband related direction information $\mathbf{M}_{\text{DIR}}(k+1, f_1), \dots, \mathbf{M}_{\text{DIR}}(k+1, f_F)$, a plurality of prediction matrices $\mathbf{A}(k+1, f_1), \dots, \mathbf{A}(k+1, f_F)$, and gain control side information $e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$,

20 reconstructing a truncated HOA representation $\hat{\mathbf{C}}_T(k)$ from the plurality of truncated HOA coefficient sequences $\hat{\mathbf{z}}_1(k), \dots, \hat{\mathbf{z}}_I(k)$, the gain control side information $e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$ and the assignment vector $\mathbf{v}_{\text{AMB,ASSIGN}}(k)$,

decomposing in Analysis Filter banks the reconstructed truncated HOA representation

25 $\hat{\mathbf{C}}_T(k)$ into frequency subband representations $\hat{\mathbf{C}}_T(k, f_1), \dots, \hat{\mathbf{C}}_T(k, f_F)$ for a plurality of F frequency subbands,

synthesizing in Directional Subband Synthesis blocks for each of the frequency subband representations a predicted directional HOA representation $\hat{\mathbf{C}}_D(k, f_1), \dots, \hat{\mathbf{C}}_D(k, f_F)$ from the respective frequency subband representation $\hat{\mathbf{C}}_T(k, f_1), \dots, \hat{\mathbf{C}}_T(k, f_F)$ of the

30 reconstructed truncated HOA representation, the subband related direction information $\mathbf{M}_{\text{DIR}}(k+1, f_1), \dots, \mathbf{M}_{\text{DIR}}(k+1, f_F)$ and the prediction matrices $\mathbf{A}(k+1, f_1), \dots, \mathbf{A}(k+1, f_F)$,

composing in Subband Composition blocks for each of the F frequency subbands a

decoded subband HOA representation $\hat{\mathbf{C}}(k, f_1), \dots, \hat{\mathbf{C}}(k, f_F)$ with coefficient sequences

$\hat{\mathbf{c}}_n(k, f_j)$, $n = 1, \dots, O$ that are either obtained from coefficient sequences of the truncated

35 HOA representation $\hat{\mathbf{C}}_T(k, f_j)$ if the coefficient sequence has an index n that is included in

(ie. an element of) the assignment vector $v_{AMB,ASSIGN}(k)$, or otherwise obtained from coefficient sequences of the predicted directional HOA component $\widehat{\mathcal{C}}_D(k, f_j)$ provided by one of the Directional Subband Synthesis blocks, and synthesizing in Synthesis Filter banks the decoded subband HOA representations $\widehat{\mathcal{C}}(k, f_1), \dots, \widehat{\mathcal{C}}(k, f_F)$ to obtain the decoded HOA representation $\widehat{\mathcal{C}}(k)$.

In one embodiment, the extracting comprises demultiplexing the compressed HOA representation to obtain a perceptually coded portion and an encoded side information portion. In one embodiment, the perceptually coded portion comprises perceptually encoded truncated HOA coefficient sequences $\check{z}_1(k), \dots, \check{z}_I(k)$ and the extracting comprises decoding in a perceptual decoder the perceptually encoded truncated HOA coefficient sequences $\check{z}_1(k), \dots, \check{z}_I(k)$ to obtain the truncated HOA coefficient sequences $\widehat{z}_1(k), \dots, \widehat{z}_I(k)$. In one embodiment, the extracting comprises decoding in a side information source decoder the encoded side information portion to obtain the set of subband related directions $M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$, prediction matrices $A(k+1, f_1), \dots, A(k+1, f_F)$, gain control side information $e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$ and assignment vector $v_{AMB,ASSIGN}(k)$.

In one embodiment, a computer readable medium has stored thereon executable instructions to cause a computer to perform said method for decoding of directions of dominant directional signals.

In one embodiment, an apparatus for frame-wise decoding (and thereby decompressing) a compressed HOA representation comprises a processor and a memory for a software program that when executed on the processor performs steps of the above-described method for decoding or decompressing frames of an input HOA signal.

In one embodiment, an apparatus for decoding a HOA signal comprises a first module configured to receive indices of a maximum number of directions D for a HOA signal representation to be decoded, a second module configured to reconstruct directions of a maximum number of directions D of the HOA signal representation to be decoded, a third module configured to receive indices of active direction signals per subband, a fourth module configured to reconstruct active direction signals per subband from the reconstructed directions D of the HOA signal representation to be decoded, and a fifth module configured to predict directional signals of subbands, wherein the predicting of a directional signal in a current frame of a subband comprises determining directional

signals of a preceding frame of the subband, and wherein a new directional signal is created if the index of the directional signal was zero in the preceding frame and is non-zero in the current frame, a previous directional signal is cancelled if the index of the directional signal was non-zero in the preceding frame and is zero in the current frame, 5 and a direction of a directional signal is moved from a first to a second direction if the index of the directional signal changes from the first to the second direction.

The subbands are generally obtained from a complex valued filter bank. One purpose of the assignment vector is to indicate sequence indices of coefficient sequences that are 10 transmitted/received, and thus contained in the truncated HOA representation, so as to enable an assignment of these coefficient sequences to the final HOA signal. In other words, the assignment vector indicates, for each of the coefficient sequences of the truncated HOA representation, to which coefficient sequence in the final HOA signal it corresponds. For example, if a truncated HOA representation contains four coefficient 15 sequences and the final HOA signal has nine coefficient sequences, the assignment vector may be [1,2,5,7] (in principle), thereby indicating that the first, second, third and fourth coefficient sequence of the truncated HOA representation are actually the first, second, fifth and seventh coefficient sequence in the final HOA signal.

20 Further objects, features and advantages of the invention will become apparent from a consideration of the following description and the appended claims when taken in connection with the accompanying drawings.

Brief description of the drawings

25 Exemplary embodiments of the invention are described with reference to the accompanying drawings, which show in
Fig.1 an architecture of a spatial HOA encoder,
Fig.2 an architecture of a direction estimation block,
Fig.3 a perceptual side information source encoder,
30 Fig.4 a perceptual side information source decoder,
Fig.5 an architecture of a spatial HOA decoder,
Fig.6 a spherical coordinate system,
Fig.7 a direction estimation processing block,
Fig.8 directions, a trajectory index set and coefficients of a truncated HOA representation,
35 Fig.9 a conventional audio encoder as used in MPEG,
Fig.10 an improved audio encoder as usable in MPEG,

Fig.11 a conventional audio decoder as used in MPEG,
Fig.12 an improved audio decoder as usable in MPEG,
Fig.13 a flow-chart of an encoding method, and
Fig.14 a flow-chart of a decoding method.

5

Detailed description of preferred embodiments

One main idea of the proposed low-bit rate compression method for HOA representations of sound fields is to approximate the original HOA representation frame-wise and frequency subband-wise, i.e. within individual frequency subbands of each HOA frame,

10 by a combination of two portions: a truncated HOA representation and a representation based on a number of predicted directional subband signals. A summary of HOA basics is provided further below.

The first portion of the approximated HOA representation is a truncated HOA version that consists of a small number of selected coefficient sequences, where the selection is

15 allowed to vary over time (e.g. from frame to frame). The selected coefficient sequences to represent the truncated HOA version are then perceptually coded and are a part of the final compressed HOA representation. In order to increase the coding efficiency and to reduce the effect of noise unmasking at rendering, it is advantageous to de-correlate the selected coefficient sequences before perceptual coding. A partial de-correlation is

20 achieved by applying to a predefined number of the selected HOA coefficient sequences a spatial transform, which means the rendering to a given number of virtual loudspeaker signals. A great advantage of that partial de-correlation is that no extra side information is required to revert the de-correlation at decompression.

The second portion of the approximated HOA representation is represented by a number 25 of directional subband signals with corresponding directions. However, these are *not* conventionally coded. Instead, they are coded as a parametric representation by means

of a prediction from the coefficient sequences of the first portion, i.e. the truncated HOA representation. In particular, each directional subband signal is predicted by a scaled sum of coefficient sequences of the truncated HOA representation, where the scaling is

30 complex valued in general. Both portions together form a compressed representation of the HOA signal, thus achieving a low bit rate. In order to be able to re-synthesize the HOA representation of the directional subband signals for decompression, the compressed representation contains quantized versions of the complex valued prediction scaling factors as well as quantized versions of the directions.

35 Particularly important aspects in this context are the computation of the directions and of the complex valued prediction scaling factors, and how to code them efficiently.

Low bit rate HOA compression

For the proposed low bit rate HOA compression, a low bit rate HOA compressor can be subdivided into a spatial HOA encoding part and a perceptual and source encoding part. An exemplary architecture of the spatial HOA encoding part is illustrated in Fig.1, and an exemplary architecture of a perceptual and source encoding part is depicted in Fig.3. The spatial HOA encoder 10 provides a first compressed HOA representation comprising I signals together with side information that describes how to create a HOA representation thereof. In the Perceptual and Side Information Source Coder 30, these I signals are perceptually encoded in a Perceptual Coder 31, and the side information is subjected to source encoding in a Side Information Source Coder 32. The Side Information Source Coder 32 provides coded side information \tilde{I} . Then, the two coded representations provided by the Perceptual Coder 31 and the Side Information Source Coder 32 are multiplexed in a Multiplexer 33 to obtain the low bit rate compressed HOA data stream \tilde{B} .

15 Spatial HOA encoding

The spatial HOA encoder illustrated in Fig.1 performs frame-wise processing. Frames are defined as portions of O time-continuous HOA coefficient sequences. E.g. a k -th frame $\mathbf{c}(k)$ of the input HOA representation to be encoded is defined with respect to the vector $\mathbf{c}(t)$ of time-continuous HOA coefficient sequences (cf. eq. (46)) as

$$20 \quad \mathbf{c}(k) := [\mathbf{c}((kL + 1)T_S) \quad \mathbf{c}((kL + 2)T_S) \quad \dots \quad \mathbf{c}((k + 1)LT_S)] \in \mathbb{R}^{O \times L} \quad (1)$$

where k denotes the frame index, L denotes the frame length (in samples), $O = (N + 1)^2$ denotes the number of HOA coefficient sequences and T_S indicates the sampling period.

25 Computation of a truncated HOA representation

As shown in Fig.1, a first step in computing the truncated HOA representation comprises computing 11 from the original HOA frame $\mathbf{c}(k)$ a truncated version $\mathbf{c}_T(k)$. Truncation in this context means the selection of I particular coefficient sequences out of the O coefficient sequences of the input HOA representation, and setting all the other coefficient sequences to zero. Various solutions for the selection of coefficient sequences are known from [4,5,6], e.g. those with maximum power or highest relevance with respect to human perception. The selected coefficient sequences represent the truncated HOA version. A data set $\mathcal{I}_{C,ACT}(k)$ is generated that contains the indices of the selected coefficient sequences. Then, as described further below, the truncated HOA version $\mathbf{c}_T(k)$ will be partially de-correlated 12, and the partially de-correlated truncated HOA version $\mathbf{c}_1(k)$ will

be subject to channel assignment 13, where the chosen coefficient sequences are assigned to the available I transport channels. As further described below, these coefficient sequences are then perceptually encoded 30 and are finally a part of the compressed representation. To obtain smooth signals for the perceptual encoding after the channel assignment, coefficient sequences that are selected in the k^{th} frame but not in the $(k+1)^{\text{th}}$ frame are determined. Those coefficient sequences that are selected in a frame and will not be selected in the next frame are faded out. Their indices are contained in the data set $\mathcal{I}_{C,\text{ACT,OUT}}(k)$, which is a subset of $\mathcal{I}_{C,\text{ACT}}(k)$. Similarly, coefficient sequences that are selected in the k^{th} frame but were not selected in the $(k-1)^{\text{th}}$ frame are faded in. Their indices are contained in the set $\mathcal{I}_{C,\text{ACT,IN}}(k)$, which is also a subset of $\mathcal{I}_{C,\text{ACT}}(k)$. For the fading, a window function $w_{\text{OA}}(l)$, $l = 1, \dots, 2L$ (such as the one introduced below in eq. (39)) may be used.

Altogether, if a HOA frame k of the truncated version $C_T(k)$ is composed of the L samples of the O individual coefficient sequence frames by

$$15 \quad C_T(k) = \begin{bmatrix} c_{T,1}(k, 1) & \dots & c_{T,1}(k, L) \\ c_{T,2}(k, 1) & \dots & c_{T,2}(k, L) \\ \vdots & \ddots & \vdots \\ c_{T,O}(k, 1) & \dots & c_{T,O}(k, L) \end{bmatrix} \quad (2)$$

then the truncation can be expressed for coefficient sequence indices $n = 1, \dots, O$ and sample indices $l = 1, \dots, L$ by

$$c_{T,n}(k) = \begin{cases} c_n(k, l) \cdot w_{\text{OA}}(l) & \text{if } n \in \mathcal{I}_{C,\text{ACT,IN}}(k) \\ c_n(k, l) \cdot w_{\text{OA}}(L+l) & \text{if } n \in \mathcal{I}_{C,\text{ACT,OUT}}(k) \\ c_n(k, l) & \text{if } n \in \mathcal{I}_{C,\text{ACT}}(k) \setminus (\mathcal{I}_{C,\text{ACT,IN}}(k) \cup \mathcal{I}_{C,\text{ACT,OUT}}(k)) \\ 0 & \text{else} \end{cases} \quad (3)$$

20 There are several possibilities for the criteria for the selection of the coefficient sequences. E.g., one advantageous solution is selecting those coefficient sequences that represent most of the signal power. Another advantageous solution is selecting those coefficient sequences that are most relevant with respect to the human perception. In the latter case the relevance may be determined e.g. by rendering differently truncated representations to virtual loudspeaker signals, determining the error between these signals and virtual loudspeaker signals corresponding to the original HOA representation and finally interpreting the relevance of the error, considering sound masking effects.

25 A reasonable strategy for selecting the indices in the set $\mathcal{I}_{C,\text{ACT}}(k)$ is, in one embodiment, to select always the first O_{MIN} indices $1, \dots, O_{\text{MIN}}$, where $O_{\text{MIN}} = (N_{\text{MIN}} + 1)^2 \leq I$ and N_{MIN} denotes a given minimum full order of the truncated HOA representation. Then, select the remaining $I - O_{\text{MIN}}$ indices from the set $\{O_{\text{MIN}} + 1, \dots, O_{\text{MAX}}\}$ according to one of the

criteria mentioned above, where $O_{MAX} = (N_{MAX} + 1)^2 \leq O$ with N_{MAX} denoting a maximum order of the HOA coefficient sequences that are considered for selection. Note that O_{MAX} is the maximum number of transferable coefficients per sample, which is less than or equal to the total number O of coefficients. According to this strategy, the truncation processing block 11 also provides a so-called assignment vector $\mathbf{v}_A(k) \in \mathbb{N}^{I-O_{MIN}}$, whose elements $v_{A,i}(k)$, $i = 1, \dots, I - O_{MIN}$, are set according to

$$v_{A,i}(k) = n \quad (4)$$

where n (with $n \geq O_{MIN} + 1$) denotes the HOA coefficient sequence index of the additionally selected HOA coefficient sequence of $C(k)$ that will later be assigned to the i -th transport signal $\mathbf{y}_i(k)$. The definition of $\mathbf{y}_i(k)$ is given in eq.(10) below. Thus, the first O_{MIN} rows of $C_T(k)$ comprise by default the HOA coefficient sequences $1, \dots, O_{MIN}$, and among the following $O - O_{MIN}$ (or $O_{MAX} - O_{MIN}$, if $O = O_{MAX}$) rows of $C_T(k)$, there are $I - O_{MIN}$ rows that comprise frame-wise varying HOA coefficient sequences whose indices are stored in the assignment vector $\mathbf{v}_A(k)$. Finally, the remaining rows of $C_T(k)$ comprise zeroes. Consequently, as will be described below, the first (or last, as in eq.(10)) O_{MIN} of the available I transport signals are assigned by default to HOA coefficient sequences $1, \dots, O_{MIN}$, and the remaining $I - O_{MIN}$ transport signals are assigned to frame-wise varying HOA coefficient sequences whose indices are stored in the assignment vector $\mathbf{v}_A(k)$.

20

Partial de-correlation

In the second step, a partial de-correlation 12 of the selected HOA coefficient sequences is carried out in order to increase the efficiency of the subsequent perceptual encoding, and to avoid coding noise unmasking that would occur after matrixing the selected HOA coefficient sequences at rendering. An exemplary partial de-correlation 12 is achieved by applying a spatial transform to the first O_{MIN} selected HOA coefficient sequences, which means the rendering to O_{MIN} virtual loudspeaker signals. The respective virtual loudspeaker positions are expressed by means of a spherical coordinate system shown in Fig.6, where each position is assumed to lie on the unit sphere, i.e. to have a radius of 1. Hence, the positions can be equivalently expressed by directions $\Omega_j = (\theta_j, \phi_j)$ with $1 \leq j \leq O_{MIN}$, where θ_j and ϕ_j denote the inclinations and azimuths, respectively (see further below for the definition of the spherical coordinate system). These directions should be distributed on the unit sphere as uniformly as possible (see e.g. [2] on the computation of specific directions). Note that, since HOA in general defines directions in dependence of N_{MIN} , actually $\Omega_j^{(N_{MIN})}$ is meant where Ω_j is written herein.

In the following, the frame of all virtual loudspeaker signals is denoted by

$$\mathbf{W}(k) = \begin{bmatrix} \mathbf{w}_1(k) \\ \mathbf{w}_2(k) \\ \vdots \\ \mathbf{w}_{O_{\text{MIN}}}(k) \end{bmatrix} \quad (5)$$

where $\mathbf{w}_j(k)$ denotes the k -th frame of the j -th virtual loudspeaker signal. Further, Ψ_{MIN} denotes the mode matrix with respect to the virtual directions Ω_j , with $1 \leq j \leq O_{\text{MIN}}$. The mode matrix is defined by

$$\Psi_{\text{MIN}} := [\mathbf{S}_{\text{MIN},1} \ \dots \ \mathbf{S}_{\text{MIN},O_{\text{MIN}}}] \in \mathbb{R}^{O_{\text{MIN}} \times O_{\text{MIN}}} \quad (6)$$

with

$$\mathbf{S}_{\text{MIN},i} := [S_0^0(\Omega_i) \ S_1^{-1}(\Omega_i) \ S_1^0(\Omega_i) \ S_1^1(\Omega_i) \ \dots \ S_N^{N-1}(\Omega_i) \ S_N^N(\Omega_i)] \in \mathbb{R}^{O_{\text{MIN}}} \quad (7)$$

indicating the mode vector with respect to the virtual direction Ω_i . Each of its elements $S_n^m(\cdot)$ denotes the real valued Spherical Harmonics function defined below (see eq.(48)). Using this notation, the rendering process can be formulated by the matrix multiplication

$$\mathbf{W}(k) = (\Psi_{\text{MIN}})^{-1} \cdot \begin{bmatrix} \mathbf{c}_1(k) \\ \vdots \\ \mathbf{c}_{O_{\text{MIN}}}(k) \end{bmatrix} \quad (8)$$

The signals of the intermediate representation $\mathbf{c}_1(k)$, which is output of the partial de-correlation 12, are hence given by

$$\mathbf{c}_{I,n}(k) = \begin{cases} \mathbf{w}_n(k) & \text{if } 1 \leq n \leq O_{\text{MIN}} \\ \mathbf{c}_{T,n}(k) & O_{\text{MIN}} + 1 \leq n \leq O \end{cases} \quad (9)$$

Channel assignment

After having computed the frame of the intermediate representation $\mathbf{c}_1(k)$, its individual signals $\mathbf{c}_{I,n}(k)$ with $n \in \mathcal{I}_{C,\text{ACT}}(k)$ are assigned 13 to the available I channels, to provide the transport signals $\mathbf{y}_i(k)$, $i = 1, \dots, I$, for perceptual encoding. One purpose of the assignment 13 is to avoid discontinuities of the signals to be perceptually encoded, which might occur in a case where the selection changes between successive frames. The assignment can be expressed by

$$\mathbf{y}_i(k) = \begin{cases} \mathbf{c}_{I,v_{A,i}(k)}(k) & \text{if } 1 \leq i \leq I - O_{\text{MIN}} \\ \mathbf{c}_{I,i-(I-O_{\text{MIN}})}(k) & \text{if } I - O_{\text{MIN}} < i \leq I \end{cases} \quad (10)$$

Gain control

Each of the transport signals $\mathbf{y}_i(k)$ is finally processed by a Gain Control unit 14, where the signal gain is smoothly modified to achieve a value range that is suitable for the

perceptual encoders. The gain modification requires a kind of look-ahead in order to avoid severe gain changes between successive blocks, and hence introduces a delay of one frame. For each transport signal frame $y_i(k)$, the Gain Control units 14 either receive or generate a delayed frame $y_i(k-1)$, $i = 1, \dots, I$. The modified signal frames after the 5 gain control are denoted by $z_i(k-1)$, $i = 1, \dots, I$. Further, in order to be able to revert in a spatial decoder any modifications made, gain control side information is provided. The gain control side information comprises the exponents $e_i(k-1)$ and the exception flags $\beta_i(k-1)$, $i = 1, \dots, I$. A more detailed description of the Gain Control is available e.g. in [9], Sect.C.5.2.5, or [3]. Thus, the truncated HOA version 19 comprises gain controlled 10 signal frames $z_i(k-1)$ and gain control side information $e_i(k-1), \beta_i(k-1)$, $i = 1, \dots, I$.

Analysis Filter Banks

As mentioned above, the approximated HOA representation is composed of two portions, namely the truncated HOA version 19 and a component that is represented by directional 15 subband signals with corresponding directions, which are predicted from the coefficient sequences of the truncated HOA representation. Hence, to compute a parametric representation of the second portion, each frame of an individual coefficient sequence of the original HOA representation $c_n(k)$, $n = 1, \dots, O$, is first decomposed into frames of individual subband signals $\tilde{c}_n(k, f_1), \dots, \tilde{c}_n(k, f_F)$. This is done in one or more Analysis 20 Filter Banks 15. For each subband f_j , $j = 1, \dots, F$, the frames of the subband signals of the individual HOA coefficient sequences may be collected into the subband HOA representation

$$\tilde{c}(k, f_j) = \begin{bmatrix} \tilde{c}_1(k, f_j) \\ \tilde{c}_2(k, f_j) \\ \vdots \\ \tilde{c}_O(k, f_j) \end{bmatrix} \quad \text{for } j = 1, \dots, F \quad (11)$$

25 The Analysis Filter Banks 15 provide the subband HOA representations to a Direction Estimation Processing block 16 and to one or more computation blocks 17 for directional subband signal computation.

In principle, any type of filters (i.e. any complex valued filter bank, e.g. QMF, FFT) may be 30 used in the Analysis Filter Banks 15. It is not required that a successive application of an analysis and a corresponding synthesis filter bank provides the delayed identity, which would be what is known as perfect reconstruction property. Note that, in contrast to the HOA coefficient sequences $c_n(k)$, their subband representations $\tilde{c}_n(k, f_j)$ are generally

complex valued. Further, the subband signals $\tilde{c}_n(k, f_j)$ are in general decimated in time, compared to the original time-domain signals. As a consequence, the number of samples in the frames $\tilde{c}_n(k, f_j)$ is usually distinctly smaller than the number of samples in the time-domain signal frames $c_n(k)$, which is L .

5

In one embodiment, two or more subband signals are combined into subband signal groups, in order to better adapt the processing to the properties of the human hearing system. The bandwidths of each group can be adapted e.g. to the well-known Bark scale by the number of its subband signals. That is, especially in the higher frequencies two or 10 more groups can be combined into one. Note that in this case each subband group consists of a set of HOA coefficient sequences $\tilde{c}(k, f_j)$, where the number of extracted parameters is the same as for a single subband. In one embodiment, the grouping is performed in one or more subband signal grouping units (not explicitly shown), which may be incorporated in the Analysis Filter Bank block 15.

15

Direction Estimation

The Direction Estimation Processing block 16 analyzes the input HOA representation and computes for each frequency subband f_j , $j = 1, \dots, F$, a set $\mathcal{M}_{\text{DIR}}(k, f_j)$ of directions of subband general plane wave functions that add a major contribution to the sound field. In 20 this context, the term "major contribution" may for instance refer to the signal power being higher as the signal power of subband general plane waves impinging from other directions. It may also refer to a high relevance in terms of the human perception. Note that, where subband grouping is used, instead of a single subband also a subband group can be used for the computation of $\mathcal{M}_{\text{DIR}}(k, f_j)$.

25

During decompression, artifacts in the predicted directional subband signals might occur due to changes of the estimated directions and prediction coefficients between successive frames. In order to avoid such artifacts, the direction estimation and prediction of directional subband signals during encoding are performed on concatenated long 30 frames. A concatenated long frame consists of a current frame and its predecessor. For decompression, the quantities estimated on these long frames are then used to perform overlap add processing with the predicted directional subband signals.

35

A straight forward approach for the direction estimation would be to treat each subband separately. For the direction search, in one embodiment, e.g. the technique proposed in [7] may be applied. This approach provides, for each individual subband, smooth

temporal trajectories of direction estimates, and is able to capture abrupt direction changes or onsets. However, there are two disadvantages with this known approach. First, the independent direction estimation in each subband may lead to the undesired effect that, in the presence of a full-band general plane wave (e.g. a transient drum beat from a certain direction), estimation errors in the individual sub-directions may lead to subband general plane waves from different directions that do not add up to the desired full-band version from one single direction. In particular, transient signals from certain directions are blurred.

Second, considering the intention to obtain a low bit-rate compression, the total bit-rate resulting from the side information must be kept in mind. In the following, an example will show that the bit rate for such naive approach is rather high. Exemplarily, the number of subbands F is assumed to be 10, and the number of directions for each subband (which corresponds to the number of elements in each set $\mathcal{M}_{\text{DIR}}(k, f_j)$) is assumed to be 4. Further, it is assumed to perform for each subband the search on a grid of $Q = 900$ potential direction candidates, as proposed in [9]. This requires $\lceil \log_2(Q) \rceil = 10$ bits for the simple coding of a single direction. Assuming a frame rate of about 50 frames per second, a resulting overall data rate is

$$10 \frac{\text{bit}}{\text{direction}} \cdot 4 \frac{\text{directions}}{\text{band}} \cdot 10 \frac{\text{bands}}{\text{frame}} \cdot 50 \frac{\text{frames}}{\text{s}} = 20 \text{ kbit/s}$$

just for a coded representation of the directions. Even if a frame rate of 25 frames per second is assumed, the resulting data rate of 10 kbit/s is still rather high.

As an improvement, the following method for direction estimation is used in a Direction Estimation block 20, in one embodiment. The general idea is illustrated in Fig.2. In a first step, a Full-band Direction Estimation block 21 performs a preliminary full-band direction estimation, or search, on a direction grid that consists of Q test directions $\Omega_{\text{TEST},q}$, $q = 1, \dots, Q$, using the concatenated long frame

$$\bar{\mathbf{C}}(k-1; k) = [\mathbf{C}(k-1) \quad \mathbf{C}(k)] \quad (12)$$

where $\mathbf{C}(k)$ and $\mathbf{C}(k-1)$ are the current and previous input frames of the full-band original HOA representation. This direction search provides a number of $D(k) \leq D$ direction candidates $\Omega_{\text{CAND},d}(k)$, $d = 1, \dots, D(k)$, which are contained in the set $\mathcal{M}_{\text{DIR}}(k)$, i.e.

$$\mathcal{M}_{\text{DIR}}(k) = \{\Omega_{\text{CAND},1}(k), \dots, \Omega_{\text{CAND},D(k)}(k)\}. \quad (13)$$

A typical value for the maximum number of direction candidates per frame is $D = 16$. The direction estimation can be accomplished e.g. by the method proposed in [7]: the idea is

to combine the information obtained from a directional power distribution of the input HOA representation with a simple source movement model for the Bayesian inference of the directions.

5 In a second step, a direction search is carried out for each individual subband by a Subband Direction Estimation block 22 per subband (or subband group). However, this direction search for subbands needs not consider the initial full direction grid consisting of Q test directions, but rather only the candidate set $\mathcal{M}_{\text{DIR}}(k)$, comprising only $D(k)$ directions for each subband. The number of directions for the f_j -th subband, $j = 1, \dots, F$,
10 denoted by $D_{\text{SB}}(k, f_j)$, is not greater than D_{SB} , which is typically distinctly smaller than D , e.g. $D_{\text{SB}} = 4$. Like the full-band direction search, the subband related direction search is also performed on long concatenated frames of subband signals

$$\bar{\mathcal{C}}(k-1; k; f_j) = [\bar{\mathcal{C}}(k-1, f_j) \quad \bar{\mathcal{C}}(k, f_j)] \quad j = 1, \dots, F \quad (14)$$

15 consisting of the previous and current frame. In principle, the same Bayesian inference methods as for the full-band related direction search may be applied for the subband related direction search.

The direction of a particular sound source may (but needs not) change over time. A temporal sequence of directions of a particular sound source is called “trajectory” herein. Each subband related direction, or trajectory respectively, gets an unambiguous index, 20 which prevents mixing up different trajectories and provides continuous directional subband signals. This is important for the below-described prediction of directional subband signals. In particular, it allows exploiting temporal dependencies between successive prediction coefficient matrices $\mathbf{A}(k, f_j)$ defined further below. Therefore, the direction estimation for the f_j -th subband provides the set $\mathcal{M}_{\text{DIR}}(k, f_j)$ of tuples. Each tuple 25 consists of, on the one hand, the index $d \in \mathcal{I}_{\text{DIR}}(k, f_j) \subseteq \{1, \dots, D_{\text{SB}}\}$ identifying an individual (active) direction trajectory, and on the other hand, the respective estimated direction $\Omega_{\text{SB},d}(k, f_j)$, i.e.

$$\mathcal{M}_{\text{DIR}}(k, f_j) = \{(d, \Omega_{\text{SB},d}(k, f_j)) \mid d \in \mathcal{I}_{\text{DIR}}(k, f_j)\}. \quad (15)$$

30 By definition, the set $\{\Omega_{\text{SB},d}(k, f_j) \mid d \in \mathcal{I}_{\text{DIR}}(k, f_j)\}$ is a subset of $\mathcal{M}_{\text{DIR}}(k)$ for each $j = 1, \dots, F$, since the subband direction search is performed only among the current frame’s direction candidates $\Omega_{\text{CAND},d}(k)$, $d = 1, \dots, D(k)$, as mentioned above. This allows a more efficient coding of the side information with respect to the directions, since each index defines one direction out of $D(k)$ instead of Q candidate directions, with $D(k) \leq Q$.
35 The index d is used for tracking directions in a subsequent frame for creating a trajectory.

As shown in Fig.2 and described above, a Direction Estimation Processing block 16 in one embodiment comprises a Direction Estimation block 20 having a Full-band Direction Estimation block 21 and, for each subband or subband group, a Subband Direction Estimation block 22. It may further comprise a Long Frame Generating block 23 that 5 provides the above-mentioned long frames to the Direction Estimation block 20, as shown in Fig.7. The Long Frame Generating block 23 generates long frames from two successive input frames having a length of L samples each, using e.g. one or more memories. Long frames are herein indicated by "—" and by having two indices, k-1 and k. In other embodiments, the Long Frame Generating block 23 may also be a separate 10 block in the encoder shown in Fig.1, or incorporated in other blocks.

Computation of directional subband signals

Returning to Fig.1, subband HOA representation frames $\tilde{\mathcal{C}}(k, f_j), j = 1, \dots, F$, provided by the Analysis Filter Bank 15 are also input to one or more Directional Subband Signal 15 Computation blocks 17. In the Directional Subband Signal Computation blocks 17, the long frames of all D_{SB} potential directional subband signals $\tilde{\mathbf{x}}_d(k-1; k; f_j), d = 1, \dots, D_{SB}$, are arranged in a matrix $\tilde{\mathbf{X}}(k-1; k; f_j)$ as

$$\tilde{\mathbf{X}}(k-1; k; f_j) = \begin{bmatrix} \tilde{\mathbf{x}}_1(k-1; k; f_j) \\ \tilde{\mathbf{x}}_2(k-1; k; f_j) \\ \vdots \\ \tilde{\mathbf{x}}_{D_{SB}}(k-1; k; f_j) \end{bmatrix} \in \mathbb{C}^{D_{SB} \times 2L}. \quad (16)$$

20 Further, the frames of the inactive directional subband signals, i.e. those long signal frames $\tilde{\mathbf{x}}_d(k-1; k; f_j)$ whose index d is not contained within the set $\mathcal{I}_{DIR}(k, f_j)$, are set to zero.

The remaining long signal frames $\tilde{\mathbf{x}}_d(k-1; k; f_j)$, i.e. those with index $d \in \mathcal{I}_{DIR}(k, f_j)$, are collected within the matrix $\tilde{\mathbf{X}}_{ACT}(k-1; k; f_j) \in \mathbb{C}^{D_{SB}(k, f_j) \times 2L}$. One possibility to compute 25 the active directional subband signals contained therein is to minimize the error between their HOA representation and the original input subband HOA representation. The solution is given by

$$\tilde{\mathbf{X}}_{ACT}(k-1; k; f_j) = (\Psi_{SB}(k, f_j))^+ \tilde{\mathcal{C}}(k-1; k; f_j) \quad (17)$$

where $(\cdot)^+$ denotes the Moore-Penrose pseudo-inverse and $\Psi_{SB}(k, f_j) \in \mathbb{R}^{Q \times D_{SB}(k, f_j)}$ 30 denotes the mode matrix with respect to the direction estimates in the set $\{\Omega_{SB,d}(k, f_j) | d \in \mathcal{I}_{DIR}(k, f_j)\}$. Note that in the case of subband groups a set of directional

subband signals $\bar{\mathcal{X}}_{\text{ACT}}(k-1; k; f_j)$ is computed from the multiplication of one matrix $(\Psi_{\text{SB}}(k, f_j))^+$ by all HOA representations $\bar{\mathcal{C}}(k-1; k; f_j)$ of the group. Note that long frames can be generated by one or more further Long Frame Generating blocks, similar to the one described above. Similarly, long frame can be decomposed into frames of 5 normal length in Long Frame Decomposition blocks. In one embodiment, the blocks 17 for the computation of directional subbands provide on their outputs long frames $\bar{\mathcal{X}}_{\text{ACT}}(k-1; k; f_j), j = 1, \dots, F$, towards the Directional Subband Prediction blocks 18.

Prediction of directional subband signals

10 As mentioned above, the approximate HOA representation is partly represented by the active directional subband signals, which, however, are *not* conventionally coded. Instead, in the presently described embodiments a parametric representation is used in order to keep the total data rate for the transmission of the coded representation low. In the parametric representation, each active directional subband signal $\bar{x}_d(k-1; k; f_j)$, i.e. 15 with index $d \in \mathcal{I}_{\text{DIR}}(k, f_j)$, is predicted by a weighted sum of the coefficient sequences of the truncated subband HOA representation $\bar{c}_n(k-1, f_j)$ and $\bar{c}_n(k, f_j)$, where $n \in \mathcal{I}_{\text{C,ACT}}(k-1)$ and where the weights are complex valued in general.

Hence, assuming $\bar{\mathcal{X}}_{\text{P}}(k-1; k; f_j)$ to represent the predicted version of $\bar{\mathcal{X}}(k-1; k; f_j)$, the prediction is expressed by a matrix multiplication as

$$20 \quad \bar{\mathcal{X}}_{\text{P}}(k-1; k; f_j) = \mathbf{A}(k, f_j) \bar{\mathcal{C}}_{\text{T}}(k-1; k; f_j), \quad (18)$$

where $\mathbf{A}(k, f_j) \in \mathbb{C}^{O \times D_{\text{SB}}}$ is the matrix with all weighting factors (or, equivalently, prediction coefficients) for the subband f_j . The computation of the prediction matrices $\mathbf{A}(k, f_j)$ is performed in one or more Directional Subband Prediction blocks 18. In one embodiment, one Directional Subband Prediction block 18 per subband is used, as shown in Fig. 1. In 25 another embodiment, a single Directional Subband Prediction block 18 is used for multiple or all subbands. In the case of subband groups, one matrix $\mathbf{A}(k, f_j)$ is computed for each group; however, it is multiplied by each HOA representations $\bar{\mathcal{C}}_{\text{T}}(k-1; k; f_j)$ of the group individually, creating a set of matrices $\bar{\mathcal{X}}_{\text{P}}(k-1; k; f_j)$ per group. Note that per construction all rows of $\mathbf{A}(k, f_j)$ except for those with index $d \in \mathcal{I}_{\text{DIR}}(k, f_j)$ are zero. This 30 means that only the active directional subband signals are predicted. Further, all columns of $\mathbf{A}(k, f_j)$ except for those with index $n \in \mathcal{I}_{\text{C,ACT}}(k-1)$ are also zero. This means that, for the prediction, only those HOA coefficient sequences are considered that are transmitted and available for prediction during HOA decompression.

The following aspects have to be considered for the computation of the prediction matrices $\mathbf{A}(k, f_j)$.

First, the original truncated subband HOA representation $\tilde{\mathbf{C}}_T(k, f_j)$ will generally not be available at the HOA decompression. Instead, a perceptually decoded version $\widehat{\mathbf{C}}_T(k, f_j)$

5 of it will be available and used for the prediction of the directional subband signals.

At low bit rates, typical audio codecs (like AAC or USAC) use spectral band replication (SBR), where the lower and mid frequencies of the spectrum are conventionally coded, while the higher frequency content (starting e.g. at 5kHz) is replicated from the lower and mid frequencies using extra side information about the high-frequency envelope.

10 For that reason, the magnitude of the reconstructed subband coefficient sequences of the truncated HOA component $\widehat{\mathbf{C}}_T(k, f_j)$ after perceptual decoding resembles that of the original one, $\tilde{\mathbf{C}}_T(k, f_j)$. However, this is *not* the case for the phase. Hence, for the high frequency subbands it does not make sense to exploit any phase relationships for the prediction by using complex valued prediction coefficients. Instead, it is more reasonable 15 to use only real valued prediction coefficients. In particular, defining the index j_{SBR} such that the f_j -th subband includes the starting frequency for SBR, it is advantageous to set the type of prediction coefficients as follows:

$$\mathbf{A}(k, f_j) \in \begin{cases} \mathbb{C}^{O \times D_{SB}} & \text{for } 1 \leq j < j_{SBR} \\ \mathbb{R}^{O \times D_{SB}} & \text{for } j_{SBR} \leq j \leq F \end{cases} \quad (19)$$

20 In other words, in one embodiment, prediction coefficients for the lower subbands are complex values, while prediction coefficients for higher subbands are real values.

Second, in one embodiment, the strategy of the computation of the matrices $\mathbf{A}(k, f_j)$ is adapted to their types. In particular, for low frequency subbands f_j , $1 \leq j < j_{SBR}$, which are not affected by the SBR, it is possible to determine the non-zero elements of $\mathbf{A}(k, f_j)$

25 by minimizing the Euclidean norm of the error between $\tilde{\mathbf{x}}(k-1; k; f_j)$ and its predicted version $\tilde{\mathbf{x}}_P(k-1; k; f_j)$. The perceptual coder 31 defines and provides j_{SBR} (not shown).

In this way, phase relationships of the involved signals are explicitly exploited for prediction. For subband groups, the Euclidean norm of the prediction error over all directional signals of the group should be minimized (i.e. least square prediction error).

30 For high frequency subbands f_j , $j_{SBR} \leq j \leq F$, which are affected by SBR, the above mentioned criterion is not reasonable, since the phases of the reconstructed subband coefficient sequences of the truncated HOA component $\widehat{\mathbf{C}}_T(k, f_j)$ cannot be assumed to even rudimentary resemble that of the original subband coefficient sequences.

In this case, one solution is to disregard the phases and, instead, concentrate only on the signal powers for prediction. A reasonable criterion for the determination of the prediction coefficients is to minimize the following error

$$\left| \bar{\mathbf{X}}(k-1; k; f_j) \right|^2 - \left| \mathbf{A}(k, f_j) \right|^2 \left| \bar{\mathbf{C}}_T(k-1; k; f_j) \right|^2 \quad (20)$$

5 where the operation $|\cdot|^2$ is assumed to be applied to the matrices element-wise. In other words, the prediction coefficients are chosen such that the sum of the powers of all weighted subband or subband group coefficient sequences of the truncated HOA component best approximates the power of the directional subband signals. In this case, Nonnegative Matrix Factorization (NMF) techniques (see e.g. [8]) can be used to solve
10 this optimization problem and obtain the prediction coefficients of the prediction matrices $\mathbf{A}(k, f_j), j = 1, \dots, F$. These matrices are then provided to the Perceptual and Source Encoding stage 30.

Perceptual and source encoding

15 After the above-described spatial HOA coding, the resulting gain adapted transport signals for the $(k-1)$ -th frame, $\mathbf{z}_i(k-1), i = 1, \dots, I$, are coded to obtain their coded representations $\bar{\mathbf{z}}_i(k-1)$. This is performed by a Perceptual Coder 31 at the Perceptual and Source Encoding stage 30 shown in Fig.3. Further, the information contained in the sets $\mathcal{M}_{DIR}(k), \mathcal{M}_{DIR}(k, f_j), j = 1, \dots, F$, the prediction coefficients matrices $\mathbf{A}(k, f_j) \in \mathbb{C}^{O \times D_{SB}}, j = 1, \dots, F$, the gain control parameters $e_i(k-1)$ and $\beta_i(k-1), i = 1, \dots, I$, and
20 the assignment vector $\mathbf{v}_A(k-1)$ are subjected to source encoding to remove redundancy for an efficient storage or transmission. This is performed in a Side Information Source Coder 32. The resulting coded representation $\bar{\mathbf{I}}(k-1)$ is multiplexed in a multiplexer 33 together with the coded transport signal representations $\bar{\mathbf{z}}_i(k-1), i = 1, \dots, I$, to provide
25 the final coded frame $\bar{\mathbf{B}}(k-1)$.

Since, in principle, the source coding of the gain control parameters and the assignment can be carried out similar to [9], the present description concentrates on the coding of the directions and prediction parameters only, which is described in detail in the following.

30 Coding of directions

For the coding of the individual subband directions, the irrelevancy reduction according to the above description can be exploited to constrain the individual subband directions to be chosen. As already mentioned, these individual subband directions are chosen not out of all possible test directions $\Omega_{TEST,q}, q = 1, \dots, Q$, but rather out of a small number of
35 candidates determined on each frame of the full-band HOA representation. Exemplarily, a

possible way for the source coding of the subband directions is summarized in the following Algorithm 1.

Algorithm 1 Coding of sub-band directions

NoOfGlobalDirs (k) (coded with $\lceil \log_2(D) \rceil$ bits)

```

5  {Fill GlobalDirGridIndices ( $k$ ) ( array with NoOfGlobalDirs( $k$ ) elements, each coded with  $\lceil \log_2(Q) \rceil$  bits ) }
  for  $d = 1$  to NoOfGlobalDirs( $k$ ) do
    GlobalDirGridIndices( $k$ )[ $d$ ]= $q$  such that  $\Omega_{FB,d}(k) = \Omega_{TEST,q}$            // global directions
  end for

  for  $j = 1$  to  $F$  do
    {Fill bSubBandDirIsActive ( $k,f_j$ ) ( bit array with  $D_{SB}$  elements ) }
      for  $d = 1$  to  $D_{SB}$  do
        if  $d \in I_{DIR}(k, f_j)$  then
          bSubBandDirIsActive ( $k, f_j$ ) [ $d$ ] = 1                                // active directions
          // per subband
        else
          bSubBandDirIsActive ( $k, f_j$ ) [ $d$ ] = 0
        end if
      end for

    {Fill RelDirIndices ( $k,f_j$ )
    (array with  $D_{SB}$  ( $k,f_j$ ) elements, each coded with  $\lceil \log_2(NoOfGlobalDirs(k)) \rceil$  bits ) }

    for  $d = 1$  to  $D_{SB}$  do
       $d_1 = 1$                                          // direction index of
      // full band
      if bSubBandDirIsActive ( $k, f_j$ ) [ $d$ ] = 1 then
        RelDirIndices ( $k, f_j$ ) [ $d_1$ ] =  $i$  such that  $\Omega_{SB,d}(k, f_j) = \Omega_{FB,i}(k)$ 
         $d_1 = d_1 + 1$ 
      end if
    end for
  end for

```

In a first step of the Algorithm 1, the set $\mathcal{M}_{FB}(k)$ of all full-band direction candidates that do actually occur as subband directions is determined, i.e.

$$30 \quad \mathcal{M}_{FB}(k) := \left\{ \Omega_{CAND,d}(k) \mid \exists j \in \{1, \dots, F\} \text{ and } d \in I_{DIR}(k, f_j) \right\} \text{ such that } \Omega_{CAND,d}(k) = \Omega_{SB,d}(k, f_j) \quad (21)$$

The number of elements of this set, denoted by NoOfGlobalDirs(k), is the first part of the coded representation of the directions. Since $\mathcal{M}_{FB}(k)$ is a subset of $\mathcal{M}_{DIR}(k)$ by definition, NoOfGlobalDirs(k) can be coded with $\lceil \log_2(D) \rceil$ bits. To clarify the further description, the directions in the set $\mathcal{M}_{FB}(k)$ are denoted by $\Omega_{FB,d}(k)$, $d = 1, \dots, \text{NoOfGlobalDirs}(k)$, i.e.

$$35 \quad \mathcal{M}_{FB}(k) := \{\Omega_{FB,d}(k) \mid d = 1, \dots, \text{NoOfGlobalDirs}(k)\} \quad (22)$$

In a second step, the directions in the set $\mathcal{M}_{FB}(k)$ are coded by means of the indices $q = 1, \dots, Q$ of possible test directions $\Omega_{TEST,q}$, here referred to as grid. For each direction $\Omega_{FB,d}(k)$, $d = 1, \dots, \text{NoOfGlobalDirs}(k)$, the respective grid index is coded in the array element GlobalDirGridIndices(k)[d] having a size of $\lceil \log_2(Q) \rceil$ bits. The total array

GlobalDirGridIndices(k) representing all coded full-band directions consists of $\text{NoOfGlobalDirs}(k)$ elements.

In a third step, for each subband or subband group f_j , $j = 1, \dots, F$, the information whether the d -th directional subband signal ($d = 1, \dots, D_{\text{SB}}$) is active or not, i.e. if $d \in \mathcal{I}_{\text{DIR}}(k, f_j)$, is coded in the array element **bSubBandDirIsActive**(k, f_j)[d]. The total array

bSubBandDirIsActive(k, f_j) consists of D_{SB} elements. If $d \in \mathcal{I}_{\text{DIR}}(k, f_j)$, the respective subband direction $\Omega_{\text{SB},d}(k, f_j)$ is coded by means of the index i of the respective full-band direction $\Omega_{\text{FB},i}(k)$ into the array **RelDirIndices**(k, f_j) consisting of $D_{\text{SB}}(k, f_j)$ elements.

10

To show the efficiency of this direction encoding method, a maximum data rate for the coded representation of the directions according to the above example is calculated:

$F = 10$ subbands, $D_{\text{SB}}(k, f_j) = D_{\text{SB}} = 4$ directions per subband, $Q = 900$ potential test directions and a frame rate of 25 frames per second are assumed. With the conventional coding method, the required data rate was 10 kbit/s. With the improved coding method according to one embodiment, if the number of full-band directions is assumed to be

$\text{NoOfGlobalDirs}(k) = D = 8$, then $D \cdot \lceil \log_2(Q) \rceil = 80$ bits are needed per frame to code

GlobalDirGridIndices(k), $D_{\text{SB}} \cdot F = 40$ bits to code **bSubBandDirIsActive**(k, f_j), and

$D_{\text{SB}} \cdot F \cdot \lceil \log_2(\text{NoOfGlobalDirs}(k)) \rceil = 120$ bits to code **RelDirIndices**(k, f_j). This results

20 in a data rate of $240 \text{ bits/frame} \cdot 25 \text{ frames/s} = 6 \text{ kbit/s}$, which is distinctly smaller than 10 kbit/s. Even for a greater number $\text{NoOfGlobalDirs}(k) = D = 16$ of full-band directions, a data rate of only 7 kbit/s is sufficient.

Coding of prediction coefficient matrices

25 For the coding of the prediction coefficient matrices, the fact can be exploited that there is a high correlation between the prediction coefficients of successive frames due to the smoothness of the direction trajectories and consequently the directional subband signals. Further, there is a relatively high number of ($D_{\text{SB}}(k, f_j) \cdot M_{\text{C,ACT}}(k-1)$) potential non-zero-elements per frame for each prediction coefficient matrix $A(k, f_j)$, where

30 $M_{\text{C,ACT}}(k-1)$ denotes the number of elements in the set $\mathcal{I}_{\text{C,ACT}}(k-1)$. In total, there are F matrices to be coded per frame if no subband groups are used. If subband groups are used, there are correspondingly less than F matrices to be coded per frame.

In one embodiment, in order to keep the number of bits for each prediction coefficient low, each complex valued prediction coefficient is represented by its magnitude and its angle, and then the angle and the magnitude are coded differentially between successive

35

frames and independently for each particular element of the matrix $A(k, f_j)$. If the magnitude is assumed to be within the interval $[0,1]$, the magnitude difference lies within the interval $[-1,1]$. The difference of angles of complex numbers may be assumed to lie within the interval $[-\pi, \pi]$. For the quantization of both, magnitude and angle difference, 5 the respective intervals can be subdivided into e.g. 2^{N_Q} sub-intervals of equal size. A straight forward coding then requires N_Q bits for each magnitude and angle difference. Further, it has been found out experimentally that due to the above mentioned correlation between the prediction coefficients of successive frames, the occurrence probabilities of the individual differences are highly non-uniformly distributed. In particular, small 10 differences in the magnitudes as well as in the angles occur significantly more frequently than bigger ones. Hence, a coding method that is based on the a priori probabilities of the individual values to be coded, like e.g. Huffman coding, can be exploited to reduce the average number of bits per prediction coefficient significantly. In other words, it has been found that it is usually advantageous to differentially encode magnitude and phase of the 15 values in the prediction matrix $A(k, f_j)$, instead of their real and imaginary portions. However, there may appear circumstances under which the usage of real and imaginary portions is acceptable.

In one embodiment, special access frames are sent in certain intervals (application 20 specific, e.g. once per second) that include the non-differentially coded matrix coefficients. This allows a decoder to re-start a differential decoding from these special access frames, and thus enables a random entry for the decoding.

In the following, decompression of a low bit rate compressed HOA representation as 25 constructed above is described. Also the decompression works frame-wise. In principle, a low bit rate HOA decoder, according to an embodiment, comprises counterparts of the above-described low bit rate HOA encoder components, which are arranged in reverse order. In particular, the low bit rate HOA decoder can be subdivided into a perceptual and source decoding part as depicted in Fig.4, and a spatial HOA 30 decoding part as illustrated in Fig.6.

Perceptual and source decoding

Fig.4 shows a Perceptual and Side Info Source Decoder 40, in one embodiment. In the Perceptual and Side Info Source Decoder 40, the low bit rate compressed HOA bit 35 stream \tilde{B} is first de-multiplexed 41, which results in a perceptually coded representation of the I signals \tilde{z}_i , $i = 1, \dots, I$, and the coded side information \tilde{I} describing how to create a

HOA representation thereof. Successively, a perceptual decoding of the I signals and a decoding of the side information is performed.

A Perceptual Decoder 42 decodes the I signals $\check{z}_i(k)$, $i = 1, \dots, I$ into the perceptually

5 decoded signals $\hat{z}_i(k)$, $i = 1, \dots, I$.

A Side Information Source decoder 43 decodes the coded side information \check{I} into the tuple sets $\mathcal{M}_{\text{DIR}}(k + 1, f_j)$, $j = 1, \dots, F$, the prediction coefficient matrices $A(k + 1, f_j)$ for each subband or subband group f_j ($j = 1, \dots, F$), gain correction exponents $e_i(k)$ and gain correction exception flags $\beta_i(k)$, and assignment vector $\nu_{\text{AMB,ASSIGN}}(k)$.

10 Algorithm 2 summarizes exemplarily how to create the tuple sets $\mathcal{M}_{\text{DIR}}(k, f_j)$, $j = 1, \dots, F$, from the coded side information \check{I} . The decoding of the subband directions is described in detail in the following.

Algorithm 2 Decoding of sub-band directions

Read $\text{NoOfGlobalDirs}(k)$ (coded with $\lceil \log_2(D) \rceil$ bits)

{Read $\text{GlobalDirGridIndices}(k)$ (array with $\text{NoOfGlobalDirs}(k)$ elements, each coded by $\lceil \log_2(Q) \rceil$ bits)

15 {Compute $\mathcal{M}_{\text{FB}}(k)$ }

for $d = 1$ **to** $\text{NoOfGlobalDirs}(k)$ **do**

$\Omega_{\text{FB},d}(k) = \Omega_{\text{TEST,GlobalDirGridIndices}(k)[d]}$

end for

for $j = 1$ **to** F **do**

 {Read $\text{bSubBandDirIsActive}(k, f_j)$ (bit array with D_{SB} elements) }

 {Compute $D_{\text{SB}}(k, f_j)$ }

$D_{\text{SB}}(k, f_j) = 0$

for $d = 1$ **to** $D_{\text{SB}}(k, f_j)$ **do**

if $\text{bSubBandDirIsActive}(k, f_j)[d] = 1$ **then**

$D_{\text{SB}}(k, f_j) = D_{\text{SB}}(k, f_j) + 1$

end if

end for

 {Read $\text{RelDirIndices}(k, f_j)$

 (array with $D_{\text{SB}}(k, f_j)$ elements, each coded with $\lceil \log_2(\text{NoOfGlobalDirs}(k)) \rceil$ bits) }

30 {Compute $\mathcal{M}_{\text{DIR}}(k, f_j)$ }

for $d = 1$ **to** $D_{\text{SB}}(k, f_j)$ **do**

$d_1 = 1$

if $\text{bSubBandDirIsActive}(k, f_j)[d] = 1$ **then**

$\Omega_{\text{SB},d}(k, f_j) = \Omega_{\text{FB,RelDirIndices}(k, f_j)[d_1]}(k)$

$\mathcal{M}_{\text{DIR}}(k, f_j) = \mathcal{M}_{\text{DIR}}(k, f_j) \cup \{d, \Omega_{\text{SB},d}(k, f_j)\}$

$d_1 = d_1 + 1$

end if

end for

end for

40 First, the number of full-band directions $\text{NoOfGlobalDirs}(k)$ is extracted from the coded side information \check{I} . As described above, these are also used as subband directions. It is coded with $\lceil \log_2(D) \rceil$ bits.

In a second step, the array **GlobalDirGridIndices**(k) consisting of $\text{NoOfGlobalDirs}(k)$ elements is extracted, each element being coded by $\lceil \log_2(Q) \rceil$ bits. This array contains the grid indices that represent the full-band directions $\Omega_{\text{FB},d}(k)$,
 $d = 1, \dots, \text{NoOfGlobalDirs}(k)$, such that

5 $\Omega_{\text{FB},d}(k) = \Omega_{\text{TEST,GlobalDirGridIndices}(k)[d]}$ (23)

Then, for each subband or subband group f_j , $j = 1, \dots, F$, the array

bSubBandDirIsActive(k, f_j) consisting of D_{SB} elements is extracted, where the d -th element $\text{bSubBandDirIsActive}(k, f_j)[d]$ indicates whether or not the d -th subband direction
10 is active. Further, the total number of active subband directions $D_{\text{SB}}(k, f_j)$ is computed.

Finally, the set $\mathcal{M}_{\text{DIR}}(k, f_j)$ of tuples is computed for each subband or subband group f_j ,
 $j = 1, \dots, F$. It consists of the indices $d \in \mathcal{I}_{\text{DIR}}(k, f_j) \subseteq \{1, \dots, D_{\text{SB}}\}$ that identify the individual
(active) subband direction trajectories, and the respective estimated directions
 $\Omega_{\text{SB},d}(k, f_j)$.

15

Next, the prediction coefficient matrices $A(k + 1, f_j)$ for each subband or subband group f_j , $j = 1, \dots, F$ are reconstructed from the coded frame $\tilde{\mathbf{B}}(k)$. In one embodiment, the reconstruction comprises the following steps per subband or subband group f_j :

First, the angle and magnitude differences of each matrix coefficient are obtained by
20 entropy decoding. Then, the entropy decoded angle and magnitude differences are
rescaled to their actual value ranges, according to the number of bits N_Q used for their
coding. Finally, the current prediction coefficient matrix $A(k + 1, f_j)$ is built by adding the
reconstructed angle and magnitude differences to the coefficients of the latest coefficient
matrix $A(k, f_j)$, i.e. the coefficient matrix of the previous frame.

25

Thus, the previous matrix $A(k, f_j)$ has to be known for the decoding of a current matrix
 $A(k + 1, f_j)$. In one embodiment, in order to enable a random access, special access
frames are received in certain intervals that include the non-differentially coded matrix
coefficients to re-start the differential decoding from these frames.

30

The Perceptual and Side Info Source Decoder 40 outputs the perceptually decoded
signals $\hat{\mathbf{z}}_i(k)$, $i = 1, \dots, I$, tuple sets $\mathcal{M}_{\text{DIR}}(k + 1, f_j)$, $j = 1, \dots, F$, prediction coefficient
matrices $A(k + 1, f_j)$, gain correction exponents $e_i(k)$, gain correction exception flags
 $\beta_i(k)$ and assignment vector $\nu_{\text{AMB,ASSIGN}}(k)$ to a subsequent Spatial HOA decoder 50.
Spatial HOA decoding

Fig.5 shows an exemplary Spatial HOA decoder 50, in one embodiment. The spatial HOA decoder 50 creates from the I signals $\hat{z}_i(k)$, $i = 1, \dots, I$, and the above-described side information provided by the Side Information Decoder 43 a reconstructed HOA representation. The individual processing units within the spatial HOA decoder 50 are 5 described in detail in the following.

Inverse Gain Control

In the Spatial HOA decoder 50, the perceptually decoded signals $\hat{z}_i(k)$, $i = 1, \dots, I$, together with the associated gain correction exponent $e_i(k)$ and gain correction exception 10 flag $\beta_i(k)$, are first input to one or more Inverse Gain Control processing blocks 51. The Inverse Gain Control processing blocks provide gain corrected signal frames $\hat{y}_i(k)$, $i = 1, \dots, I$. In one embodiment, each of the I signals $\hat{z}_i(k)$ is fed into a separate Inverse Gain Control processing block 51, as in Fig.5, so that the i -th Inverse Gain Control processing block provides a gain corrected signal frame $\hat{y}_i(k)$. A more detailed description of the 15 Inverse Gain Control is known from e.g. [9], Section 11.4.2.1.

Truncated HOA reconstruction

In a Truncated HOA Reconstruction block 52, the I gain corrected signal frames $\hat{y}_i(k)$, $i = 1, \dots, I$, are redistributed (i.e. reassigned) to a HOA coefficient sequence matrix, 20 according to the information provided by the assignment vector $v_{AMB,ASSIGN}(k)$, so that the truncated HOA representation $\hat{C}_T(k)$ is reconstructed. The assignment vector $v_{AMB,ASSIGN}(k)$ comprises I components that indicate for each transmission channel which coefficient sequence of the original HOA component it contains. Further, the elements of the assignment vector form a set $\mathcal{I}_{C,ACT}(k)$ of the indices, referring to the 25 original HOA component, of all the received coefficient sequences for the k -th frame

$$\mathcal{I}_{C,ACT}(k) = \{v_{AMB,ASSIGN,i}(k) | i = 1, \dots, I\}. \quad (24)$$

The reconstruction of the truncated HOA representation $\hat{C}_T(k)$ comprises the following 30 steps:

First, the individual components $\hat{c}_{I,n}(k)$, $n = 1, \dots, O$, of the decoded intermediate representation

$$\hat{C}_I(k) = \begin{bmatrix} \hat{c}_{I,1}(k) \\ \vdots \\ \hat{c}_{I,O}(k) \end{bmatrix} \quad (25)$$

are either set to zero or replaced by a corresponding component of the gain corrected signal frames $\hat{y}_i(k)$, depending on the information in the assignment vector, i.e.

$$\hat{c}_{I,n}(k) = \begin{cases} \hat{y}_i(k) & \text{if } \exists i \in \{1, \dots, I\} \text{ such that } v_{\text{AMB,ASSIGN},i}(k) = n \\ \mathbf{0} & \text{else} \end{cases} \quad (26)$$

5

This means, as mentioned above, that the i -th element of the assignment vector, which is n in eq.(26), indicates that the i -th coefficient $\hat{y}_i(k)$ replaces $\hat{c}_{I,n}(k)$ in the n -th line of the decoded intermediate representation matrix $\hat{C}_I(k)$.

10 Second, a re-correlation of the first O_{MIN} signals within $\hat{C}_I(k)$ is carried out by applying to them the inverse spatial transform, providing the frame

$$\hat{C}_{T,\text{MIN}}(k) = \Psi_{\text{MIN}} \begin{bmatrix} \hat{c}_{I,1}(k) \\ \hat{c}_{I,2}(k) \\ \vdots \\ \hat{c}_{I,O_{\text{MIN}}}(k) \end{bmatrix} \quad (27)$$

15 where the mode matrix Ψ_{MIN} is as defined in eq.(6). The mode matrix depends on given directions that are predefined for each O_{MIN} or N_{MIN} respectively, and can thus be constructed independently both at the encoder and decoder. Also O_{MIN} (or N_{MIN}) is predefined by convention.

Finally, the reconstructed truncated HOA representation $\hat{C}_T(k)$ is composed from the re-correlated signals $\hat{C}_{T,\text{MIN}}(k)$ and the signals of the intermediate representation $20 \hat{c}_{I,n}(k)$, $n = O_{\text{MIN}} + 1, \dots, O$, according to

$$\hat{C}_T(k) = \begin{bmatrix} \hat{C}_{T,\text{MIN}}(k) \\ \hat{c}_{I,O_{\text{MIN}}+1}(k) \\ \vdots \\ \hat{c}_{I,O}(k) \end{bmatrix} \in \mathbb{R}^{O \times L} \quad (28)$$

Analysis Filter Banks

To further compute the second HOA component, which is represented by predicted directional subband signals, each frame $\hat{c}_{T,n}(k)$, $n = 1, \dots, O$, of an individual coefficient sequence n of the decompressed truncated HOA representation $\hat{C}_T(k)$ is first 25 decomposed in one or more Analysis Filter Banks 53 into frames of individual subband signals $\hat{c}_{T,n}(k, f_j)$, $j = 1, \dots, F$. For each subband f_j , $j = 1, \dots, F$, the frames of the subband signals of the individual HOA coefficient sequences may be collected into the subband HOA representation $\hat{C}_T(k, f_j)$ as 30

$$\widehat{\mathcal{C}}_T(k, f_j) = \begin{bmatrix} \widehat{c}_{T,1}(k, f_j) \\ \widehat{c}_{T,2}(k, f_j) \\ \vdots \\ \widehat{c}_{T,O}(k, f_j) \end{bmatrix} \quad \text{for } j = 1, \dots, F \quad (29)$$

The one or more Analysis Filter Banks 53 applied at the HOA spatial decoding stage are the same as those one or more Analysis Filter Banks 15 at the HOA spatial encoding stage, and for subband groups the grouping from the HOA spatial encoding stage is applied. Thus, in one embodiment, grouping information is included in the encoded signal. More details about grouping information is provided below.

In one embodiment, a maximum order N_{MAX} is considered for the computation of the truncated HOA representation at the HOA compression stage (see above, near eq.(4)), and the application of the HOA compressor's and decompressor's Analysis Filter Banks 15, 53 is restricted to only those HOA coefficient sequences $\widehat{c}_{T,n}(k)$ with indices $n = 1, \dots, O_{MAX}$. The subband signal frames $\widehat{c}_{T,n}(k, f_j)$ with indices $n = O_{MAX} + 1, \dots, O$ can then be set to zero.

15 Synthesis of directional subband HOA representation

For each subband or subband group, directional subband or subband group HOA representations $\widehat{\mathcal{C}}_D(k, f_j), j = 1, \dots, F$, are synthesized in one or more Directional Subband Synthesis blocks 54. In one embodiment, in order to avoid artifacts due to changes of the directions and prediction coefficients between successive frames, the computation 20 of the directional subband HOA representation is based on the concept of overlap add. Hence, in one embodiment, the HOA representation $\widehat{\mathcal{C}}_D(k, f_j)$ of active directional subband signals related to the f_j -th subband, $j = 1, \dots, F$, is computed as the sum of a faded out component and a faded in component:

$$\widehat{\mathcal{C}}_D(k, f_j) = \widehat{\mathcal{C}}_{D,OUT}(k, f_j) + \widehat{\mathcal{C}}_{D,IN}(k, f_j). \quad (30)$$

25 In a first step, to compute the two individual components, the instantaneous frame of all directional subband signals $\widehat{\mathcal{X}}_1(k_1; k; f_j)$ related to the prediction coefficients matrices $A(k_1, f_j)$ for frames $k_1 \in \{k, k + 1\}$ and the truncated subband HOA representation $\widehat{\mathcal{C}}_T(k, f_j)$ for the k -th frame is computed by

$$30 \quad \widehat{\mathcal{X}}_1(k_1; k; f_j) = A(k_1, f_j) \widehat{\mathcal{C}}_T(k, f_j) \quad \text{for } k_1 \in \{k, k + 1\}. \quad (31)$$

For subband groups, the HOA representations of each group $\widehat{\mathcal{C}}_T(k, f_j)$ are multiplied by a fixed matrix $A(k_1, f_j)$ to create the subband signals $\widehat{\mathcal{X}}_I(k_1; k; f_j)$ of the group.

In a second step, the instantaneous subband HOA representation $\widehat{\mathcal{C}}_{D,I}^{(d)}(k_1; k; f_j)$,

$d \in \mathcal{M}_{DIR}(k, f_j)$, $j = 1, \dots, F$, of the directional subband signal $\widehat{\mathcal{X}}_{I,d}(k_1; k; f_j)$ with respect to

5 the direction $\Omega_{SB,d}(k, f_j)$ is obtained as

$$\widehat{\mathcal{C}}_{D,I}^{(d)}(k_1; k; f_j) = \psi(\Omega_{SB,d}(k, f_j)) \widehat{\mathcal{X}}_{I,d}(k_1; k; f_j) \quad (32)$$

where $\psi(\Omega_{SB,d}(k, f_j)) \in \mathbb{R}^O$ denotes the mode vector (as the mode vectors in eq.(7)) with respect to the direction $\Omega_{SB,d}(k, f_j)$. For subband groups, eq. (32) is performed for all signals of the group, where the matrix $\psi(\Omega_{SB,d}(k, f_j))$ is fixed for each group.

Assuming the matrices $\widehat{\mathcal{C}}_{D,OUT}(k, f_j)$, $\widehat{\mathcal{C}}_{D,IN}(k, f_j)$, and $\widehat{\mathcal{C}}_{D,I}^{(d)}(k_1; k; f_j)$ to be composed of their samples by

$$\widehat{\mathcal{C}}_{D,OUT}(k, f_j) = \begin{bmatrix} \widehat{c}_{D,OUT,1}(k, f_j; 1) & \dots & \widehat{c}_{D,OUT,1}(k, f_j; L) \\ \vdots & \ddots & \vdots \\ \widehat{c}_{D,OUT,O}(k, f_j; 1) & \dots & \widehat{c}_{D,OUT,O}(k, f_j; L) \end{bmatrix} \in \mathbb{R}^{O \times L} \quad (33)$$

$$15 \quad \widehat{\mathcal{C}}_{D,IN}(k, f_j) = \begin{bmatrix} \widehat{c}_{D,IN,1}(k, f_j; 1) & \dots & \widehat{c}_{D,IN,1}(k, f_j; L) \\ \vdots & \ddots & \vdots \\ \widehat{c}_{D,IN,O}(k, f_j; 1) & \dots & \widehat{c}_{D,IN,O}(k, f_j; L) \end{bmatrix} \in \mathbb{R}^{O \times L} \quad (34)$$

$$\widehat{\mathcal{C}}_{D,I}^{(d)}(k_1; k; f_j) = \begin{bmatrix} \widehat{c}_{D,I,1}^{(d)}(k-1; k; f_j; 1) & \dots & \widehat{c}_{D,I,1}^{(d)}(k-1; k; f_j; L) \\ \vdots & \ddots & \vdots \\ \widehat{c}_{D,I,O}^{(d)}(k-1; k; f_j; 1) & \dots & \widehat{c}_{D,I,O}^{(d)}(k-1; k; f_j; L) \end{bmatrix} \in \mathbb{R}^{O \times L} \quad (35)$$

the sample values of the faded out and faded in components of the HOA representation of active directional subband signals are finally determined by

$$\widehat{c}_{D,OUT,n}(k, f_j; l) = \sum_{d \in \mathcal{I}_{DIR}(k, f_j)} \widehat{c}_{D,I,n}^{(d)}(k; k; f_j; l) \cdot w_{OA}(L+l) \quad (36)$$

$$\widehat{c}_{D,IN,n}(k, f_j; l) = \sum_{d \in \mathcal{I}_{DIR}(k+1, f_j)} \widehat{c}_{D,I,n}^{(f_j)}(k+1; k; d; l) \cdot w_{OA}(l) \quad (37)$$

where the vector

$$25 \quad \mathbf{w}_{OA} = [w_{OA}(1) \quad w_{OA}(2) \quad \dots \quad w_{OA}(2L)]^T \in \mathbb{R}^{2L} \quad (38)$$

represents an overlap add window function. An example for the window function is given by the periodic Hann window, the elements of which being defined by

$$w_{OA}(l) = \frac{1}{2} \left[1 - \cos \left(2\pi \frac{l-1}{2L} \right) \right] \quad (39)$$

5 Subband HOA Composition

For each subband or subband group $f_j, j = 1, \dots, F$, the coefficient sequences $\hat{c}_n(k, f_j)$, $n = 1, \dots, O$, of the decoded subband HOA representation $\hat{\mathcal{C}}(k, f_j)$ are either set to that of the truncated HOA representation $\hat{\mathcal{C}}_T(k, f_j)$ if it was previously transmitted, or else to that of the directional HOA component $\hat{\mathcal{C}}_D(k, f_j)$ provided by one of the Directional Subband

10 Synthesis blocks 54, i.e.

$$\hat{c}_n(k, f_j) = \begin{cases} \hat{\mathcal{C}}_{T,n}(k, f_j) & \text{if } n \in \mathcal{I}_{C,ACT}(k) \\ \hat{\mathcal{C}}_{D,n}(k, f_j) & \text{else} \end{cases} \quad (40)$$

This subband composition is performed by one or more Subband Composition blocks 55. In an embodiment, a separate Subband Composition block 55 is used for each subband or subband group, and thus for each of the one or more Directional Subband Synthesis 15 blocks 54. In one embodiment, a Directional Subband Synthesis block 54 and its corresponding Subband Composition block 55 are integrated into a single block.

Synthesis Filter Banks

In a final step, the decoded HOA representation is synthesized from all the decoded subband HOA representations $\hat{\mathcal{C}}(k, f_j), j = 1, \dots, F$. The individual time domain coefficient sequences $\hat{c}_n(k)$, $n = 1, \dots, O$, of the decompressed HOA representation $\hat{\mathcal{C}}(k)$, are synthesized from the corresponding subband coefficient sequences $\hat{c}_n(k, f_j), j = 1, \dots, F$ by one or more Synthesis Filter Banks 56, which finally outputs the decompressed HOA representation $\hat{\mathcal{C}}(k)$.

25 Note that the synthesized time domain coefficient sequences usually have a delay due to successive application of the analysis and synthesis filter banks 53, 56.

Fig.8 shows exemplarily, for a single frequency subband f_1 , a set of active direction candidates, their chosen trajectories and corresponding tuple sets. In a frame k , four directions are active in a frequency subband f_1 . The directions belong to respective trajectories T_1, T_2, T_3 and T_5 . In previous frames $k-2$ and $k-1$, different directions were active, namely T_1, T_2, T_6 and T_1-T_4 , respectively. The set of active directions $M_{DIR}(k)$ in the frame k relates to the full band and comprises several active direction candidates, e.g. $M_{DIR}(k)=\{\Omega_3, \Omega_8, \Omega_{52}, \Omega_{101}, \Omega_{229}, \Omega_{446}, \Omega_{581}\}$. Each direction can be expressed in any way,

e.g. by two angles or as an index of a predefined table. From the set of active full-band directions, those directions that are actually active in a subband and their corresponding trajectories are collected, separately for each frequency subband, in the tuple sets

$M_{DIR}(k, f_j)$, $j=1, \dots, F$. For example, in the first frequency subband of frame k , active

5 directions are Ω_3 , Ω_{52} , Ω_{229} and Ω_{581} , and their associated trajectories are T_3, T_1, T_2 and T_5 respectively. In the second frequency subband f_2 , active directions are exemplarily only Ω_{52} and Ω_{229} , and their associated trajectories are T_1 and T_2 respectively.

The following is a portion of a coefficient matrix of an exemplary truncated HOA

representation $C_T(k)$, corresponding to the coefficient sequences in an exemplary set

10 $I_{C,ACT}(k) = \{1, 2, 4, 6\}$:

$$C_T(k) = \begin{bmatrix} c_{T,1}(k, 1) & c_{T,1}(k, 2) & c_{T,1}(k, 3) & \dots \\ c_{T,2}(k, 1) & c_{T,2}(k, 2) & c_{T,2}(k, 3) & \dots \\ 0 & 0 & 0 & \dots \\ c_{T,4}(k, 1) & c_{T,4}(k, 2) & c_{T,4}(k, 3) & \dots \\ 0 & 0 & 0 & \dots \\ c_{T,6}(k, 1) & c_{T,6}(k, 2) & c_{T,6}(k, 3) & \dots \\ \dots & \dots & \dots & \dots \end{bmatrix}$$

According to $I_{C,ACT}(k)$, only coefficients of the rows 1, 2, 4 and 6 are not set to zero

(nevertheless, they may be zero, depending on the signal). Each column of the matrix

$C_T(k)$ refers to a sample, and each row of the matrix is a coefficient sequence. The

compression comprises that not all coefficient sequences are encoded and transmitted,

15 but only some selected coefficient sequences, namely those whose indices are included in $I_{C,ACT}(k)$ and the assignment vector $v_A(k)$ respectively. At the decoder, the coefficients are decompressed and positioned into the correct matrix rows of the reconstructed

truncated HOA representation. The information about the rows is obtained from the

assignment vector $v_{AMB,ASSIGN}(k)$, which provides additionally also the transport channels

20 that are used for each transmitted coefficient sequence. The remaining coefficient sequences are filled with zeros, and later predicted from the received (usually non-zero) coefficients according to the received side information, e.g. the subband or subband group related prediction matrices and directions.

25 Subband grouping

In one embodiment, the used subbands have different bandwidths adapted to the psycho-acoustic properties of human hearing. Alternatively, a number of subbands from the Analysis Filter Bank 53 are combined so as to form an adapted filter bank with subbands having different bandwidths. A group of adjacent subbands from the Analysis

30 Filter Bank 53 is processed using the same parameters. If groups of combined subbands are used, the corresponding subband configuration applied at the encoder side must be

known to the decoder side. In an embodiment, configuration information is transmitted and is used by the decoder to set up its synthesis filter bank. In an embodiment, the configuration information comprises an identifier for one out of a plurality of predefined known configurations (e.g. in a list).

5

In another embodiment, the following flexible solution that reduces the required number of bits for defining a subband configuration is used. For an efficient encoding of subband configuration, data of the first, penultimate and last subband groups are treated differently than the other subband groups. Further, subband group bandwidth difference values are 10 used in the encoding. In principle, the subband grouping information coding method is suited for coding subband configuration data for subband groups valid for one or more frames of an audio signal, wherein each subband group is a combination of one or more adjacent original subbands and the number of original subbands is predefined. In one embodiment, the bandwidth of a following subband group is greater than or equal to the 15 bandwidth of a current subband group. The method includes coding a number of N_{SB} subband groups with a fixed number of bits representing $N_{SB} - 1$, and if $N_{SB} > 1$, coding for a first subband group g_1 a bandwidth value $B_{SB}[1]$ with a unary code representing $B_{SB}[1] - 1$. If $N_{SB} = 3$, a bandwidth difference value $\Delta B_{SB}[2] = B_{SB}[2] - B_{SB}[1]$ with a fixed number of bits is coded for a second subband group g_2 . If $N_{SB} > 3$, a corresponding 20 number of bandwidth difference values $\Delta B_{SB}[g] = B_{SB}[g] - B_{SB}[g - 1]$ is coded for the subband groups $g_2, \dots, g_{N_{SB}-2}$ with a unary code, and a bandwidth difference value $\Delta B_{SB}[N_{SB} - 1] = B_{SB}[N_{SB} - 1] - B_{SB}[N_{SB} - 2]$ with a fixed number of bits is coded for the last subband group $g_{N_{SB}-1}$. A bandwidth value for a subband group is expressed as a 25 number of adjacent original subbands. For the last subband group g_{SB} , no corresponding value needs to be included in the coded subband configuration data.

Fig.9 shows a generalized block diagram of the HOA encoding path of a conventional MPEG-H 3D audio encoder. Two types of predominant sound signals are extracted: 30 directional signals in a Directional Sound Extraction block DSE and vector-based signals VVec in a VVec Sound Extraction block VSE. The vector belonging to a vector-based signal VVec (V-vector) represents the spatial distribution of the soundfield for the corresponding vector-based signal. Further, also an ambience component is encoded in a Calculator for Residuum/Ambience CRA, whereby any one or both or none of the output data from the Directional Sound Extraction block DSE and the VVec Sound 35 Extraction block VSE can be used. The ambience signal is subjected to Spatial Resolution Reduction block SRR, partial decorrelation PD and gain control GC_A. The

blocks within the box are controlled by the Sound Scene Analysis SSA. Before being fed into the Universal Speech & Audio encoder USAC3D, also the predominant sound signals are processed by respective gain control blocks GC_D, GC_V . Finally the USAC3D encoder $ENC_c \& HEP_c$ packs the HOA spatial side information into the HOA extension payload.

5

Fig.10 shows an improved audio encoder as usable in MPEG, according to one embodiment. The disclosed technology amends the current MPEG-H 3D Audio system in a way that the bit stream for low bandwidth is a real superset of the known MPEG-H 3D Audio format. Compared to Fig.9, in the Sound Scene Analysis SSA a path is added that comprises two new blocks. These are a QMF Analysis Filter bank QA_c , which is applied to ambiance signals, and a Directional Subband Calculation block DSC_c for calculation of parameters of directional subband signals. These parameters allow for synthesizing directional signals based on the transmitted ambiance signals. Additionally, parameters are calculated which allow for reproducing missing ambiance signals. The side information parameters for the synthesis process are handed over to the USAC3D encoder $ENC \& HEP$, which packs them into the HOA extension payload of the compressed output signal $HOA_{c,o}$. Advantageously, the compression is more efficient than conventional compression as achieved with the arrangement of Fig.9.

20 Fig.11 shows a generalized block diagram of a conventional MPEG-H 3D Audio decoder. First, the HOA side information is extracted from the compressed input bitstream $HOA_{c,i}$ and a USAC3D and HOA Extension Payload decoder $DEC_c \& HEP_c$ reproduces the transmission channels waveform signals. These are fed into the corresponding inverse gain control blocks IGC_D, IGC_V, IGC_A . Here, the normalization applied in the encoder is reversed. The corresponding transmission channels are used together with the side information to synthesize the predominant sound signals (directional and/or vector-based) in a HOA Directional Sound Synthesis block DSS and/or a VVec Sound Synthesis block VSS respectively. In the third path, the ambiance component is reproduced by Inverse Partial Decorrelation IPD and HOA Ambience Synthesis HAS blocks. The following HOA 25 Composition block HC_c combines the predominant sound components and the ambiance to build the decoded HOA signal. This is fed into the HOA renderer HR to produce the output signal $HOA'_{D,o}$, ie. the final loudspeaker feeds.

30 Fig.12 shows an improved audio decoder as usable in MPEG, according to one embodiment. As in the encoder, a path is added. It comprises a decoder side QMF Analysis block QA_D for calculation of subband signals and a Directional Subband signal Synthesis block DSC_D for the synthesis of the parametrically encoded directional

subband signals. The calculated subband signals are used together with the corresponding transmitted side information to synthesize a HOA representation of directional signals. Afterwards, the synthesized signal component is transferred into the time domain using the QMF synthesis filter bank QS. Its output signal is additionally fed 5 into the enhanced HOA composition block HC. The following HOA rendering block HR for providing a decoded HOA output signal HOA_{D,O} is left unchanged.

In the following, some basic features of Higher Order Ambisonics are explained. Higher Order Ambisonics (HOA) is based on the description of a sound field within a 10 compact area of interest, which is assumed to be free of sound sources. In that case the spatiotemporal behavior of the sound pressure $p(t, \mathbf{x})$ at time t and position \mathbf{x} within the area of interest is physically fully determined by the homogeneous wave equation. In the following we assume a spherical coordinate system as shown in Fig.6. In this coordinate system, the x axis points to the frontal position, the y axis points to the left, and the z axis 15 points to the top. A position in space $\mathbf{x} = (r, \theta, \phi)^T$ is represented by a radius $r > 0$ (i.e. the distance to the coordinate origin), an inclination angle $\theta \in [0, \pi]$ measured from the polar axis z (!) and an azimuth angle $\phi \in [0, 2\pi]$ measured counter-clockwise in the $x - y$ plane from the x axis. Further, $(\cdot)^T$ denotes the transposition.

Then, it can be shown [11] that the Fourier transform of the sound pressure with respect 20 to time denoted by $\mathcal{F}_t(\cdot)$, i.e.,

$$P(\omega, \mathbf{x}) = \mathcal{F}_t(p(t, \mathbf{x})) = \int_{-\infty}^{\infty} p(t, \mathbf{x}) e^{-i\omega t} dt \quad (41)$$

with ω denoting the angular frequency and i indicating the imaginary unit, may be expanded into the series of Spherical Harmonics according to

$$P(\omega = kc_s, r, \theta, \phi) = \sum_{n=0}^N \sum_{m=-n}^n A_n^m(k) j_n(kr) S_n^m(\theta, \phi) \quad (42)$$

25 In eq.(42), c_s denotes the speed of sound and k denotes the angular wave number, which is related to the angular frequency ω by $k = \frac{\omega}{c_s}$. Further, $j_n(\cdot)$ denote the spherical Bessel functions of the first kind and $S_n^m(\theta, \phi)$ denote the real valued Spherical 30 Harmonics of order n and degree m , which are defined above. The expansion coefficients $A_n^m(k)$ only depend on the angular wave number k . Note that it has been implicitly assumed that sound pressure is spatially band-limited. Thus, the series is truncated with respect to the order index n at an upper limit N , which is called the order of the HOA representation.

If the sound field is represented by a superposition of an infinite number of harmonic plane waves of different angular frequencies ω and arriving from all possible directions 35 specified by the angle tuple (θ, ϕ) , it can be shown [10] that the respective plane wave

complex amplitude function $C(\omega, \theta, \phi)$ can be expressed by the following Spherical Harmonics expansion

$$C(\omega = kc_s, \theta, \phi) = \sum_{n=0}^N \sum_{m=-n}^n C_n^m(k) S_n^m(\theta, \phi) \quad (43)$$

where the expansion coefficients $C_n^m(k)$ are related to the expansion coefficients $A_n^m(k)$

5 by

$$A_n^m(k) = i^n C_n^m(k). \quad (44)$$

Assuming the individual coefficients $C_n^m(k = \omega/c_s)$ to be functions of the angular frequency ω , the application of the inverse Fourier transform (denoted by $\mathcal{F}^{-1}(\cdot)$) provides time domain functions

$$10 \quad c_n^m(t) = \mathcal{F}_t^{-1}(C_n^m(\omega/c_s)) = \frac{1}{2\pi} \int_{-\infty}^{\infty} C_n^m\left(\frac{\omega}{c_s}\right) e^{i\omega t} d\omega \quad (45)$$

for each order n and degree m . These time domain functions are referred to as continuous-time HOA coefficient sequences here, which can be collected in a single vector $\mathbf{c}(t)$ by

$\mathbf{c}(t)$

$$= \left[c_0^0(t) \quad c_1^{-1}(t) \quad c_1^0(t) \quad c_1^1(t) \quad c_2^{-2}(t) \quad c_2^{-1}(t) \quad c_2^0(t) \quad c_2^1(t) \quad c_2^2(t) \quad \dots \quad c_N^{N-1}(t) \quad c_N^N(t) \right]^T \quad (46)$$

15 The position index of a HOA coefficient sequence $c_n^m(t)$ within the vector $\mathbf{c}(t)$ is given by $n(n + 1) + 1 + m$.

The overall number of elements in the vector $\mathbf{c}(t)$ is given by $O = (N + 1)^2$.

The final Ambisonics format provides the sampled version of $\mathbf{c}(t)$ using a sampling frequency f_S as

$$20 \quad \{\mathbf{c}(lT_S)\}_{l \in \mathbb{N}} = \{\mathbf{c}(T_S), \mathbf{c}(2T_S), \mathbf{c}(3T_S), \mathbf{c}(4T_S), \dots\} \quad (47)$$

where $T_S = 1/f_S$ denotes the sampling period. The elements of $\mathbf{c}(lT_S)$ are here referred to as discrete-time HOA coefficient sequences, which can be shown to always be real valued. This property obviously also holds for the continuous-time versions $c_n^m(t)$.

25 Definition of real valued Spherical Harmonics

The real valued spherical harmonics $S_n^m(\theta, \phi)$ (assuming SN3D normalization [1, Ch.3.1]) are given by

$$S_n^m(\theta, \phi) = \sqrt{(2n + 1) \frac{(n - |m|)!}{(n + |m|)!}} P_{n,|m|}(\cos\theta) \operatorname{trg}_m(\phi) \quad (48)$$

with

$$30 \quad \operatorname{trg}_m(\phi) = \begin{cases} \sqrt{2} \cos(m\phi) & m > 0 \\ 1 & m = 0 \\ -\sqrt{2} \sin(m\phi) & m < 0 \end{cases} \quad (49)$$

The associated Legendre functions $P_{n,m}(x)$ are defined as

$$P_{n,m}(x) = (1 - x^2)^{m/2} \frac{d^m}{dx^m} P_n(x), m \geq 0 \quad (50)$$

with the Legendre polynomial $P_n(x)$ and, unlike in [11], *without* the Condon-Shortley phase term $(-1)^m$.

5

In one embodiment, a method for frame-wise determining and efficient encoding of directions of dominant directional signals within subbands or subband groups of a HOA signal representation (as obtained from a complex valued filter bank) comprises for each current frame k: determining a set $M_{DIR}(k)$ of full band direction candidates in the

- 10 HOA signal, a number of elements $NoOfGlobalDirs$ in the set $M_{DIR}(k)$ and a number $D(k) = \log_2(NoOfGlobalDirs)$ required for encoding the number of elements, wherein each full band direction candidate has a global index q ($q \in [1, \dots, Q]$) relating to a predefined full set of Q possible directions,
- 15 for each subband or subband group j of the current frame k, determining which directions of the full band direction candidates in the set $M_{DIR}(k)$ occur as active subband directions, determining a set $M_{FB}(k)$ of used full band direction candidates (all contained in the set $M_{DIR}(k)$ of full band direction candidates in the HOA signal) that occur as active subband directions in any of the subbands or subband groups, and a number $NoOfGlobalDirs(k)$ of elements in the set $M_{FB}(k)$ of used full band direction candidates, and
- 20 for each subband or subband group j of the current frame k: determining which directions of up to d ($d \in [1, \dots, D]$) directions among the full band direction candidates in the set $M_{DIR}(k)$ are active subband directions, determining for each of the active subband directions a trajectory and a trajectory index, and assigning the trajectory index to each active subband direction, and
- 25 encoding each of the active subband directions in the current subband or subband group j by a relative index with $D(k)$ bits.

In one embodiment, a computer readable medium has stored thereon executable instructions to cause a computer to perform this method for frame-wise determining and efficient encoding of directions of dominant directional signals.

Further, in one embodiment, a method for decoding of directions of dominant directional signals within subbands of a HOA signal representation comprises steps of receiving indices of a maximum number of directions D for a HOA signal representation to be decoded, reconstructing directions of a maximum number of directions D of the HOA signal representation to be decoded, receiving indices of active direction signals per

30

subband, reconstructing active directions per subband from the reconstructed directions D of the HOA signal representation to be decoded and the indices of active direction signals per subband, predicting directional signals of subbands, wherein the predicting of a directional signal in a current frame of a subband comprises determining directional signals of a preceding frame of the subband, and wherein a new directional signal is created if the index of the directional signal was zero in the preceding frame and is non-zero in the current frame, a previous directional signal is cancelled if the index of the directional signal was non-zero in the preceding frame and is zero in the current frame, and a direction of a directional signal is moved from a first to a second direction if the index of the directional signal changes from the first to the second direction.

In one embodiment, as shown in Fig.1 and Fig.3 and discussed above, an apparatus for encoding frames of an input HOA signal having a given number of coefficient sequences, where each coefficient sequence has an index, comprises at least one hardware processor and a non-transitory, tangible, computer readable storage medium tangibly embodying at least one software component that when executing on the at least one hardware processor causes the hardware processor to

15 compute 11 a truncated HOA representation $C_T(k)$ having a reduced number of non-zero coefficient sequences,

20 determine 11 a set of indices of active coefficient sequences $I_{C,ACT}(k)$ that are included in the truncated HOA representation,

estimate 16 from the input HOA signal a first set of candidate directions $M_{DIR}(k)$;

divide 15 the input HOA signal into a plurality of frequency subbands f_1, \dots, f_F , wherein coefficient sequences $\bar{C}(k-1, k, f_1), \dots, \bar{C}(k-1, k, f_F)$ of the frequency subbands are obtained,

25 estimate 16 for each of the frequency subbands a second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$, wherein each element of the second set of directions is a tuple of indices with a first and a second index, the second index being an index of an active direction for a current frequency subband and the first index being a trajectory index of the active

30 direction, wherein each active direction is also included in the first set of candidate directions $M_{DIR}(k)$ of the input HOA signal,

35 for each of the frequency subbands, compute 17 directional subband signals $\bar{X}(k-1, k, f_1), \dots, \bar{X}(k-1, k, f_F)$ from the coefficient sequences $\bar{C}(k-1, k, f_1), \dots, \bar{C}(k-1, k, f_F)$ of the frequency subband according to the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$ of the respective frequency subband,

for each of the frequency subbands, calculate 18 a prediction matrix $A(k, f_1), \dots, A(k, f_F)$ adapted for predicting the directional subband signals $\bar{X}(k-1, k, f_1), \dots, \bar{X}(k-1, k, f_F)$ from the coefficient sequences $\bar{C}(k-1, k, f_1), \dots, \bar{C}(k-1, k, f_F)$ of the frequency subband using the set of indices of active coefficient sequences $I_{C,ACT}(k)$ of the respective

5 frequency subband, and

encode the first set of candidate directions $M_{DIR}(k)$, the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$, the prediction matrices $A(k, f_1), \dots, A(k, f_F)$ and the truncated HOA representation $C_T(k)$.

10 In one embodiment, as shown in Fig.4 and Fig.5 and discussed above, an apparatus for decoding a compressed HOA representation comprises at least one hardware processor and a non-transitory, tangible, computer readable storage medium tangibly embodying at least one software component that when executing on the at least one hardware processor causes the hardware processor to extract 41,42,43 from the compressed HOA representation a plurality of truncated HOA coefficient sequences $\hat{z}_1(k), \dots, \hat{z}_I(k)$, an assignment vector $v_{AMB,ASSIGN}(k)$ indicating or containing sequence indices of said truncated HOA coefficient sequences, subband related direction information $M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$, a plurality of prediction matrices $A(k+1, f_1), \dots, A(k+1, f_F)$, and gain control side information $e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$;

15 reconstruct 51,52 a truncated HOA representation $\hat{C}_T(k)$ from the plurality of truncated HOA coefficient sequences $\hat{z}_1(k), \dots, \hat{z}_I(k)$, the gain control side information $e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$ and the assignment vector $v_{AMB,ASSIGN}(k)$,

20 decompose in one or more Analysis Filter banks 53 the reconstructed truncated HOA representation $\hat{C}_T(k)$ into frequency subband representations $\hat{\mathcal{C}}_T(k, f_1), \dots, \hat{\mathcal{C}}_T(k, f_F)$ for a plurality of F frequency subbands,

25 synthesize 54 in Directional Subband Synthesis blocks 54 for each of the frequency subband representations a predicted directional HOA representation $\hat{\mathcal{C}}_D(k, f_1), \dots, \hat{\mathcal{C}}_D(k, f_F)$ from the respective frequency subband representation $\hat{\mathcal{C}}_T(k, f_1), \dots, \hat{\mathcal{C}}_T(k, f_F)$ of the reconstructed truncated HOA representation, the subband related direction information $M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$ and the prediction matrices $A(k+1, f_1), \dots, A(k+1, f_F)$,

30 compose 55 in Subband Composition blocks 55 for each of the F frequency subbands a decoded subband HOA representation $\hat{\mathcal{C}}(k, f_1), \dots, \hat{\mathcal{C}}(k, f_F)$ with coefficient sequences $\hat{c}_n(k, f_j), n = 1, \dots, O$ that are either obtained from coefficient sequences of the truncated HOA representation $\hat{\mathcal{C}}_T(k, f_j)$ if the coefficient sequence has an index n that is included in

35 the assignment vector $v_{AMB,ASSIGN}(k)$, or otherwise obtained from coefficient sequences

of the predicted directional HOA component $\widehat{\mathcal{C}}_D(k, f_j)$ provided by one of the Directional Subband Synthesis blocks 54, and synthesize in one or more Synthesis Filter banks 56 the decoded subband HOA representations $\widehat{\mathcal{C}}(k, f_1), \dots, \widehat{\mathcal{C}}(k, f_F)$ to obtain the decoded HOA representation $\widehat{\mathcal{C}}(k)$.

5

In one embodiment, an apparatus 10 for encoding frames of an input HOA signal having a given number of coefficient sequences, where each coefficient sequence has an index, comprises a computation and determining module 11 configured to compute a truncated HOA representation $C_T(k)$ having a reduced number of non-zero coefficient sequences, 10 and further configured to determine a set of indices of active coefficient sequences $I_{C,ACT}(k)$ included in the truncated HOA representation; an Analysis Filter bank module 15 configured to divide the input HOA signal into a plurality of frequency subbands f_1, \dots, f_F , wherein coefficient sequences $\bar{\mathcal{C}}(k-1, k, f_1), \dots, \bar{\mathcal{C}}(k-1, k, f_F)$ of the frequency subbands are obtained; 15 a Direction Estimation module 16 configured to estimate from the input HOA signal a first set of candidate directions $M_{DIR}(k)$, and further configured to estimate for each of the frequency subbands a second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$, wherein each element of the second set of directions is a tuple of indices with a first and a second index, the second index being an index of an active direction for a current frequency 20 subband and the first index being a trajectory index of the active direction, wherein each active direction is also included in the first set of candidate directions $M_{DIR}(k)$ of the input HOA signal; at least one Directional Subband Computation module 17 configured to compute, for each of the frequency subbands, directional subband signals $\bar{X}(k-1, k, f_1), \dots, \bar{X}(k-1, k, f_F)$ from the coefficient sequences $\bar{\mathcal{C}}(k-1, k, f_1), \dots, \bar{\mathcal{C}}(k-1, k, f_F)$ of the 25 frequency subband according to the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$ of the respective frequency subband; at least one Directional Subband Prediction module 18 configured to calculate, for each of the frequency subbands, a prediction matrix $A(k, f_1), \dots, A(k, f_F)$ adapted for predicting the directional subband signals $\bar{X}(k-1, k, f_1), \dots, \bar{X}(k-1, k, f_F)$ from the coefficient sequences $\bar{\mathcal{C}}(k-1, k, f_1), \dots, \bar{\mathcal{C}}(k-1, k, f_F)$ of the 30 frequency subband using the set of indices of active coefficient sequences $I_{C,ACT}(k)$ of the respective frequency subband; and an encoding module 30 configured to encode the first set of candidate directions $M_{DIR}(k)$, the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$, the prediction matrices $A(k, f_1), \dots, A(k, f_F)$ and the truncated HOA representation $C_T(k)$.

In one embodiment, the apparatus further comprises a Partial Decorrelator 12 configured to partially decorrelate the truncated HOA channel sequences; a Channel Assignment module 13 configured to assign the truncated HOA channel sequences $y_1(k), \dots, y_l(k)$ to transport channels; and at least one Gain Control unit 14 configured to perform gain control on the transport channels, wherein gain control side information $e_i(k - 1)$, $\beta_i(k - 1)$ for each transport channel is generated.

In one embodiment, the encoding module 30 comprises a Perceptual Encoder 31 configured to encode the gain controlled truncated HOA channel sequences $z_1(k), \dots, z_l(k)$; a Side Information Source Coder 32 configured to encode the gain control side information $e_i(k - 1)$, $\beta_i(k - 1)$, the first set of candidate directions $M_{DIR}(k)$, the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$ and the prediction matrices $A(k, f_1), \dots, A(k, f_F)$; and a Multiplexer 33 configured to multiplex the outputs of the perceptual encoder 31 and the side information source coder 32 to obtain an encoded HOA signal frame $\tilde{B}(k - 1)$.

In one embodiment, an apparatus 50 for decoding a HOA signal comprises an Extraction module 40 configured to extract from the compressed HOA representation a plurality of truncated HOA coefficient sequences $\hat{z}_1(k), \dots, \hat{z}_l(k)$, an assignment vector $v_{AMB, ASSIGN}(k)$ indicating or containing sequence indices of said truncated HOA coefficient sequences, subband related direction information $M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$, a plurality of prediction matrices $A(k+1, f_1), \dots, A(k+1, f_F)$, and gain control side information $e_1(k), \beta_1(k), \dots, e_l(k), \beta_l(k)$; a Reconstruction module 51, 52 configured to reconstruct a truncated HOA representation $\hat{C}_T(k)$ from the plurality of truncated HOA coefficient sequences $\hat{z}_1(k), \dots, \hat{z}_l(k)$, the gain control side information $e_1(k), \beta_1(k), \dots, e_l(k), \beta_l(k)$ and the assignment vector $v_{AMB, ASSIGN}(k)$; an Analysis Filter bank module 53 configured to decompose the reconstructed truncated HOA representation $\hat{C}_T(k)$ into frequency subband representations $\hat{\mathcal{C}}_T(k, f_1), \dots, \hat{\mathcal{C}}_T(k, f_F)$ for a plurality of F frequency subbands; at least one Directional Subband Synthesis module 54 configured to synthesize for each of the frequency subband representations a predicted directional HOA representation $\hat{\mathcal{C}}_D(k, f_1), \dots, \hat{\mathcal{C}}_D(k, f_F)$ from the respective frequency subband representation $\hat{\mathcal{C}}_T(k, f_1), \dots, \hat{\mathcal{C}}_T(k, f_F)$ of the reconstructed truncated HOA representation, the subband related direction information $M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$ and the prediction matrices $A(k+1, f_1), \dots, A(k+1, f_F)$; at least one Subband Composition module 55 configured to compose for each of the F frequency subbands a decoded subband HOA representation $\hat{\mathcal{C}}(k, f_1), \dots, \hat{\mathcal{C}}(k, f_F)$ with coefficient sequences $\hat{c}_n(k, f_j)$, $n = 1, \dots, O$ that are either obtained from coefficient

sequences of the truncated HOA representation $\widehat{\mathcal{C}}_T(k, f_j)$ if the coefficient sequence has an index n that is included in the assignment vector $\mathbf{v}_{\text{AMB,ASSIGN}}(k)$, or otherwise obtained from coefficient sequences of the predicted directional HOA component $\widehat{\mathcal{C}}_D(k, f_j)$ provided by one of the Directional Subband Synthesis module 54; and

5 a Synthesis Filter bank module 56 configured to synthesize the decoded subband HOA representations $\widehat{\mathcal{C}}(k, f_1), \dots, \widehat{\mathcal{C}}(k, f_F)$ to obtain the decoded HOA representation $\widehat{\mathcal{C}}(k)$.

In one embodiment, the Extraction module 40 comprises at least a Demultiplexer 41 for obtaining an encoded side information portion and a perceptually coded portion that

10 comprises encoded truncated HOA coefficient sequences $\check{z}_1(k), \dots, \check{z}_I(k)$; a Perceptual Decoder 42 configured to perceptually decode s42 the encoded truncated HOA coefficient sequences $\check{z}_1(k), \dots, \check{z}_I(k)$ to obtain the truncated HOA coefficient sequences $\hat{z}_1(k), \dots, \hat{z}_I(k)$; and a Side Information Source Decoder 43 configured to decode (s43) the encoded side information portion to obtain the subband related direction information

15 $M_{\text{DIR}}(k+1, f_1), \dots, M_{\text{DIR}}(k+1, f_F)$, prediction matrices $A(k+1, f_1), \dots, A(k+1, f_F)$, gain control side information $e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$ and assignment vector $\mathbf{v}_{\text{AMB,ASSIGN}}(k)$.

Fig.13 shows a flow-chart of a low bit-rate encoding method, in one embodiment. The method for low bit-rate encoding of frames of an input HOA signal having a given number

20 of coefficient sequences, where each coefficient sequence has an index, comprises computing s110 a truncated HOA representation $C_T(k)$ having a reduced number of non-zero coefficient sequences, determining s111 a set of indices of active coefficient sequences $I_{C,\text{ACT}}(k)$ that are included in the truncated HOA representation, estimating s16 from the input HOA signal a first set of candidate directions $M_{\text{DIR}}(k)$, dividing s15 the input

25 HOA signal into a plurality of frequency subbands f_1, \dots, f_F , wherein coefficient sequences $\tilde{C}(k-1, k, f_1), \dots, \tilde{C}(k-1, k, f_F)$ of the frequency subbands are obtained, estimating s161 for each of the frequency subbands a second set of directions $M_{\text{DIR}}(k, f_1), \dots, M_{\text{DIR}}(k, f_F)$, wherein each element of the second set of directions is a tuple of indices with a first and a second index, the second index being an index of an active direction for a current

30 frequency subband and the first index being a trajectory index of the active direction, wherein each active direction is also included in the first set of candidate directions $M_{\text{DIR}}(k)$ of the input HOA signal,

for each of the frequency subbands, computing s17 directional subband signals $\bar{X}(k-1, k, f_1), \dots, \bar{X}(k-1, k, f_F)$ from the coefficient sequences $\tilde{C}(k-1, k, f_1), \dots,$

$\bar{C}(k-1, k, f_F)$ of the frequency subband according to the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$ of the respective frequency subband, for each of the frequency subbands, calculating s18 a prediction matrix $A(k, f_1), \dots, A(k, f_F)$ adapted for predicting the directional subband signals $\bar{X}(k-1, k, f_1), \dots, \bar{X}(k-1, k, f_F)$ 5 from the coefficient sequences $\bar{C}(k-1, k, f_1), \dots, \bar{C}(k-1, k, f_F)$ of the frequency subband using the set of indices of active coefficient sequences $I_{C,ACT}(k)$ of the respective frequency subband, and encoding s19 the first set of candidate directions $M_{DIR}(k)$, the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$, the prediction matrices $A(k, f_1), \dots, A(k, f_F)$ and the truncated HOA representation $C_T(k)$.

10

In one embodiment, said encoding the truncated HOA representation $C_T(k)$ comprises partial decorrelation s12 of the truncated HOA channel sequences, channel assignment s13 for assigning the truncated HOA channel sequences $y_1(k), \dots, y_l(k)$ to transport channels, performing gain control s14 on each of the transport channels, wherein gain 15 control side information $e_i(k-1), \beta_i(k-1)$ for each transport channel is generated, encoding s31 the gain controlled truncated HOA channel sequences $z_1(k), \dots, z_l(k)$ in a perceptual encoder 31, encoding s32 the gain control side information $e_i(k-1), \beta_i(k-1)$, the first set of candidate directions $M_{DIR}(k)$, the second set of directions $M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$ and the prediction matrices $A(k, f_1), \dots, A(k, f_F)$ in a side information 20 source coder 32, and multiplexing s33 the outputs of the perceptual encoder 31 and the side information source coder 32 to obtain an encoded HOA signal frame $\breve{B}(k-1)$. In one embodiment, an apparatus for encoding frames of an input HOA signal having a given number of coefficient sequences, where each coefficient sequence has an index, comprises a processor and a memory storing instructions that, when executed by the 25 processor, cause the processor to perform the steps of claim 7.

Fig.14 shows a flow-chart of a decoding method, in one embodiment. The method for decoding a low bit-rate compressed HOA representation, comprises extracting s41, s42, s43 from the compressed HOA representation a plurality of truncated HOA coefficient sequences $\hat{z}_1(k), \dots, \hat{z}_l(k)$, an assignment vector $v_{AMB,ASSIGN}(k)$ indicating or 30 containing sequence indices of said truncated HOA coefficient sequences, subband related direction information $M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$, a plurality of prediction matrices $A(k+1, f_1), \dots, A(k+1, f_F)$, and gain control side information $e_1(k), \beta_1(k), \dots, e_l(k), \beta_l(k)$, reconstructing s51, s52 a truncated HOA representation $\hat{C}_T(k)$ from the plurality of 35 truncated HOA coefficient sequences $\hat{z}_1(k), \dots, \hat{z}_l(k)$, the gain control side information $e_1(k), \beta_1(k), \dots, e_l(k), \beta_l(k)$ and the assignment vector $v_{AMB,ASSIGN}(k)$, decomposing s53

in Analysis Filter banks 53 the reconstructed truncated HOA representation ($\hat{C}_T(k)$) into frequency subband representations $\hat{\mathcal{C}}_T(k, f_1), \dots, \hat{\mathcal{C}}_T(k, f_F)$ for a plurality of F frequency subbands, synthesizing s54 in Directional Subband Synthesis blocks 54 for each of the frequency subband representations a predicted directional HOA representation $\hat{\mathcal{C}}_D(k, f_1), \dots, \hat{\mathcal{C}}_D(k, f_F)$ from the respective frequency subband representation $\hat{\mathcal{C}}_T(k, f_1), \dots, \hat{\mathcal{C}}_T(k, f_F)$ of the reconstructed truncated HOA representation, the subband related direction information $M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$ and the prediction matrices $A(k+1, f_1), \dots, A(k+1, f_F)$, composing s55 in Subband Composition blocks 55 for each of the F frequency subbands a decoded subband HOA representation $\hat{\mathcal{C}}(k, f_1), \dots, \hat{\mathcal{C}}(k, f_F)$ with coefficient sequences $\hat{\mathbf{c}}_n(k, f_j), n = 1, \dots, O$ that are either obtained from coefficient sequences of the truncated HOA representation $\hat{\mathcal{C}}_T(k, f_j)$ if the coefficient sequence has an index n that is included in the assignment vector $v_{AMB, ASSIGN}(k)$, or otherwise obtained from coefficient sequences of the predicted directional HOA component $\hat{\mathcal{C}}_D(k, f_j)$ provided by one of the Directional Subband Synthesis blocks 54, and synthesizing s56 in Synthesis Filter banks 56 the decoded subband HOA representations $\hat{\mathcal{C}}(k, f_1), \dots, \hat{\mathcal{C}}(k, f_F)$ to obtain the decoded HOA representation $\hat{\mathcal{C}}(k)$.

In an embodiment, the extracting comprises one or more of demultiplexing s41 the compressed HOA representation to obtain a perceptually coded portion and an encoded side information portion, perceptually decoding s42 the encoded truncated HOA coefficient sequences and decoding s43 in a side information source decoder 43 the encoded side information. In an embodiment, the reconstructing a truncated HOA representation $\hat{C}_T(k)$ from the plurality of truncated HOA coefficient sequences comprises one or more of performing inverse gain control s51 and reconstructing s52 the truncated HOA representation $\hat{C}_T(k)$.

25 In one embodiment, a computer readable medium has stored thereon executable instructions to cause a computer to perform said method for decoding of directions of dominant directional signals.

30 In one embodiment, an apparatus for decoding a compressed HOA signal comprises a processor and a memory storing instructions that, when executed by the processor, cause the processor to perform the steps of claim 1.

It is expressly intended that all combinations of those elements that perform substantially the same function in substantially the same way to achieve the same results are within the scope of the invention, and that each feature disclosed in the description and (where appropriate) the claims and drawings may be provided independently or in any

5 appropriate combination. Features may, where appropriate be implemented in hardware, software, or a combination of the two. Connections may, where applicable, be implemented as wireless connections or wired, not necessarily direct or dedicated, connections. In one embodiment, each of the above mentioned modules or units, such as Extraction module, Gain Control units, sub-band signal grouping units, processing units

10 and others, is at least partially implemented in hardware by using at least one silicon component.

References

- [1] Jérôme Daniel. *Représentation de champs acoustiques, application à la transmission et à la reproduction de scènes sonores complexes dans un contexte multimédia*. PhD thesis, Université Paris 6, 2001.
- 5 [2] Jörg Fliege and Ulrike Maier. A two-stage approach for computing cubature formulae for the sphere. Technical report, Fachbereich Mathematik, Universität Dortmund, 1999. Node numbers are found at <http://www.mathematik.uni-dortmund.de/lsx/research/projects/fliege/nodes/nodes.html>.
- [3] Sven Kordon and Alexander Krueger. Adaptive value range control for HOA signals.
- 10 10 Patent application (Technicolor Internal Reference: PD130016), July 2013.
- [4] Alexander Krueger and Sven Kordon. Intelligent signal extraction and packing for compression of HOA sound field representations. Patent application EP 13305558.2 (Technicolor Internal Reference: PD130015), filed 29. April 2013.
- [5] A. Krueger, S. Kordon, and J. Boehm. HOA compression by decomposition into
- 15 15 directional and ambient components. Published patent application EP2743922 (Technicolor Internal Reference: PD120055), December 2012.
- [6] Alexander Krüger, Sven Kordon, Johannes Boehm, and Jan-Mark Batke. Method and apparatus for compressing and decompressing a higher order ambisonics signal representation. Published patent application EP2665208 (Technicolor Internal Reference: PD120015), May 2012.
- 20 [7] Alexander Krüger. Method and apparatus for robust sound source direction tracking based on Higher Order Ambisonics. Published patent application EP2738962 (Technicolor Internal Reference: PD120049), November 2012.
- [8] Daniel D. Lee and H. Sebastian Seung. Learning the parts of objects by nonnegative
- 25 25 matrix factorization. *Nature*, 401:788–791, 1999.
- [9] ISO/IEC JTC 1/SC 29 N. Text of ISO/IEC 23008-3/CD, MPEG-H 3d audio, April 2014.
- [10] Boaz Rafaely. Plane-wave decomposition of the sound field on a sphere by spherical convolution. *J. Acoust. Soc. Am.*, 4(116):2149–2157, October 2004.
- [11] Earl G. Williams. *Fourier Acoustics*, volume 93 of *Applied Mathematical Sciences*.
- 30 30 Academic Press, 1999.

Claims

1. A method for decoding a compressed HOA representation, comprising
 - extracting (s41,s42,s43) from the compressed HOA representation a plurality of truncated HOA coefficient sequences ($\hat{\mathbf{z}}_1(k), \dots, \hat{\mathbf{z}}_I(k)$), an assignment vector ($\mathbf{v}_{\text{AMB,ASSIGN}}(k)$) indicating or containing sequence indices of said truncated HOA coefficient sequences, subband related direction information ($\mathbf{M}_{\text{DIR}}(k+1, f_1), \dots, \mathbf{M}_{\text{DIR}}(k+1, f_F)$), a plurality of prediction matrices ($\mathbf{A}(k+1, f_1), \dots, \mathbf{A}(k+1, f_F)$), and gain control side information ($e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$), wherein the extracting comprises demultiplexing (s41) the compressed HOA representation to obtain a perceptually coded portion and an encoded side information portion;
 - reconstructing (s51,s52) a truncated HOA representation ($\hat{\mathbf{C}}_T(k)$) from the plurality of truncated HOA coefficient sequences ($\hat{\mathbf{z}}_1(k), \dots, \hat{\mathbf{z}}_I(k)$), the gain control side information ($e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$) and the assignment vector ($\mathbf{v}_{\text{AMB,ASSIGN}}(k)$);
 - decomposing (s53) in Analysis Filter banks (53) the reconstructed truncated HOA representation ($\hat{\mathbf{C}}_T(k)$) into frequency subband representations ($\hat{\mathbf{C}}_T(k, f_1), \dots, \hat{\mathbf{C}}_T(k, f_F)$) for a plurality of F frequency subbands;
 - synthesizing (s54) in Directional Subband Synthesis blocks (54) for each of the frequency subband representations a predicted directional HOA representation ($\hat{\mathbf{C}}_D(k, f_1), \dots, \hat{\mathbf{C}}_D(k, f_F)$) from the respective frequency subband representation ($\hat{\mathbf{C}}_T(k, f_1), \dots, \hat{\mathbf{C}}_T(k, f_F)$) of the reconstructed truncated HOA representation, the subband related direction information ($\mathbf{M}_{\text{DIR}}(k+1, f_1), \dots, \mathbf{M}_{\text{DIR}}(k+1, f_F)$) and the prediction matrices ($\mathbf{A}(k+1, f_1), \dots, \mathbf{A}(k+1, f_F)$);
 - composing (s55) in Subband Composition blocks (55) for each of the F frequency subbands a decoded subband HOA representation ($\hat{\mathbf{C}}(k, f_1), \dots, \hat{\mathbf{C}}(k, f_F)$) with coefficient sequences ($\hat{\mathbf{c}}_n(k, f_j)$, $n = 1, \dots, O$) that are either obtained from coefficient sequences of the truncated HOA representation ($\hat{\mathbf{C}}_T(k, f_j)$) if the coefficient sequence has an index n that is included in the assignment vector ($\mathbf{v}_{\text{AMB,ASSIGN}}(k)$), or otherwise obtained from coefficient sequences of the predicted directional HOA component ($\hat{\mathbf{C}}_D(k, f_j)$) provided by one of the Directional Subband Synthesis blocks (54); and
 - synthesizing (s56) in Synthesis Filter banks (56) the decoded subband HOA representations ($\hat{\mathbf{C}}(k, f_1), \dots, \hat{\mathbf{C}}(k, f_F)$) to obtain the decoded HOA representation ($\hat{\mathbf{C}}(k)$).

2. The method according to claim 1, wherein the extracting comprises obtaining a perceptually coded portion that comprises encoded truncated HOA coefficient sequences ($\check{z}_1(k), \dots, \check{z}_I(k)$), and further comprises perceptually decoding (s42) in a perceptual decoder (42) the encoded truncated HOA coefficient sequences $(\check{z}_1(k), \dots, \check{z}_I(k))$ to obtain the truncated HOA coefficient sequences ($\hat{z}_1(k), \dots, \hat{z}_I(k)$).
- 5
3. The method according to claim 1 or 2, wherein the extracting comprises obtaining an encoded side information portion, and further comprises decoding (s43) in a side information source decoder (43) the encoded side information portion to obtain the subband related direction information ($M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$), prediction matrices ($A(k+1, f_1), \dots, A(k+1, f_F)$), gain control side information $(e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k))$ and assignment vector ($v_{AMB, ASSIGN}(k)$).
- 10
4. The method according to one of the claims 1-3, wherein the subband related direction information comprises a set of active directions ($M_{DIR}(k)$) and a tuple set $(M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F))$ that comprises tuples of indices with a first and a second index, the second index being an index of an active direction within the set of active directions ($M_{DIR}(k)$) for a current frequency subband, and the first index being a trajectory index of the active direction, wherein a trajectory is a temporal sequence of 20 directions of a particular sound source.
- 15
5. The method according to one of the claims 1-4, wherein at least one frequency subband representation comprises a subband group of two or more frequency subbands.
- 25
6. The method according to claim 5, wherein subband group configuration information is received or extracted from the compressed HOA representation, and the subband group configuration information is used to set up said Synthesis Filter banks (56).
7. A method for encoding frames of an input HOA signal having a given number of coefficient sequences, where each coefficient sequence has an index, comprising
 - determining (s111) a set of indices of active coefficient sequences ($I_{C, ACT}(k)$) to be included in a truncated HOA representation;
 - computing (s110) the truncated HOA representation ($C_T(k)$) having a reduced number of non-zero coefficient sequences;
 - estimating (s16) from the input HOA signal a first set of candidate directions ($M_{DIR}(k)$);
- 30
- 35

- dividing (s15) the input HOA signal into a plurality of frequency subbands (f_1, \dots, f_F) , wherein coefficient sequences $(\bar{C}(k-1, k, f_1), \dots, \bar{C}(k-1, k, f_F))$ of the frequency subbands are obtained;
- estimating (s161) for each of the frequency subbands a second set of directions $(M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F))$, wherein each element of the second set of directions is a tuple of indices with a first and a second index, the second index being an index of an active direction for a current frequency subband and the first index being a trajectory index of the active direction, wherein each active direction is also included in the first set of candidate directions $(M_{DIR}(k))$ of the input HOA signal;
- for each of the frequency subbands, computing (s17) directional subband signals $(\bar{X}(k-1, k, f_1), \dots, \bar{X}(k-1, k, f_F))$ from the coefficient sequences $(\bar{C}(k-1, k, f_1), \dots, \bar{C}(k-1, k, f_F))$ of the frequency subband according to the second set of directions $(M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F))$ of the respective frequency subband;
- for each of the frequency subbands, calculating (s18) a prediction matrix $(A(k, f_1), \dots, A(k, f_F))$ adapted for predicting the directional subband signals $(\bar{X}(k-1, k, f_1), \dots, \bar{X}(k-1, k, f_F))$ from the coefficient sequences $(\bar{C}(k-1, k, f_1), \dots, \bar{C}(k-1, k, f_F))$ of the frequency subband using the set of indices of active coefficient sequences $(I_{C,ACT}(k))$ of the respective frequency subband; and
- encoding (s19) the first set of candidate directions $(M_{DIR}(k))$, the second set of directions $(M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F))$, the prediction matrices $(A(k, f_1), \dots, A(k, f_F))$ and the truncated HOA representation $(C_T(k))$, wherein the truncated HOA representation $(C_T(k))$ is perceptually encoded (s31) in a perceptual encoder (31).

8. The method according to claim 7, wherein at least one group of two or more subbands is created, and wherein the at least one group is used instead of a single subband and is treated in the same way as a single subband.

9. The method according to claim 7 or 8, wherein said encoding the truncated HOA representation $(C_T(k))$ comprises

- partial decorrelation (s12) of the truncated HOA channel sequences;
- channel assignment (s13) for assigning the truncated HOA channel sequences $(y_1(k), \dots, y_l(k))$ to transport channels;
- performing gain control (s14) on each of the transport channels, wherein gain control side information $(e_i(k-1), \beta_i(k-1))$ for each transport channel is generated, wherein the gain controlled truncated HOA channel sequences $(z_1(k), \dots, z_l(k))$ are encoded (s31) in said perceptual encoder (31);

- encoding (s31) the gain controlled truncated HOA channel sequences ($z_1(k), \dots, z_l(k)$) in a perceptual encoder (31);
- encoding (s32) the gain control side information ($e_i(k-1), \beta_i(k-1)$), the first set of candidate directions ($M_{DIR}(k)$), the second set of directions ($M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$) and the prediction matrices ($A(k, f_1), \dots, A(k, f_F)$) in a side information source coder (32); and
- multiplexing (s33) the outputs of the perceptual encoder (31) and the side information source coder (32) to obtain an encoded HOA signal frame ($\tilde{B}(k-1)$).

10 10. The method according to one of the claims 7-9, wherein in the step of estimating (s161) for each of the frequency subbands the second set of directions ($M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$), the directions of a frequency subband are searched only among the directions ($M_{DIR}(k)$) of the full band HOA signal.

15 11. The method according to one of the claims 7-10, further comprising a step of determining a trajectory of an active direction, wherein an active direction is a direction of a sound source and wherein a trajectory is a temporal sequence of directions of a particular sound source.

20 12. The method according to one of the claims 7-11, wherein a truncated HOA representation is a HOA signal in which one or more coefficient sequences are set to zero.

13. An apparatus (50) for decoding a HOA signal, comprising

- an Extraction module (40) configured to extract from the compressed HOA representation a plurality of truncated HOA coefficient sequences ($\hat{z}_1(k), \dots, \hat{z}_l(k)$), an assignment vector ($v_{AMB, ASSIGN}(k)$) indicating or containing sequence indices of said truncated HOA coefficient sequences, subband related direction information ($M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$), a plurality of prediction matrices ($A(k+1, f_1), \dots, A(k+1, f_F)$), and gain control side information ($e_1(k), \beta_1(k), \dots, e_l(k), \beta_l(k)$), the Extraction module comprising a Perceptual Decoder (42) configured to perceptually decode (s42) the encoded truncated HOA coefficient sequences ($\tilde{z}_1(k), \dots, \tilde{z}_l(k)$) to obtain the truncated HOA coefficient sequences ($\hat{z}_1(k), \dots, \hat{z}_l(k)$);
- a Reconstruction module (51,52) configured to reconstruct a truncated HOA representation ($\hat{C}_T(k)$) from the plurality of truncated HOA coefficient sequences

($\hat{\mathbf{z}}_1(k), \dots, \hat{\mathbf{z}}_I(k)$), the gain control side information ($e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$) and the assignment vector ($\mathbf{v}_{\text{AMB,ASSIGN}}(k)$);

- an Analysis Filter bank module (53) configured to decompose the reconstructed truncated HOA representation ($\hat{\mathcal{C}}_T(k)$) into frequency subband representations ($\hat{\mathcal{C}}_T(k, f_1), \dots, \hat{\mathcal{C}}_T(k, f_F)$) for a plurality of F frequency subbands;
- at least one Directional Subband Synthesis module (54) configured to synthesize for each of the frequency subband representations a predicted directional HOA representation ($\hat{\mathcal{C}}_D(k, f_1), \dots, \hat{\mathcal{C}}_D(k, f_F)$) from the respective frequency subband representation ($\hat{\mathcal{C}}_T(k, f_1), \dots, \hat{\mathcal{C}}_T(k, f_F)$) of the reconstructed truncated HOA representation, the subband related direction information ($M_{\text{DIR}}(k+1, f_1), \dots, M_{\text{DIR}}(k+1, f_F)$) and the prediction matrices ($A(k+1, f_1), \dots, A(k+1, f_F)$);
- at least one Subband Composition module (55) configured to compose for each of the F frequency subbands a decoded subband HOA representation ($\hat{\mathcal{C}}(k, f_1), \dots, \hat{\mathcal{C}}(k, f_F)$) with coefficient sequences ($\hat{\mathbf{c}}_n(k, f_j)$, $n = 1, \dots, O$) that are either obtained from coefficient sequences of the truncated HOA representation ($\hat{\mathcal{C}}_T(k, f_j)$) if the coefficient sequence has an index n that is included in the assignment vector ($\mathbf{v}_{\text{AMB,ASSIGN}}(k)$), or otherwise obtained from coefficient sequences of the predicted directional HOA component ($\hat{\mathcal{C}}_D(k, f_j)$) provided by one of the Directional Subband Synthesis module (54); and
- a Synthesis Filter bank module (56) configured to synthesize the decoded subband HOA representations ($\hat{\mathcal{C}}(k, f_1), \dots, \hat{\mathcal{C}}(k, f_F)$) to obtain the decoded HOA representation ($\hat{\mathcal{C}}(k)$).

14. The apparatus according to claim 13, wherein the Extraction module (40) further comprises at least

- a Demultiplexer (41) for obtaining an encoded side information portion and a perceptually coded portion that comprises encoded truncated HOA coefficient sequences ($\check{\mathbf{z}}_1(k), \dots, \check{\mathbf{z}}_I(k)$); and
- a Side Information Source Decoder (43) configured to decode (s43) the encoded side information portion to obtain the subband related direction information ($M_{\text{DIR}}(k+1, f_1), \dots, M_{\text{DIR}}(k+1, f_F)$), prediction matrices ($A(k+1, f_1), \dots, A(k+1, f_F)$), gain control side information ($e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$) and assignment vector ($\mathbf{v}_{\text{AMB,ASSIGN}}(k)$).

15. The apparatus according to claim 13 or 14, wherein the Extraction module (40) obtains an encoded side information portion, further comprising a side information source decoder (43) configured to decode (s43) the encoded side information portion to obtain the subband related direction information ($M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$),
5 prediction matrices ($A(k+1, f_1), \dots, A(k+1, f_F)$), gain control side information ($e_1(k), \beta_1(k), \dots, e_I(k), \beta_I(k)$) and assignment vector ($v_{AMB, ASSIGN}(k)$).
16. The apparatus according to one of the claims 13-15, wherein the subband related direction information comprises a set of active directions ($M_{DIR}(k)$) and a tuple set
10 ($M_{DIR}(k+1, f_1), \dots, M_{DIR}(k+1, f_F)$) that comprises tuples of indices with a first and a second index, the second index being an index of an active direction within the set of active directions ($M_{DIR}(k)$) for a current frequency subband, and the first index being a trajectory index of the active direction, wherein a trajectory is a temporal sequence of directions of a particular sound source.
15
17. The apparatus according to one of the claims 13-16, wherein at least one frequency subband representation comprises a subband group of two or more frequency subbands.
20
18. The apparatus according to claim 17, wherein subband group configuration information is received or extracted from the compressed HOA representation, and the subband group configuration information is used to set up said Synthesis Filter banks (56).
25
19. An apparatus (10) for encoding frames of an input HOA signal having a given number of coefficient sequences, where each coefficient sequence has an index, comprising
 - a computation and determining module (11) configured to compute a truncated HOA representation ($C_T(k)$) having a reduced number of non-zero coefficient sequences, and further configured to determine a set of indices of active coefficient sequences ($I_{C, ACT}(k)$) included in the truncated HOA representation;
 - an Analysis Filter bank module (15) configured to divide the input HOA signal into a plurality of frequency subbands (f_1, \dots, f_F), wherein coefficient sequences $(\tilde{C}(k-1, k, f_1), \dots, \tilde{C}(k-1, k, f_F))$ of the frequency subbands are obtained;
 - a Direction Estimation module (16) configured to estimate from the input HOA signal a first set of candidate directions ($M_{DIR}(k)$), and further configured to estimate for each of the frequency subbands a second set of directions ($M_{DIR}(k, f_1),$
30
35

..., $M_{DIR}(k, f_F)$), wherein each element of the second set of directions is a tuple of indices with a first and a second index, the second index being an index of an active direction for a current frequency subband and the first index being a trajectory index of the active direction, wherein each active direction is also included in the first set of candidate directions ($M_{DIR}(k)$) of the input HOA signal;

- at least one Directional Subband Computation module (17) configured to compute, for each of the frequency subbands, directional subband signals $(\bar{X}(k - 1, k, f_1), \dots, \bar{X}(k - 1, k, f_F))$ from the coefficient sequences $(\bar{C}(k - 1, k, f_1), \dots, \bar{C}(k - 1, k, f_F))$ of the frequency subband according to the second set of directions ($M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$) of the respective frequency subband;

- at least one Directional Subband Prediction module (18) configured to calculate, for each of the frequency subbands, a prediction matrix $(A(k, f_1), \dots, A(k, f_F))$ adapted for predicting the directional subband signals $(\bar{X}(k - 1, k, f_1), \dots, \bar{X}(k - 1, k, f_F))$ from the coefficient sequences $(\bar{C}(k - 1, k, f_1), \dots, \bar{C}(k - 1, k, f_F))$ of the frequency subband using the set of indices of active coefficient sequences ($I_{C,ACT}(k)$) of the respective frequency subband; and

- encoding module (30) configured to encode the first set of candidate directions ($M_{DIR}(k)$), the second set of directions ($M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$), the prediction matrices $(A(k, f_1), \dots, A(k, f_F))$ and the truncated HOA representation ($C_T(k)$), wherein the encoding module (30) comprises a Perceptual Encoder (31) configured to encode the gain controlled truncated HOA representation ($C_T(k)$).

20. The apparatus according to claim 19, wherein at least one group of two or more subbands is created, and wherein the at least one group is used instead of a single subband and is treated in the same way as a single subband.

25. The apparatus according to claim 19 or 20, further comprising

- a partial decorrelator (12) configured to partially decorrelate the truncated HOA channel sequences;

- a Channel Assignment module (13) configured to assign the truncated HOA channel sequences $(y_1(k), \dots, y_l(k))$ to transport channels; and

- at least one Gain Control unit (14) configured to perform gain control on the transport channels, wherein gain control side information $(e_i(k - 1), \beta_i(k - 1))$ for each transport channel is generated;

30 and wherein the encoding module (30) comprises

35

- a Side Information Source Coder (32) configured to encode the gain control side information ($e_i(k - 1)$, $\beta_i(k - 1)$), the first set of candidate directions ($M_{DIR}(k)$), the second set of directions ($M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$) and the prediction matrices ($A(k, f_1), \dots, A(k, f_F)$); and

5 - a Multiplexer (33) configured to multiplex the outputs of the perceptual encoder (31) and the side information source coder (32) to obtain an encoded HOA signal frame ($\tilde{B}(k - 1)$).

22. The apparatus according to one of the claims 19-21, wherein the Direction Estimation
10 module (16), when estimating for each of the frequency subbands the second set of
directions ($M_{DIR}(k, f_1), \dots, M_{DIR}(k, f_F)$), searches the directions of a frequency subband
only among the directions ($M_{DIR}(k)$) of the full band HOA signal.

23. The apparatus according to one of the claims 19-22, further comprising a trajectory
15 determining module configured to determine a trajectory of an active direction,
wherein an active direction is a direction of a sound source and wherein a trajectory
is a temporal sequence of directions of a particular sound source.

24. The apparatus according to one of the claims 19-23, wherein a truncated HOA
20 representation is a HOA signal in which one or more coefficient sequences are set to
zero.

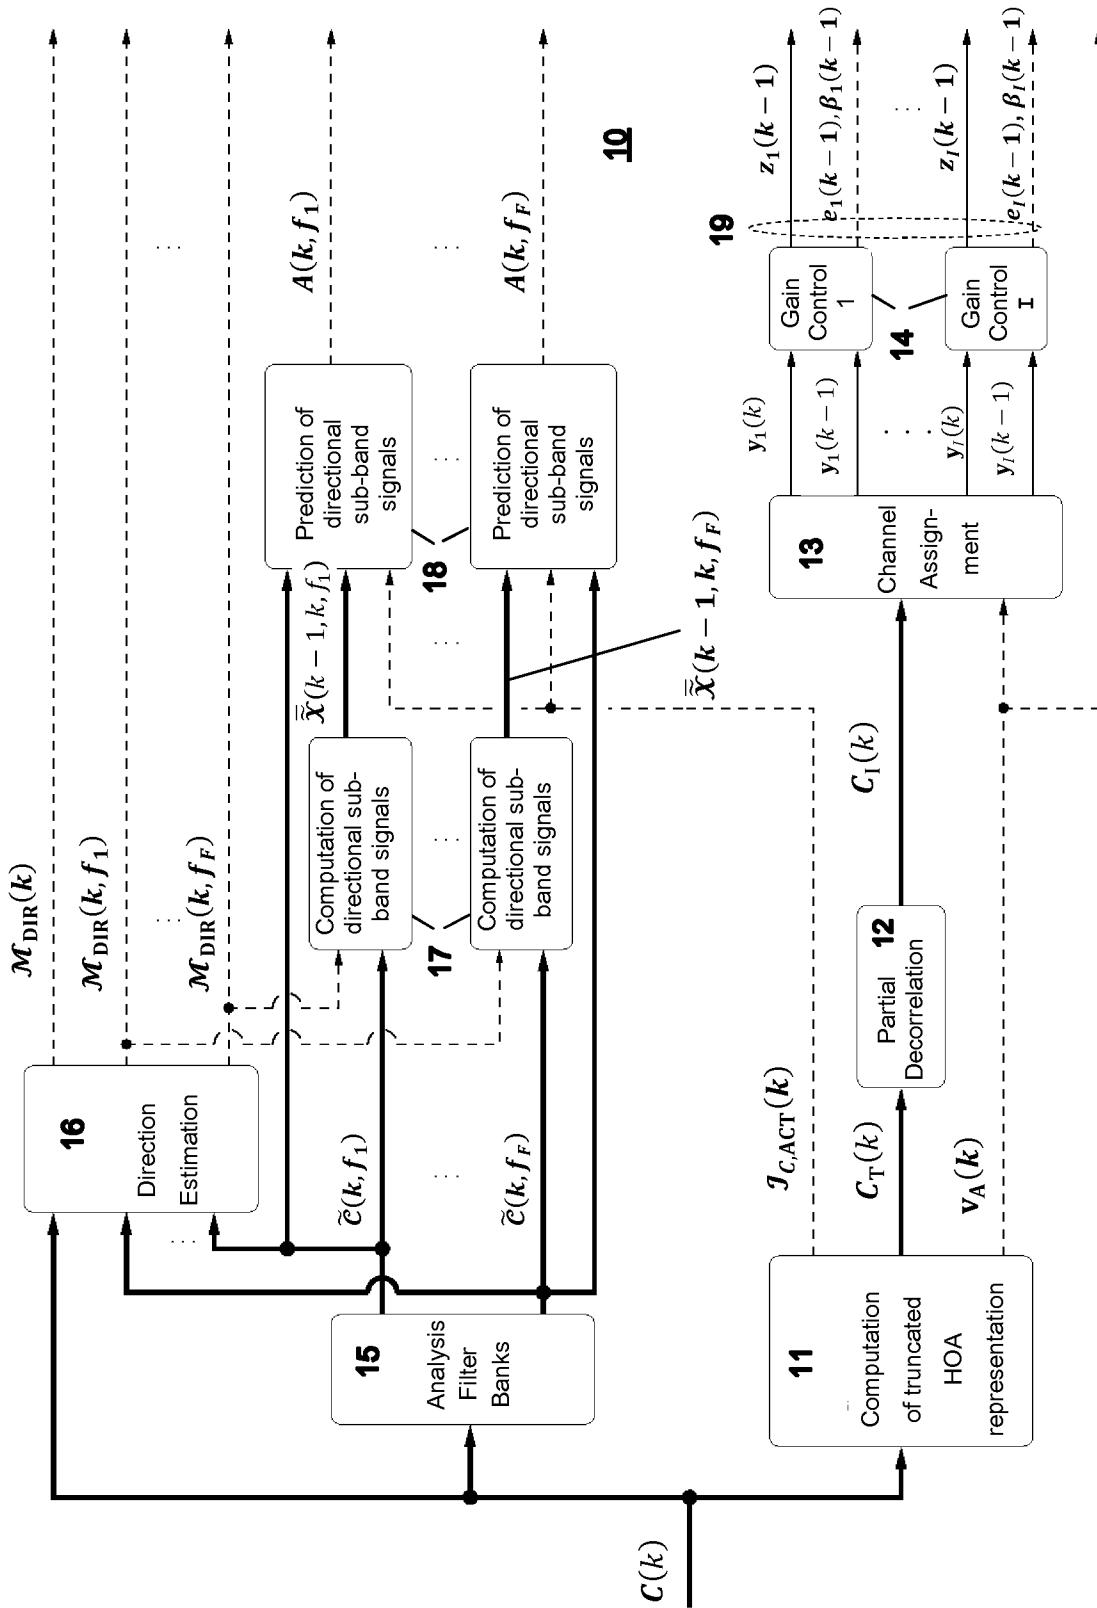


Fig.1

2/7

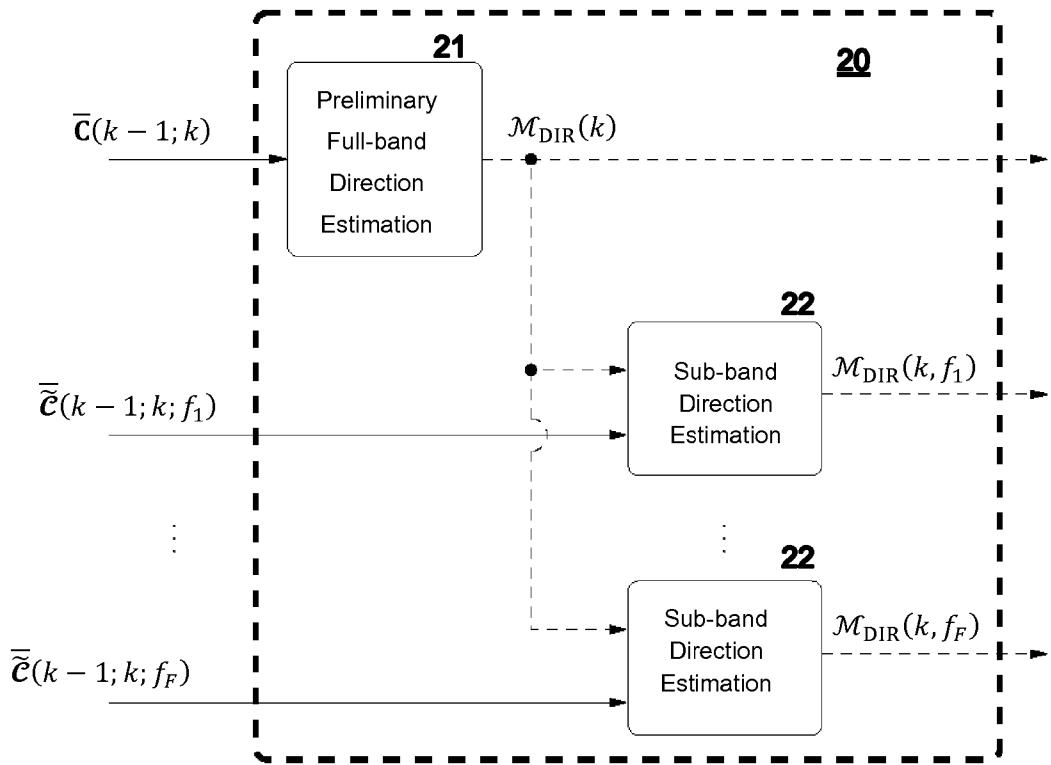


Fig.2

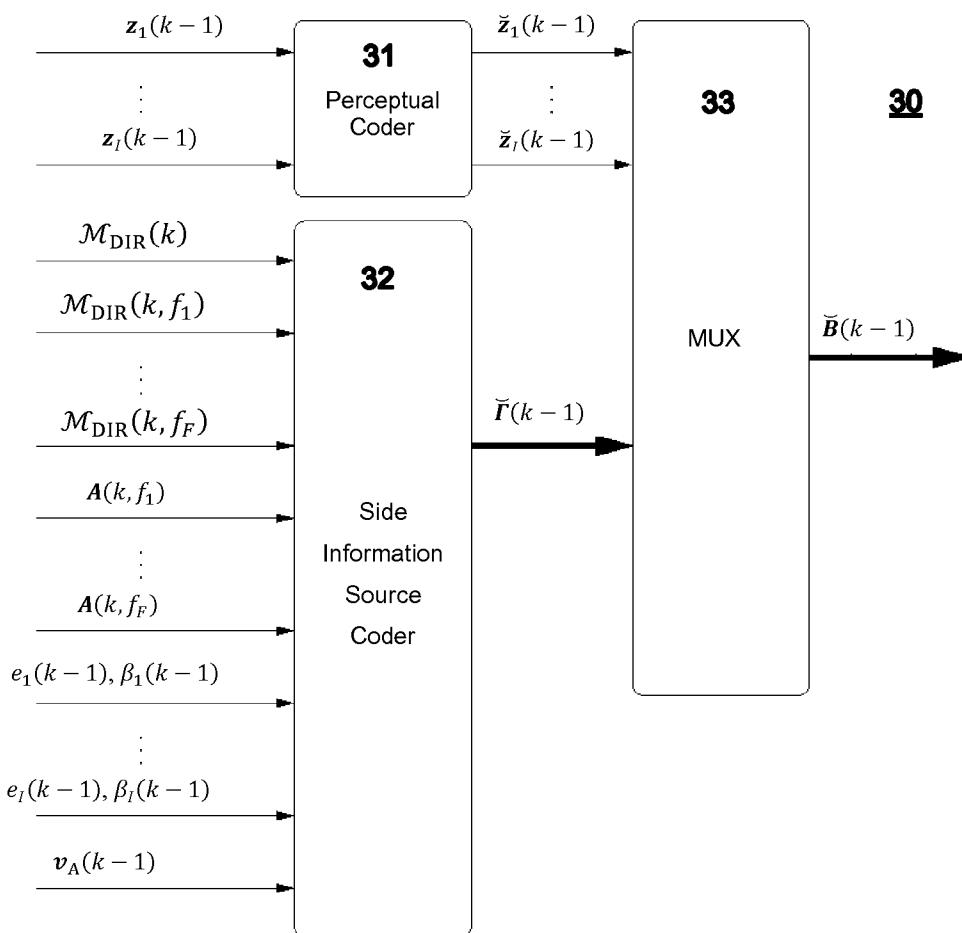


Fig.3

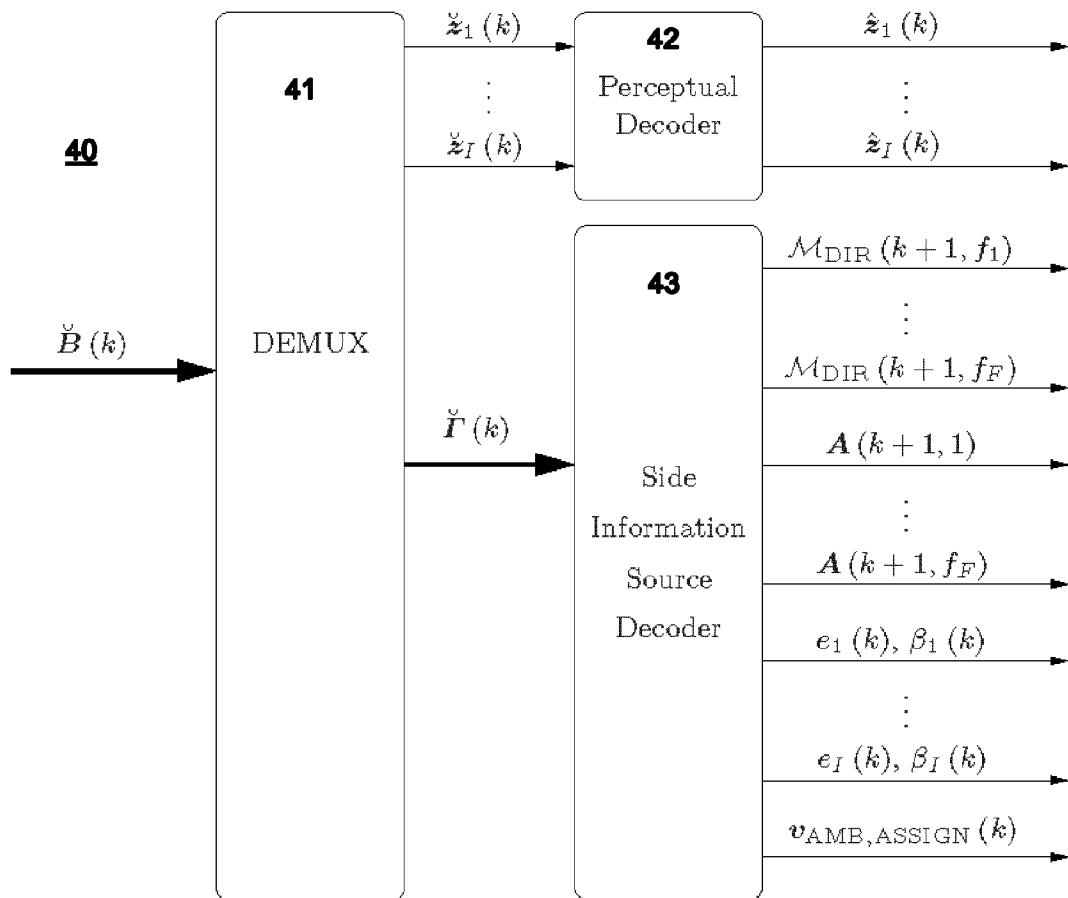
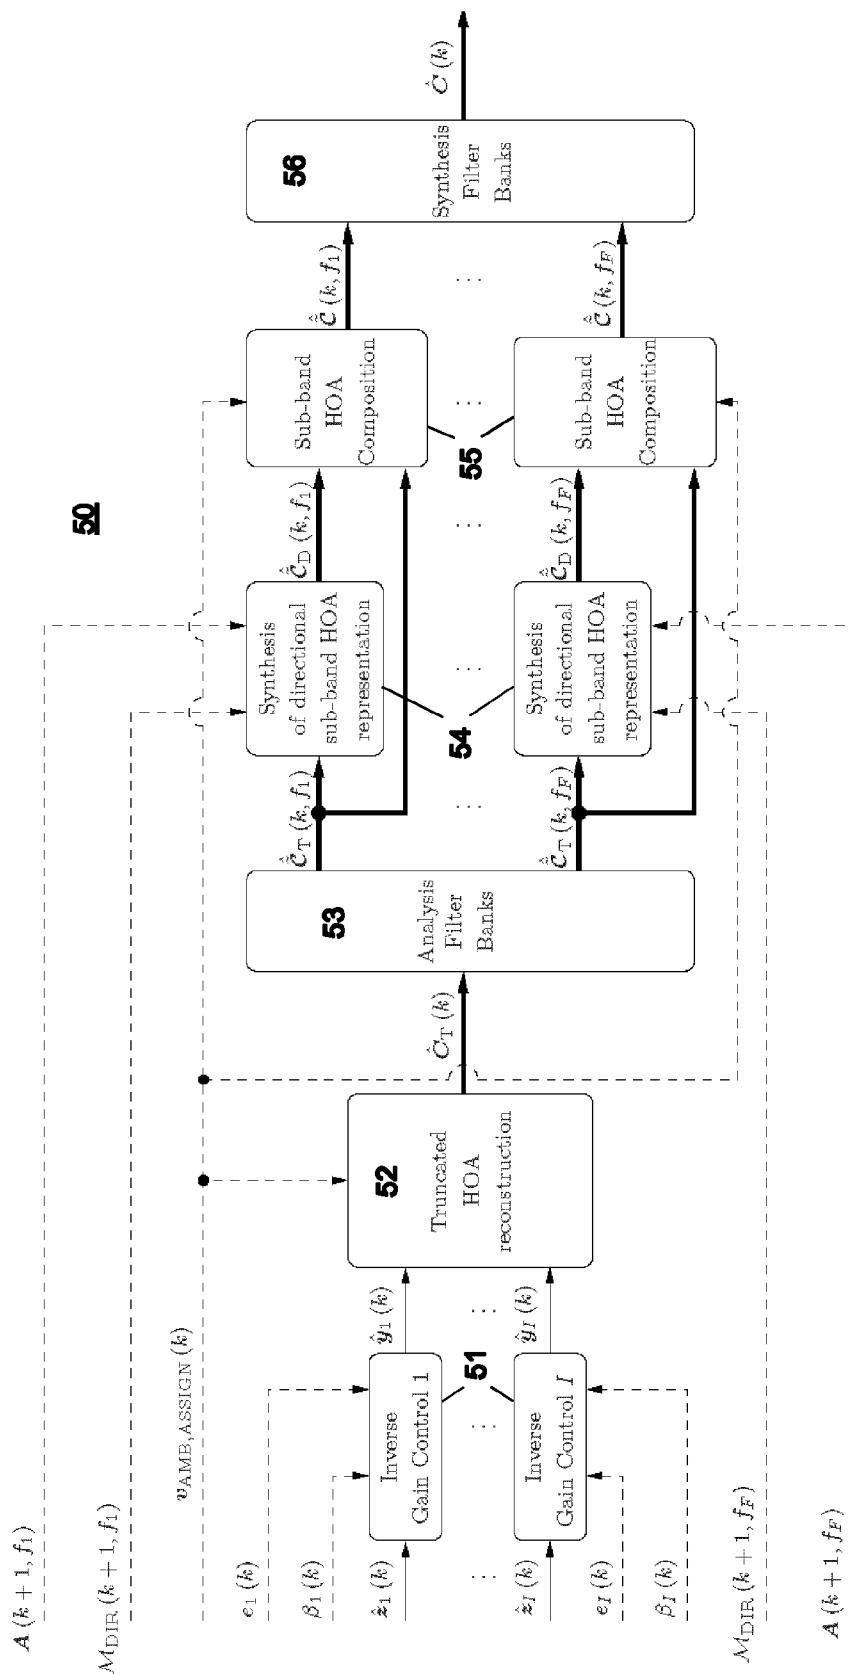


Fig.4

**Fig.5**

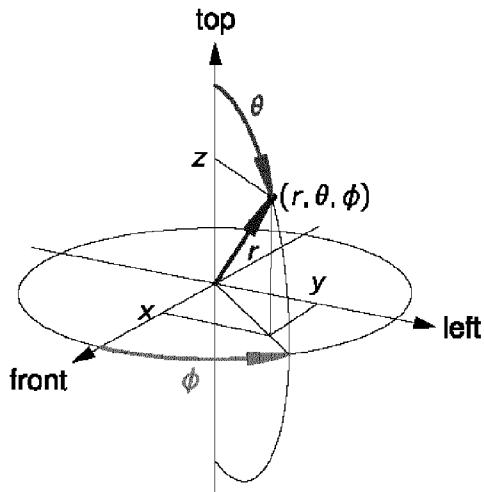


Fig.6


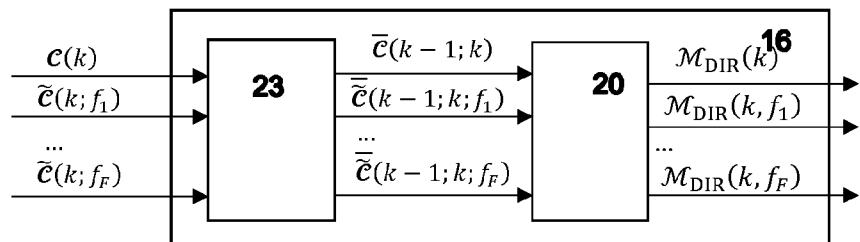


Fig.7

$$\mathbf{M}_{\text{DIR}}(\mathbf{k}) = \{\Omega_3, \Omega_8, \Omega_{52}, \Omega_{101}, \Omega_{229}, \Omega_{446}, \Omega_{581}\}$$

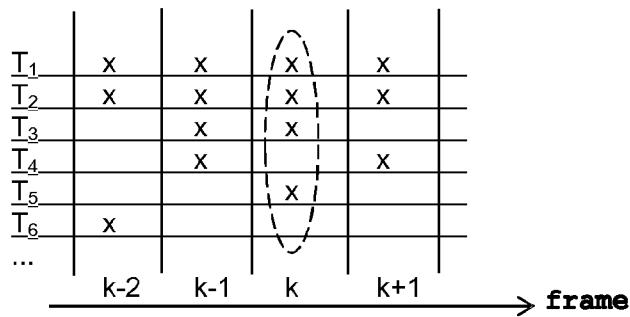

$$\mathbf{M}_{\text{DIR}}(\mathbf{k}, f_1) = \{(1, \Omega_{52}), (2, \Omega_{229}), (3, \Omega_3), (5, \Omega_{581})\}$$

$$\mathbf{M}_{\text{DIR}}(\mathbf{k}, f_2) = \{(1, \Omega_{52}), (2, \Omega_{229})\}$$

...

Fig.8

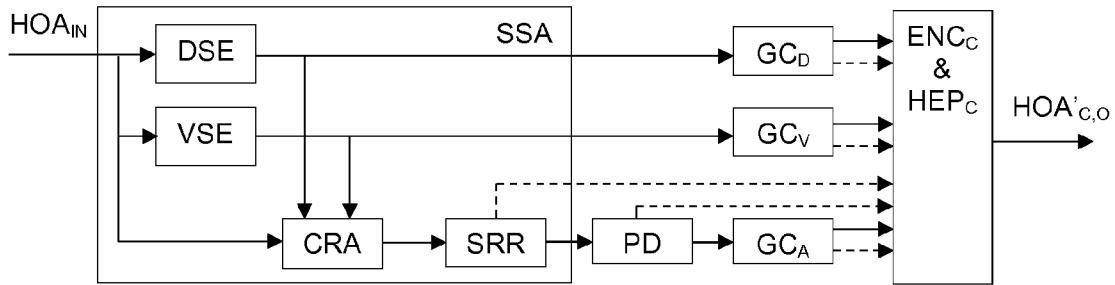


Fig.9

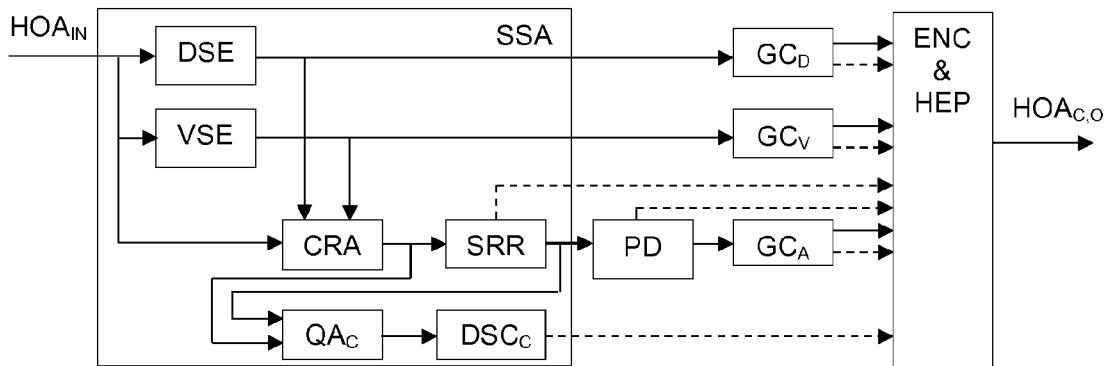


Fig.10

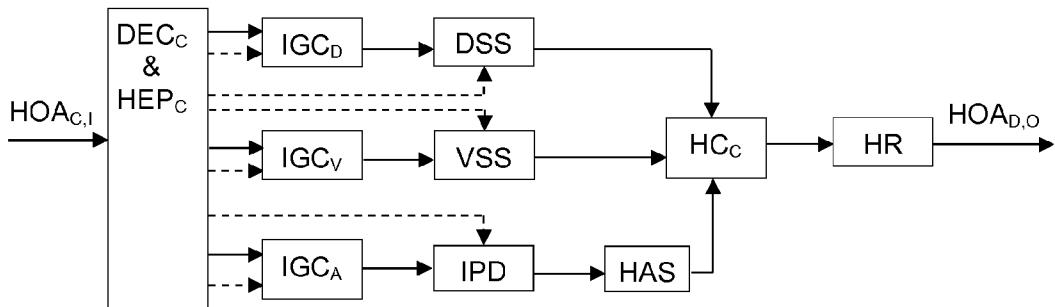


Fig.11

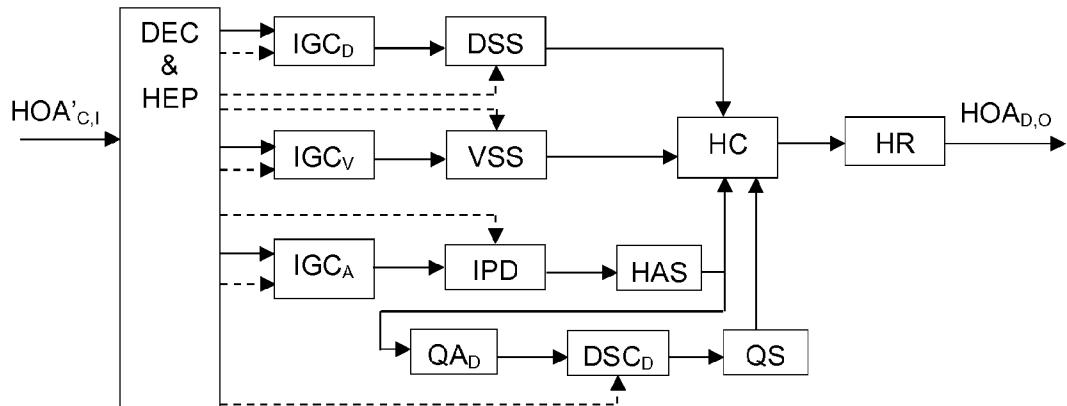


Fig.12

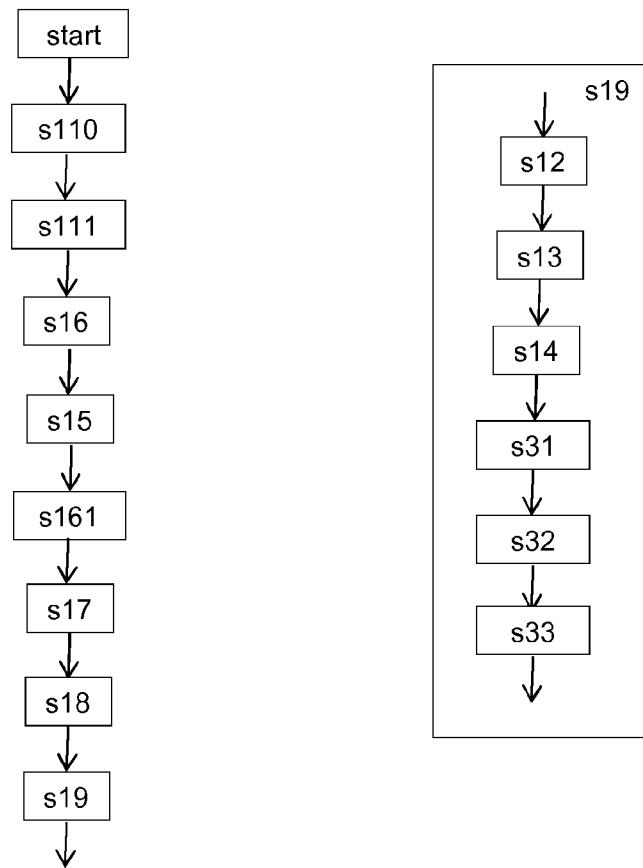


Fig.13

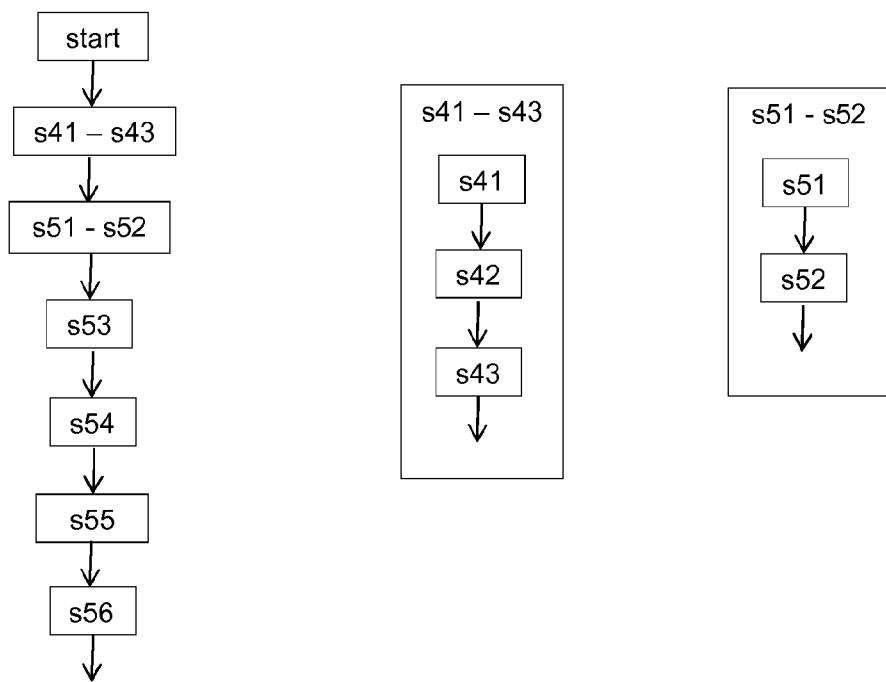


Fig.14

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2015/065089

A. CLASSIFICATION OF SUBJECT MATTER
INV. G10L19/008 H04S3/00
ADD. G10L19/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G10L H04S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, COMPENDEX, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X, P	JOHANNES BOEHM ET AL: "Detailed Technical Description of 3D Audio Phase 2 Reference Model 0 for HOA technologies", 110. MPEG MEETING; 20-10-2014 - 24-10-2014; STRASBOURG; (MOTION PICTURE EXPERT GROUP OR ISO/IEC JTC1/SC29/WG11), no. m35057, 19 October 2014 (2014-10-19), XP030063429, figures 17-21 -----	1-24
A	EP 2 743 922 A1 (THOMSON LICENSING [FR]) 18 June 2014 (2014-06-18) cited in the application figures 1a,1b -----	1-24
A	EP 2 665 208 A1 (THOMSON LICENSING [FR]) 20 November 2013 (2013-11-20) cited in the application figure 2 -----	1-24



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

2 September 2015

11/09/2015

Name and mailing address of the ISA/
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Chétry, Nicolas

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No
PCT/EP2015/065089

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
EP 2743922	A1 18-06-2014	CA	2891636 A1	19-06-2014
		CN	104854655 A	19-08-2015
		EP	2743922 A1	18-06-2014
		TW	201435858 A	16-09-2014
		WO	2014090660 A1	19-06-2014
EP 2665208	A1 20-11-2013	AU	2013261933 A1	13-11-2014
		CN	104285390 A	14-01-2015
		EP	2665208 A1	20-11-2013
		EP	2850753 A1	25-03-2015
		JP	2015520411 A	16-07-2015
		KR	20150010727 A	28-01-2015
		TW	201346890 A	16-11-2013
		US	2015098572 A1	09-04-2015
		WO	2013171083 A1	21-11-2013

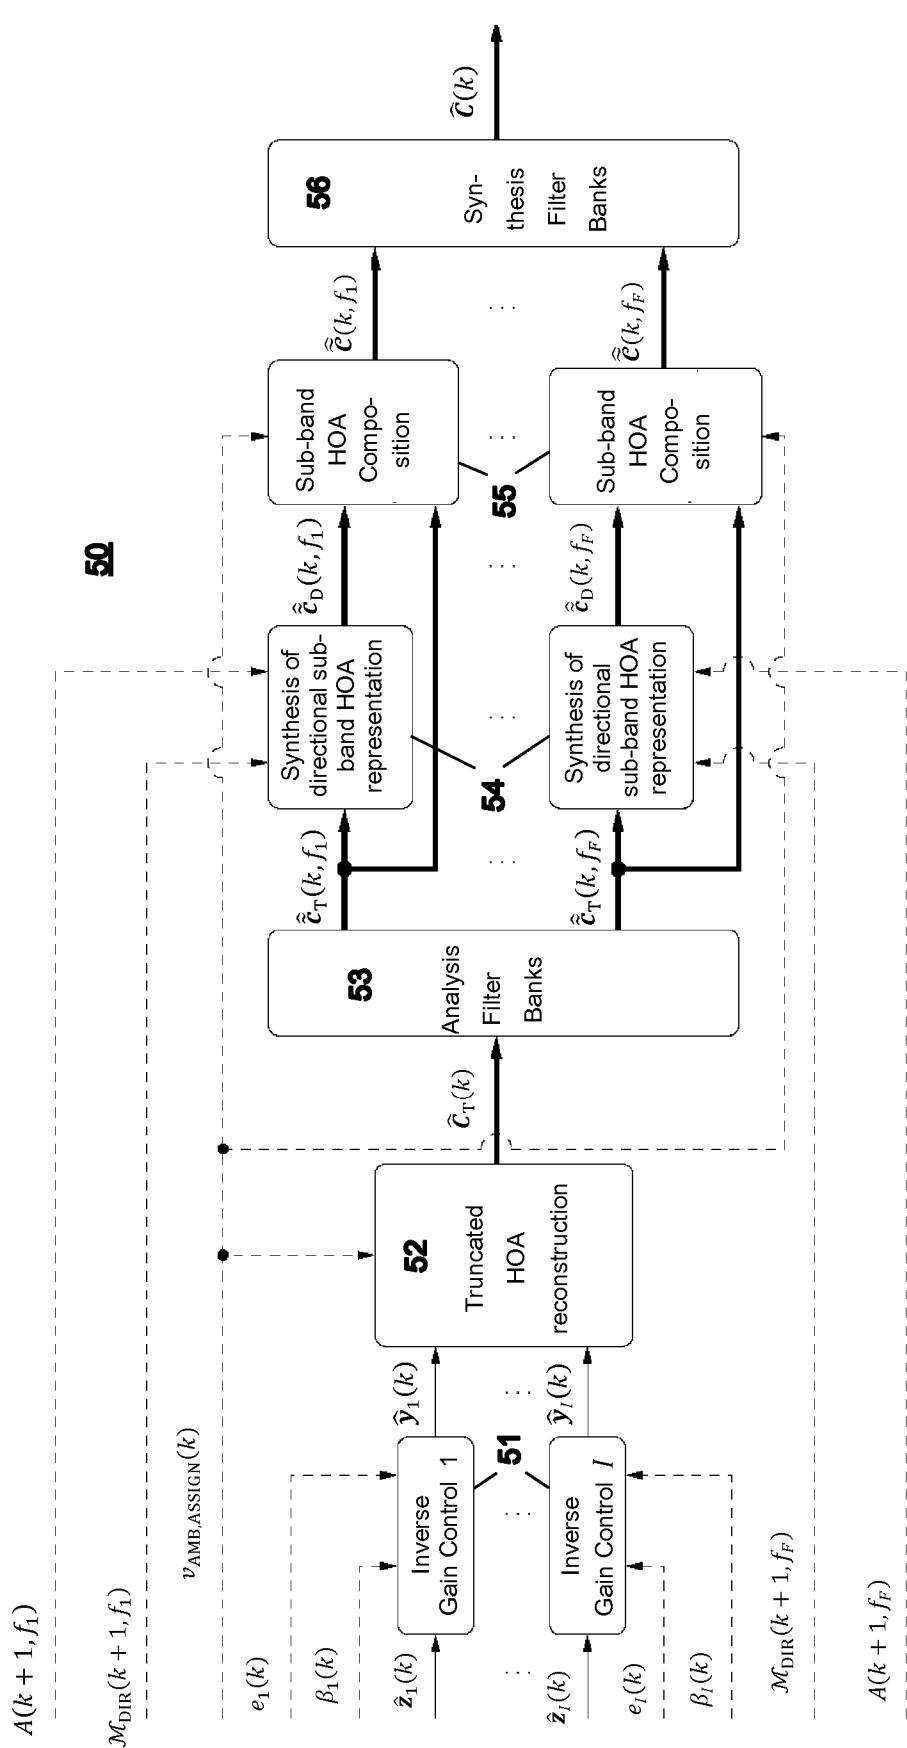


Fig.5