



- (51) **International Patent Classification:**
H02K 44/08 (2006.01) *H02K 44/10* (2006.01)
- (21) **International Application Number:**
PCT/US2013/071951
- (22) **International Filing Date:**
26 November 2013 (26.11.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** GE AVIATION SYSTEMS LLC [US/US];
3290 Patterson Avenue, Grand Rapids, Michigan 49512 (US).
- (72) **Inventor:** Engelhardt, Michel; GE Aviation, 1000 Macarthur Memorial Highway, Bohemia, New York 11716 (US).
- (74) **Agent:** Davis, Mark A.; 32 Market Avenue, SW, Suite 500, Grand Rapids, Michigan 49503 (US).
- (81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** GENERATOR FOR AN AIRCRAFT

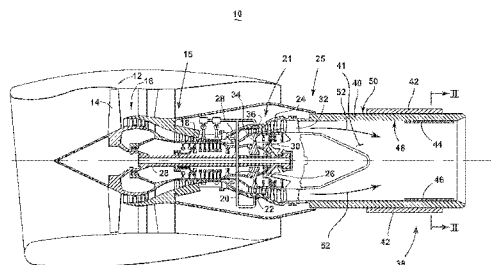


FIG. 1

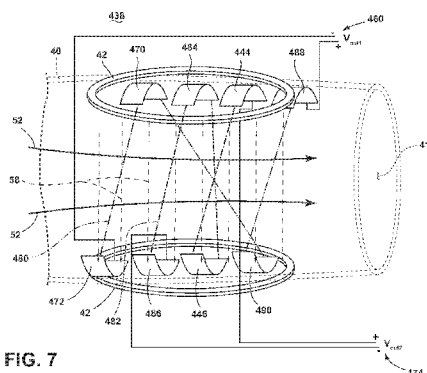


FIG. 7

(57) **Abstract:** An electrical generator for an aircraft includes a gas turbine engine having an exhaust section defining an exhaust cavity through which combustion exhaust gases are emitted in a direction defining an exhaust vector, and a magnetohydrodynamic generator having a magnetic field generator forming a magnetic field having at least some magnetic field lines perpendicular to the exhaust vector, and at least one electrode pair, comprising at least one positive electrode and at least one negative electrode, arranged relative to the exhaust section wherein movement of charged particles entrained in the exhaust gas along the exhaust vector generates a DC power output at the at least one electrode pair.

GENERATOR FOR AN AIRCRAFT

BACKGROUND OF THE INVENTION

[0001] Turbine engines, and particularly gas turbine engines, also known as combustion turbine engines, are rotary engines that extract energy from a flow of combusted gases passing through the engine onto a multitude of turbine blades. Gas turbine engines have been used for land and nautical locomotion and power generation, but are most commonly used for aeronautical applications such as for airplanes, including helicopters. In aircraft, gas turbine engines are used for propulsion of the aircraft.

[0002] Gas turbine engines also usually provide power for a number of different accessories such as generators, starter/generators, permanent magnet alternators (PMA), fuel pumps, and hydraulic pumps, e.g., equipment for functions needed on an aircraft other than propulsion. In aircraft, gas turbine engines typically provide mechanical power which a generator will convert into electrical energy needed to power accessories.

BRIEF DESCRIPTION OF THE INVENTION

[0003] An electrical generator for an aircraft includes a gas turbine engine having an exhaust section defining an exhaust cavity through which combustion exhaust gases are emitted in a direction defining an exhaust vector, and a magnetohydrodynamic generator having a magnetic field generator forming a magnetic field having at least some magnetic field lines perpendicular to the exhaust vector, and at least one electrode pair, comprising at least one positive electrode and at least one negative electrode, arranged relative to the exhaust section wherein movement of charged particles entrained in the exhaust gas along the exhaust vector generates a DC power output at the at least one electrode pair.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] In the drawings:

[0005] FIG. 1 is a schematic cross-sectional diagram of a gas turbine engine for an aircraft having a magnetohydrodynamic generator, in accordance with the first embodiment of the invention.

[0006] FIG. 2 is a partial sectional view taken along line 2-2 of FIG. 1 showing the axial assembly of the magnetohydrodynamic generator, in accordance with the first embodiment of the invention.

[0007] FIG. 3 is a schematic view illustrating the magnetic field lines and particle flow relative to the electrode location of the magnetohydrodynamic generator, in accordance with the first embodiment of the invention.

[0008] FIG. 4 is a schematic view illustrating the magnetic field lines and particle flow relative to the electrode location of the magnetohydrodynamic generator, in accordance with the second embodiment of the invention.

[0009] FIG. 5 is a schematic view illustrating the magnetic field lines and particle flow relative to the electrode location of the magnetohydrodynamic generator, in accordance with the third embodiment of the invention.

[0010] FIG. 6 is a schematic view illustrating the magnetic field lines and particle flow relative to the electrode location of the magnetohydrodynamic generator, in accordance with the fourth embodiment of the invention.

[0011] FIG. 7 is a schematic view illustrating the magnetic field lines and particle flow relative to the electrode location of the magnetohydrodynamic generator, in accordance with the fifth embodiment of the invention.

DESCRIPTION OF EMBODIMENTS OF THE INVENTION

[0012] The described embodiments of the present invention are directed to power extraction from an aircraft engine, and more particularly to an electrical power system architecture which enables production of electrical power from a turbine engine, preferably a gas turbine engine. It will be understood, however, that the invention is not so limited and has general application to electrical power system architectures in non-aircraft applications, such as other mobile applications and non-mobile industrial, commercial, and residential applications.

[0013] FIG. 1 is a schematic cross-sectional diagram of a gas turbine engine 10 for an aircraft with a magnetohydrodynamic (MHD) generator 38. The engine 10 includes, in downstream serial flow relationship, a fan section 12, a compressor section 15, a combustion section 20, a turbine section 21, and an exhaust section 25. The fan section 12 includes a fan 14, and the compressor section 15 includes a booster or low

pressure (LP) compressor 16, a high pressure (HP) compressor 18. The turbine section 21 comprises a HP turbine 22, and a LP turbine 24. The engine 10 may further include a HP shaft or spool 26 that drivingly connects the HP turbine 22 to the HP compressor 18 and a LP shaft or spool 28 that drivingly connects the LP turbine 24 to the LP compressor 16 and the fan 14. The HP turbine 22 includes an HP turbine rotor 30 having turbine blades 32 mounted at a periphery of the rotor 30. Blades 32 extend radially outwardly from blade platforms 34 to radially outer blade tips 36.

[0014] The exhaust section 25 may include an exhaust nozzle 40, which may further comprise an inner surface 48 and an outer surface 50, and the MHD generator 38. The inner surface 48 of the exhaust nozzle 40 defines an exhaust cavity 41. The MHD generator includes a magnetic field generating apparatus, for example, at least one energizable solenoid 42, electromagnet, or permanent magnet, and at least one positive electrode 44 and at least one negative electrode 46, defining an electrode pair. As shown, the solenoids 42 may be operably supported by and/or coupled with the outer surface 50 of the exhaust nozzle 40, while the electrodes 44, 46 may be operably supported by and/or coupled with the inner surface 48 of the nozzle 40. The electrodes 44, 46 are configured along the axial length of the exhaust nozzle 40, and shown positioned near the downstream rear of the nozzle 40. Alternative configurations are envisioned wherein any combination of the solenoids 42 and/or the electrodes 44, 46 are supported by and/or coupled with either the inner or outer surfaces 48, 50 of the exhaust nozzle 40. Other alternative configurations are envisioned; wherein, the solenoid 42 and/or the electrodes 44, 46 are supported by and/or coupled with alternative structural elements.

[0015] The gas turbine engine 10 operates such that the rotation of the fan 14 draws air into the HP compressor 18, which compresses the air and delivers the compressed air to the combustion section 20. In the combustion section 20, the compressed air is mixed with fuel, which for example, may include charged particles, and the air/fuel mixture is ignited, expanding and generating high temperature exhaust gases. The engine exhaust gases, which may still include the charged particles, traverse downstream, passing through the HP and LP turbines 22, 24, generating the mechanical force for driving the respective HP and LP spools 26, 28, where the exhaust gases are finally expelled from the rear of the engine 10 into the exhaust

cavity 41, in the direction indicated by an exhaust vector 52. As shown, the exhaust nozzle 40, exhaust cavity 41, and exhaust vector 52 extend along a substantially similar axial direction. In addition, charged particles may alternatively or additionally be introduced into the exhaust cavity 41 by, alternative components, for example, a spray nozzle or exhaust ring.

[0016] FIG. 2 illustrates the MHD generator 38 from an axial perspective along the exhaust nozzle 40. As shown, the positive electrode 44 extends along at least a portion of a first radial segment 54 of the exhaust nozzle 40 and the negative electrode 46 extends along at least a portion of a second radial segment 56 of the nozzle 40. Additionally, while electrodes 44, 46 are shown located on vertically-aligned, opposing sides of each other 44, 46, relative to the exhaust cavity 41, alternative configurations are envisioned wherein the opposing electrodes 44, 46 are aligned or offset from either a vertical or horizontal axis. Embodiments of the invention are also envisioned wherein the solenoids 42 are aligned or offset from either a vertical or horizontal axis.

[0017] FIG. 3 illustrates the operation of the MHD generator 38 from a perspective view. During operation, the solenoids 42 are energized to generate a magnetic field 58 through the exhaust cavity 41, which will be substantially perpendicular to the exhaust vector 52. As the charged particles entrained in the hot exhaust gases travel along the exhaust vector 52, relative to and/or through the magnetic field 58, the magnetic field 58 respectively attracts or repels the particles toward the respective electrodes 44, 46, and a DC voltage output 60 is generated across the electrode pair 44, 46. In the most basic description, the MHD generator 38 operates by moving a conductor (charged particles of the exhaust) through a magnetic field 58, to generate electrical current from the thermal and kinetic energy of the exhaust gases (collectively, the enthalpy from the exhaust gases). As the amount of current generated is mathematically related to the amount of charged particles in the exhaust gases, additives or ionic materials, such as carbon particles or potassium carbonate may be, for instance, included in the fuel or combustion to increase, decrease, and/or target a particular voltage output 60 for power applications. Additional additives and ionic materials are envisioned. The exhaust gases leaving the exhaust cavity 41 will have a lower temperature, and consequently, a higher gas density, after generating the

voltage output 60. The higher gas density results in a higher exhaust gas mass flow rate and, when coupled with the exhaust gas velocity 52, results in an increase in engine propulsion efficiency.

[0018] The voltage output 60 may, for instance, provide power to an electrically coupled DC load, the aircraft power system, or may be further coupled with an inverter/converter, which may modify the voltage output 60. Examples of modification of the voltage output 60 may include converting the output 60 to, for example, 270 VDC, or by inverting the output 60 to an AC power output, which may be further supplied to an AC load.

[0019] Alternative configurations of the electrodes 44, 46 are envisioned, for instance, where the electrodes 44, 46 are positioned more upstream or downstream of the exhaust section 25. Additional configurations of the electrodes 44, 46 and solenoids 42 are also envisioned such that positive and negative electrode 44, 46 positions are reversed, and/or the solenoids 42 are configured to generate a magnetic field 58 opposite to that shown.

[0020] FIG. 4 illustrates an alternative MHD generator 138 according to a second embodiment of the invention. The second embodiment is similar to the first embodiment; therefore, like parts will be identified with like numerals increased by 100, with it being understood that the description of the like parts of the first embodiment applies to the second embodiment, unless otherwise noted. A difference between the first embodiment and the second embodiment is that the MHD generator 138 includes a second set of positive and negative electrodes 170, 172 positioned axially along the exhaust nozzle 40, such that the second pair of electrodes 170, 172 generate a second voltage output 174 during operation of the MHD generator 138. Alternatively, it is envisioned that each electrode pair 44, 46, 170, 172 may be axially offset from each other, and/or may be electrically connected in series to generate a larger, single, voltage output. Additionally, it is envisioned that each electrode pair 44, 46, 170, 172 may have a different physical configuration (e.g. longer, shorter, and/or radial segment) than one or more other electrodes 44, 46, 170, 172. Additional electrode pairs may be included to generate any number of different voltage outputs, as needed.

[0021] FIG. 5 illustrates an alternative MHD generator 238 according to a third embodiment of the invention. The third embodiment is similar to the first and second embodiments; therefore, like parts will be identified with like numerals increased by 200, with it being understood that the description of the like parts of the first and second embodiments applies to the third embodiment, unless otherwise noted. A difference of the third embodiment is that the positive electrodes 244, 270 of the MHD generator 238 each extend along a larger ring-like portion of a first radial segment 254 of the exhaust nozzle 40 than in the first embodiment, and the negative electrodes 246, 272 each extends along a larger ring-like portion of a second radial segment 256 of the nozzle 40 than in the first embodiment. Additionally, each of the electrodes 272, 270, 246, 244 are electrically connected in series by conductors 280, which may extend along the inner surface 48, outer surface 50, or integrated with the exhaust nozzle 40, such that the MHD generator 238 generates a single voltage output 260. It is envisioned that each electrode 244, 246, 270, 272 may have a different physical configuration (e.g. longer, shorter, and/or radial segment 254, 256) than one or more other electrodes 244, 246, 270, 272.

[0022] FIG. 6 illustrates an alternative MHD generator 338 according to a fourth embodiment of the invention. The fourth embodiment is similar to the first, second, and third embodiments; therefore, like parts will be identified with like numerals increased by 300, with it being understood that the description of the like parts of the first, second, and third embodiments applies to the fourth embodiment, unless otherwise noted. A difference of the fourth embodiment is that the first set of series-connected electrodes 272, 270, 246, 244 are interweaved with a second set of similar series-connected electrodes 386, 384, 390, 388, connected by a second conductor 382, such that the first set of series-connected electrodes 272, 270, 246, 244 and the second set of series-connected electrodes 386, 384, 390, 388 generate a respective first voltage output 260 and a second voltage output 374.

[0023] FIG. 7 illustrates an alternative MHD generator 438 according to a fifth embodiment of the invention. The fifth embodiment is similar to the first, second, third, and fourth embodiments; therefore, like parts will be identified with like numerals increased by 400, with it being understood that the description of the like parts of the first, second, third, and fourth embodiments applies to the fifth

embodiment, unless otherwise noted. A difference of the fifth embodiment is the alternative series connection of the first set of electrodes 472, 470, 490, 488, coupled via the first conductor 480 and generating a first voltage output 460, and the series connection of the second set of electrodes 486, 484, 446, 444, coupled via the second conductor 482 and generating a second voltage output 474. Another difference of the fifth embodiment is that the second set of electrodes 486, 484, 446, 444 are flanked on either axial end by an electrode pair of the first set of electrodes 472, 470, 490, 488.

[0024] Many other possible embodiments and configurations in addition to that shown in the above figures are contemplated by the present disclosure. For example, additional permutations of electrode configurations are envisioned. In another example, one or more of the electrodes, electrode pairs, or electrode rings may be diagonally offset relative to the exhaust vector, or perpendicular to the exhaust vector. Additionally, the design and placement of the various components may be rearranged such that a number of different in-line configurations could be realized.

[0025] The embodiments disclosed herein provide a MHD generator integrated with a gas turbine engine. One advantage that may be realized in the above embodiments is that the above described embodiments are capable of generating and/or converting exhaust gas enthalpy into electricity for power electronics. This increases the efficiency of the overall electrical generating efficiency of the turbine engine. Additionally, the increase in electrical generation efficiency may allow for a reduction in weight and size over conventional type aircraft generators. Alternatively, the electricity generation of the MHD generator may provide for redundant electrical power for the aircraft, improving the aircraft power system reliability.

[0026] Another advantage that may be realized in the above embodiments is that the conversion of the exhaust gas enthalpy into electricity lowers the exhaust gas temperature, which increases the exhaust gas density. The increase gas density results in an increase in momentum, and thus, an increase in the propulsion efficiency of the gas turbine engine. An increase in the propulsion efficiency may result in improved operating or fuel efficiency for the aircraft.

[0027] When designing aircraft components, important factors to address are size, weight, and reliability. The above described MHD generators will be able to provide regulated AC or DC outputs with minimal power conversion equipment, making the

complete system inherently more reliable. This results in a lower weight, smaller sized, increased performance, and increased reliability system. Reduced weight and size correlate to competitive advantages during flight.

[0028] To the extent not already described, the different features and structures of the various embodiments may be used in combination with each other as desired. That one feature may not be illustrated in all of the embodiments is not meant to be construed that it may not be, but is done for brevity of description. Thus, the various features of the different embodiments may be mixed and matched as desired to form new embodiments, whether or not the new embodiments are expressly described. All combinations or permutations of features described herein are covered by this disclosure. The primary differences among the exemplary embodiments relate to the configuration of the electrode pairs, and these features may be combined in any suitable manner to modify the above described embodiments and create other embodiments.

[0029] This written description uses examples to disclose the invention, including the best mode, and also to enable any person skilled in the art to practice the invention, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they have structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal languages of the claims.

CLAIMS

What is claimed is:

1. An electrical generator for an aircraft, comprising:
a gas turbine engine having an exhaust section defining an exhaust cavity through which combustion exhaust gases are emitted in a direction defining an exhaust vector; and
a magnetohydrodynamic generator having a magnetic field generator forming a magnetic field having at least some magnetic field lines perpendicular to the exhaust vector, and at least one electrode pair, comprising at least one positive electrode and at least one negative electrode, arranged relative to the exhaust cavity wherein movement of charged particles entrained in the exhaust gas along the exhaust vector generates a DC power output at the at least one electrode pair.
2. The generator of claim 1 wherein the magnetic field generator further comprises at least one solenoid configured to generate the magnetic field.
3. The generator of claim 1 further comprising an inverter/converter configured to modify the DC power output.
4. The generator of claim 3 wherein the inverter/converter inverts the DC power output.
5. The generator of claim 1 wherein the at least one electrode pair is diagonally offset relative to the exhaust vector.
6. The generator of claim 1 wherein the at least one electrode pair is axially spaced relative to the exhaust vector.
7. The generator of claim 6 wherein the at least one positive electrode and the at least one negative electrode are located oppositely to each other relative to the exhaust cavity.
8. The generator of claim 6 comprising multiple electrode pairs.

9. The generator of claim 8 wherein the multiple electrode pairs generate multiple DC power outputs.

10. The generator of claim 9 further comprising at least some series-connected electrode pairs axially alternated with at least a second electrode pair.


11. The generator of claim 9 further comprising at least a first series-connected electrode pair set axially separated by at least a second series-connected electrode pair set.

12. The generator of claim 6 wherein the at least one positive electrode comprises at least one partial positive electrode ring extending along a first radial segment along the exhaust section and the at least one negative electrode comprises at least one partial negative electrode ring extending along a second radial segment along the exhaust section, and wherein the at least one positive electrode ring and the at least one negative electrode ring define an electrode ring pair.

13. The generator of claim 12 further comprising multiple electrode ring pairs configured along an axial length of the exhaust section, and wherein at least a portion of the electrode ring pairs are configured in series to generate at least one DC power output.

14. The generator of claim 6 wherein the at least one electrode ring pair are diagonally offset relative to the exhaust vector.

15. The generator of claim 1 wherein the exhaust section further comprises an inner surface and an outer surface and the at least one electrode pair is supported on at least one of the inner surface or the outer surface.

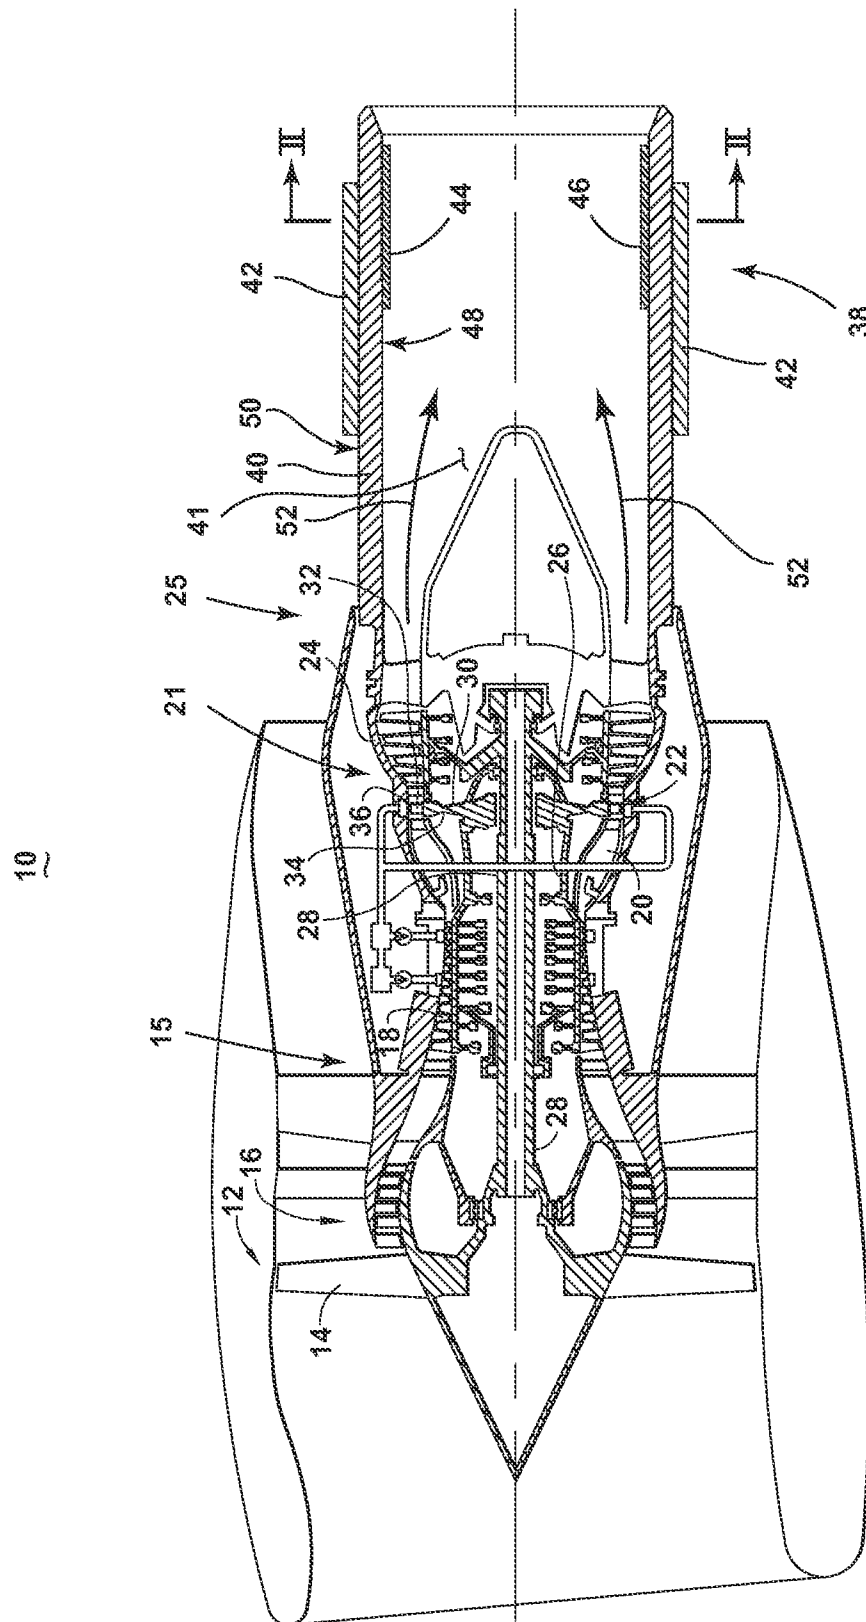



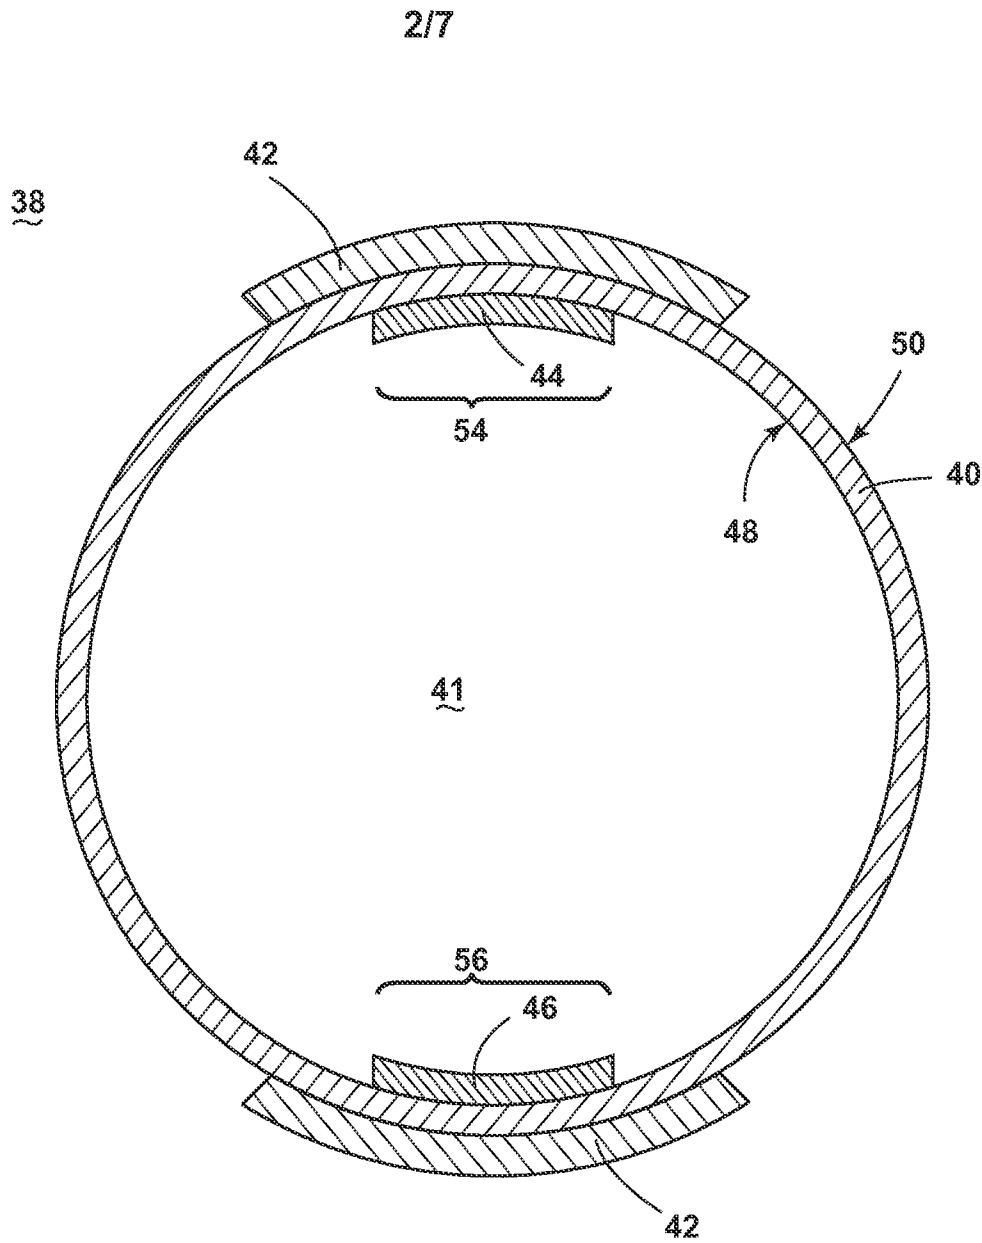
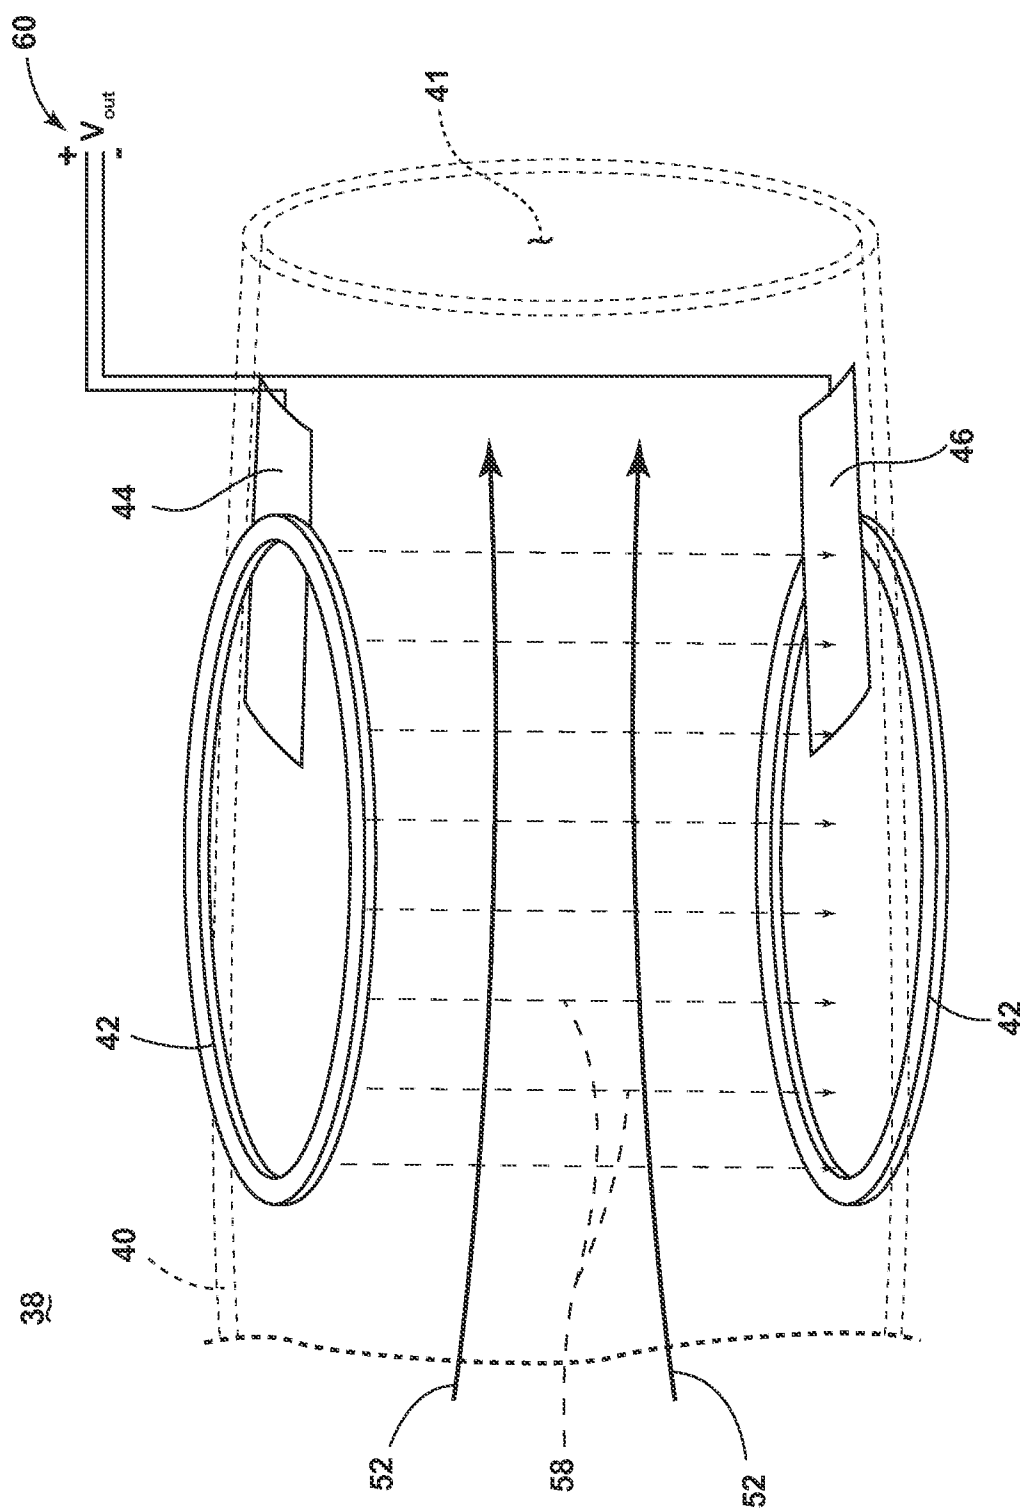


FIG. 2

3/7



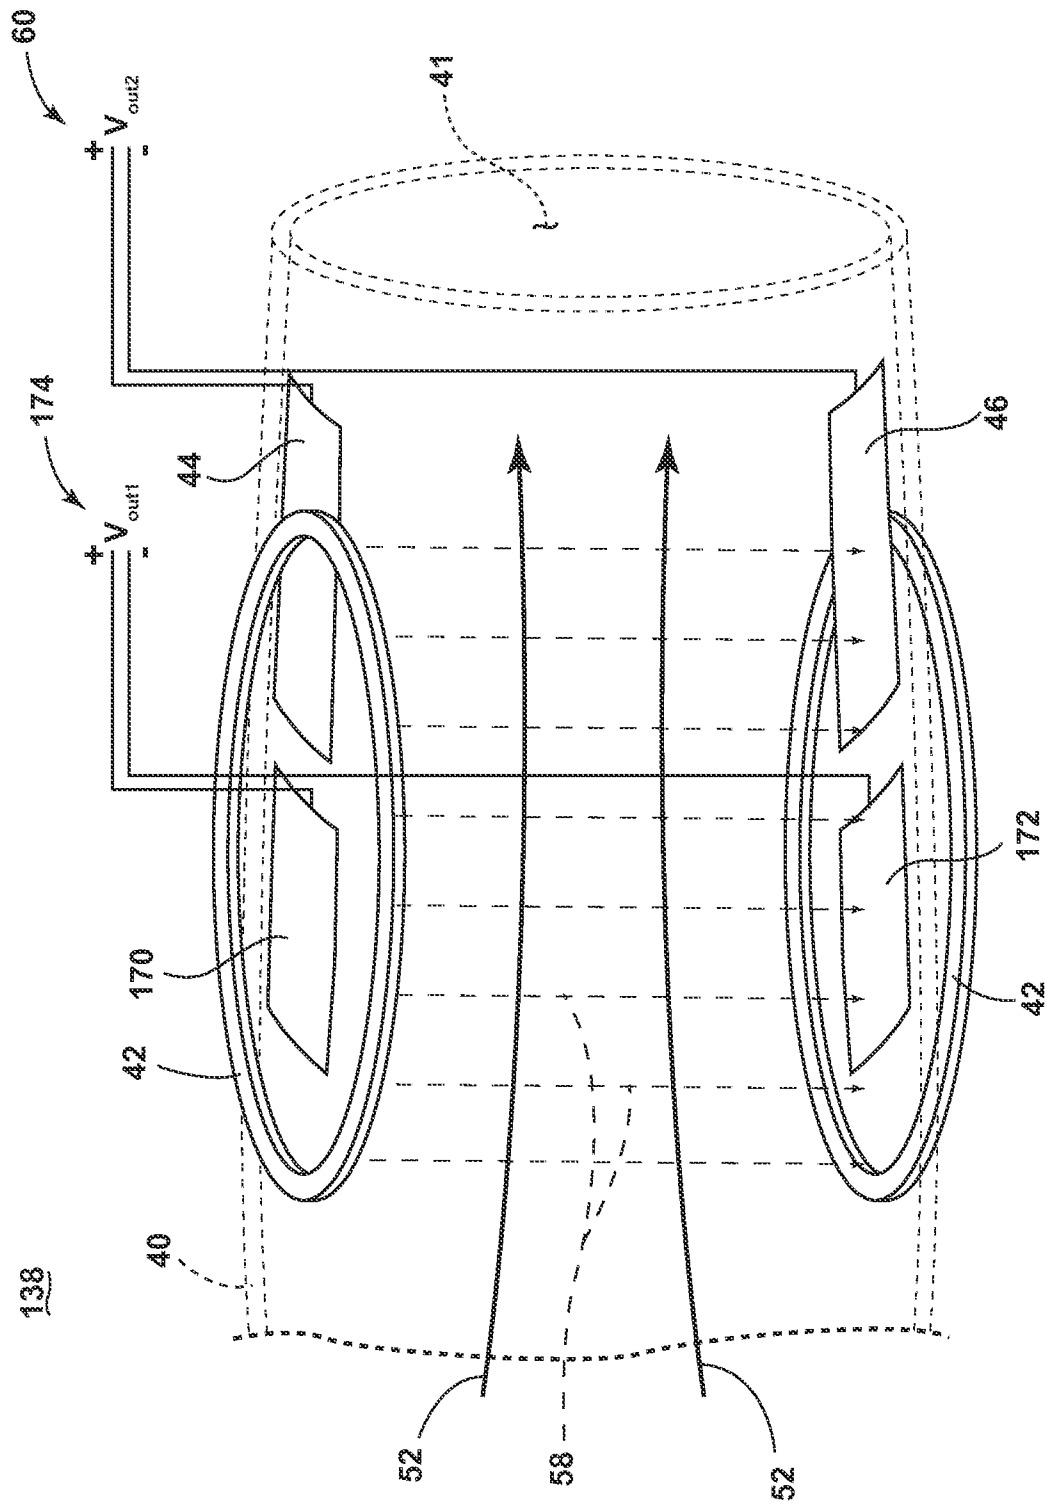


FIG. 4

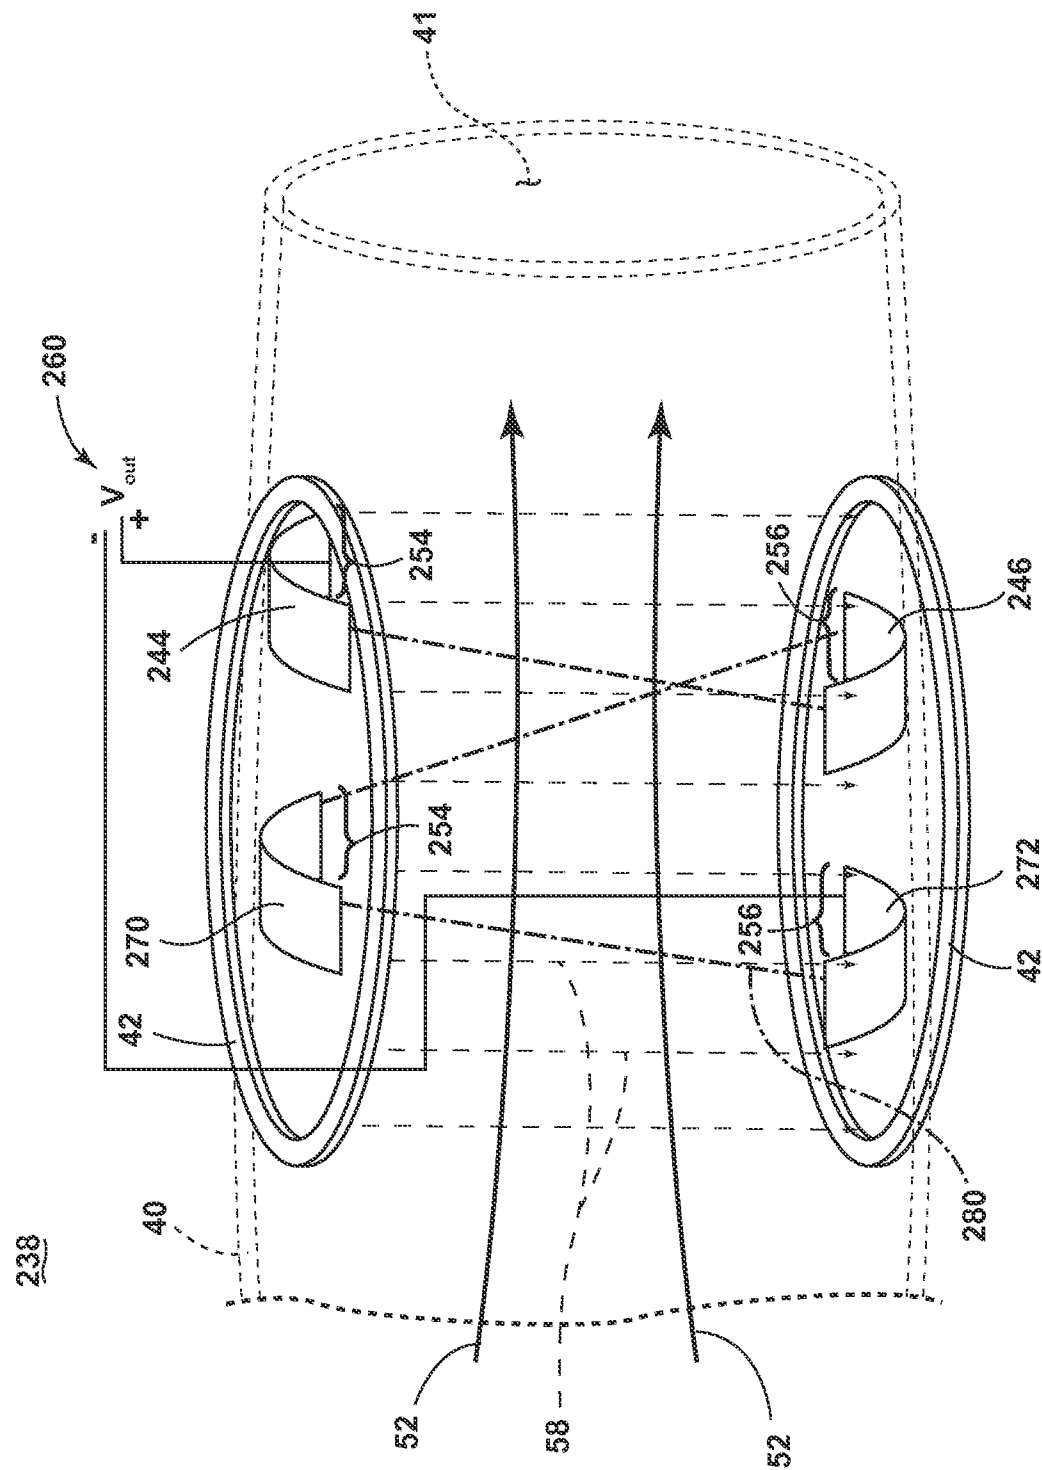


FIG. 5

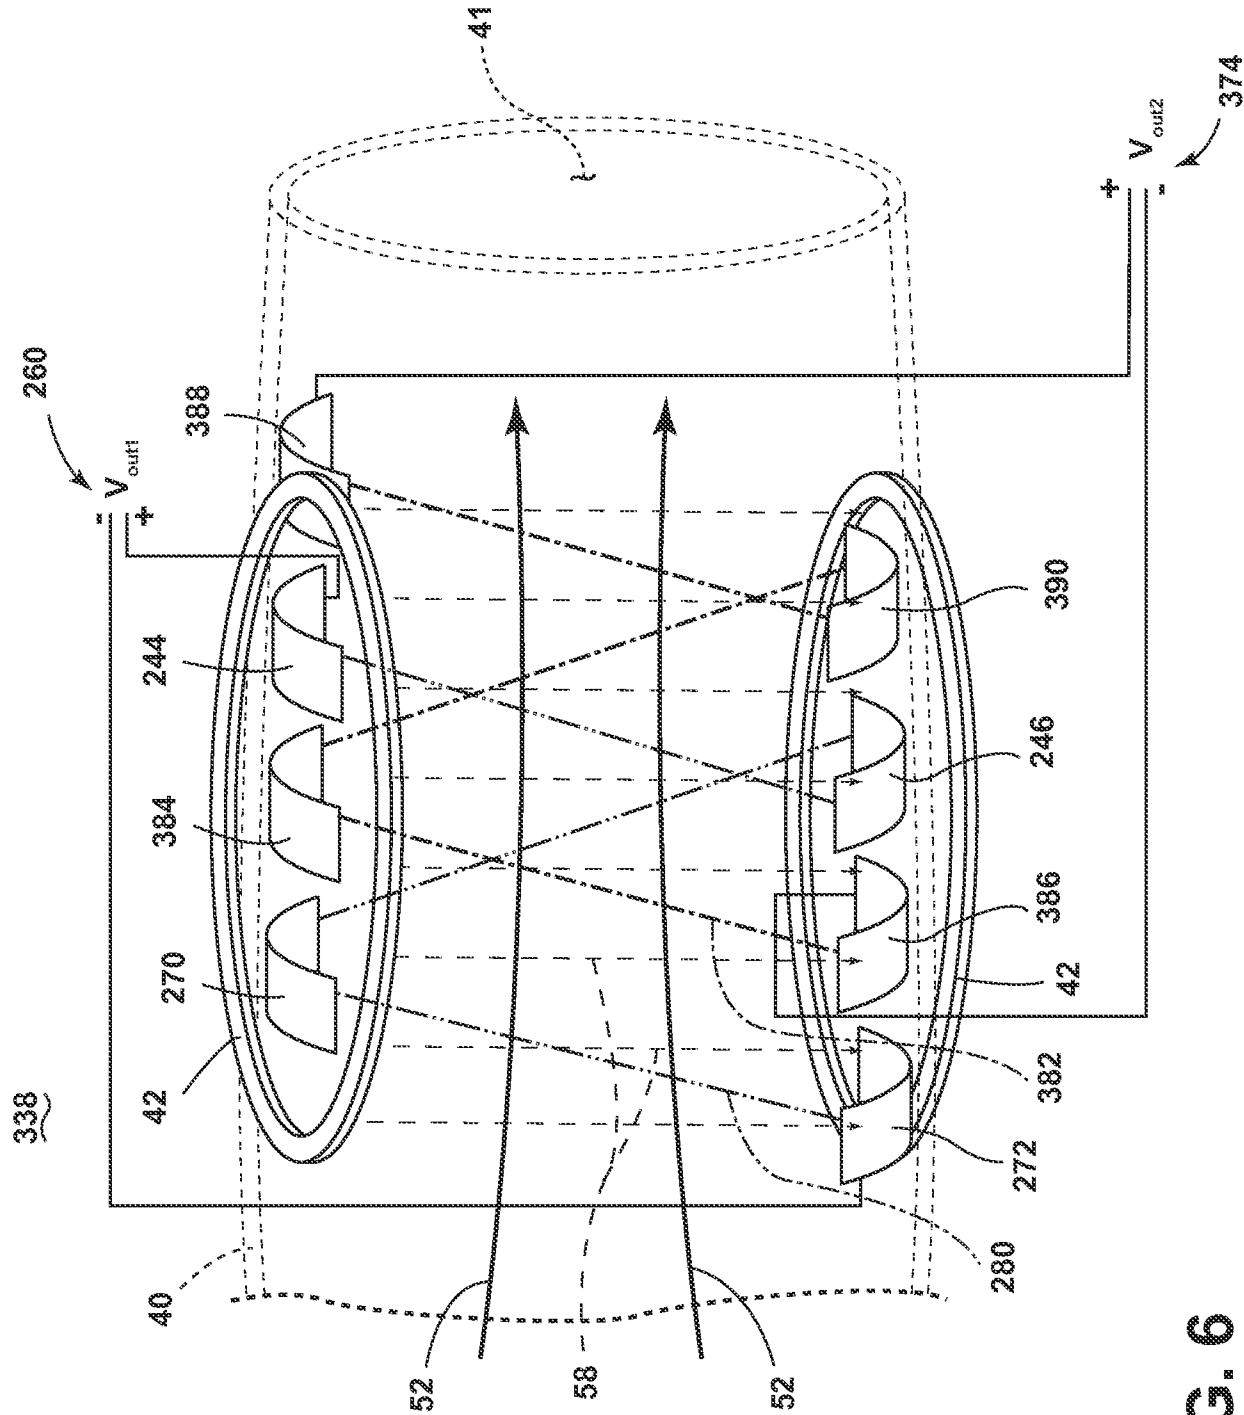


FIG. 6

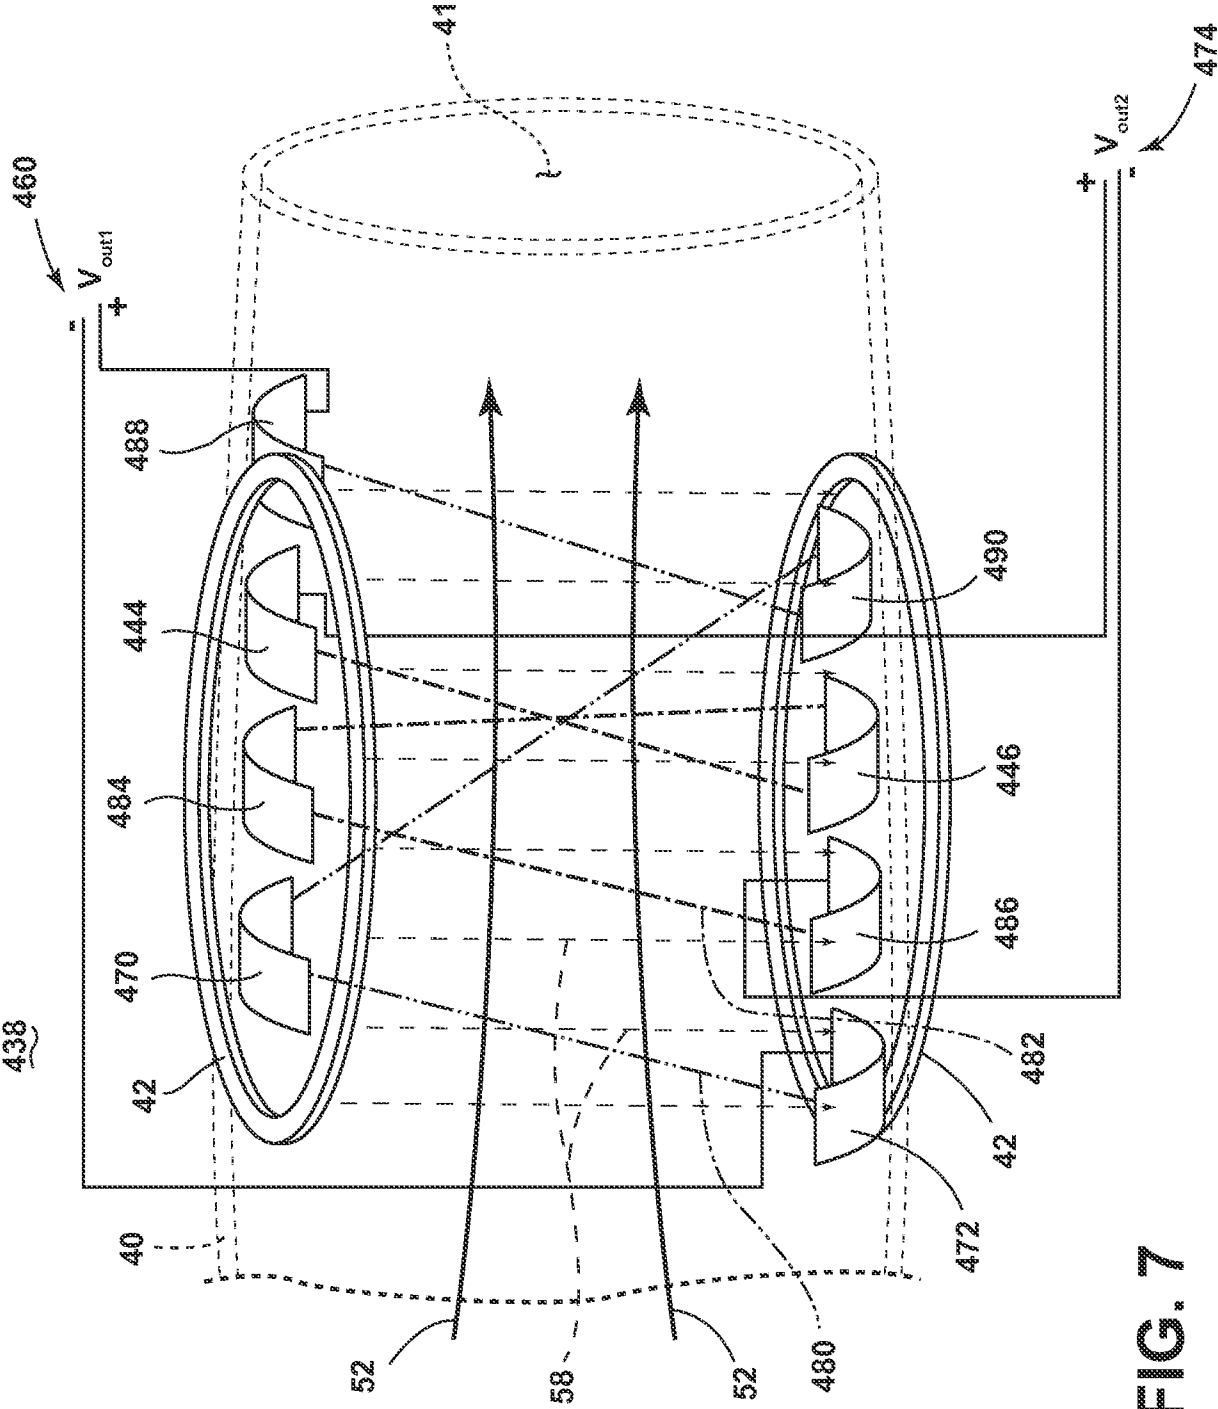


FIG. 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/071951

A. CLASSIFICATION OF SUBJECT MATTER
INV. H02K44/08 H02K44/10
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H02K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 678 306 A (GARNIER MICHEL ROBERT ET AL) 18 July 1972 (1972-07-18)	1,2,15
Y	column 1, lines 1-2; column 2, lines 18-37; column 3, lines 22-32, column 3, lines 55-58; figures 1-3	3-5
X	US 3 940 640 A (PETTY STANLEY W ET AL) 24 February 1976 (1976-02-24)	1,6-9
Y	column 2, lines 3-24 and lines 58-62; column 4, lines 63-68; figure 1	10-14
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 July 2014

Date of mailing of the international search report

31/07/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Fernandez, Victor

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2013/071951

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 254 934 A (CARABETTA RALPH A [US] ET AL) 19 October 1993 (1993-10-19) column 3, lines 8-10 and lines 16-19; column 4, lines 15-19; column 6, lines 6-10; figures 1-3 -----	3,4
Y	GB 1 125 408 A (ELECTRICITE DE FRANCE) 28 August 1968 (1968-08-28) page 1, lines 43-51 and lines 76-87; figures 2, 5-7 -----	5
Y	GB 891 215 A (BBC BROWN BOVERI & CIE) 14 March 1962 (1962-03-14) page 1, line 71 - page 2, line 4; figures 2,4 -----	10,11,13
Y	US 3 360 666 A (GEORGES KLEIN) 26 December 1967 (1967-12-26) column 6, lines 21-23; figure 9 -----	12-14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/071951

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3678306	A	18-07-1972	DE 2101919 A1 22-07-1971
			FR 2085190 A1 24-12-1971
			GB 1341241 A 19-12-1973
			US 3678306 A 18-07-1972

US 3940640	A	24-02-1976	NONE

US 5254934	A	19-10-1993	DE 4302222 A1 29-07-1993
			FR 2689334 A1 01-10-1993
			GB 2263702 A 04-08-1993
			IT 1263464 B 05-08-1996
			JP H0646557 A 18-02-1994
			US 5254934 A 19-10-1993

GB 1125408	A	28-08-1968	BE 677214 A 01-08-1966
			CH 457600 A 15-06-1968
			DE 1513767 A1 15-01-1970
			FR 1435972 A 22-04-1966
			GB 1125408 A 28-08-1968

GB 891215	A	14-03-1962	NONE

US 3360666	A	26-12-1967	CH 415813 A 30-06-1966
			FR 1335094 A 16-08-1963
			GB 1048474 A 16-11-1966
			US 3360666 A 26-12-1967
