



US009024834B1

(12) **United States Patent**
ElSallal et al.

(10) **Patent No.:** US 9,024,834 B1
(45) **Date of Patent:** May 5, 2015

(54) **ULTRA WIDE BAND BALANCED ANTIPODAL TAPERED SLOT ANTENNA AND ARRAY WITH EDGE TREATMENT**

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,836,976	A *	9/1974	Monser et al.	343/795
5,227,808	A *	7/1993	Davis	343/915
5,309,165	A *	5/1994	Segal et al.	343/770
5,557,291	A *	9/1996	Chu et al.	343/725
5,786,792	A *	7/1998	Bellus et al.	343/770
6,552,691	B2 *	4/2003	Mohuchy et al.	343/770
7,088,300	B2 *	8/2006	Fisher	343/767
8,466,846	B1 *	6/2013	Elsallal et al.	343/770
2007/0171140	A1 *	7/2007	Minard et al.	343/770
2008/0211726	A1 *	9/2008	Elsallal et al.	343/770

(71) Applicants: **Modhwajih A. ElSallal**, Acton, MA (US); **John C. Mather**, Cedar Rapids, IA (US); **Lee M. Paulsen**, Cedar Rapids, IA (US); **James B. West**, Cedar Rapids, IA (US)

(72) Inventors: **Modhwajih A. ElSallal**, Acton, MA (US); **John C. Mather**, Cedar Rapids, IA (US); **Lee M. Paulsen**, Cedar Rapids, IA (US); **James B. West**, Cedar Rapids, IA (US)

(73) Assignee: **Rockwell Collins, Inc.**, Cedar Rapids, IA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **13/898,123**

(22) Filed: **May 20, 2013**

Related U.S. Application Data

(62) Division of application No. 12/893,585, filed on Sep. 29, 2010, now Pat. No. 8,466,846.

(51) **Int. Cl.**
H01Q 1/42 (2006.01)
H01Q 13/10 (2006.01)
H01Q 21/24 (2006.01)
H01Q 1/38 (2006.01)

(52) **U.S. Cl.**
CPC . *H01Q 21/24* (2013.01); *H01Q 1/38* (2013.01)

(58) **Field of Classification Search**
None
See application file for complete search history.

OTHER PUBLICATIONS

“Balanced antipodal Vivaidi antenna for wide bandwidth phased arrays”, J.D.S Langley, IEE, vol. 141, No. 2, Apr. 1996, pp. 97-102.*

* cited by examiner


Primary Examiner — Trinh Dinh

(74) *Attorney, Agent, or Firm* — Angel N. Gerdzhikov; Donna P. Suchy; Daniel M. Barbieri

(57) **ABSTRACT**

The present disclosure is directed to a dual-polarized antenna array including a first BAVA, a second BAVA and a cradle assembly. The cradle assembly includes first, second and third U-channel modules connected via first and second frame portions. The first U-channel module, the second U-channel module, and the first frame portion receive first, second and third edge portions of a substrate of the first BAVA, respectively. The second U-channel module, the third U-channel module, and the second frame portion receive first, second and third edge portions of a substrate of the second BAVA, respectively. When received within the cradle assembly, the substrate of the first BAVA is oriented perpendicular to the substrate of the second BAVA. The first BAVA is a vertical polarization input and the second BAVA is a horizontal polarization input.

8 Claims, 17 Drawing Sheets

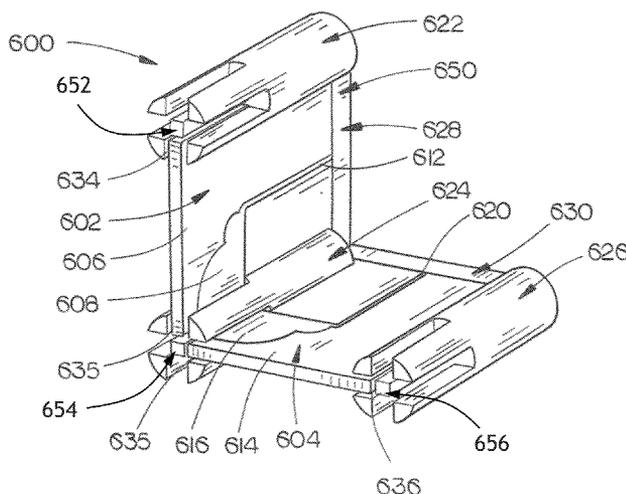

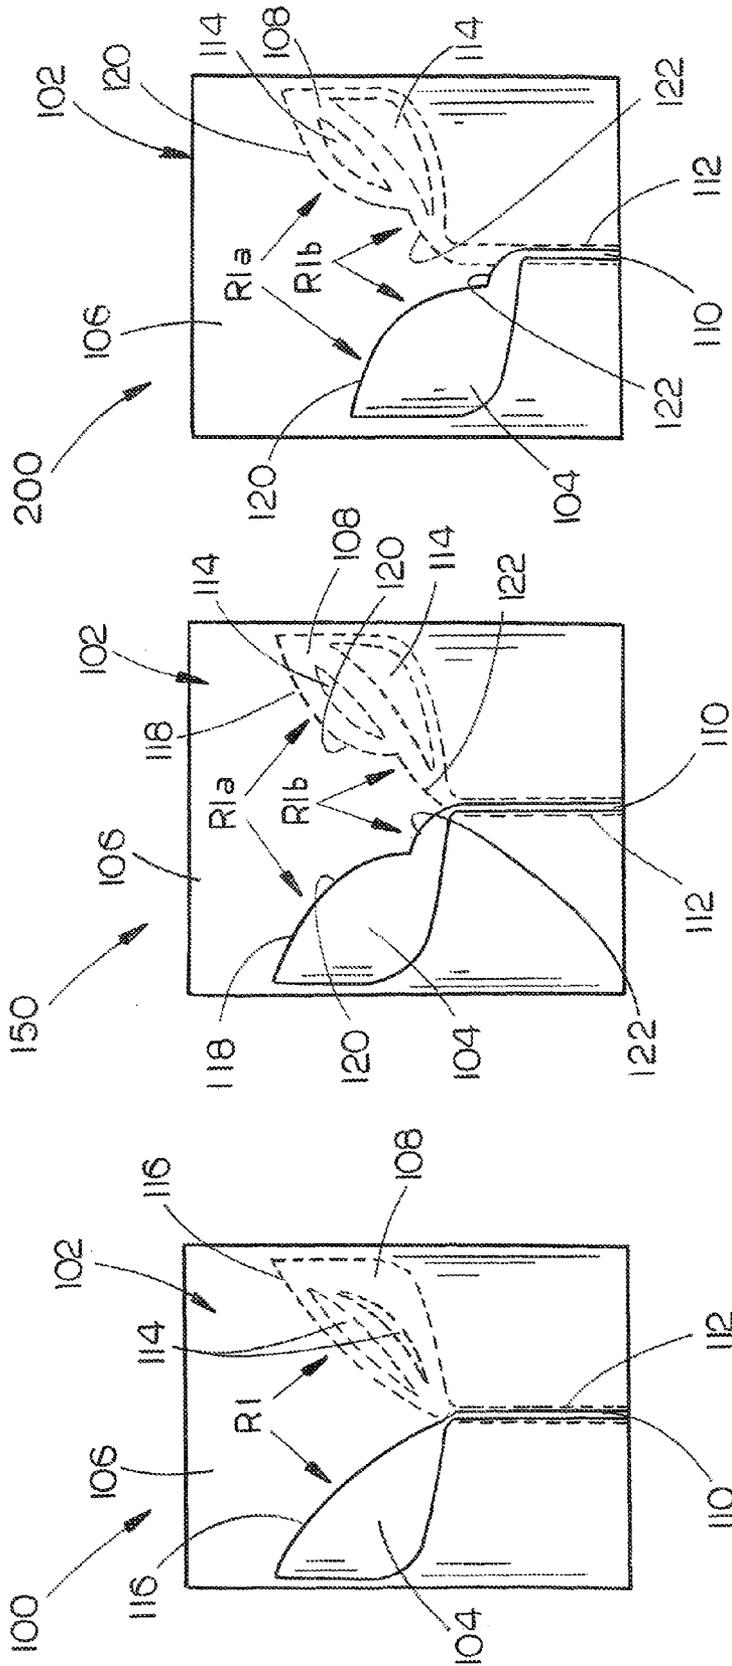


FIG. 3

FIG. 2

FIG. 1

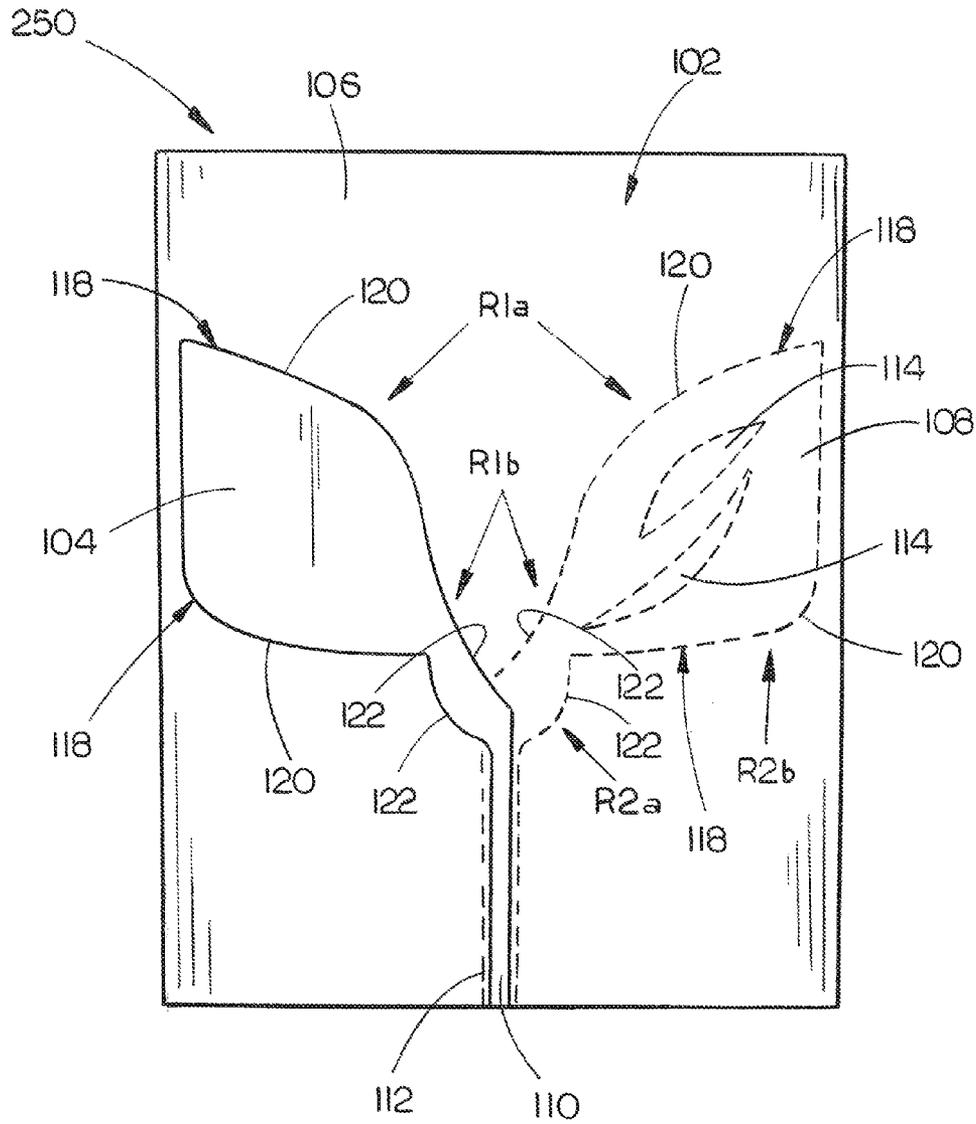


FIG. 4

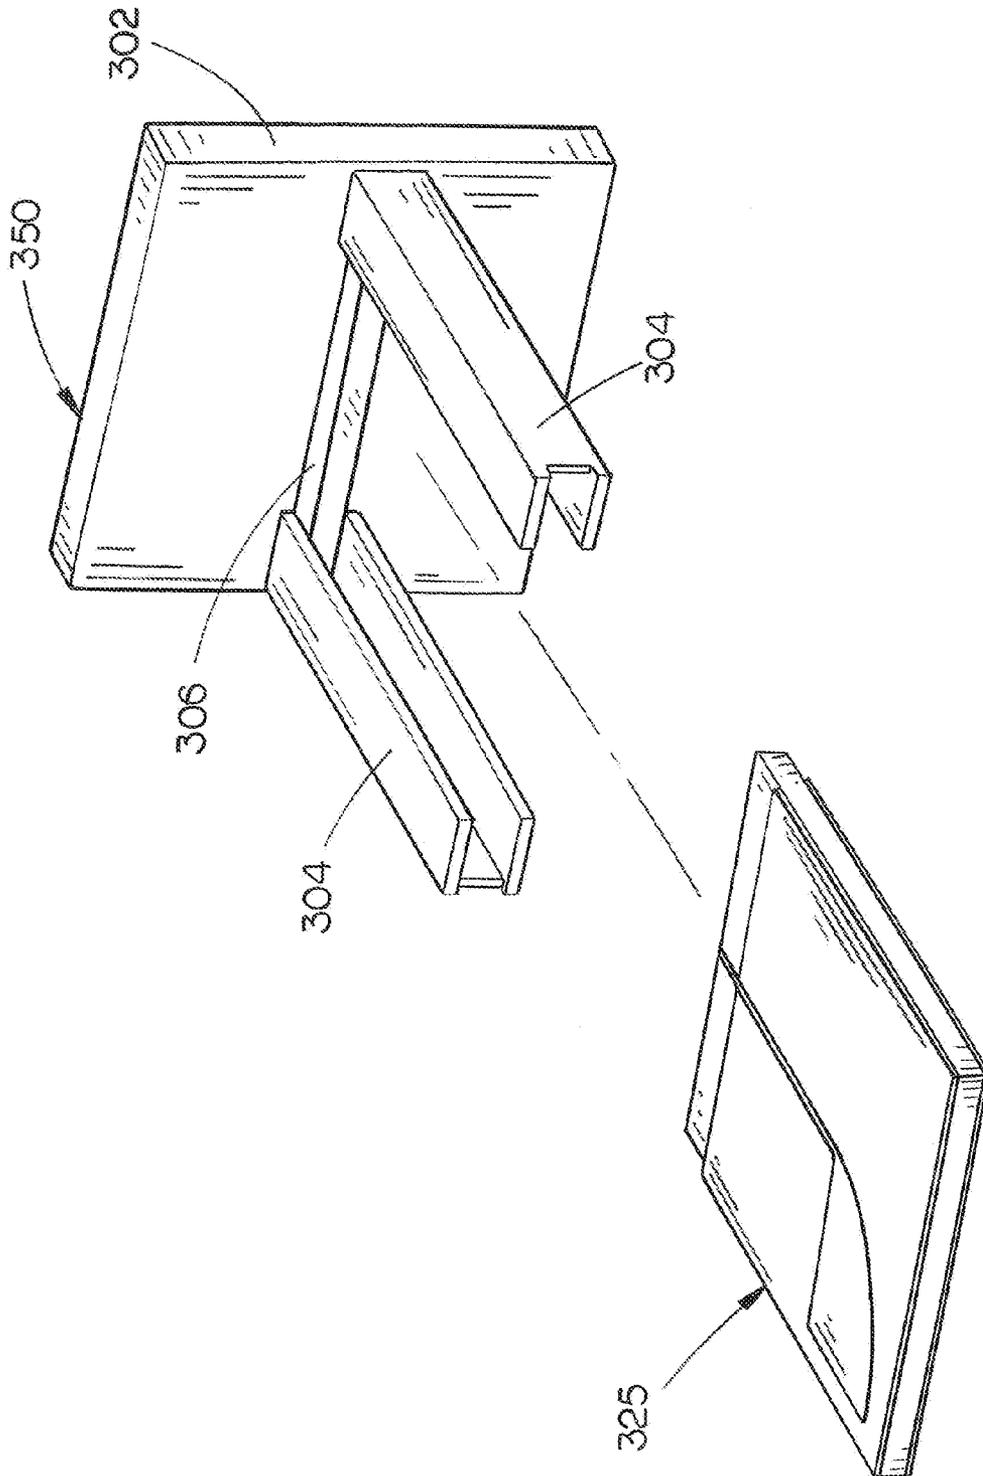


FIG. 5

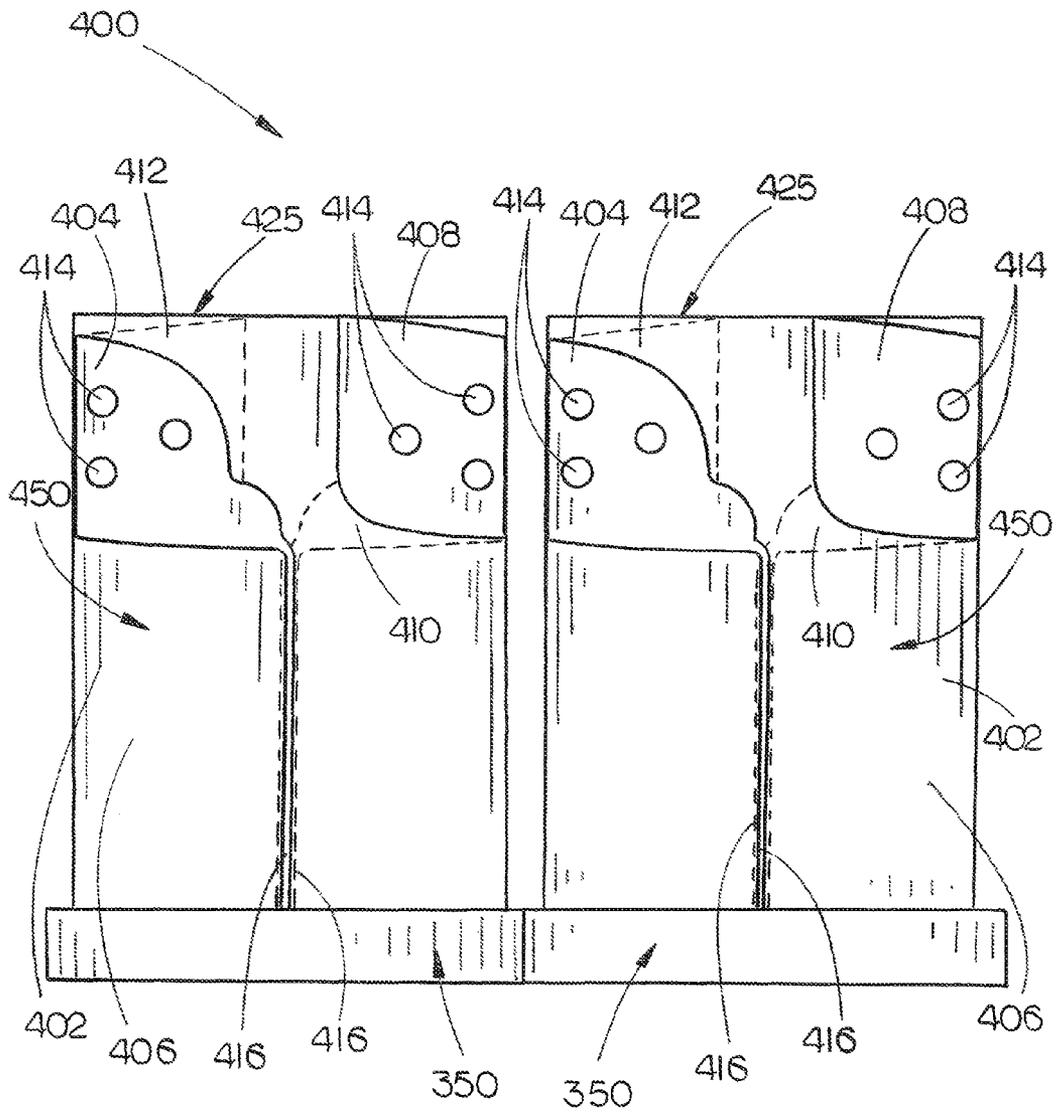


FIG. 6

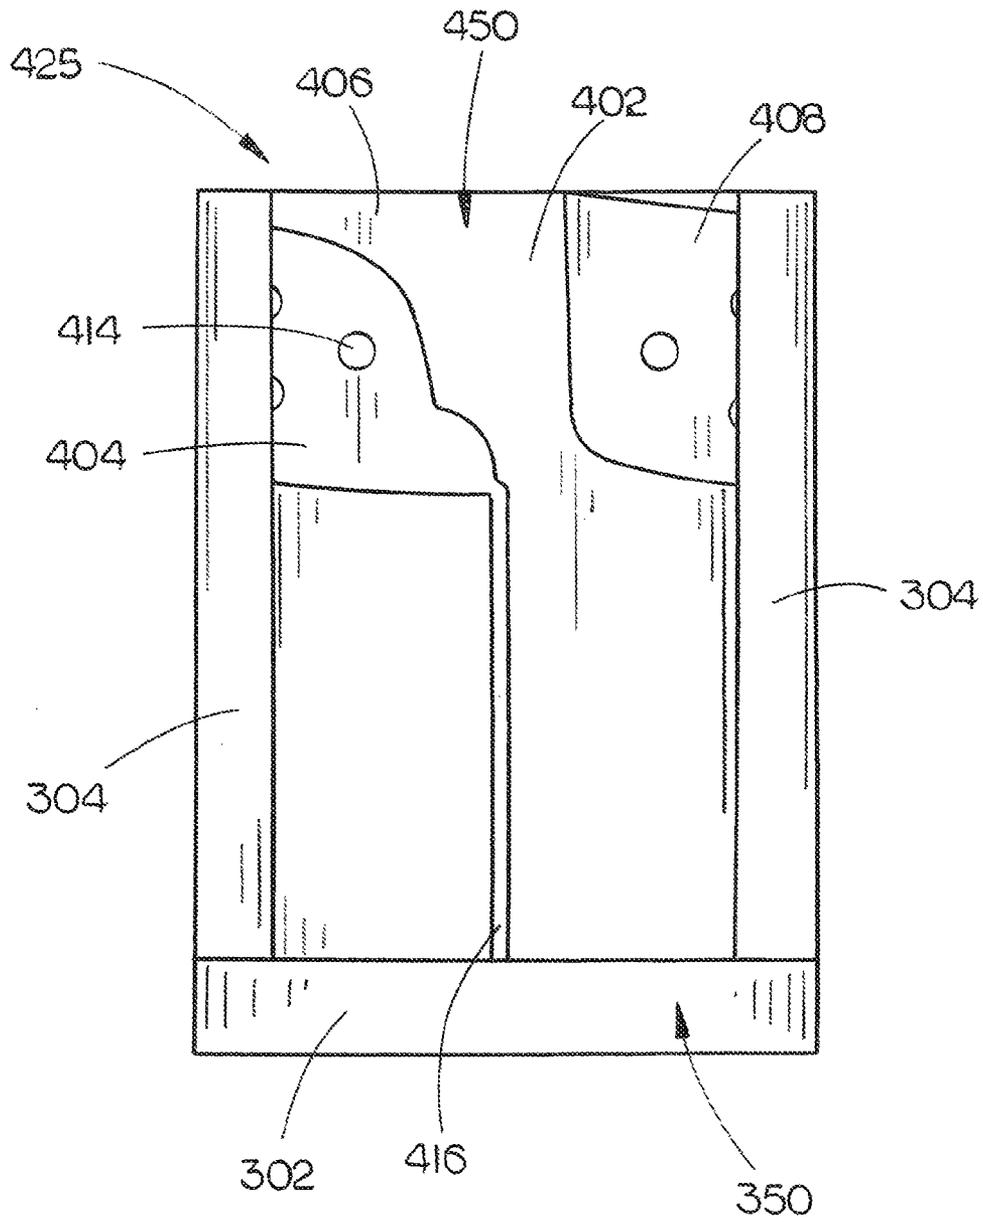


FIG. 7

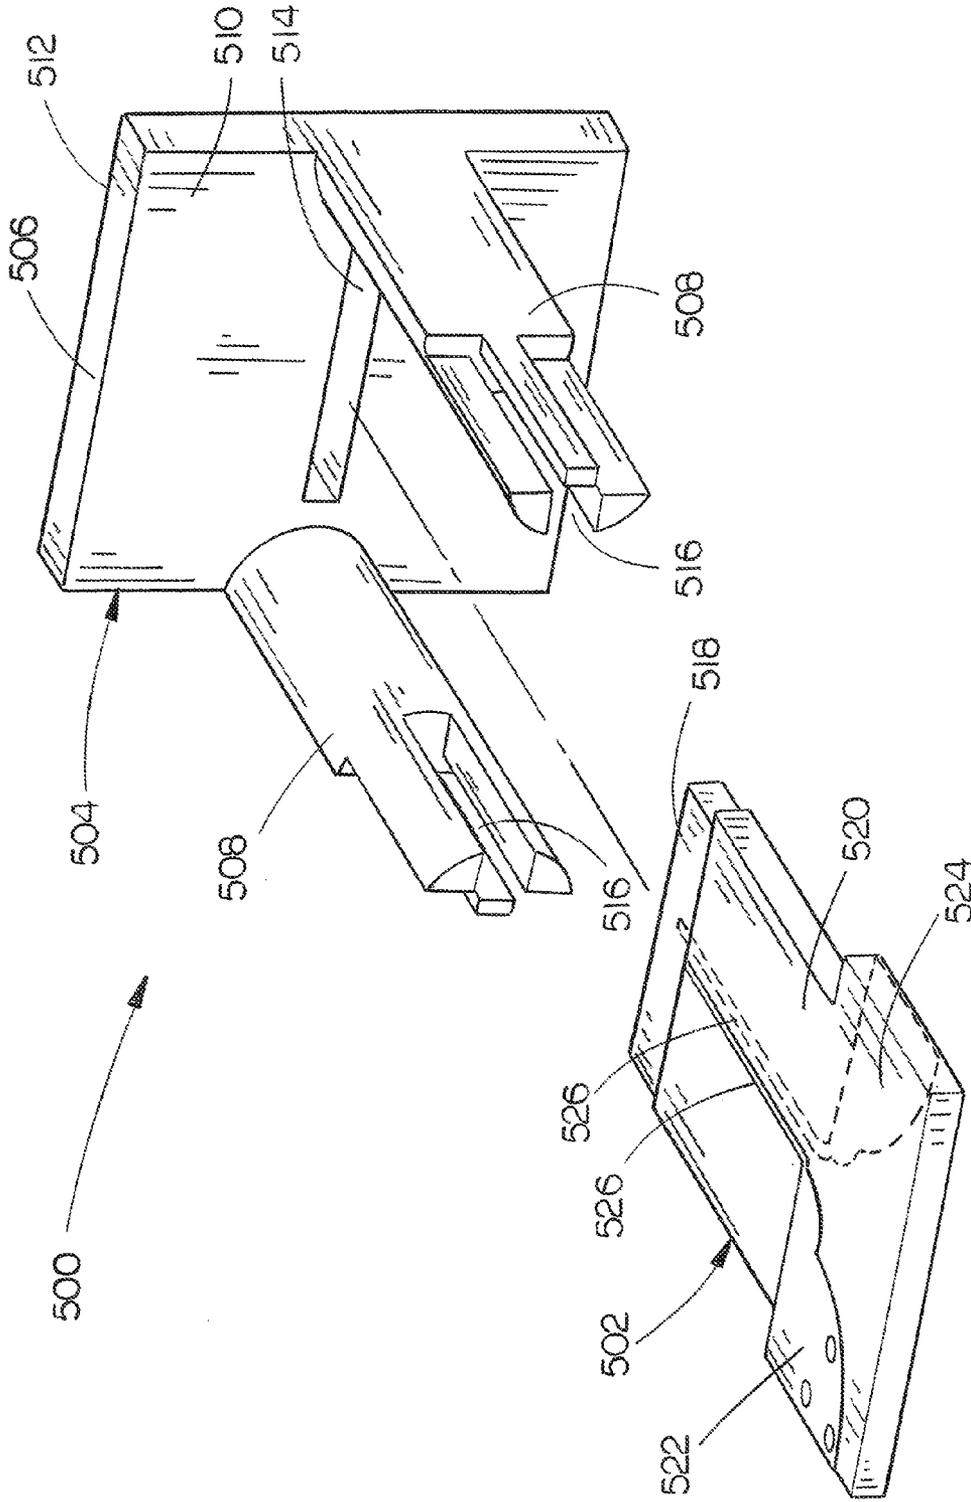


FIG. 8

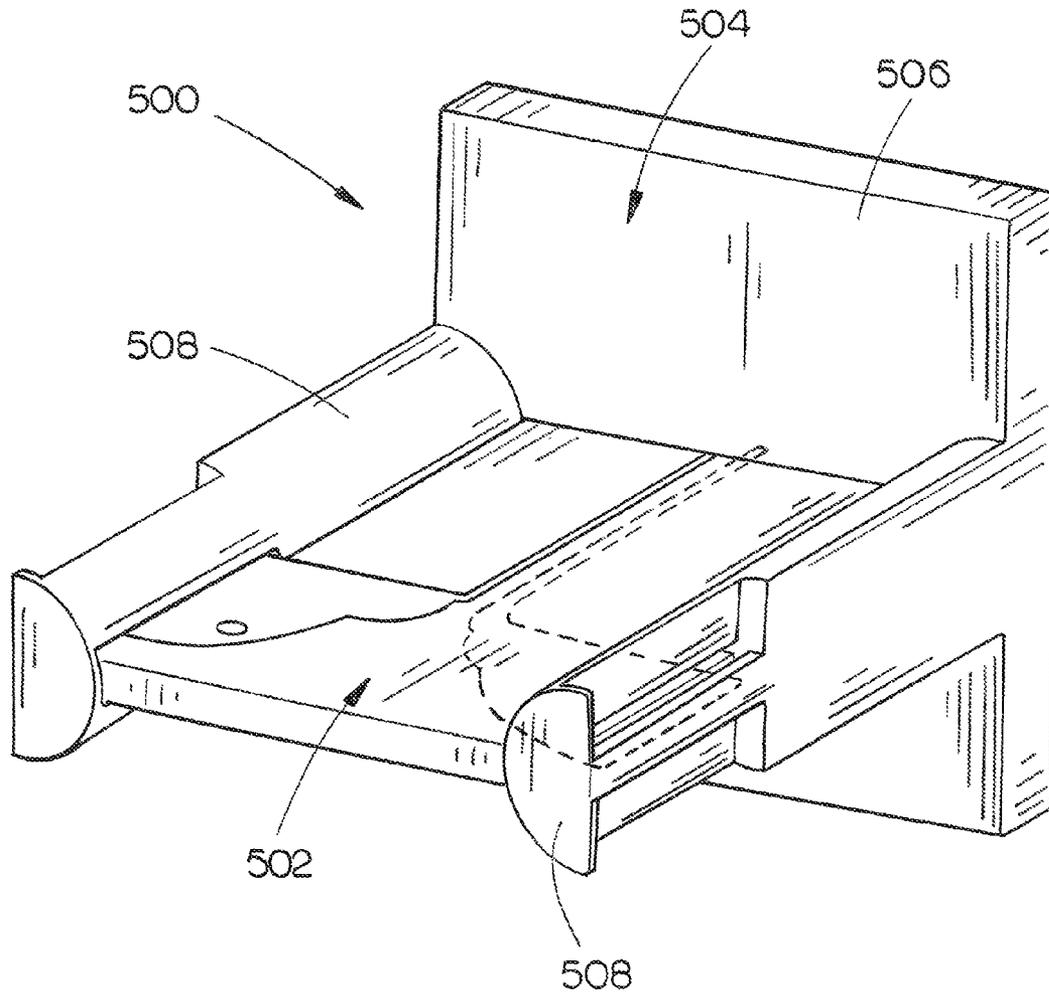
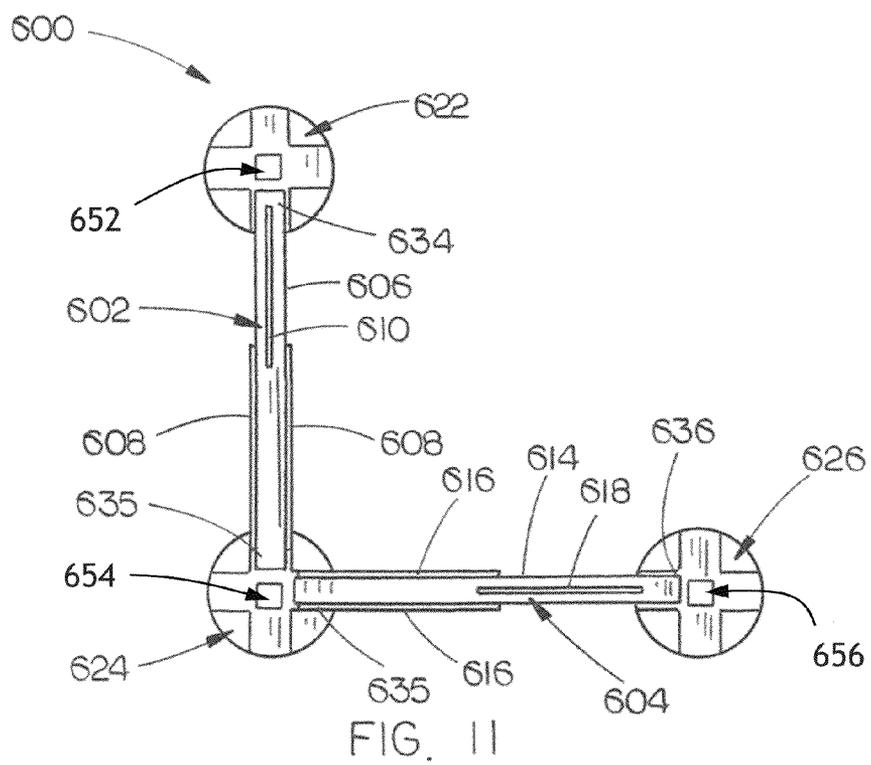
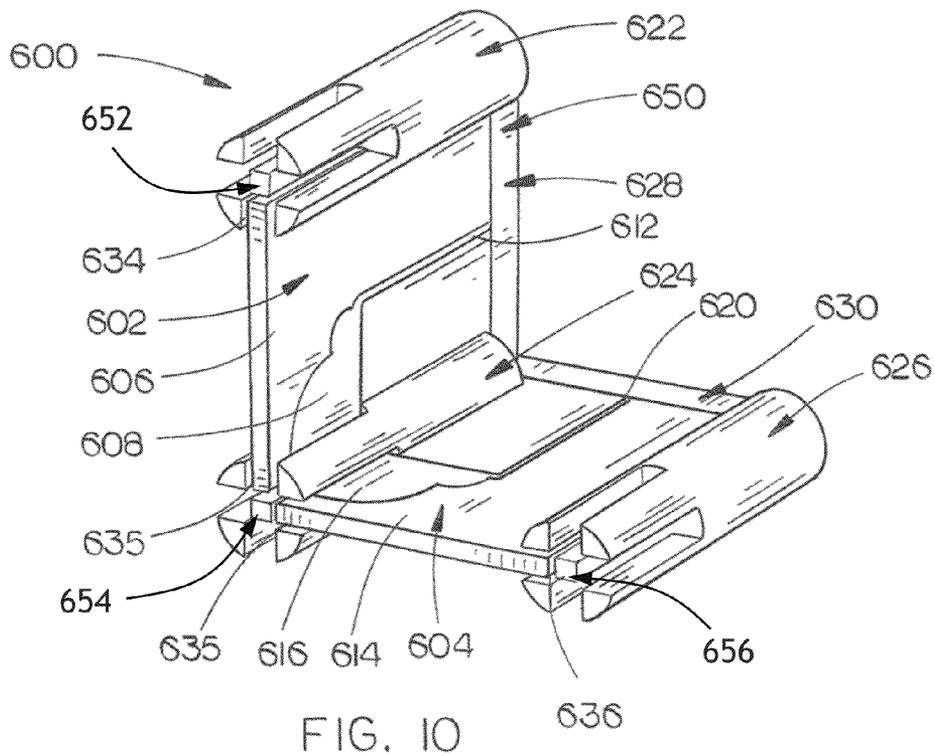


FIG. 9



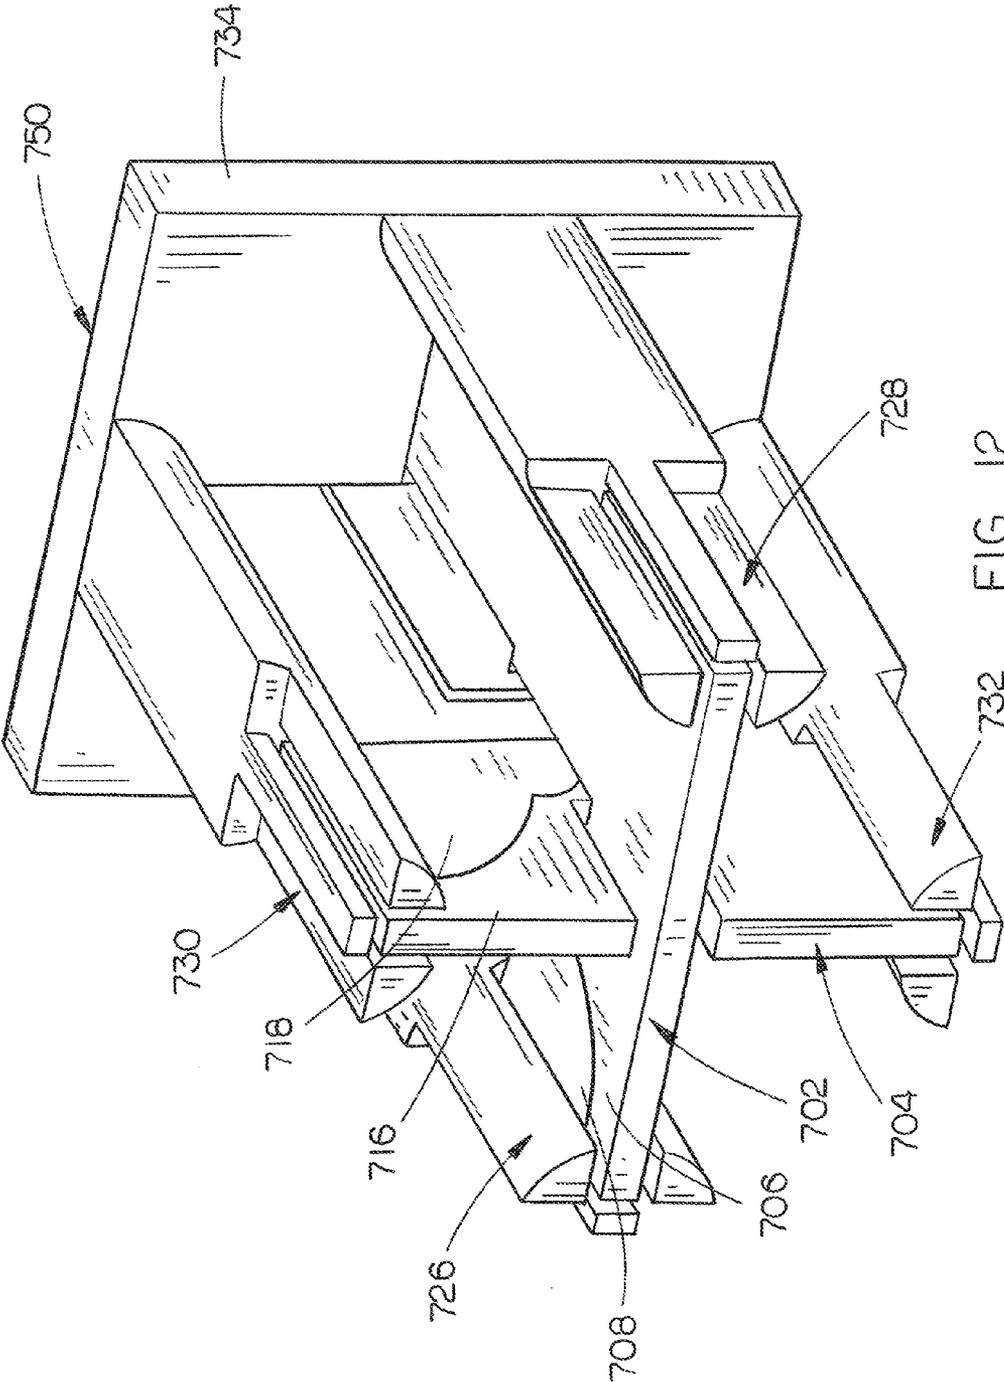


FIG. 12

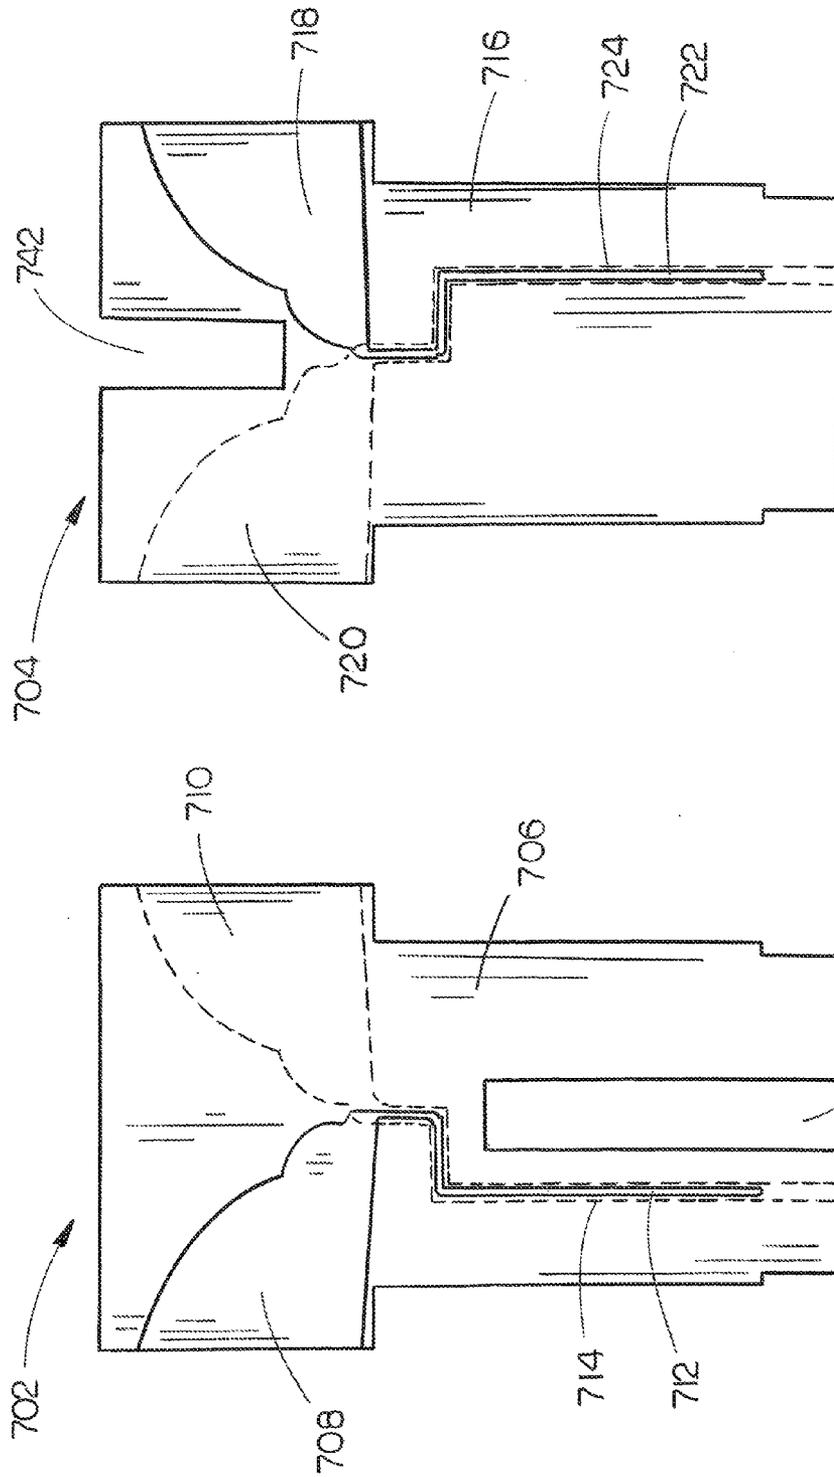


FIG. 14

FIG. 13

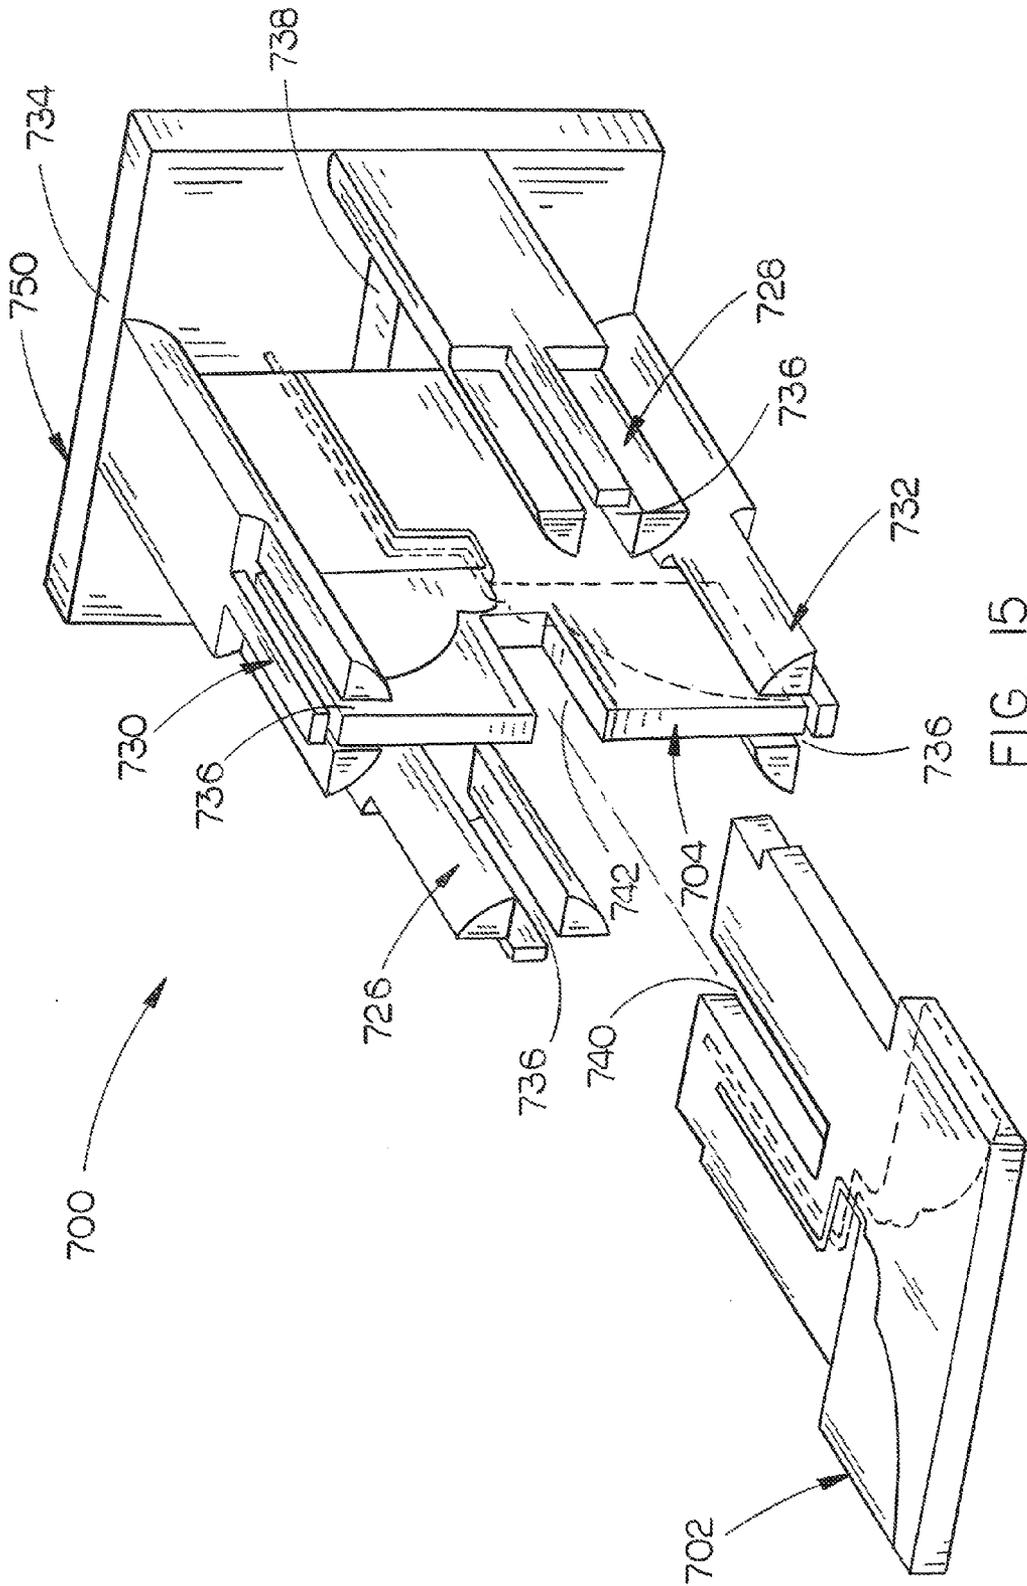


FIG. 15

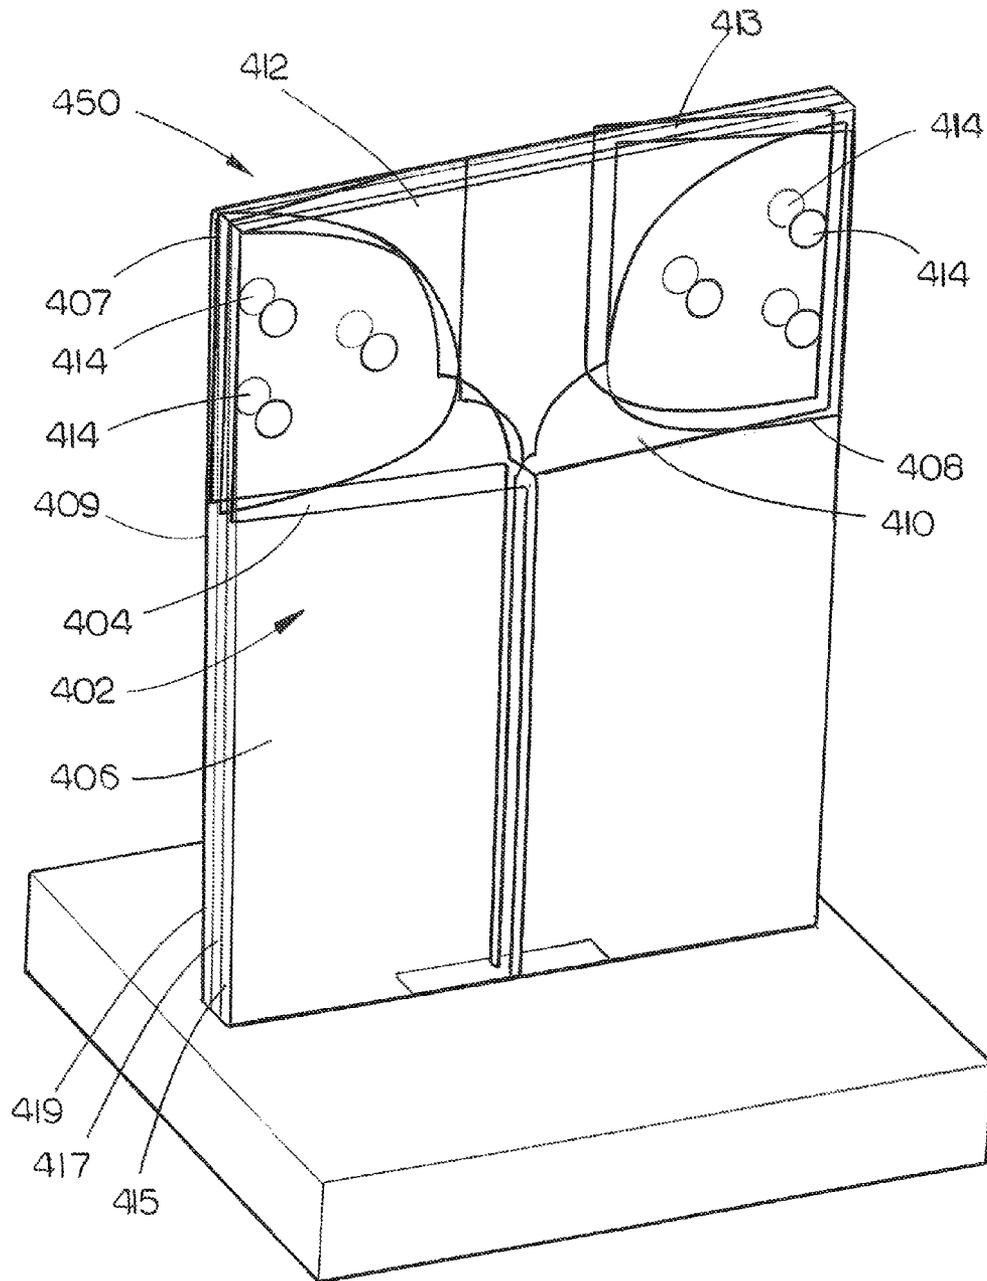


FIG. 16

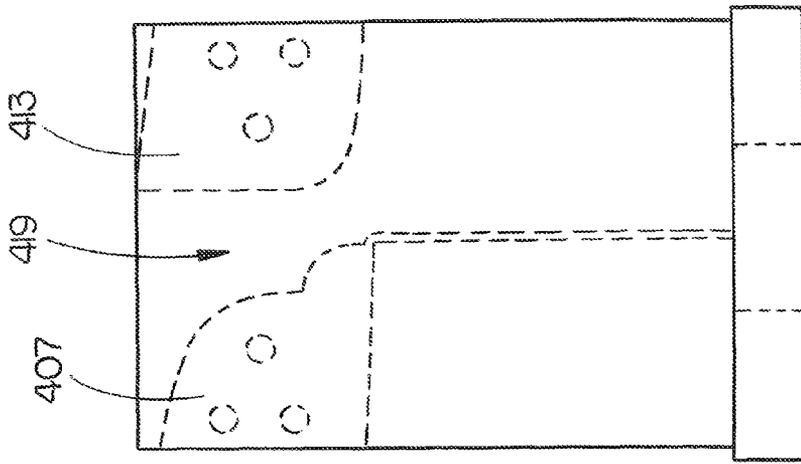


FIG. 17A

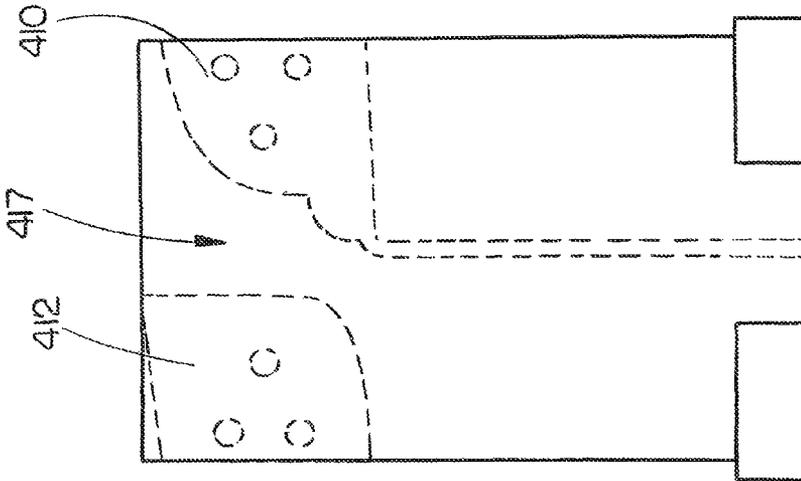


FIG. 17B

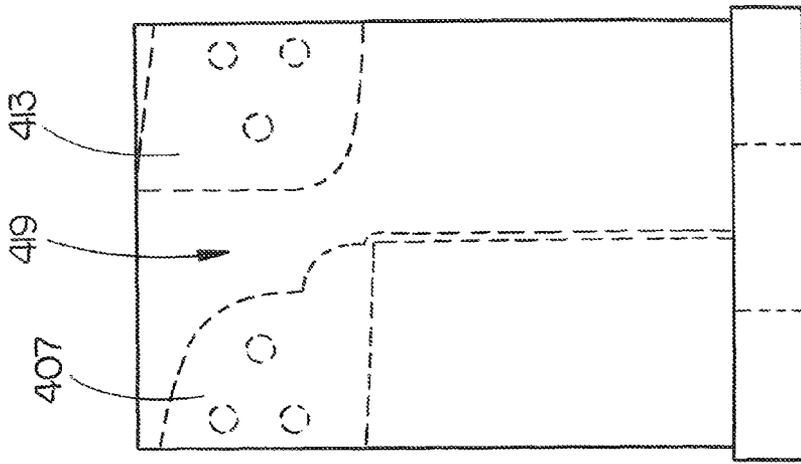


FIG. 17C

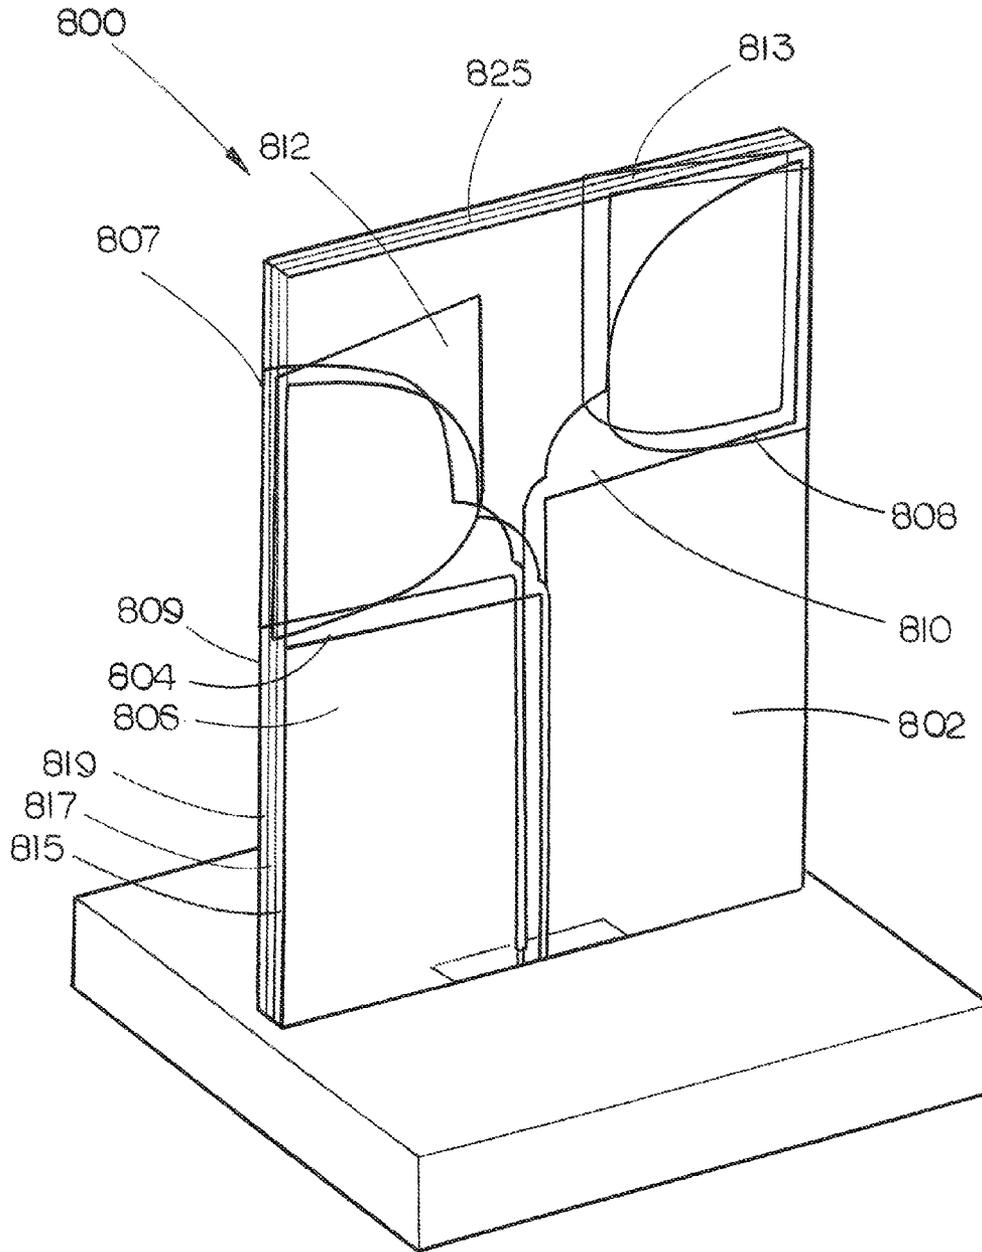


FIG. 18

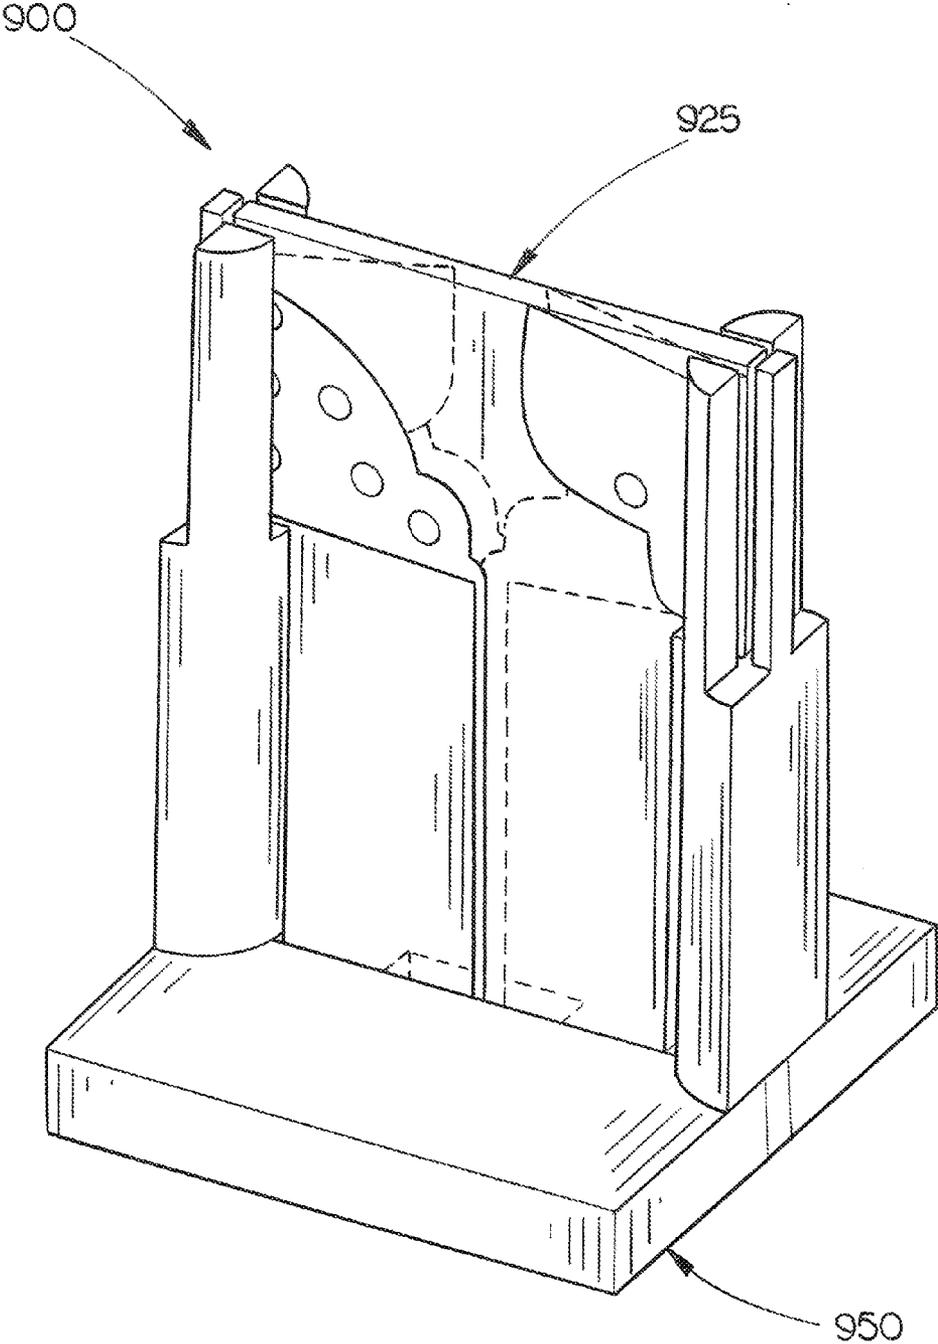


FIG. 19

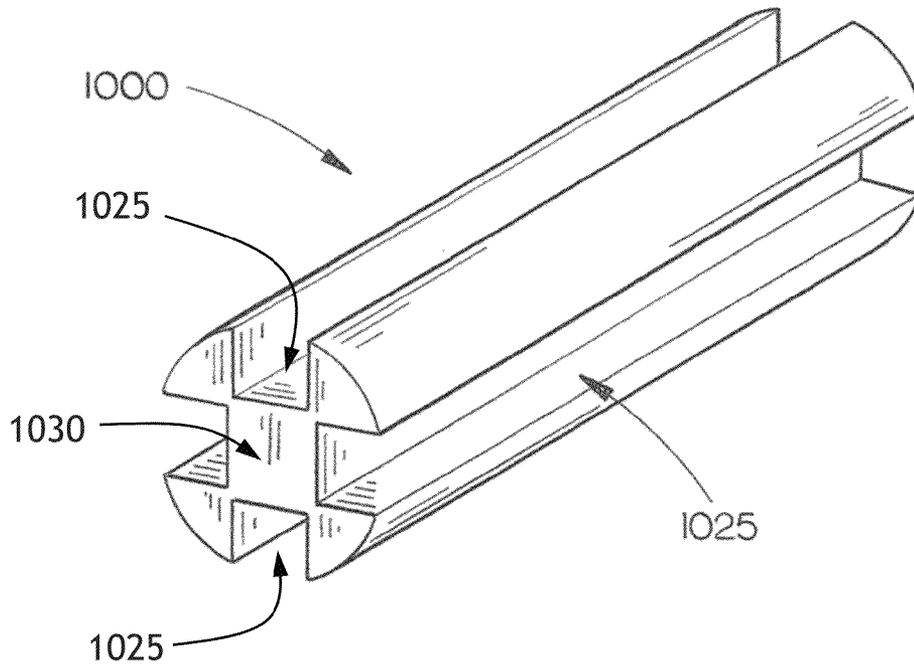


FIG. 20

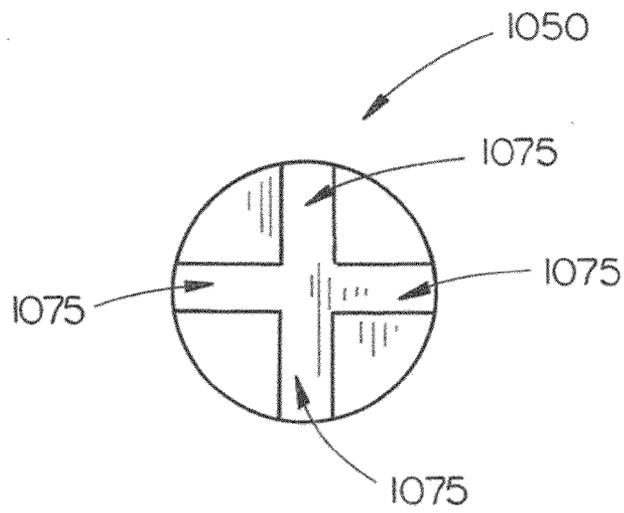


FIG. 21

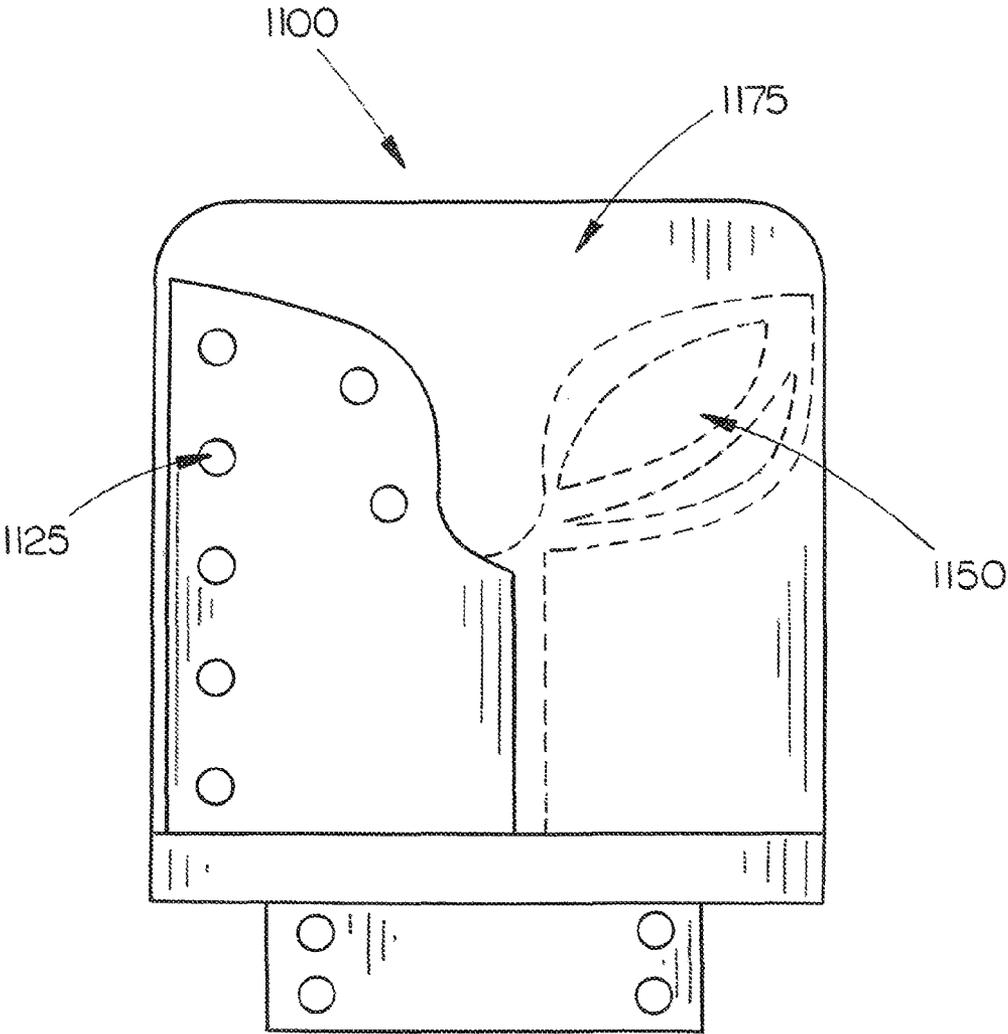


FIG. 22

**ULTRA WIDE BAND BALANCED
ANTIPODAL TAPERED SLOT ANTENNA AND
ARRAY WITH EDGE TREATMENT**

CROSS-REFERENCE TO RELATED
APPLICATIONS

The present application is a divisional application and claims priority to U.S. patent application Ser. No. 12/893,585 filed Sep. 29, 2010, now U.S. Pat. No. 8,466,844. The U.S. patent application Ser. No. 12/893,585 filed Sep. 29, 2010 is hereby incorporated by reference in its entirety. The present application is related to U.S. patent application Ser. No. 12/893,648 filed Sep. 29, 2010; the U.S. patent application Ser. No. 12/893,648 filed Sep. 29, 2010 is also incorporated by reference in its entirety.

FIELD OF THE INVENTION

The present invention relates to the field of antennas and more particularly to an edge-treated antenna and array (ex.—tapered slot antenna, notch antenna, Vivaldi, Balanced Antipodal Vivaldi Antenna (AVA), Bunny Ears antenna) for achieving ultra wide-band (UWB) performance.

BACKGROUND OF THE INVENTION

A number of currently available Balanced Antipodal Vivaldi Antennas (BAVAs) and/or BAVA arrays may not provide a desired level of performance over a desired bandwidth range (ex.—over a broad bandwidth). Further, currently available BAVAs and/or BAVA arrays may not provide desirable capacitance and impedance matching characteristics. Still further, currently available BAVAs and/or BAVA arrays may not have desirable Size, Weight, Power and Cost (SWAP-C) characteristics.

Thus, it would be desirable to have a BAVA (ex.—BAVA antenna) and/or BAVA array which addresses the problems associated with currently available solutions.

SUMMARY OF THE INVENTION

Accordingly an embodiment of the present disclosure is directed to a unit cell, including: a Balanced Antipodal Vivaldi Antenna (BAVA); and a post assembly, the post assembly configured for receiving the BAVA, the post assembly including a base plate, the post assembly further including a plurality of channel modules, said plurality of channel modules being connected to the base plate, wherein a first channel module included in the plurality of channel modules is configured for receiving, via a channel (ex.—U-shaped channel) of the first channel module, a first edge portion of a substrate of the BAVA, a second channel module included in the plurality of channel modules is configured for receiving, via a channel (ex.—U-shaped channel) of the second channel module, a second edge portion of the substrate of the BAVA, and the base plate is configured for receiving, via an aperture formed through the base plate, a third edge portion of the substrate of the BAVA. The substrate is received within the post assembly such that the channel modules are neither in physical contact with, nor are they in electrical contact with conductors of the BAVA. Thus, the channel modules may not (ex.—need not) be in physical and/or electrical contact with conductors of the BAVA.

A further embodiment of the present disclosure is directed to a dual-polarized antenna array, including: a first Balanced Antipodal Vivaldi Antenna (BAVA); a second BAVA; and a

cradle assembly, the cradle assembly configured for receiving the first BAVA and the second BAVA, the cradle assembly including a first channel module, a second channel module, and a third channel module, the first, second and third channel modules being connected to a frame of the cradle assembly, the frame including a first frame portion connected to a second frame portion, wherein the first and second channel modules are configured for receiving a substrate of the first BAVA, the second and third channel modules being configured for receiving a substrate of the second BAVA, the first BAVA being a vertical polarization input, and the second BAVA being a horizontal polarization input.

A still further embodiment of the present disclosure is directed to a dual-polarized antenna array, including: a first Balanced Antipodal Vivaldi Antenna (BAVA); a second BAVA; and a cradle assembly, the cradle assembly configured for receiving the first BAVA and the second BAVA, the cradle assembly including a first channel module, a second channel module, and a third channel module, the first, second and third channel modules being connected to a frame of the cradle assembly, the frame including a first frame portion connected to a second frame portion, wherein a U-shaped channel of the first channel module receives a first edge portion of a substrate of the first BAVA, a first U-shaped channel of the second channel module receives a second edge portion of the substrate of the first BAVA, an aperture of the first frame portion receives a third edge portion of the substrate of the first BAVA, a second U-shaped channel of the second channel module receives a first edge portion of a substrate of the second BAVA, a channel of the third channel module receives a second edge portion of the substrate of the second BAVA, and an aperture of the second frame portion receives a third edge portion of the substrate of the second BAVA, the first BAVA being a vertical polarization input, and the second BAVA being a horizontal polarization input, the substrate of the first BAVA being oriented perpendicular to the substrate of the second BAVA.

A further embodiment of the present disclosure is directed to a Balanced Antipodal Vivaldi Antenna (BAVA), including: a substrate; and a plurality of (ex.—two or more) conductors connected to the substrate, the plurality of conductors including a first outer conductor, a second outer conductor and an embedded conductor, the first outer conductor being configured upon a first external surface of the BAVA substrate, the second outer conductor being configured upon a second external surface of the BAVA substrate, the first external surface and the second external surface being located on a generally opposite external faces of the substrate, the embedded conductor being embedded within the substrate, wherein at least one conductor included in the plurality of conductors includes a multi-curve surface, said multi-curve surface including a plurality of curved sub-portions, a first curved sub-portion included in the plurality of curved sub-portions being controlled by a first opening rate and a second curved sub-portion included in the plurality of sub-portions being controlled by a second opening rate, the second opening rate being a different rate than the first opening rate.

A still further embodiment of the present invention is directed to a Balanced Antipodal Vivaldi Antenna (BAVA), including: a substrate; and a plurality of conductors connected to the substrate, the plurality of conductors including a first outer conductor, a second outer conductor, a third outer conductor, a fourth outer conductor, a first embedded conductor, and a second embedded conductor, the first outer conductor and the third outer conductor being configured upon a first external surface of the BAVA substrate, the second outer conductor and the fourth outer conductor being configured

upon a second external surface of the BAVA substrate, the first external surface and the second external surface being located on a generally opposite external faces of the substrate, the first embedded conductor and the second embedded conductor being embedded within the substrate, wherein at least one conductor included in the plurality of conductors includes a multi-curve surface, said multi-curve surface including a plurality of curved sub-portions, a first curved sub-portion included in the plurality of curved sub-portions being controlled by a first opening rate and a second curved sub-portion included in the plurality of sub-portions being controlled by a second opening rate, the second opening rate being a different rate than the first opening rate.

It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are not necessarily restrictive of the invention as claimed. The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention and together with the general description, serve to explain the principles of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The numerous advantages of the present disclosure may be better understood by those skilled in the art by reference to the accompanying figures in which:

FIG. 1 is a top plan view of a Balanced Antipodal Vivaldi Antenna (BAVA);

FIG. 2 is a top plan view of a BAVA having multi-stage conductors (ex.—fins) in accordance with a further exemplary embodiment of the present disclosure;

FIG. 3 is a top plan view of an asymmetric BAVA having multi-stage fins, in accordance with a further exemplary embodiment of the present disclosure;

FIG. 4 is a top plan view of a BAVA utilizing multiple opening rates in both the upper and lower-multi-curve surfaces of its fins (ex.—arms) in accordance with a further exemplary embodiment of the present disclosure;

FIG. 5 is an exploded view of a BAVA unit cell in accordance with an exemplary embodiment of the present disclosure;

FIG. 6 is a top plan view of an antenna array including a plurality of BAVA unit cells in accordance with a further exemplary embodiment of the present disclosure;

FIG. 7 is a top plan view of a BAVA unit cell in accordance with a further exemplary embodiment of the present disclosure;

FIG. 8 is an exploded view of a BAVA unit cell in accordance with a further exemplary embodiment of the present disclosure;

FIG. 9 is an isometric view of the BAVA unit cell shown in FIG. 8, in accordance with a further exemplary embodiment of the present disclosure;

FIG. 10 is an isometric view of a dual-polarized BAVA array in accordance with an exemplary embodiment of the present disclosure;

FIG. 11 is a front view of the dual-polarized BAVA array shown in FIG. 10 in accordance with an exemplary embodiment of the present disclosure;

FIG. 12 is an isometric view of a BAVA array, wherein the BAVA elements are configured in an orthogonal orientation relative to each other, in accordance with a further exemplary embodiment of the present disclosure;

FIG. 13 is a bottom plan view of a horizontal polarization BAVA element of the BAVA array shown in FIG. 12, in accordance with an exemplary embodiment of the present disclosure;

FIG. 14 is a top plan view of a vertical polarization BAVA element of the BAVA array shown in FIG. 12, in accordance with an exemplary embodiment of the present disclosure;

FIG. 15 is an exploded, isometric view of the BAVA array shown in FIG. 12, in accordance with an exemplary embodiment of the present disclosure;

FIG. 16 is a front isometric view of a BAVA having multi-stage conductors (ex.—fins) and additional metallic structure within the three metallic conductor layers of the BAVA in accordance with a further exemplary embodiment of the present disclosure;

FIGS. 17A, 17B and 17C are individual top plan views of each of the individual metallic conductor layers (ex.—top, middle and bottom conductor layers respectively) of the BAVA shown in FIG. 16 in accordance with a further exemplary embodiment of the present disclosure;

FIG. 18 is a front isometric view of an asymmetric BAVA having multi-stage fins and additional metallic structures in the conductor layers of the BAVA substrate, in accordance with a further exemplary embodiment of the present disclosure;

FIG. 19 is a BAVA unit cell (ex—BAVA unit and post cell), said BAVA of the BAVA unit cell having multi-stage fins and additional metallic structures in the conductor layers of the BAVA substrate in accordance with a further exemplary embodiment of the present disclosure;

FIG. 20 is an isometric view of a channel module configured with a U-shaped channel which runs the full length of the channel module for promoting front or rear insert of a BAVA substrate into the channel module in accordance with a further exemplary embodiment of the present disclosure; and

FIG. 21 is an end view of a channel module configured with through channels in accordance with a further exemplary embodiment of the present disclosure; and

FIG. 22 is top plan view of a BAVA in which an outer conductor of the BAVA is shaped differently than the embedded conductor in accordance with a further exemplary embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE INVENTION

Reference will now be made in detail to the presently preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings.

The traditional design of a Tapered slot antenna (TSA) is capable of operating over a wide range of frequencies (10:1) at wide scan-angles (see: N. Schuneman, J. Ilion and R. Hodges, "Decade Bandwidth Tapered Notch Antenna Array Element," Antenna Applications Symposium, pp. 280-294, 19-21 Sep. 2001. Monticello, Ill. and M. Stasiowski, D. H. Schaubert, "Broadband Phased Array," 2008 Antenna Applications Symposium, Allerton Park, Monticello, Ill., pp. 17-41, 16-18 Sep. 2008. Monticello, Ill., both of which are incorporated herein by reference). However, contiguous electrical contact between neighboring elements is required to sustain the wideband operation. This increases the cost of the assembly of a large dual-polarized Vivaldi array. In addition, it is labor extensive to repair to repair the soldered elements of the array. Inserting gaps between the neighboring Vivaldi elements produces severe impedance anomalies that disrupt the operating band of the array (see: "Wide Bandwidth Arrays of Vivaldi Antennas", Schaubert D. H.; ElSallal, W.; Katsuri S.; Boryszenko, A. O.; Vouvakis, M. N., Paraschos, G., 2008

Institution of Engineering and Technology Seminar, Publication Year 2008, Pages 1-20, which is herein incorporated by reference). It is suspected that these anomalies are not purely an elemental effect but also are the result of high mutual coupling between the elements.

The Bunny-Ear antenna was first introduced in 1993 as a wideband single element radiator (see J. J. Lee, and S Livingston, "Wideband Bunny-Ear Radiating Element," IEEE Antenna and Propagation Symposium, pp. 1604-1607, 28 Jun.-2 Jul. 1993, which is herein incorporated by reference). J. J. Lee et al. published results of that antenna exhibiting 4:1 bandwidth in a dual-polarized array without contiguous electrical contact between adjoining elements (see J. J. Lee, S Livingston and R. Koenig, "Performance of a Wideband (3-14 GHz) Dual-Pol Array," IEEE Antenna Propagation Symposium, pp. 551-554, 20-25 Jun. 2004, which is herein incorporated by reference). However, it is necessary to connect film resistors in the gaps between antenna arms and the ground plane to suppress electromagnetic resonances caused by the gap. Installation of these lumped elements hinders future maintenance. In addition, the element plus the coaxial-to-slot balun transition increases the depth of the antenna about one wavelength at the highest frequency of operation.

Munk and others have developed arrays of printed dipoles with capacitive coupling between elements (see B. Munk, R. Taylor, T. Durham, W. Crosswell, B. Pigon, R. Boozer, S. Brown, M. Jones, J. Pryor, S. Ortiz, J. Rawnick, K. Kerbs, M. Vanstrum, G. Gothard and D. Wiebelt, "A Low-Profile Broadband Phased Array Antenna," IEEE Antenna and Propagation Symposium, pp. 448-451, 22-27 Jun. 2003, which is herein incorporated by reference). The dipole array worked over wide bandwidths and scans over wide ranges, but it required multiple layers of dielectrics to achieve good performance, and the balanced dipoles required a balun for operation with common microwave transmission lines, which are unbalanced. Also, the end-to-end capacitance of the dipoles was difficult to achieve if modular construction was desired.

The fragmented aperture antenna array (see P. Friederich, L. Pringle, L. Fountain, P. Harms, D. Denison, E. Kuster, S. Blalock, G. Smith, J. Maloney and M. Kesler, "A New Class of Broadband Planar Apertures," Antenna Applications Symposium, pp. 561-587, 19-21 Sep. 2001. Monticello, Ill. and B. Thors, and H. Steyskal, "Synthesis of Planar Broadband Phased Array Elements with a Genetic Algorithm," Antenna Applications Symposium, pp. 324-344, 21-23 Sep. 2005. Monticello, Ill., both of which are herein incorporated by reference) appears to provide wide bandwidth and wide scanning. Like the dipole arrays of Munk, fragmented aperture arrays require layers of dielectric superstrates and seem to require relatively stringent tolerances for element-to-element coupling, making them less amenable to modular construction.

US Patent Publication No: US 2008/0211726 A1, entitled: "Wide bandwidth Balanced Antipodal Tapered Slot Antenna and Array Including a Magnetic Slot," (which is herein incorporated by reference) describes a 5:1 bandwidth array in which the elements are said to be modular. However, the metallic walls are needed between the adjoining single polarized elements in the array environment to avoid impedance anomalies and scan blindness. Furthermore, doubly-mirroring technique is required to improve scan impedance off-boresight. This technique might not be cost-attractive because it requires 180 degree of phase shift between neighboring elements.

The enhancement in the present disclosure allows significant advantages over competing technologies as it has the lowest profile (element depth is less than $\frac{1}{2}$ wavelength at the

highest frequency of operation), and works in a dual-polarized array over a decade (10:1) bandwidth with wide scan volume)($\pm 60^\circ$).

One of the key parameters for a Balanced Antipodal Vivaldi Antenna (BAVA) is its opening rate, R1. Opening rate (R1) controls the shape and depth of an element's active reflection coefficient curve. Usually, there is a large hump in an active Voltage Standing Wave Ratio (VSWR) plot of a Doubly-Mirrored Balanced Antipodal Vivaldi Antenna with Magnetic Slot (DmBAVA-MAS) element in infinite arrays.

Referring to FIG. 1, a Balance Antipodal Tapered Slot Antenna (ex.—a BAVA) having a single opening rate (R1) is shown. In an exemplary embodiment of the present disclosure, the BAVA 100 (ex.—BAVA antenna, BAVA antenna element) includes a substrate 102. For example, the substrate 102 may be formed of dielectric material. In further embodiments of the present disclosure, the BAVA 100 includes a first outer conductor 104, said first outer conductor 104 being connected to (ex.—configured upon) a first (ex.—top) external surface 106 (ex.—ground plane, face) of the substrate 102. In current exemplary embodiments of the present disclosure, the BAVA 100 further includes a second outer conductor (not shown), said second outer conductor being connected to (ex.—configured upon) a second (ex.—bottom) external surface (ex.—ground plane, face) (not shown) of the substrate 102. In further embodiments of the present disclosure, the BAVA further includes an embedded conductor 108, said embedded conductor being embedded within the substrate 102 (ex.—in a stripline layer) and being configured (ex.—located) between the first outer conductor 104 and the second outer conductor (not shown).

In current exemplary embodiments of the present disclosure, the BAVA 100 includes a first feed structure 110, said first feed structure 110 being connected to the first outer conductor and being configured for providing an electrical feed for the first outer conductor 104. In further embodiments of the present disclosure, the BAVA 100 includes a second feed structure 112, said second feed structure 112 being connected to the embedded conductor 108 and being configured for providing an electrical feed for the embedded conductor 108. In exemplary embodiments of the present disclosure, the BAVA 100 includes a third feed structure (not shown), said third feed structure being connected to the second outer conductor (not shown) and being configured for providing an electrical feed for the second outer conductor. In further embodiments of the present disclosure, the embedded conductor 108 may have a plurality of apertures (ex.—slots, notches) 114 formed therein. In still further embodiments of the present disclosure, the first outer conductor 104, second outer conductor (not shown) and the embedded conductor 108 are flared conductors, each having a curved surface 116.

The flared conductors of the BAVA 100 shown in FIG. 1 appear to serve as a single-stage impedance transformer for the traveling wave from the radiating element into free space. Some performance improvement may be achieved by modifying the shape of the flared conductors to mimic a multiple-stage impedance transformer. FIG. 2 illustrates a BAVA 150 in accordance with a further exemplary embodiment of the present disclosure. In the embodiment shown in FIG. 2, the BAVA 150 is similar to and/or is constructed in a similar manner as the BAVA 100 of FIG. 1, except that the curved surface of each flared conductor of the BAVA 150 in FIG. 2 is formed as a multi-curve surface 118, each multi-curve surface 118 having multiple (ex.—two or more) exponential (or arbitrary) curved sub-portions (ex.—curves) 120, 122. In further embodiments of the present disclosure, the first set of curves 120 may be controlled by a first opening rate (R1a), while the

second set of curves **122** may be controlled by a second opening rate (R1 b), the second opening rate (R1 b) being different (ex.—unique) from the first opening rate (R1a).

The values of the unique opening rates (R1a and R1 b) may be optimized to achieve best response in the impedance match. The multi-stage design of the BAVA **150** shown in FIG. **2** may offer better control on active VSWR over a desired operating frequency band. Further, the BAVA **150** shown in FIG. **2** may be particularly attractive for ultra-wide-band phased array applications.

Referring to FIG. **3**, a BAVA **200** in accordance with a further exemplary embodiment of the present disclosure is shown. The BAVA **200** may be similar to and/or constructed in a manner similar to the BAVA **150** shown in FIG. **2**, except that the embedded conductor **108** of the BAVA **200** may be a different height than the first outer conductor **106** and the second outer conductor (not shown), thereby promoting alignment of the BAVA **200** (ex.—radiating element) with a conformal surface and also promoting retention of required array spacing from array theory to prevent grating lobe problems.

Referring to FIG. **4**, a BAVA **250** in accordance with a further exemplary embodiment of the present disclosure is shown. The BAVA **250** may be similar to and/or constructed in a manner similar to the BAVA **150** shown in FIG. **2**, except that for the BAVA **250** shown in FIG. **4** each conductor may include a plurality of (ex.—two) multi-curve surfaces **118** (ex.—upper and lower multi-curve surfaces), each multi-curve surface **118** having multiple (ex.—two, three) exponential curved sub-portions (ex.—curves) **120**, **122**. In further embodiments of the present disclosure, the first set of curves **120** of the upper multi-curve surfaces **118** of the conductors may be controlled by a first opening rate (R1a), the second set of curves **122** of the upper multi-curve surfaces **118** of the conductors may be controlled by a second opening rate (R1b), the first set of curves **120** of the lower multi-curve surfaces **118** of the conductors may be controlled by a third opening rate (R2a), and the second set of curves **122** of the lower multi-curve surfaces **118** of the conductors may be controlled by a fourth opening rate (R2b). The first, second, third and fourth opening rates may all be unique values relative to each other. By utilizing more than one opening rate in the upper and lower multi-curve surfaces, the BAVA **250** shown in FIG. **4** may promote improved impedance matching capabilities over currently available BAVA designs. The multi-stage design discussed above may be implemented with various shapes of tapered slot radiating elements, such as Balanced Antipodal Asymmetric Vivaldi Antennas (BA²VA), Asymmetric Vivaldi Antennas (AVAs), Balanced Antipodal Dipole Antennas and traditional Vivaldi Antennas.

Referring to FIG. **5**, a BAVA unit cell in accordance with an exemplary embodiment of the present disclosure is shown. The BAVA unit cell **300** includes a BAVA **325** and a post assembly (ex.—metallic post assembly) **350**. For example, the BAVA **325** may be any one of the BAVA embodiments discussed in the present disclosure and/or may be constructed to include features of any one of the BAVA embodiments discussed in the present disclosure. In further embodiments of the present disclosure, the metallic post assembly **350** may include a base plate **302** and a plurality of channel modules **304**, said plurality of channel modules **304** being connected to the base plate **302**. In current exemplary embodiments of the present disclosure, the base plate **302** has an aperture (ex.—slot) **306** formed therethrough, said slot **306** being sized and shaped for receiving the BAVA **325**.

In the embodiment shown in FIG. **5**, the base plate **302** has a first (ex.—front) surface **308** and a second (ex.—rear) sur-

face **310**. The channel modules **304** may be configured upon (ex.—connected to) the front surface **308**. In further embodiments of the present disclosure, the channel modules **304** are configured as elongated U-shaped brackets and are oriented parallel to each other and are aligned and sized to correspond with the slot **306** as shown in FIG. **5**. In still further embodiments of the present disclosure, the channel modules **304** are each sized and shaped for receiving at least a portion of the BAVA **325**. In the embodiment shown in FIG. **5**, the metallic post assembly **350** may be a rear-engage metallic post assembly **350**. For example, the BAVA **325** may be engaged with the metallic post assembly **350** by directing (ex.—sliding) the BAVA **325** via the rear surface **310** through the slot **306**, further directing the BAVA towards the front surface **308** so that opposing edge portions of the BAVA **325** are slidably received via end portions of the channel modules (ex.—U-shaped brackets) **304** and so that the BAVA **325** (ex.—said edge portions of the BAVA **325**) may be seated within the U-shaped brackets **304** (ex.—within the U-channels, within the air-filled or other dielectric material-filled slots) to form the BAVA unit cell **300**. In further embodiments of the present disclosure, the channel modules (ex.—U-channel modules) **304** may be constructed with wire Electrical Discharge Machining (wire EDM), casting, Printed Circuit Board (PCB)-based and/or other fabrication processes.

In exemplary embodiments of the present disclosure, the metallic post assembly **350** is constructed such that when the BAVA **325** is engaged with the metallic post assembly **350** and the edge portions of the BAVA are seated within the U-channels **304**, only portions of the substrate **102** of the BAVA **325** are in contact with the U-channels. However, when the BAVA **325** is engaged with the metallic post assembly **350** and the edge portions of the BAVA **325** are seated within the U-channels **304**, edge treatment is provided in that the edge portions of the substrate **102** of the BAVA **325** are received by the U-channels **304** of the post assembly **350**, however, the conductors (**104**, **106**) of the BAVA **325** are not in physical contact with the U-channels **304**, nor are the conductors (**104**, **106**) of the BAVA **325** in electrical contact with the U-channels **304**. In applications in which an antenna array including multiple BAVAs (ex.—multiple BAVA elements) **325** is being implemented, the metallic post assembly **350** may be configured between adjacent BAVA elements **325**, thereby providing capacitance to ground, promoting increased capacitance and/or coupling between the neighboring elements **325** and increasing operational bandwidth (ex.—by moving the lower frequency band end). With current BAVA Electronically Scanned Array (ESA) applications, single polarization of the BAVA ESAs require metallic cross-walls between the radiating elements to prevent scan-blindness (ex.—in the case of cBAVA and BAVAm) and to reduce small impedance ripples (ex.—in the case of DmBAVA and DmBAVA-MAS).

Referring to FIG. **6**, an antenna array **400** including a plurality of BAVA unit cells **425** in accordance with a further exemplary embodiment of the present disclosure are shown. The BAVA unit cells **425** shown in FIG. **6** may be similar to and/or may be constructed in a manner similar to the BAVA unit cell **300** shown in FIG. **5**, except as described below. In exemplary embodiments of the present disclosure, a BAVA **450** (as shown in FIGS. **6**, **16**, **17A**, **17B** and **17C**) of the BAVA unit cell **425** may include a substrate **402**. Further, the BAVA **450** may include a first outer conductor **404**, said first outer conductor **404** being connected to (ex.—configured upon) a first (ex.—top) external surface **406** (ex.—of a first layer/top conductor layer **415**) of the substrate **402**. In current exemplary embodiments of the present disclosure, the BAVA

450 further includes a second outer conductor **407**, said second outer conductor being connected to (ex.—configured upon) a second (ex.—bottom) external surface **409** (ex.—of a third layer/bottom conductor layer **419**) of the substrate **402**. In further embodiments of the present disclosure, the BAVA **450** further includes a third outer conductor **408**, said third outer conductor **408** being connected to (ex.—configured upon) the top external surface **406** (ex.—of the first layer/top conductor layer **415**) of the substrate **402**. In further embodiments of the present disclosure, the BAVA **450** further includes a fourth outer conductor **413**, said fourth outer conductor being connected to (ex.—configured upon the bottom external surface **409** (ex.—of the third layer/bottom conductor layer **419**) of the substrate **402**. In further embodiments of the present disclosure, the BAVA **450** further includes a first embedded conductor **410** and a second embedded conductor **412**, said embedded conductors being embedded within a second layer (ex.—middle conductor layer) **417** of the substrate **402**. In still further embodiments of the present disclosure, the first outer conductor **404**, the second embedded conductor **412** and the second outer conductor **407** are each configured with a plurality of vias **414** formed therethrough for allowing the first outer conductor **404**, the second embedded conductor **412** and/or the second outer conductor **407** to be electrically connected to each other. In still further embodiments of the present disclosure, the third outer conductor **408**, the first embedded conductor **410** and the fourth outer conductor **413** are each configured with a plurality of vias **414** formed therethrough for allowing the third outer conductor **408**, the first embedded conductor **410** and/or the fourth outer conductor **413** to be electrically connected to each other. The third outer conductor **408**, the second embedded conductor **412** and the fourth outer conductor **413** may be formed as additional metallic structures of the BAVA **450**.

In current exemplary embodiments of the present disclosure, the BAVA **450** may include a plurality of feed structures **416**, each configured for providing an electrical feed to the conductors of the BAVA **450**. The BAVAs **450** shown in FIGS. **6** and **16** may promote improved broadband performance, increased capacitance and improved impedance match compared with currently available BAVA designs, without sacrificing modularity. For example, the BAVA **450** may provide VSWR <2.75 across a 9:1 bandwidth. As shown in FIG. **6**, the BAVAs **450** may each be connected with (ex.—engaged within) a metallic post assembly **350**, to provide the BAVA unit cells **425** shown. Still further, the BAVA unit cells **425** may be positioned adjacent to each other as shown to form the antenna array **400**. FIG. **6** shows the BAVAs **450** engaged within the metallic post assembly **350**, however, the U-channel modules **304** of the metallic post assembly **350** are not shown for clarity. FIG. **7** shows a view of the BAVA **450** engaged within the metallic post assembly where the U-channel modules are shown.

Referring to FIG. **8**, a BAVA unit cell **500** in accordance with a further exemplary embodiment of the present disclosure is shown. The BAVA unit cell **500** shown in FIG. **8** may be similar to and/or may be constructed in a manner similar to any one of the other BAVA unit cell embodiments disclosed herein, except as described below. The BAVA unit cell **500** includes a BAVA **502** and a post assembly (ex.—metallic post assembly) **504**, said BAVA **502** configured for being connected to (ex.—engaged with) the metallic post assembly **504**. The metallic post assembly **504** includes a base plate **506** and a plurality of channel modules (ex.—U-channel modules) **508**. The base plate **506** includes a front surface **510** and a rear surface **512**, the channel modules being connected to (ex.—configured upon) the front surface **510**. The base plate

506 is further configured with an aperture (ex.—slot) **514** formed therethrough (ex.—formed through the base plate **506**) as shown in FIG. **8**. The channel modules **508** are configured with (ex.—form) recesses or channels (ex.—U-shaped recesses) **516** which are sized and shaped for receiving (ex.—slidably receiving) edge portions of the BAVA **502**, such that said edge portions of the BAVA **502** may be supported by and/or seated within the channel modules **508** when the BAVA **502** is engaged with the metallic post assembly **504** (as shown in FIG. **9**). Further, the slot **514** of the base plate **506** may be sized and shaped for receiving (ex.—slidably receiving) a portion of the BAVA **502**. Still further, the slot **514**, and the channel modules **508** may be aligned for receiving the BAVA **502** in a front engage manner (ex.—an end portion of the BAVA **502** is inserted into the slot **514** via the front surface **510** of the base plate **506**) as shown in FIG. **8**. The BAVA **502** may include a ground portion **518** for providing a common RF ground with Transmit/Receive (T/R) module (not shown), if necessary. In further embodiments, the BAVA **502** may include a substrate **520**, a plurality of outer conductors **522** and an embedded conductor **524**, said conductors (**522**, **524**) being connected to feed structures **526**, said embedded conductor **524** configured for being connected to Transmit/Receive (T/R) circuitry (ex.—driving circuitry and/or feed manifold assembly). The channel modules (ex.—U-channel modules) **508** of the metallic post assembly **504** shown in FIGS. **8** and **9** are optimized for single polarization.

Referring to FIGS. **10** and **11**, a dual-polarized antenna array (ex.—dual-polarized unit cell) **600** in accordance with an exemplary embodiment of the present disclosure is shown. The array **600** includes a first BAVA **602** and a second BAVA **604**. The first BAVA **602** and the second BAVA **604** may be similar to and/or may be constructed in a manner similar to any one of the BAVA embodiments disclosed herein. For example, the first BAVA **602** includes a substrate **606**. The first BAVA **602** further includes outer conductors **608** and an embedded conductor **610**, said conductors (**608**, **610**) being connected to feed structures **612**. The second BAVA **604** includes a substrate **614**. The second BAVA **604** further includes outer conductors **616** and an embedded conductor **618**, said conductors (**616**, **618**) being connected to feed structures **620**.

The dual-polarized antenna array **600** further includes a cradle assembly (ex.—post assembly) **650**. The cradle assembly **650** includes a first channel module **622**, a second channel module **624**, and a third channel module **626**. The channel modules (**622**, **624**, **626**) are connected via a generally L-shaped frame including a first frame portion **628** connected to a second frame portion **630**. The first channel module **622** has a plurality of recesses (ex.—notches, channels) **634** formed therein, each of the recesses being sized and shaped for receiving (ex.—seating) an edge portion of a BAVA substrate. For example, the first channel module **622** may receive a first edge portion of the substrate **606** of the first BAVA **602**. The recesses **634** of the first channel module **622** may be at least partially separated from each other by mechanical structure **652**. Further, the second channel module **624**, which is connected to the first channel module **622** via the first frame portion **628** of the cradle assembly **650** may have a plurality of channels (**634**, **635**) formed therein, each of the channels being sized and shaped for receiving an edge portion of a BAVA substrate. For example, the second channel module **624** may receive a second edge portion of the substrate **606** of the first BAVA **602**. The recesses **635** of the second channel module **624** may be at least partially separated from each other by mechanical structure **654**. Still further, the first frame portion **628** of the cradle assembly **650** may be configured

with a recess or slot (not shown) formed therein and/or there-through for receiving an end portion (ex.—third edge portion) of the substrate **606** of the first BAVA **602**. For example, the first BAVA **602** may be slidably engaged with the cradle assembly **650** such that the first edge portion, the second edge portion, and the third edge portion of the substrate **606** of the first BAVA **602** are received (ex.—seated and/or supported) within the channel **634** of the first channel module **622**, a first channel **634** included in the plurality of channels of the second channel module **622**, and the slot or channel (not shown) of the first frame portion, respectively.

In further embodiments of the present disclosure, the second channel module **624** includes a second channel **635**. For example, the second channel **635** may receive a first edge portion of the substrate **614** of the second BAVA **604**. The third channel module **626**, which is connected to the second channel module **624** via the second frame portion **630** of the cradle assembly **650** may have a plurality of channels **636** formed therein, each of the channels being sized and shaped for receiving an edge portion of a BAVA substrate. For example, the third channel module **626** may receive a second edge portion of the substrate **614** of the second BAVA **604**. The recesses **636** of the third channel module **626** may be at least partially separated from each other by mechanical structure **656**. Still further, the second frame portion **630** of the cradle assembly **650** may be configured with a recess or slot (not shown) formed therein and/or therethrough for receiving an end portion (ex.—third edge portion) of the substrate **614** of the second BAVA **604**. For instance, the second BAVA **604** may be slidably engaged with the cradle assembly **650** such that the first edge portion, the second edge portion, and the third edge portion of the substrate **614** of the second BAVA **604** are received (ex.—seated and/or supported) within the second channel **635** of the second channel module **624**, a channel **636** included in the plurality of channels of the third channel module **624**, and the slot or channel (not shown) of the second frame portion, respectively. When the first BAVA **602** and the second BAVA **604** are engaged within the cradle assembly **650**, the dual-polarized antenna array (ex.—dual-polarized unit cell) **600** is formed, with the first BAVA **602** providing (ex.—acting as) a vertical polarization BAVA input and the second BAVA **604** providing (ex.—acting as) a horizontal polarization BAVA input for the array **600**. Further, when the first BAVA **602** and the second BAVA **604** are engaged within the cradle assembly **650**, the first BAVA **602** may be oriented perpendicular to the second BAVA **604** as shown in FIGS. **10** and **11**. In further embodiments of the present disclosure, the frame portions (**628**, **630**) may be configured as part of and/or may be connected to base plates (not shown), such as the base plates of the post assembly (ex.—metallic post assembly) embodiments described herein. In alternative embodiments of the present disclosure, the channel modules (**622**, **624**, **626**) and the channels **636** of the channel modules (**622**, **624**, **626**) may be varying shapes and/or sizes. For example, FIG. **20** illustrates a channel module **1000** which may be constructed to have (to form) one or more recesses (ex.—U-shaped channel) **1025** which extend or run the full length of the channel module **1000** (ex.—and may extend through front and rear ends of the channel module **1000**) for allowing front or rear insert of a BAVA substrate into the channel module **1000**. The recesses **1025** of the channel module **1000** may be at least partially separated from each other by mechanical structure **1030**. Further, FIG. **21** illustrates a channel module **1050** which is constructed such that the recesses **1075** are through recesses which extend the full length and width of the channel module **1050** and extend through the channel module **1050** (ex.—said recesses **1075**

are not separated from each other via a mechanical structure. There are various shapes, sizes and configurations which may be implemented for the channel modules and their channels. In further embodiments of the present disclosure, the channels may not run the full length of the channel module and the ground plane may have a smaller slot.

Referring to FIGS. **12** and **15**, a dual-polarized antenna array (ex.—dual-polarized unit cell) **700** in accordance with a further exemplary embodiment of the present disclosure is shown. The array **700** includes a first BAVA **702** and a second BAVA **704**. The first BAVA **702** and the second BAVA **704** may be similar to and/or may be constructed in a manner similar to any one of the BAVA embodiments disclosed herein, except as described below. For example, the first BAVA **702** includes a substrate **706**. The first BAVA **702** further includes outer conductors **708** and an embedded conductor **710**, said conductors (**708**, **710**) being connected to feed structures (**712**, **714**) (as shown in FIG. **13**). The second BAVA **704** includes a substrate **716**. The second BAVA **704** further includes outer conductors **718** and an embedded conductor **720**, said conductors (**718**, **720**) being connected to feed structures (**722**, **724**) (as shown in FIG. **14**).

The dual-polarized antenna array **700** further includes a cradle assembly (ex.—post assembly, metallic post assembly) **750**. The cradle assembly **750** includes a first channel module **726**, a second channel module **728**, a third channel module **730** and a fourth channel module **732**. The channel modules (**726**, **728**, **730**, **732**) are connected to (ex.—configured upon) a base plate **734**. Each of the channel modules (**726**, **728**, **730**, **732**) has a recess (ex.—notch, channel) **736** formed therein, each of the channels **736** being sized and shaped for receiving (ex.—seating) an edge portion of a BAVA substrate. For example, the channel **736** of the first channel module **726** may receive a first edge portion of the substrate **706** of the first BAVA **702**. Further, the channel **736** of the second channel module **728** may receive a second edge portion of the substrate **706** of the first BAVA **702**. Further, the channel **736** of the third channel module **730** may receive a first edge portion of the substrate **716** of the second BAVA **704**. The channel **736** of the fourth channel module **732** may receive a second edge portion of the substrate **716** of the second BAVA **704**. The base plate **734** may be configured with one or more slot(s) **738** formed therein and/or there-through, said slot(s) being configured for receiving third edge portion(s) (ex.—end portion(s)) of the first BAVA **702** and/or the second BAVA **704**. In an exemplary embodiment of the present disclosure, the slots **738** of the base plate **734** may be configured in an orthogonal orientation relative to each other. For example, the first BAVA **702** may be slidably engaged with the cradle assembly **750** such that the first and second edge portions of the substrate **706** may be received (ex.—seated within) the channels **736** of the first channel module **726** and the second channel module **728** respectively (as shown in FIG. **12**). Further, the second BAVA **704** may be slidably engaged with the cradle assembly **750** such that the first and second edge portions of the substrate **716** may be received (ex.—positioned within) the channels **736** of the third channel module **730** and the fourth channel module **732** respectively (as shown in FIG. **12**).

In further embodiments of the present disclosure, the substrate **706** of the first BAVA **702** is configured with a slot (ex.—notch) **740** (as shown in FIG. **13**) and the substrate **716** of the second BAVA **704** is also configured with a slot (ex.—notch) **742** (as shown in FIG. **14**). The slots (**740**, **742**) allow for interleaving (ex.—along the centers rather than the edges) of the BAVAs (ex.—BAVA elements) **702**, **704**, such that: the slot **740** of the substrate **706** of the first BAVA **702** is sized and

shaped for receiving a portion of the substrate **716** of the second BAVA **704**; and the slot **742** of the substrate **716** of the second BAVA **704** is sized and shaped for receiving a portion of the substrate **706** of the first BAVA **702**. For example, the slots (**740**, **742**) of the substrates (**706**, **716**) allow the BAVAs (ex.—BAVA elements) **702**, **704** to be orthogonally positioned relative to each other as shown in FIGS. **12** and **15** when received within the cradle assembly **750**. The first BAVA **702** and the second BAVA **704** may be linearly-polarized elements. The first BAVA **702** may be a horizontal polarization element, while the second BAVA **704** may be a vertical polarization element. The dual-polarized antenna array **700** shown in FIGS. **12** and **15** provides a coincident phase center, ultra wide band (UWB) electronically scanned array (ESA) which provides polarization agility and diversity. Depending on the excitation coefficients, the array **700** may have dual-linear polarization, slant polarization and circular polarization. Further, the elements **702**, **704** do not interfere with each other mechanically, or electrically. The configuration of the array **700** brings excitation lines close (ex.—fed by planar circuit rather than perpendicular circuit). Further, the array **700** may alleviate issues of polarization purity degrading at off-broadside angles. Still further, the cradle assembly **750** may be configured for facilitating the transition between the radiating elements (**702**, **704**) and a Transmit/Receive (T/R) module and/or feed manifold (not shown).

Referring to FIG. **18**, an asymmetric BAVA having multi-stage fins and additional metallic structures of (exs.—on or within) the conductor layers of the substrate of the BAVA in accordance with an exemplary embodiment of the present disclosure is shown. The asymmetric BAVA **800** may have one or more characteristics of one or more of the BAVA embodiments described above. In an exemplary embodiment of the present disclosure, the asymmetric BAVA **800** may include a substrate **802**. The BAVA **800** may further include a first outer conductor **804**, said first outer conductor **804** being connected to (ex.—configured upon) a first (ex.—top) external surface **806** (ex.—of a first layer/top conductor layer **815**) of the substrate **802**. In current exemplary embodiments of the present disclosure, the BAVA **800** further includes a second outer conductor **807**, said second outer conductor **807** being connected to (ex.—configured upon) a second (ex.—bottom) external surface **809** (ex.—of a third layer/bottom conductor layer **819**) of the substrate **802**. In further embodiments of the present disclosure, the BAVA **800** further includes additional structures (ex.—additional metallic structures) such as a third outer conductor **808** and a fourth outer conductor **813**, said third outer conductor **808** being connected to (ex.—configured upon) the top external surface **806** (ex.—of the first layer/top conductor layer **815**) of the substrate **802**, said fourth outer conductor **813** being connected to (ex.—configured upon) the bottom external surface **809** (ex.—of the third layer/bottom conductor layer **819**) of the substrate **802**. In further embodiments of the present disclosure, the BAVA **800** further includes a first embedded conductor **810** and a second embedded conductor **812** said embedded conductors (**810**, **812**) being embedded within a second layer (ex.—middle conductor layer) **817** of the substrate **802**. In still further embodiments of the present disclosure, the conductors (**804**, **807**, **808**, **810**, **812**, **813**) may be configured with a plurality of vias (not shown) formed there-through for allowing each of said conductors to be electrically connected to one or more of the remaining said conductors. As shown in FIG. **18**, the BAVA **800** may be an asymmetric BAVA **800** such that the third outer conductor **808**, the first embedded conductor **810** and the fourth outer conductor **813** may each be oriented such that they are more proximally

located to (ex.—extend further towards) a top edge **825** of the substrate **802** compared to the first outer conductor **804**, the second outer conductor **807** and the second embedded conductor **812**. The third outer conductor **808**, the second embedded conductor **812** and the fourth outer conductor **813** may be formed as additional metallic structures for the BAVA **800**.

Referring to FIG. **19**, a BAVA unit cell (ex.—BAVA unit and post cell) in accordance with a further exemplary embodiment of the present disclosure. The BAVA unit cell **900**, which includes a BAVA **925** engaged within a post assembly **950** may be similar to (ex.—may include one or more characteristics of) the BAVA unit cell **500** shown in FIG. **8**, except that the BAVA **925** of the BAVA unit cell **900** shown in FIG. **19** may have multi-stage fins and additional metallic structures in the conductor layers of the substrate, such as BAVAs (**450**, **800**) described above.

In further embodiments of the present disclosure, the conductors (ex.—outer conductors and embedded conductors) of a BAVA may have different shapes and sizes relative to each other. FIG. **22** illustrates a BAVA **1100** in which an outer conductor **1125** of the BAVA **1100** is shaped differently (ex.—occupies a larger footprint on or within the substrate **1175**) than the embedded conductor **1150**. Many different sizes, shapes and configurations may be used for the conductors of the BAVAs.

In still further embodiments of the present disclosure, conductive stripes assembly may be printed on additional substrate material which may be laminated onto the original BAVA structure. The conductive stripes assembly may include a plurality of arbitrary shapes to imitate the capacitive coupling effect of the U-shaped channels. In further embodiments of the present disclosure, the conductors (outer and embedded) may be formed of metal (ex.—may be metallic conductors).

In further embodiments of the present disclosure, tiling of a BAVA subarray may be done in order to realize an electrically large aperture. For example, a dual orthogonal polarization BAVA unit cell subarray tile may be created, said tile having m×n (row by column) dual polarization BAVA elements. In an exemplary embodiment of the present disclosure, the subarray tile is a building block for a modular, electrically large, electronically scanned antenna. Each subarray tile includes a ground plane, said ground plane of each subarray tile being slotted for accepting BAVA elements. Each subarray tile includes a mechanism for mechanically and electrically connecting to its contiguous neighbor subarray tiles and/or to a mounting plate to provide adequate mechanical structure and/or continuous electrical grounding.

The antenna enhancements provided by this disclosure can be applied to the geometry of elements of a conventional Vivaldi antenna and any Vivaldi-like, dipole like, antenna structure (such as AVA, BAVA, double-dipole antenna, Bunny-ear antenna, or bow-tie antennas.)

The Balanced Antipodal Tapered Slot Antenna (ex.—BAVA/BAVA antenna) and/or Balanced Antipodal Tapered Slot Antenna Array (ex.—BAVA array/BAVA antenna array) embodiments described herein provide low cost, lightweight, low profile, wideband, wide-scan, phased arrays which may be realized by a modular of radiating elements for military and commercial applications. Further, by utilizing the novel element edge treatments to the BAVA radiating elements as described herein, the embodiments of the present disclosure allow for realization of specific performance enhancements (ex.—Ultra Wide Band (UWB) and high dual polarization isolation) with electrically short BAVA ESA apertures. The BAVA and/or BAVA array embodiments described herein may be implemented in Department of Defense UAS appli-

cations, including Miniature Synthetic Aperture Radar (miniSAR), Sense-And-Avoid Radar, miniature Common Data Link (mini-CDL) systems, Electronic Warfare (EW) systems, Satellite Communications (SATCOM) systems, land mobile systems, maritime and airborne Ka Band Data Link systems (ex.—Military Strategic and Tactical Relay (MILSTAR) systems), integrated Global Broadcast Service (GBS)/MILSTAR systems, Ku Band Digital Beam Forming (Ku Band DBF) systems, wideband Electronically Scanned Antenna (ESA) systems, commercial airborne Ku/Ka Broadband Connectivity SATCOM X/Ka band meteorological radar/mmWave imaging systems.

It is believed that the present invention and many of its attendant advantages will be understood by the foregoing description. It is also believed that it will be apparent that various changes may be made in the form, construction and arrangement of the components thereof without departing from the scope and spirit of the invention or without sacrificing all of its material advantages. The form herein before described being merely an explanatory embodiment thereof, it is the intention of the following claims to encompass and include such changes.

What is claimed is:

1. A dual-polarized antenna array, comprising:

a first Balanced Antipodal Vivaldi Antenna (BAVA);

a second BAVA; and

a cradle assembly, the cradle assembly configured for receiving the first BAVA and the second BAVA, the cradle assembly including a first channel module, a second channel module, and a third channel module, the first, second and third channel modules being connected to a frame of the cradle assembly, each channel module of the first, second, and third channel module including two or more channels at least partially separated from each other via at least one mechanical structure, the frame including a first frame portion connected to a second frame portion,

wherein the first and second channel modules are configured for receiving a substrate of the first BAVA, the second and third channel modules being configured for receiving a substrate of the second BAVA, the first BAVA being a vertical polarization element, and the second BAVA being a horizontal polarization element;

wherein the first frame portion includes an aperture configured for receiving a first edge portion of the substrate of the first BAVA, and the second frame portion includes an aperture configured for receiving a second edge portion of the substrate of the second BAVA.

2. A dual-polarized unit cell as claimed in claim 1, wherein a first channel module included in the plurality of channel modules is configured for receiving, via a channel of the first channel module, a third edge portion of the substrate of the first BAVA.

3. A dual-polarized unit cell as claimed in claim 2, wherein a second channel module included in the plurality of channel modules is configured for receiving, via a first channel of the second channel module, a fourth edge portion of the substrate of the first BAVA.

4. A dual-polarized unit cell as claimed in claim 3, wherein the second channel module is further configured for receiving,

via a second channel of the second channel module, a fifth edge portion of the substrate of the second BAVA.

5. A dual-polarized unit cell as claimed in claim 4, wherein a third channel module included in the plurality of channel modules is configured for receiving, via a channel of the third channel module, a sixth edge portion of the substrate of the second BAVA.

6. A dual-polarized unit cell as claimed in claim 5, wherein the channels of the first, second and third channel modules are U-shaped channels.

7. A dual-polarized unit cell as claimed in claim 6, wherein the first edge portion is positioned within the channel of the first channel module, the third edge portion is positioned within the first channel of the second channel module, the second edge portion is positioned within the second channel of the second channel module, the fifth edge portion is positioned within the channel of the third channel module, the fourth edge portion is positioned within the aperture of the first frame portion, and the sixth edge portion is positioned within the aperture of the second frame portion, the substrate of the first BAVA being oriented perpendicular to the substrate of the second BAVA.

8. A dual-polarized antenna array, comprising:

a first Balanced Antipodal Vivaldi Antenna (BAVA);

a second BAVA; and

a cradle assembly, the cradle assembly configured for receiving the first BAVA and the second BAVA, the cradle assembly including a first channel module, a second channel module, and a third channel module, the first, second and third channel modules being connected to a frame of the cradle assembly, each channel module of the first, second, and third channel module including two or more channels at least partially separated from each other via at least one mechanical structure, the frame including a first frame portion connected to a second frame portion,

wherein a U-shaped channel of the first channel module receives a first edge portion of a substrate of the first BAVA, a first U-shaped channel of the second channel module receives a second edge portion of the substrate of the first BAVA, a second U-shaped channel of the second channel module receives a first edge portion of a substrate of the second BAVA, a channel of the third channel module receives a second edge portion of the substrate of the second BAVA, and the first frame portion includes an aperture configured for receiving a third edge portion of the substrate of the first BAVA, and the second frame portion includes an aperture configured for receiving a third edge portion of the substrate of the second BAVA, the first BAVA being a vertical polarization element, and the second BAVA being a horizontal polarization element, the substrate of the first BAVA being oriented perpendicular to the substrate of the second BAVA.

* * * * *