



(51) International Patent Classification:

H01Q 3/00 (2006.01) *H01Q 3/26* (2006.01)
H01Q 1/12 (2006.01)

(21) International Application Number:

PCT/US2017/030830

(22) International Filing Date:

03 May 2017 (03.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/331,703 04 May 2016 (04.05.2016) US

(71) Applicant: **COMMSCOPE TECHNOLOGIES LLC** [US/US]; 1100 CommScope Place SE, Hickory, North Carolina 28602 (US).

(72) Inventors: **MEYER, Louis John**; 1100 CommScope Place SE, Hickory, North Carolina 28602 (US). **MICHAELIS, Scott Lynn**; 1100 CommScope Place SE, Hickory, North Carolina 28602 (US). **BUTLER, Ray K.**; 1100 CommScope Place SE, Hickory, North Carolina 28602 (US).

(74) Agent: **CANNON, James R.**; MYERS BIGEL, P.A., PO Box 37428, Raleigh, North Carolina 27627 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: SYSTEM AND METHOD OF ADJUSTING ANTENNA BEAM ON ANTENNA TOWER

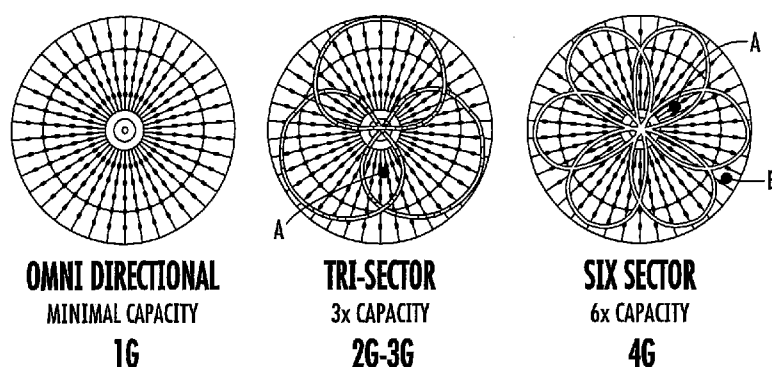


FIG. 1

(57) Abstract: An antenna with adjustable tilt angle includes: a mounting structure; an antenna mount fixed to the mounting structure; an antenna mounted to the antenna mount, the antenna configured to produce an antenna beam; a remote electrical tilt (RET) unit operatively associated with the antenna to adjust a pointing tilt angle of the antenna beam; a tilt pointing direction sensor mounted to the antenna, the pointing direction tilt sensor configured to detect the a pointing angle of the antenna relative to a baseline standard; and a controller operatively connected with the RET unit and the pointing direction tilt sensor, the controller configured to receive signals from the pointing direction tilt sensor and transmit signals to the RET unit to adjust the tilt pointing angle of the antenna beam based on the detected angle of the antenna.

Published:

— *with international search report (Art. 21(3))*

SYSTEM AND METHOD OF ADJUSTING ANTENNA BEAM ON ANTENNA TOWER

CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present application claims priority to U.S. Provisional Patent Application Serial No. 62/331,703, filed May 4, 2016, the entire content of which is incorporated by reference herein as if set forth in its entirety.

FIELD OF THE INVENTION

[0002] The invention is directed generally to cellular communications systems, and more particularly to base station antennas for cellular communications systems.

BACKGROUND

[0003] Sectors for cellular networks have evolved over time, with the number of sectors increasing over time. **FIG. 1** schematically illustrates three different versions of cellular antenna configurations: an omnidirectional single antenna (common for 1G communications); a tri-sector system in which each of three antennas covers approximately 120 degrees in the azimuth plane (more common for 2G and 3G communications); and a six-sector system in which each antenna covers approximately 60 degrees in the azimuth plane (designed for 4G/LTE and newer systems). Three-sector systems are still relatively common with 4G communications, but 6-sector configurations are becoming more popular as time goes on (and even higher numbers of sectors) are possible.

[0004] The performance of a cellular base station in the regions of the coverage area for the base station that are between adjacent sectors (one such region is identified in **FIG. 1** at dot **A**) where the beams slightly overlap is becoming critical. Long Term Evolution (LTE) systems require that the size of these areas be reduced as much as possible so that interference from one sector to another is reduced or minimized. Reducing the area of overlap may be achieved by using narrower antenna beams. However, as the beams become more narrow, the beam pointing direction (both in the azimuth and elevation planes) becomes more critical to avoid interference and/or gaps in coverage. A representative gap in coverage is illustrated in **FIG. 1** in the six sector image at dot **B**. As can be seen, these coverage gap areas refer to areas where none of the antenna beams provide coverage to the area. It may be possible to arrange an adjacent cell site such that the gaps in coverage are “filled in” by the antenna beam from the adjacent cell site.

[0005] Some network operators use network planning tools to plan for the number of sectors, desired antenna beam shapes etc. They input the possible location of the cellular base station, population and crowd information, terrain, etc., then simulate predicted coverage and iterate on antenna models, pointing directions, radio power levels etc. to achieve the best possible predicted coverage area for the base station. They then order the base station antennas that will produce antenna beams having the necessary beamwidths, gains etc. that the planning tools indicated. They then generate instructions as to which antennas get installed on which tower, the azimuth angles to which each antenna should be pointing, and the downtilt in the elevation plane (if any) for each antenna. The installers then install the base station antennas on the towers or building tops using external tools to point the antennas to the specified directions in the azimuth and elevation planes.

[0006] There are some perceived shortcomings of these systems. In some instances, the installers may misalign the base station antenna during installation, with the pointing direction being off by, for example, several degrees. In other instances, the antenna may be installed correctly but then moved due to wind, an accidental bump by a technician, or some other event, such that the antenna is no longer pointing where it should be. In further instances, the technicians may make an error in data recording, with the result that the operator thinks that the antenna is installed differently than it actually is. In still further instances, the location of the tower may be slightly off (e.g., by several meters or more), such that the beam is not pointing exactly where it should be.

[0007] Further complicating matters, on some support structures (especially monopoles), the sway at 60 mph wind conditions can approach ± 2 degrees and at 90 mph can be as severe as ± 8 degrees. The amount of sway may be a function of, among other things, the structural integrity and height of the tower. Thus, the sway of the mounting structure may be sufficient to negatively impact antenna performance. In addition, in many instances mounting hardware that was designed to support, for example, antennas is now being used to additionally mount several remote radio units (RRUs). This added weight and wind loading is causing antenna mounts (and hence the antennas attached thereto) to move an additional amount in windy conditions, thereby exacerbating performance issues.

SUMMARY

[0008] As a first aspect, embodiments of the invention are directed to an antenna, comprising: a mounting structure; an antenna mount fixed to the mounting structure; an antenna mounted to the antenna mount, the antenna configured to produce an antenna beam; a remote electrical tilt (RET) unit operatively associated with the antenna to adjust a pointing angle of the antenna beam; a pointing direction sensor mounted to the antenna, the pointing direction sensor configured to detect a pointing angle of the antenna relative to a baseline standard; and a controller operatively connected with the RET unit and the pointing direction sensor, the controller configured to receive signals from the pointing direction sensor and transmit signals to the RET unit to adjust the pointing angle of the antenna beam based on the detected angle of the antenna.

[0009] As a second aspect, embodiments of the invention are directed to a method of adjusting a pointing direction of an antenna, comprising the steps of: providing an antenna mounted to a mounting structure, a pointing direction sensor mounted to the antenna, the antenna producing an antenna beam in a first direction; transmitting signals from the pointing direction sensor to a controller regarding a pointing direction of the antenna relative to a baseline standard; and transmitting signals from the controller to a remote electrical tilt (RET) unit operatively associated with the antenna directing the antenna to electronically adjust a pointing direction of the antenna beam to a second pointing direction that differs from the first pointing direction, the second pointing direction being selected based on the signals transmitted by the pointing direction sensor.

[0010] As a third aspect, embodiments of the invention are directed to an adjustable antenna, comprising: a mounting structure; an antenna mount fixed to the mounting structure; an antenna mounted to the antenna mount, the antenna configured to produce an antenna beam; an automated adjustment unit operatively associated with the antenna to adjust at least one of tilt, roll and azimuth of the antenna beam; a sensor mounted to the antenna, the sensor configured to detect at least one of tilt, roll and azimuth of the antenna relative to a baseline standard; and a controller operatively connected with the automated unit and the sensor, the controller configured to receive signals from the sensor and transmit signals to the automated adjustment unit to adjust the tilt, roll or azimuth angle of the antenna beam based on the detected orientation of the antenna.

[0011] As a fourth aspect, embodiments of the invention are directed to an active antenna, comprising: a phased array antenna that includes an array of radiating elements that are arranged as a plurality of sub-arrays of radiating elements, each sub-array including at least one radiating element, the phase array antenna being configured to generate at least a first antenna beam; a plurality of active radios, each active radio coupled to a respective one of the sub-arrays; a sensor system mounted within, on or adjacent the phased array antenna, the sensor system configured to detect at least one of tilt angle, roll angle and azimuth angle of the phased array antenna relative to one or more baseline standards; and a controller that is configured to receive signals from the sensor system and transmit signals to one or more of the active radios to electronically adjust one or more of the tilt angle, roll angle or azimuth angle of the first antenna beam based on a detected orientation of the phased array antenna.

BRIEF DESCRIPTION OF THE FIGURES

[0012] **FIG. 1** is a schematic diagram showing three different antennas (an omnidirectional antenna, a three-sector antenna, and a six-sector antenna) and exemplary antenna beam patterns for each in the azimuth plane.

[0013] **FIG. 2** is a schematic diagram of an antenna tower with an antenna mounted thereto in windless conditions, showing the antenna beam with an elevation angle downtilt of -4 degrees to horizontal.

[0014] FIG. 3 is a schematic diagram of the antenna tower and antenna of FIG. 2 in windy conditions, showing how wind can increase downtilt of the antenna beam to an unacceptable orientation relative to horizontal.

[0015] FIG. 4 is a schematic diagram of an antenna tower and antenna mounted thereto with a tilt sensor according to embodiments of the invention.

[0016] FIG. 5 is a schematic diagram of the antenna tower and antenna of FIG. 4, showing how adjustment of the beam orientation based on the tilt sensor mounted to the antenna can provide an acceptable beam downtilt angle under windy conditions.

[0017] FIG. 6 is a schematic block diagram of an active antenna according to embodiments of the present invention.

DETAILED DESCRIPTION

[0018] The present invention is described with reference to the accompanying drawings, in which certain embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments that are pictured and described herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. It will also be appreciated that the embodiments disclosed herein can be combined in any way and/or combination to provide many additional embodiments.

[0019] Unless otherwise defined, all technical and scientific terms that are used in this disclosure have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The terminology used in the below description is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used in this disclosure, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that when an element (e.g., a device, circuit, etc.) is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements may be present. In contrast, when an element is referred to as being "directly connected" or "directly coupled" to another element, there are no intervening elements present.

[0020] Referring now to the drawings, a phased array antenna 10 mounted on a monopole 12 via an antenna mount 13 under windless conditions is shown in FIG. 2. A typical

antenna beam is shown schematically at **14** with a downtilt of -4 degrees from horizontal. **FIG. 3** shows the same antenna **10** under typical high wind conditions. It would not be unusual for the monopole **12** to sway as much as +/-2 degrees under windy conditions. Moreover, the mount may also capture the wind and cause additional sway of +/-6 degrees, such that the antenna **10** sways a total of +/-8 degrees. Adding this -8 degrees of tilt in the elevation plane to the original -4 degrees of downtilt of the beam **14**, the beam **14** is oriented at -12 degrees relative to horizontal, which can significantly impact antenna performance. Likewise, when the sway is in the opposite direction, adding +8 degrees of tilt in the elevation plane to the original -4 degrees of downtilt of the beam **14**, the beam **14** is oriented at +4 degrees relative to horizontal, which again can significantly impact performance, particularly in terms of interference with adjacent cellular base stations.

[0021] Referring now to **FIG. 4**, an antenna **110** mounted on a monopole **112** via an antenna mount **113** is shown therein. A tilt sensor **120** is mounted to the antenna **110** to sense the orientation (i.e., the tilt in the elevation plane) of the antenna **110**. The tilt sensor **120** can monitor the sway of the complete mounting system (tower plus mounts) in each antenna sector (typically three sectors are present, although only one antenna is shown herein). The tilt sensor **120** can be any sensor that detects the orientation of the antenna relative to horizontal or another baseline standard (i.e., the degree of uptilt/downtilt in the antenna **110**). Exemplary sensors include accelerometers, gyros, and 9-degree of freedom sensors.

[0022] Pursuant to some embodiments of the present invention, the tilt readings from the tilt sensor **120** can be used to adjust the Remote Electrical Tilt (RET) settings of, for example, a high-band LTE antenna in order to counteract the sway in each antenna sector. RET units (one is shown schematically at **130** in **FIG. 4**) are well known in the art and are used to adjust the phases of the sub-components of a radio frequency (RF) signal that are transmitted or received through the respective individual radiating elements of a phased array antenna based on control signals from a remote location in order to redirect the antenna beam at a desired elevation angle. Adjustable phase shifters are provided in the antenna **110** that perform the phase adjustments that modify the elevation angle. An exemplary RET unit is described in U.S. Patent No. 8,558,739, the disclosure of which is hereby incorporated herein in its entirety. A controller **140** receives the data from the tilt sensor **120**, processes the data, and signals the RET unit **130** to adjust the beam of the antenna **110** accordingly by adjusting the phase shifters on the antenna **110**. It

should be noted that while the acronym "RET" stands for "remote electrical tilt", that term is used herein to a unit that may be used to electronically adjust a pointing direction of a beam of an antenna, and is not limited to units that can solely adjust a "tilt" or elevation angle of the antenna. For example, in some embodiments, the RET unit may be used to electronically adjust an azimuth pointing direction of an antenna beam.

[0023] It will be appreciated that in order to correct for sway caused by wind, it will be necessary to very quickly detect the sway, determine the necessary adjustments to the phase shifters that will counteract the sway, provide control signals to the RET unit to adjust the settings on the phase shifters and then adjust those phase shifter settings so that the electronic downtilt applied tracks and corrects for the sway in real time. Most conventional phase shifters used in base station antennas are electro-mechanical phase shifters such as the phase shifters disclosed in the above-referenced U.S. Patent No. 8,558,739. The response times of these phase shifters (i.e., how quickly they can be programmed to change the electronic downtilt angle for an associated base station antenna) is typically too slow to compensate for the sway of an antenna due to windy conditions. However, various electronic phase shifters are now available and/or in development that may have much faster response times allowing the downtilt of the antenna to be continually adjusted in response to data received from a tilt sensor in order to compensate for sway.

[0024] In some embodiments, an interface circuit is present to enable the sensor output to communicate with a desired (Antenna Interface Standards Group (AISG) protocol to transmit the data output from the tilt sensor 120 to the controller 140. In other embodiments, alternative signaling techniques may be used. In some embodiments, each base station antenna 110 may have an integrated tilt sensor 120 that provides tilt information directly to a controller in the base station antenna 110 (not shown) and the controller in the base station antenna 110 may use the tilt information to determine the settings for the phase shifters in the antenna 110 that compensate for the sway and control the phase shifters to adjust to the new settings. In this fashion, electronic phase shifters may be used to adjust the downtilt of each base station antenna 110 in order to compensate for sway of the antenna tower 112 and/or antenna mount 113 that results, for example, because of windy conditions. In this fashion, the elevation angle of each base station antenna 110 may be maintained in a desired pointing direction, which enhances

coverage and reduces interference with base station antennas in adjacent sectors and/or adjacent cells.

[0025] In some embodiments, it may be desirable for the antenna **110** to be configured to be capable of producing an uptilted beam (i.e., to have an elevation angle of greater than zero). Typically antennas are configured to produce a downtilted beam (measured when the structure to which the antenna is mounted is in windless conditions and thus is still and stable), as doing so provides better performance for the antenna network by producing lower levels of interference between adjacent cellular base stations. However, as discussed above in connection with **FIG. 3**, the extent of sway of the antenna due to wind may be sufficient to re-orient an antenna beam as much as ± 8 degrees or more. Therefore, in this system the antenna **110** may be designed with both uptilt and downtilt capabilities in order to counteract both positive and negative mounting structure sway. In some embodiments, the system may be capable of tilting the antenna over a range of at least 20 degrees relative to horizontal. Also, in some embodiments the system may be configured to provide at least 5 degrees of uptilt to the beam relative to horizontal, and in some embodiments at least 8 degrees.

[0026] The RET unit **130** may be of any type recognized by those of skill in this art to be suitable for use in remotely adjusting the tilt of an antenna beam. For example, some current RET units are electromechanical and adjust the positions of components of the antenna to modify the beam tilt. Such a system (as designed today) may not be real-time, as it could soon exceed the total number of adjustments allowed for acceptable mechanical fatigue/cycle performance. Thus, a system may only adjust the angle of the antenna beam via the RET unit **130** when sensor data indicates a pre-determined differential from normal is exceeded (e.g., ± 3 degrees) and/or after a short time delay prior to re-adjustment to avoid physical wear on the parts. The RET unit **130** may also be an electronic system (i.e., having no moving parts), which can make the required changes in real time with no fear of mechanical failure, thereby enabling the system to adjust the beam elevation angle based on active swaying of the tower/antenna.

[0027] **FIG. 5** demonstrates how the tilt sensor **120** can adjust the antenna **110** to produce an acceptable antenna beam under windy conditions. The antenna **110** in **FIG. 5** is subjected to the same wind conditions as the antenna **10** in **FIG. 3**, which cause a sway of -8 degrees at the antenna **110**. However, rather than producing a beam **114** at an unacceptable beam angle of -12 degrees as in **FIG. 2**, the beam angle of the antenna **110** in **FIG. 5** is adjusted.

The tilt sensor **120** provides data that indicates -8 degrees of sway to the controller **140**. Based on instructions from the controller **140**, the RET unit **130** then adjusts the beam angle of the antenna **110** with 8 degrees of uptilt relative to the antenna **110**, to produce a beam **114'** that exits the antenna **110** at an acceptable -4 degrees relative to the horizon.

[0028] Variations and enhancements of the system described and illustrated herein are contemplated. For example, the sensor **120** may have the capability of also sensing azimuth and/or roll angle and therefore can provide information that enables the antenna adjustments to be performed. Phased array antennas that have more than one vertical array of radiating elements are being deployed and/or developed for 4G and 5G applications. When a phased array antenna has multiple vertical columns of radiating elements, phase shifters may be included in the antenna that allow for electronic adjustment of the azimuth pointing angle of the antenna, which is referred to as beam steering. The location and elevation (height) of the antenna **110** are known. The sensor **120** can provide information about the azimuth, downtilt and roll of the antenna. Many of the technical challenges outlined above regarding sector coverage may be overcome by allowing an antenna to self-point as much as possible via an automated adjustment unit. An installer can mount the antenna **110** on the top of the monopole **112** or tower in generally the right direction. The antenna **110** can then establish its latitude, longitude, elevation (and infer the height above ground if it is told or can obtain the average terrain elevation for its sector), and determine its azimuth, tilt and roll from the sensor **120**. The antenna **120** can then, through an automated adjustment unit, steer the antenna beam at a "target" it has been given by adjusting the settings of phase shifters that set the electronic tilt of the antenna beam and the azimuth pointing angle of the antenna beam. The target may be a latitude, longitude and altitude coordinate for the center of the beam, a 3dB point at boresight, a 3, 6, 10 or 12 dB crossover point between sectors, or another suitable target. The adjustment unit can then monitor changes over time and adjust the antenna **110** to keep the beam pointed at the target.

[0029] As one example, "beacons" may be physically placed in the center of the cell or on the edge of the coverage area. These beacons may receive signals transmitted by the base station antennas, measure the received signal strength or other such parameters of the RF signals transmitted by the base station antenna, and then transmit information about beam strength observed back to the base station antenna and/or related equipment at the base station. This data could be used to automatically adjust (a) just the tilt or (b) the tilt, azimuth and beamwidth of the

antenna 110. The beacons may then be removed after the set-up is complete, or may be employed more permanently to provide real-time feedback.

[0030] Similar adjustments may also be carried out when the antenna is in operation, once again avoiding the need for a technician to climb the tower to manually adjust the antenna 110. For example, data from a self-optimizing network (SON) that collects performance data from user handsets and recommends antenna adjustments that may be employed may be used to determine the adjustments that are made to the tilt (elevation) angle and/or the azimuth angle of each base station antenna. Such performance data may be effective at identifying and correcting static problems with the antenna pointing direction that may result from mis-installation or other factors that result in a permanent change of the antenna pointing direction over time. Other external sources may also provide data that is employed by the automated adjustment unit to determine how the tilt, roll and/or azimuth of the antenna should be adjusted.

[0031] Installers' time on a tower installing an antenna is typically very expensive. Reducing the overall antenna installation time by eliminating the need for the installer to adjust azimuth, downtilt and/or roll while on a tower can reduce any additional expense of a "smart" antenna. Since the antennas according to embodiments of the present invention may be configured to, for example, automatically correct for antenna mis-alignment issues by electronically adjusting the pointing angle of the antenna, the number of tower climbs and the associated expense of such tower climbs may be reduced.

[0032] The use of active antennas is also increasing with the development and deployment of 4G and 5G technology. An exemplary active antenna may include radios and power amplifiers for each individual radiating element of the phased array, or for sub-arrays of multiple radiating elements (but less than all of the radiating elements). The use of active antennas allows digital beamforming where the phases of the RF signals supplied to different radiating elements or sub-arrays of radiating elements may be adjusted at the radios to perform, for example, electrical downtilts and/or adjustment of the azimuth pointing direction or the beamwidth of the antenna beam.

[0033] Pursuant to further embodiments of the present invention, active base station antenna arrays may be provided that are configured to correct for pointing errors in an antenna beam formed by the antenna. These antennas may receive or collect data indicative of the pointing direction of the antenna beam. The received/collected data may comprise, for example,

data from a tilt sensor, data from a sensor that measures an azimuth pointing direction of the antenna, or data from another source such as, for example, a beacon and/or a self-optimizing network. The active antenna may adjust the amplitude and/or phase of at least some of the sub-components of an RF signal that is transmitted by the active antenna to electronically adjust the pointing direction and/or beamwidth of an antenna beam formed by the active antenna in response to the received/collected data.

[0034] In some embodiments, the active antenna may electronically adjust the pointing direction of the antenna beam to account for sway of the antenna that results from sway of the antenna tower and/or sway of an antenna mount. The adjustment may be performed in real time in order to substantially maintain a desired pointing direction for the antenna beam. This may enhance the capacity of the base station and/or reduce interference with other sectors and/or base stations. The active antennas according to embodiments of the present invention may also correct for errors in the pointing direction that occur for other reasons, such as installation errors.

[0035] FIG. 6 is a schematic block diagram of an active antenna 200 according to embodiments of the present invention. As shown in FIG. 6, the active antenna 200 includes a plurality of radiating elements 212 that may form a phased array 210. The phased array 210 illustrated in FIG. 6 includes twelve radiating elements 212 arranged in two columns and six rows, but it will be appreciated that any number of rows, columns and radiating elements 212 may be used. It will also be appreciated that an active radio 220 may be provided for each radiating element 212 or that the radiating elements 212 may be arranged in sub-arrays 214 with a single active radio 220 provided for each sub-array 214. In the depicted embodiment, six active radios 220 are provided, with each active radio 220 coupled to a respective sub-array 214 that includes two radiating elements 212. The active antenna 200 further includes an internal controller 250.

[0036] The active antenna 200 further includes one or more pointing direction sensors. In the depicted embodiment, the active antenna 200 includes two such sensors, namely a tilt sensor 230 and an azimuth pointing direction sensor 240. The tilt sensor may sense an elevation angle of the active antenna 200 and the azimuth pointing direction sensor 240 may sense an azimuth angle of the antenna. In the depicted embodiment, the tilt sensor 230 and the azimuth pointing direction sensor 240 are each mounted on the active antenna 200 and/or may be part of the active antenna 200. Such an arrangement may be convenient as then the outputs of the tilt

sensor **230** and the azimuth pointing direction sensor **240** may be coupled to the internal controller **250** internally within the antenna without the need for separate external connections (which may require weatherproofed connectors, connections by installers, etc.). It will be appreciated, however, that in other embodiments the tilt sensor may monitor the tilt sensor **230** and the azimuth pointing direction sensor **240** may be mounted in other locations, such as, for example, on an antenna mount on which the active antenna **200** is mounted.

[0037] The tilt sensor **230** and the azimuth pointing direction sensor **240** may measure/determine the respective elevation angle and the azimuth angle of the active antenna **200** (or data from which the elevation angle and the azimuth angle may be determined). This data may be measured/determined in real time and provided by the tilt sensor **230** and the azimuth pointing direction sensor **240** to the internal controller **250**. The internal controller **250** may use the data to determine phase offsets that should be applied in real time to the RF signals being transmitted and/or received by the respective active radios **220** that will electronically steer the peak of the antenna beam (or antenna beams) formed by active antenna **200** to a desired pointing direction. In this manner, the active antenna **200** can automatically correct for fixed errors in the pointing direction of the active antenna **200** caused by, for example, installation errors, as well as for dynamically changing errors in the pointing direction caused by, for example, wind. It is believed that deviations from a desired pointing angle for the active antenna **200** could be sensed and the pointing angle of the active antenna **200** could be changed electronically with a response time on the order of a millisecond or less, which should be quick enough to almost completely correct for unwanted deviations from the desired pointing direction due to factors such as wind.

[0038] As other potential variations, mounting structures other than the monopole **112** (e.g., an antenna tower) may be employed. A variety of antenna mounts may be used; exemplary antenna mounts are shown in U.S. Provisional Patent Application Nos. 62/104,898, filed January 19, 2015, and 62/154,111, filed April 28, 2015, the disclosures of which are hereby incorporated herein. Also, although the RET unit **130** and controller **140** are illustrated as being remote from the antenna **110**, in other embodiments either or both may be located at the top of the tower **112**. In such embodiments, the RET unit **130** and/or controller **140** may be integrated with the sensor **120** and/or the antenna **110**.

[0039] The foregoing is illustrative of the present invention and is not to be construed as limiting thereof. Although exemplary embodiments of this invention have been described, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the claims. The invention is defined by the following claims, with equivalents of the claims to be included therein.

That Which is Claimed is:

1. An antenna, comprising:
a mounting structure;
an antenna mount fixed to the mounting structure;
an antenna mounted to the antenna mount, the antenna configured to produce an antenna beam;
a remote electrical tilt (RET) unit operatively associated with the antenna to adjust a pointing angle of the antenna beam;
a pointing direction sensor mounted to the antenna, the pointing direction sensor configured to detect a pointing angle of the antenna relative to a baseline standard; and
a controller operatively connected with the RET unit and the pointing direction sensor, the controller configured to receive signals from the pointing direction sensor and transmit signals to the RET unit to adjust the pointing angle of the antenna beam based on the detected angle of the antenna.
2. The antenna defined in Claim 1, wherein the RET unit comprises a controller and at least one phase shifter.
3. The antenna defined in Claim 1, wherein the pointing direction sensor comprises a tilt sensor that comprises an accelerometer, gyro or nine degree of freedom sensor.
4. The antenna defined in Claim 1, wherein the antenna comprises a phased array antenna.
5. The antenna defined in Claim 3, wherein the antenna is configured such that a tilt angle of the antenna beam can be adjusted over a range of at least ± 8 degrees.
6. The antenna defined in Claim 1, wherein the antenna produces a beam having an elevation beamwidth of between about 3 and 5 degrees.
7. The antenna defined in Claim 1, wherein the pointing direction sensor comprises a tilt sensor

8. A method of adjusting a pointing direction of an antenna, comprising the steps of:
providing an antenna mounted to a mounting structure, a pointing direction sensor mounted to the antenna, the antenna producing an antenna beam in a first direction;
transmitting signals from the pointing direction sensor to a controller regarding a pointing direction of the antenna relative to a baseline standard;
transmitting signals from the controller to a remote electrical tilt (RET) unit operatively associated with the antenna directing the antenna to electronically adjust a pointing direction of the antenna beam to a second pointing direction that differs from the first pointing direction, the second pointing direction being selected based on the signals transmitted by the pointing direction sensor.
9. The method defined in Claim 8, wherein the RET unit comprises controller and at least one phase shifter.
10. The method defined in Claim 8, wherein the pointing direction sensor comprises a tilt sensor.
11. The method defined in Claim 8, wherein the antenna comprises a phased array antenna.
12. The method defined in Claim 8, wherein the antenna is configured such that the first beam angle and the second beam may vary over a range of at least ± 8 degrees.
13. An adjustable antenna, comprising:
a mounting structure;
an antenna mount fixed to the mounting structure;
an antenna mounted to the antenna mount, the antenna configured to produce an antenna beam;
an automated adjustment unit operatively associated with the antenna to adjust at least one of tilt, roll and azimuth of the antenna beam;
a sensor mounted to the antenna, the sensor configured to detect at least one of tilt, roll and azimuth of the antenna relative to a baseline standard; and

a controller operatively connected with the automated unit and the sensor, the controller configured to receive signals from the sensor and transmit signals to the automated adjustment unit to adjust the tilt, roll or azimuth angle of the antenna beam based on the detected orientation of the antenna.

14. The adjustable antenna defined in Claim 13, wherein the controller is configured to receive data from external sources and to signal the adjustment unit to adjust the antenna orientation based on external source data.

15. The adjustable antenna defined in Claim 14, wherein the external source data is provided by a self-optimizing network.

16. The adjustable antenna defined in Claim 14, wherein the external source data is provided by beacons located within a coverage area of the antenna.

17. An active antenna, comprising:
a phased array antenna that includes an array of radiating elements that are arranged as a plurality of sub-arrays of radiating elements, each sub-array including at least one radiating element, the phase array antenna being configured to generate at least a first antenna beam;
a plurality of active radios, each active radio coupled to a respective one of the sub-arrays;
a sensor system mounted within, on or adjacent the phased array antenna, the sensor system configured to detect at least one of tilt angle, roll angle and azimuth angle of the phased array antenna relative to one or more baseline standards; and
a controller that is configured to receive signals from the sensor system and transmit signals to one or more of the active radios to electronically adjust one or more of the tilt angle, roll angle or azimuth angle of the first antenna beam based on a detected orientation of the phased array antenna.

18. The active antenna defined in Claim 17, wherein the sensor system is configured to detect in real time at least a tilt angle of the phased array antenna relative to a baseline standard that specifies a tilt angle for the phased array antenna.

19. The active antenna defined in Claim 18, wherein the sensor system is further configured to detect in real time at least an azimuth angle of the phased array antenna relative to a baseline standard that specifies an azimuth angle for the phased array antenna

20. The active antenna defined in Claim 17, wherein the active antenna is configured to electronically adjust a pointing direction of the first antenna beam to correct for movement of the active antenna in response to wind.

1/6

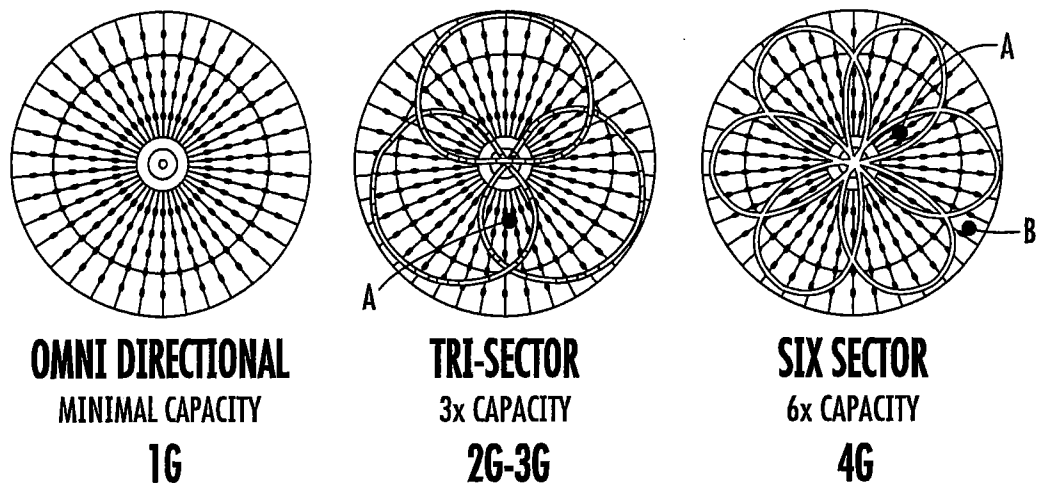


FIG. 1

2/6

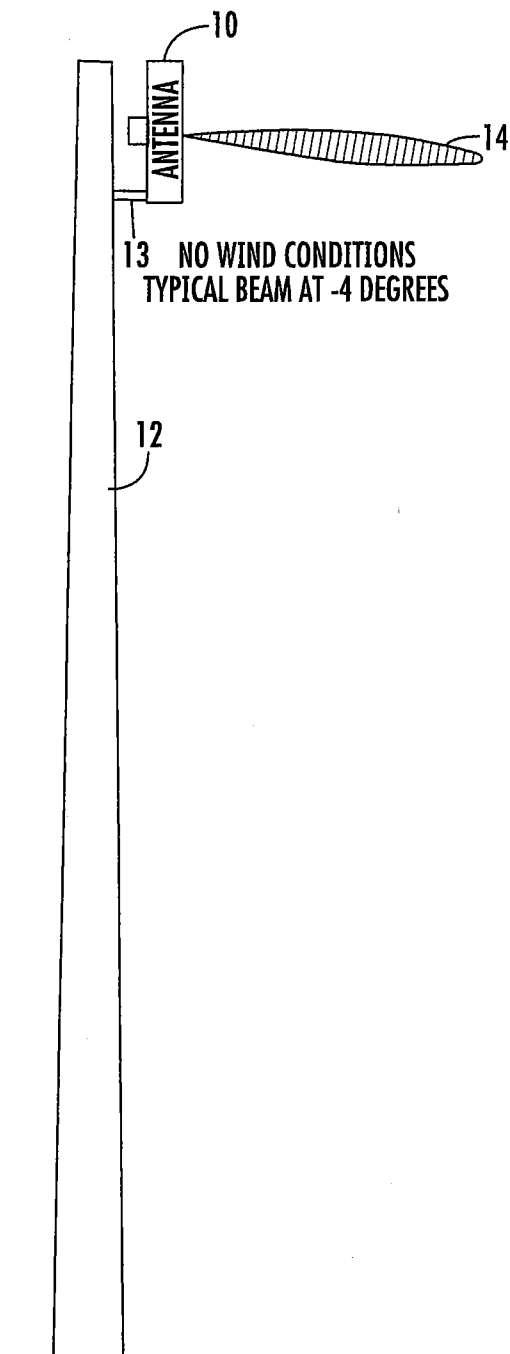


FIG. 2

3/6

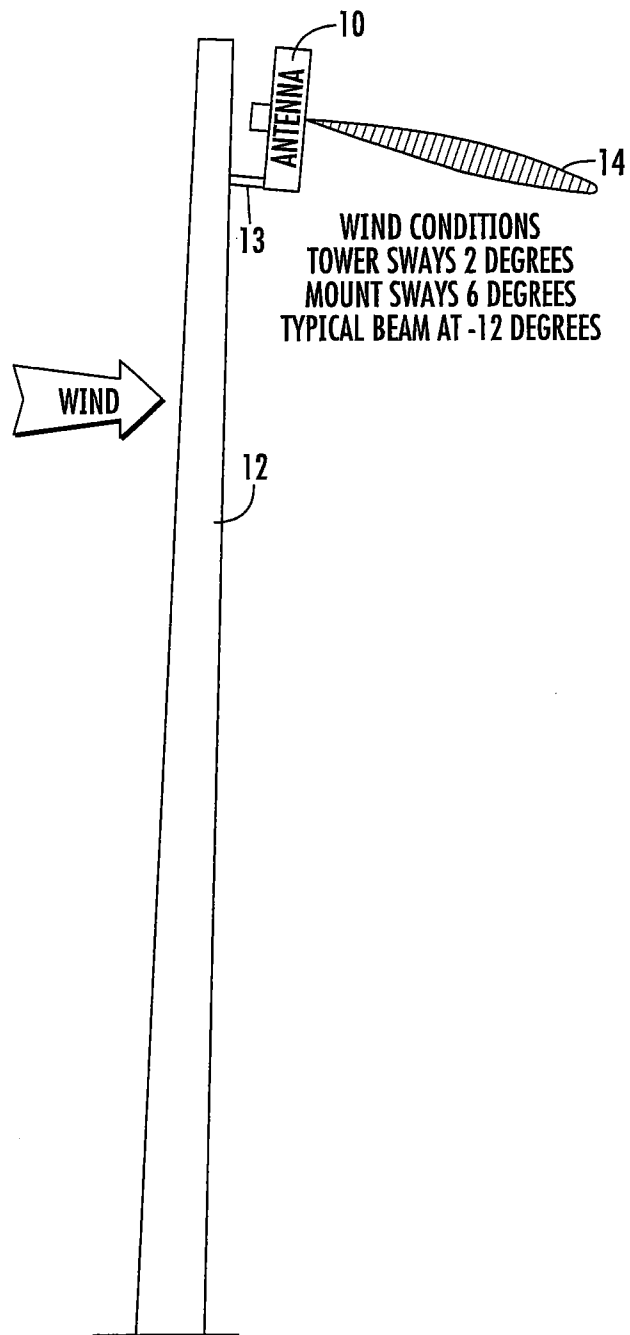


FIG. 3

4/6

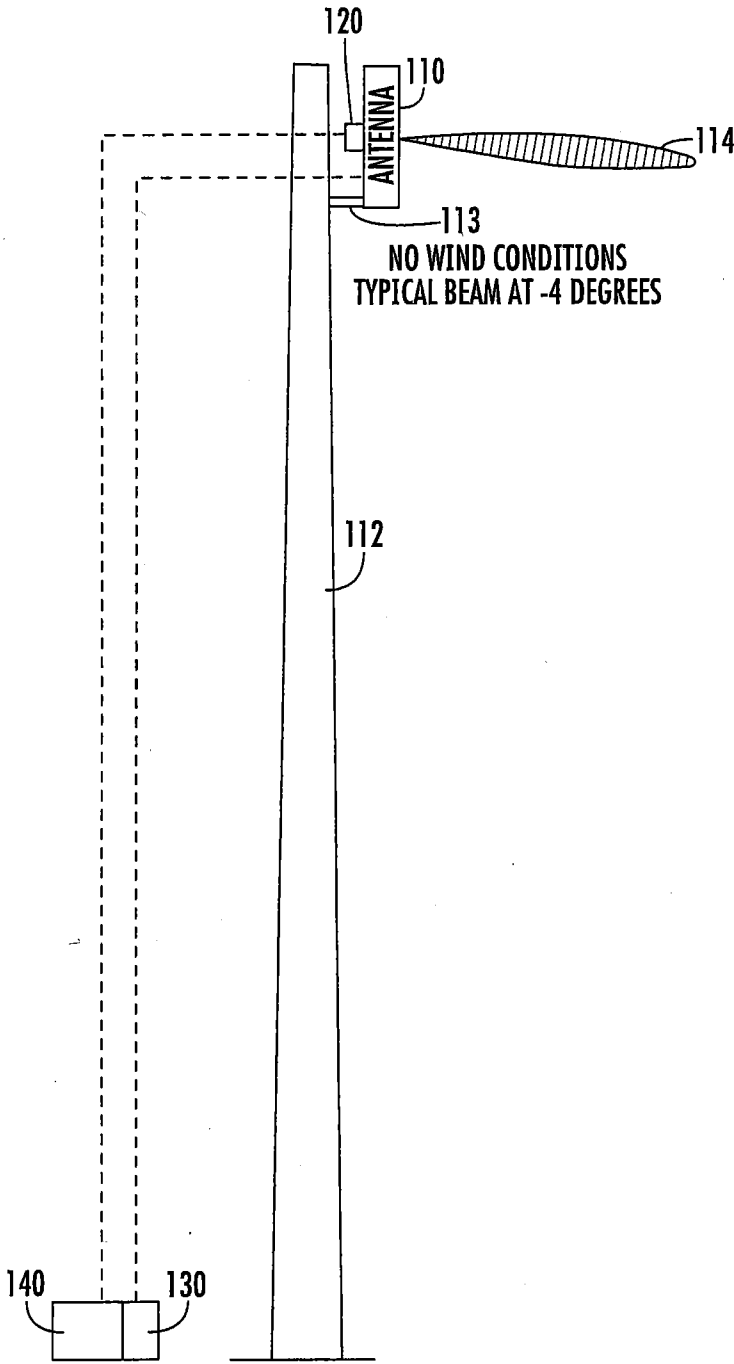


FIG. 4

5/6

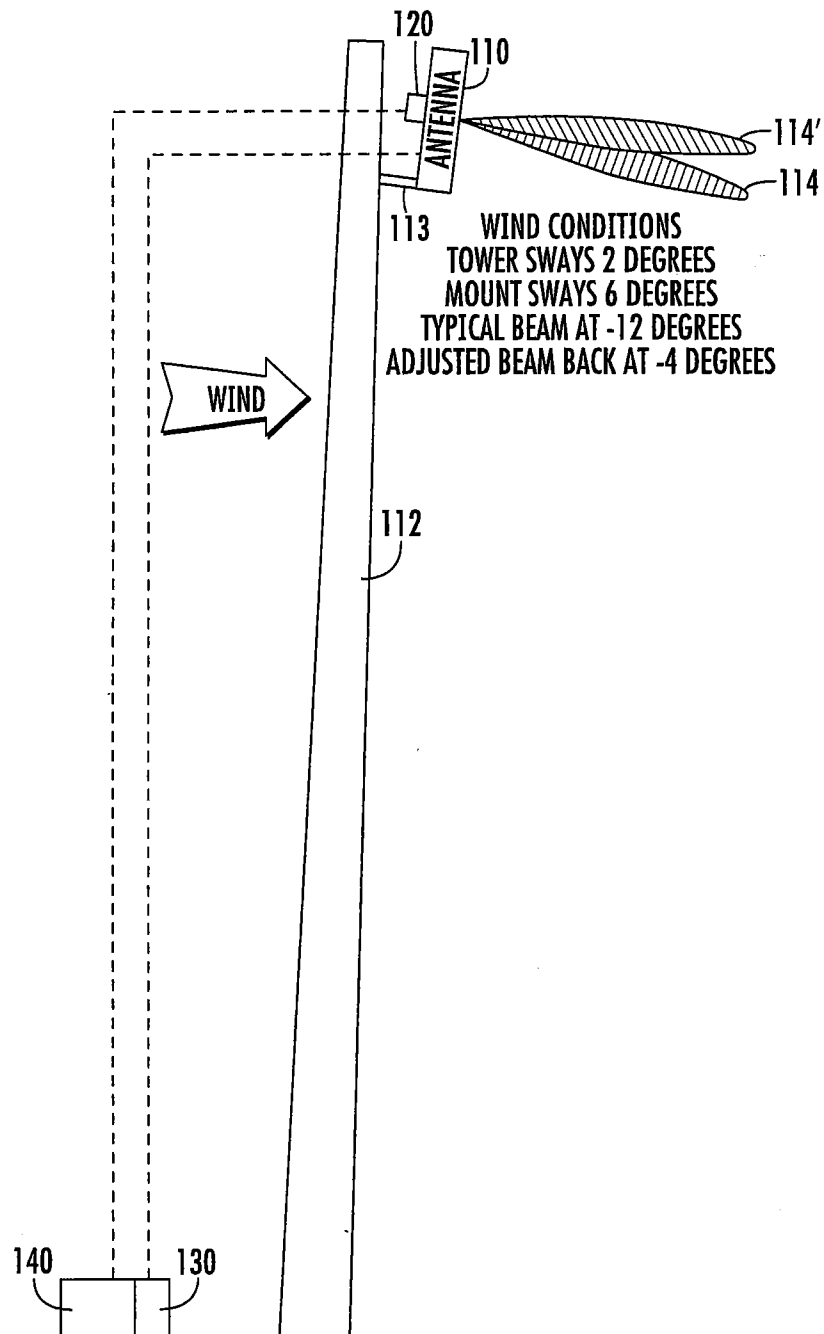


FIG. 5

6/6

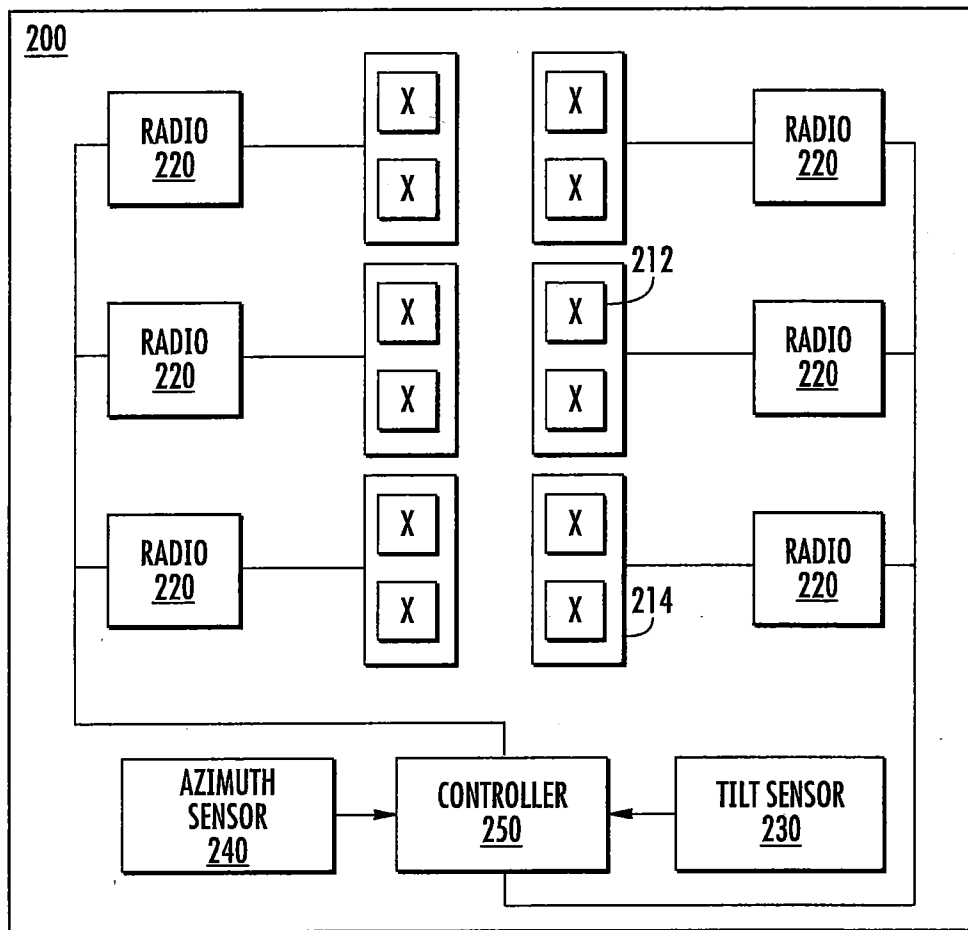


FIG. 6

A. CLASSIFICATION OF SUBJECT MATTER**H01Q 3/00(2006.01)i, H01Q 1/12(2006.01)i, H01Q 3/26(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H01Q 3/00; H01Q 3/08; G01S 19/53; H01Q 21/00; H01Q 3/36; H01Q 1/12; H04B 1/38; H01Q 1/24; H01Q 3/26

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & keywords: antenna, beam, angle, adjust, sensor

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2015-0357708 A1 (T-MOBILE USA, INC.) 10 December 2015 See paragraphs [0023]-[0028], claim 1 and figure 3.	13-16
Y		1-12, 17-20
Y	EP 0106438 A1 (HAZELTINE CORPORATION) 25 April 1984 See claim 1 and figure 1.	1-12
Y	US 2013-0171946 A1 (JONATHON C. VEIHL et al.) 04 July 2013 See paragraphs [0032]-[0033], claim 1 and figure 2.	17-20
A	US 2016-0020504 A1 (COMMSCOPE TECHNOLOGIES LLC) 21 January 2016 See claims 1-9 and figures 1-4.	1-20
A	US 2013-0328716 A1 (HENDRIKUS A. LE SAGE) 12 December 2013 See claims 1-4 and figures 1-8.	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 August 2017 (08.08.2017)

Date of mailing of the international search report

08 August 2017 (08.08.2017)

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KIM HYEON JIN

Telephone No. +010-4310-7635



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/030830

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2015-0357708 A1	10/12/2015	US 9502764 B2 WO 2015-188061 A1	22/11/2016 10/12/2015
EP 0106438 A1	25/04/1984	AU 1565383 A AU 554095 B2 BR 8304424 A CA 1199105 A CS 276584 B6 CS 8306499 A3 EP 0106438 B1 ES 8405203 A1 IL 69013 A JP 59-061304 A NZ 204522 A US 4536766 A	15/03/1984 07/08/1986 24/04/1984 07/01/1986 15/07/1992 15/07/1992 22/06/1988 01/09/1984 31/10/1986 07/04/1984 24/01/1986 20/08/1985
US 2013-0171946 A1	04/07/2013	CN 103650245 A CN 103650245 B EP 2727184 A2 EP 2727184 A4 WO 2013-003733 A2 WO 2013-003733 A3	19/03/2014 13/01/2016 07/05/2014 07/01/2015 03/01/2013 14/03/2013
US 2016-0020504 A1	21/01/2016	EP 2883272 A1 EP 2883272 B1 EP 3121895 A1 WO 2015-031072 A1	17/06/2015 15/06/2016 25/01/2017 05/03/2015
US 2013-0328716 A1	12/12/2013	US 2011-0140990 A1 US 2011-0285584 A1 US 8514145 B2 US 9046601 B2 WO 2010-146471 A1	16/06/2011 24/11/2011 20/08/2013 02/06/2015 23/12/2010