

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. AU 199912601 B2
(10) Patent No. 715736

(54) Title
Coin dispenser

(51)⁶ International Patent Classification(s)
G07D 001/00

(21) Application No: **199912601**

(22) Application Date: **1998.11.25**

(87) WIPO No: **WO99/28868**

(30) Priority Data

(31) Number	(32) Date	(33) Country
9-328249	1997.11.28	JP

(43) Publication Date : **1999.06.16**

(43) Publication Journal Date : **1999.08.19**

(44) Accepted Journal Date : **2000.02.10**

(71) Applicant(s)
Kabushiki Kaisha Nippon Conlux

(72) Inventor(s)
Mitsugu Mikami; Kenji Nakajima; Takahiro Hayashi

(74) Agent/Attorney
BALDWIN SHELSTON WATERS,Level 21,60 Margaret Street,SYDNEY NSW 2000

(56) Related Art
JP 07-114666
JP 05-23279
JP 02-67475



(51) 国際特許分類6 G07D 1/00	A1	(11) 国際公開番号 WO99/28868 (43) 国際公開日 1999年6月10日(10.06.99)
(21) 国際出願番号 PCT/JP98/05313 (22) 国際出願日 1998年11月25日(25.11.98) (30) 優先権データ 特願平9/328249 1997年11月28日(28.11.97) JP (71) 出願人 (米国を除くすべての指定国について) 株式会社 日本コンラックス (KABUSHIKI KAISHA NIPPON CONLUX)[JP/JP] 〒100-0011 東京都千代田区内幸町2丁目2番2号 Tokyo, (JP) (72) 発明者 ; および (75) 発明者 / 出願人 (米国についてのみ) 三上 貢(MIKAMI, Mitsugu)[JP/JP] 〒350-0001 埼玉県川越市古谷上2290-1 Saitama, (JP) 中島賢治(NAKAJIMA, Kenji)[JP/JP] 〒350-0412 埼玉県入間郡越生町西和田258-6 Saitama, (JP) 林 貴裕(HAYASHI, Takahiro)[JP/JP] 〒364-0007 埼玉県北本市東間8-90-65 Saitama, (JP)		(74) 代理人 弁理士 木村高久(KIMURA, Takahisa) 〒104-0043 東京都中央区湊1丁目8番11号 千代ビル6階 Tokyo, (JP) (81) 指定国 AU, CA, KR, SG, US, 欧州特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). 添付公開書類 国際調査報告書
(54) Title: COIN DISPENSER (54) 発明の名称 硬貨払出装置 (57) Abstract A coin dispenser, wherein a change slide (31) for controlling the dispensation and non-dispensation of coins is turned when the coins are dispensed, and then stored in a change slide storage hole (4f) formed inside a payout link (4), whereby a depthwise length of the coin dispenser is reduced to the smallest possible level.		

(57)要約

硬貨の払い出しと非払い出しとを制御するチェンジスライド31を、硬貨払出時に回転させてペイアウトリンク4の内部に形成されたチェンジスライド収納孔4f内に収容し、これにより硬貨払出装置の奥行方向の長さを可及的に短くした。

PCTに基づいて公開される国際出願のパンフレット第一頁に掲載されたPCT加盟国を同定するために使用されるコード(参考情報)

AE アラブ首長国連邦	ES スペイン	LI リヒテンシュタイン	SG シンガポール
AL アルバニア	FI フィンランド	LK スリ・ランカ	SI スロヴェニア
AM アルメニア	FR フランス	LR リベリア	SK スロヴァキア
AT オーストリア	GA ガボン	LS レソト	SL シェラ・レオネ
AU オーストラリア	GB 英国	LT リトアニア	SN セネガル
AZ アゼルバイジャン	GD グレナダ	LU ルクセンブルグ	SZ スワジランド
BA ボスニア・ヘルツェゴビナ	GE グルジア	LV ラトヴィア	TD チャード
BB バルバドス	GH ガーナ	MC モナコ	TG トーゴ
BE ベルギー	GM ガンビア	MD モルドヴァ	TJ タジキスタン
BF ブルキナ・ファソ	GN ギニア	MG マダガスカル	TM トルクメニスタン
BG ブルガリア	GW ギニア・ビサウ	MK マケドニア旧ユーゴスラヴィア	TR トルコ
BJ ベナン	GR ギリシャ	共和国	TT トリニダード・トバゴ
BR ブラジル	HR クロアチア	マリ	UA ウクライナ
BY ベラルーシ	HU ハンガリー	MN モンゴル	UG ウガンダ
CA カナダ	ID インドネシア	MR モーリタニア	US 米国
CF 中央アフリカ	IE アイルランド	MW マラウイ	UZ ウズベキスタン
CG コンゴ	IL イスラエル	MX メキシコ	VN ヴィエトナム
CH スイス	IN インド	NE ニジェール	YU ユーゴスラビア
CI コートジボアール	IS アイスランド	NL オランダ	ZA 南アフリカ共和国
CM カメルーン	IT イタリア	NO ノールウェー	ZW ジンバブエ
CN 中国	JP 日本	NZ ニュー・ジーランド	
CU キューバ	KE ケニア	PL ポーランド	
CY キプロス	KG キルギスタン	PT ポルトガル	
CZ チェッコ	KP 北朝鮮	RO ルーマニア	
DE ドイツ	KR 韓国	RU ロシア	
DK デンマーク	KZ カザフスタン	SD スーダン	
EE エストニア	LC セントルシア	SE スウェーデン	

ABSTRACT

Coin dispenser, wherein a change slide (31) for controlling the dispensation and non-dispensation of coins is turned when the coins are dispensed, and then stored in a change slide storage hole (4f) formed inside a payout link (4), whereby depthwise length of the coin dispenser is reduced to the smallest possible level.



COIN DISPENSER

TECHNICAL FIELD

This invention concerns a coin processing apparatus, used in automatic
5 vending machines, money changing machines and service equipment, etc., and
more particularly concerns improvements in a coin dispenser that constitutes
part of such a coin processing apparatus and that pays out coins that have been
sorted and held by denomination according to the amount of change being
returned.

10

BACKGROUND ART


Conventional automatic vending machines, money changing machines
and service equipment, etc., have been equipped with coin processing
apparatus that, in addition to determining the genuineness of inserted coins,
15 sorts and holds those inserted coins deemed genuine by denomination, and also
pays out the sorted and held coins according to the amount of change being
returned.

The coin processing apparatus, in general terms, comprises the
following three main constituting elements.

20 The first main constituting element comprises coin sorting means that
determines the genuineness of inserted coins and sorts, by denomination, the
genuine coins.

The second main constituting element comprises a coin holding
apparatus comprising a plurality of coin tubes that respectively hold coins by
25 denomination, which coins have been sorted by denomination by the coin
sorting means.

The third main constituting element comprises a coin dispenser that
selects coins from inside the coin tubes constituting the coin holding apparatus,




according to the amount of change being returned, and pays those selected coins out.

Of these, the conventional coin dispenser 1 has the structure depicted in the schematic perspective view of major components given in Fig. 18.

5 The coin dispenser 1 comprises payout cam drive means (not shown in the drawings) comprising drive motor gears that transmit the driving force of the drive motor; a payout link 4 that comprises a pair of payout cams 2 and 3 that are turned one revolution in one direction (clockwise) every payout operation by the driving force transmitted via the payout cam drive means and
10 channels 4a and 4b engaged with pins 2a and 3a projecting from the lower surfaces of the payout cams 2 and 3, and that moves reciprocally in the directions of arrow A from the initial position in the drawing when the payout cams 2 and 3 turn one revolution in the direction of the arrows (clockwise); and a payout slider 5 that engages the payout link 4 through the pair of pins 4c
15 and 4d and moves reciprocally in the directions of the arrow A in linkage with the reciprocal motion of the payout link 4. The payout drive means (not shown), as described above, payout cams 2 and 3 and payout link 4 constitute payout slider drive means 6.

 In the payout slider 5 are formed four holes 7, 8, 9 and 10 for holding,
20 respectively, a single coin of the coins held at the bottoms of the coin tubes (not shown) that constitute the coin holding apparatus described above. On the bottom sides of the holes 7, 8, 9 and 10 are provided a bottom plate 11 that covers the bottom surface of the payout slider 5 and that ordinarily does not move, in the initial position depicted in Fig. 18, so as to prevent coins held in
25 the holes 7, 8, 9 and 10 from falling down. The bottom plate 11 configures the bottom surface of the plurality of coin tubes (not shown) that constitute the coin holding apparatus.

 Inside the payout link 4, change slides 12, 13, 14 and 15 for controlling



the paying out and non-paying out of the coins held one at a time inside the corresponding holes 7, 8, 9, 10, are inserted such that they can go in and out freely. The ends of the change slides front at the bottoms of the corresponding holes 7, 8, 9 and 10 in the payout slider 5.

5 The change slides 12, 13, 14 and 15 are provided with stopper means (not shown) for stopping their movement from the initial position depicted in Fig. 18 toward the payout link 4 side. Thus, the structure is such as to allow the movement of the change slides 12, 13, 14 and 15 toward change solenoids 16, 17, 18 and 19 following the sliding movement of the payout link 4 in the
10 directions of the arrow A, while checking the movement from the initial positions depicted in Fig. 18 toward the payout link 4.

 Furthermore, the change slides 12, 13, 14 and 15 described above are installed such that the tip 12a of the change slide 12 fronts inside the hole 7, the tip 13a of the change slide 13 fronts inside the hole 8, the tip 14a of the
15 change slide 14 fronts inside the hole 9 and the tip 15a of the change slide 15 fronts inside the hole 10.

 The back ends 12b, 13b, 14b and 15b of the change slides 12, 13, 14 and 15, respectively, in their initial positions, are engaged by change levers 16a, 17a, 18a and 19a configured by the plungers of the change solenoids 16, 17, 18
20 and 19, respectively, that are installed independently for the change slides 12, 13, 14 and 15. The movement of these change slides, that is to say, movement toward the change solenoids 16, 17, 18 and 19, is ordinarily checked.

 According to the coin dispenser 1 described in the foregoing, when a signal is input from a controller (not shown) to pay out one coin (not shown)
25 held in the hole 9, for example, in response to that payout signal, the payout cams 2 and 3 are turned through one revolution in the direction of the arrows by the payout cam drive means (not shown), causing the payout slider 5 to move reciprocally in the directions of the arrow A, which would cause the



coins held in the holes 7, 8, 9 and 10 in the payout slider 5 to drop one at a time down below the holes 7, 8, 9 and 10. However, as depicted in Fig. 19, based on the signal to pay out one coin held in the hole 9, only the change lever 18a of the change solenoid 18 that checks the movement of the back end 14b of the change slide 14 is activated, moving upward as indicated by the arrow B, thus releasing the engagement between the change lever 18a and the change slide back end 14b.

Thereupon, as depicted in Fig. 20 (from which the payout cams 2 and 3 have been omitted), only the change slide 14 slides backward, following the movement of the payout link 4 in the directions of the arrow A, whereby the opening in the bottom of the hole 9 is maintained so that the coin held in the hole 9 drops down and is paid out.

As depicted in Fig. 20, since the back ends 12b, 13b and 15b of the other change slides 12, 13 and 15 have their movement checked by the change levers 16a, 17a and 19a, respectively, depending on the amount of movement of the payout link 4, the change slide tips 12a, 13a and 15a advance at the bottoms of the holes 7, 8 and 10 corresponding thereto. Therefore, the bottoms of those holes 7, 8 and 10 are not released, and, accordingly, the coins held in those holes 7, 8 and 10 do not fall down below the bottoms of the holes 7, 8 and 10 despite the reciprocal movement in the directions of the arrow A of the payout slider 5, and are thus not paid out.

In other words, the coin dispenser described in the foregoing is configured so that, if change levers 16a, 17a, 18a and 19a corresponding to coins to be paid out are activated (moved upward), thus releasing the checks on the movements of the change slides 12, 13, 14 and 15 corresponding to the coins to be paid out, those coins can be paid out. When paying out a plurality of coins of the same denomination, the change lever of the change solenoid correspond to that coin to be paid out is activated (moved upward), thereby




releasing the check on the movement of that change slide, and thereafter it is only necessary to move the payout slider 5 reciprocally a number of times coinciding with the number of coins to be paid out. Also, when paying out a plurality of types of coins simultaneously, the change levers of a plurality of
5 change solenoids corresponding to that plurality of types of coin are activated (moved up) simultaneously, thereby releasing the checks on the movements of the change slides corresponding to that plurality of types of coin to be paid out, so that plurality of types of coin can be paid out simultaneously.

When, on the other hand, the coin dispenser 1 described in the foregoing
10 is to be employed in various countries of the world where different types and diameters of coins are used, it is desirable to provide as many functions as possible in the coin dispenser 1 so that it can pay out many types of coins.

Thus, we can conceive of a construction where, a function for paying out another different type of coin having a large diameter is added to the
15 conventional coin dispenser 1.

Fig. 21 is a schematic perspective view of the major components of a coin dispenser 20, which was proposed earlier by the applicant, wherein the basic structure of the conventional coin dispenser 1 depicted in Fig. 18 is adopted, but wherein a feature is added for paying out another different coin
20 having a large diameter, so that it is provided with features for paying out a total of five types of coin. The same reference symbols as used in Fig. 18 are used to indicate identical components.

With the coin dispenser 20, the payout link 4, payout slider 5 and bottom plate 11, respectively, are elongated toward the left (in the drawing) to
25 accommodate the placement of a change slide 21 having the same structure as the change slides 12, 13, 14 and 15 as described above. A hole 22 is also formed in the elongated payout slider 5 to hold another coin of a large diameter.



A change solenoid 23 is provided at the back end 21b of the change slide 21, similar to the change solenoids 16, 17, 18 and 19 noted earlier, and a change lever 23a configured by the plunger thereof is engaged with the back end 21b of the change slide 21.

5 According to such a coin dispenser 20, when a signal is input from a controller (not shown) to pay out one large- diameter coin held in the hole 22, based on that payout signal, the payout cams 2 and 3 are turned through one revolution, in the direction of the arrows, by the payout drive means (not-
10 shown), causing the payout slider 5 to move reciprocally in the directions of the arrow A, so that the coins held in the holes 7, 8, 9, 10 and 22 of the payout slider 5 are dropped one at a time down through the holes 7, 8, 9, 10 and 22. When this is being done, however, as depicted in Fig. 22, based on a signal to pay out one coin held in the hole 22, only the change lever 23a of the change solenoid 23 that checks the movement of the back end 21b of the change slide
15 21 is activated so that it moves upward as indicated by the arrow B, thus releasing the engagement with the change slide back end 21b.

Thereupon, as depicted in Fig. 23 from which the payout cams 2 and 3 have been omitted, only the change slide 21 slides backward following the movement of the payout link 4 in the directions of the arrow A (in Fig. 22),
20 whereby the opening at the bottom of the hole 22 is maintained, so that the coin held in the hole 22 is dropped down from the hole 22 and is paid out.

Accordingly, it is possible to pay out five or more types of coins using the same basic payout structure as in the conventional coin dispenser 1 described earlier.

25 However, a coin processing apparatus wherein the coin dispenser 1 or 20 described above is loaded, is usually to be loaded in an extremely limited and narrow space inside automatic vending machines or equipment. Therefore, the overall size of the coin processing apparatus is strictly controlled.



In particular, the dimension L in depth direction from the front to the back in the coin dispenser 1, inclusive of the distance of reciprocal movement of the change slide 14 when paying out coins, is strictly specified.

However, with the need to pay out as many types of coins as possible, according to the coin dispenser 20 wherein the conventional structure depicted in Fig. 18 is adopted but wherein also a feature is added for paying out another coin of large diameter as depicted in Fig. 21, for example, in order to pay out that coin of large diameter, the dimension L' in the depth direction from the front to the back in the coin dispenser 20, inclusive of the distance of reciprocal movement of the change slide 21, becomes extremely large ($L' > L$). Thus there is a danger of being unable to install a coin processing apparatus wherein is loaded such a coin dispenser 20, within the limited space available inside an automatic vending machine, etc.


DISCLOSURE OF THE INVENTION

It is an object of the present invention to overcome or ameliorate at least one of the disadvantages of the prior art, or to provide a useful alternative.

According to the invention there is provided a coin dispenser that causes a payout slider to move reciprocally via a payout link, and comprises a change slide that opens coin holding holes formed in the payout slider when paying out coins so as to drop the coins held in the coin holding holes down, and closes off the coin holding holes when not paying out coins so as to prevent coins from falling down, wherein

the coin dispenser further comprises:

change slide accommodating means for accommodating the change slide inside the payout link along longitudinal direction thereof; and



change slide turning means for turning the change slide in conjunction with movement of the payout link when paying out coins, wherein

when paying out the coins, the change slide is turned by the change slide turning means so as to be accommodated inside the change slide accommodating means.

- 5 Unless the context clearly requires otherwise, throughout the description and the claims, the words 'comprise', 'comprising', and the like are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense; that is to say, in the sense of "including, but not limited to".

BRIEF DESCRIPTION OF THE DRAWINGS

- 10 A preferred embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings in which:






Fig. 1 is a schematic perspective view of a coin dispenser according to one embodiment of the present invention;

Fig. 2 is a schematic perspective view showing the action of a coin dispenser according to one embodiment of the present invention;

5 Fig. 3 is a schematic perspective view showing the action of a coin dispenser according to one embodiment of the present invention;

Fig. 4 is a schematic perspective view showing the action of a coin dispenser according to one embodiment of the present invention;

10 Fig. 5 is a schematic perspective view of the lower surface of a change slide;

Fig. 6 is a schematic perspective view of the upper surface of a change slide;

Fig. 7 is an enlarged schematic perspective view of the elongated portion of a change slide;

15 Fig. 8 is a partially cutaway bottom view of a coin dispenser according to one embodiment of the present invention, as seen from the bottom;

Fig. 9 is a partially cutaway bottom view indicating the action of a coin dispenser according to one embodiment of the present invention;

20 Fig. 10 is a partially cutaway bottom view indicating the action of a coin dispenser according to one embodiment of the present invention;

Fig. 11 is a partially cutaway bottom view indicating the action of a coin dispenser according to one embodiment of the present invention;

Fig. 12 is a partially cutaway bottom view indicating the action of a coin dispenser according to one embodiment of the present invention;

25 Fig. 13 is a partially cutaway bottom view indicating the action of a coin dispenser according to one embodiment of the present invention;

Fig. 14 is a schematic perspective view of a change slide according to another embodiment of the present invention;



Fig. 15 is a schematic plan view of a cam channel according to another embodiment;

Fig. 16 is a partially cutaway view of major portions of a payout link of another embodiment;

5 Fig. 17 is a partially cutaway view of major portions of a payout link of still another embodiment;

Fig. 18 is a schematic perspective view of a conventional coin dispenser;

Fig. 19 is a schematic perspective view indicating the action of a conventional coin dispenser;

10 Fig. 20 is a schematic perspective view indicating the action of a conventional coin dispenser;

Fig. 21 is a schematic perspective view of a conventional coin dispenser;

Fig. 22 is a schematic perspective view indicating the action of a conventional coin dispenser; and


15 Fig. 23 is a schematic perspective view indicating the action of a conventional coin dispenser.

BEST MODE FOR CARRYING OUT THE INVENTION

Embodiments of a coin dispenser according to the present invention are
20 now described in detail.

Fig. 1 is a schematic perspective view of a coin dispenser 30 of one embodiment of the present invention. The same reference symbols as used in Figs. 18 and 21 are used to indicate identical components.

In the coin dispenser 30 also, the payout link 4, payout slider 5 and
25 bottom plate 11, respectively, are elongated on the left side (in the drawing) to facilitate the paying out of a different type of coin of large diameter, and a hole 22 is formed in the elongated portion 5a of the payout slider 5 to hold one large- diameter coin.




The elongated part 4e of the payout link 4 is formed with a change slide storage hole 4f for accommodating the change slide 31 associated with the hole 22 along the longitudinal direction thereof. The change slide storage hole 4f configures change slide accommodating means for accommodating the change slide 31 inside the payout link 4 along the longitudinal direction thereof.

Meanwhile, in a top cover (described below) that covers the upper surfaces of the change slide 31, change slide storage hole 4f and payout link 4, change slide turning means (described below) is formed that turn the change slide 31 in conjunction with the movement of the payout link 4 when paying out coins, respectively.

According to the coin dispenser 30, when a signal is input from a controller (not shown) to pay out one large- diameter coin (not shown) held in the hole 22, based on that payout signal, the payout cams 2 and 3 are turned through one revolution in the direction of the arrows by the payout drive means (not shown), the payout slider 5 is made to move reciprocally in the directions of the arrow A via the payout link 4, whereby the coins held in the holes 7, 8, 9, 10 and 22 in the payout slider 5 are dropped down one at a time from the holes 7, 8, 9, 10 and 22, and paid out.

When this is being done, based on a signal to pay out one coin held in the hole 22, as depicted in Fig. 2, only the change lever 23a of the change solenoid 23 that checks the movement of the back end 31b of the change slide 31 is activated so that it moves upward as indicated by the arrow B, thus releasing the engagement with the change slide back end 31b.

When this is done, as depicted in Fig. 3 from which the payout cams 2 and 3 have been omitted, only the change slide 31 turns in one direction about a turning shaft (described below) following the movement of the payout link 4, by which means the change slide 31 is accommodated inside the change slide storage hole 4f of the payout link 4 along longitudinal direction thereof.



Thus the release of the bottom of the hole 22 is maintained so that the coin held in the hole 22 drops down from the hole 22 and is paid out.


When the large-diameter coin held in the hole 22 should not be paid out, the engagement between the back end 31b of the change slide 31 and the change lever 23a of the change solenoid 23 is maintained, as depicted in Fig. 4, so that the change slide 31 is prevented from turning. Therefore, the change slide 31 maintains its stationary condition without being linked to the movement of the payout link 4. As a result, the tip 31a of the change slide 31 advances at the bottom of the hole 22 so as to close off the bottom of the hole 22, checking the falling of the coin held in the hole 22, and preventing that coin from being paid out.

A detailed description is given next of the change slide turning means that turns the change slide 31 in linkage with the sliding movement of the payout link 4 when coins are being paid out, as depicted in Fig. 3.

As is depicted in Fig. 5, which gives a perspective view of the bottom side of the change slide 31, the change slide turning means 40 comprises a turning shaft 31d that projects from the bottom surface 31c of the change slide 31, of such shape that its side surfaces are partially cut away; a cam shaft 31f on the upper surface 31e of the change slide 31, projecting up from the back end 31b of the change slide 31, as depicted in Fig. 6 which gives a perspective view of the upper surface of the change slide 31; a shaft bearing hole 4h formed in the lower surface 4g of the change slide storage hole 4f, as seen in the enlarged schematic perspective view of the elongated portion 4e of the payout link 4 given in Fig. 7; and an arc shaped cam channel 41 for guiding the cam shaft 31f that projects out from the change slide 31, as depicted in Fig. 1.

Of these, the arc shaped cam channel 41 is formed in the top cover (described below) that covers the upper surface of the payout link 4.

As is evident from Fig. 5, the shaft 31d is formed by the tip ends of a



pair of shaft members 31g and 31h that are split into two forking prongs. Thus it is possible for the diameter of the shaft 31d to contract within that range wherein the gap between the tip ends of the pair of shaft members 31g and 31h flexibly expands and contracts. The reference symbol 31i in Fig. 5 indicates a guide panel that projects from the bottom surface 31c of the change slide 31.

The reference symbol 4i in Fig. 7 designates a guide channel formed adjacent to and to the left of the shaft bearing hole 4h. The guide channel 4i accepts the guide panel 31i on the change slide 31 depicted in Fig. 5.

10 The reference symbols 4j and 4k in Fig. 7 designate cam shaft accommodating channels for accommodating the cam shaft 31f depicted in Fig. 6. The reference symbol 4m in Fig. 7 designates a guide channel for guiding the turning shaft 31d depicted in Fig. 5, oriented toward the shaft bearing hole 4h, so that the turning shaft 31d can go in and out.


15 A more detailed description is given next of the action of the change slide turning means 40 described above.

Fig. 8 is a partially cutaway bottom view of the coin dispenser 30 depicted in Fig. 1, as seen from the bottom. In particular, Fig. 8 details the elongated portions 4e and 5a of the payout link 4 and change slider 5, respectively.

In the initial position of the payout link 4 as depicted in Fig. 8, the turning shaft 31d of the change slide 31 fits inside the shaft bearing hole 4h formed inside the change slide storage hole 4f of the payout link 4.

25 The cam shaft 31f projecting from the upper surface of the change slide 31 fits inside the arc shaped cam channel 41 formed in the top cover 50 that covers the upper surface of the payout link 4, and the cam shaft 31f is engaged by the change lever 23a of the change solenoid 23 (cf. Fig. 1).

In the initial position of the payout link 4 depicted in Fig. 8, when a signal is input from the controller (not shown) not to pay out a large- diameter



coin held in the hole 22, based on that non- payout signal, the payout cams 2 and 3 depicted in Fig. 1 turn through one revolution in the direction of the arrows causing the payout slider 5 to move reciprocally in the directions of the arrow A via the payout link 4. However, as depicted in Fig. 8, the
5 engagement between the cam shaft 31f of the change slide 31 and the change lever 23a is maintained, wherefore the change slide 31 does not move in linkage with the payout link 4, but maintains its condition of being stopped in that position.

Thus, when the payout link 4 moves in the directions of the arrow A in
10 Fig. 8, with the change slide 31 maintaining its stationary condition, the turning shaft 31d of the change slide 31 contracts its diameter, so that it can escape from the shaft bearing hole 4h, and moves inside the guide channel 4m, while, simultaneously, the guide panel 31i of the change slide 31 fits inside the guide channel 4i of the payout link 4.

15 When the payout link 4 moves further in the direction of the arrow A indicated in Fig. 9, and arrives at the return point, the turning shaft 31d of the change slide 31 completely withdraws from inside the payout link 4, as depicted in Fig. 10, and the guide panel 31i of the change slide 31 reaches a state wherein it is partially inside the guide channel 4i in the payout link 4.
20 Also, as depicted in Fig. 10, the guide panel 31i of the change slide 31 reaches a state wherein it is inside the guide channel 4i of the payout link 4. In this state, with the turning shaft 31d of the change slide 31 in a condition wherein it has completely withdrawn from inside the payout link 4, the change slide 31 will maintain its condition of being stopped in that condition, without shaking
25 either to the right or left about the cam shaft 31f.

In the stopped position of the change slide 31 indicated in Fig. 10, the tip 31a thereof is completely advanced in the bottom of the hole 22, blocking off the bottom of the hole 22. As a result, the dropping of the coin held in the



hole 22, i.e. the paying out thereof, is prevented. The manner of positioning the change slide 31 as depicted in Fig. 10 corresponds to the manner of positioning the change slide 31 as depicted in Fig. 4.


When the payout link 4 returns to its initial position from the position
5 depicted in Fig. 10, the change slide 31 similarly returns to its initial position as depicted in Fig. 8.

According to the coin dispenser 30 described in the foregoing, in the initial position of the payout link 4 depicted in Fig. 8, when a signal is input from the controller (not shown) to pay out one large- diameter coin held in the
10 hole 22, the engagement between the cam shaft 31f of the change slide 31 and the change lever 23a is released in response to that coin payout signal (cf. Fig. 2).

Subsequently, the payout cams 2 and 3 turn through one revolution in the direction of the arrows, as depicted in Fig. 2, thereby causing, via the
15 payout link 4, the payout slider 5 to move reciprocally in the directions indicated by the arrow A.

As this happens, when the payout link 4 moves slightly in the direction of the arrow A, as depicted in Fig. 11, the change slide 31 is pushed in the direction of the arrow A via the turning shaft 31d inserted into the turning
20 bearing hole 4 in the payout link 4, but the engagement between the cam shaft 31f and the change lever 23a (cf. Fig. 8) has been released, so the back end 31b of the change slide 31 moves toward the right (in the drawing) along the arc shaped cam channel 41 in which the cam shaft 31f is inserted, while, simultaneously, the change slide 31 turns counterclockwise about the turning
25 shaft 31d that is inserted in the shaft bearing hole 4h. In other words, its attitude begins to change.

Then, when the payout link 4 moves further in the direction of the arrow A, as depicted in Fig. 12, the change slide 31 turns further in the




counterclockwise direction about the turning shaft 31d that is inserted in the shaft bearing hole 4h, whereby the turning attitude is increased, and the entire change slide 31 is thrust into the change slide storage hole 4f of the payout link 4 along the longitudinal direction thereof.

5 When the payout link 4 moves further in the direction of the arrow A from the position depicted in Fig. 12 and arrives at the return point thereof, the entire change slide 31, except for the guide panel 31i, is accommodated inside the change slide storage hole 4f of the payout link 4 along the longitudinal direction thereof.

10 In this position wherein the change slide 31 is stopped as depicted in Fig. 13, the entirety thereof is accommodated inside the change slide storage hole 4f in the payout link 4 along the longitudinal direction thereof, and the release of the entire bottom of the hole 22 in the change slider 5 is maintained. As a result, the coin held in the hole 22 drops down and is paid out. The manner
15 of positioning the change slide 31 as depicted in Fig. 13 corresponds to the manner of positioning the change slide 31 depicted in Fig. 3.

 Accordingly, when the coin dispenser 30 described in the foregoing is implemented, as depicted in Fig. 3, the dimension M in the depth direction from the front to the back of the coin dispenser 30 inclusive of the distance of
20 reciprocal movement of the change slide 31 when paying out coins is far shorter than in the conventional apparatus, because the change slide 31 itself is accommodated inside the payout link 4, thus making it possible to shorten the dimension in the depth direction of the coin dispenser 30 to the maximum extent possible.

25 In the embodiment described in the foregoing, the coin dispenser 30 of the present invention is applied to the paying out and non- paying out of a relatively large- diameter coin held in the hole 22 in the payout slider 5, but the present invention is in no way limited by the embodiment so described, and



may be applied to the paying out and non-paying out of coins held in the other holes formed in the payout slider 5, namely the holes 7, 8, 9 and 10, in which case it would be possible to even further shorten the dimension in the depth direction of the coin dispenser overall, as compared to the conventional apparatus.


In the embodiment described in the foregoing, the cam shaft 31f is integrally formed with the upper surface 31e of the change slide 31, as shown in Fig. 6. However, the present invention is not limited to this embodiment.

Alternatively, as shown in Fig. 14 in which the same reference symbols as used in Fig. 6 are used to indicate identical components, it may be so construction that a metal shaft member 100 is pressed into the upper surface 31e of the change slide 31 in place of the cam shaft 31f, and a roller 101 is rotatably supported by the metal shaft member 100.

With this alternative construction where the cam shaft 31f is constituted by the metal shaft member 100 and the roller 101, not only the engagement of the cam shaft 31f and the arc shaped cam channel 41 become smooth as shown in Fig. 11, etc., but also durability of the cam shaft 31f improves so that a coin dispenser of long life can be realized.

Further, in the embodiment described in the foregoing, the cam channel 41 is formed in a simple arc shape as shown in Fig. 11. Alternatively, as shown in Fig. 15 showing the cam shaft 31f and the cam channel 41 engaged with the cam shaft 31f in an enlarged manner, the starting end 41a of the cam channel 41 may be formed to have a cam channel portion 41b having a smaller radius of curvature compared with the other portions thereof.

With this construction where the cam channel portion 1b of a smaller radius of curvature is formed at the starting end 41a of the channel 41, when the cam shaft 31f reaches the cam channel portion 41b during the returning of the change slide 31 to its initial position, the cam shaft 31f returns rapidly to the



starting end 41a. As a result, the change slide 31 can return to its initial position (Fig. 8) rapidly and reliably.


Further, as shown in Fig. 16 in which the same reference symbols as used in Fig. 10 are used to indicate identical components, it may be so

5 constructed that a protrusion 4a' is provided at the fore end of the payout link 4 to prevent the change slide 31 from rotating in the direction of arrow P when the tip 31a of the change slide 31 advances and enters completely the bottom of the hole 22 so as to close off the bottom of the hole 22, and the protrusion 4a' is made abutted to the guide panel 31i.

10 With this construction, it may happen that a payout coin is clogged in a gap formed between the payout slide 5 and the protrusion 4a'. To prevent this clogging, as shown in Fig. 17 in which the same reference symbols as used in Fig. 13 are used to indicate identical components, a protruding portion 31p is provided at the side of the change slide 31 to cover the gap formed between the
15 payout slide 5 and the protrusion 4a'. With the protruding portion 31p provided at the side of the change slide 31, the gap formed between the payout slide 5 and the protrusion 4a' can be covered so as to prevent a payout coin from being clogged in the gap. As a result, the payout coin can smoothly drop through the hole 22 and be paid out.

20 With the coin dispenser of the present invention, as described in the foregoing, a change slide that controls the payout and non- payout of coins is made to revolve so that it is accommodated inside the payout link when coins are being paid out, thereby making it possible to set the distance of fore-and-aft movement of the change slide needed during coin payout to be extremely
25 short. Thus the dimension in the depth direction of the coin dispenser can be set to be extremely short also, and the coin dispenser made compact.

Because the coin dispenser can be made compact, furthermore, coin dispensers can be provided that exhibit functions for paying out many kinds of




coins, without altering the basic sizes thereof in the depth dimension, even when they are employed in different countries of the world using coins of different types and diameters.

INDUSTRIAL APPLICABILITY

As described in the foregoing, the coin dispenser of the present invention is a
5 compact apparatus, making it ideal for coin dispensers that pay out many different types of coins, without altering the basic size thereof in the depth dimensions, when employed in different countries of the world using coins of different types and diameters.

Although the invention has been described with reference to specific examples it will be appreciated by those skilled in the art that the invention may be embodied in
10 many other forms.



THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:-

1. A coin dispenser that causes a payout slider to move reciprocally via a payout link, and comprises a change slide that opens coin holding holes formed in the payout slider when paying out coins so as to drop the coins held in the coin holding holes down, and
5 closes off the coin holding holes when not paying out coins so as to prevent coins from falling down, wherein the coin dispenser further comprises:

change slide accommodating means for accommodating the change slide inside the payout link along longitudinal direction thereof; and

- change slide turning means for turning the change slide in conjunction with
10 movement of the payout link when paying out coins, wherein when paying out the coins, the change slide is turned by the change slide turning means so as to be accommodated inside the change slide accommodating means.

2. The coin dispenser according to claim 1, wherein the change slide accommodating means comprises a change slide storage hole formed in the payout link, for
15 accommodating the change slide along longitudinal direction thereof.

3. The coin dispenser according to claims 1 or 2, wherein the change slide turning means comprises:

a turning shaft that projects from a bottom surface of the change slide;

a cam shaft that projects at upper surface of the change slide;

- 20 a shaft bearing hole formed in the change slide storage hole, for supporting the turning shaft; and



an arc shaped cam channel formed in a top cover that covers the payout link, for guiding the cam shaft.

4. A coin dispenser substantially as herein described with reference to any one of the embodiments of the invention illustrated in the accompanying drawings.


5 DATED THIS 29th Day of October, 1999
KABUSHIKI KAISHA NIPPON CONLUX

5

2

1



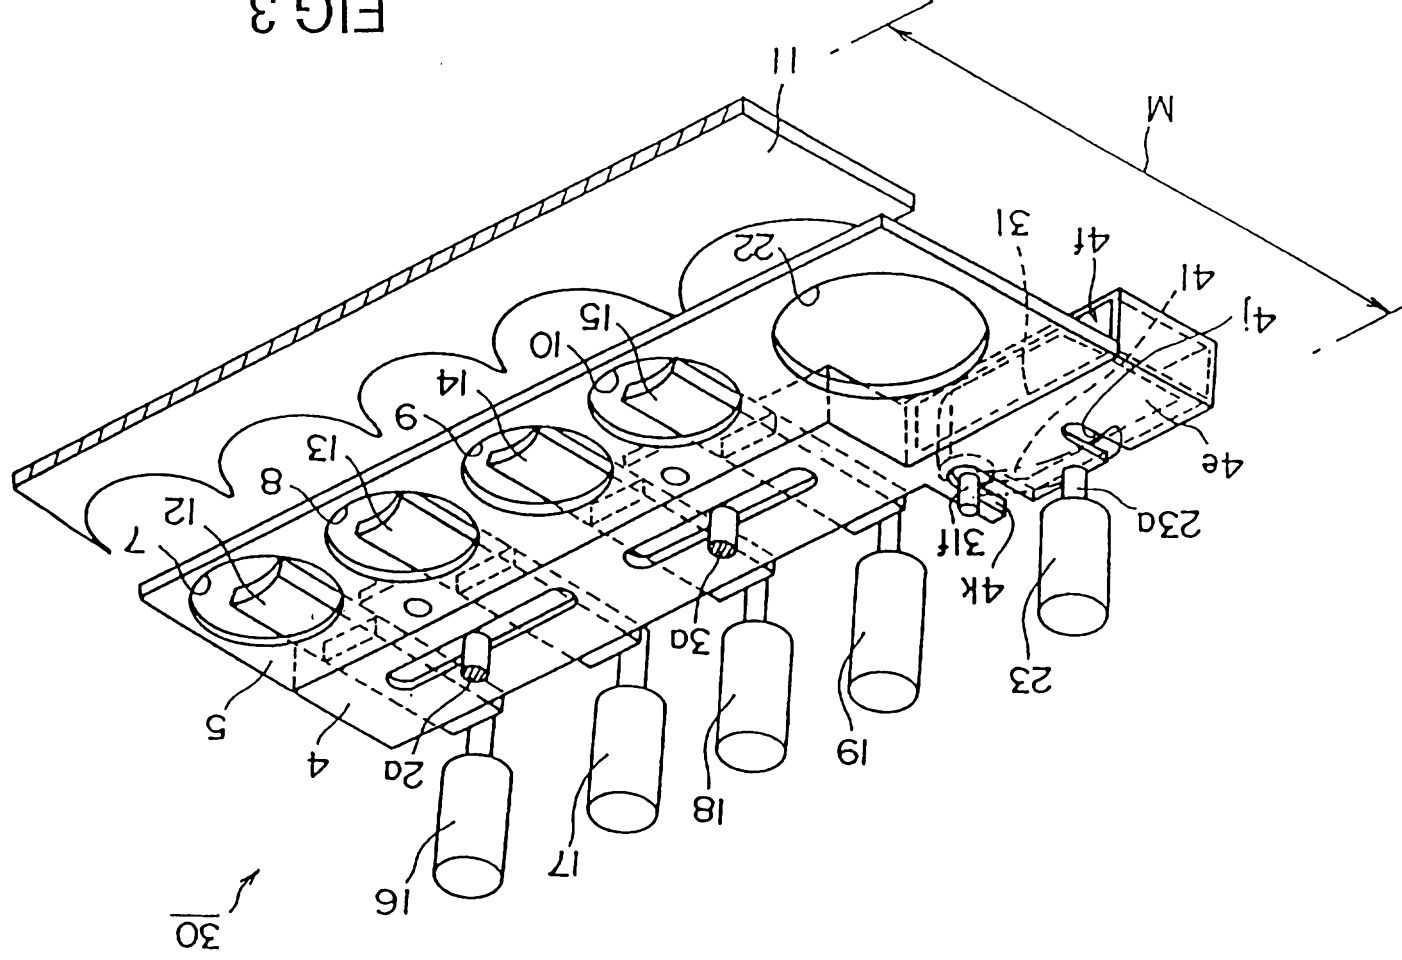

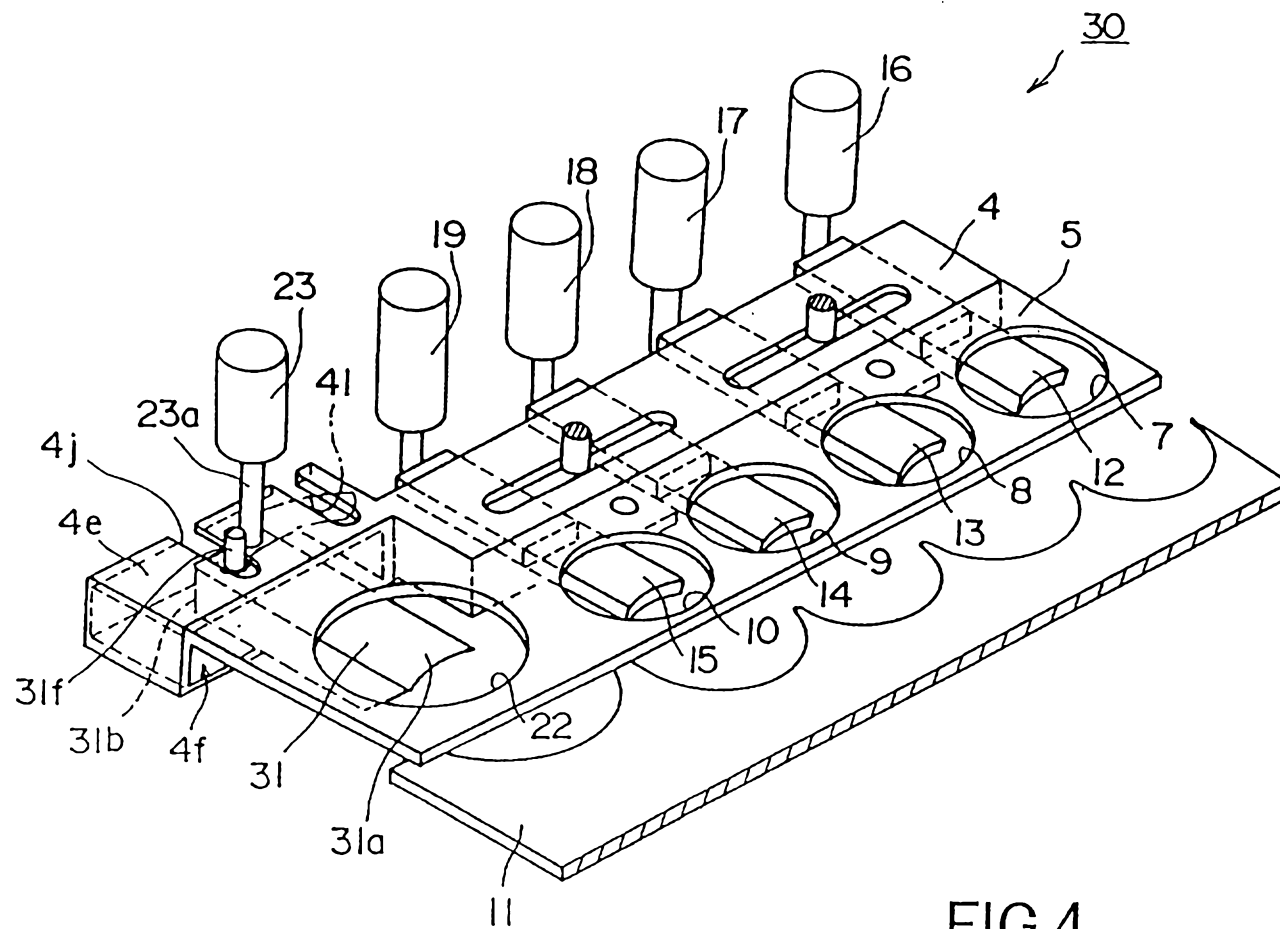


FIG.4

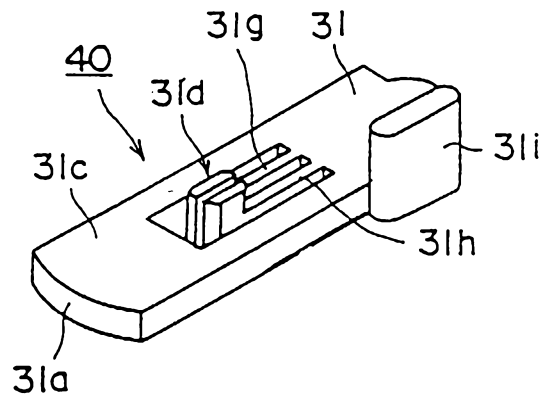


FIG. 5

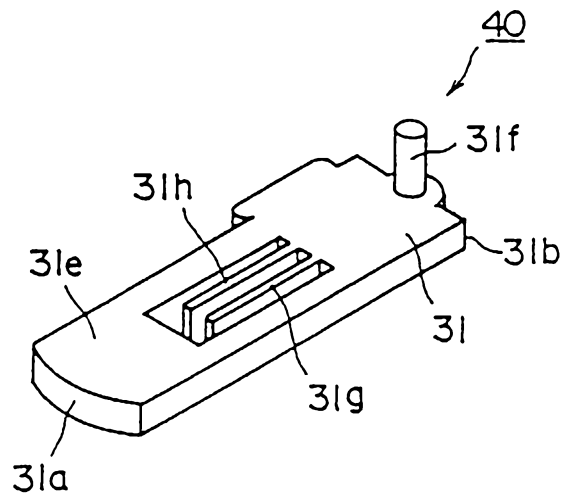


FIG. 6

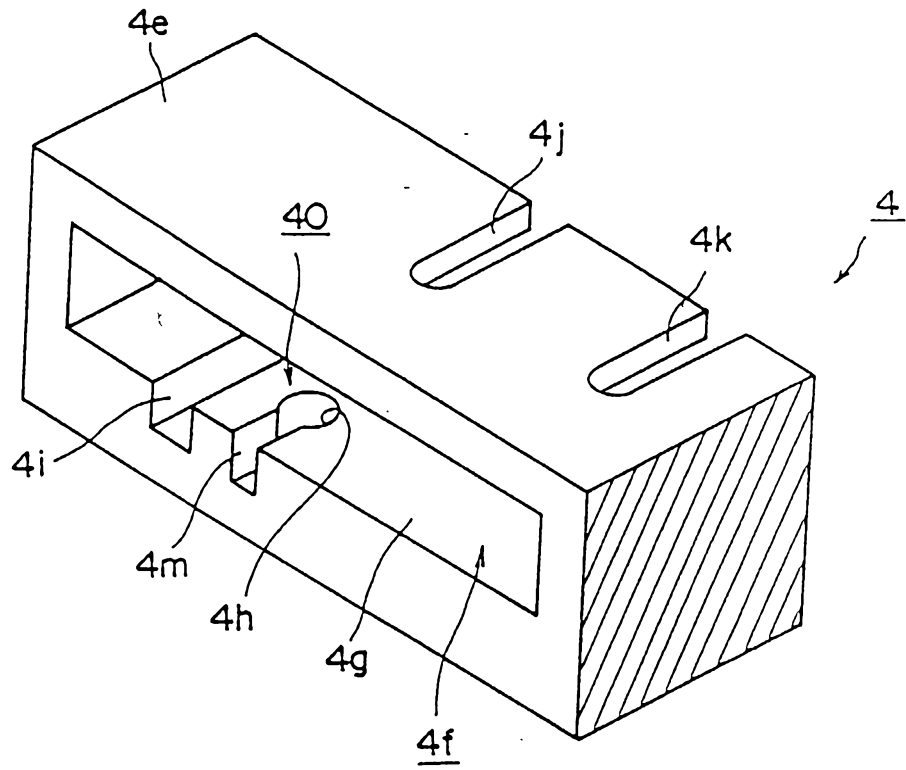


FIG.7

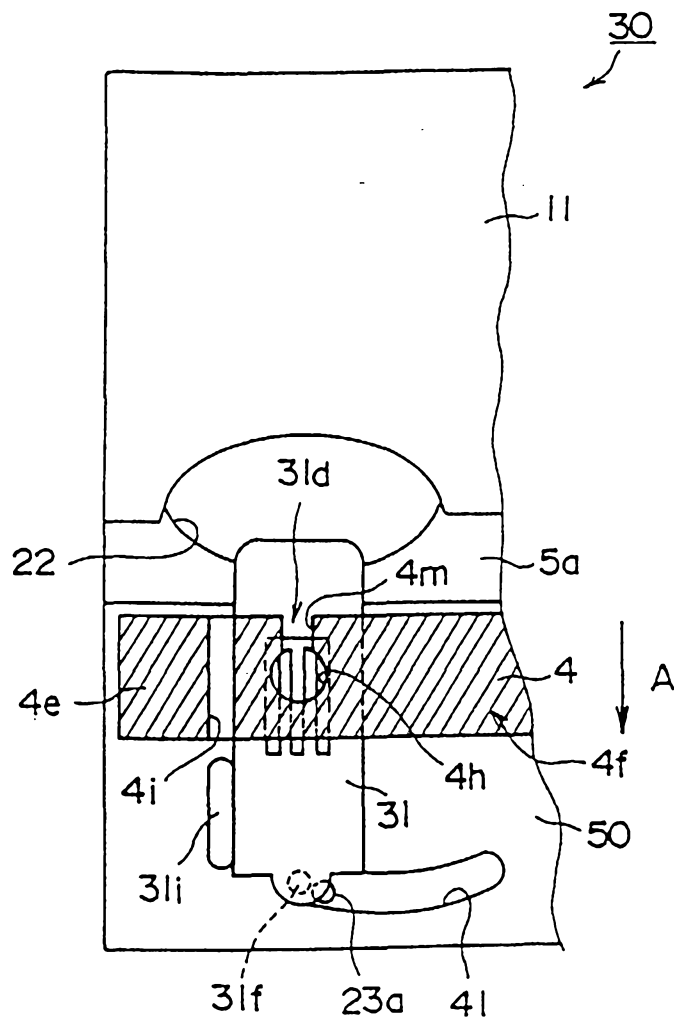


FIG.8

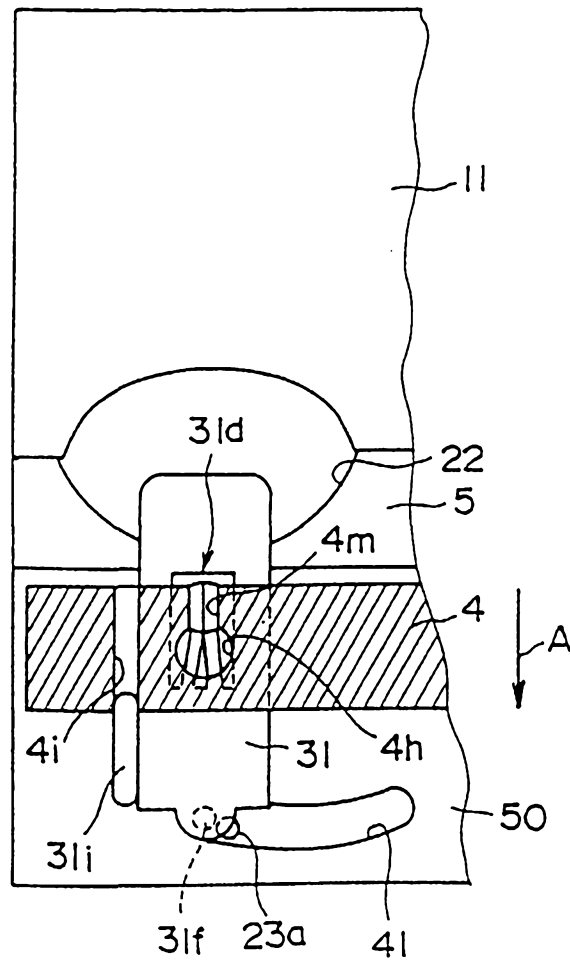


FIG.9

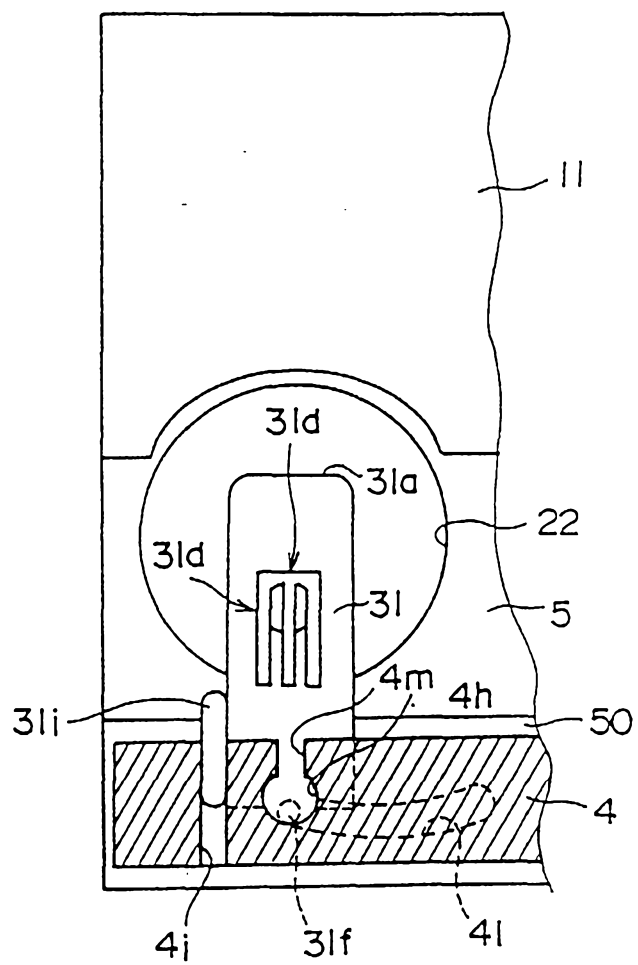


FIG.10

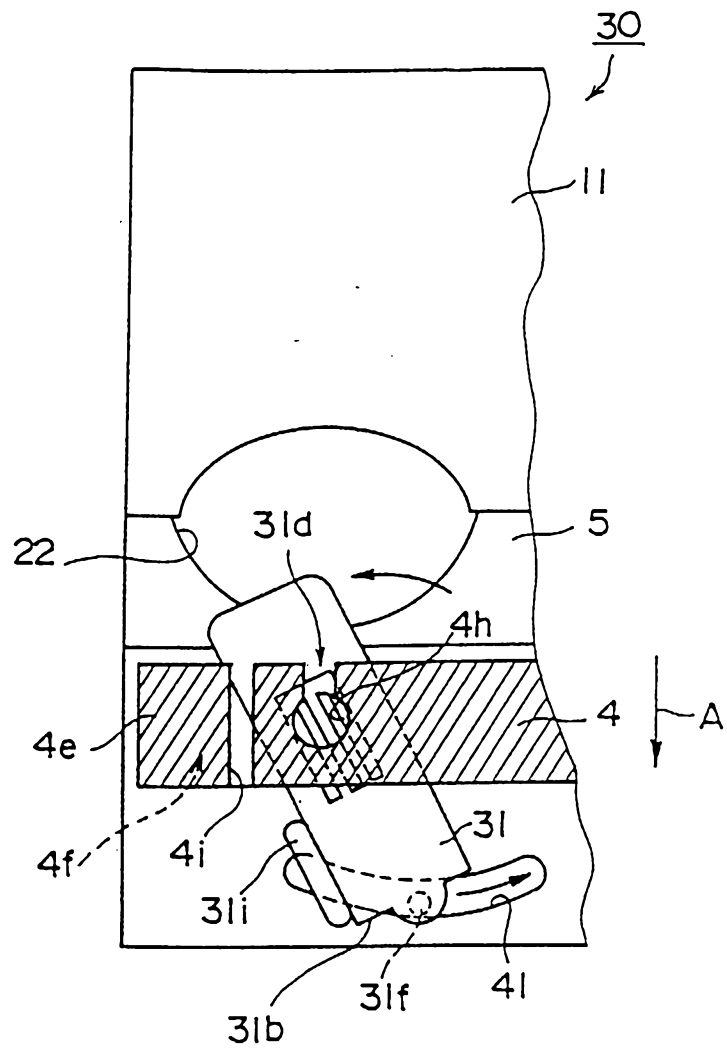


FIG.11

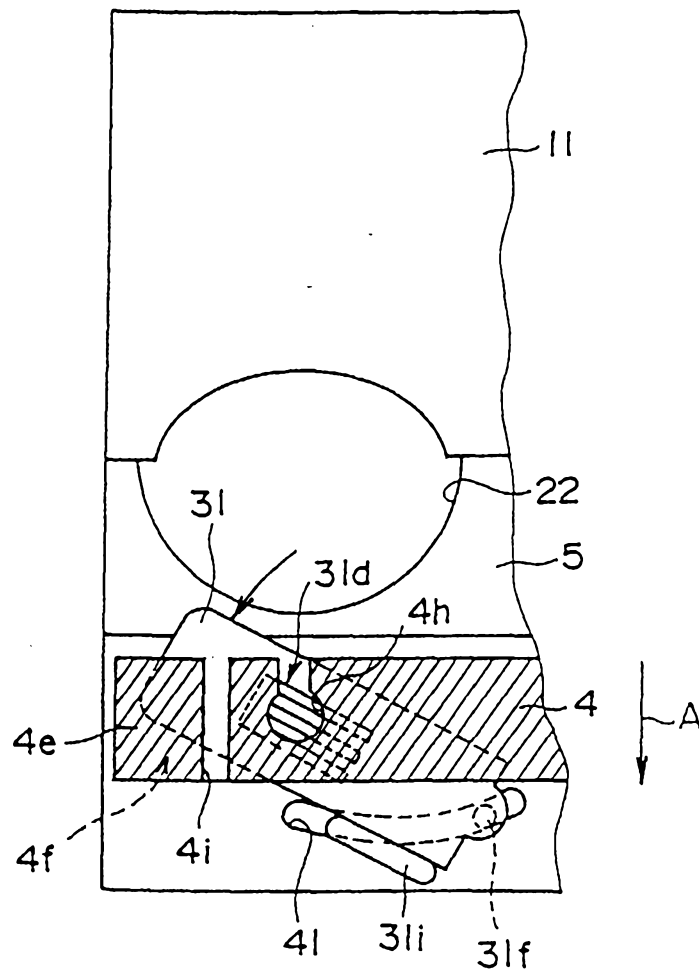


FIG.12

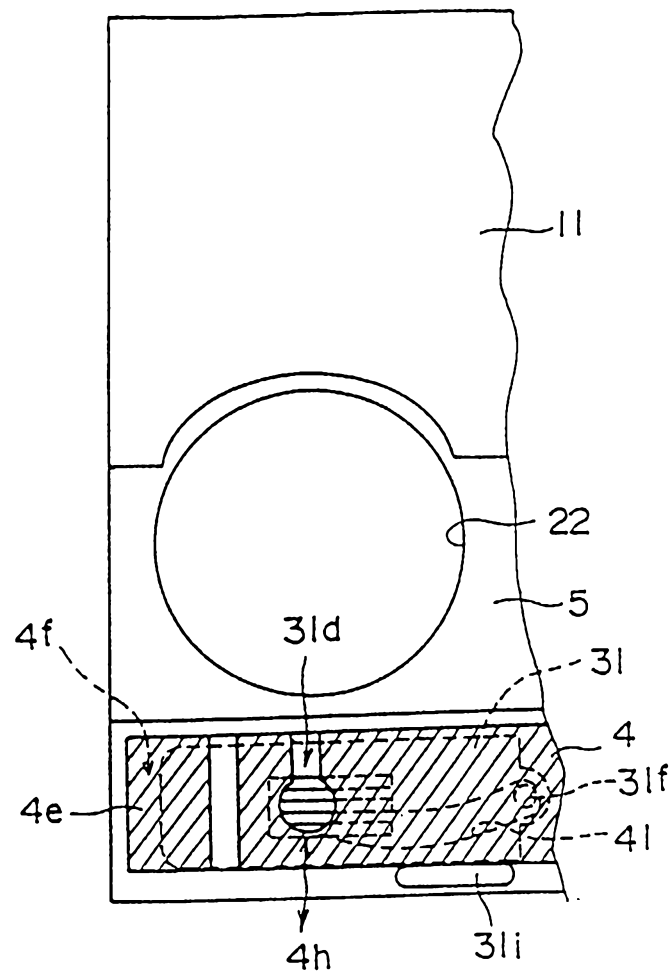


FIG.13

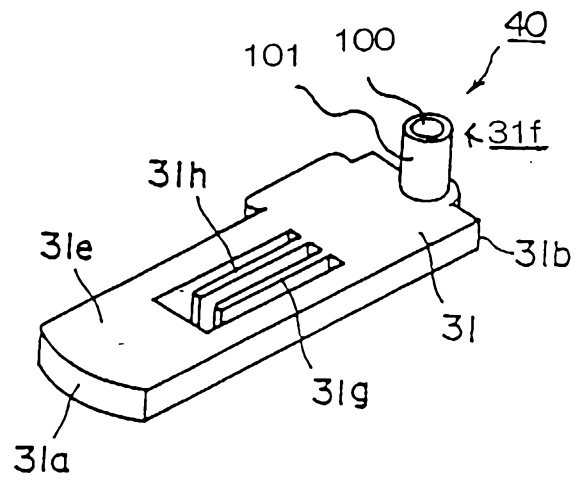


FIG. 14

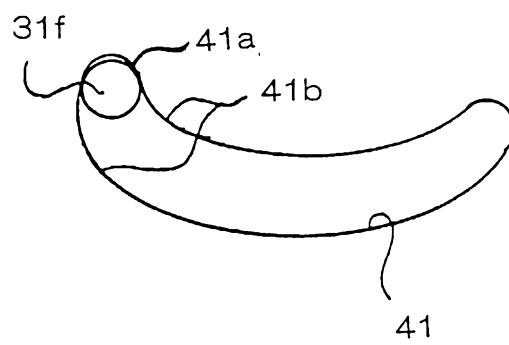


FIG. 15

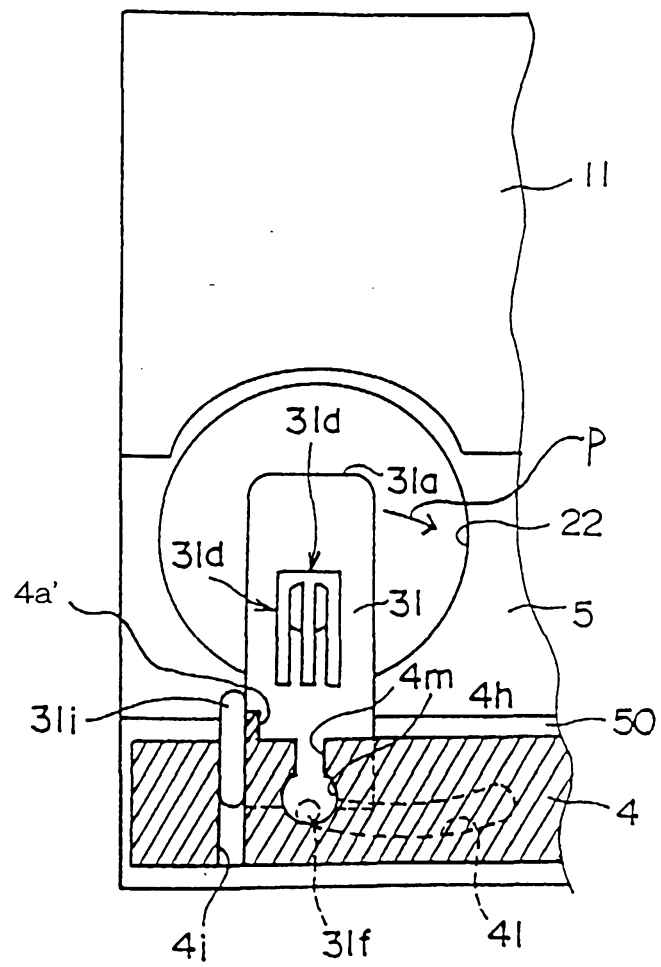


FIG.16

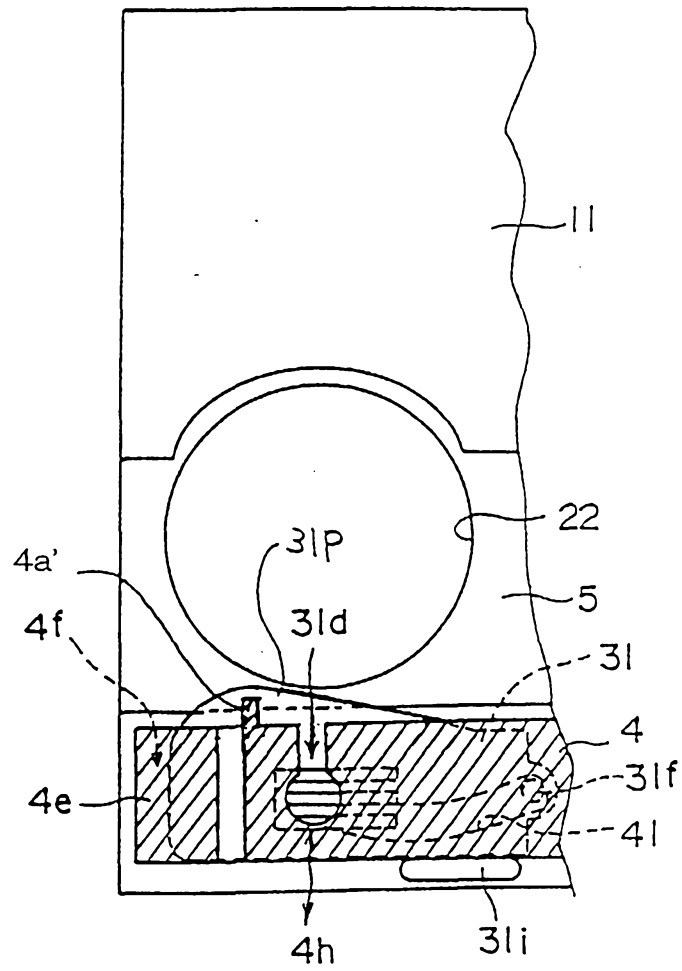


FIG.17

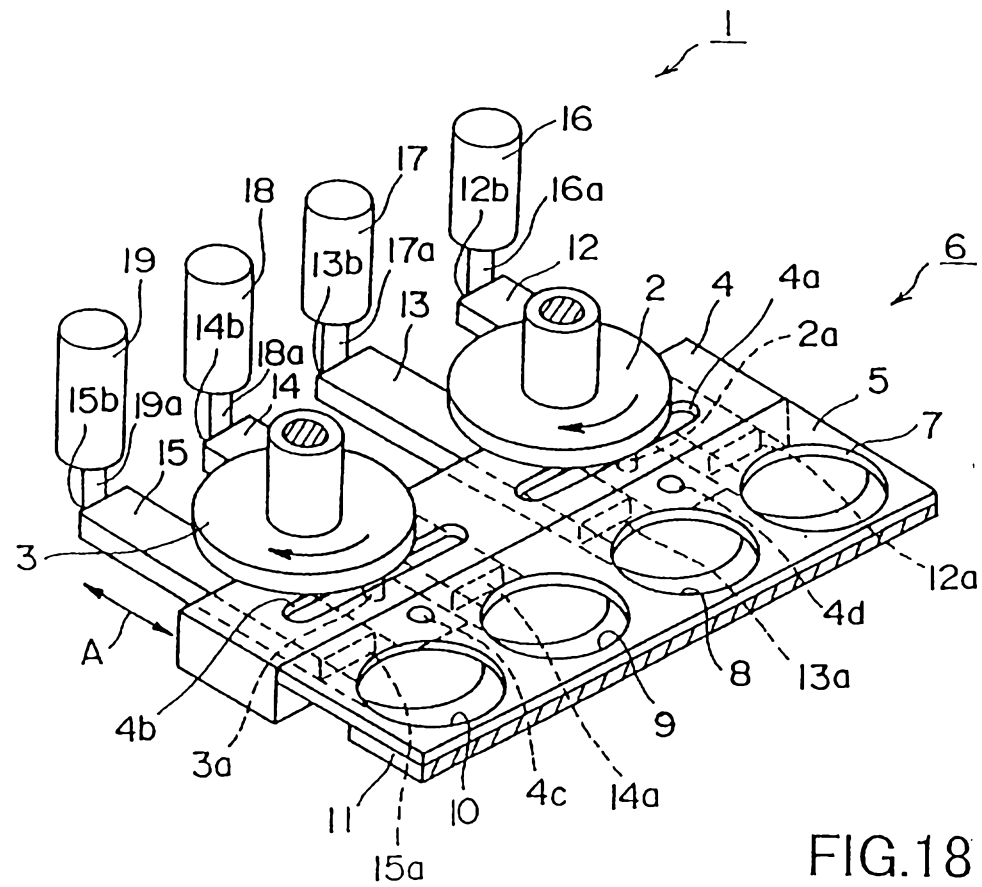


FIG.18

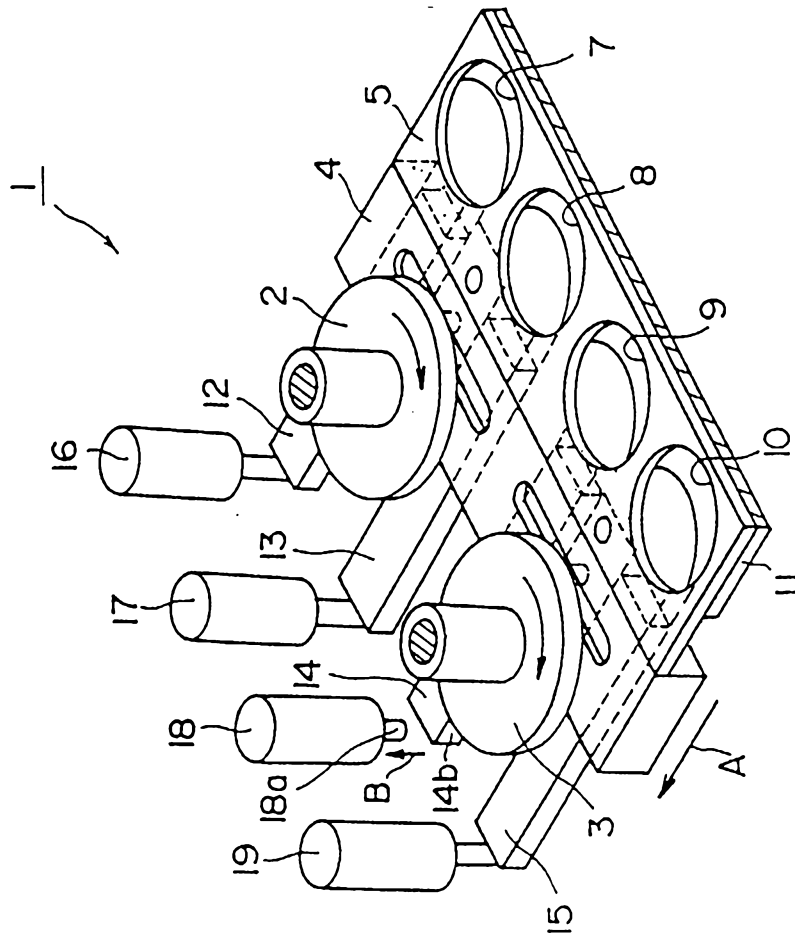
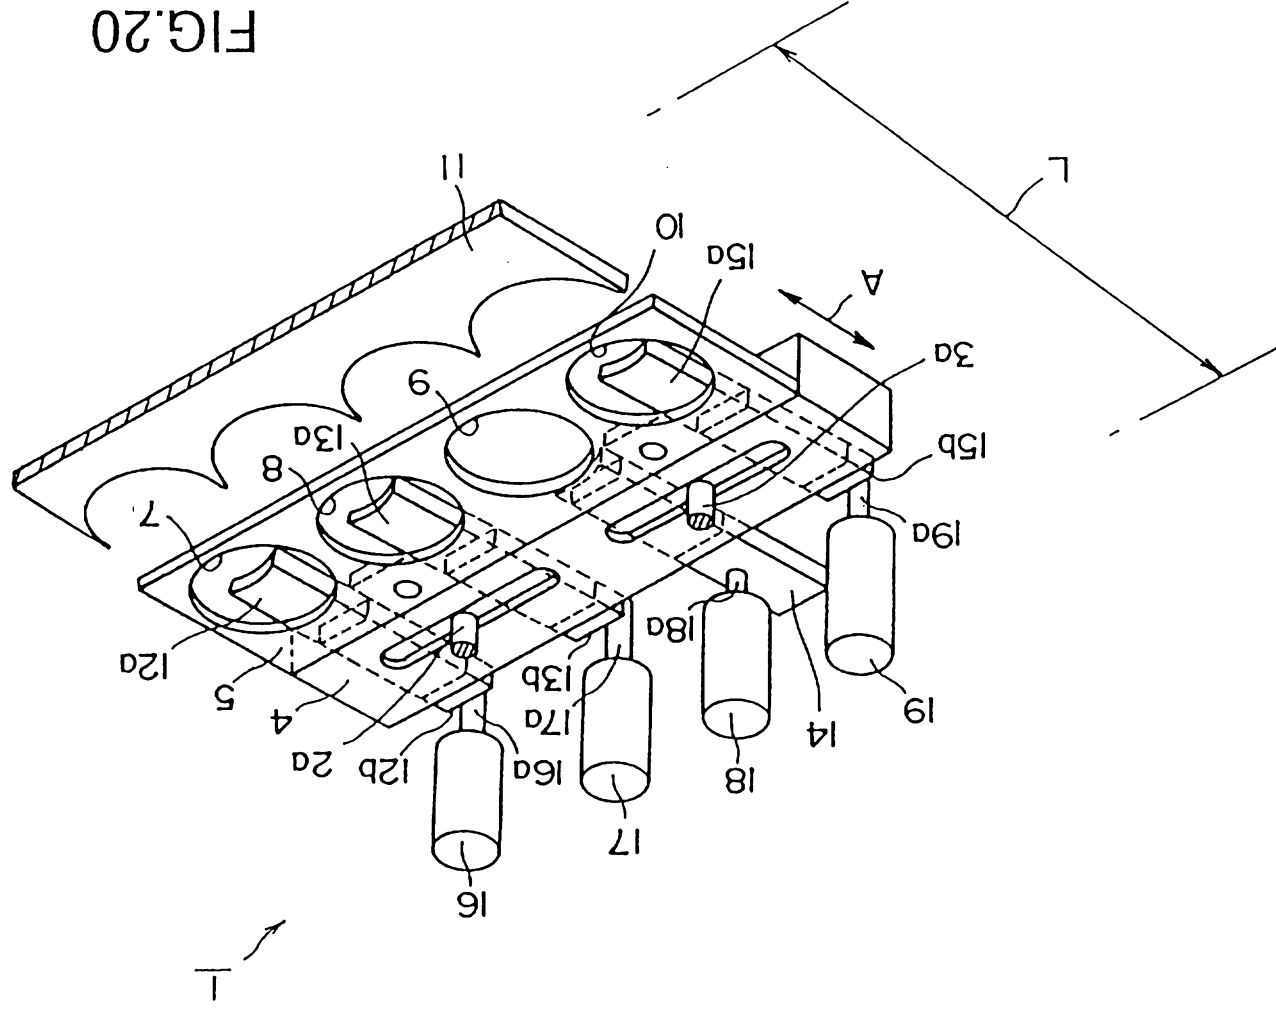


FIG.19



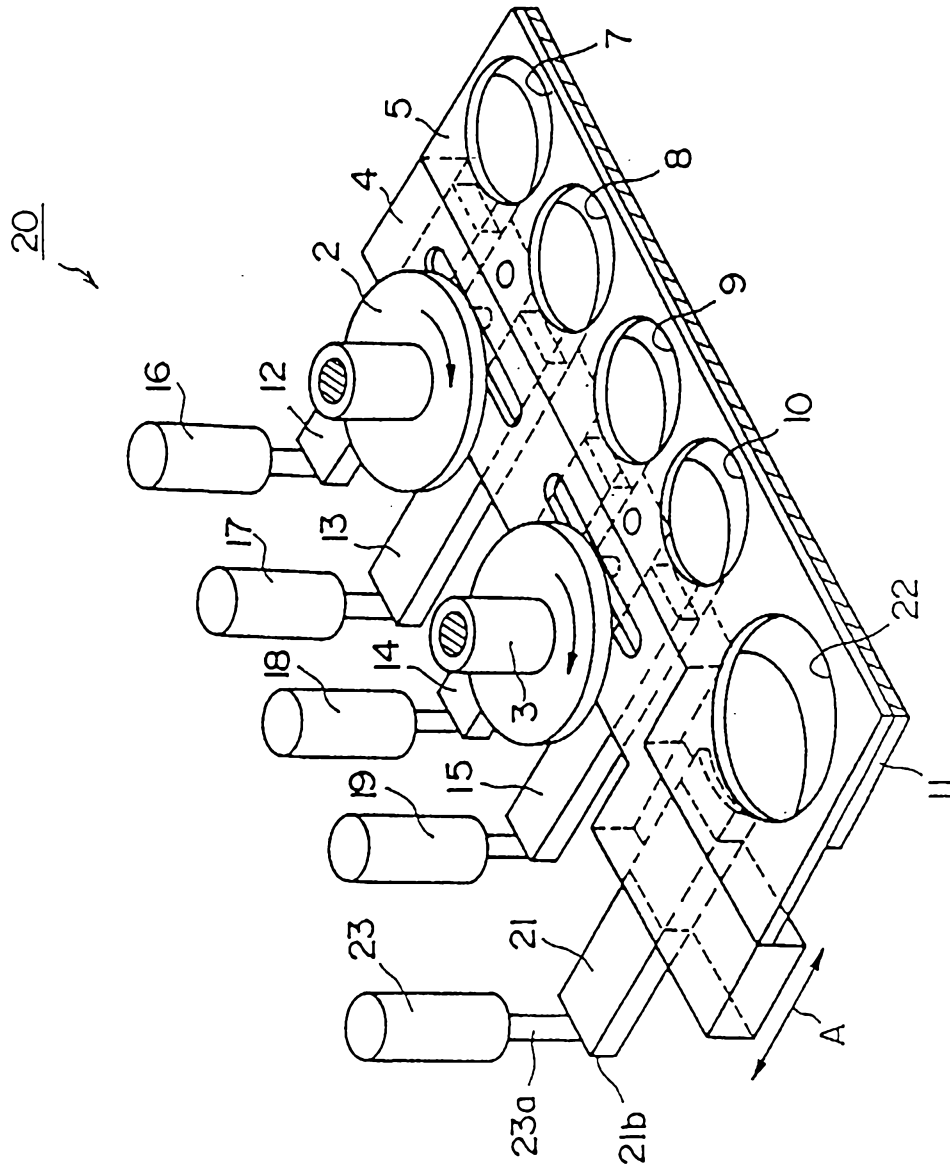


FIG. 21

