



(51) International Patent Classification:

G02B 15/177 (2006.01)

G02B 21/02 (2006.01)

(21) International Application Number:

PCT/EP2019/086176

(22) International Filing Date:

19 December 2019 (19.12.2019)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

18248050.9

27 December 2018 (27.12.2018) EP

(71) Applicant: LEICA INSTRUMENTS (SINGAPORE)

PTE. LTD. [SG/SG]; 12 Teban Gardens Crescent, Singapore 608924 (SG).

(72) Inventor; and

(71) Applicant (for US only): HONEGGER, Marc [CH/CH];

Mirabellenweg 4, 8590 Romanshorn (CH).

(72) Inventor: PAULUS, Robert; Häfeleweg 3, 88145 Hergatz

(DE).

(74) Agent: BRADL, Joachim; Ernst-Leitz-Strasse 17-37, 35578 Wetzlar (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,

(54) Title: OPTICAL SYSTEM AND METHOD FOR IMAGING AN OBJECT

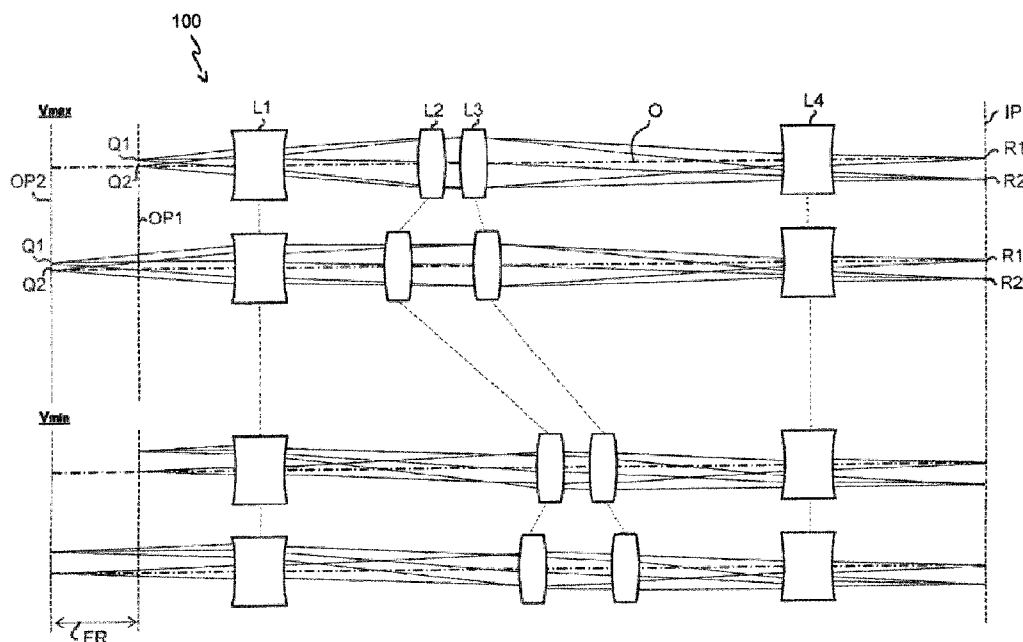


Fig. 1

(57) Abstract: An optical system for imaging an object onto an image plane of a microscope comprises a first lens group and a fourth lens group which are stationary, and a second lens group and a third lens group which are independently movable along an optical axis (O) of the optical system for focusing the object onto the image plane while zooming between a short focal length extremity and a long focal length extremity.

TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

Optical system and method for imaging an object

Technical field

The present invention relates to an optical system and a method for imaging an object onto an image plane of a microscope.

For use in a microscope, optical systems are known, which provide a zoom function enabling an object to be imaged onto an image plane with continuously variable magnification. For this purpose, such an optical system includes one or more lens groups which can be moved along the optical axis for zooming between a short focal length extremity and a long focal length extremity. Usually, the optical system includes a cam mechanism or the like in order to move the zoom lens groups in an interdependent manner.

A microscope including an optical zoom system as described above further comprises a focusing device which is designed to focus the object onto the image plane for any zoom setting, i.e. for any positioning of the zoom lens groups along the optical axis. Usually, such a focusing device is configured to vary an axial distance from an object plane, on which the object is located, to the image plane. For this purpose, the focusing device may move the optical system relative to a microscope stage on which the object is arranged, or vice versa.

Providing the microscope with such a focusing device involves considerable effort in terms of the components which have to be provided in order to achieve the relative movement between the optical system and the microscope stage. Further, as the

focusing device has to be operated by the user, the focusing operation is cumbersome and time-consuming.

Therefore, it is an object of the present invention to provide an optical system for imaging an object onto an image plane of a microscope, said optical system enabling a focusing operation in a convenient and precise manner.

Summary

In order to achieve the afore-mentioned object, an optical system for imaging an object onto an image plane of a microscope is provided, the optical system comprising a first lens group and a fourth lens group which are stationary, and a second lens group and a third lens group which are independently movable along an optical axis of the optical system for focusing the object onto the image plane while zooming between a short focal length extremity and a long focal length extremity.

The optical system as described above enables continuously zooming, i.e. continuously varying a total focal length of the optical system between the short focal length extremity and the long focal length extremity, and at the same time continuously focusing, i.e. continuously varying a distance from the object plane to the image plane.

A coupled zooming and focusing control is achieved by independently moving the second lens group and the third lens group while the first lens group and the fourth lens group remain stationary. Thus, it is possible to simultaneously adjust the magnification, based on which the object is imaged onto the image plane of the microscope, and the axial distance from the object plane, on which the object is

arranged, to the image plane. As a result, the optical system enables the user of the microscope to realize the desired zoom and focus adjustments in a convenient and precise manner.

In this respect, it is to be noted that the afore-mentioned image plane is meant to be any plane on which an image is created by the optical system. In particular, such an image plane may comprise a plane on which a sensor as for instance a digital camera is located, and a plane on which an intermediate image is generated.

Preferably, the first lens group having negative power, the second lens group having positive power, the third lens group having positive power and the fourth lens group having negative power are arranged in this order from an object side. According to this embodiment, the stationary lens groups are formed the outer lens groups of the optical system, i.e. by the first and fourth lens groups facing towards the object side and the image side, respectively. Thus, a compact design of the optical system is achieved.

In a preferred embodiment, the optical system is configured to be telecentric on an object side and telecentric on an image side. Such a double-sided telecentric configuration enables the object to be imaged with high image quality.

In a preferred embodiment, the short focal length extremity and the long focal length extremity define a zoom range from $Z1=0.9$ to $Z2=5$. A limitation of the zoom range to the afore-mentioned values $Z1$ and $Z2$ allows a design of the optical system in which the moving distances of the second lens group and the third lens group when performing the coupled zooming and focusing operation do not become too large. Thus, a compact design of the optical system is achieved.

Preferably, memory means are provided for storing information assigning each combination of zoom setting and focus setting to a corresponding lens group position along the optical axis for each of the second and third lens groups. Storing the zoom and focus information enables the optical system to be controlled in a simple and precise manner.

In a preferred embodiment, the optical system comprises an optical element for coaxial light coupling. Such an optical element may be used for coupling illumination light emitted by a light source of the microscope into the optical system. Thus, the optical system can be used for both illuminating and imaging the object.

In a preferred embodiment, the optical element is arranged in a segment of the optical system where an angular characteristic of light passing the optical system is the same for the whole range of zoom and focus positions of the second lens group and the third lens group. In case that, for instance, an illumination path is coupled into the optical system by means of the afore-mentioned optical element, the entire zoom range, i.e. all zoom positions of the second and third lens groups, can be supplied with light passing the optical system from the object plane to the image plane without having to perform a corresponding zoom operation on the illumination light path which is coupled into the optical system by the optical element.

Preferably, the optical element is arranged in the fourth lens group.

In case that the optical element is arranged in the fourth lens group, the latter preferably comprises a first sub-lens group having negative power and a second sub-lens group having positive power arranged in this order from the object side, wherein

the optical element is arranged between the first sub-lens group and the second sub-lens group.

According to another aspect, a method is provided for imaging an object onto an image plane of a microscope, comprising the steps of holding a first lens group and a fourth lens group stationary during imaging of the object; and moving a second lens group and a third lens group independently along an optical axis for focusing the object onto the image plane while zooming between a short focal length extremity and a long focal length extremity.

According to another aspect, a microscope is provided comprising an image plane and an optical system as described above.

Short Description of the Figures

Hereinafter, preferred embodiments are described with reference to the drawings in which:

Figure 1 is a lens diagram illustrating a configuration of an optical system for different zoom settings and different focusing settings according to an embodiment of the present invention;

Figure 2 is a lens diagram illustrating a configuration of an optical system for different zoom settings and focus settings according a further embodiment of the present invention; and

Figure 3 is a diagram illustrating an exemplary configuration of a microscope including an optical system as shown in Figures 1.

Figure 1 is a lens diagram showing an optical system 100 which may be included into a microscope for imaging an object onto an image plane IP. The image plane IP may be a plane in which an image sensor of the microscope is arranged. Alternatively, the image plane IP may be a plane in which an intermediate image is created.

Figure 1 shows in its upper half the configuration of the optical system 100 at a short focal length extremity, i.e. in a setting in which a magnification provided by the optical system 100 is maximal ($V_{\max}$ in Figure 1). Correspondingly, Figure 1 shows in its lower half the optical system 100 at a long focal length extremity, i.e. in a setting in which the magnification provided by the optical system 100 is minimal ($V_{\min}$ in Figure 1). Further, Figure 1 shows for each of the focal length extremities two focusing states, namely a first focusing state in which a distance from an object plane OP1 to the image plane IP along an optical axis O is minimal, and a second state, in which a distance from an object plane OP2 to the image plane IP along the optical axis O is maximal. The distance between the object plane OP1 and the object plane OP2 defines a focus range FR.

The optical system 100 comprises a first lens group L1 having negative power, a second lens group L2 having positive power, a third lens group L3 having positive power and a fourth lens group L4 having negative power, the lens group L1 to L4 being arranged in this order from the image plane OP1, OP2 to the image plane IP. The first lens group L1 facing towards the object plane OP1, OP2 and the fourth lens group L4 facing to the image plane IP are stationary. In other words, upon focusing and zooming, the two outer lens groups L1, L4 of the optical system 100 remain

unchanged in their positions along the optical axis O. In contrast, both inner lens groups L2, L3 of the optical system 100 are independently moved along the optical axis O for focusing the object onto the image plane IP while zooming between the long focal length extremity, i.e. $V_{\min}$, and the short focal length extremity, i.e. $V_{\max}$.

Specifically, both the second lens group L2 and the third lens group L3 are moved from the object plane OP1, OP2 to the image plane IP while zooming between the long focal length extremity and the short focal length extremity. Further, the second lens group is moved towards the object plane OP1, OP2, and the third lens group L3 is moved towards the image plane IP when the distance from the object plane to the image plane IP is increased, i.e. when the object plane is moved from OP1 to OP2. This focusing movement of the second lens group L2 and the third lens group L3 applies for both the long focal length extremity and the short focal length extremity.

Figure 1 shows for each zoom and focus setting two beam paths associated with object points Q1, Q2 which are spatially separated in the respective object plane OP1, OP2. The object point Q1 is imaged by the optical system 100 into an image point R1. Likewise, the object point Q2 is imaged by the optical system 100 into an image point R2. As illustrated by the respective beam parts, the optical system 100 may be configured to be telecentric both on the object side and on the image side.

According to the embodiment shown in Figure 1, the short focal length extremity and the long focal length extremity may define a zoom range from $Z1=0.9$ to $Z2=5$. Needless to say that the embodiment is not limited to the afore-mentioned zoom range.

Each combination of zoom setting and focus setting corresponds to a combination of an associated position of the second lens group L2 and an associated position of the third lens group L3 along the optical axis O. Thus, an information assigning each combination of zoom setting and focus setting to the corresponding lens group positions of the second and third lens groups L2, L3 O may be stored beforehand so that this information can be referred to when a specific zoom setting and a specific focus setting shall be provided.

Figure 2 shows a modified embodiment referring to a lens diagram which corresponds to the lens diagram of Figure 1. According to the modified embodiment shown in Figure 2, an optical system 200 comprises an optical element 202 for coaxial light coupling. Specifically, the optical element 202 may be configured to couple illumination light coaxially into the optical system 200, the illumination light being emitted by a light source not shown in Figure 2. For this purpose, the optical element 202 may be formed as a beam splitter which is configured to reflect the illumination light towards the object plane OP1, OP2 and which is further configured to transmit the light passing the optical system 200 from the object plane OP1, OP2 to the image plane IP. The optical element 202 may be arranged within the fourth lens group L4, in particular between a first sub-lens group 204 having negative power and a second sub-lens group 206 having positive power. Within the fourth lens group L4, the first sub-lens group 204 is positioned to face the image plane OP1, OP2, and the second sub-lens group 206 is positioned to face the image plane IP.

Preferably, the optical element 202 is arranged in a segment of the optical system 200 where an angular characteristic of light passing through the optical system 200 is the same for the whole range of zoom and focus positions of the second lens group L2 and the third lens group L3. In other words, the segment of the optical system 200,

which preferably includes the optical element 202, exhibits a constant angular characteristic with respect to the light passing the optical system 100 throughout the entire zoom range from the short focal length extremity to the long focal length extremity as well as throughout the entire focus range FR defined by OP1 and OP2. As the afore-mentioned angular characteristic remains unchanged while performing the coupled zoom and focus operation, the light passing the optical system 200 from the object plane OP1, OP2 to the image plane IP1 can be supplied to all zoom positions of the second and third lens group L2, L3 without any need to perform a corresponding zoom operation on the illumination light path which is coupled into the optical system 200 by means of the optical element 202.

Figure 3 shows an embodiment of a microscope 308 which may comprise the optical system 100 shown in Figure 1. Specifically, the microscope 308 includes a first magnification changing subsystem 309 which comprises a first digital camera 310 and a first optical magnification system which is formed by the optical system 100 as shown in Figure 1. The first digital camera 310 and the optical system 100 are aligned along a first optical axis O1.

The microscope 308 further comprises a second magnification changing subsystem 312 including a second digital camera 314 and a second optical magnification system 316. The second digital camera 314 and the second optical magnification system 316 are aligned along a second optical axis O2.

The microscope 308 further comprises a controller 318 including a memory 320. Further, the microscope 308 comprises a microscope stage 322 on which an object 324 is arranged. The microscope stage 322 is movable in a direction orthogonal to the optical axis O1 and O2 by means of a positioning device 326. In particular, the

controller 318 is configured to cause the positioning device 326 to laterally shift the microscope stage 322 such that a target region 328 of the object 324 is positioned on the optical axis O1 of the first magnification changing subsystem 309 or the optical axis O2 of the second magnification changing subsystem 312.

Whereas the first magnification changing subsystem 309 comprising the optical system 100 may be used as an optical zoom system, the second magnification changing subsystem 312 may be used as a digital zoom system. For this, the second digital camera 314 may be provided with a digital zoom function whereas the second optical magnification system 316 is configured to provide a fixed magnification.

For instance, in the configuration shown in Figure 3, the second magnification changing subsystem 312 may be used to generate an overview image when its optical axis O2 is aligned with the target region 328 of the object 324. As soon as the overview image has been generated, the first magnification changing subsystem 309 is aligned with the target region 328, whereupon the optical system 100 is controlled to perform the combined focus and zoom operation as described above in order to adjust a desired magnification while focusing on the target region 328. For this, the controller 318 may retrieve the information for correctly positioning the second lens group L2 and the third lens group L3 along the optical axis O1 from the memory 320.

It is to be noted that the microscope 308 shown in Figure 3 represents merely an exemplary microscope configuration which is suitable to apply the combined zooming and focusing operation provided by the optical systems 100, 200 as shown in Figures 1 and 2, respectively. Thus, the optical systems 100, 200 may be used in any other type of microscope which requires focusing and zooming.

Although some aspects have been described in the context of an apparatus, it is clear that these aspects also represent a description of the corresponding method, where a block or device corresponds to a method step or a feature of a method step.

Analogously, aspects described in the context of a method step also represent a description of a corresponding block or item or feature of a corresponding apparatus. Some or all of the method steps may be executed by (or using) a hardware apparatus, like for example, a processor, a microprocessor, a programmable computer or an electronic circuit. In some embodiments, some one or more of the most important method steps may be executed by such an apparatus.

Depending on certain implementation requirements, embodiments of the invention can be implemented in hardware or in software. The implementation can be performed using a non-transitory storage medium such as a digital storage medium, for example a floppy disc, a DVD, a Blu-Ray, a CD, a ROM, a PROM, and EPROM, an EEPROM or a FLASH memory, having electronically readable control signals stored thereon, which cooperate (or are capable of cooperating) with a programmable computer system such that the respective method is performed. Therefore, the digital storage medium may be computer readable.

Some embodiments according to the invention comprise a data carrier having electronically readable control signals, which are capable of cooperating with a programmable computer system, such that one of the methods described herein is performed.

Generally, embodiments of the present invention can be implemented as a computer program product with a program code, the program code being operative for performing one of the methods when the computer program product runs on a

computer. The program code may, for example, be stored on a machine readable carrier.

Other embodiments comprise the computer program for performing one of the methods described herein, stored on a machine readable carrier.

In other words, an embodiment of the present invention is, therefore, a computer program having a program code for performing one of the methods described herein, when the computer program runs on a computer.

A further embodiment of the present invention is, therefore, a storage medium (or a data carrier, or a computer-readable medium) comprising, stored thereon, the computer program for performing one of the methods described herein when it is performed by a processor. The data carrier, the digital storage medium or the recorded medium are typically tangible and/or non-transitory. A further embodiment of the present invention is an apparatus as described herein comprising a processor and the storage medium.

A further embodiment of the invention is, therefore, a data stream or a sequence of signals representing the computer program for performing one of the methods described herein. The data stream or the sequence of signals may, for example, be configured to be transferred via a data communication connection, for example, via the internet.

A further embodiment comprises a processing means, for example, a computer or a programmable logic device, configured to, or adapted to, perform one of the methods described herein.

A further embodiment comprises a computer having installed thereon the computer program for performing one of the methods described herein.

A further embodiment according to the invention comprises an apparatus or a system configured to transfer (for example, electronically or optically) a computer program for performing one of the methods described herein to a receiver. The receiver may, for example, be a computer, a mobile device, a memory device or the like. The apparatus or system may, for example, comprise a file server for transferring the computer program to the receiver.

In some embodiments, a programmable logic device (for example, a field programmable gate array) may be used to perform some or all of the functionalities of the methods described herein. In some embodiments, a field programmable gate array may cooperate with a microprocessor in order to perform one of the methods described herein. Generally, the methods are preferably performed by any hardware apparatus.

List of Reference Signs

100	optical system
200	optical system
202	optical element
204	first sub-lens group
206	second sub-lens group
308	microscope
309	first magnification changing subsystem
310	first digital camera
312	second magnification changing subsystem
314	second digital camera
316	second optical magnification system
318	controller
320	memory
322	microscope stage
324	object
326	positioning device
328	target region
O	optical axis
O1	optical axis
O2	optical axis
L1	first lens group
L2	second lens group
L3	third lens group
L4	fourth lens group
IP	image plane

OP1	object plane
OP2	object plane
R1	image point
R2	image point
Q1	object point
Q2	object point

CLAIMS

1. An optical system (100, 200) for imaging an object (342) onto an image plane (IP) of a microscope (308), comprising:

a first lens group (L1) and a fourth lens group (L4) which are stationary, and

a second lens group (L2) and a third lens group (L3) which are independently movable along an optical axis (O) of the optical system (100, 200) for focusing the object (324) onto the image plane (IP) while zooming between a short focal length extremity and a long focal length extremity.
2. The optical system (100, 200) according to claim 1, wherein the first lens group (L1) having negative power, the second lens group (L2) having positive power, the third lens group (L3) having positive power and the fourth lens group (L4) having negative power are arranged in this order from an object side.
3. The optical system (100, 200) according to one of the preceding claims, wherein the optical system (100, 200) is configured to be telecentric on an object side and telecentric on an image side.
4. The optical system (100, 200) according to one of the preceding claims, wherein the short focal length extremity and the long focal length extremity define a zoom range from $Z1=0.9$ to $Z2=5$.
5. The optical system (100, 200) according to one of the preceding claims, comprising memory means (320) for storing information assigning each

combination of zoom setting and focus setting to a corresponding lens group position along the optical axis for each of the second and third lens groups (L2, L3).

6. The optical system (200) according to one of the preceding claims, comprising an optical element (202) for coaxial light coupling.
7. The optical system (200) according to claim 6, wherein the optical element (202) is arranged in a segment of the optical system (200) where the angular characteristic of light passing the optical system is the same for the whole range of zoom and focus positions of the second lens group (L2) and the third lens group (L3).
8. The optical system (200) according to claim 7, wherein the optical element (202) is arranged in the fourth lens group (L4).
9. The optical system (200) according to claim 8, wherein the fourth lens group comprises a first sub-lens group (204) having negative power and a second sub-lens group (206) having positive power arranged in this order from the object side, and
the optical element (202) is arranged between the first sub-lens group (204) and the second sub-lens group (206).
10. Method for imaging an object (328) onto an image plane (IP) of a microscope (308), comprising the steps of:

holding a first lens group (L1) and a fourth lens group (L4) stationary during imaging of the object (328); and

moving a second lens group (L2) and a third lens group (L3) independently along an optical axis (O) for focusing the object (328) onto the image plane (IP) while zooming between a short focal length extremity and a long focal length extremity.

11. A microscope (308) comprising an image plane (IP) and an optical system (100) according to one of the preceding claims.

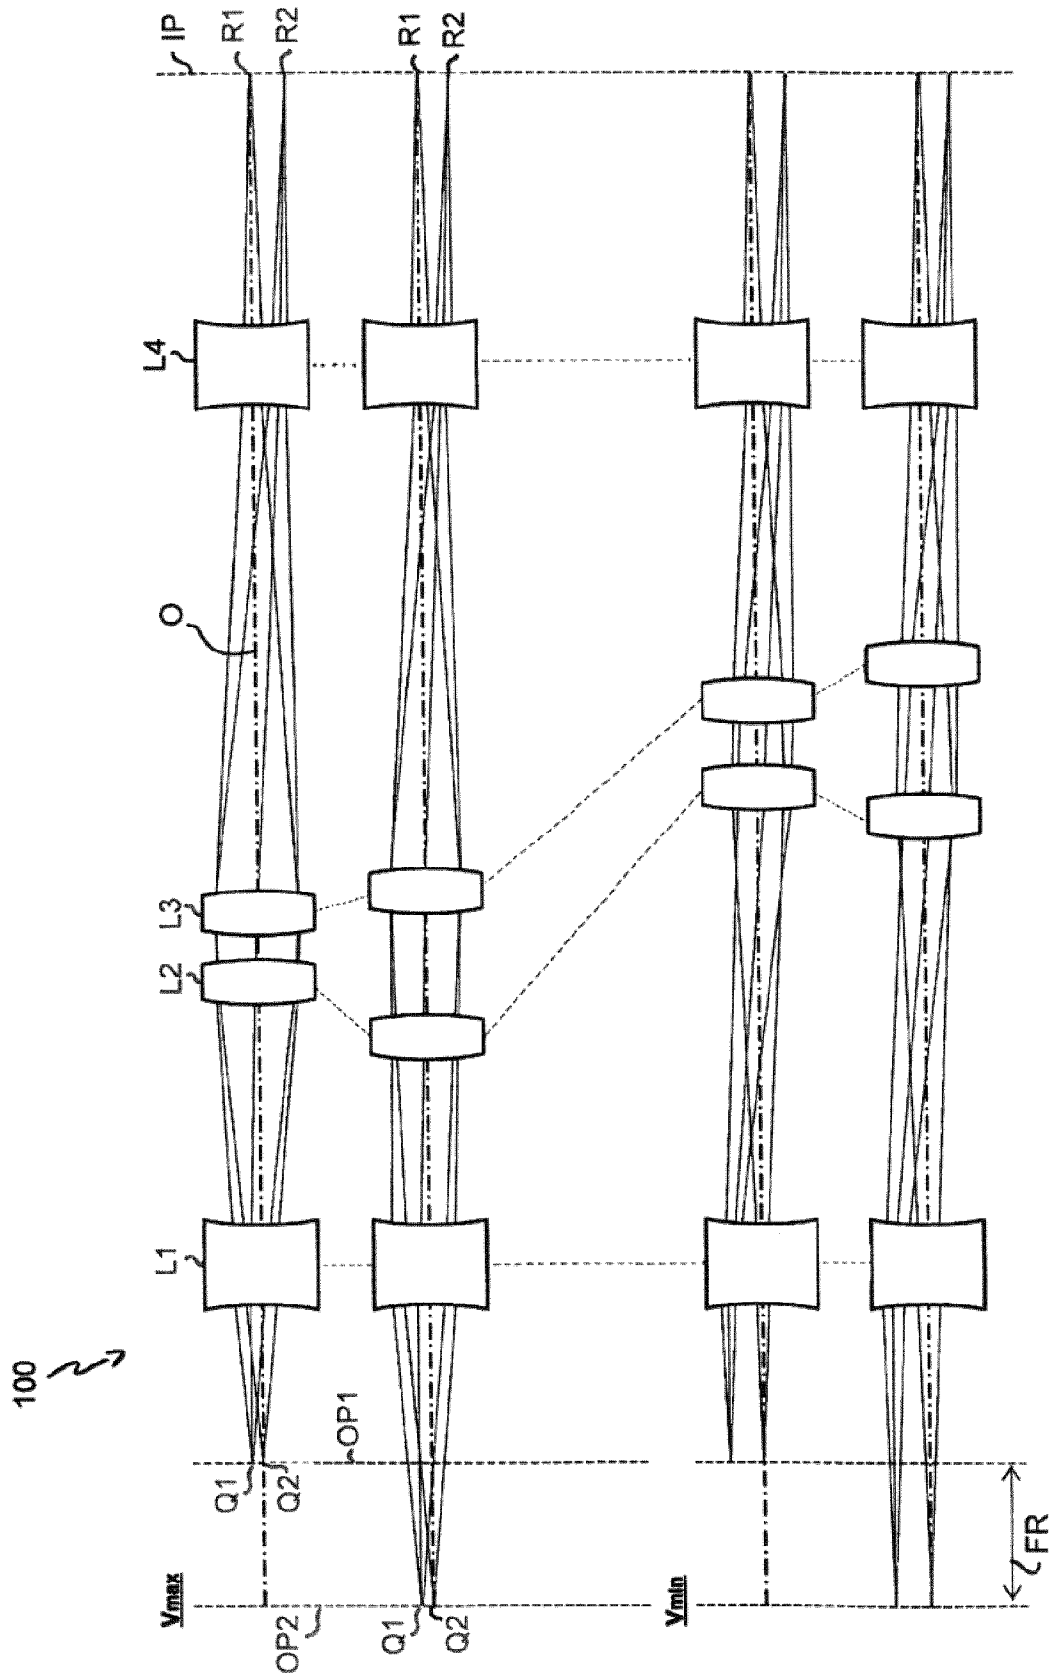


Fig. 1

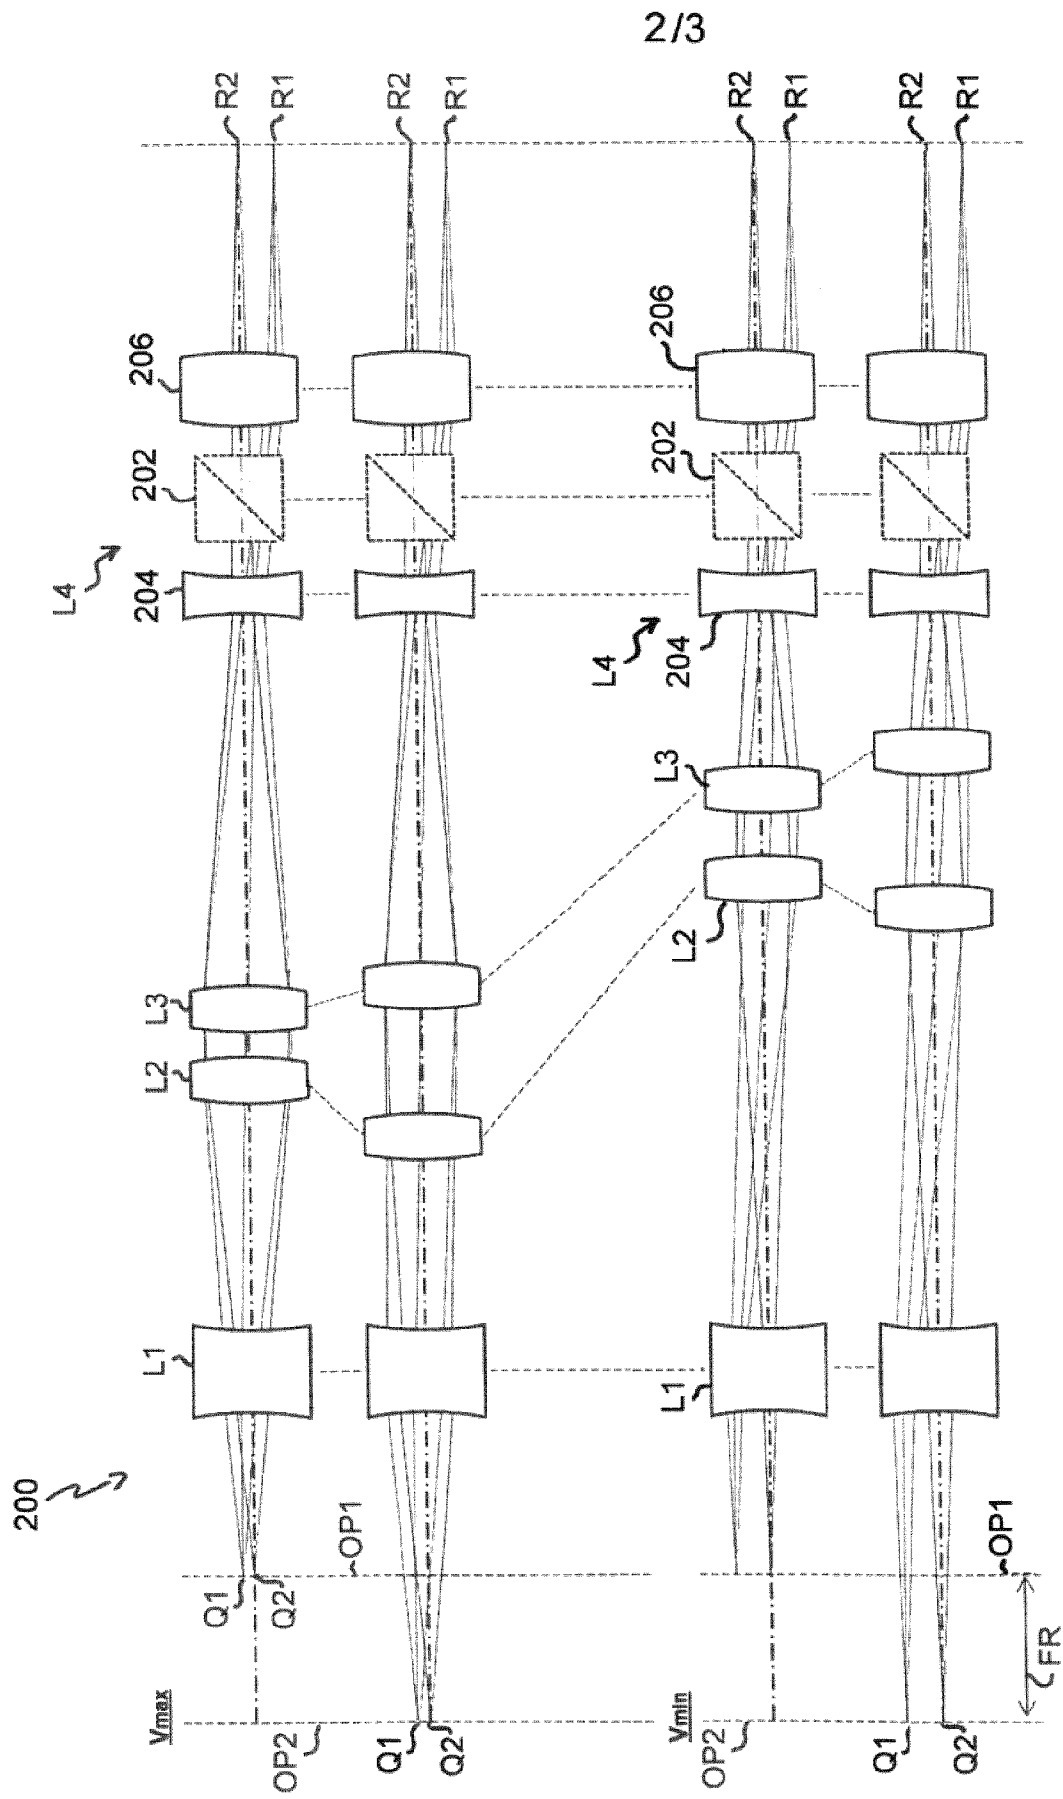


Fig. 2

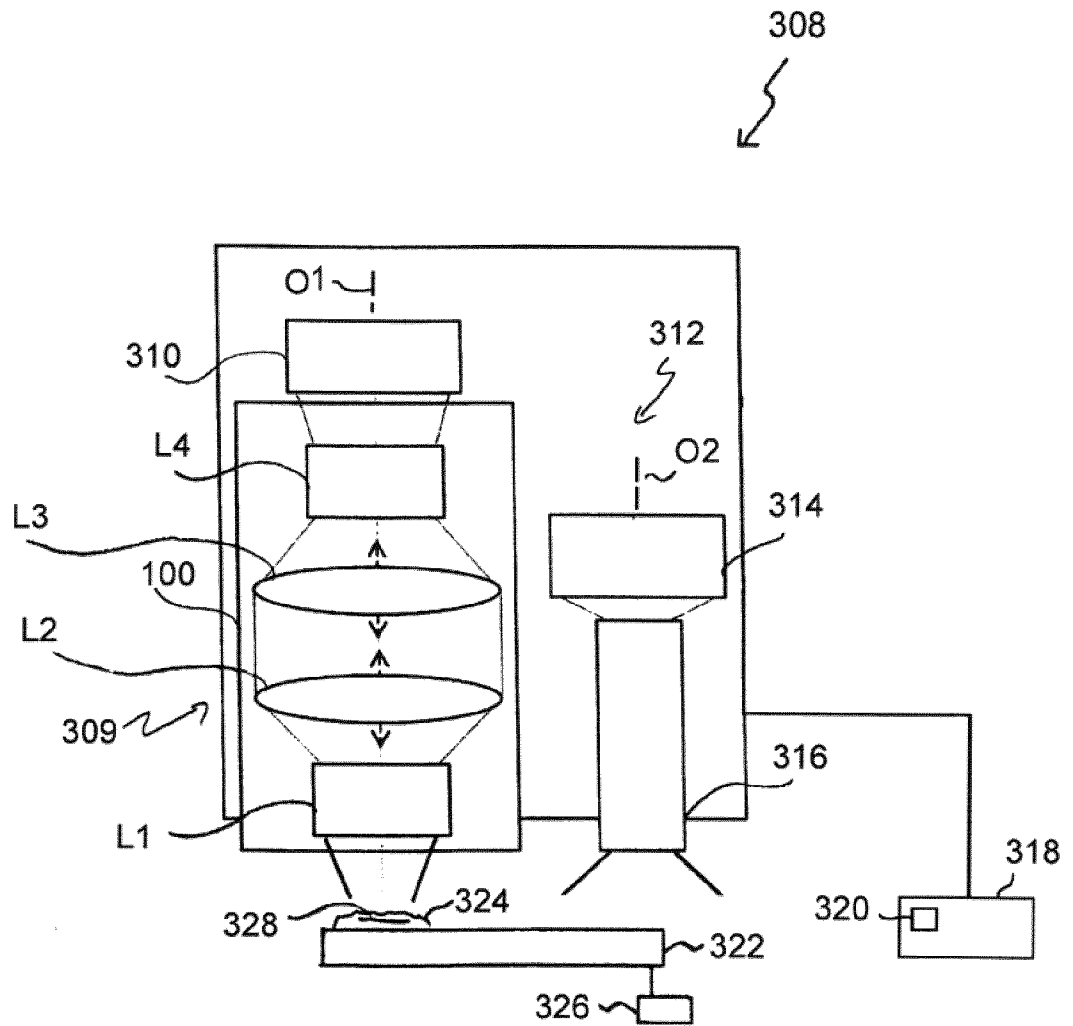


Fig. 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/086176

A. CLASSIFICATION OF SUBJECT MATTER
INV. G02B15/177 G02B21/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/168763 A1 (WINTEROT JOHANNES [DE]) 19 June 2014 (2014-06-19)	1,4,10, 11
Y	paragraph [0003]; figure 4 -----	5-9
X	US 2014/313589 A1 (WINTEROT JOHANNES [DE] ET AL) 23 October 2014 (2014-10-23)	1-4
Y	figures 1-8 -----	5-9
Y	EP 1 369 663 A1 (LEICA MICROSYSTEMS SCHWEIZ AG [CH]) 10 December 2003 (2003-12-10) paragraph [0002] -----	5
Y	DE 10 2010 061862 A1 (ZEISS CARL MICROIMAGING GMBH [DE]) 24 May 2012 (2012-05-24) abstract; figures 3,4 -----	6-9
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 March 2020

Date of mailing of the international search report

23/03/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Daffner, Michael

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2019/086176

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 2 392 959 A1 (NIKON CORP [JP]) 7 December 2011 (2011-12-07) paragraph [0108] - paragraph [0122]; figures 20-23 -----	6-9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2019/086176

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-5, 10, 11

A zoom optical system for a microscope.

2. claims: 6-9

A coaxial light coupling.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2019/086176

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014168763 A1	19-06-2014	DE 102012223712 A1	26-06-2014
		US 2014168763 A1	19-06-2014
US 2014313589 A1	23-10-2014	DE 102013006999 A1	23-10-2014
		US 2014313589 A1	23-10-2014
EP 1369663 A1	10-12-2003	DE 10225193 A1	08-01-2004
		EP 1369663 A1	10-12-2003
		JP 4086106 B2	14-05-2008
		JP 2004078162 A	11-03-2004
		US 2004004762 A1	08-01-2004
DE 102010061862 A1	24-05-2012	DE 102010061862 A1	24-05-2012
		US 2013308201 A1	21-11-2013
		WO 2012069304 A1	31-05-2012
EP 2392959 A1	07-12-2011	CN 102301268 A	28-12-2011
		EP 2392959 A1	07-12-2011
		EP 2472299 A2	04-07-2012
		EP 2472300 A2	04-07-2012
		EP 2472301 A2	04-07-2012
		JP 5387588 B2	15-01-2014
		JP WO2010087296 A1	02-08-2012
		US 2012008194 A1	12-01-2012
		US 2013314776 A1	28-11-2013
		US 2019391373 A1	26-12-2019
		US 2020026046 A1	23-01-2020
		WO 2010087296 A1	05-08-2010