

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
5 April 2007 (05.04.2007)

PCT

(10) International Publication Number
WO 2007/038118 A2(51) International Patent Classification:
H04L 12/28 (2006.01)(74) Agent: BALLARINI, Robert, J.; Volpe and Koenig, P.C.,
United Plaza, Suite 1600, 30 South 17th Street, Philadelphia, Pennsylvania 19103 (US).(21) International Application Number:
PCT/US2006/036611

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date:
20 September 2006 (20.09.2006)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/719,035 21 September 2005 (21.09.2005) US
60/720,967 27 September 2005 (27.09.2005) US
60/736,255 14 November 2005 (14.11.2005) US

(71) Applicant (for all designated States except US): INTER-DIGITAL TECHNOLOGY CORPORATION [US/US]; 3411 Silverside Road, Concord Plaza, Suite 105, Hagley Building, Wilmington, Delaware 19810 (US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): SAMMOUR, Mohammed [CA/CA]; 2555 Modugno, Apt. #705, Montreal, Québec H4R 2L5 (CA). GRANDHI, Sudheer, A. [US/US]; 1605 North James Street, Mamaroneck, New York 10543 (US). OLESEN, Robert, Lind [US/US]; 3 Country Club Drive, Huntington, New York 11743 (US).

Published:
— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND APPARATUS FOR TRANSMISSION MANAGEMENT IN A WIRELESS COMMUNICATION SYSTEM

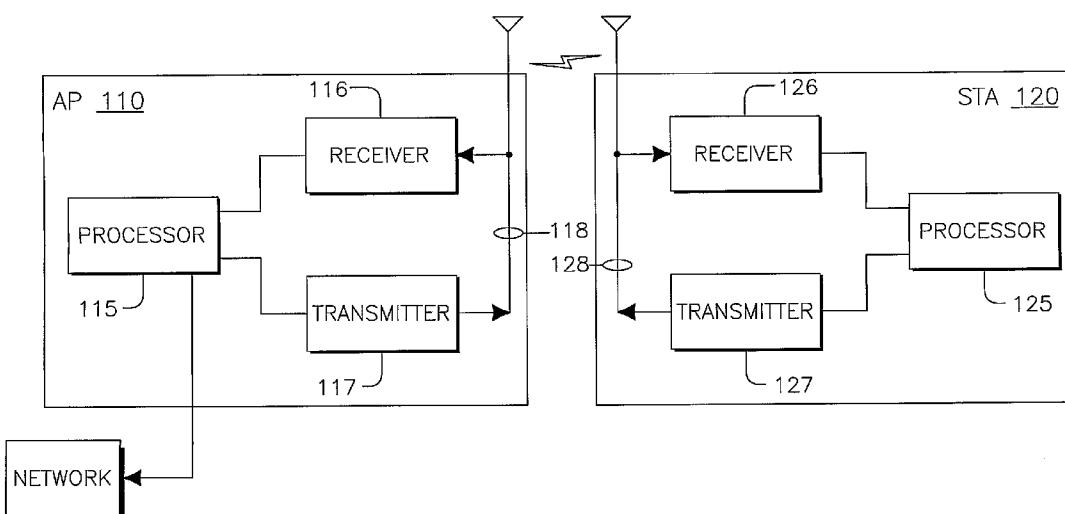

(57) Abstract: In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), a method for transmission management of the wireless medium comprises the AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for the plurality of STAs. The AP then transmits the MMP/PSAD frame to the plurality of STAs. Upon successfully receiving and decoding the MMP/PSAD frame, STAs transmit during their scheduled ULT.

WO 2007/038118 A2

Express Mail Label No. EV680508538US

[0001] METHOD AND APPARATUS FOR TRANSMISSION
MANAGEMENT IN A WIRELESS COMMUNICATION SYSTEM

[0002] FIELD OF INVENTION

[0003] The present invention is related data transmission in a wireless communication system. In particular, the present invention relates to a method and apparatus for transmission management for multiple polling and power saving in a wireless communication system.

[0004] BACKGROUND

[0005] The implementation of proposed IEEE 802.11 standards, and in particular the IEEE 802.11n standard, will allow for higher throughput (HT) wireless local area network (WLAN) devices. One such way in which higher throughput may be achieved is through the use of signal aggregation in both the medium access control (MAC) layer and the physical (PHY) layer. When an aggregate is addressed to a single receiver address, it is referred to as a Single Receiver Aggregate (SRA). When the aggregate is addressed to multiple receivers, it is referred to as a Multiple Receiver Aggregate (MRA).

[0006] An MRA may be transmitted during a Multiple Receiver Aggregate Multi-Poll (MMP) sequence or a Power Save Aggregation Descriptor (PSAD). This aggregation tends to improve system performance and also provides a power saving mechanism in the case of MMP/PSAD.

[0007] One or more MAC Service Data Units (MSDUs) being sent to the same receiver can be aggregated into a single Aggregate-MSDU (A-MSDU). This aggregation of more than one frame improves the efficiency of the MAC layer, particularly when there are many small MSDUs such as Transmission Control Protocol Acknowledgements (TCP ACKs). The overhead associated with channel access, such as the Physical Layer Convergence Protocol (PLCP) preamble, MAC header, and IFS spacing, can thereby be amortized over two or more MSDUs. Additionally, a STA may only use MSDU aggregation where it knows that the

receiver supports MSDU aggregation. In some cases, support for MSDU aggregation may be mandatory at the receiver.

[0008] Figure 1 shows an exemplary A-MSDU frame 10. The A-MSDU frame 10 includes a plurality of Sub-frame header fields 11 and a plurality of MSDU fields 12 (designated $MSDU_1 \dots MSDU_n$). Each Sub-frame header field 11 includes an MSDU length field 13, a source address (Source Addr) field 14, and a destination address (Dest Addr) field 15. Typically, the sub-frame header fields 11 separate the MSDU to aid a receiver in deciphering whether or not the frame is directed toward it. Ordinarily, the MSDU length field 13 includes the length, the Source Addr field 14 includes the address of the transmitter, and the Dest Addr field 15 includes the address of the receiver. In general, to form an A-MSDU 10, two or more MSDUs are aggregated together.

[0009] Another type of aggregation may be formed by joining multiple MAC Protocol Data Units (MPDUs) together. Figure 2 shows an exemplary aggregated MPDU (A-MPDU) frame 20. The A-MPDU frame 20 includes a plurality of MPDU delimiter fields 21 and a plurality of MPDU fields 22 (designated $MPDU_1 \dots MPDU_n$). Each MPDU delimiter field 21 also includes a reserved field 31, an MSDU length field 24, a Cyclic Redundancy Check (CRC) field 25, and a Unique Pattern field 26. The A-MPDU frame 20 is typically transported in a single aggregate PLCP Service Data Unit (A-PSDU). Additionally, padding octets (not shown) are appended, if needed, to make each MPDU field 22 section a multiple of four octets in length, except in the case of $MPDU_n$.

[0010] One purpose of the MPDU delimiter field 21 is to delimit the MPDUs 22 within the aggregate. For example, the structure of the aggregate can usually be recovered when one or more MPDU delimiters are received with errors. Also, individual MPDU delimiter fields 21 have the same block error rate (BER) as the surrounding MPDUs 22, and can therefore be lost during transmission.

[0011] One advantage in using A-MPDU frames 20 is that, unlike A-MSDUs, they can be aggregated to multiple receivers. That is, a multiple-receiver aggregate (MRA) may contain MPDUs that are addressed to multiple

receivers. Moreover, an MRA may be transmitted in one of two contexts that are distinguished by whether it is transmitted during an MMP/PSAD sequence or not. If multiple responses are required, they may be scheduled by transmission of an MMP or PSAD frame.

[0012] Figure 3 shows a typical multiple receiver aggregate multi-poll (MMP) frame 30. The MMP frame 30 includes a frame control field 31, a duration field 32, a receiver address (RA) field 33, a transmitter address (TA) field 34, a number of receivers (N) field 35, a receiver information (info) field 36, and a frame checksequence (FCS) field 37. The RA field 33 is typically the broadcast address of a group. The TA field 34 is typically the address of the wireless transmit/receive unit (WTRU) transmitting the MRA aggregate. The number of receivers (N) field 35 includes the number of receivers for which MPDUs are included in the MRA aggregate.

[0013] Additionally, the receiver info field 36 includes a plurality of subfields, such as an association identifier (AID) field 61, a transmission identifier (TID) field 62, a new PPDU flag field 63, a reserved field 64, a receive (Rx) offset field 65, an Rx duration field 66, a transmit (Tx) offset field 67, and a Tx duration field 68. The AID field 61 identifies a station (STA) addressed by the frame. The TID field 62 defines the TID for transmissions by a STA. The new PPDU flag field 63 indicates that the downlink (DL) for the STA begins at the start of the PPDU. The Rx offset field 65 defines the start of the first symbol containing DL data for a STA. The Rx duration field 66 defines the length of a downlink. The Tx offset field 67 defines the time when transmissions by the STA may begin, and the Tx duration field 68 defines the duration limit of the transmissions.

[0014] Figure 4 shows a typical power save aggregation descriptor (PSAD) frame 40. The PSAD frame 40 includes a frame control field 41, a duration field 42, an RA field 43, a TA field 44, a basic service set identifier (BSSID) field 45, a PSAD parameter (PARAM) field 46, a number of receivers field 47, and an FCS field 48. The PSAD PARAM field 46 further includes a reserved field 71, a More PSAD indicator 72, and a descriptor end field 73. The number of receivers field

47 includes a plurality of individual Station Info fields which further includes a reserved field 81, a STA ID field 82, a downlink transmission (DLT) start offset field 83, a DLT duration field 84, an uplink transmission (ULT) start offset field 85, and a ULT duration field 86.

[0015] An MMP/PSAD frame may be transmitted as a non-aggregate, or may be aggregated with downlink MPDUs. Since the MMP/PSAD frame format defines receiving and transmitting durations for each STA, it enables STAs to save power since the STA can go into sleep mode when it is not either receiving or transmitting. Also, since the MMP sequence is protected using a network allocation vector (NAV) and extended PHY protection (EPP), MMP provides a mechanism of scheduling multiple transmission opportunities (TXOPs).

[0016] Figure 5A shows an MMP/PSAD Downlink frame exchange sequence 50, and Figure 5B shows an MMP/PSAD Uplink frame exchange sequence 55. In PSAD, a downlink transmission (DLT) and an uplink transmission (ULT) period of time are described by the PSAD frame 40. Which period of time is intended to be used for the transmission of frames from/to the PSAD transmitter to one of the PSAD receivers is also described in the PSAD frame 40.

[0017] In particular, Figures 5A and 5B show the start offsets for DLT1 to DLTn, and ULT1 to ULTn. Similarly, in MMP, offsets are shown for a series of downlink transmissions RX1 to RXn and uplink transmissions TX1 to TXn.

[0018] Aggregation is also possible at the PHY-level layer for physical layer (PHY) protocol data units (PPDUs). This aggregation may be referred to as an aggregated PPDU (A-PPDU). An A-PPDU contains one or more pairs of PLCP headers and PPDUs or PHY service data units PSDUs. To form an A-PPDU, two or more PPDUs (or PSDUs) are aggregated together, separated by the High Throughput Signal (HT-SIG) field.

[0019] Figure 6 shows a typical aggregated PPDU (A-PPDU) 60. The A-PPDU 60 includes a legacy preamble (L-Preamble) 91, a High-Throughput Preamble (HT-Preamble) 92, a plurality of PSDU fields 93 (PSDU₁...PSDU_n), and a plurality of HT-Signal (HT-SIG) fields 94 (HT-SIG₁...HT-SIG_n). An HT-SIG

field 94 may also include a length field 95, an MCS field 96, an advanced coding field 97, a sounding packet 98, a number HT-Legacy Training Field (HT-LTF) 99, a Short GI field 101, a 20/40 field 102, a cyclic redundancy check (CRC) field 103, and a tail field 104.

[0020] As shown in Figure 6, the resulting A-PPDU 60 is therefore the combination of all PPDUs (or PSDUs) in the A-PPDU along with HT-SIGs 94 for each constituent PSDU 93. Since each PSDU 93 shown in Figure 6 is delimited by an HT-SIG 94 that defines the various physical layers parameters, the A-PPDU comprises multi-rate PSDUs.

[0021] One of the drawbacks to the current system, however, is that when an MMP/PSAD is transmitted by the AP, it is possible that one or more of the STAs associated with the MMP/PSAD will not correctly receive, or incorrectly decode the MMP/PSAD frame. In these cases, the STAs that do not correctly receive or decode the MMP/PSAD frame will miss their scheduled uplink transmission times, effectively wasting the WLAN medium time.

[0022] It would therefore be advantageous if a method and apparatus existed that served as a mechanism to recover the structure of the A-PPDU 90 if one or more HT-SIGs 94 or PSDUs 93 are received in error due to poor channel conditions. It would further be advantageous for a method and apparatus to exist wherein an AP recovers any unused ULT, can transmit multiple MMP/PSAD frames, and can schedule multicast and broadcast transmissions in MMP/PSAD frames.

[0023]

SUMMARY

[0024] In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), a method for transmission management of the wireless medium comprises the AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for the plurality of STAs. The AP then transmits the MMP/PSAD frame to the plurality

of STAs. Upon successfully receiving and decoding the MMP/PSAD frame, STAs transmit during their scheduled ULT.

[0025] BRIEF DESCRIPTION OF THE DRAWINGS

[0026] The foregoing summary, as well as the following detailed description of the preferred embodiments of the present invention will be better understood when read with reference to the appended drawings, wherein:

[0027] Figure 1 shows an exemplary A-MSDU frame;

[0028] Figure 2 shows an exemplary aggregated MPDU (A-MPDU) frame;

[0029] Figure 3 shows a typical multiple receiver aggregate multi-poll (MMP) frame;

[0030] Figure 4 shows a typical power save aggregation descriptor (PSAD) frame;

[0031] Figure 5A shows an MMP/PSAD Downlink frame exchange sequence;

[0032] Figure 5B shows an MMP/PSAD Uplink frame exchange sequence;

[0033] Figure 6 shows a typical aggregated PPDU (A-PPDU);

[0034] Figure 7 shows a wireless communication system configured in accordance with the present invention;

[0035] Figure 8 is a functional block diagram of an AP and a STA configured to perform a method for transmission management, in accordance with the present invention;

[0036] Figure 9 is a flow diagram for managing transmission times in the wireless communication system of Figure 7, in accordance with an embodiment of the present invention;

[0037] Figure 10 is an exemplary signal diagram of a downlink and uplink exchange for the wireless communication system of Figure 7, in accordance with an embodiment of the present invention;

[0038] Figure 11 is an exemplary signal diagram of a downlink and uplink exchange for the wireless communication system 100 where a particular STA did

not successfully receive and decode its downlink and uplink scheduling information;

[0039] Figure 12 is a flow diagram of a method of recovering the medium, in accordance with an embodiment of the present invention;

[0040] Figure 13 is an exemplary signal diagram of a downlink and uplink exchange for the wireless communication system, showing a broadcast or multicast MMP/PSAD transmitted during a broadcast phase of the downlink phase; and

[0041] Figure 14 is an exemplary signal diagram of a downlink and uplink exchange for the wireless communication system, showing a broadcast or multicast MMP/PSAD transmitted between the downlink and uplink phases.

[0042] DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0043] Hereafter, a station (STA) includes but is not limited to a wireless transmit/receive unit (WTRU), user equipment (UE), mobile station, fixed or mobile subscriber unit, pager, or any other type of device capable of operating in a wireless environment. When referred to hereafter, an access point (AP) includes but is not limited to a base station, Node-B, site controller, access point or any other type of interfacing device in a wireless environment.

[0044] Figure 7 shows a wireless communication system 100 configured in accordance with the present invention. The wireless communication system 100 in a preferred embodiment may be a wireless local area network (WLAN), and includes an AP 110 and a plurality of STAs 120 (designated STA1, STA2, and STA3) capable of wireless communication with the AP 110. The AP 110, in a preferred embodiment, is connected to a network 130, such as the Internet, a public switched telephone network (PSTN), or the like. In this manner, the STAs 120 are provided access to the network 130 through the AP 110. Although only three STAs 120 are depicted in the wireless communication system 100, it should be noted that any number of STAs 120 may exist in the wireless communication system 100 and be in communication with the AP 110.

[0045] Figure 8 is a functional block diagram of an AP 110 in communication with a STA 120, configured to perform a method for transmission management in the wireless system 100.

[0046] In addition to the components normally included in a typical AP, the AP 110 includes a processor 115 configured to manage transmission in the wireless communication network 100, a receiver 116 in communication with the processor 115, a transmitter 117 in communication with the processor 115, and an antenna 118 in communication with the receiver 116 and the transmitter 117 in order to facilitate wireless transmission and reception. Additionally, in a preferred embodiment, the processor 115 is capable of communicating with the network 130.

[0047] In addition to the components normally included in a typical STA, the STA 120 includes a processor 125 configured to manage transmission in the wireless communication system 100, a receiver 126 in communication with the processor 125, a transmitter 127 in communication with the processor 125, and an antenna 128 in communication with the receiver 126 and the transmitter 127 in order to facilitate wireless transmission and reception.

[0048] Figure 9 is a flow diagram 900 for managing transmission times in the wireless communication system 100, in accordance with an embodiment of the present invention. In step 910, the AP 110 configures an MMP/PSAD frame in order to signal to STAs 120 their transmit times in the UL phase. Specifically, the MMP/PSAD frame schedules both downlink and uplink frame exchanges for a subsequent duration of time that is specified in the MMP/PSAD duration field. For example, the AP 110 may achieve this by arranging the order of PSAD descriptor fields (or the MMP Receiver Information fields) according to increasing values of the Rx/DLT Start Offset, or according to the order of transmission when the Rx/DLT Start Offset is equal. This is particularly useful if the AP 110 is sending an A-PPDU containing multiple PPDUs destined to multiple receiver STAs 120. Additionally, the AP 110 populates the TA field (34,44) with its own identifier, such as its MAC address, and the RA field with addresses of intended

receivers. In one embodiment, the RA field may be populated with the MAC addresses of the STAs 120 the MMP/PSAD frame is intended for.

[0049] The AP 110 then transmits the MMP/PSAD frame to the STAs 120 (step 920). Each particular STA 120 then receives the MMP/PSAD frame (step 930). If the particular STA 120 receives and decodes the MMP/PSAD frame successfully (step 940), the STA 120 extracts its transmit time from the MMP/PSAD frame (step 950). If the STA 120 does not successfully receive and decode the MMP/PSAD frame (step 940), then the AP 110 recovers the medium (step 970), which will be described in more detail below.

[0050] In one example, the STA 120 extracts timing information of the individual PPDUs that form the A-PPDU aggregate. A STA 120 that receives an MMP/PSAD frame can derive its HT-SIG time information from the Offset field and Duration field that are defined within the MMP/PSAD frame. Specifically, the Rx (or DLT) Start Offset and Duration fields are used for the purpose of extracting the HT-SIG timing information of an A-PPDU, thereby improving the reliability of the A-PPDU aggregation scheme. This may also allow a simple receiver implementation.

[0051] For purposes of example, it may be assumed that one of the aggregates within the MMP/PSAD exchange is an A-PPDU aggregate. For a STA 120 identified in the MMP/PSAD frame as having downlink data within the MMP/PSAD exchange, the immediately preceding station's MMP/PSAD Rx Offset and Rx Duration fields may be used in order to determine the starting time of its HT-SIG field. However, this sharing of Rx Offset information occurs only if both stations have the same Rx Offset. Otherwise, the Rx Offset of the particular STA 120 is used. Accordingly, by adding the Rx Offset and Rx Duration of the prior station, the particular STA 120 can determine when its PPDU HT-SIG will start.

[0052] Alternatively, the particular STA 120 can use multiple prior fields of the MMP/PSAD frame instead of only one prior field, such as only the information of the immediately prior station. This variation may be useful, for example, when the Rx Duration fields are not defined relative to a common Rx Offset, but rather in terms of the actual duration of the data PPDUs. In this case,

the particular STA 120 may need to perform an overall addition on the all previous Rx Duration fields.

[0053] In another alternative, a field or bit is added within the MMP/PSAD descriptor fields or the MMP Receiver Information fields. This field or bit differentiates whether the timing information is related to the start of an MPDU within an A-MPDU aggregate, or a PPDU within an A-PPDU aggregate. For example, this added field could be used to indicate that the particular STA 120 should expect to receive and decode an HT-SIG at this Rx Offset, a preamble training field, or an MPDU delimiter field.

[0054] If the A-PPDU is transmitted without the MMP/PSAD, it should be protected with a network allocation vector (NAV) setting or spoofing since the irregular error probability and error propagation can disrupt the power savings, medium access and NAV of other STAs 120 in the system. For example, an A-PPDU from the AP 110 can be preceded by a clear to send (CTS)-to-self transmission to provide NAV and/or EPP protection. An A-PPDU from a Non-AP STA 120 may be protected by an RTS/CTS exchange for NAV and EPP protection.

[0055] Once the STA 120 extracts its timing information (step 950), it then transmits during its transmit time in the UL phase (step 960).

[0056] Figure 10 is an exemplary signal diagram 101 of a downlink and uplink exchange for the wireless communication system 100, in accordance with the method 900 described above. The AP 110 transmits the MMP/PSAD frame that includes the downlink and uplink scheduling information for STA1, STA2, and STA3. In the downlink phase, the AP 110 transmits the downlink information for STA1, STA2, and STA3 as indicated by D1, D2, and D3. If each STA 120 successfully received and decoded the MMP/PSAD frame, then each STA 120 (STA1, STA2, and STA3) receives its downlink information during its scheduled time as D1, D2, and D3, respectively. In the uplink phase, STA1 transmits during its scheduled uplink time (U1), STA2 transmits during its scheduled uplink time (U2), and STA3 transmits during its scheduled uplink time (U3). In this manner, each STA 120 knows when it needs to be active in

order to receive downlink data associated with it or to transmit during its scheduled uplink time. Accordingly, each STA 120 can power down during times that it knows it is not scheduled to transmit or receive, thereby allowing it to conserve its energy.

[0057] Since the scheduling of uplink and downlink frame exchanges is scheduled in the MMP/PSAD frame, a STA 120 that does not successfully receive and decode the MMP/PSAD frame (step 940) will not be aware of its timing and may miss its transmission opportunity in the UL. Without any mechanism to prevent or recover this from happening, the medium time may be wasted. To prevent this from occurring, the AP 110 should recover the medium (step 970).

[0058] Figure 11 is an exemplary signal diagram 101' of a downlink and uplink exchange for the wireless communication system 100 where a particular STA 120 (in this case STA2) did not successfully receive and decode its downlink and uplink scheduling information in step 940. Accordingly, STA2 does not transmit during its scheduled uplink time (U2').

[0059] Figure 12 is a flow diagram of a method of recovering the medium 970, in accordance with an embodiment of the present invention. In step 980, the AP 110 monitors the medium to detect whether or not particular STAs 120 are transmitting during their scheduled UL time. The AP 110 may utilize the timing information in the MMP/PSAD frame to determine when it should monitor the medium (step 980), or it may continuously monitor the medium.

[0060] If the AP 110 detects that a STA 120 is not conducting its uplink transmissions when scheduled, the AP 110 may reclaim the medium (step 990).

[0061] Referring again to Figure 11, the AP 110 will monitor the Uplink Phase and detect that STA1 transmits its uplink data during its scheduled uplink window (U1). The AP 110 will then detect that STA2, for example, is not transmitting during its scheduled uplink transmit window (U2'). After waiting an idle period, AP 110 will reclaim the medium (step 990).

[0062] In a preferred embodiment, the idle period is a pre-determined period that the AP 110 will wait to give a STA 120 an ample opportunity to begin transmitting during its uplink time, before the AP 110 reclaims the medium. As

an example, the idle time period may be equal to the point control function inter-frame spacing (PIFS) period. The AP 110 may monitor the medium (step 980) during the MMP/PSAD exchange period if the AP 110 is not transmitting, or since the AP 110 may know the time periods in which each STA 120 is to be transmitting in the uplink, the AP 110 may only monitor the medium during those times.

[0063] Alternatively, the AP 110 may monitor the medium for frame errors or collisions that are occurring during the uplink phase, and base a decision as to reclaiming the medium on those observations. Additionally, the AP 110 may decide to cancel the MMP/PSAD in order to transmit or schedule data traffic that has a higher priority than what the AP 110 has already accounted for. For example, the AP 110 may wish to improve Quality of Service (QoS) requirements for particular traffic, or to schedule control traffic.

[0064] At any rate, once the AP 110 has decided to reclaim the medium in step 990, there are several ways by which it may do so.

[0065] One way in which the AP 110 may reclaim the medium is by rescheduling DLT or ULT transmissions (step 991). In a preferred embodiment, the AP 110 accomplishes this by transmitting a frame to indicate to all or selected STAs 120 that they should disregard the previously sent MMP/PSAD frame (step 992). This frame may have a number of formats.

[0066] For example, the frame transmitted in step 992 may be a newly defined frame to reset or cancel the prior MMP schedule, or any control, management or data frame that can be configured to indicate to the STAs 120 to reset prior MMP/PSAD schedules.

[0067] In one preferred embodiment, however, the AP 110 retransmits another MMP/PSAD frame. The MMP/PSAD frame may be the original MMP/PSAD frame, but containing a field that specifies that the previous scheduling information should be ignored by all, or selected, STAs 120. Alternatively, the MMP/PSAD frame may be identical to the previously sent MMP/PSAD frame, but with a defined rule specifying that if a STA 120 receives

an MMP/PSAD frame, it is to disregard any scheduling information received from any prior MMP/PSAD frame.

[0068] A NAV duration of the new MMP/PSAD, or any frame used to cancel or reset the prior MMP/PSAD schedule, may be utilized to reset or update the NAV at the receiving STAs 120. Another frame, such as a CF-END frame could also be used to reset the NAV durations of the STAs 120. Alternatively, the wireless communication system 100 may be configured such that the duration of the most recent MMP/PSAD frame supersedes any locally stored NAV durations at the STAs 120.

[0069] Another way in which the AP 110 may reclaim the medium is by transmitting a poll frame to the STA 120 that is not transmitting during its scheduled transmit time (step 993). The poll frame may include a contention free poll (CF-Poll), a QoS Poll, another MMP/PSAD frame, or the like. Alternatively, the AP 110 may transmit the poll frame to a different STA 120 than the scheduled STA for uplink transmission. The STA 120 that receives the poll frame will then begin transmitting in response to the poll frame (step 994). If the STA 120 has data to transmit, then it will transmit the data. Otherwise it will transmit an acknowledgement frame, a QoS Null, a Data Null, or another frame to indicate that it does not have any data to transmit.

[0070] Yet another way the AP 110 may reclaim the medium is by transmitting downlink data and, in a preferred embodiment, a reverse direction grant (RDG) signal, as in step 995. For example, the AP 110 may send downlink data to any STA 120 that it desires, or the AP 110 may transmit any control or management frame during this period. Upon receiving the downlink data and RDG signal, the receiving STA transmits its uplink data for its time duration (step 996). Even if the AP 110 does not possess any downlink data to transmit, it may still transmit a Data Null, QoS Null, or the like, to indicate to the non-transmitting STA that it should begin transmitting for its specified duration.

[0071] For example, referring back to Figure 11, if the AP 110 detects that the medium is idle for too long after STA1's uplink transmission (U1) time, then

AP 110 transmits downlink data and an RDG to STA2. Upon receiving the downlink data and RDG, STA2 transmits its data for its specified duration (U2').

[0072] If the STA 120 does not have data to transmit in the uplink, the STA 120 should transmit a response frame to the AP 110 such as a QoS Null frame, a Data Null frame, or the like, to indicate to the AP 110 that the STA does not have data to transmit during its allotted uplink time. The AP 110 can thereby reclaim the medium and take some other remedial action to avoid wasting the medium, such as polling another STA 120 to begin its transmission.

[0073] Another way that the AP 110 may reclaim the medium is by transmitting a redundant MMP/PSAD frame (step 997). The redundant MMP/PSAD frame may repeat some or all of the ULT information during the time when a STA 120 misses its transmission window in the uplink phase. This is particularly useful if more than one STA 120 did not receive or decode the MMP/PSAD frame successfully. The AP 110 may also decide to utilize a redundant MMP/PSAD frame if it detects certain events occurring in the wireless communication system 100 during a previous MMP/PSAD exchange sequence, or because the AP 110 possesses particular knowledge about the ULT information or number of STAs 120, that would make it appropriate to transmit a redundant MMP/PSAD.

[0074] For example, the AP 110 may have detected in a previous MMP/PSAD frame exchange that certain STAs 120 did not transmit their information during their scheduled uplink times. In this case, the AP 110 may determine that in the next MMP/PSAD exchange, it will transmit a redundant MMP/PSAD frame to enhance the probability that all STAs 120 will properly receive their scheduled ULTs.

[0075] Additionally, the AP 110 may know that there are a large number of STAs 120 in the wireless communication system 100, and therefore, the probability of any particular STA 120 failing to receive its ULT information in the first MMP/PSAD is increased. Similarly, the AP 110 may have knowledge relating to extensive ULTs scheduled for the STAs 120 in the wireless communication system 100, meaning that if one STA 120 failed to receive the

first MMP/PSAD, a large amount of wasted bandwidth can occur if that STA fails to transmit during its scheduled ULT. In these scenarios, transmitting a redundant MMP/PSAD frame enhances the probability that all the STAs 120 in the system will utilize their scheduled ULTs, eliminating wasted bandwidth. Essentially, the AP 110 may utilize a comparison of the duration of individual ULTs, the total duration of all ULTs, and the number of STAs 120 having ULTs against pre-determined thresholds to decide whether or not a redundant MMP/PSAD frame should be transmitted.

[0076] Referring again to Figure 11, suppose that not only STA2 failed to successfully receive and decode the MMP/PSAD frame, but STA3 failed as well. In this case, both STA2 and STA3 would miss their scheduled transmission times without remedial action by the AP 110. Therefore, if the AP 110 were to detect an idle period for too long after the uplink transmission (U1) of STA1, then the AP 110 transmits a redundant MMP/PSAD frame. In this way, STA3 receives the redundant MMP/PSAD frame and transmits its data during its scheduled uplink window (U3), thus limiting further waste of the medium.

[0077] In yet another alternative embodiment of the present invention, the AP 110 may schedule a broadcast or multicast frame utilizing the MMP/PSAD frame. In order to do this, the AP 110 must reconfigure the existing PSAD frame 40 of the MMP/PSAD frame, since the current format specifies that the STA ID field 82 is the Association ID of the STA 120. Therefore, to support transmitting a broadcast or multicast frame within the MMP/PSAD sequence, the existing PSAD frame 40 should be reconfigured.

[0078] One way to reconfigure the PSAD frame 40 is to include a bit or a field within the MMP/PSAD frame. In a preferred embodiment, this is included in the Station Info field. For example, a bit may be included in the Reserved field 81 of the Station Info field, specifying that a broadcast frame will be transmitted at specified DLT parameters, and that STAs should remain awake during that duration. Alternatively, specific values for the STA ID field 82, for example all "1's", may be utilized to indicate that a broadcast frame will be transmitted and

that STAs should remain awake during the duration. That is, the STA ID field 82 should have all bits set to "1".

[0079] Figure 13 is an exemplary signal diagram 131 of a downlink and uplink exchange for the wireless communication system 100, where a broadcast or multicast MMP/PSAD is transmitted during a broadcast phase of the downlink phase. In the present example, the AP 110 transmits the first MMP/PSAD prior to the downlink phase that indicates to some or all STAs 120 that they should listen during a broadcast interval that will occur at the end of the downlink phase. At the end of the downlink phase, the AP 110 may then transmit a frame, and preferably an additional MMP/PSAD frame to confirm the ULT schedules. In this manner, the STAs 120 will have received their ULT schedules twice and therefore be less likely to miss their uplink transmission time.

[0080] Alternatively, the AP 110 may insert a second MMP/PSAD frame with the first MMP/PSAD frame exchange sequence by including a unicast MMP/PSAD entry in the first MMP/PSAD frame that describes the Tx Start Offset and the Tx Duration for when the second MMP/PSAD frame is to be transmitted. As an example, the entry may include any MAC address of any STA 120 as a dummy receiver address. This entry may also include inaccurate Tx Start Offset and Tx Duration information. At the end of the downlink phase, the AP 110 may then transmit a frame, and preferably an additional MMP/PSAD frame to confirm the ULT schedules. In this manner, only STAs 120 that have not successfully received and decoded the first MMP/PSAD will remain awake, or wake up, to receive and decode the second MMP/PSAD frame, while those stations that successfully received and decoded the first MMP/PSAD frame will not need to wake up to receive and decode the second MMP/PSAD frame. This is because those STAs 120 that successfully receive and decode the first MMP/PSAD frame will know that the second MMP/PSAD frame was not meant for them. Alternatively, no information relating to the second MMP/PSAD frame may be transmitted in the first MMP/PSAD frame.

[0081] Figure 14 is an exemplary signal diagram 141 of a downlink and uplink exchange for the wireless communication system 100, where a broadcast

or multicast MMP/PSAD is transmitted between the downlink phase and the uplink phase. In this example, the AP 110 inserts a second MMP/PSAD frame within the first MMP/PSAD frame, but does not include any entry in the first MMP/PSAD frame to describe the second one. The AP 110 then transmits the second MMP/PSAD frame to confirm the ULT schedules in an interval between the downlink phase and the uplink phase, as shown in Figure 14. In this scenario, only STAs 120 that did not successfully receive and decode the first MMP/PSAD frame will awaken to receive the second MMP/PSAD frame since those that did successfully receive and decode the first MMP/PSAD frame will not awaken until they need to based on their successful decoding of the first MMP/PSAD frame.

[0082] Importantly, however, it should be noted that the AP 110 should account for the effect of the inserted, or nested, MMP/PSAD frame during its ULT Offset and Duration calculations. Otherwise, the AP 110 will be out of synchronization with the Offsets that the STAs 120 believe they are required to adhere to.

[0083] This nested, or redundant MMP/PSAD frame, may or may not contain identical information to the first MMP/PSAD frame. In a preferred embodiment, however, it will contain the ULT information for the STAs 120, and will typically contain consistent information with that of the first MMP/PSAD frame. That is, the second MMP/PSAD frame should contain the same scheduling information that was contained in the first MMP/PSAD frame.

[0084] Although in previous embodiments, the AP 110 is described as monitoring the medium in order to determine whether or not to reclaim it, STAs 120 may also monitor the medium in order to further improve system performance. Typically, the STAs 120 that receive their ULT schedule information in the MMP/PSAD frame do not perform sensing of the medium. They simply blindly begin their transmissions at their scheduled ULT. However, in some instances, it may be desirable to have the STAs 120 monitor the medium instead of, or in addition to, the AP 110. In one embodiment, a STA 120 may monitor the medium for any idle periods. If the STA 120 detects an idle period

lasting beyond a pre-determined threshold, that STA may then transmit its uplink transmission during the remaining ULT duration, thereby avoiding collisions with other STAs ULTs, while maximizing use of the medium.

[0085] Although Figure 1 only depicts one AP 110, it is also possible for several APs to be present in a wireless communication system. In this case, some STAs in the wireless communication system may be associated with one AP, while other STAs may be associated with other APs, which could cause some difficulty. In one scenario, one of the APs (AP1) may be associated with an Overlapping Basic Service Set (OBSS) or a co-channel BSS to another AP (AP2). If AP1 were to transmit an MMP/PSAD frame, STAs associated with AP2 may ignore the MMP/PSAD frame after receiving it because they will not see in the RA field any address that would indicate to them that the frame is intended for them, and go into a sleep state. If AP2 then transmits traffic during that time, the intended STAs will not receive the information because they will have been asleep during the transmission.

[0086] Accordingly, the STAs 120 receiving an MMP/PSAD frame may be configured to read the TA field in the frame to determine if the MMP/PSAD frame was sent from an AP with which the STA is associated. If the STA determines that the AP address in the TA field is the address of the AP the STA is associated with, then the STA can decode downlink transmissions and perform uplink transmissions in accordance with the contents of the MMP/PSAD frame, while going into sleep mode at other times. Conversely, if the STA determines that the AP transmitting the MMP/PSAD frame is not the AP the STA is associated with, it may ignore the frame, but still remain in an awake state to receive any transmission that might be sent from its associated AP. Additionally, however, the STA may desire to read the Duration ID value in an MMP/PSAD frame and update its NAV Duration, even if the frame was not sent by an associated AP. In this manner, the STA will know when the medium will be in use, and will be able to avoid transmitting during those times.

[0087] In another alternative embodiment of the present invention, the MMP/PSAD frame may be utilized to poll certain types of packets, such as Block

Acknowledgement (BA) response frames. In this case, the AP 110 may utilize one or more flags within the MMP/PSAD frame indicating to specified STAs 120 that they transmit their BA response frames during their scheduled ULTs. The flag may further indicate to the STAs 120 whether or not they are to transmit only BA response frames during their scheduled ULT, or if they are to transmit BA response frames along with other frames the STA is transmitting. This alternative facilitates the addition of a new mode for BA to the currently existing modes.

[0088] Currently, the existing BA modes include Immediate Block ACK and Delayed Block ACK. In Immediate Block ACK mode, a STA responds to a BA request (BAR) immediately following an SIFS delay. In Delayed Block ACK mode, a STA decides on its own when to transmit a BA frame.

[0089] The present alternative embodiment includes polling for a Delayed BA, as opposed to the BA being transmitted at an arbitrary time by the STA. For example, the AP 110 may transmit a BAR to the STA 120 indicating to the STA 120 that the STA 120 should prepare the BA packet, or BA frame, and only transmit the packet when the STA 120 receives another poll message from the AP 110. The poll message may be in the form of an MMP or another packet transmitted by the AP 110. This provides for the AP 110 to determine the time for associated STAs 120 to transmit their BA frames instead of having the STAs themselves determine when to transmit them.

[0090] The above features may be implemented in a wireless transmit/receive unit (WTRU), base station, and/or peer-to-peer devices. The above methods are applicable to a physical layer and/or a data link layer. The applicable forms of implementation include application specific integrated circuit (ASIC), middleware, and software. This invention can be applied in an OFDM/MIMO system and a IEEE 802.11 compliant system.

[0091] Additionally, the features of the embodiments of the present invention may be implemented in a variety of manners, such as in an application running on a WTRU, such as an AP or STA. The features may also be incorporated into an integrated circuit (IC) or be configured in a circuit

comprising a multitude of interconnecting components. Additionally, the features may be performed by a software application that runs on an IC, or by a software application that runs on a processor.

[0092] Although the features and elements of the present invention are described in the preferred embodiments in particular combinations, each feature or element can be used alone (without the other features and elements of the preferred embodiments) or in various combinations with or without other features and elements of the present invention.

[0093] Embodiments

1. A method for transmission management of a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs).

2. The method of embodiment 1, further comprising an AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for the plurality of STAs.

3. A method as in any preceding embodiment, further comprising an AP transmitting an MMP/PSAD frame to a plurality of STAs.

4. A method as in any preceding embodiment, further comprising STAs that successfully receive and decode an MMP/PSAD frame transmitting during their scheduled ULT.

5. A method as in any preceding embodiment wherein an MMP/PSAD frame includes a duration field specifying a duration of time for the ULT and a Downlink Transmission Time (DLT).

6. A method as in any preceding embodiment wherein an AP arranges an order of PSAD descriptor fields included in an MMP/PSAD frame according to increasing values contained in Receiver (Rx) DLT Start Offset fields of the MMP/PSAD frame.

7. A method as in any preceding embodiment wherein an AP arranges an order of MMP Receiver Information fields contained in an MMP/PSAD frame according to increasing values contained in Receiver (Rx) DLT Start Offset fields of the MMP/PSAD frame.

8. A method as in any preceding embodiment wherein an MMP/PSAD frame includes a transmitter address (TA) field and a plurality of receiver fields.

9. A method as in any preceding embodiment wherein an AP populates a TA field with its own identifier and the plurality of receiver fields with identifiers that identify intended receiver STAs.

10. A method as in any preceding embodiment wherein an AP identifier includes the medium access control (MAC) address of the AP.

11. A method as in any preceding embodiment wherein a STA identifier includes the MAC address of the STA.

12. A method as in any preceding embodiment, further comprising a STA that successfully receives and decodes an MMP/PSAD frame extracting timing information from the MMP/PSAD frame.

13. A method as in any preceding embodiment wherein a transmitting STA derives its High Throughput Signal (HT-SIG) timing from an offset field and a duration field specified in a MMP/PSAD frame.

14. A method as in any preceding embodiment wherein an offset field includes an Rx or DLT Start Offset field.

15. A method as in any preceding embodiment wherein an MMP/PSAD frame includes an aggregate Physical Layer Protocol Data Unit (A-PPDU).

16. A method as in any preceding embodiment wherein a transmitting STA reads the Rx Offset and Rx Duration fields of a STA that is scheduled to transmit immediately prior in order to determine the start of its own HT-SIG field.

17. A method as in any preceding embodiment wherein a transmitting STA adds the Rx Offset and the Rx Duration values contained in the Rx Offset and Rx Duration fields of the STA transmitting immediately prior in order to determine its own starting time.

18. A method as in any preceding embodiment wherein a transmitting STA adds the values contained in the Rx Duration fields for all prior transmitting STAs to determine its own starting time.

19. A method as in any preceding embodiment, further comprising adding a field within the MMP/PSAD descriptor field.

20. The method of embodiment 19 wherein an added field indicates that the timing information for a particular STA is related to the start of a MAC PDU (MPDU) within an A-MPDU aggregate.

21. The method of embodiment 19 wherein an added field indicates that the timing information for a particular STA is related to the start of a PPDU within an A-PPDU aggregate.

22. A method as in any preceding embodiment, further comprising adding a field within an MMP receiver information field.
23. The method of embodiment 22 wherein an added field indicates that the timing information for a particular STA is related to the start of a MAC PDU (MPDU) within an A-MPDU aggregate.
24. The method of embodiment 22 wherein an added field indicates that the timing information for a particular STA is related to the start of a PPDU within an A-PPDU aggregate.
25. A method as in any preceding embodiment wherein a STA that successfully receives and decodes an MMP/PSAD frame enters a sleep mode during periods when it is not required to transmit or receive data in the wireless communication system.
26. A method as in any preceding embodiment, further comprising an AP recovering the wireless communication system transmission medium.
27. A method as in any preceding embodiment, further comprising an AP monitoring the wireless communication system transmission medium.
28. A method as in any preceding embodiment wherein an AP monitors the wireless communication system transmission medium continuously.
29. A method as in any preceding embodiment wherein an AP monitors the wireless communication system transmission medium at specific time periods.
30. A method as in any preceding embodiment wherein an AP determines time periods to monitor the wireless communication system

transmission medium from the timing information contained within a MMP/PSAD frame.

31. A method as in any preceding embodiment wherein an AP detects that a particular STA is not transmitting during its scheduled ULT.

32. A method as in any preceding embodiment, further comprising an AP reclaiming the wireless communication system transmission medium.

33. A method as in any preceding embodiment, further comprising an AP waiting a predetermined period after detecting that a particular STA is not transmitting during its scheduled ULT, before reclaiming the wireless communication system transmission medium.

34. The method of embodiment 33 wherein a predetermined period is a predetermined idle period.

35. A method as in any of embodiments 33-34 wherein an idle period comprises a point control function inter-frame spacing (PIFS) period in the wireless communication system.

36. A method as in any preceding embodiment wherein reclaiming the wireless communication system transmission medium includes the AP rescheduling ULTs and DLTs.

37. A method as in any preceding embodiment wherein an AP transmits an additional frame to at least one STA indicating that the at least one STA should disregard the previously transmitted MMP/PSAD frame.

38. A method as in any preceding embodiment wherein an AP transmits an additional frame to all STAs in the wireless communication system.

39. A method as in any of embodiments 1-37 wherein an AP transmits an additional frame to selected STAs in the wireless communication system.

40. A method as in any preceding embodiment wherein an additional frame includes a control frame.

41. A method as in any preceding embodiment wherein an additional frame includes a data frame.

42. A method as in any preceding embodiment wherein an additional frame includes a management frame.

43. A method as in any preceding embodiment wherein an additional frame is an additional MMP/PSAD frame.

44. A method as in any preceding embodiment wherein an additional MMP/PSAD frame includes a field indicating to at least one STA to ignore previous scheduling information.

45. A method as in any preceding embodiment wherein an additional MMP/PSAD frame is substantially identical to a previous MMP/PSAD frame.

46. A method as in any preceding embodiment, further comprising updating a network allocation vector (NAV) duration at an at least one STA.

47. A method as in any preceding embodiment wherein updating a NAV duration includes transmitting a contention free end (CF-END) frame to an at least one STA.

48. A method as in any preceding embodiment wherein reclaiming the wireless communication transmission medium includes transmitting a poll frame to a particular STA.

49. A method as in any preceding embodiment wherein a poll frame includes one selected from the group consisting of a contention free poll (CF-Poll), a quality of service (QoS) poll, and an MMP/PSAD frame.

50. A method as in any preceding embodiment wherein a particular STA is a STA that is not transmitting during its scheduled ULT.

51. A method as in any preceding embodiment wherein a particular STA is a STA other than a STA that is not transmitting during its scheduled ULT.

52. A method as in any preceding embodiment, further comprising a particular STA transmitting in response to the poll frame.

53. A method as in any preceding embodiment wherein a particular STA transmits data in response to the poll frame.

54. A method as in any preceding embodiment wherein a particular STA transmits an acknowledgement frame, a QoS Null frame, or a Data Null frame, in response to the poll frame.

55. A method as in any preceding embodiment wherein reclaiming the wireless communication transmission medium includes an AP transmitting downlink data and a reverse direction grant (RDG) signal to at least one STA.

56. A method as in any preceding embodiment, further comprising an AP transmitting a management frame to at least one STA.

57. A method as in any preceding embodiment, further comprising an AP transmitting a control frame to at least one STA.

58. A method as in any preceding embodiment wherein an AP transmits downlink data to a STA other than a STA that is not transmitting during its scheduled ULT.

59. A method as in any preceding embodiment wherein an AP transmits downlink data to a STA that is not transmitting during its scheduled ULT.

60. A method as in any preceding embodiment wherein an AP transmits a Data Null frame or a QoS Null frame.

61. A method as in any preceding embodiment, further comprising a STA transmitting uplink data in response to receiving an RDG.

62. A method as in any preceding embodiment, further comprising a STA transmitting a Data Null frame or a QoS Null frame in response to receiving an RDG.

63. A method as in any preceding embodiment, further comprising an AP polling another STA to begin transmitting.

64. A method as in any preceding embodiment wherein reclaiming the wireless communication system transmission medium includes transmitting a redundant MMP/PSAD frame.

65. A method as in any preceding embodiment wherein a redundant MMP/PSAD frame includes all of the ULT information contained in a previous MMP/PSAD frame.

66. A method as in any preceding embodiment wherein an AP transmits a redundant MMP/PSAD frame during a downlink phase.

67. A method as in any preceding embodiment wherein an AP transmits a redundant MMP/PSAD frame between a downlink phase and an uplink phase.

68. A method as in any preceding embodiment, further comprising an AP reclaiming the medium in response to detecting uplink transmission collisions during the uplink phase.

69. A method as in any preceding embodiment, further comprising an AP reclaiming the medium in response to detecting frame errors during the uplink phase.

70. A method as in any preceding embodiment, further comprising an AP transmitting a redundant MMP/PSAD frame based upon a prior knowledge of conditions in the wireless communication system.

71. In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), a method for transmission management of the wireless medium, the method comprising the AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame to include information relating to a broadcast frame within an MMP/PSAD exchange sequence.

72. The method of embodiment 71, further comprising an AP transmitting the MMP/PSAD frame to a plurality of STAs.

73. A method as in any of embodiments 71-72, further comprising STAs successfully receiving and decoding the MMP/PSAD frame acting in accordance with the information contained in the broadcast frame.

74. A method as in any of embodiments 71-73, further comprising an AP transmitting the broadcast frame.

75. A method as in any of embodiments 71-74 wherein an AP includes an additional field within a Station Info field of the MMP/PSAD frame.

76. A method as in any of embodiments 71-75 wherein an AP includes a bit within a Reserved field of a Station Info field.

77. A method as in any of embodiments 71-76 wherein a bit specifies that a broadcast frame will be transmitted at specified downlink time parameters and that STAs should not go into sleep mode for the duration.

78. A method as in any of embodiments 71-77 wherein a bit specifies that all STAs in the wireless communication system should not go into sleep mode for the duration.

79. A method as in any of embodiments 71-77 wherein a bit specifies that selected STAs in the wireless communication system should not go into sleep mode for the duration.

80. A method as in any of embodiments 71-79 wherein a broadcast frame is an MMP/PSAD frame.

81. A method as in any of embodiments 71-80 wherein an AP transmits a broadcast frame at the end of a downlink phase.

82. A method as in any of embodiments 71-81 wherein an AP includes a unicast MMP/PSAD entry in the MMP/PSAD frame.

83. The method of embodiment 82 wherein an entry indicates the Transmit (Tx) Start Offset and Tx Duration for when the broadcast frame will be transmitted.

84. A method as in any of embodiments 71-83 wherein an entry includes a dummy receiver address.

85. A method as in any of embodiments 71-84 wherein an entry further includes inaccurate Tx Start Offset and Tx Duration entries.

86. A method as in any of embodiments 71-85 wherein STAs that successfully receive and decode the MMP/PSAD frame go into sleep mode during the broadcast frame.

87. A method as in any of embodiments 71-86 wherein an AP transmits a broadcast frame between the uplink phase and the downlink phase.

88. A method as in any of embodiments 71-87 wherein the broadcast frame is a substantially identical MMP/PSAD frame to the previously transmitted MMP/PSAD frame.

89. A method as in any preceding embodiment, further comprising STAs monitoring the wireless communication system transmission medium for a pre-defined idle period.

90. The method of embodiment 89, further comprising a STA transmitting its uplink information if the STA detects an idle period in the wireless communication system transmission medium exceeding the pre-defined idle period.

91. A method for transmission management of the wireless medium in a wireless communication system comprising a plurality of access points (APs) and a plurality of stations (STAs), each STA associated with a particular AP.

92. The method of embodiment 91, further comprising a first AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for STAs associated with the first AP.

93. A method as in any of embodiments 91-92, further comprising a first AP transmitting an MMP/PSAD frame to a plurality of STAs.

94. A method as in any of embodiments 91-93, further comprising a STA receiving an MMP/PSAD and determining if the MMP/PSAD was intended for the STA.

95. A method as in any of embodiments 91-94 wherein a transmitter address (TA) field in the MMP/PSAD includes the address of a first AP.

96. A method as in any of embodiments 91-95 wherein a STA reads a TA field in a MMP/PSAD frame to determine if an AP transmitting the MMP/PSAD frame is the AP with which the STA is associated.

97. A method as in any of embodiments 91-96 wherein a STA receiving an MMP/PSAD frame determines that an AP transmitting the MMP/PSAD frame is not the AP with which the STA is associated.

98. A method as in any of embodiments 91-97 wherein a STA goes into a sleep mode.

99. A method as in any of embodiments 91-97 wherein a STA does not go into a sleep mode.

100. A method as in any of embodiments 91-99 wherein a STA reads the value in a Duration ID field.

101. A method as in any of embodiments 91-96 wherein a STA receiving a MMP/PSAD frame determines that an AP transmitting the MMP/PSAD frame is the AP with which the STA is associated.

102. The method of embodiment 101 wherein a STA decodes the downlink and uplink transmission information contained in the MMP/PSAD frame.

103. A method as in any of embodiments 101-102 wherein a STA goes into sleep mode during times when it is not scheduled for downlink or uplink.

104. A method as in any preceding embodiment, further comprising an AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame to poll for a block acknowledgement (BA) response frame and with scheduled Uplink Transmission Time (ULT) information.

105. A method as in any preceding embodiment wherein STAs that successfully receive and decode the MMP/PSAD frame transmit their BA response frames during their scheduled uplink transmission times.

106. A method as in any preceding embodiment wherein STAs that successfully receive and decode the MMP/PSAD frame transmit only their BA response frames during their scheduled uplink transmission times.

107. A method as in any preceding embodiment, further comprising an AP transmitting an additional poll message to the STAs to transmit their BA response frames.

108. The method of embodiment 107 wherein an additional poll message is an MMP frame.

109. A method as in any preceding embodiment, further comprising monitoring the wireless communication system transmission medium.

110. A method as in any preceding embodiment, further comprising reclaiming a wireless communication system transmission medium upon the detection of a pre-defined event.

111. A method as in any of claims 109-110 wherein a pre-defined event includes detecting frame errors during an uplink phase.

112. A method as in any of claims 109-111 wherein a pre-defined event includes detecting collisions between transmitted data in an uplink phase.

113. A method as in any of claims 109-112 wherein a pre-defined event includes detecting new higher priority traffic.

114. An access point (AP) configured to perform a method as in any preceding embodiment.

115. The AP of embodiment 114, further comprising a receiver.

116. An AP as in any of embodiments 114-115, further comprising a transmitter.

117. An AP as in any of embodiments 114-116, further comprising a processor in communication with the receiver and the transmitter.

118. An AP as in any of embodiments 114-117 wherein a processor is configured to configure a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for a plurality of STAs.

119. An AP as in any of embodiments 114-118 wherein a processor is configured to transmit an MMP/PSAD frame to a plurality of STAs.

120. An AP as in any of embodiments 114-119 wherein a processor is configured to monitor the wireless communication system transmission medium to detect whether a STA is transmitting during the STA's scheduled uplink transmission time.

121. An AP as in any of embodiments 114-120 wherein a processor is configured to reclaim the wireless communication system transmission medium.

122. A station (STA) configured to perform a method as in any of embodiments 1-113.

123. The STA of embodiment 122, further comprising a receiver.

124. A STA as in any of embodiments 122-123, further comprising a transmitter.

125. A STA as in any of embodiments 122-124, further comprising a processor in communication with the receiver and the transmitter.

126. A STA as in any of embodiments 122-125 wherein a processor is configured to receive a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information.

127. A STA as in any of embodiments 122-126 wherein a processor is configured to determine the scheduled ULT for the STA.

128. A STA as in any of embodiments 122-127 wherein a processor is configured to transmit during its scheduled ULT.

129. A STA as in any of embodiments 122-128 wherein a processor is configured to monitor the wireless communication system transmission medium for idle periods that exceed a pre-defined threshold.

130. A STA as in any of embodiments 122-129 wherein a processor is configured to transmit uplink data after detecting an idle period that exceeds the pre-defined threshold.

131. A wireless transmit/receive unit (WTRU) configured to perform a method as in any of embodiments 1-113.

132. The WTRU of embodiment 131, further comprising a receiver.

133. A WTRU as in any of embodiments 131-132, further comprising a transmitter.

134. A WTRU as in any of embodiments 131-133, further comprising a processor in communication with the receiver and the transmitter.

135. A WTRU as in any of embodiments 131-134 wherein a processor is configured to configure a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for other WTRUs.

136. A WTRU as in any of embodiments 131-135 wherein a processor is configured to transmit an MMP/PSAD frame to other WTRUs.

137. A WTRU as in any of embodiments 131-136 wherein a processor is configured to reclaim the wireless communication system transmission medium.

138. A WTRU as in any of embodiments 131-137 wherein a processor is configured to receive an MMP/PSAD with scheduled Uplink Transmission Time (ULT) information.

139. A WTRU as in any of embodiments 131-138 wherein a processor is configured to transmit during its scheduled ULT.

140. A WTRU as in any of embodiments 131-139 wherein a processor is configured to monitor the wireless communication system transmission medium for idle periods that exceed a pre-defined threshold.

141. A WTRU as in any of embodiments 131-140 wherein a processor is configured to transmit uplink data after detecting an idle period that exceeds a pre-defined threshold.

* * *

CLAIMS

What is claimed is:

1. In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), a method for transmission management of the wireless medium, the method comprising:

the AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for the plurality of STAs;

the AP transmitting the MMP/PSAD frame to the plurality of STAs; and

STAs that successfully receive and decode the MMP/PSAD frame transmitting during their scheduled ULT.

2. The method of claim 1, wherein the MMP/PSAD frame includes a duration field specifying a duration of time for the ULT and a Downlink Transmission Time (DLT).

3. The method of claim 2 wherein the AP arranges an order of PSAD descriptor fields included in the MMP/PSAD frame according to increasing values contained in Receiver (Rx) DLT Start Offset fields of the MMP/PSAD frame.

4. The method of claim 2 wherein the AP arranges an order of MMP Receiver Information fields contained in the MMP/PSAD frame according to increasing values contained in Receiver (Rx) DLT Start Offset fields of the MMP/PSAD frame.

5. The method of claim 1 wherein the MMP/PSAD frame includes a transmitter address (TA) field and a plurality of receiver fields.

6. The method of claim 5 wherein the AP populates the TA field with its own identifier and the plurality of receiver fields with identifiers that identify intended receiver STAs.

7. The method of claim 6 wherein the AP identifier includes the medium access control (MAC) address of the AP.

8. The method of claim 6 wherein the STA identifier includes the MAC address of the STA.

9. The method of claim 1, further comprising a STA that successfully receives and decodes the MMP/PSAD frame extracting timing information from the MMP/PSAD frame.

10. The method of claim 9 wherein the transmitting STA derives its High Throughput Signal (HT-SIG) timing from an offset field and a duration field specified in the MMP/PSAD frame.

11. The method of claim 10 wherein the offset field includes an Rx or DLT Start Offset field.

12. The method of claim 11 wherein the MMP/PSAD frame includes an aggregate Physical Layer Protocol Data Unit (A-PPDU).

13. The method of claim 12 wherein the transmitting STA reads the Rx Offset and Rx Duration fields of a STA that is scheduled to transmit immediately prior in order to determine the start of its own HT-SIG field.

14. The method of claim 12 wherein the transmitting STA adds the Rx Offset and the Rx Duration values contained in the Rx Offset and Rx Duration

fields of the STA transmitting immediately prior in order to determine its own starting time.

15. The method of claim 12 wherein the transmitting STA adds the values contained in the Rx Duration fields for all prior transmitting STAs to determine its own starting time.

16. The method of claim 1, further comprising adding a field within the MMP/PSAD descriptor field, said bit indicating that the timing information for a particular STA is related to the start of a MAC PDU (MPDU) within an A-MPDU aggregate.

17. The method of claim 1, further comprising adding a field within an MMP/PSAD descriptor field, said bit indicating that the timing information for a particular STA is related to the start of a PPDU within an A-PPDU aggregate.

18. The method of claim 1, further comprising adding a field within an MMP receiver information field, said bit indicating that the timing information for a particular STA is related to the start of a MAC PDU (MPDU) within an A-MPDU aggregate.

19. The method of claim 1, further comprising adding a field within an MMP receiver information field, said bit indicating that the timing information for a particular STA is related to the start of a PPDU within an A-PPDU aggregate.

20. The method of claim 1, wherein a STA that successfully receives and decodes the MMP/PSAD frame enters a sleep mode during periods when it is not required to transmit or receive data in the wireless communication system.

21. The method of claim 1, further comprising the AP recovering the wireless communication system transmission medium.
22. The method of claim 21, further comprising the AP monitoring the wireless communication system transmission medium.
23. The method of claim 22 wherein the AP monitors the wireless communication system transmission medium continuously.
24. The method of claim 22 wherein the AP monitors the wireless communication system transmission medium at specific time periods.
25. The method of claim 24 wherein the AP determines the time periods to monitor the wireless communication system transmission medium from the timing information contained within the MMP/PSAD frame.
26. The method of claim 22 wherein the AP detects that a particular STA is not transmitting during its scheduled ULT.
27. The method of claim 26, further comprising the AP reclaiming the wireless communication system transmission medium.
28. The method of claim 27 wherein the AP waits a predetermined period after detecting that a particular STA is not transmitting during its scheduled ULT, before reclaiming the wireless communication system transmission medium.
29. The method of claim 28 wherein the predetermined period is a predetermined idle period, said idle period comprising a point control function inter-frame spacing (PIFS) period in the wireless communication system.

30. The method of claim 27 wherein reclaiming the wireless communication system transmission medium includes the AP rescheduling ULTs and DLTs.

31. The method of claim 30 wherein the AP transmits an additional frame to at least one STA indicating that the at least one STA should disregard the previously transmitted MMP/PSAD frame.

32. The method of claim 31 wherein the AP transmits the additional frame to all STAs in the wireless communication system.

33. The method of claim 31 wherein the AP transmits the additional frame to selected STAs in the wireless communication system.

34. The method of claim 31 wherein the additional frame includes a control frame.

35. The method of claim 31 wherein the additional frame includes a data frame.

36. The method of claim 31 wherein the additional frame includes a management frame.

37. The method of claim 31 wherein the additional frame is an additional MMP/PSAD frame.

38. The method of claim 37 wherein the additional MMP/PSAD frame includes a field indicating to the at least one STA to ignore previous scheduling information.

39. The method of claim 37 wherein the additional MMP/PSAD frame is substantially identical to the previous MMP/PSAD frame.

40. The method of claim 31, further comprising updating the network allocation vector (NAV) duration at the at least one STA.

41. The method of claim 40 wherein updating the NAV duration includes transmitting a contention free end (CF-END) frame to the at least one STA.

42. The method of claim 27 wherein reclaiming the wireless communication transmission medium includes transmitting a poll frame to a particular STA.

43. The method of claim 42 wherein the poll frame includes one selected from the group consisting of a contention free poll (CF-Poll), a quality of service (QoS) poll, and an MMP/PSAD frame.

44. The method of claim 42 wherein the particular STA is the STA that is not transmitting during its scheduled ULT.

45. The method of claim 42 wherein the particular STA is a STA other than the STA that is not transmitting during its scheduled ULT.

46. The method of claim 42, further comprising the particular STA transmitting in response to the poll frame.

47. The method of claim 46 wherein the particular STA transmits data in response to the poll frame.

48. The method of claim 46 wherein the particular STA transmits an acknowledgement frame, a QoS Null frame, or a Data Null frame, in response to the poll frame.

49. The method of claim 27 wherein reclaiming the wireless communication transmission medium includes the AP transmitting downlink data and a reverse direction grant (RDG) signal to at least one STA.

50. The method of claim 49, further comprising the AP transmitting a management frame to at least one STA.

51. The method of claim 49, further comprising the AP transmitting a control frame to at least one STA.

52. The method of claim 49 wherein the AP transmits downlink data to a STA other than the STA that is not transmitting during its scheduled ULT.

53. The method of claim 49 wherein the AP transmits downlink data to the STA that is not transmitting during its scheduled ULT.

54. The method of claim 49 wherein the AP transmits a Data Null frame or a QoS Null frame.

55. The method of claim 49, further comprising the STA transmitting uplink data in response to receiving the RDG.

56. The method of claim 49, further comprising the STA transmitting a Data Null frame or a QoS Null frame in response to receiving the RDG.

57. The method of claim 56, further comprising the AP polling another STA to begin transmitting.

58. The method of claim 27 wherein reclaiming the wireless communication system transmission medium includes transmitting a redundant MMP/PSAD frame.

59. The method of claim 58 wherein the redundant MMP/PSAD frame includes all of the ULT information contained in the previous MMP/PSAD frame.

60. The method of claim 58 wherein the AP transmits the redundant MMP/PSAD frame during a downlink phase.

61. The method of claim 58 wherein the AP transmits the redundant MMP/PSAD frame between a downlink phase and an uplink phase.

62. The method of claim 22, further comprising the AP reclaiming the medium in response to detecting frame errors during the uplink phase.

63. The method of claim 22, further comprising the AP reclaiming the medium in response to detecting uplink transmission collisions during the uplink phase.

64. The method of claim 22, further comprising the AP transmitting a redundant MMP/PSAD frame based upon a prior knowledge of conditions in the wireless communication system.

65. In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), a method for transmission management of the wireless medium, the method comprising:

the AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame to include information relating to a broadcast frame within an MMP/PSAD exchange sequence;

the AP transmitting the MMP/PSAD frame to the plurality of STAs;

STAs successfully receiving and decoding the MMP/PSAD frame acting in accordance with the information contained in the broadcast frame; and the AP transmitting the broadcast frame.

66. The method of claim 65 wherein the AP includes an additional field within a Station Info field of the MMP/PSAD frame.

67. The method of claim 66 wherein the AP includes a bit within a Reserved field of the Station Info field.

68. The method of claim 67 wherein the bit specifies that a broadcast frame will be transmitted at specified downlink time parameters and that STAs should not go into sleep mode for the duration.

69. The method of claim 68 wherein the bit specifies that all STAs in the wireless communication system should not go into sleep mode for the duration.

70. The method of claim 68 wherein the bit specifies that selected STAs in the wireless communication system should not go into sleep mode for the duration.

71. The method of claim 65 wherein the broadcast frame is an MMP/PSAD frame.

72. The method of claim 65 wherein the AP transmits the broadcast frame at the end of a downlink phase.

73. The method of claim 65 wherein the AP includes a unicast MMP/PSAD entry in the MMP/PSAD frame, said entry indicating the Transmit

(Tx) Start Offset and Tx Duration for when the broadcast frame will be transmitted.

74. The method of claim 73 wherein the entry includes a dummy receiver address.

75. The method of claim 74 wherein the entry further includes inaccurate Tx Start Offset and Tx Duration entries.

76. The method of claim 73 wherein STAs that successfully receive and decode the MMP/PSAD frame go into sleep mode during the broadcast frame.

77. The method of claim 73 wherein the AP transmits the broadcast frame between the uplink phase and the downlink phase.

78. The method of claim 65 wherein the broadcast frame is a substantially identical MMP/PSAD frame to the previously transmitted MMP/PSAD frame.

79. In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), a method for transmission management of the wireless medium, the method comprising:

the AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for the plurality of STAs;

the AP transmitting the MMP/PSAD frame to the plurality of STAs;

STAs monitoring the wireless communication system transmission medium for a pre-defined idle period; and

a STA transmitting its uplink information if the STA detects an idle period in the wireless communication system transmission medium exceeding the pre-defined idle period.

80. In a wireless communication system comprising a plurality of access points (APs) and a plurality of stations (STAs), each STA associated with a particular AP, a method for transmission management of the wireless medium, the method comprising:

a first AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for STAs associated with the first AP;

the first AP transmitting the MMP/PSAD frame to the plurality of STAs;

a STA receiving the MMP/PSAD and determining if the MMP/PSAD was intended for the STA.

81. The method of claim 80 wherein a transmitter address (TA) field in the MMP/PSAD includes the address of the first AP.

82. The method of claim 81 wherein the STA reads the TA field in the MMP/PSAD frame to determine if the AP transmitting the MMP/PSAD frame is the AP with which the STA is associated.

83. The method of claim 80 wherein the STA receiving the MMP/PSAD frame determines that the AP transmitting the MMP/PSAD frame is not the AP with which the STA is associated.

84. The method of claim 83 wherein the STA goes into a sleep mode.

85. The method of claim 83 wherein the STA does not go into a sleep mode.

86. The method of claim 83 wherein the STA reads the value in a Duration ID field.

87. The method of claim 80 wherein the STA receiving the MMP/PSAD frame determines that the AP transmitting the MMP/PSAD frame is the AP with which the STA is associated; and

the STA decodes the downlink and uplink transmission information contained in the MMP/PSAD frame.

88. The method of claim 87 wherein the STA goes into sleep mode during times when it is not scheduled for downlink or uplink.

89. In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), a method for transmission management of the wireless medium, the method comprising:

the AP configuring a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame to poll for a block acknowledgement (BA) response frame and with scheduled Uplink Transmission Time (ULT) information;

the AP transmitting the MMP/PSAD frame to the plurality of STAs; and

the STAs that successfully receive and decode the MMP/PSAD frame transmitting their BA response frames in accordance with the information contained in the MMP/PSAD frame.

90. The method of claim 89 wherein the STAs that successfully receive and decode the MMP/PSAD frame transmit their BA response frames during their scheduled uplink transmission times.

91. The method of claim 90 wherein the STAs that successfully receive and decode the MMP/PSAD frame transmit only their BA response frames during their scheduled uplink transmission times.

92. The method of claim 89, further comprising the AP transmitting an additional poll message to the STAs to transmit their BA response frames.

93. The method of claim 92 wherein the additional poll message is an MMP frame.

94. In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), a method for transmission management of the wireless medium, the method comprising:

monitoring the wireless communication system transmission medium; and

reclaiming the wireless communication system transmission medium upon the detection of a pre-defined event.

95. The method of claim 94 wherein the pre-defined event includes detecting frame errors during an uplink phase.

96. The method of claim 94 wherein the pre-defined event includes detecting collisions between transmitted data in an uplink phase.

97. The method of claim 94 wherein the pre-defined event includes detecting new higher priority traffic.

98. In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), the at least one AP comprising:

a receiver;

a transmitter; and

a processor in communication with the receiver and the transmitter, said processor configured to configure a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled

Uplink Transmission Time (ULT) information for the plurality of STAs, and transmit the MMP/PSAD frame to the plurality of STAs.

99. The AP of claim 98 wherein the processor is further configured to monitor the wireless communication system transmission medium to detect whether a STA is transmitting during the STA's scheduled uplink transmission time.

100. The AP of claim 98 wherein the processor is further configured to reclaim the wireless communication system transmission medium.

101. In a wireless communication system comprising at least one access point (AP) and a plurality of stations (STAs), each STA comprising:

a receiver;

a transmitter; and

a processor in communication with the receiver and the transmitter, said processor configured to receive a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information, determine the scheduled ULT for the STA, and transmit during its scheduled ULT.

102. The STA of claim 101 wherein the processor is further configured to monitor the wireless communication system transmission medium for idle periods that exceed a pre-defined threshold.

103. The STA of claim 102 wherein the processor is further configured to transmit uplink data after detecting an idle period that exceeds the pre-defined threshold.

104. In a wireless communication system comprising a plurality of wireless transmit/receive units (WTRUs) configured to manage transmission in the wireless communication system, each WTRU comprising:

- a receiver;
- a transmitter; and


a processor in communication with the receiver and the transmitter, said processor configured to configure a Multiple Receiver Aggregate Multi-Poll/Power Save Aggregation Descriptor (MMP/PSAD) frame with scheduled Uplink Transmission Time (ULT) information for other WTRUs, and transmit the MMP/PSAD frame to the other WTRUs.

105. The WTRU of claim 104 wherein the processor is further configured to reclaim the wireless communication system transmission medium.

106. The WTRU of claim 104 wherein the processor is further configured to receive an MMP/PSAD with scheduled Uplink Transmission Time (ULT) information, determine the scheduled ULT for the WTRU, and transmit during its scheduled ULT.

107. The WTRU of claim 104 wherein the processor is further configured to monitor the wireless communication system transmission medium for idle periods that exceed a pre-defined threshold.

108. The WTRU of claim 104 wherein the processor is further configured to transmit uplink data after detecting an idle period that exceeds the pre-defined threshold.

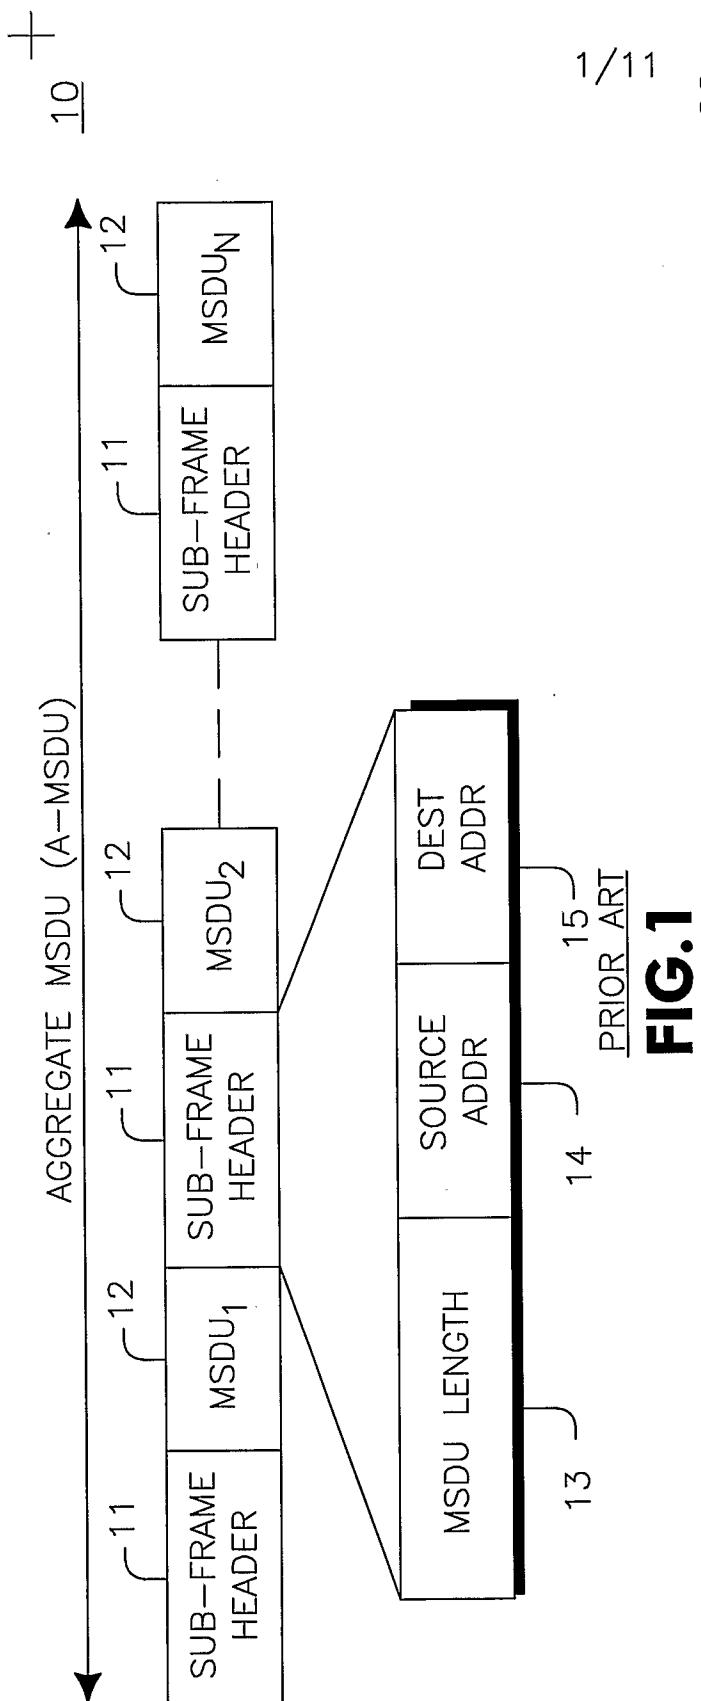

11






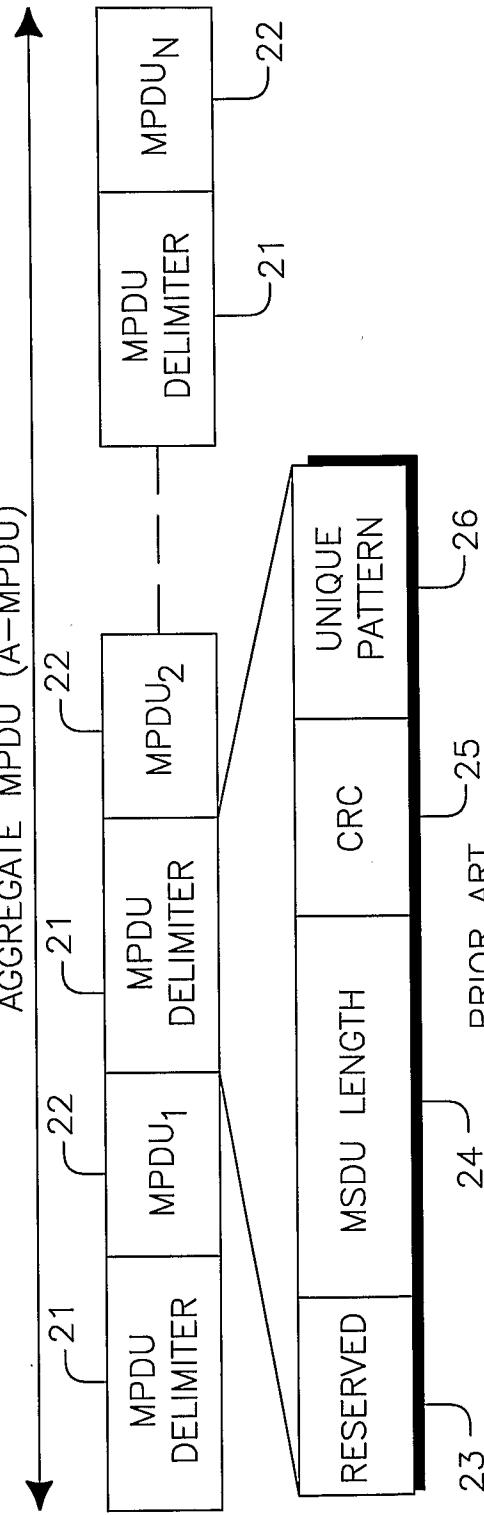


FIG. 2

**FIG.3****FIG.4**


**FIG.5A****FIG.5B**

+

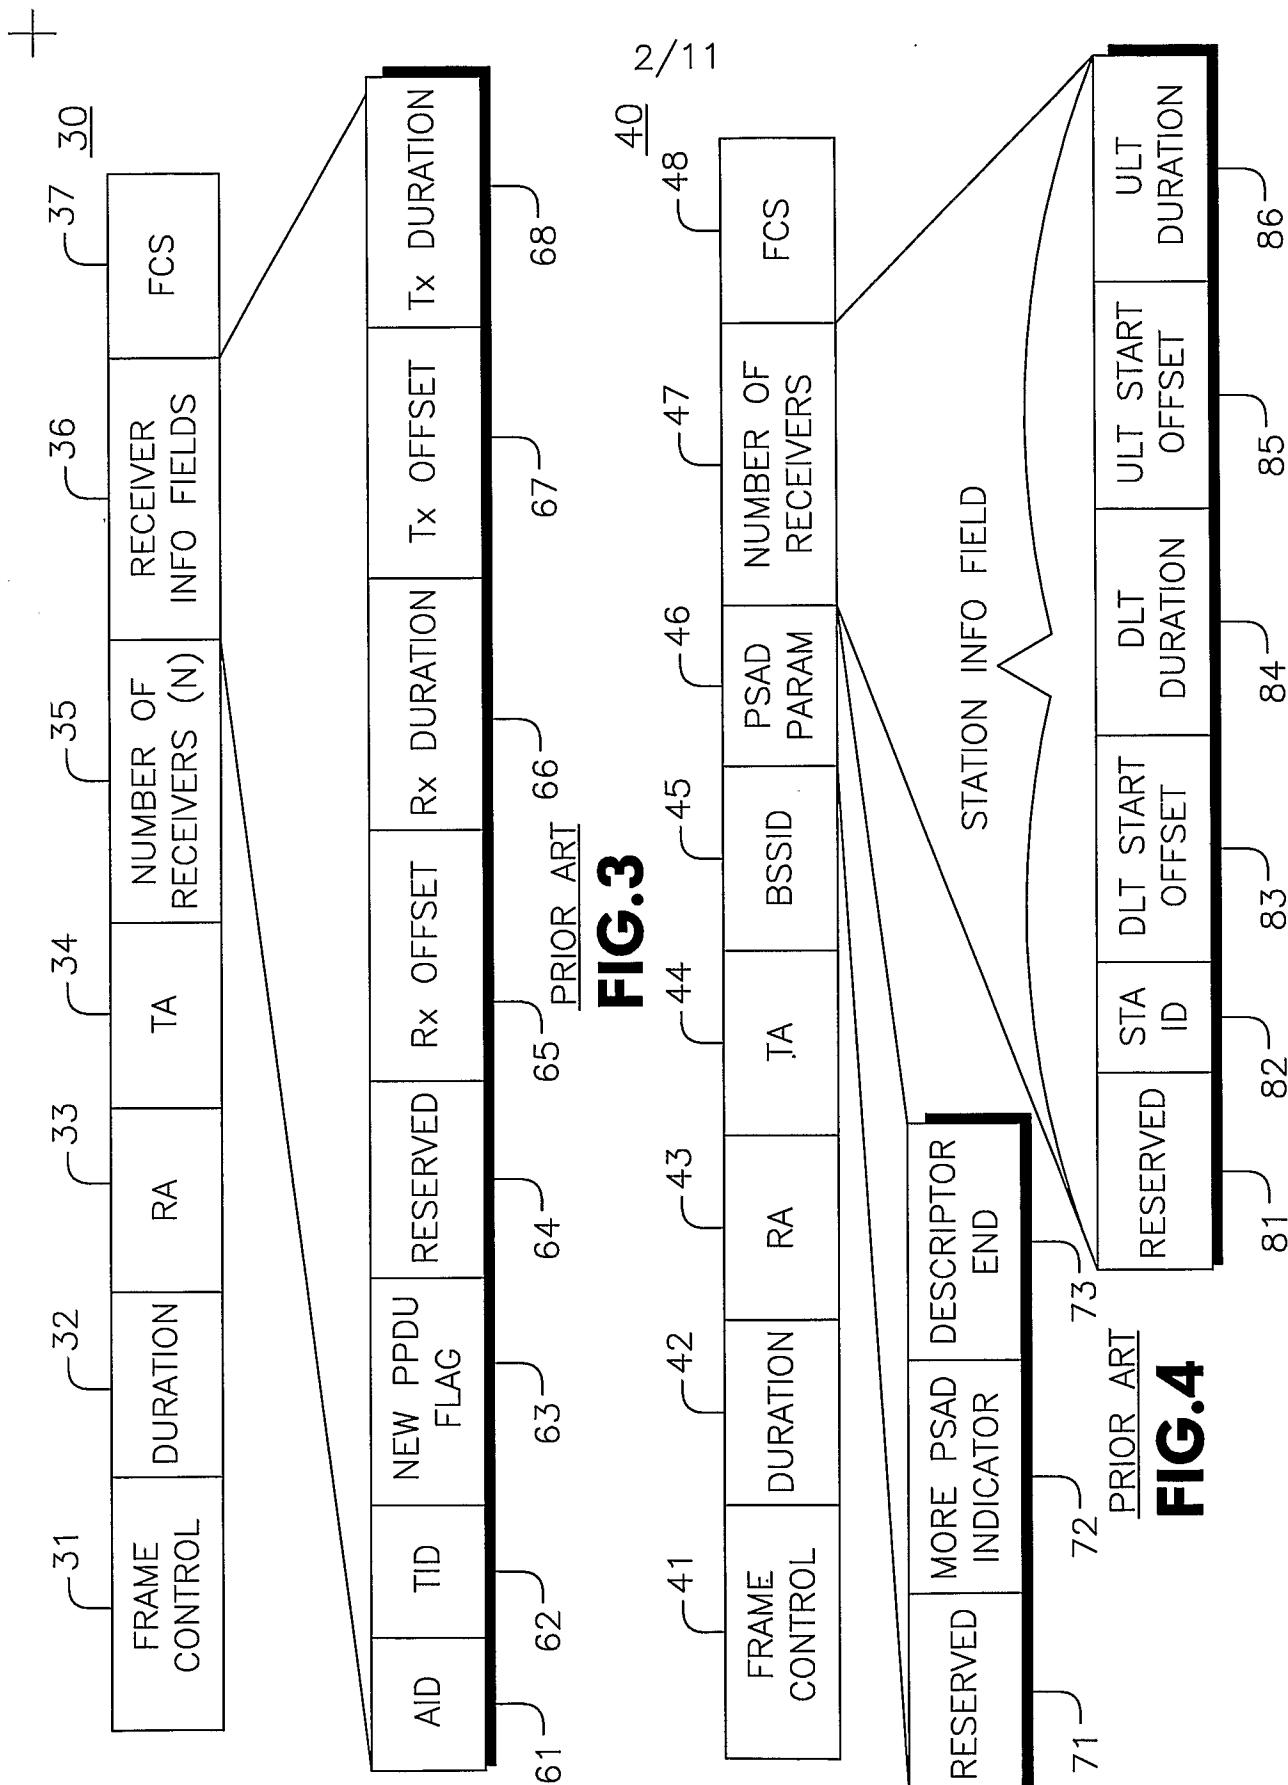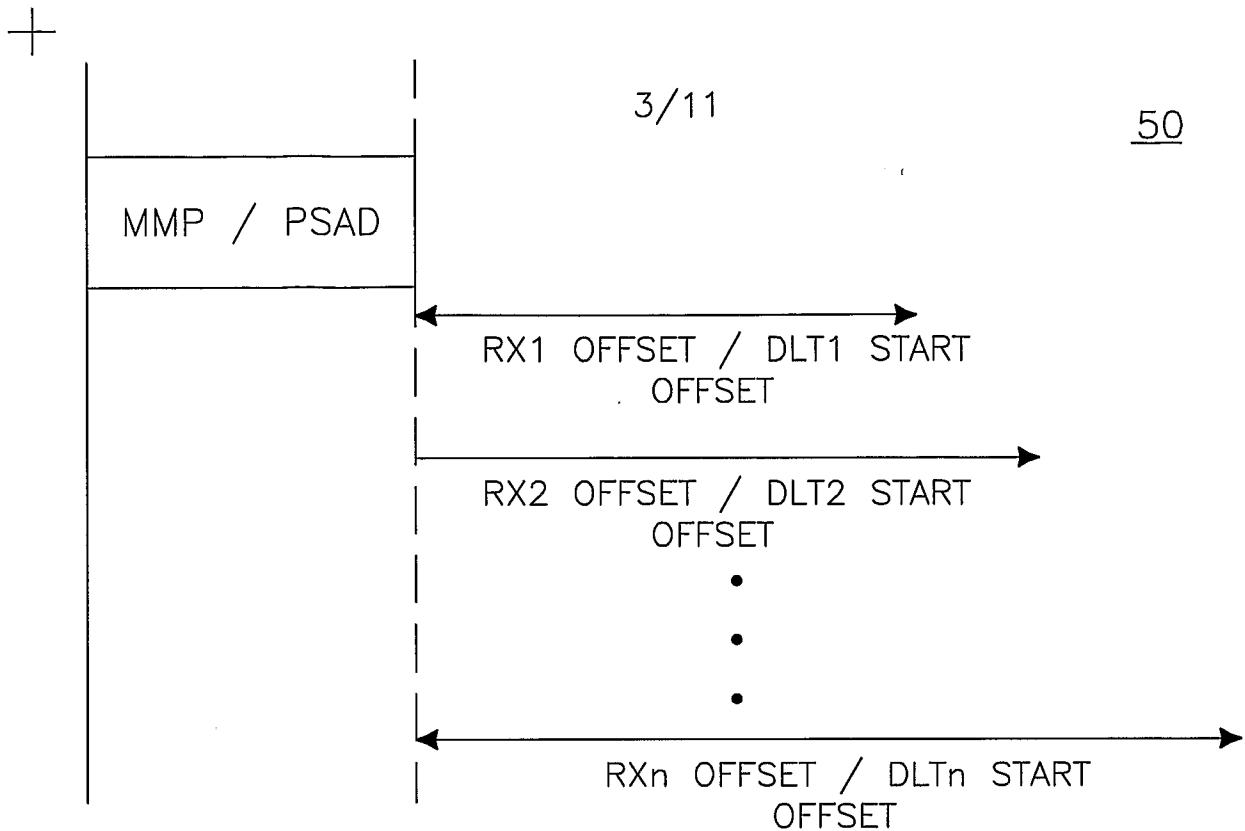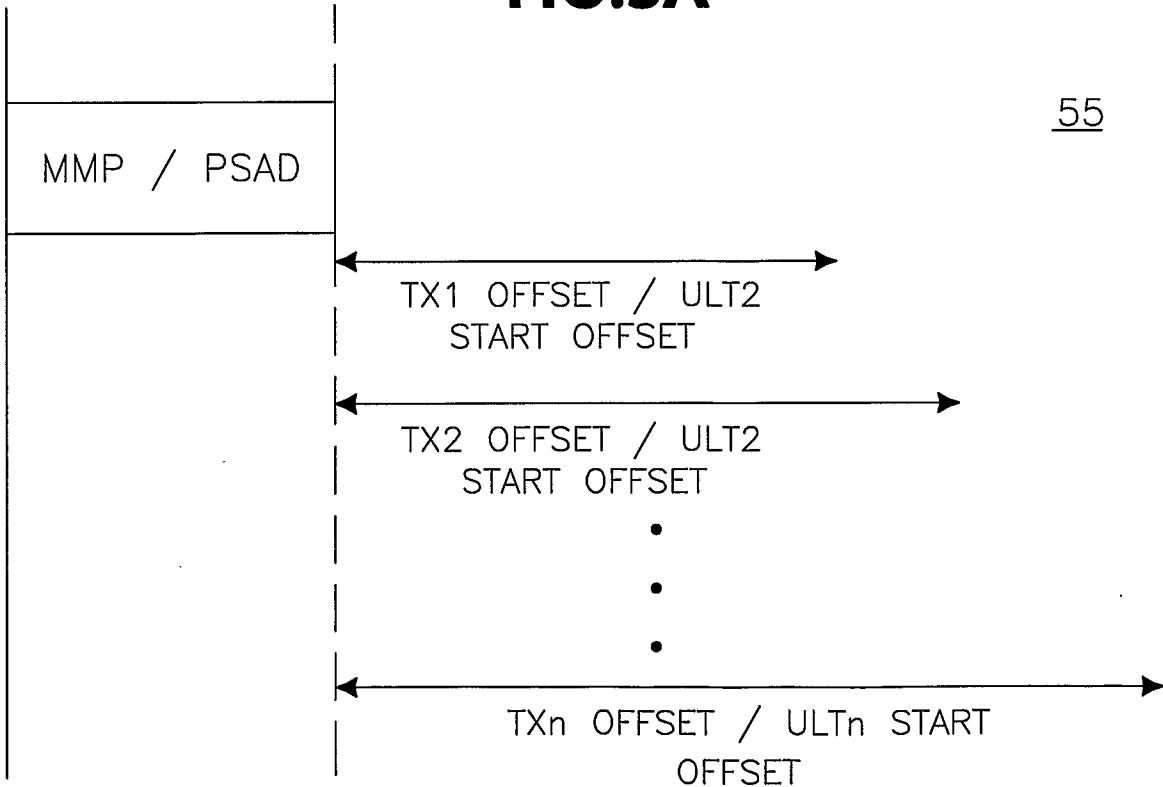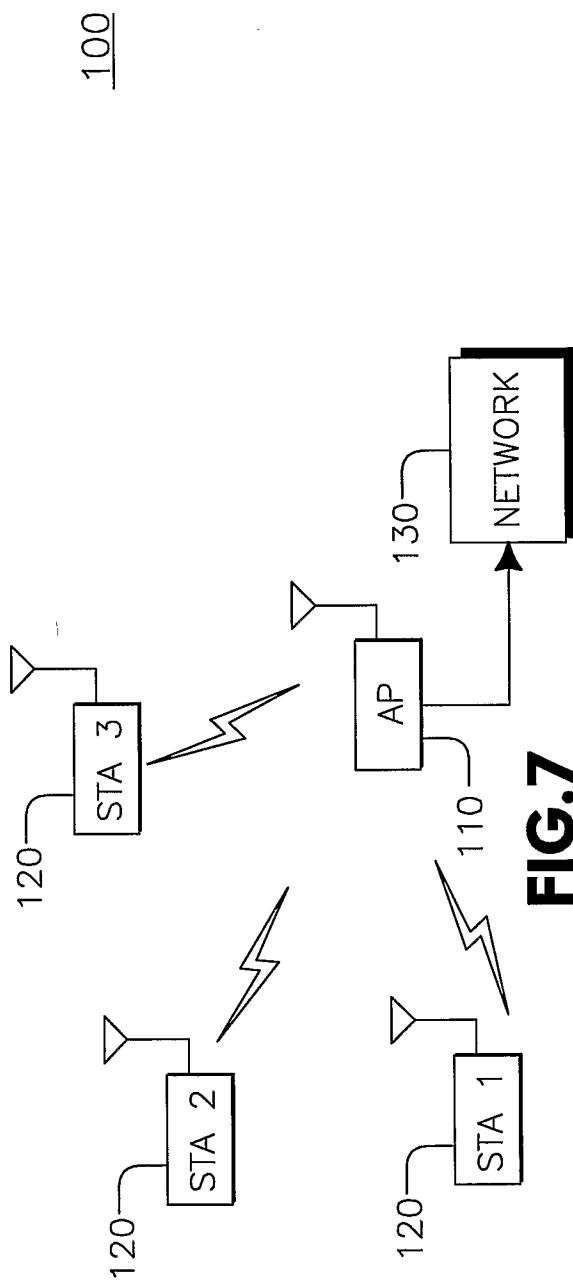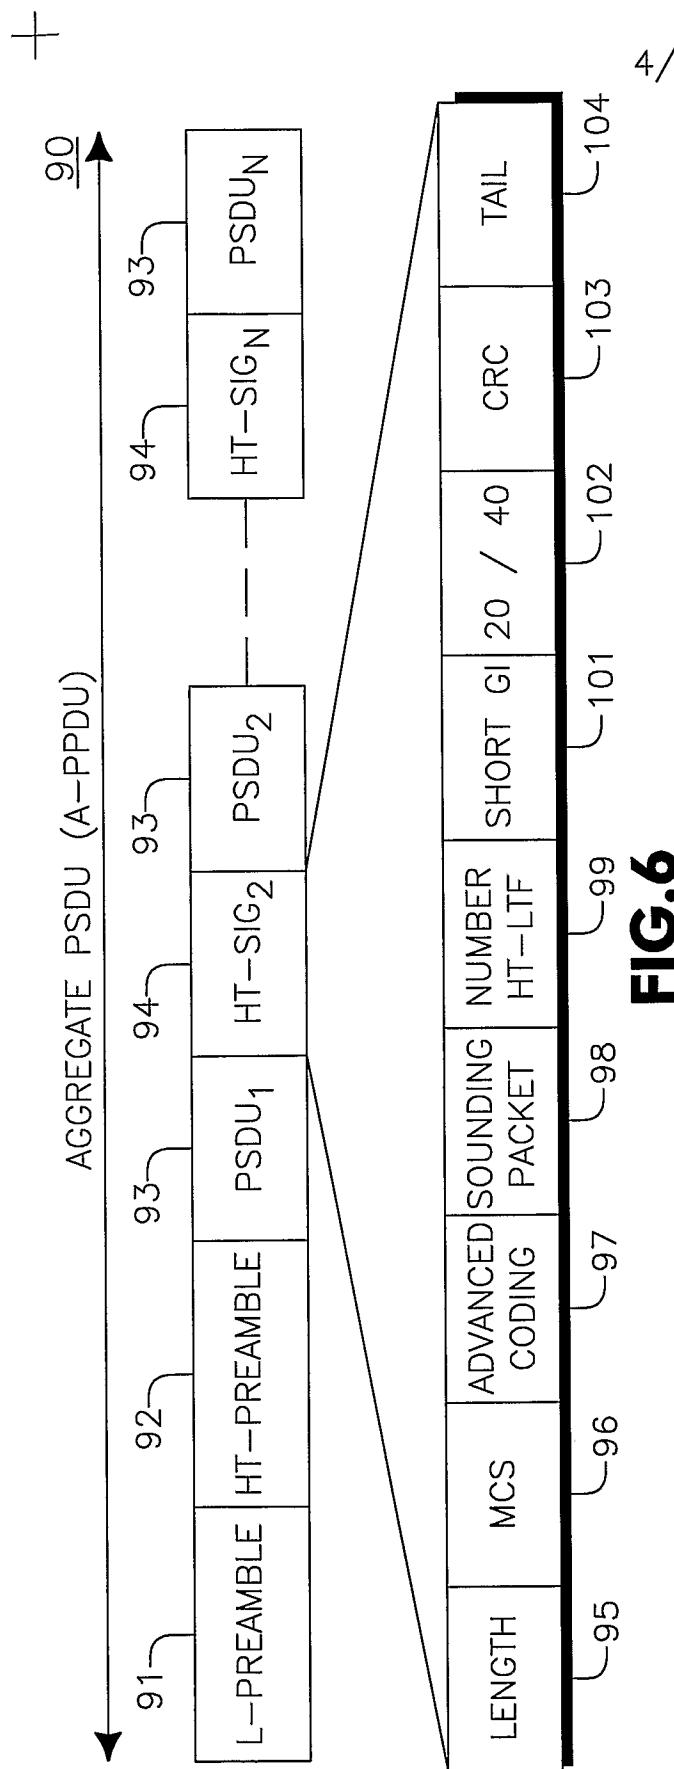

+

5/11

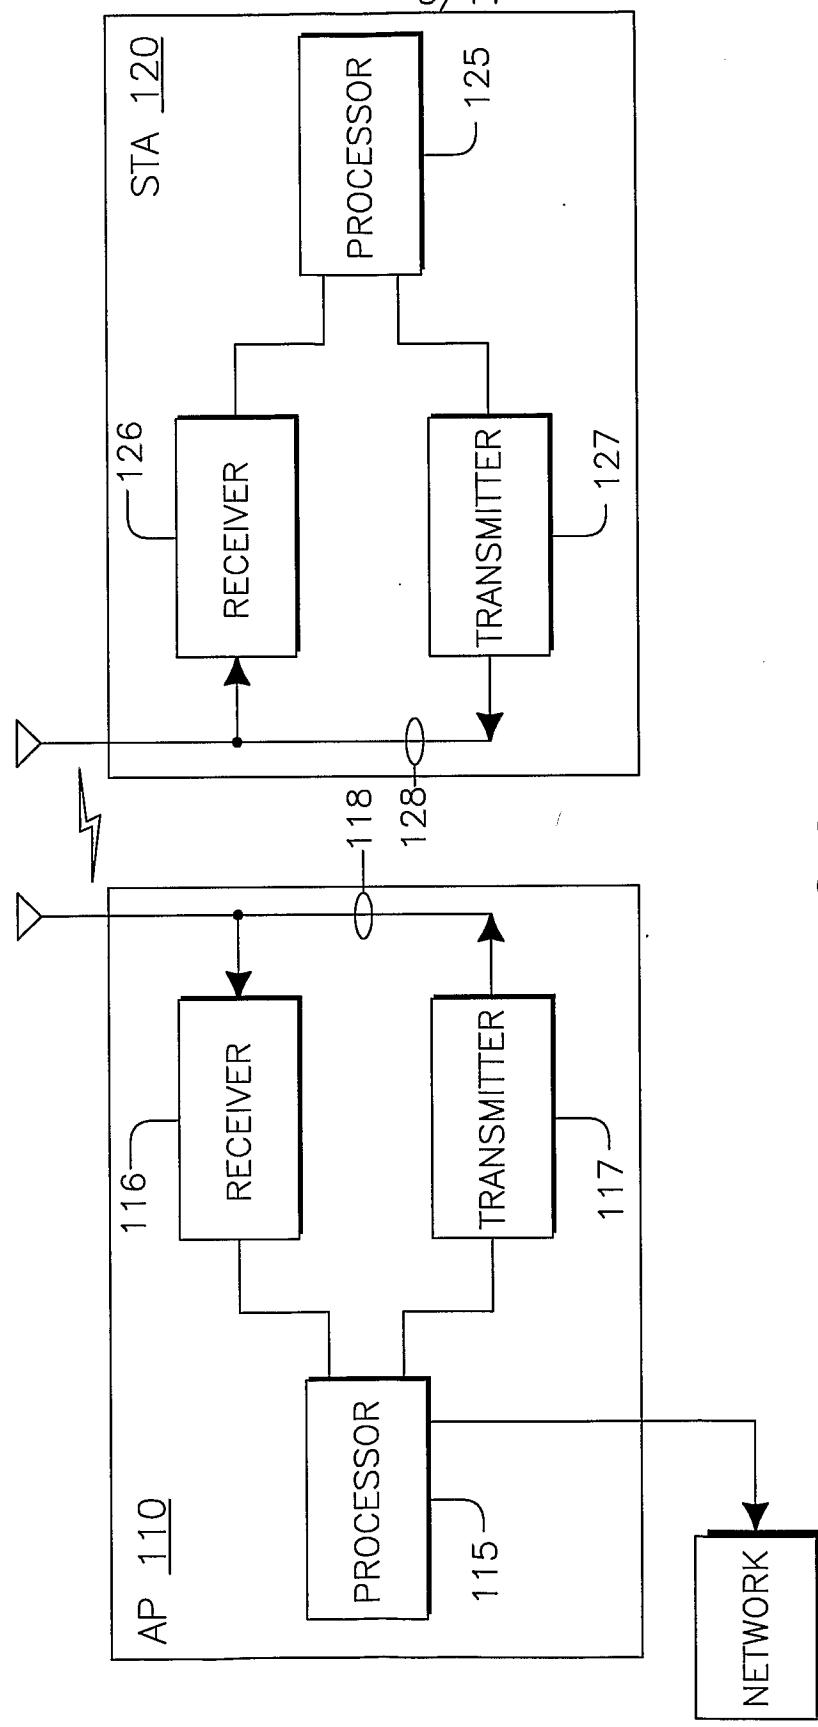
**FIG.8**

+

+

6/11


900

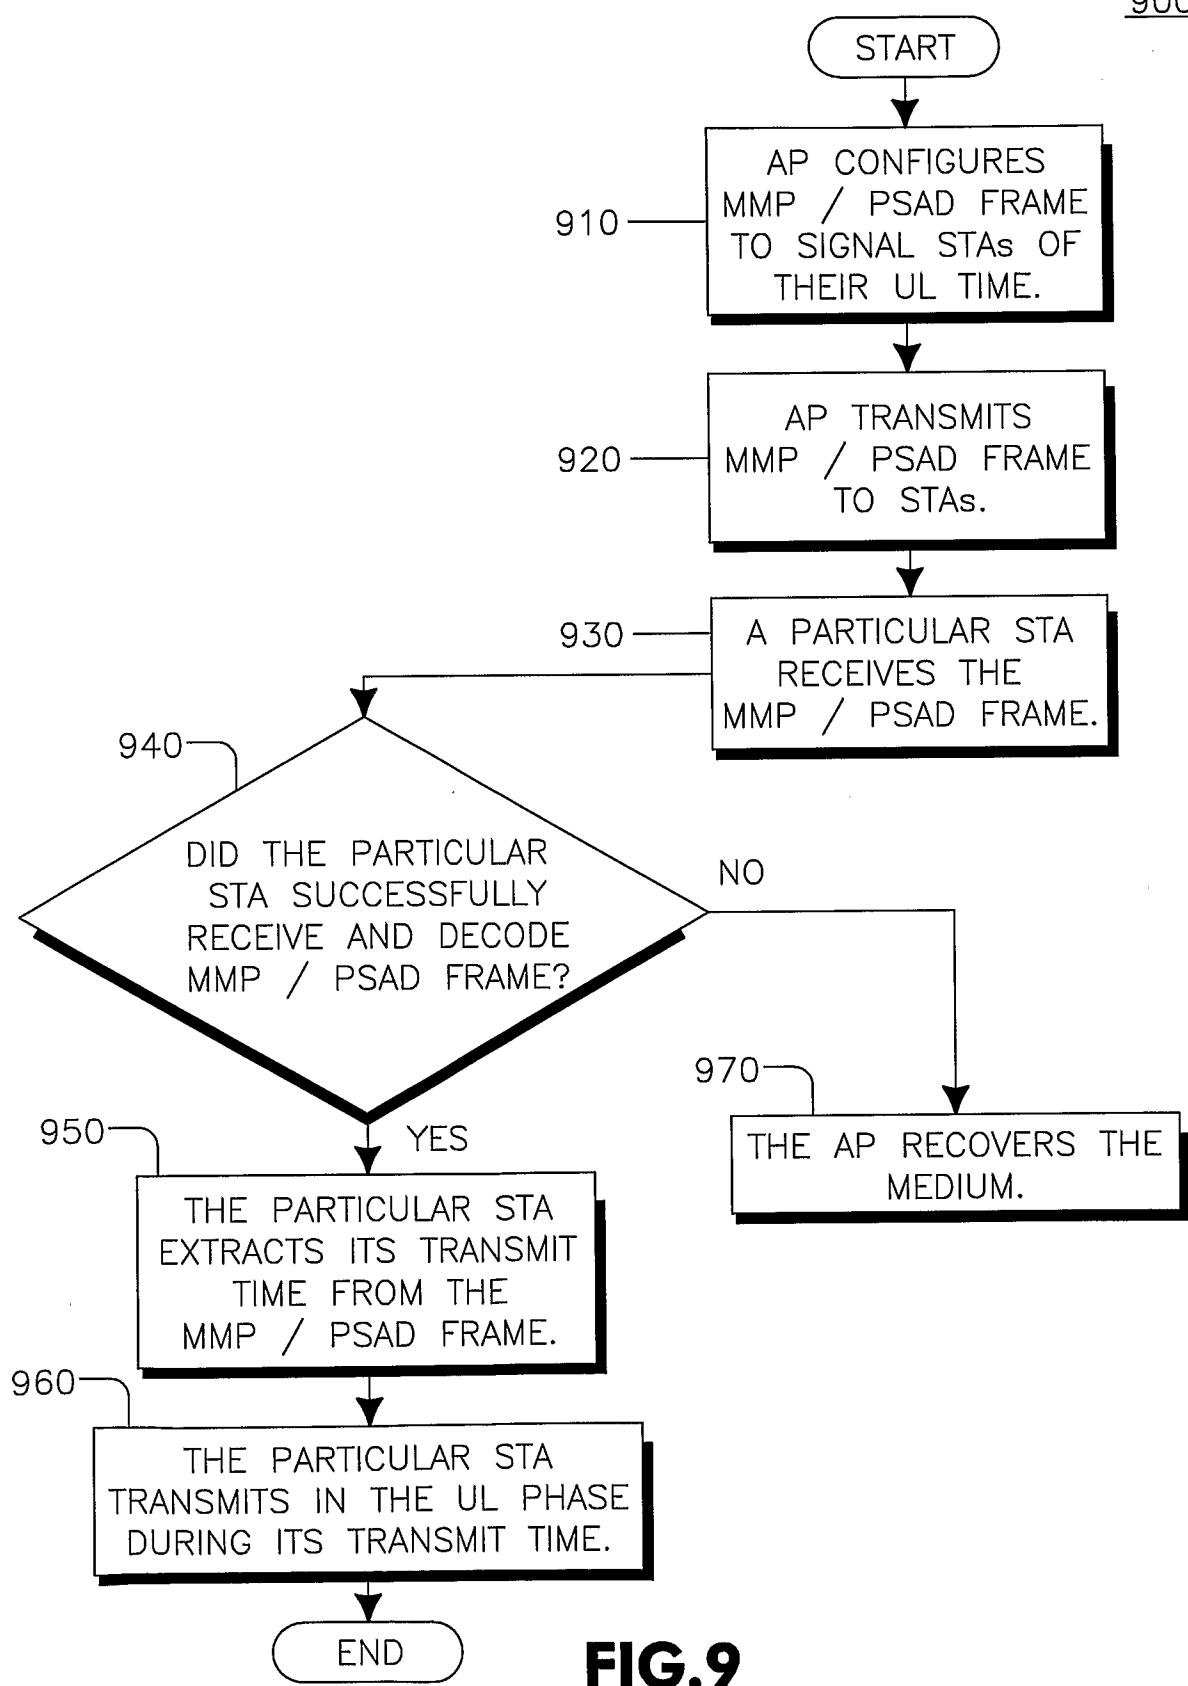**FIG.9**

+

+


7/11

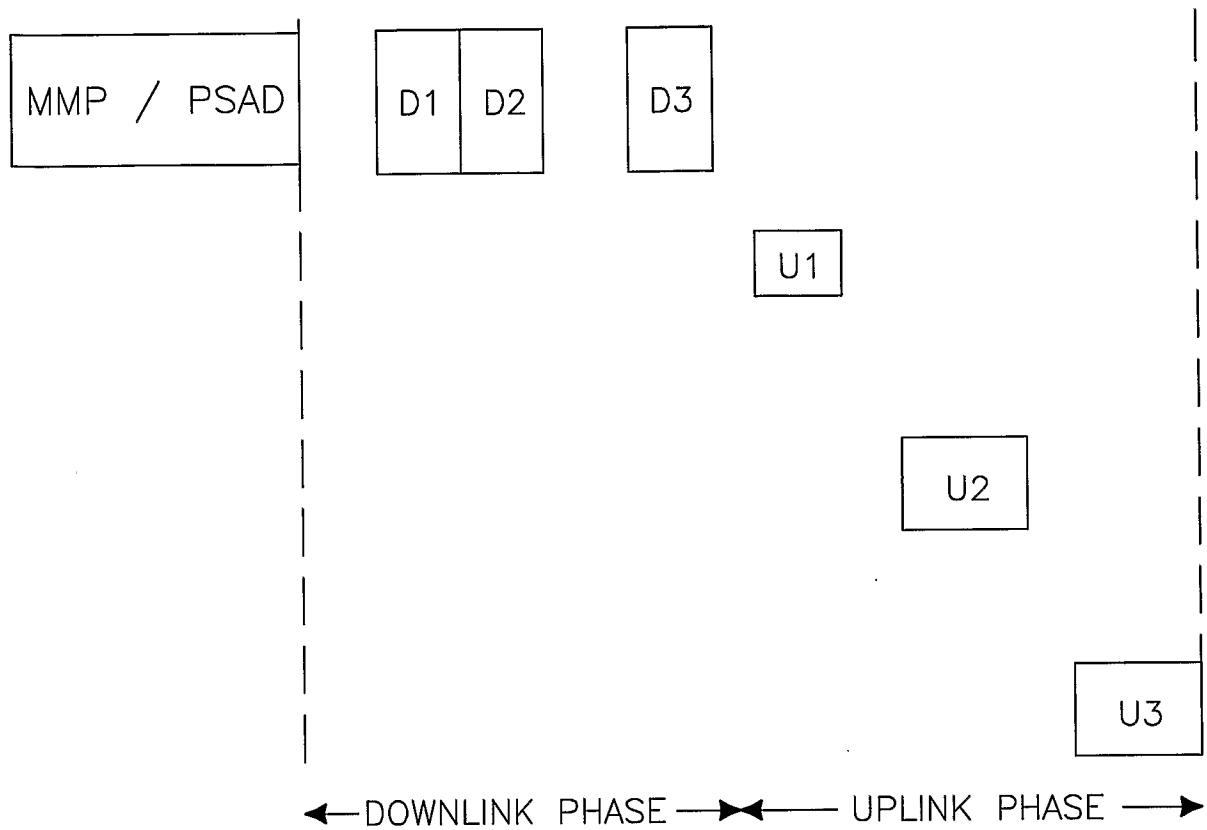101**FIG.10**

+

+

8/11

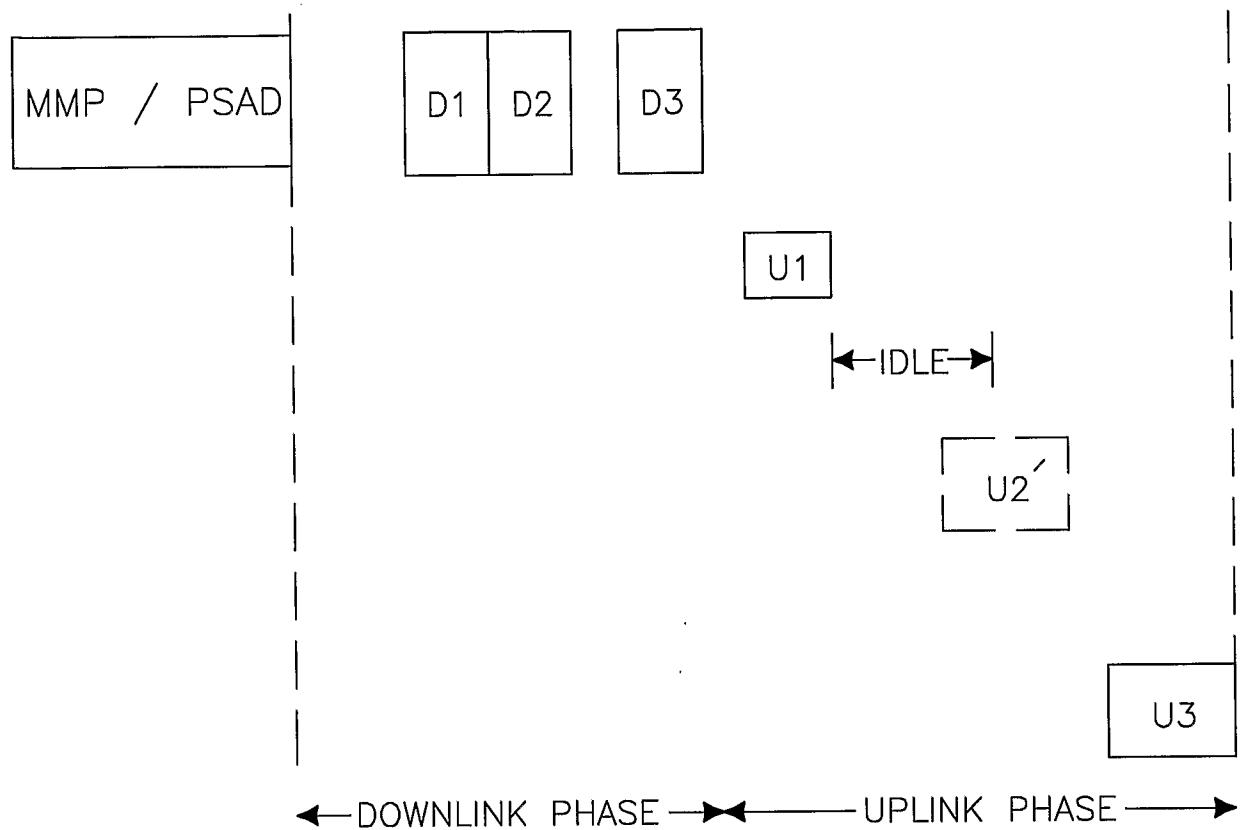101**FIG.11**

+

970

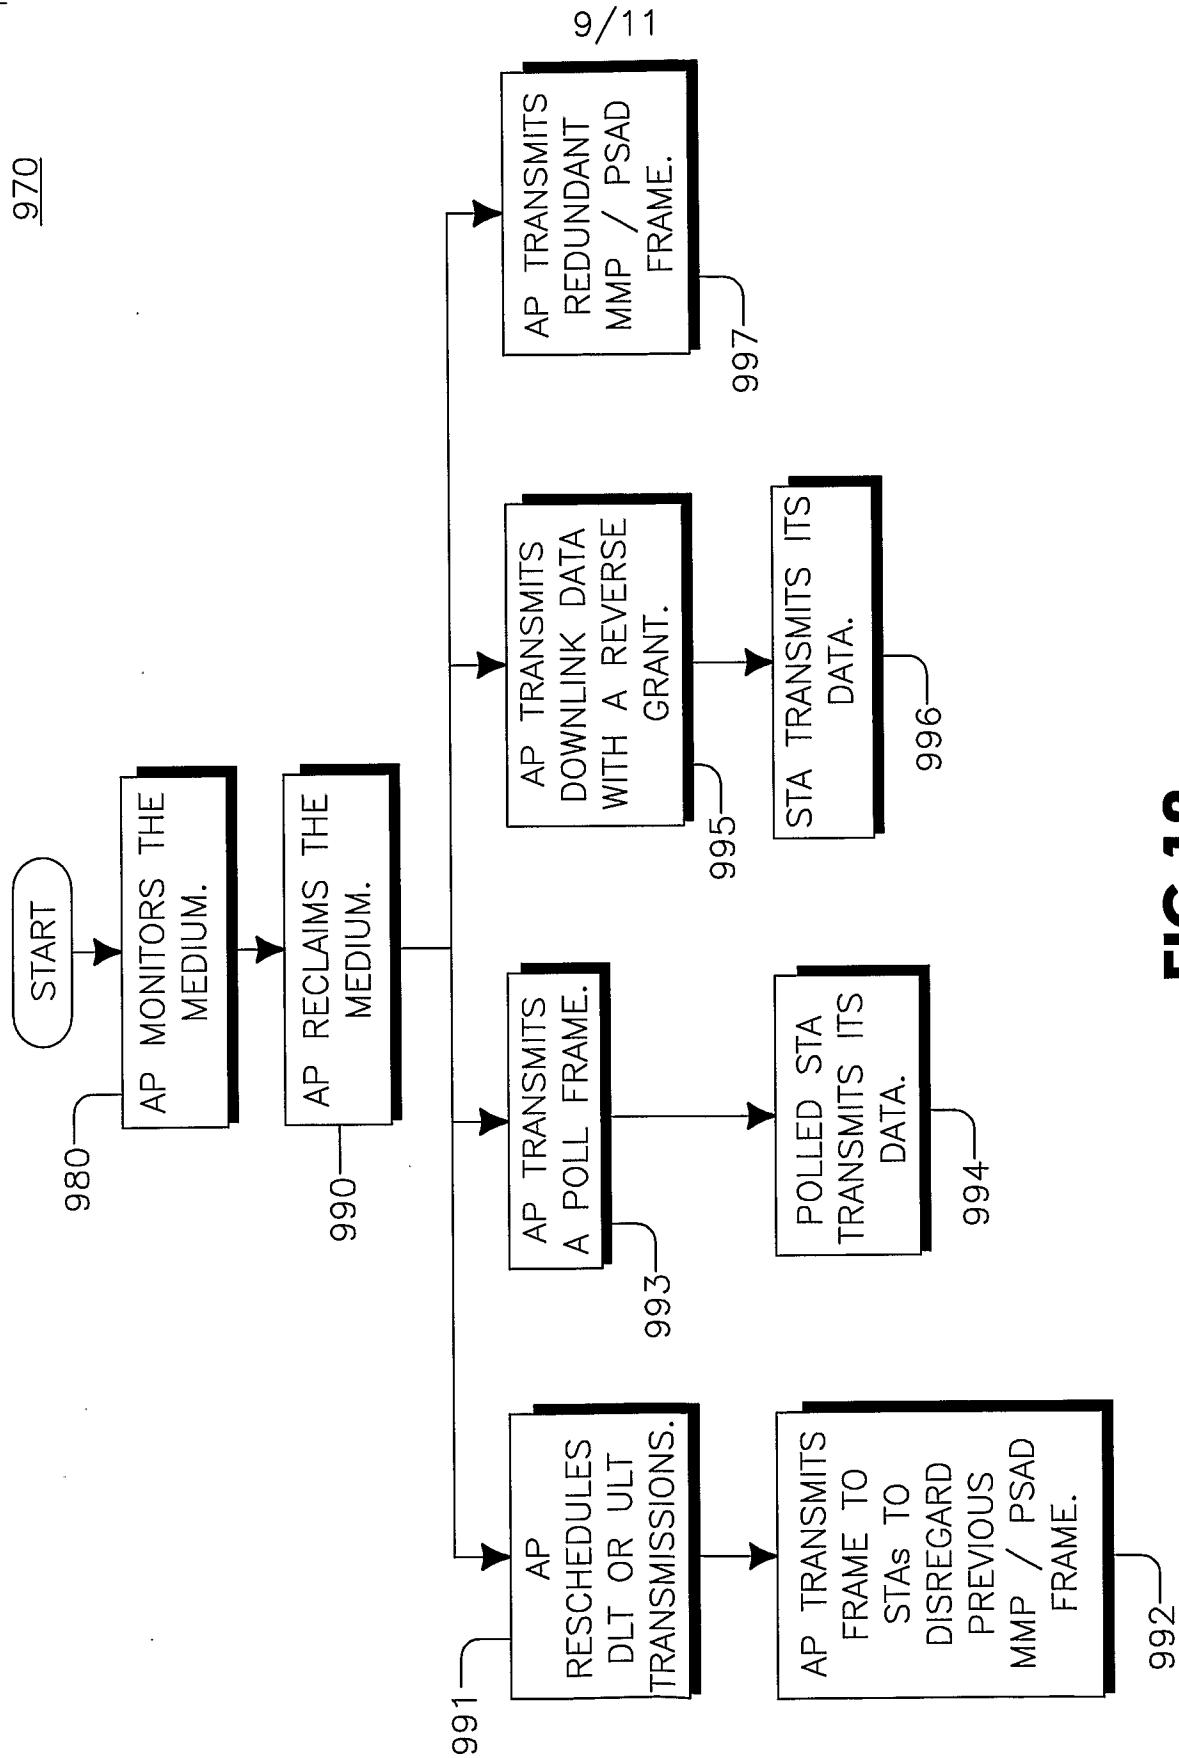
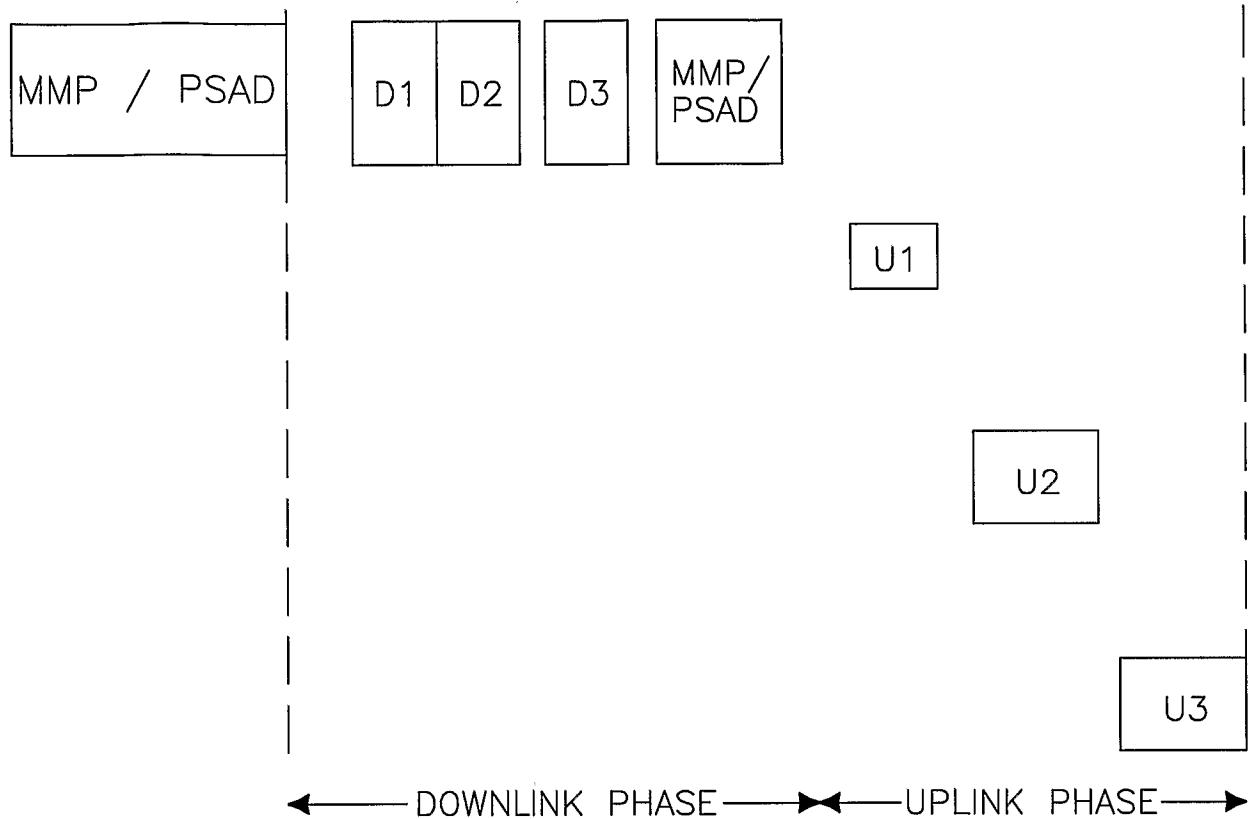


FIG.12

+

+


10/11

131**FIG.13**

+

T

11/11

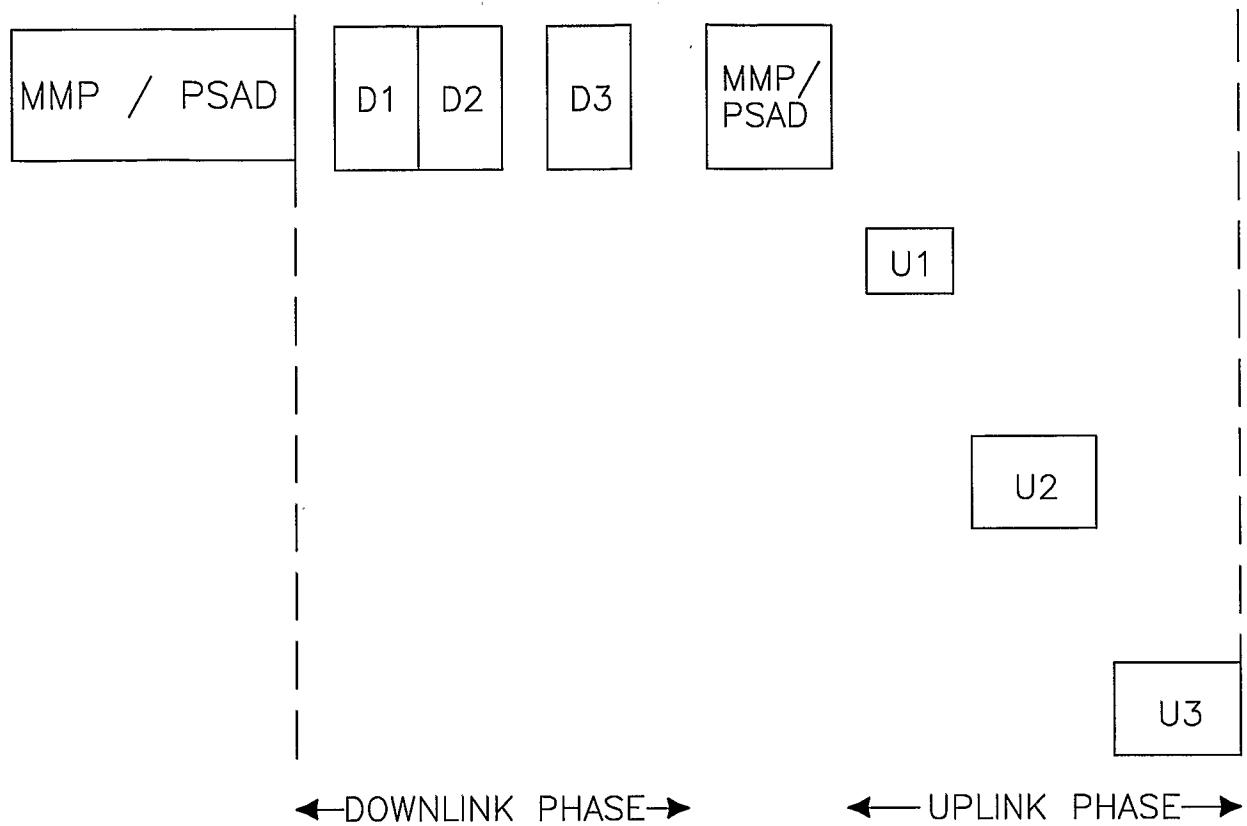141**FIG.14**

+