

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number

WO 2017/207700 A1

(43) International Publication Date
07 December 2017 (07.12.2017)

(51) International Patent Classification:

G01R 33/48 (2006.01) *G01R 33/565* (2006.01)
G01R 33/561 (2006.01)

(21) International Application Number:

PCT/EP2017/063326

(22) International Filing Date:

01 June 2017 (01.06.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

16172658.3 02 June 2016 (02.06.2016) EP

(71) Applicant: **KONINKLIJKE PHILIPS N.V.** [NL/NL];
High Tech Campus 5, 5656 AE Eindhoven (NL).

(72) Inventor: **EGGERS, Holger**; High Tech Campus 5, 5656
AE Eindhoven (NL).

(74) Agent: **COHEN, Julius, Simon** et al.; Philips International
B.V. – Intellectual Property & Standards High Tech Cam-
pus 5, 5656 AE Eindhoven (NL).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

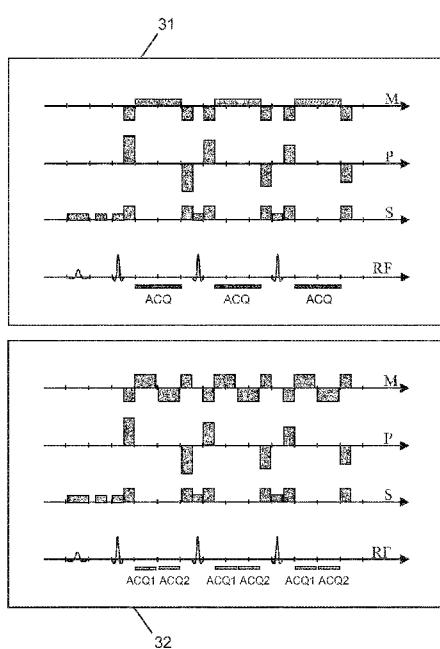
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR,
KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

(54) Title: DIXON-TYPE WATER/FAT SEPARATION MR IMAGING



(57) Abstract: The invention relates to a method of Dixon-type MR imaging. The method comprises the steps of: - subjecting the object (10) to a first imaging sequence (31) comprising a series of refocusing RF pulses, wherein a single echo signal is generated in each time interval between two consecutive refocusing RF pulses, - acquiring the echo signals from the object (10) at a first receive bandwidth using unipolar readout magnetic field gradients, - subjecting the object (10) to a second imaging sequence (32), which comprises a series of refocusing RF pulses, wherein a pair of echo signals is generated in each time interval between two consecutive refocusing RF pulses, - acquiring the pairs of echo signals from the object (10) at a second receive bandwidth using bipolar readout magnetic field gradients, wherein the second receive bandwidth is higher than the first receive bandwidth, and - reconstructing a MR image from the acquired echo signals, whereby signal contributions from water protons and fat protons are separated. Moreover the invention relates to a MR device (1) and to a computer program to be run on a MR device (1).

Fig. 3

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

DIXON-TYPE WATER/FAT SEPARATION MR IMAGING

FIELD OF THE INVENTION

The invention relates to the field of magnetic resonance (MR) imaging. It concerns a method of MR imaging of a portion of a body placed in the examination volume of a MR device. The invention also relates to a MR device and to a computer program to be 5 run on a MR device.

BACKGROUND OF THE INVENTION

Image-forming MR methods which utilize the interaction between magnetic fields and nuclear spins in order to form two-dimensional or three-dimensional images are 10 widely used nowadays, notably in the field of medical diagnostics, because for the imaging of soft tissue they are superior to other imaging methods in many respects, do not require ionizing radiation and are usually not invasive.

According to the MR method in general, the body of the patient to be examined is arranged in a strong, uniform magnetic field B_0 whose direction at the same time 15 defines an axis (normally the z-axis) of the co-ordinate system on which the measurement is based. The magnetic field B_0 produces different energy levels for the individual nuclear spins in dependence on the magnetic field strength which can be excited (spin resonance) by application of an electromagnetic alternating field (RF field) of defined frequency (so-called Larmor frequency, or MR frequency). From a macroscopic point of view the distribution of 20 the individual nuclear spins produces an overall magnetization which can be deflected out of the state of equilibrium by application of an electromagnetic pulse of appropriate frequency (RF pulse) perpendicular to the z-axis, so that the magnetization performs a precessional motion about the z-axis. The precessional motion describes a surface of a cone whose angle of aperture is referred to as flip angle. The magnitude of the flip angle is dependent on the 25 strength and the duration of the applied electromagnetic pulse. In the case of a so-called 90° pulse, the spins are deflected from the z-axis to the transverse plane (flip angle 90°).

After termination of the RF pulse, the magnetization relaxes back to the original state of equilibrium, in which the magnetization in the z direction is built up again with a first time constant T_1 (spin-lattice or longitudinal relaxation time), and the

magnetization in the direction perpendicular to the z direction relaxes with a second time constant T_2 (spin-spin or transverse relaxation time). The variation of the magnetization can be detected by means of receiving RF coils which are arranged and oriented within an examination volume of the MR device in such a manner that the variation of the

5 magnetization is measured in the direction perpendicular to the z-axis. The decay of the transverse magnetization is accompanied, after application of, for example, a 90° pulse, by a transition of the nuclear spins (induced by local magnetic field inhomogeneities) from an ordered state with the same phase to a state in which all phase angles are uniformly distributed (dephasing). The dephasing can be compensated by means of a refocusing pulse

10 (for example a 180° pulse). This produces an echo signal in the receiving coils.

In order to realize spatial resolution in the body, constant magnetic field gradients extending along the three main axes are superposed on the uniform magnetic field B_0 , leading to a linear spatial dependency of the spin resonance frequency. The signal picked up in the receiving coils then contains components of different frequencies which can be 15 associated with different locations in the body. The signal data obtained via the receiving coils correspond to the spatial frequency domain and are called k-space data. The k-space data usually include multiple lines acquired with different phase encoding. Each k-space line is digitized by collecting a number of samples. A set of k-space data is converted to an MR image, e.g., by means of Fourier transformation.

20 In MR imaging, it is often desired to obtain information about the relative contribution of water and fat to the overall signal, either to suppress the contribution of one of them or to separately or jointly analyze the contribution of both of them. These contributions can be calculated if information from two or more corresponding echoes, acquired at different echo times, is combined. This may be considered as chemical shift

25 encoding, in which an additional dimension, the chemical shift dimension, is defined and encoded by acquiring two or more MR images at slightly different echo times. For water-fat separation, these types of experiments are often referred to as Dixon-type of measurements.

By means of Dixon MR imaging or Dixon water/fat MR imaging, a water-fat separation is achieved by calculating contributions of water and fat from two or more corresponding

30 echoes, acquired at different echo times. In general such a separation is possible because there is a known precessional frequency difference of hydrogen in fat and water. In its simplest form, water and fat images are generated by either addition or subtraction of the 'in-phase' and 'out-of-phase' datasets.

Several Dixon-type MR imaging methods have been proposed in recent years. Apart from different strategies for the water/fat separation, the known techniques are mainly characterized by the specific number of echoes (or ‘points’) they acquire and by the constraints that they impose on the used echo times. Conventional so-called two- and three-
5 point methods require in-phase and opposed-phase echo times at which the water and fat signals are parallel and antiparallel in the complex plane, respectively. Three-point methods have gradually been generalized to allow flexible echo times. Thus, they do not restrict the angle or phase between the water and fat signals at the echo times to certain values anymore.
10 In this way, they provide more freedom in imaging sequence design and enable in particular a trade-off between signal-to-noise ratio (SNR) gains from the acquisition and SNR losses in the separation. Sampling only two instead of three echoes is desirable to reduce scan time. However, constraints on the echo times may actually render dual-echo acquisitions slower than triple-echo acquisitions. Eggers et al. (Magnetic Resonance in Medicine, 65, 96-107, 2011) have proposed a dual-echo flexible Dixon-type MR imaging method which enables the
15 elimination of such constraints. Using such Dixon-type MR imaging methods with more flexible echo times, in-phase and opposed-phase images are no longer necessarily acquired, but optionally synthesized from water and fat images.

Dixon-type MR imaging methods are often applied in combination with fast (turbo) spin echo sequences using multiple repetition or multiple acquisition approaches.
20 Typically, two or three interleaved measurements with shifted readout magnetic field gradients and acquisition windows are employed. In Figure 2, a schematic pulse sequence diagram of a conventional turbo spin echo (TSE) Dixon sequence is depicted. The diagram shows switched magnetic field gradients in the frequency-encoding direction (M), the phase-encoding direction (P) and the slice-selection direction (S). Moreover, the diagram shows RF
25 excitation and refocusing pulses as well as the time intervals during which echo signals are acquired, designated by ACQ. The diagram covers the acquisition of the first three echo signals of one shot of the imaging sequence. The double arrows indicate the shifting of the readout magnetic field gradients (top) and the acquisition windows ACQ (bottom) between multiple repetitions of one shot with identical phase encoding. According to the shifting of the readout magnetic field gradients, different phase offsets of the signal contributions from water protons and fat protons, respectively, are obtained on which the Dixon-type water/fat
30 separation is based.

A drawback of the conventional approach is that, in comparison to standard (non-Dixon) TSE sequences, a higher receive bandwidth is required for a given echo spacing

in Dixon TSE sequences. This results in a significantly reduced SNR. This may be avoided by employing a larger echo spacing. However, longer or more echo trains are required in this case. This results in less coverage and more blurring in the reconstructed MR images, or in longer scan times. Furthermore, FID artifacts may be a problem with the conventional

5 approach. A cancellation of FID artifacts by averaging of two acquisitions with opposite phases of the refocusing RF pulses is usually impracticable since it would require doubling (once more) the number of acquisitions and thus increase scan times even further.

The US patent application **US2016/0033605** concerns a multi-spin-echo acquisitions in which bipolar gradient pulses are employed to form echo-pairs between refocusing RF

10 pulses.

From the foregoing it is readily appreciated that there is a need for an improved technique for Dixon-type MR imaging. It is consequently an object of the invention to provide a method that enables efficient Dixon water/fat separation in combination with a TSE acquisition.

15

SUMMARY OF THE INVENTION

In accordance with the invention, a method of MR imaging of an object placed in an examination volume of a MR device is disclosed. The method comprises the following steps:

20 - subjecting the object to a first imaging sequence comprising a series of refocusing RF pulses, wherein a single echo signal is generated in each time interval between two consecutive refocusing RF pulses,

- acquiring the echo signals from the object at a first receive bandwidth using unipolar readout magnetic field gradients,

25 - subjecting the object to a second imaging sequence, which comprises a series of refocusing RF pulses, wherein a pair of echo signals is generated in each time interval between two consecutive refocusing RF pulses,

- acquiring the pairs of echo signals from the object at a second receive bandwidth using bipolar readout magnetic field gradients, wherein the second receive

30 bandwidth is higher than the first receive bandwidth, and

- reconstructing a MR image from the acquired echo signals, whereby signal contributions from water protons and fat protons are separated.

According to the invention, two separate TSE sequences, the first and second imaging sequences, are used to acquire the single echo signals and the pairs of echo signals

respectively. The timing of the bipolar readout gradients in the second imaging sequence is chosen to shift the acquisition windows of the echo signals such that appropriate phase offsets of the signal contributions from water protons and fat protons are provided on which the Dixon-type separation of these signal contributions is based in the reconstruction step.

5 The bipolar readout magnetic field gradients applied in the second imaging sequence are preferably stronger than the unipolar readout magnetic field gradients of the first imaging sequence, wherein each pair of echo signals is acquired using a corresponding pair of temporally adjoining readout magnetic field gradients having opposed polarities. It can thus be achieved that the duration of each dual-echo readout is essentially the same as
10 that of the single-echo readout of the first acquisition.

More specifically, the echo signals generated by the first imaging sequence are acquired using the unipolar readout magnetic field gradients having a first gradient strength, and the pairs of echo signals generated by the second imaging sequence are acquired using the bipolar readout magnetic field gradient having a second gradient strength which is larger
15 than the first gradient strength. Simultaneously, the first echo signals are acquired using a signal receiving bandwidth which is smaller than the signal receiving bandwidth used for the acquisition of the second echo signals. The whole acquisition is thus split up into two, usually interleaved sub-acquisitions, performed with a low-bandwidth sub-sequence (the first imaging sequence) and a high-bandwidth sub-sequence (the second imaging sequence),
20 respectively. In the low-bandwidth sub-sequence, a high signal sampling efficiency is achieved by sampling the first echo signals during most of the interspacing between the refocusing RF pulses. This low-bandwidth and high sampling efficiency yields a high SNR. The first imaging sequence with its single-echo readout is actually the same as a standard TSE sequence and thus provides the same sampling efficiency. The second imaging sequence
25 achieves only a lower sampling efficiency and provides a lower SNR per echo, since it has to cover the same gradient integral in about half the time. However, by sampling a pair of echo signals, it achieves a similar, high sampling efficiency and SNR as the first imaging sequence.

30 The MR image reconstructed from the echo signals acquired according to the invention benefits from the higher sampling efficiency and higher SNR of both imaging sequences. This applies to a reconstructed in-phase MR image (including both water and fat signal contributions as a conventional spin echo image) as well as to a water (or fat-suppressed) MR image.

It is the gist of the invention, in other words, to achieve efficient TSE Dixon imaging by combining a unipolar single-echo readout at a low receive bandwidth (first acquisition) with a bipolar dual-echo readout at a high bandwidth (second acquisition) to maximize the SNR.

5 In a preferred embodiment of the invention, each acquired pair of echo signals generated by the second imaging sequence is combined into a virtual echo signal, wherein signal contributions from water protons and fat protons are separated by a two-point Dixon technique using the echo signals generated by the first imaging sequence and the virtual echo signals. The SNR of a single-echo image reconstructed from the unipolar single-echo readout
10 according to the invention is (ideally) by a square root of two higher than that in two single-echo images reconstructed from the bipolar dual-echo readout. Since the shifts of the two echo signals of the bipolar dual-echo readout are equal, except for the sign, the corresponding single-echo images can, after a suitable phase correction, be averaged to obtain a single-echo image with the same SNR as the single-echo image reconstructed from the unipolar single-echo readout.
15 This still applies if only two partial echo signals are acquired in the bipolar dual-echo readout (to achieve favorable echo shifts at a particular field strength, e.g., or to accommodate constraints on the readout magnetic field gradient strength and slew rate imposed by the used MR apparatus). This then allows employing conventional two-point Dixon methods for the water/fat separation.

20 Alternatively, signal contributions from water protons and fat protons may be separated directly by a three-point Dixon technique using the three corresponding echo signals generated by the first and second imaging sequences.

25 The afore-described concept of virtual echoes combined from a bipolar dual-echo readout can advantageously be applied also in combination with a one-point Dixon method for water/fat separation. In this case the first imaging sequence can be dispensed with. In this embodiment, the method of the invention comprises the following steps:

- subjecting the object to an imaging sequence, which comprises a series of refocusing RF pulses, wherein a pair of echo signals is generated in each time interval between two consecutive refocusing RF pulses,
- 30 - acquiring the pairs of echo signals from the object using bipolar readout magnetic field gradients, and
- reconstructing a MR image from the acquired echo signals, wherein each pair of echo signals is combined into a virtual echo signal, wherein signal contributions from water protons and fat protons are separated by a one-point Dixon technique using the virtual

echo signals. This variant may be applied in combination with any other feature of the method of the invention disclosed herein, in particular regarding the concept of FID artifact suppression described below. The single-point method has basically the same advantages as discussed above (high SNR, good sampling efficiency). However, it relates only to single-
5 echo instead of dual-echo Dixon imaging.

In more detail, the virtual echo signals may be computed as phasor weighted averages of the echo signals of each pair of echo signals. The voxel values in the three single-echo MR images $S_1 - S_3$ can be modeled by

$$S_1 = (W + c^*F) P_0 P^* P_1,$$

10 $S_2 = (W + F) P_0 P_2,$

$$S_3 = (W + c F) P_0 P P_3,$$

with W and F being the magnitude of the water and fat signal, c being the complex weighting factor describing the amplitude and phase variation of a pure fat signal relative to a pure water signal at the (positive) echo shift, P_0 being the phasor representation of the (initial) 15 phase at the spin echo, P being the phasor representation of the effect of main field inhomogeneity, and $P_1 - P_3$ being the phasor representations of the effect of eddy currents. Relaxation effects are neglected for the sake of simplicity.

If $P_1 - P_3$ are known from separate calibration measurements, they can be eliminated:

20 $S'_1 = (W + c^*F) P_0 P^*,$

$$S'_2 = (W + F) P_0,$$

$$S'_3 = (W + c F) P_0 P.$$

Setting

$$W' = W P_0,$$

25 $F' = F P_0,$

then leads to

$$S'_1 = (W' + c^*F') P^*,$$

$$S'_2 = (W' + F'),$$

$$S'_3 = (W' + c F') P,$$

30 which can be solved with existing complex-based three-point Dixon methods.

If $P_1 - P_3$ are unknown, existing magnitude-based three-point Dixon methods can be applied instead.

Alternatively, it is suggested to first combine S_1 and S_3 into a virtual S_{13} and then apply a two-point Dixon method to S_2 and S_{13} . This is motivated by the insight that S_1 and S_3 provide partially redundant information, since their amplitude is ideally equal.

For the sake of simplicity, it is temporarily assumed that the readout gradient strength for the measurements of S_1 and S_3 is twice that for the measurement of S_2 , and that the readout gradient polarity for the measurements of S_1 and S_2 is the same. Again for the sake of simplicity, it is then assumed that

$$P_1 = P_2^2,$$

$$P_3 = P_2^{*2},$$

which leads to

$$S_1 = (W + c^*F) P_0 P^* P_2^2,$$

$$S_2 = (W + F) P_0 P_2,$$

$$S_3 = (W + c F) P_0 P P_2^{*2},$$

and

$$S_3^* = (W + c^*F) P_0^* P^* P_2^2.$$

From S_1 and S_3^* , P_0^2 can be derived. Since it is expected to be spatially smooth, it can be filtered to reduce noise. S_{13} is then obtained by

$$S_{13} = S_1 + S_3^* P_0^2,$$

for example. Optionally, P_2 can be derived from S_2 , and S_{13} can be multiplied with P_2^* .

Without the assumed relations between $P_1 - P_3$, $P_0^2 P_1 P_3$ instead of P_0^2 can be derived from S_1 and S_3^* , and S_{13} is then obtained by

$$S_{13} = S_1 + S_3^* P_0^2 P_1 P_3, \text{ for example.}$$

Alternatively, it is suggested to apply a single-point Dixon method to S_{13} .

Flow compensation may be applied in accordance with the method of the invention by means of gradient moment nulling. In the first imaging sequence, like in a conventional TSE sequence, the zeroth moment of the readout magnetic field gradient is usually zero both at the echo time of the single echo signal and at the time of the subsequent refocusing RF pulse, while the first moment is only zero at the latter. For the phase encoding magnetic field gradient, only the zeroth moment is zero at the respective subsequent refocusing pulse. For the slice selection gradient, the typically applied magnetic field gradients for spoiling for FID artifact reduction prevent any flow compensation.

In the second imaging sequence, only the readout magnetic field gradient differs from the first imaging sequence. Its zeroth moment is usually zero both at the echo times of the pair of echo signals and at the time of the subsequent refocusing RF pulse. Its

first moment is non-zero at the echo time of the first of the pair of echo signals while it is zero at the echo time of the second of the pair of echo signals. In this way, differences between the two single-echo MR images reconstructed from the pair of echo signals can be exploited for an improved flow compensation. For example, a higher signal amplitude at a 5 given voxel position in the second single-echo MR image than in the first single-echo MR image can be attributed to flow-related intra-voxel dephasing and can be compensated by considering the signal amplitude in the second single-echo MR image only.

A cancellation of FID artifacts can be achieved according to the invention for the bipolar dual-echo readout (second imaging sequence) by averaging of two acquisitions 10 with opposite phases of the refocusing RF pulses without increasing the scan time. For this purpose, a phase-encoding magnetic field gradient ('blip gradient') is switched between the two echo signals of each pair of echo signals generated by the second imaging sequence. Each pair of echo signals is acquired twice, each time using the same phase encoding but opposed phases of the RF refocusing pulses. In this way, two different k-space lines are 15 acquired in each time interval between two refocusing RF pulses. These two k-space lines are measured twice in two acquisitions with opposite phase of the refocusing pulses and then separately averaged for a cancellation of FID artifacts.

The method of the invention described thus far can be carried out by means of a MR device including at least one main magnet coil for generating an essentially uniform, 20 static magnetic field B_0 within an examination volume, a number of gradient coils for generating switched magnetic field gradients in different spatial directions within the examination volume, at least one body RF coil for generating RF pulses within the examination volume and/or for receiving MR signals from a body of a patient positioned in the examination volume, a control unit for controlling the temporal succession of RF pulses 25 and switched magnetic field gradients, and a reconstruction unit for reconstructing MR images from the received MR signals. The method of the invention can be implemented by a corresponding programming of the reconstruction unit and/or the control unit of the MR device.

The method of the invention can be advantageously carried out on most MR 30 devices in clinical use at present. To this end it is merely necessary to utilize a computer program by which the MR device is controlled such that it performs the above-explained method steps of the invention. The computer program may be present either on a data carrier or be present in a data network so as to be downloaded for installation in the control unit of the MR device.

BRIEF DESCRIPTION OF THE DRAWINGS

The enclosed drawings disclose preferred embodiments of the present invention. It should be understood, however, that the drawings are designed for the purpose 5 of illustration only and not as a definition of the limits of the invention. In the drawings:

Figure 1 shows a MR device for carrying out the method of the invention;

Figure 2 shows a schematic (simplified) pulse sequence diagram of a conventional TSE Dixon imaging sequence;

Figure 3 shows schematic (simplified) pulse sequence diagrams of the first and 10 second imaging sequences according to the invention;

Figure 4 schematically shows details of the bipolar readout magnetic field gradient applied in the second imaging sequence shown in Figure 3.

DETAILED DESCRIPTION OF THE EMBODIMENTS

15 With reference to Figure 1, a MR device 1 is shown as a block diagram. The device comprises superconducting or resistive main magnet coils 2 such that a substantially uniform, temporally constant main magnetic field B_0 is created along a z-axis through an examination volume. The device further comprises a set of (1st, 2nd, and - where applicable - 3rd order) shimming coils 2', wherein the current flow through the individual shimming coils 20 of the set 2' is controllable for the purpose of minimizing B_0 deviations within the examination volume.

25 A magnetic resonance generation and manipulation system applies a series of RF pulses and switched magnetic field gradients to invert or excite nuclear magnetic spins, induce magnetic resonance, refocus magnetic resonance, manipulate magnetic resonance, spatially and otherwise encode the magnetic resonance, saturate spins, and the like to perform MR imaging.

More specifically, a gradient pulse amplifier 3 applies current pulses to selected ones of whole-body gradient coils 4, 5 and 6 along x, y and z-axes of the examination volume. A digital RF frequency transmitter 7 transmits RF pulses or pulse 30 packets, via a send/receive switch 8, to a body RF coil 9 to transmit RF pulses into the examination volume. A typical MR imaging sequence is composed of a packet of RF pulse segments of short duration which, together with any applied magnetic field gradients, achieve a selected manipulation of nuclear magnetic resonance. The RF pulses are used to saturate resonance, excite resonance, invert magnetization, refocus resonance, or manipulate

resonance and select a portion of a body 10 positioned in the examination volume. The MR signals are also picked up by the body RF coil 9.

For generation of MR images of limited regions of the body 10, a set of local array RF coils 11, 12, 13 are placed contiguous to the region selected for imaging. The array 5 coils 11, 12, 13 can be used to receive MR signals induced by body-coil RF transmissions. The resultant MR signals are picked up by the body RF coil 9 and/or by the array RF coils 11, 12, 13 and demodulated by a receiver 14 preferably including a preamplifier (not shown). The receiver 14 is connected to the RF coils 9, 11, 12 and 13 via the send/receive switch 8.

A host computer 15 controls the shimming coils 2' as well as the gradient 10 pulse amplifier 3 and the transmitter 7 to generate the imaging sequences of the invention. For the selected sequence, the receiver 14 receives a single or a plurality of MR data lines in rapid succession following each RF excitation pulse. A data acquisition system 16 performs analog-to-digital conversion of the received signals and converts each MR data line to a digital format suitable for further processing. In modern MR devices the data acquisition 15 system 16 is a separate computer which is specialized in acquisition of raw image data.

Ultimately, the digital raw image data are reconstructed into an image representation by a reconstruction processor 17 which applies a Fourier transform or other appropriate reconstruction algorithms, such as SENSE. The MR image may represent a planar slice through the patient, an array of parallel planar slices, a three-dimensional 20 volume, or the like. The image is then stored in an image memory where it may be accessed for converting slices, projections, or other portions of the image representation into appropriate format for visualization, for example via a video monitor 18 which provides a man-readable display of the resultant MR image.

According to the invention, efficient TSE Dixon imaging is achieved by 25 combining a unipolar single-echo readout at a low receive bandwidth with a bipolar dual-echo readout at a high bandwidth to maximize the SNR.

This is illustrated in Figure 3.

Figure 3 shows a pulse sequence diagram 31 of a TSE sequence constituting a first imaging sequence according to the invention. The diagram 31 shows switched magnetic 30 field gradients in the frequency-encoding direction (M), the phase-encoding direction (P) and the slice-selection direction (S). Moreover, the diagram shows the RF excitation and refocusing pulses as well as the time intervals during which echo signals are acquired, designated by ACQ. A single echo signal is acquired during each interval ACQ at a first (low) receive bandwidth to obtain a high SNR. To this end, comparatively weak unipolar

readout magnetic field gradients (in the M-direction) are chosen. A high sampling efficiency is reached in the first imaging sequence by sampling the MR signals during most of the interspacing between the refocusing pulses.

Figure 3 shows a further pulse sequence diagram 32 for the second imaging sequence according to the invention. The second imaging sequence is also a TSE sequence with echo shifting to obtain a pair of echo signals in each time interval between two consecutive refocusing RF pulses. The pairs of echo signals are acquired using bipolar readout magnetic field gradients. Each pair of echo signals is acquired using a corresponding pair of readout magnetic field gradients having opposed polarities. The corresponding signal acquisition periods are indicated by ACQ1 and ACQ2. The first echo signal of each pair of echo signals is acquired during interval ACQ1 while the second echo signal of each pair of echo signals is acquired during interval ACQ2. In the depicted example, the spacing between the refocusing RF pulses is essentially identical in the first and second imaging sequences, while the readout magnetic field gradient strength as well as the receiving signal bandwidth are doubled in the second imaging sequence with respect to the first imaging sequence to enable echo shifting.

The two separate TSE sequences according to diagrams 31 and 32 are applied in an interleaved fashion according to the invention. The first and second imaging sequences are used to acquire the single echo signals and the pairs of echo signals respectively. The timing of the bipolar readout gradients in the second imaging sequence (diagram 32) is chosen to shift the acquisition windows ACQ1, ACQ2 of the echo signals such that different phase offsets of the signal contributions from water protons and fat protons are provided on which the Dixon-type separation of these signal contributions is based in the final step of MR image reconstruction.

For example, three single-echo MR images can be reconstructed from the echo signals generated by the first and second imaging sequences according to the invention. A three-point Dixon method can then directly be applied to the three single-echo MR images for separating the contributions from fat and water protons. The water/fat separation can be modeled by

30

$$\begin{bmatrix} S_1' \\ S_2' \\ S_3' \end{bmatrix} = \begin{bmatrix} 1 & c^* \\ 1 & 1 \\ 1 & c \end{bmatrix} \begin{bmatrix} W \\ F \end{bmatrix},$$

with $S_1' - S_3'$ being the voxel values in the three single-echo MR images (after correction of the effects of macroscopic magnetic field inhomogeneities), W and F being the complex water and fat contributions, and c being the complex phase offset $e^{i\alpha}$ of F with respect to W at the (positive) echo shift (assuming, for the sake of simplicity, a single-peak spectral model of fat protons). On this basis, the water and fat signal contributions can be estimated for each voxel by a least squares fitting approach (see Reeder et al., Magnetic Resonance in Medicine, 51, 35-45, 2004). However, in a preferred embodiment, the difference in SNR in the single-echo images is taken into account by using a correspondingly weighted linear least squares estimation instead, which provides a better SNR.

Regarding flow compensation, if the first moment of the readout magnetic field gradient at the respective subsequent refocusing pulse is considered as more critical than the first moment of the readout magnetic field gradient at the time of one of the echo signals, the former can be reduced by shortening and strengthening the initial dephasing and the final rephasing lobes of the readout magnetic field gradients (while preserving their area). This is illustrated in the middle diagram of Figure 4. The left diagram shows the readout magnetic field gradient lobes from diagram 32 of Figure 3. The first moment can even be set to zero by strengthening the two middle lobes of the readout magnetic field gradient (possibly entailing the acquisition of partial echoes), as illustrated in the right diagram of Figure 4. However, the first moment of the readout magnetic field gradient is then no longer zero at the time of the second echo signal.

Concerning the cancellation of FID artifacts in the bipolar dual-echo readout, a phase encoding magnetic field gradient ('blip') can be introduced between the two acquisition intervals ACQ1, ACQ2, such that two different k-space lines are acquired in each interval between two consecutive refocusing RF pulses. In other words, the application of the blip magnetic field gradient leads to one half of the k-space lines being acquired with a negative shift of the echo signals and the other half of the k-space lines being acquired with a positive shift of the echo signals. These two subsets of k-space lines can simply be matched by exploiting their conjugate complex symmetry. A possible phase in the MR image is known from the echo signals generated with the first imaging sequence and can be considered appropriately in this process.

Moreover, the information gained on the FID artifacts by the bipolar dual-echo readout can be used to also suppress FID artifacts in the unipolar single-echo readout, without increasing scan time. For example, a first water/fat separation can be performed without such a suppression. If it indicates that a certain voxel essentially contains either water

or fat, the FID contribution in this voxel known from the bipolar dual-echo readout can be modulated to reflect the phase evolution from the respective shift of the echo signals to the spin echo, using the information on the main magnetic field inhomogeneity provided by the first water/fat separation, and then subtracted from the corresponding signal in this voxel

5 obtained from the unipolar single-echo readout. This can be limited to those voxels for which the FID contribution exceeds a certain threshold to limit potential loss of SNR. Subsequently, a second water/fat separation can be performed. It is also conceivable to perform a water/fat separation on the FID contribution only, in order to accurately predict the FID contribution to the signal obtained from the unipolar single-echo readout even for voxels containing a

10 mixture of water and fat.

CLAIMS

1. Method of MR imaging of an object (10) placed in an examination volume of a MR device (1), the method comprising the steps of:
 - subjecting the object (10) to an imaging sequence (32), which comprises a series of refocusing RF pulses, wherein a pair of echo signals is generated in each time interval between two consecutive refocusing RF pulses,
 - acquiring the pairs of echo signals from the object (10) using bipolar readout magnetic field gradients, and
 - reconstructing a MR image from the acquired echo signals, whereby signal contributions from water protons and fat protons are separated wherein each pair of echo signals is combined into a virtual echo signal, wherein signal contributions from water protons and fat protons are separated by a one-point Dixon technique using the virtual echo signals.
- 15 2. Method of claim 1, wherein each virtual echo signal is computed by phase correcting and averaging the echo signals of each pair of echo signals.
3. Method of claim 1, wherein a phase-encoding magnetic field gradient is switched between the two echo signals of each pair of echo signals generated by the imaging sequence.
- 20 4. Method of claim 3, wherein each pair of echo signals is acquired twice, each time using the same phase encoding but opposed phases of the RF refocusing pulses.
- 25 5. Method of MR imaging of an object (10) placed in an examination volume of a MR device (1), the method comprising the steps of:
 - subjecting the object (10) to a first imaging sequence (31) comprising a series of refocusing RF pulses, wherein a single echo signal is generated in each time interval between two consecutive refocusing RF pulses,

- acquiring the echo signals from the object (10) at a first receive bandwidth using unipolar readout magnetic field gradients,
- subjecting the object (10) to a second imaging sequence (32), which comprises a series of refocusing RF pulses, wherein a pair of echo signals is generated in each time interval between two consecutive refocusing RF pulses,
- acquiring the pairs of echo signals from the object (10) at a second receive bandwidth using bipolar readout magnetic field gradients, wherein the second receive bandwidth is higher than the first receive bandwidth, and
- reconstructing a MR image from the acquired echo signals, whereby signal contributions from water protons and fat protons are separated.

10 6. Method of claim 1, wherein the bipolar readout magnetic field gradients are stronger than the unipolar readout magnetic field gradients.

15 7. Method of claim 5 or 6, wherein each pair of echo signals is combined into a virtual echo signal, wherein signal contributions from water protons and fat protons are separated by a two-point Dixon technique using the echo signals generated by the first imaging sequence and the virtual echo signals.

20 8. Method of claim 7, wherein each virtual echo signal is computed by phase correcting and averaging the echo signals of each pair of echo signals.

25 9. Method of any one of claims 5 or 6, wherein signal contributions from water protons and fat protons are separated by a three-point Dixon technique using the echo signals generated by the first and second imaging sequences.

30 10. Method of any one of claims 5 or 6, wherein a phase-encoding magnetic field gradient is switched between the two echo signals of each pair of echo signals generated by the second imaging sequence.

11. Method of claim 10, wherein each pair of echo signals is acquired twice, each time using the same phase encoding but opposed phases of the RF refocusing pulses.

12. Method of claim 7, wherein FID artifact information is derived by comparing the pairs of echo signals acquired using the same phase encoding but opposed phases of the RF refocusing pulses, wherein the FID artifact information is applied for correcting FID artifacts in the acquired echo signals generated by the first imaging sequence.

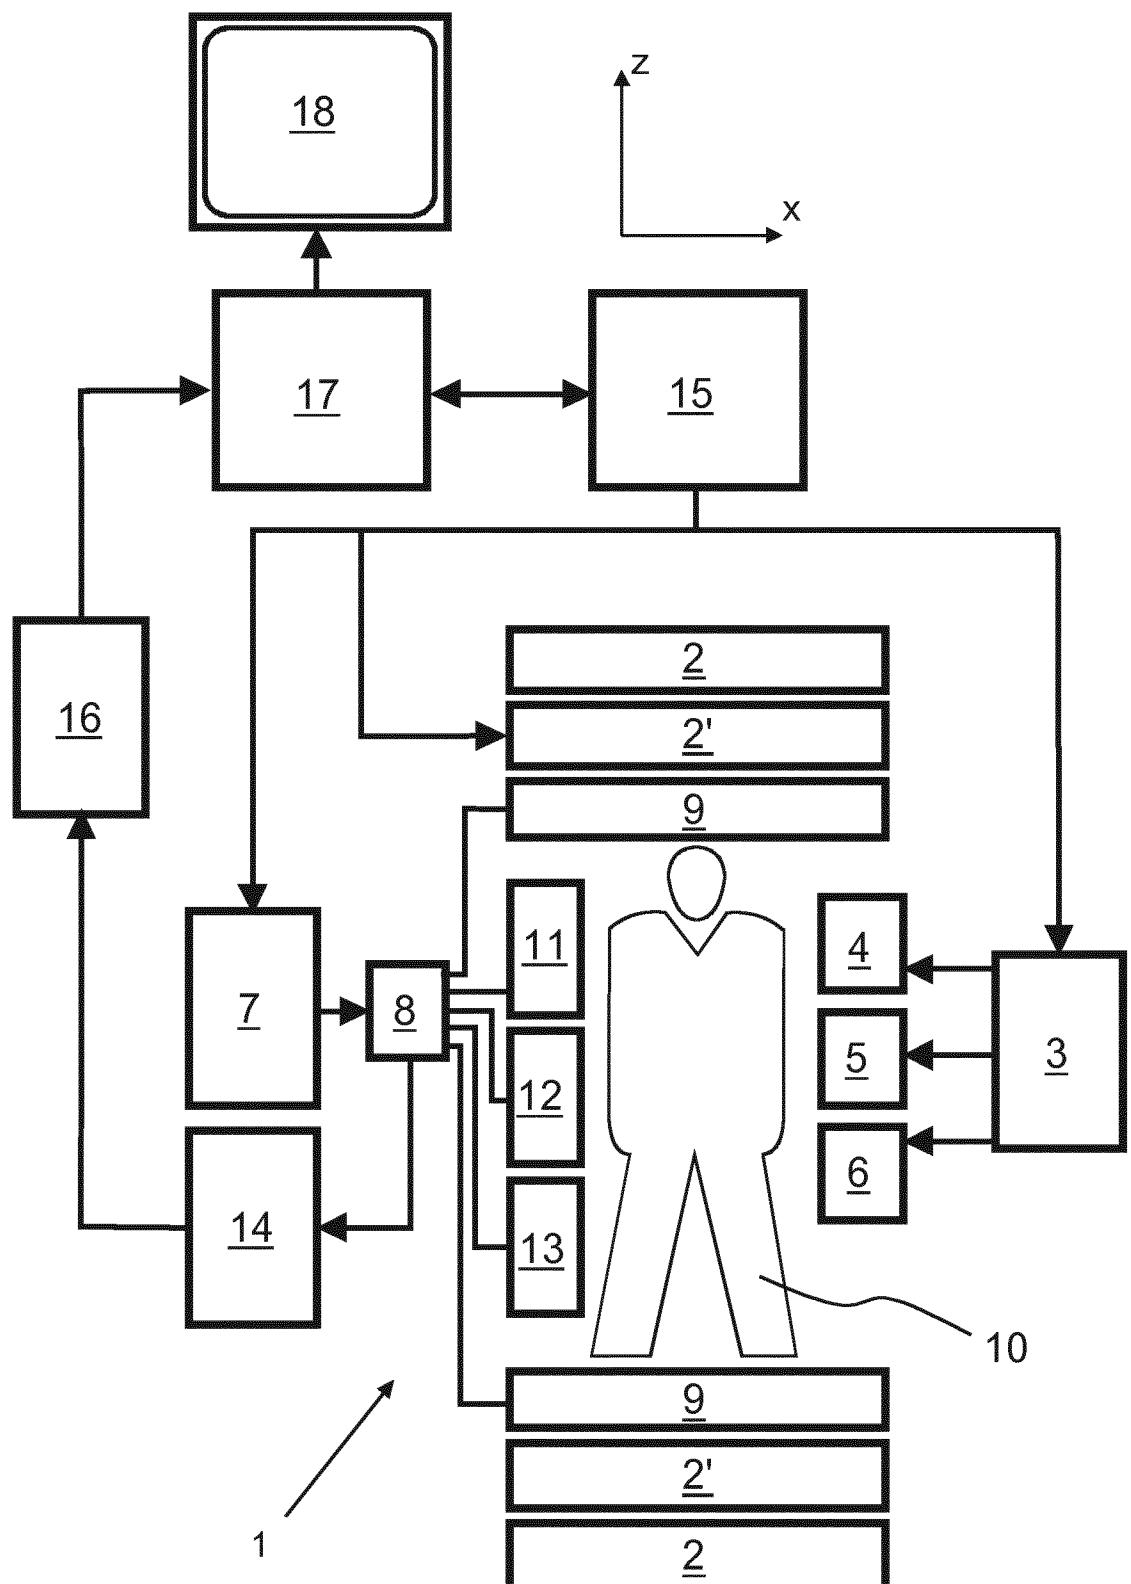
5

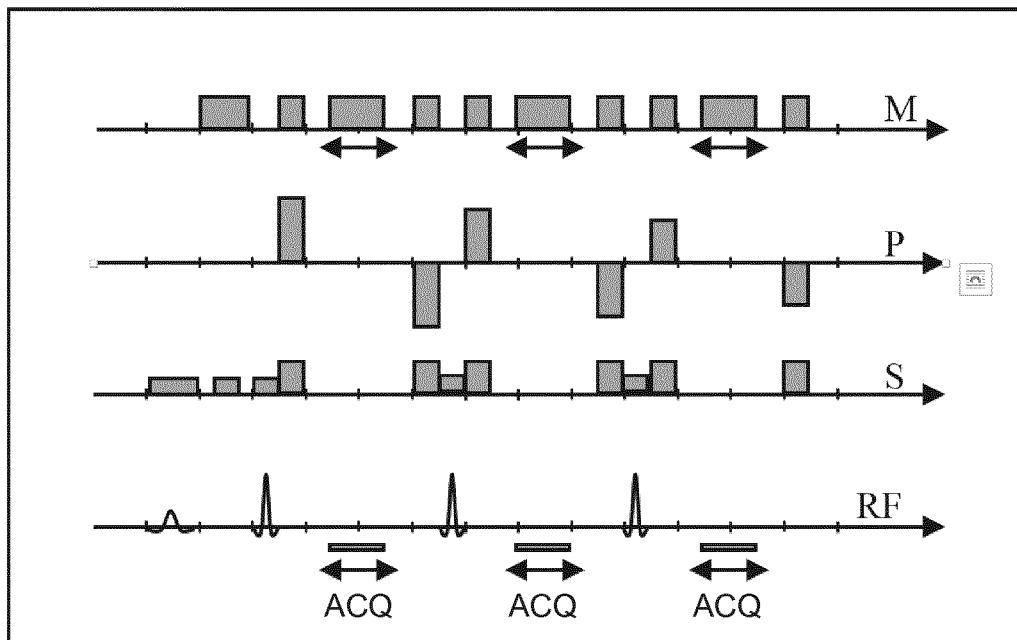
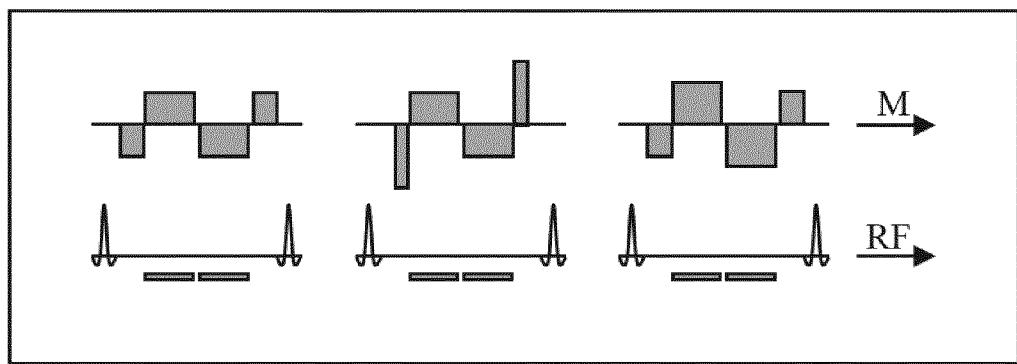
13. MR device comprising at least one main magnet coil (2) for generating a uniform, static magnetic field B_0 within an examination volume, a number of gradient coils (4, 5, 6) for generating switched magnetic field gradients in different spatial directions within the examination volume, at least one RF coil (9) for generating RF pulses within the examination volume and/or for receiving MR signals from an object (10) positioned in the examination volume, a control unit (15) for controlling the temporal succession of RF pulses and switched magnetic field gradients, and a reconstruction unit (17) for reconstructing MR images from the received MR signals, wherein the MR device (1) is configured to perform the steps of the method of any one of claims 1-12.

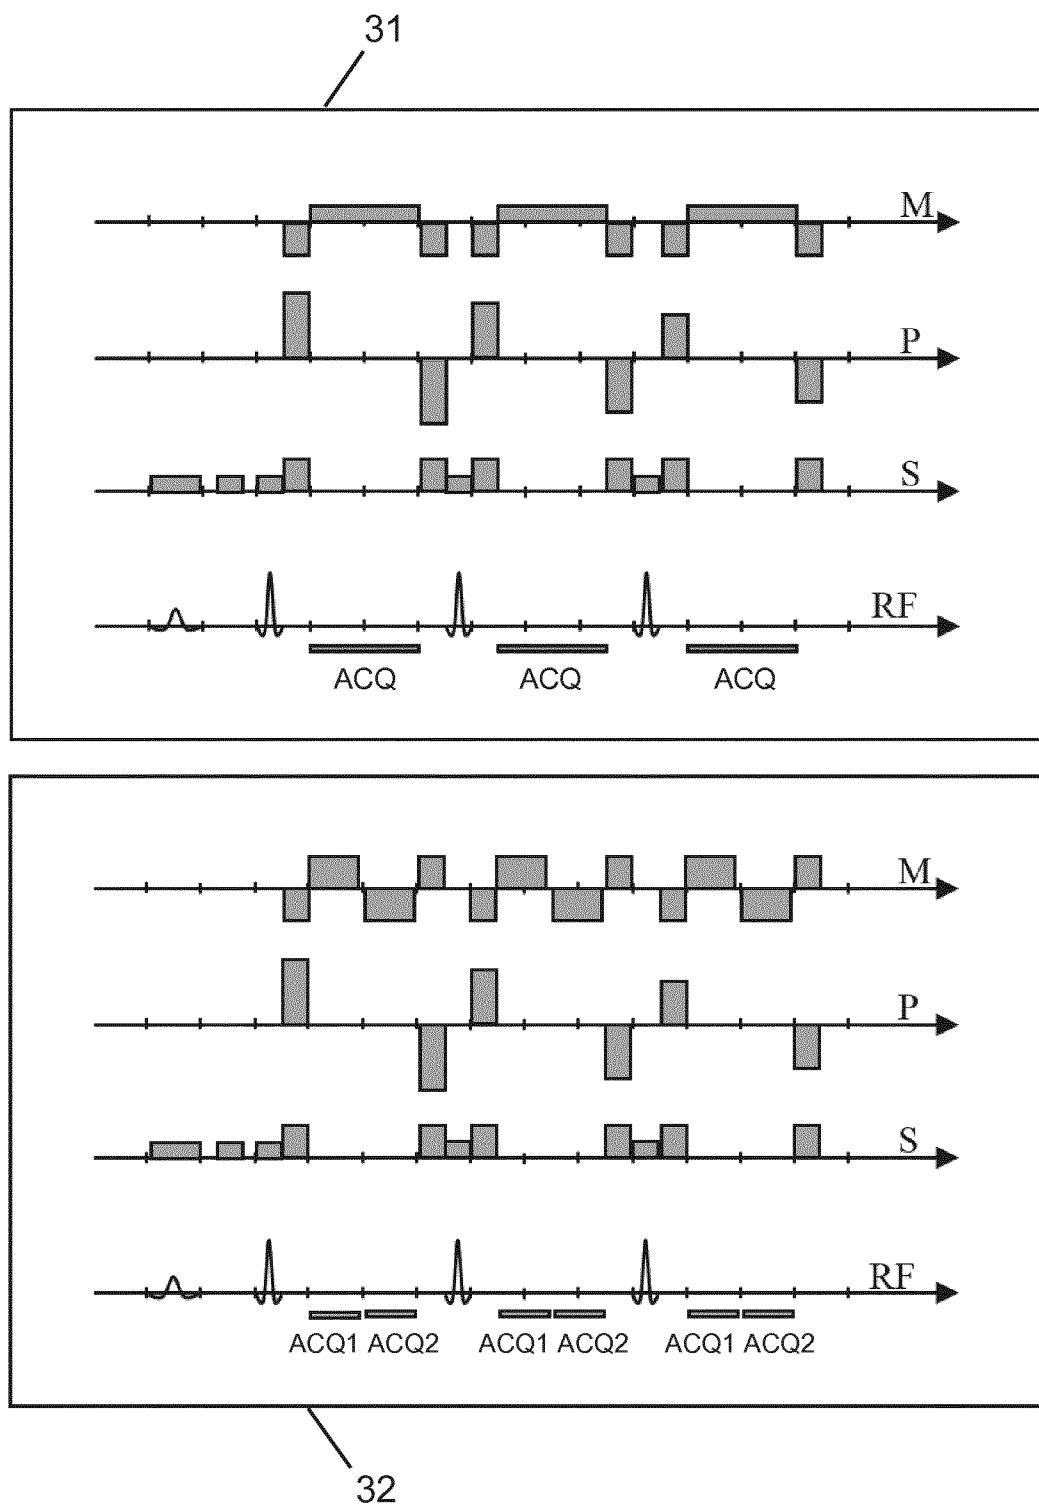
10

14. Computer program to be run on a MR device, which computer program comprises instructions for executing the method of any one of claims 1-12.

15

**Fig. 1**

PRIOR ART**Fig. 2****Fig. 4**

**Fig. 3**

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/063326

A. CLASSIFICATION OF SUBJECT MATTER
INV. G01R33/48 G01R33/561 G01R33/565
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2016/033605 A1 (STEMMER ALTO [DE] ET AL) 4 February 2016 (2016-02-04) cited in the application paragraphs [0025], [0062] - [0068], [0073] - [0075]; figures 2-5, 8 ----- A WENMIAO LU ET AL: "Water-fat separation with bipolar multiecho sequences", MAGNETIC RESONANCE IN MEDICINE, vol. 60, no. 1, 25 June 2008 (2008-06-25), pages 198-209, XP055138008, ISSN: 0740-3194, DOI: 10.1002/mrm.21583 the whole document ----- -/-	1-4,13, 14
A		1-4,13, 14

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
18 August 2017	25/10/2017
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer Raguin, Guy

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2017/063326

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	HOLGER EGGER ET AL: "Dual-Echo Dixon Imaging with Flexible Choice of Echo Times", MAGNETIC RESONANCE IN MEDICINE, 2010 WILEY-LISS, INC, vol. 65, no. 1, 21 September 2010 (2010-09-21), pages 96-107, XP007919288, DOI: DOI 10.1002/MRM.22578 cited in the application the whole document -----	1-4,13, 14
A	REEDER S B ET AL: "Multicoil Dixon Chemical Species Separation With an Iterative Least-Squares Estimation Method", MAGNETIC RESONANCE IN MEDICINE, JOHN WILEY & SONS, INC, US, vol. 51, no. 1, 1 January 2004 (2004-01-01), pages 35-45, XP002378908, ISSN: 0740-3194, DOI: 10.1002/MRM.10675 cited in the application the whole document -----	1-4,13, 14
A	US 2014/043022 A1 (GEERTS-OSSEVOORT LIESBETH [NL] ET AL) 13 February 2014 (2014-02-13) the whole document -----	1-4,13, 14

INTERNATIONAL SEARCH REPORT

International application No.
PCT/EP2017/063326

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

3. Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.

2. As all searchable claims could be searched without effort justifying an additional fees, this Authority did not invite payment of additional fees.

3. As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:

4. No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-4(completely); 13, 14(partially)

Remark on Protest

The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.

The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.

No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-4(completely); 13, 14(partially)

A MRI method, MR device and computer program for water-fat separation comprising performing a turbo spin-echo (TSE) pulse sequence with pairs of echo signals being acquired using a bipolar readout gradient applied between each refocusing RF pulse of the second TSE sequence, and combining each pair of echo signals into a virtual echo signal in order to use a one-point Dixon technique for separating the water and fat signal contributions.

2. claims: 5-12(completely); 13, 14(partially)

A MRI method, MR device and computer program for water-fat separation comprising performing a first turbo spin-echo (TSE) pulse sequence with single echo signals being acquired using a unipolar readout gradient applied between each refocusing RF pulse of the first TSE sequence, performing a second TSE pulse sequence with pairs of echo signals being acquired using a bipolar readout gradient applied between each refocusing RF pulse of the second TSE sequence, whereby the second receive bandwidth of the bipolar readout gradient is higher than the first receive bandwidth of the unipolar readout gradient.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2017/063326

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
US 2016033605	A1 04-02-2016	CN 105433944 A		30-03-2016
		KR 20160016672 A		15-02-2016
		US 2016033605 A1		04-02-2016
<hr/>				
US 2014043022	A1 13-02-2014	CN 103608693 A		26-02-2014
		EP 2515136 A1		24-10-2012
		EP 2699927 A2		26-02-2014
		EP 2891895 A1		08-07-2015
		JP 2014511750 A		19-05-2014
		US 2014043022 A1		13-02-2014
		WO 2012143847 A2		26-10-2012
<hr/>				