



(22) Date de dépôt/Filing Date: 2010/05/27

(41) Mise à la disp. pub./Open to Public Insp.: 2010/12/02

(45) Date de délivrance/Issue Date: 2021/08/03

(62) Demande originale/Original Application: 2 977 253

(30) Priorités/Priorities: 2009/05/27 (GB0908990.5);
2009/07/11 (GB0912051.0)

(51) Cl.Int./Int.Cl. *G01H 9/00* (2006.01),
E21B 47/107 (2012.01), *G01D 5/26* (2006.01),
G01D 5/34 (2006.01), *G01F 1/20* (2006.01),
G01F 1/66 (2006.01), *G01N 29/024* (2006.01),
G08B 13/20 (2006.01), *H04B 10/25* (2013.01)


(72) Inventeurs/Inventors:
FARHADIROUSHAN, MAHMOUD, GB;
PARKER, TOM RICHARD, GB;
SHATALIN, SERGEY, GB

(73) Propriétaire/Owner:
SILIXA LTD, GB

(74) Agent: GASTLE AND ASSOCIATES

(54) Titre : PROCEDE ET APPAREIL DE DETECTION OPTIQUE

(54) Title: METHOD AND APPARATUS FOR OPTICAL SENSING

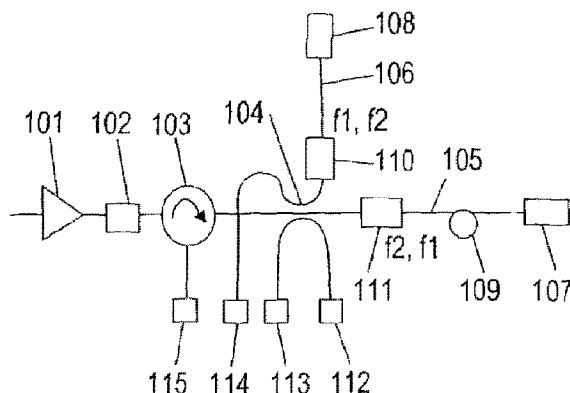

(57) **Abstrégé/Abstract:**

The present invention provides novel apparatus and methods for fast quantitative measurement of perturbation of optical fields transmitted, reflected and or scattered along a length of an optical fibre.

The present invention can be used for point sensors as well as distributed sensors or the combination of both.

In particular this technique can be applied to distributed sensors while extending dramatically the speed and sensitivity to allow the detection of acoustic perturbations anywhere along a length of an optical fibre while achieving fine spatial resolution. The present invention offers unique advantages in a broad range of acoustic sensing and imaging applications. Typical uses are for monitoring oil and gas wells such as for distributed flow metering and or imaging, seismic imaging, monitoring long cables and pipelines, imaging within large vessels as well as for security applications.

ABSTRACT

The present invention provides novel apparatus and methods for fast quantitative measurement of perturbation of optical fields transmitted, reflected and or scattered along a length of an optical fibre.

The present invention can be used for point sensors as well as distributed sensors or the combination of both.

In particular this technique can be applied to distributed sensors while extending dramatically the speed and sensitivity to allow the detection of acoustic perturbations anywhere along a length of an optical fibre while achieving fine spatial resolution. The present invention offers unique advantages in a broad range of acoustic sensing and imaging applications. Typical uses are for monitoring oil and gas wells such as for distributed flow metering and or imaging, seismic imaging, monitoring long cables and pipelines, imaging within large vessels as well as for security applications.

Figure 11

1 **Method and apparatus for optical sensing**

2

3 **Field of the Invention**

4

5 The present invention relates to optical sensors and, in particular, distributed optical fibre
6 sensors and applications thereof.

7

8 **Background to the invention**

9

10 The benefits of optical fibres have been demonstrated in a number of sensing
11 applications. The two major areas are: (i) distributed optical fibre sensors, and (ii)
12 multiplexed point sensor arrays.

13

14 Distributed sensors utilise the intensity of backscatter light, with Raman and/or Brillouin
15 peaks in the light signal utilised to measure temperature, strain or pressure. Distributed
16 sensors offer a number of advantages including continuous sensing along the entire
17 length of fibre, and flexibility and simplicity of the sensor, which may be standard
18 telecoms optical fibre. For example, a distributed sensor may provide 10,000
19 measurement points along 10km of optical fibre with a 1 m spatial resolution. Distributed
20 sensor systems therefore offer low installation and ownership costs.

21

22 However, due to their slow response, distributed sensors are usually only used in
23 applications where measurements taking in order of several seconds to hours are
24 acceptable. The most common sensors of this type are the distributed temperature
25 sensors (DTS), which are made by a number of companies. A typical performance of a
26 DTS is 1m spatial resolution and 1°C temperature resolution in 60 seconds over a 10 km
27 range.

28

29 Distributed sensors have also been used to measure strain by utilising Brillouin shifts in
30 reflected or backscattered light, as described in US 6,555,807 [1] or WO 98/27406 [2].

31 The frequency of the Brillouin shift is about 1 MHz/ 10µε and its linewidth is about
32 30MHz. The strain in an order of 10 µε can be determined along an optical fibre using
33 the narrow frequency scanning methods described. However, using these approaches,
34 the scanning rate is much slower than the pulse repetition rate and measurement times
35 are typically in the order of few seconds to few minutes.

36

WIT-OSA/PCT-CDA-DIV2

1 More recently, a technique for faster measurement of Brillouin frequency shift has been
2 proposed in US 7,355,163 [3]. This technique uses a frequency to amplitude
3 convertor which may be in a form of an optical fibre Mach-Zehnder interferometer with a
4 3x3 coupler at its output. However, the strain resolution is limited by the linewidth of the
5 Brillouin light and therefore the optical path length difference in the interferometer should
6 be kept within the coherence length of the Brillouin light. Also, the polarisation fading
7 between the two paths of the interferometer, the offset and gain variations of the
8 photodetector receivers would significantly limit the strain measurement. Measurement
9 times of around 0.1 seconds (10 Hz) with strain resolution of 50 $\mu\epsilon$ have been recently
10 reported using this technique.

11

12 For many applications, such as acoustic sensing, much higher sensitivities and faster a
13 measurement time in the order of 1 millisecond (1 kHz), 0.1 millisecond (10kHz) or 0.01
14 millisecond (100kHz) is required.

15

16 Multiplexed point sensors offer fast measurements with high sensitivity and are used, for
17 example, in hydrophone arrays. The main application for these in the energy market is
18 for towed and seafloor seismic arrays. However, unlike with distributed sensors,
19 multiplexed point sensors cannot be used where full coverage is required. The size and
20 the position of the sensing elements are fixed and the number of sensors multiplexed on
21 a single fibre is typically limited to 50 to 100 elements. Furthermore, the sensor design
22 relies on additional optical fibre components leading to bulky and expensive array
23 architectures. There is also considerable effort to increase the number of sensors that
24 can be efficiently multiplexed on a single length of fibre.

25

26 Optical-time-domain reflectometry (OTDR) is a well known technique that has been used
27 to test optical fibre communications cables. In order to reduce the effect of coherent
28 backscatter interference, which is sometime is referred to as Coherent Rayleigh Noise, a
29 broadband light source is normally used. However, proposals have also been made in
30 US 5,194,847 [4] to use coherent OTDR for sensing intrusion by detecting the fast
31 changes in a coherent backscatter Rayleigh signal. In addition, Shatalin et al. [5]
32 describes using coherent Rayleigh as a distributed optical fibre alarm sensor.

33

34 WO 2008/056143 [6] describes a disturbance sensor similar to that of US 5,194,847 [4]
35 using a semiconductor distributed feedback laser source. A fibre Bragg grating filter of

1 preferably 7.5GHz is used to reject out-of-band chirped light and, thereby, improve the
2 coherence of the laser pulse sent into the fibre. However, this requires matching of the
3 laser wavelength with the narrow band optical filter, which results in the signal visibility
4 variation being reduced compared to a system which uses a very high coherent source
5 as proposed by US 5,194,847.

6
7 Similar techniques have also been proposed for the detection of buried optical fibre
8 telecommunication cables (for example in WO 2004/102840 [7]), in perimeter security
9 (GB 2445364 [8] and US2009/0114386 [9]) and downhole vibration monitoring
10 (WO 2009/056855 [10]). However, the response of these coherent Rayleigh backscatter
11 systems has been limited by a number of parameters such as polarisation and signal
12 fading phenomena; the random variation of the backscatter light; and non-linear coherent
13 Rayleigh response. Therefore these techniques are mainly used for event detection and
14 do not provide quantitative measurements, such as the measurement of acoustic
15 amplitude, frequency and phase over a wide range of frequency and dynamic range.
16

1 Summary of the Invention

2

3 The present invention provides novel apparatus and methods for fast quantitative
4 measurement of perturbation of optical fields transmitted, reflected and or scattered
5 along a length of an optical fibre.

6

7 The present invention can be used for distributed sensors, point sensors, or the
8 combination of both.

9

10 In particular this technique can be applied to distributed sensors while extending
11 dramatically the speed and sensitivity to allow the detection of acoustic perturbations
12 anywhere along a length of an optical fibre while achieving fine spatial resolution. The
13 present invention offers unique advantages in a broad range of acoustic sensing and
14 imaging applications. Typical uses are for monitoring oil and gas wells, for applications
15 such as for distributed flow metering and/or imaging; seismic imaging, monitoring long
16 cables and pipelines; acoustic imaging inside large vessels as well as security
17 applications.

18

19 It is an aspect of the present invention to provide apparatus for highly sensitive and fast
20 quantitative measurement of the phase, frequency and amplitude of the light transmitted,
21 reflected or scattered along a length of an optical fibre.

22

23 In the prior art, optical couplers have been used in Michelson or Mach-Zehnder
24 interferometer configurations where the polarisation between the two arms of the
25 interferometer has to be carefully controlled. The novel interferometer in the present
26 invention allows an m x m coupler to be utilised using non-reciprocal devices, such as
27 Faraday rotator mirrors and an optical circulator, to provide compensated light
28 interference with a given phase shift that can be measured at all ports of the optical
29 coupler and analysed very quickly, such as at several tens of kilohertz.

30

31 The embodiments of the invention can be used for multiplexed acoustic point sensors,
32 distributed sensors or a combination of both. In the case of distributed sensors, light
33 pulses are injected into the fibre and the phase modulation of the backscattered light is
34 measured along the fibre at several tens of kilohertz. The fibre can be standard
35 telecommunication fibre and/or cable. Using the techniques described herein, the
36 sensing system can thereby detect the acoustic field along the fibre to provide a

WIT-OSA/PCT-CDA-DIV2

distributed acoustic sensor whereby the lengths of the sensing elements can be selected by a combination of adjusting the modulation of the light pulse, the path length in the interferometer as well as the sensing fibre configuration.

The data collected along the fibre are automatically synchronised and they may be combined to provide coherent field images.

According to a first aspect of the present invention there is provided an optical sensor system comprising a light source generating a pulsed optical signal. An optical modulator is arranged to modulate the pulsed optical signal with a first modulation frequency (f_1) and a second modulation frequency (f_2) within the optical pulse modulation envelope. The modulation thereby generates frequency sidebands in the pulsed optical signal. An optical filter is configured to controllably select a plurality of the frequency sidebands, and, thereby vary the frequency of the light, wherein the frequency sidebands selected by the optical filter include at least a first first order sideband and a second first order sideband, respectively generated for the first modulation frequency (f_1) and for the second modulation frequency (f_2). An optical sensing fibre is configured to receive light of a frequency corresponding to the selected plurality of frequency sidebands.

According to a second aspect of the present invention there is provided a distributed acoustic sensing apparatus, comprising:

a distributed acoustic sensor system having a fibre optic cable deployed in use along a pipe to be monitored, the distributed acoustic sensor system receiving backscattered and/or reflected light from along the optical fibre cable and determining acoustic signals incident along the fibre optic cable therefrom;

wherein the distributed acoustic sensor system is arranged to monitor fluid flow in the pipe by determining the speed of sound in one or both directions of fluid flow.

According to a third aspect of the present invention there is provided a method of distributed acoustic sensing, comprising:

determining acoustic signals incident along a pipe using a distributed acoustic sensor system having a fibre optic cable deployed in use along the pipe, the distributed acoustic sensor system receiving backscattered and/or reflected light from along the optical fibre cable; and

1 monitoring fluid flow in the pipe using the distributed acoustic sensor system by
2 determining the speed of sound in one or both directions of fluid flow.

3 According to a fourth aspect of the present invention there is provided a distributed
4 acoustic sensing apparatus, comprising:

5 a distributed acoustic sensor system having a fibre optic cable deployed in use
6 along a pipe to be monitored, the distributed acoustic sensor system receiving
7 backscattered and/or reflected light from along the optical fibre cable and determining
8 acoustic signals incident along the fibre optic cable therefrom;

9 wherein the distributed acoustic sensor system is arranged to monitor fluid flow in
10 the pipe by tracking eddies generated within the flow over a section of the pipe to
11 determine the flow rate.

12 According to a fifth aspect of the present invention there is provided a method of
13 distributed acoustic sensing, comprising:

14 determining acoustic signals incident along a pipe using a distributed acoustic
15 sensor system having a fibre optic cable deployed in use along the pipe, the distributed
16 acoustic sensor system receiving backscattered and/or reflected light from along the
17 optical fibre cable; and

18 monitoring fluid flow in the pipe using the distributed acoustic sensor system by
19 tracking eddies generated within the flow over a section of the pipe to determine flow
20 rate.

21 According to a sixth aspect of the present invention there is provided a method for
22 monitoring fluid flow within a pipeline, the method comprising:

23 deploying an optical sensing fibre of an optical fibre sensor system inside a
24 pipeline; and

25 measuring the noise flow of the fluid contained inside the pipeline, wherein the
26 noise flow measurements are made by the optical fibre sensor system as the optical
27 sensing fibre is carried along the pipeline by the fluid.

28 According to a seventh aspect of the present invention there is provided a distributed
29 acoustic sensing apparatus, comprising:

30 a distributed acoustic sensor system having a fibre optic cable deployed along a
31 pipe to be monitored, the distributed acoustic sensor system receiving backscattered

1 and/or reflected light from along the optical fibre cable and determining acoustic signals
2 incident along the pipe therefrom;

3 wherein the fibre optic cable is deployed along the pipe such that at at least one
4 portion of the pipe a cable is wrapped around the pipe whereby to increase the spatial
5 resolution of a distributed acoustic sensor in the at least one portion of the pipe.

6 According to an eighth aspect of the present invention there is provided a method of
7 distributed acoustic sensing, comprising:

8 determining acoustic signals incident along a pipe to be monitored using a
9 distributed acoustic sensor system having a fibre optic cable deployed along the pipe, the
10 distributed acoustic sensor system receiving backscattered and/or reflected light from
11 along the optical fibre cable;

12 wherein the fibre optic cable is deployed along the pipe such that at at least one
13 portion of the pipe a cable is wrapped around the pipe whereby to increase the spatial
14 resolution of a distributed acoustic sensor in the at least one portion of the pipe.

15 According to a ninth aspect of the present invention there is provided a fibre optic
16 distributed acoustic sensing system having a first port and a sensing optical fibre that has
17 a first end and a second end, the sensing optical fibre being arranged in a spiral pattern,
18 the first end of the sensing optical fibre being coupled to the first port and the second end
19 being unconnected to any part of the fibre optic distributed acoustic sensing system, the
20 fibre optic distributed acoustic sensing system being further arranged to output light from
21 the first port to the first end of the sensing optical fibre and to receive backscattered
22 and/or reflected light from along the sensing optical fibre at the first port.

23 According to a tenth aspect of the present invention there is provided an optical fibre
24 distributed acoustic sensing system, comprising:

25 a light source arranged in use to inject pulses of light into an optical sensing fibre;
26 a means for receiving light backscattered and/or reflected from along the optical
27 sensing fibre; and

28 a means for processing the received light to detect acoustic perturbations incident
29 along the length of the optical sensing fibre;

30

1 wherein the optical sensing fibre is arranged in a plurality of loops, the plurality of
2 loops having a multidimensional configuration.

3 According to an eleventh aspect of the present invention there is provided an optical fibre
4 sensing system, comprising:

5 an acoustic source, wherein the acoustic source generates an acoustic data
6 communication signal; and

7 an optical fiber distributed acoustic sensor system, including an optical sensing
8 fiber deployed sufficiently proximal the acoustic source to detect the generated acoustic
9 data communication signal, the optical sensing fiber distributed acoustic sensor system
10 being arranged in use to measure the acoustic data communication signal generated by
11 the acoustic source, wherein the acoustic measurements are synchronised to enhance
12 signal sensitivity.

13 According to a twelfth aspect of the present invention there is provided a method of using
14 an optical fiber distributed acoustic sensor system for surveillance, the sensor system
15 having an optical sensing fibre deployed along a structure or in an area to be monitored,
16 the method comprising:

17 isolating a reference section of the optical sensing fibre in a quiet location;

18 transmitting light into the optical sensing fibre;

19 receiving light backscattered and/or reflected from along the optical sensing fibre;

20 and

21 processing the received light to measure the phase, frequency and amplitude
22 data of the received light to provide quantitative measurements of acoustic perturbations
23 along the length of the optical sensing fibre, the processing including using light from the
24 reference section as a reference.

25 According to a thirteenth aspect of the present invention there is provided a surveillance
26 apparatus, the apparatus comprising a distributed acoustic sensor system, the system
27 including:

28 an optical sensing fibre deployed in use along a structure or in an area to be
29 monitored, a section of the optical sensing fibre being isolated in a quiet location such

1 that in use it is used as a reference section, the reference section being formed
2 between respective reflectors or a combination of beam splitters and reflectors;

3 a means for receiving light backscattered and/or reflected from along the optical
4 sensing fibre; and

5 a means for processing the received light to measure the phase, frequency and
6 amplitude data of the received light to provide quantitative measurements of acoustic
7 perturbations along the length of the optical sensing fibre.

8 According to a fourteenth aspect of the present invention there is provided a fibre optic
9 distributed acoustic sensing system, comprising:

10 an optical sensing fibre arranged in use for receiving pulsed optical signals;

11 a means for receiving light backscattered and/or reflected from along the optical
12 sensing fibre as the pulsed optical signals travel therealong, the light being backscattered
13 and/or reflected in dependence on acoustic perturbations incident along the fibre; and

14 a means for processing the received light to measure relative phase, frequency
15 and amplitude of the received light from along the length of the optical sensing fibre to
16 detect the acoustic perturbations, wherein the relative phase, frequency and amplitude
17 measurements taken from along the length of the optical sensing fibre are synchronised
18 to enhance signal sensitivity.

19 According to a fifteenth aspect of the present invention there is provided a method of
20 fibre optic distributed acoustic sensing, comprising:

21 inputting pulsed optical signals to an optical sensing fibre;

22 receiving light backscattered and/or reflected from along the optical sensing fibre
23 as the pulsed optical signal travels there along, the light being backscattered and/or
24 reflected in dependence on acoustic perturbations incident along the fibre; and

25 processing the received light to measure the relative phase, frequency and
26 amplitude of the light received from along the length of the optical sensing fibre to detect
27 acoustic perturbations, wherein the relative phase, frequency and amplitude
28 measurements taken along the length of the optical sensing fibre are synchronised to
29 enhance signal sensitivity.

30

1 According to a sixteenth aspect of the present invention there is provided an optical
2 sensing system comprising:

3 a pulsed light source arranged in use to generate a pulsed optical signal;

4 an interferometer arranged in use to receive the pulsed optical signal, the
5 interferometer comprising at least two optical paths and at least one frequency shifter
6 arranged in use to introduce a frequency shift between the at least two optical paths in
7 dependence on an RF signal generated by an RF source so as to generate respective
8 pulses having a frequency shift therebetween;

9 a sensing fibre arranged in use to receive the respective pulses;

10 a photodetector arranged in use to receive light backscattered and/or reflected
11 from along the sensing fibre as the respective pulses travel therealong and to convert the
12 received light into at least one electrical signal;

13 means for splitting the at least one electrical signal into a plurality of electrical
14 signals;

15 a plurality of mixers arranged to receive respectively the plurality of electrical
16 signals, the plurality of mixers respectively mixing the plurality of electrical signals with
17 the RF signal at respective different phase angles to down-convert the plurality of
18 electrical signals into a plurality of respective baseband signals; and

19 a processor arranged to digitise the plurality of respective baseband signals and
20 to determine the relative optical phase modulation at at least one section of the sensing
21 fibre therefrom.

22 According to a seventeenth aspect of the present invention there is provided a method of
23 fibre optic sensing, comprising:

24 generating a pulsed optical signal using a pulsed light source;

25 receiving the pulsed optical signal at an interferometer having at least two optical
26 paths;

27 introducing a relative frequency shift between the at least two optical paths using at
28 least one frequency shifter in dependence on an RF signal to generate respective
29 pulses having a frequency shift therebetween;

- 1 inputting the respective pulses into a sensing fibre;
 - 2 receiving light backscattered and/or reflected from along the sensing fibre as the
 - 3 respective pulses travel therealong;
 - 4 converting the received light into at least one electrical signal;
 - 5 splitting the at least one electrical signal into a plurality of electrical signals;
 - 6 mixing the plurality of electrical signals with the RF signal at respective different
 - 7 phase angles to down-convert the plurality of electrical signals into a plurality of
 - 8 respective baseband signals;
 - 9 digitising the plurality of respective baseband signals; and
 - 10 determining the relative optical phase modulation at at least one section of the
 - 11 sensing fibre therefrom.
- 12 According to an eighteenth aspect of the present invention there is provided an optical
- 13 fiber sensing system, comprising:
- 14 a light source arranged in use to generate optical signals;
 - 15 means for varying an optical frequency of the optical signals;
 - 16 an optical sensing fibre arranged in use to receive light of a frequency corresponding
 - 17 to that of the frequency-varied optical signals;
 - 18 an interferometer arranged in use to receive light backscattered and/or reflected from
 - 19 along the optical sensing fibre, the backscattered and/or reflected light interfering in
 - 20 the interferometer to produce interference components, and
 - 21 means for processing the interference components to quantitatively measure
 - 22 properties of the received light.

23 Brief description of the drawings

- 24
- 25 Embodiments of the invention and how to put it into practice are described by way of
- 26 example with reference to the accompanying drawings in which: -
- 27
- 28 Figures 1, 2, 3 and 4 show schematically novel interferometer apparatus according to
- 29 related embodiments of the invention, comprising circulators and multiple fibre couplers

1 with different optical paths through the interferometers, Faraday-rotator mirrors and
2 photodetectors;

3

4 Figures 5 and 6 show schematically how the interferometers can be cascaded according
5 to embodiments of the invention in series and/or star configurations;

6

7 Figure 7 shows schematically a sensor system that utilises the interferometer of an
8 embodiment of the invention for fast measurement of scattered and reflected light from
9 an optical fibre;

10

11 Fig 8 shows schematically a distributed sensor system that utilises the interferometer of
12 an embodiment of the invention to generate a series of pulses each of different frequency
13 and thereby allowing a different portion of the scattered light to interfere with another
14 portion of the scattered light with a slight frequency shift resulting in a heterodyne beat
15 signal;

16

17 Figure 9 is a block diagram representing a data processing method according to an
18 embodiment of the invention;

19

20 Figure 10 is a block diagram representing a method of calibrating the interferometer
21 according to an embodiment of the invention;

22

23 Figure 11 shows schematically a distributed sensor system the spectrum of the light that
24 is modulated using a fast optical modulator, that generates multiple frequency side
25 bands with part of spectrum being selected using an optical filter.

26

27 Figure 12A shows the spectrum of the light modulated and selected using the optical
28 filter for the arrangement shown in Figure 11;

29

30 Figure 12B shows schematically a timing diagram for a method in accordance with
31 Figure 11;

32

33 Figure 13 shows schematically an embodiment in which the fibre can be deployed as
34 linear sensors, directional sensors or in a multidimensional array of sensors;

35

Figures 14 to 16 show schematically alternative arrangements of an optical fibre for use in embodiments of the invention;

Figures 17 to 18 schematically show applications of the invention in various aspects.

Detailed Description of Preferred Embodiments

Figure 1 shows a first embodiment, generally depicted at 100, of a novel interferometer for measuring the optical amplitude, phase and frequency of an optical signal. The incoming light from a light source (not shown) is preferably amplified in an optical amplifier 101, and transmitted to the optical filter 102. The filter 102 filters the out of band Amplified Spontaneous Emission noise (ASE) of the amplifier 101. The light then enters into an optical circulator 103 which is connected to a 3 x 3 optical coupler 104. A portion of the light is directed to the photodetector 112 to monitor the light intensity of the input light. The other portions of light are directed along first and second optical paths 105 and 106, with a path length difference between the two paths. Faraday-rotator mirrors (FRMs) 107 and 108 reflect the light back through the first and second paths 105 and 106, respectively. The Faraday rotator mirrors provide self-polarisation compensation along optical paths 105 and 106 such that the two portions of light efficiently interfere at each of the 3x3 coupler 104 ports. The optical coupler 104 introduces relative phase shifts of 0 degrees, +120 degrees and -120 degrees to the interference signal, such that first, second and third interference signal components are produced, each at a different relative phase.

First and second interference signal components are directed by the optical coupler 104 to photodetectors 113 and 114, which measure the intensity of the respective interference signal components.

The circulator 103 provides an efficient path for the input light and the returning (third) interference signal component through the same port of the coupler 104. The interference signal component incident on the optical circulator 103 is directed towards photodetector 115 to measure the intensity of the interference signal component.

The outputs of the photodetectors 113, 114 and 115 are combined to measure the relative phase of the incoming light, as described in more detail below with reference to Figures 7 and 9.

1

2 Optionally, frequency shifters 110 and 111 and/or optical modulator 109 may be used
3 along the paths 105 and 106 for heterodyne signal processing. In addition, the frequency
4 shift of 110 and 111 may be alternated from f_1 , f_2 to f_2 , f_1 respectively to reduce any
5 frequency-dependent effect between the two portions of the light propagating through
6 optical paths 105 and 106.

7

8 The above-described embodiment provides a novel apparatus suitable for fast
9 quantitative measurement of perturbation of optical fields, and in particular can be used
10 for distributed and multiplexed sensors with high sensitivity and fast response times to
11 meet requirements of applications such as acoustic sensing.

12

13 Figure 7 shows an application of the interferometer of Figure 1 to the distributed sensing
14 of an optical signal from an optical system 700. It will be apparent that although the
15 application is described in the context of distributed sensing, it could also be used for
16 point sensing, for example by receiving reflected light from one or more point sensors
17 coupled to the optical fibre.

18

19 In this embodiment 700, light emitted by a laser 701 is modulated by a pulse signal 702.
20 An optical amplifier 705 is used to boost the pulsed laser light, and this is followed by a
21 band-pass filter 706 to filter out the ASE noise of the amplifier. The optical signal is then
22 sent to an optical circulator 707. An additional optical filter 708 may be used at one port
23 of the circulator 707. The light is sent to sensing fibre 712, which is for example a single
24 mode fibre or a multimode fibre deployed in an environment in which acoustic
25 perturbations are desired to be monitored. A length of the fibre may be isolated and
26 used as a reference section 710, for example in a "quiet" location. The reference section
27 710 may be formed between reflectors or a combination of beam splitters and reflectors
28 709 and 711.

29

30 The reflected and the backscattered light generated along the sensing fibre 712 is
31 directed through the circulator 707 and into the interferometer 713. The detailed
32 operation of the interferometer 713 is described earlier with reference to Fig 1. In this
33 case, the light is converted to electrical signals using fast low-noise photodetectors 112,
34 113, 114 and 115. The electrical signals are digitised and then the relative optical phase
35 modulation along the reference fibre 710 and the sensing fibre 712 is computed using a
36 fast processor unit 714 (as will be described below). The processor unit is time

synchronised with the pulse signal 702. The path length difference between path 105 and path 106 defines the spatial resolution. The photodetector outputs may be digitised for multiple samples over a given spatial resolution. The multiple samples are combined to improve the signal visibility and sensitivity by a weighted averaging algorithm combining the photodetector outputs.

It may be desirable to change the optical frequency of the light slightly to improve the sensitivity of the backscattered or reflected signals. The optical modulator 703 may be driven by a microwave frequency of around 10-40 GHz to generate optical carrier modulation sidebands. The optical filter 708 can be used to select the modulation sidebands which are shifted relative to the carrier. By changing the modulation frequency it is possible to rapidly modulate the selected optical frequency.

Data processing

Figure 9 schematically represents a method 1100 by which the optical phase angle is determined from the outputs of the photodetectors 113, 114, 115. The path length difference between path 105 and path 106 defines the spatial resolution of the system. The photodetector outputs may be digitised for multiple samples over a given spatial resolution, i.e. the intensity values are oversampled. The multiple samples are combined to improve the signal visibility and sensitivity by a weighted averaging algorithm combining the photo-detector outputs.

The three intensity measurements I_1 , I_2 , I_3 , from the photodetectors 113, 114, 115 are combined at step 1102 to calculate the relative phase and amplitude of the reflected or backscattered light from the sensing fibre. The relative phase is calculated (step 1104) at each sampling point, and the method employs oversampling such that more data points are available than are needed for the required spatial resolution of the system. Methods for calculating the relative phase and amplitude from three phase shifted components of an interference signal are known from the literature. For example, Zhiqiang Zhao et al. [12] and US 5,946,429 [13] describe techniques for demodulating the outputs of 3 x 3 couplers in continuous wave multiplexing applications. The described techniques can be applied to the time series data of the present embodiment.

1 For each sampling point, a visibility factor V is calculated at step 1106 from the three
 2 intensity measurements I_1 , I_2 , I_3 , from the photodetectors 113, 114, 115, according to
 3 equation (1), for each pulse.

4

5 **Equation (1)** $V = (I_1 - I_2)^2 + (I_2 - I_3)^2 + (I_3 - I_1)^2$

6

7 At a point of low visibility, the intensity values at respective phase shifts are similar, and
 8 therefore the value of V is low. Characterising the sampling point according the V allows
 9 a weighted average of the phase angle to be determined (step 1108), weighted towards
 10 the sampling points with good visibility. This methodology improves the quality of the
 11 phase angle data 1110.

12

13 Optionally, the visibility factor V may also be used to adjust (step 1112) the timing of the
 14 digital sampling of the light for the maximum signal sensitivity positions. Such
 15 embodiments include a digitiser with dynamically varying clock cycles, (which may be
 16 referred to herein as "iclock"). The dynamically varying clock may be used to adjust the
 17 timing of the digitised samples at the photodetector outputs for the position of maximum
 18 signal sensitivity and or shifted away from positions where light signal fading occurs.

19

20 The phase angle data is sensitive to acoustic perturbations experienced by the sensing
 21 fibre. As the acoustic wave passes through the optical fibre, it causes the glass structure
 22 to contract and expand. This varies the optical path length between the backscattered
 23 light reflected from two locations in the fibre (i.e. the light propagating down the two paths
 24 in the interferometer), which is measured in the interferometer as a relative phase
 25 change. In this way, the optical phase angle data can be processed at 1114 to measure
 26 the acoustic signal at the point at which the light is generated.

27

28 In preferred embodiments of the invention, the data processing method 1100 is
 29 performed utilising a dedicated processor such as a Field Programmable Gate Array.

30

1 Sensor calibration

2
3 For accurate phase measurement, it is important to measure the offset signals and the
4 relative gains of the photo-detectors 113,114 and 115. These can be measured and
5 corrected for by method 1200, described with reference to Figure 10.

6
7 Each photodetector has electrical offset of the photodetectors, i.e. the voltage output of
8 the photodetector when no light is incident on the photodetector (which may be referred
9 to as a "zero-light level" offset. As a first step (at 1202) switching off the incoming light
10 from the optical fibre and the optical amplifier 101. When switched off, the optical
11 amplifier 101 acts as an efficient attenuator, allowing no significant light to reach the
12 photodetectors. The outputs of the photodetectors are measured (step 1204) in this
13 condition to determine the electrical offset, which forms a base level for the calibration.

14
15 The relative gains of the photodetectors can be measured, at step 1208, after switching
16 on the optical amplifier 101 while the input light is switched off (step 1206). The in-band
17 spontaneous emission (i.e. the Amplified Spontaneous Emission which falls within the
18 band of the bandpass filter 102), which behaves as an incoherent light source, can then
19 be used to determine normalisation and offset corrections (step 1210) to calibrate the
20 combination of the coupling efficiency between the interferometer arms and the trans-
21 impedance gains of the photodetectors 113, 114 and 115. This signal can also be used
22 to measure the signal offset, which is caused by the in-band spontaneous emission.

23
24 Conveniently, the optical amplifier, which is a component of the interferometer, is used as
25 in incoherent light source without a requirement for an auxiliary source. The incoherence
26 of the source is necessary to avoid interference effects at the photodetectors, i.e. the
27 coherence length of the light should be shorter than the optical path length of the
28 interferometer. However, for accurate calibration it is preferable for the frequency band
29 of the source to be close to, or centred around, the frequency of light from the light
30 source. The bandpass filter 102 is therefore selected to filter out light with frequencies
31 outside of the desired bandwidth from the Amplified Spontaneous Emission.

32
33 When used in a pulsed system, such as may be used in a distributed sensor, the above-
34 described method can be used between optical pulses from the light source, to
35 effectively calibrate the system during use, before each (or selected) pulses from the light
36 source with substantively no interruption to the measurement process.

Variations to the above-described embodiments are within the scope of the invention, and some alternative embodiments are described below. Figure 2 shows another embodiment, generally depicted at 200, of a novel interferometer similar to that shown in Figure 1 but with an additional Faraday-rotator mirror 201 instead of photodetector 112. Like components are indicated by like reference numerals. In this case the interference between different paths, which may have different path length, can be separated at the three beat frequencies f_1 , f_2 and (f_2-f_1) . The arrangement of this embodiment has the advantage of providing additional flexibility in operation, for example the different heterodyne frequencies can provide different modes of operation to generate measurements at different spatial resolutions.

Figure 3 shows another embodiment of a novel interferometer, generally depicted at 300, similar to the arrangement of Figure 1, with like components indicated by like reference numerals. However, this embodiment uses a 4x4 coupler 314 and an additional optical path 301, frequency shifter 304, phase modulator 303, Faraday-rotator mirror 302 and additional photo-detector 308. In this case the interference between different paths, which may have different path length differences, can be separated at the three beat frequencies (f_2-f_1) , (f_3-f_2) and (f_3-f_1) . Alternatively, the Faraday-rotator mirror 302 may be replaced by an isolator or a fibre matched end so that no light is reflected through path 301, so only allowing interference between path 105 and 106.

The 4 x 4 optical coupler of this arrangement generates four interference signal components at relative phase shifts of -90 degrees, 0 degrees, 90 degrees, 180 degrees.

Fig 4 shows another embodiment of the interferometer. In this case an additional path is introduced in the interferometer by inserting a Faraday-rotator mirror 402 instead of the photo-detector 112.

In all of the above-described embodiments, optical switches may be used to change and/or select different combinations of optical path lengths through the interferometer. This facilitates switching between different spatial resolution measurements (corresponding to the selected path length differences in the optical path lengths).

Figures 5 and 6 show examples of interferometer systems 500, 600 arranged for used in cascaded or star configurations to allow the measuring of the relative optical phase for

1 different path length differences. In Figure 5, three interferometers 501, 502, 503 having
2 different path length differences (and therefore different spatial resolutions) are combined
3 in series. In Figure 6, four interferometers 602, 603, 604 and 605 having different path
4 length differences (and therefore different spatial resolutions) are combined with
5 interferometers 602, 603, 604 in parallel, and interferometers 603 and 605 in series. In
6 Figure 6, 601 is a 3 x 3 coupler, used to split the light between the interferometers.
7 Arrangement 600 can also be combined with wavelength division multiplexing
8 components to provide parallel outputs for different optical wavelengths.

9
10 The embodiments described above relate to apparatus and methods for fast quantitative
11 measurement of acoustic perturbations of optical fields transmitted, reflected and or
12 scattered along a length of an optical fibre. The invention in its various aspects can be
13 applied or implemented in other ways, for example to monitor an optical signal generated
14 by a laser, and/or to monitor the performance of a heterodyne signal generator, and to
15 generate optical pulses for transmission into an optical signal. An example is described
16 with reference to Figure 8.

17
18 Figure 8 shows a system, generally depicted at 800, comprising an interferometer 801 in
19 accordance with an embodiment of the invention, used to generate two optical pulses
20 with one frequency-shifted relative to the other. The interferometer receives an input
21 pulse from a laser 701, via optical circulator 103. A 3 x 3 optical coupler 104 directs a
22 component of the input pulse to a photodetector, and components to the arms of the
23 interferometer. One of the arms includes a frequency shifter 110 and an RF signal 805.
24 The interference between the two pulses is monitored by a demodulator 802. The light
25 reflected by Faraday-rotator mirrors 107 and 108 is combined at the coupler 809 using a
26 delay 803 to match the path length of the interferometer, so that the frequency shifted
27 pulse and the input pulse are superimposed. The coupler 809 introduces relative phase
28 shifts to the interference signal, and interferometer therefore monitors three heterodyne
29 frequency signal components at relative phase shifts. The optical circulator 103 passes
30 the two pulses into the sensing fibre.

31
32 In this embodiment, the reflected and backscattered light is not detected by an
33 interferometer according to the invention. Rather, the reflected and backscattered light is
34 passed through an optical amplifier 804 and an optical filter 806 and are then sent to a
35 fast, low-noise photodetector 807. The electrical signal is split and then down-converted
36 to baseband signals by mixing the RF signal 805 at different phase angles, in a manner

1 known in the art. The electrical signals are digitised and the relative optical phase
 2 modulation at each section of the fibre is computed by combining the digitised signals
 3 using a fast processor 808.

4

5 Fig 11 shows another embodiment of apparatus for point as well as distributed sensors.
 6 In this case the modulation frequency 704 of the optical modulator 703 is switched from
 7 f_1 to f_2 within the optical pulse modulation envelope.

8

9 The optical filter 708 selects two modulation frequency sidebands 1202/1203 and
 10 1204/1205 generated by the optical modulator as indicated in Figure 12. The frequency
 11 shift between first order sidebands 1202 and 1203 is proportional to the frequency
 12 modulation difference ($f_2 - f_1$) whereas the frequency shift between 2nd order sidebands
 13 1204 and 1205 is proportional to $2(f_2 - f_1)$. Therefore, the photo-detector output 806
 14 generates two beat signals, one of which is centred at $(f_2 - f_1)$ and the other at $2(f_2 - f_1)$.
 15 Using the demodulator 901, the relative optical phase of the beat signals can be
 16 measured independently. The two independent measurements can be combined to
 17 improve the signal visibility, the sensitivity and the dynamic range along the sensing fibre.

18

19 Figure 12A shows the modulation spectrum of the light and the selection of the
 20 sidebands referred to above.

21

22 Figure 12B shows the original laser pulse 1206 with pulse width of T at frequency f_0
 23 which is modulated at frequency f_1 , f_2 and f_3 during a period T_1 , T_2 and T_3 , respectively.
 24 The delay between T_1 , T_2 and T_3 can also be varied. One or more modulation
 25 sidebands is/ are selected with the optical filter 708 to generated a frequency shifted
 26 optical pulses that are sent into the fibre. The reflected and/ or backscatter signals (709,
 27 710, 711 and 712) from the fibre from is directed to a photodetector receive via a
 28 circulator 707. The reflected and or backscatter light from different pulses mix together at
 29 the photodetector output to generate heterodyne signals such $(f_2 - f_1)$, $(f_3 - f_1)$, $(f_3 - f_2)$, $2(f_2 -$
 30 $f_1)$, $2(f_3 - f_1)$ and $2(f_3 - f_2)$. Other heterodyne signals are also generated but $(2f_2 - f_1)$, $(2f_3 -$
 31 $f_1)$, $(2f_1 - f_2)$, $(2f_1 - f_3)$, $(2f_3 - f_1)$ and $(2f_3 - f_2)$ are also generated at much higher frequencies.
 32 The heterodyne signal are converted down to base band in-phase and quadrature
 33 signals. The in-phase and quadrature signals are digitise by a fast analogue to digital
 34 converters and the phase angle is computed using fast digital signal processor.

35

Figure 13 shows an embodiment with distributed sensors with the sensing fibre 702 subjected to different perturbation fields 1302, 1304 and 1307. The sensing fibre can be used as linear sensors 1303 and 1304, as directional sensors 1305 and 1306 or as multi-dimensional array sensors 1308, 1309 and 1310. Since all the measurements are synchronised, they can be processed to enhance the signal sensitivity, achieve a wide dynamic range and provide field imaging using beam forming techniques.

Figure 14 shows an optical fibre arrangement 1400, where the fibre is placed on a surface area in a continuous path without crossing over another part of the fibre to increase the sensitivity, in a double figure-eight pattern.

Figure 15 shows an optical fibre arrangement 1500, where the fibre is placed on a surface area in a continuous path without crossing over another part of the fibre to increase the sensitivity, in a folded three-Omegas ($\Omega \Omega \Omega$) pattern.

These arrangements are particularly useful to increase the sensing sensitivity, frequency response and the spatial resolution of the sensing system, while simplifying installation techniques and minimising bending losses.

Figure 16 shows an optical fibre arrangement 1600, where the fibre is placed in a logarithmic spiral pattern to form an acoustic camera or telescope. Acoustic energy can be detected all along a section of fibre. In this case the signals detected along the field are synchronised and using addition signal processing such as beam forming, the near-field and far-field acoustic emission can be mapped. Such an apparatus can be used to look far into the sky, through oceans, deep into the ground, or within vessels. This aspect also provides apparatus for monitoring the environmental noise such as aircraft noise during take-off and landing as well as noise from other flying objects or natural habitats.

Figure 17 shows at 1700 an application to distributed flow sensing along a pipe 1702 at different sections with fibre 1701 wrapped around the pipe at separated locations 1704 and attached or placed close to the pipe via clamps 1706 to measure the flow noise and pressure variations. This arrangement may also be used to monitor the operation of injector or control valves 1708, and sensors may be used for in-well perforated zones monitoring and sand production monitoring. For example, for in-well applications, the acoustic noise profile can be used to measure the flow by noise logging at every location

1 along the well. In addition, the noise spectrum can be used to identify the phase of the
2 fluid. Further noise spectrum correlation techniques can be used over a long section of
3 the well to determine the speed of sound as well as tracking eddies generated within the
4 flow to accurately determine the flow rates, using analysis techniques for example as
5 described in WO 2006/130499 [14]. This document describes an array of optical fibre
6 acoustic interferometric sensors used to track the speed of the vortices induced pressure
7 waves as a function of the flow. However, the interferometers require discrete
8 components, such as Bragg grating pairs, and a limited number of sensors over a short
9 section of a pipe can be practically be used. With the distributed acoustic sensor of the
10 present invention we can use a flexible method of attaching to or placing close to a pipe
11 a continuous length of optical in an optimised configuration along entire length of pipe.
12 For example the spatial resolution measurements may be increased by wrapping the
13 fibre around the pipe to track the vortices induced pressure waves or simply track the
14 acoustic waves generated and propagated along the pipe to determine the speed of
15 sound both in the same and opposite directions of the flow. The speed of sound is a
16 function of the fluid composition and by mapping the speed of sound one can visualise
17 how the flow profile changes along the pipe.

18

19 Also, since we do not require any discrete components, a higher operating temperature
20 can be achieved with proper coating protection applied on to the fibre. The fibre
21 sensitivity can also be enhanced or reduced using different coatings or jackets. Also, the
22 fibre can be made into a continuous cable with an enhanced sensing sensitivity while
23 proving a protection for the fibre in harsh environments.

24

25 Figure 18 shows at 1800 an application to dynamic positioning of a riser 1802 using
26 acoustic fibre optic sensors 1804 and acoustic reference sources 1806 whereby the
27 optical fibre sensor 1804 measures the time of flight of acoustic signals received at
28 different locations along the riser and thereby determines the position of the riser.

29

30 Review of features of the invention in various aspects and embodiments

31

32 In one aspect, the invention provides an optical interferometer apparatus which can
33 provide multiple path differences between the optical signals and provide interference
34 signals between different optical paths with fixed and/or variable phase shifts. The
35 interferometer utilises beam splitting components, circulating devices and Faraday

1 rotator mirrors in a novel configuration. The optical signals at the output of the
2 interferometer are converted to electrical signals which digitised for fast processing. The
3 offset levels of the electrical signals are removed and their amplitude are normalised.
4 The relative phase shifts of optical signals are accurately determined by combining the
5 normalised electrical signals.

6
7 In another aspect, the invention relates to an interferometer apparatus that utilises beam
8 splitters and non-reciprocal devices to provide light interference with given phase shifts
9 and path length differences that can be measured at all ports of the beam splitters
10 whereby the relative phase modulation of the light can be computed very accurately and
11 quickly, such as at every few nanoseconds. The interferometer may use optical fibre
12 components such as an m x m fused optical fibre coupler that is connected to an optical
13 fibre circulator at one of its ports; Faraday-rotator mirrors that reflect and, at the same
14 time, provide polarisation compensation for the light propagating through the different
15 paths of the interferometer and photodetectors that are used to measure the interference
16 light signals. The incoming optical light may be amplified using an optical fibre amplifier,
17 and preferably the interferometer has a pass band optical filter to filter out the out of band
18 Amplified Spontaneous Emission noise (ASE). The interferometer may provide
19 birefringence compensation for light propagating along different optical paths through the
20 interferometer. This provides sufficiently high visibility at the outputs of the interferometer.

21
22 In another of its aspects, the invention provides a method for compensating the offset
23 and the gain of the photo-detectors, and the coupling ratio of the interferometer arms, to
24 normalise the resultant interference signals used to measure the relative phase of the
25 modulated input light in any of preceding claims where the detector offset is measured by
26 switching off the optical amplifier in the backscatter path; the resultant photo-detector
27 offset and gain then being determined by switching on the amplifier while the input light is
28 switched off; the ASE of the optical amplifier then acts as an independent incoherent light
29 source and thereby the offsets and relative gains of the photo-detectors can be
30 determined and the detected light signals normalised. The method may therefore use
31 incoherent light that enters the input of the interferometer to normalise the relative signal
32 amplitudes at the output of the photo-detectors. For example, when an optical
33 preamplifier is used at the input of the interferometer, the spontaneous light emission can
34 be used to measure the combination of the splitting ratio of the interferometer arms and
35 the relative gains of the photo-detectors and thereby normalise the relative signal
36 amplitudes accordingly.

WIT-OSA/PCT-CDA-DIV2

1

2 Another additional feature of the present invention is to use phase modulators and/or
3 frequency shifters to shift the relative frequency and or vary the phase between the
4 optical paths of the interferometer. Frequency shifters and/or phase modulators may be
5 used to provide heterodyne signals and/or to separate the resultant interference light
6 signal from different paths through the interferometer.

7

8 An additional feature of an embodiment of the invention is selecting the frequency of the
9 frequency shifter sufficiently high so that at least one cycle of the beat frequency results
10 within one light pulse resolution. Different frequency shifts may be used between
11 different optical paths of the interferometer for the separation and/or heterodyne
12 detection of the phase between different optical paths. The frequency shifts between
13 different optical paths may be alternated to correct for any frequency dependency of the
14 interferometer output signals.

15

16 An additional feature of an embodiment of the invention is the selection of different
17 optical paths through the interferometer such as by using optical switches. The optical
18 switches may be used to select different optical paths through the interferometer and
19 thereby select a different spatial resolution measurement. Another aspect of the invention
20 relates to a system comprising a number of interferometers cascaded in a series or in a
21 star configuration or a combination of both.

22

23 The invention also provides a system that utilises a light pulse for multiplexed and/or
24 distributed sensors by measuring the phase modulation of the reflected and/or the
25 backscattered light along a length of fibre with high sensitivity, high dynamic range and a
26 high speed of over tens of kilohertz. In this way, the invention can provide a multiplexed
27 and/or distributed acoustic sensing system.

28

29 An additional feature of an embodiment of the invention is digitising the outputs of the
30 interferometer, or the photodetectors of the interferometer, at least twice over a spatial
31 resolution interval. An additional feature of an embodiment of the invention is combining
32 the outputs of the interferometer to determine the insensitive measurement sample
33 points resulting from any signal fading of the light in order to reject and/or provide a
34 weighted signal average of the multiple samples of the light over a given spatial
35 resolution measurement or interval. Embodiments of the invention use a digitiser with
36 dynamically varying clock cycles, (which may be referred to herein as "iclock"), to adjust

1 the timing of the digital sampling of the light for the maximum signal sensitivity positions.
2 The dynamically varying clock may be used to adjust the timing of the digitised samples
3 at the photo-detector outputs for the position of maximum signal sensitivity and or shifted
4 away where light signal fading occurs.

5
6 A further aspect of the invention provides frequency shifted light, using a fast optical
7 modulator to generate sidebands, preferably with a suppressed carrier spectrum, and a
8 band-pass optical filter to select the modulation sidebands whereby the modulation
9 frequency is varied rapidly between two portions of light pulse propagating through the
10 optical modulator. The optical modulator may also chop off a portion of light pulse in the
11 middle so as to generate two pulses with different frequencies. In this case the reflected
12 and/or the backscattered light generated by the two pulses are combined to result in a
13 heterodyne signal whose phase is determined to measure the relative optical phase
14 modulation along the sensing fibre.

15
16 Providing multiple heterodyne signals can improve the dynamic range and reduce the
17 effect of signal fading. When the scattered and/or the reflected light from the two pulses
18 are combined, the modulation sidebands generate different beat frequencies which are
19 proportional to the modulation frequency difference and to the order of the sidebands.
20 The frequency of the light may be changed to optimise the signal sensitivity over a given
21 section of the fibre. The frequency of the light passing through the optical modulator may
22 be changed rapidly so that at least two portions of light pulse have different modulation
23 sideband frequencies and, in addition, part of the light pulse may be chopped to generate
24 two distinct portions of light pulses with different modulation sideband frequencies. The
25 modulation sidebands between the two portions of the light pulse scattered or reflected
26 from a sensing fibre may beat together to generate multiple heterodyne signals at
27 multiples of the frequency difference between the two pulses that are proportional to the
28 order of the modulation sidebands.

29
30 Embodiments of the invention may use a laser light or a broadband light source.

31 Coherent matching of the light with the same delay results in an interference signal that
32 can be used to measure the relative phase modulation of the scattered or reflected light
33 along the fibre. The invention may use wavelength division multiplexed components to
34 utilise multiple laser light pulses with different wavelengths and, preferably, varying time
35 shift with respect to each to control the cross-phase modulation between the light pulses
36 and to allow the processing of multiple pulses in the sensing fibre without and cross-

1 sensitivity to allow the system to achieve a higher measurand frequency response. This
2 may be the acoustic frequency response of the system to provide a different spatial
3 sampling resolutions and/or positions, and/or to allow the efficient rejection of any points
4 with low sensitivity.

5
6 An additional feature of an embodiment of the invention is the selection of different
7 spatial resolutions whereby the sensitivity and the frequency response along the sensing
8 fibre can be adjusted, and the dynamic range can be widened.

9
10 The sensing fibre may be standard single mode fibre, polarisation maintaining fibre, a
11 single polarisation fibre, and or a ribbon fibre, and it can be coated and or cabled to
12 enhance or to suppress its sensitivity.

13
14 An additional feature of an embodiment of the invention is the selection of different
15 configurations of the fibre to optimise the sensitivity, the frequency and the directionality
16 of the sensing fibre at different locations. The fibre may be deployed as linear sensors,
17 direction sensors or multidimensional array sensors. The fibre may be placed on a
18 surface area in a continuous path without crossing over another part of the fibre to
19 increase the sensitivity, the frequency response and or the spatial resolution of the
20 sensor system such as in a folded three-Omegas ($\Omega \Omega \Omega$) and or double eights (88)
21 configurations. This is particularly useful to increase the sensing sensitivity, frequency
22 response and the spatial resolution of the sensing system, while simplifying installation
23 techniques and minimising bending losses.

24
25 The fibre may be attached on a surface of a vessel to listen to the noise generated within
26 the vessel to monitor the changes in the process, acoustically image the process, as well
27 to detect any leaks.

28
29 A further aspect provides an apparatus using acoustic sensors for distributed flow
30 measurement and imaging, in-well perforated zones monitoring and sand production
31 monitoring. For example, for in-well applications, the acoustic noise profile can be used
32 to measure the flow by noise logging at every location along the well. In addition, the
33 noise spectrum can be used to identify the phase of the fluid. Further noise spectrum
34 correlation techniques can be used over a long section of the well to determine the speed
35 of sound as well as tracking eddies generated within the flow to accurately determine the
36 flow rates.

WIT-OSA/PCT-CDA-DIV2

The sensor systems may be used as a distributed acoustic sensor, enabling the determination of distributed flow measurement and imaging, perforated zones monitoring and sand production monitoring in oil and gas wells and flowlines. The distributed temperature and strain measurements may be combined to enhance the data interpretation of the distributed acoustic sensor.

A further application is listening along previously installed optical fibres for surveillance applications. This includes measurements along fibres installed along boreholes, pipelines, perimeters, ports and borders.

An additional aspect provides a dynamic positioning apparatus using acoustic fibre optic sensors and acoustic reference sources whereby the optical fibre sensor measures the time of flight of acoustic signals received at different locations along the structure and thereby determines its position.

A further aspect provides pipeline structure monitoring apparatus using an acoustic fibre sensor and a pig that emits a sound (known as a "whistling pig"). The optical fibre sensor measures the acoustic transmission through the wall of the pipe for diagnostics as well as for tracking the position of the pig.

Another aspect provides pipeline monitoring apparatus where the sensing fibre is deployed inside the pipeline and carried along the pipeline by the fluid drag to provide a measurement of the noise flow for diagnostics of the pipeline as well as for flow characterisation and/ or imaging.

Another aspect provides an apparatus using a fibre sensor used for acoustic sensing and an energy harvesting self-powered acoustic source to generate sufficient acoustic emission that can be picked up by a nearby sensing fibre for data communication, measurement, diagnostics and surveillance applications including along long pipelines, in-well and in other remote applications.

Another aspect of the invention provides an apparatus using acoustic fibre sensors to measure seepage rates along dams and dykes by generating an acoustic noise source in the upstream reservoir or in the core of the dam and measuring the acoustic signal strength detected along the fibre whereby areas of seepage act as low acoustic

1 impedance paths for acoustic wave transmission and thereby exhibiting louder signal
2 levels.

3

4 Other advantages and applications of the invention will be apparent to those skilled in the
5 art. Any of the additional or optional features can be combined together and combined
6 with any of the aspects, as would be apparent to those skilled in the art.

7

8 Concluding remarks

9

10 As has been described above, apparatus and methods for fast quantitative measurement
11 of perturbations of optical fields transmitted, reflected and/or scattered along a length of
12 an optical fibre. In particular, the invention can be used for distributed sensing while
13 extending dramatically the speed and sensitivity to allow the detection of acoustic
14 perturbations anywhere along a length of an optical fibre while achieving fine spatial
15 resolution. The present invention offers unique advantages in a broad range of acoustic
16 sensing and imaging applications. Typical uses are for monitoring oil and gas wells such
17 as for distributed flow metering and/or imaging, monitoring long cables and pipelines,
18 imaging of large vessels as well as security applications.

References:

- [1] US 6,555,807, Clayton et al.
- [2] WO 98/27406, Farhadiroshan et al.
- [3] US 7,355,163, Watley et al.
- [4] US 5,194,847, Taylor et al.
- [5] Shatalin, Sergey et al., "Interferometric optical time-domain reflectometry for distributed optical-fiber sensing", Applied Optics, Vol. 37, No. 24, pp. 5600 -5604, 20 August 1998.
- [6] WO 2008/056143, Shatalin et al.
- [7] WO 2004/102840, Russel et al.
- [8] GB 2445364, Strong et al.
- [9] US 2009/0114386, Hartog et al.
- [10] WO 2009/056855, Hartog et al.
- [11] WO 2007/049004, Hill et al.
- [12] Zhiqiang Zhao et al., "Improved Demodulation Scheme for Fiber Optic Interferometers Using an Asymmetric 3x3 Coupler", J. Lightwave Technology, Vol.13, No.11, November 1997, pp. 2059 - 2068
- [13] US 5,946,429, Huang et al
- [14] WO 2006/130499, Gysling et al.

1 Claims

2

3 1. A distributed acoustic sensing apparatus, comprising:
 4 a distributed acoustic sensor system having a fibre optic cable deployed in use
 5 along a pipe to be monitored, the distributed acoustic sensor system receiving
 6 backscattered and/or reflected light from along the optical fibre cable and determining
 7 acoustic signals incident along the fibre optic cable therefrom;
 8 wherein the distributed acoustic sensor system is arranged to monitor fluid flow in
 9 the pipe by tracking eddies generated within the flow over a section of the pipe to
 10 determine the flow rate.

11 2. An apparatus according to claim 1, wherein the fluid flow monitoring comprises
 12 tracking acoustic waves generated and propagated along the pipe.

13 3. An apparatus according to claims 1 or 2, wherein the fluid flow monitoring further
 14 comprises determining the speed of sound in one or both directions of fluid flow.

15 4. An apparatus according to claim 3, wherein the determined speed of sound is used
 16 to determine the flow profile along the pipe.

17 5. An apparatus according to any of claims 1 to 4, wherein the fluid flow monitoring
 18 further comprises noise spectrum correlation techniques over a section of the pipe.

19 6. An apparatus according to any of claims 1 to 5, wherein the distributed acoustic
 20 sensor system further comprises an interferometer arranged to receive the
 21 backscattered and/or reflected light from along the optical fibre cable, the
 22 interferometer comprising at least two optical paths with a path length difference
 23 therebetween, the backscattered and/or reflected light interfering in the interferometer
 24 to produce interference components, the distributed acoustic sensor system further
 25 comprising plural photodetectors to measure the interference components, and a
 26 processor arranged to determine the optical phase angle data therefrom.

27 7. A method of distributed acoustic sensing, comprising:
 28 determining acoustic signals incident along a pipe using a distributed acoustic
 29 sensor system having a fibre optic cable deployed in use along the pipe, the
 30 distributed acoustic sensor system receiving backscattered and/or reflected light from
 31 along the optical fibre cable; and

1 monitoring fluid flow in the pipe using the distributed acoustic sensor system by
2 tracking eddies generated within the flow over a section of the pipe to determine flow
3 rate.

4 8. A method according to claim 7, wherein the fluid flow monitoring further comprises
5 tracking acoustic waves generated and propagated along the pipe.

6 9. A method according to claim 7 or 8, wherein the fluid flow monitoring further
7 comprises determining the speed of sound in one or both directions of fluid flow.

8 10. A method according to claim 9, wherein the determined speed of sound is used to
9 determine the flow profile along the pipe.

10 11. A method according to any of claims 7 to 10, wherein the fluid flow monitoring
11 further comprises noise spectrum correlation techniques over a section of the pipe.

12 12. A method according to any of claims 7 to 11, wherein the distributed acoustic
13 sensor system further comprises an interferometer arranged to receive the
14 backscattered and/or reflected light from along the optical fibre, the interferometer
15 comprising at least two optical paths with a path length difference therebetween, the
16 backscattered and/or reflected light interfering in the interferometer to produce
17 interference components, the distributed acoustic sensor system further comprising
18 plural photodetectors to measure the interference components, and a processor
19 arranged to determine the optical phase angle data therefrom.

20

1/16

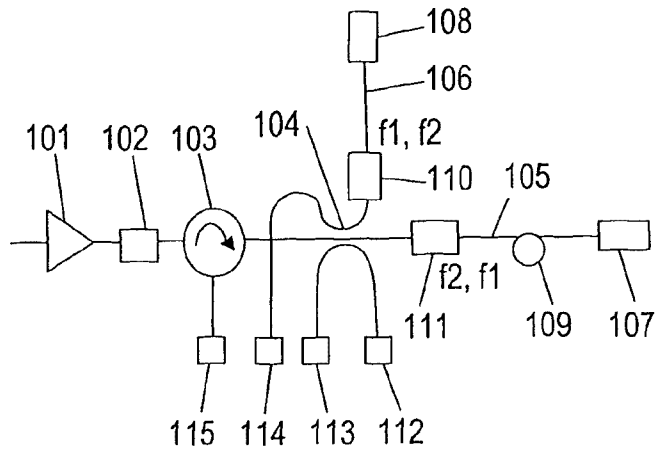


Fig. 1

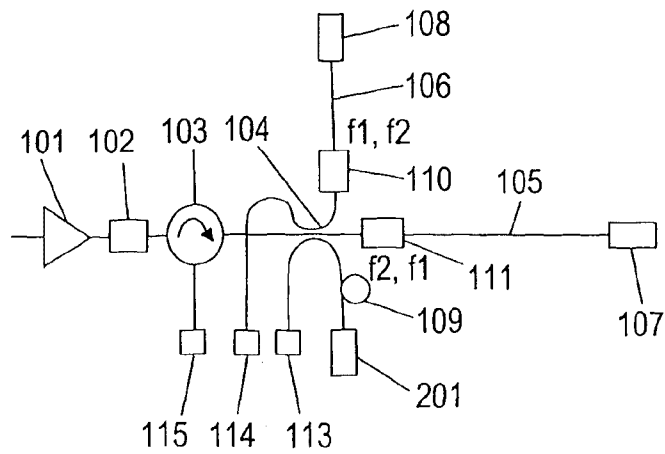


Fig. 2

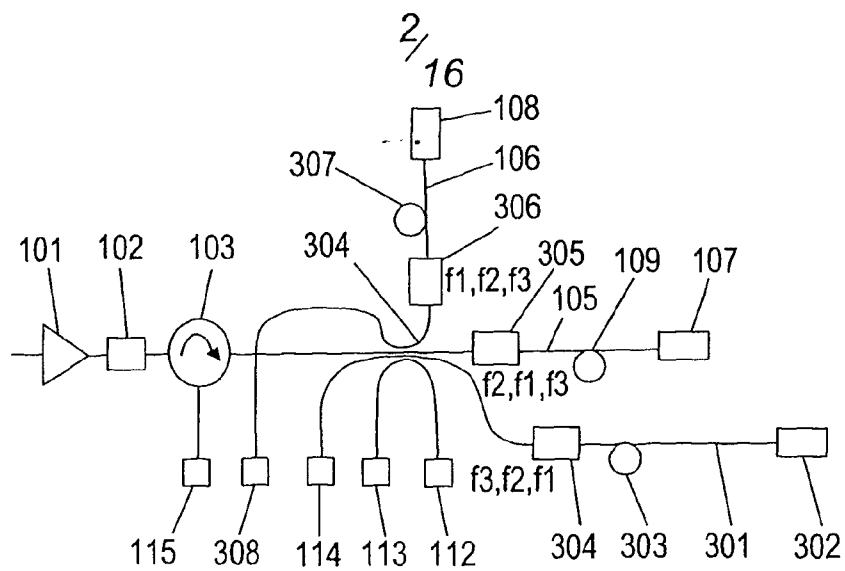


Fig. 3

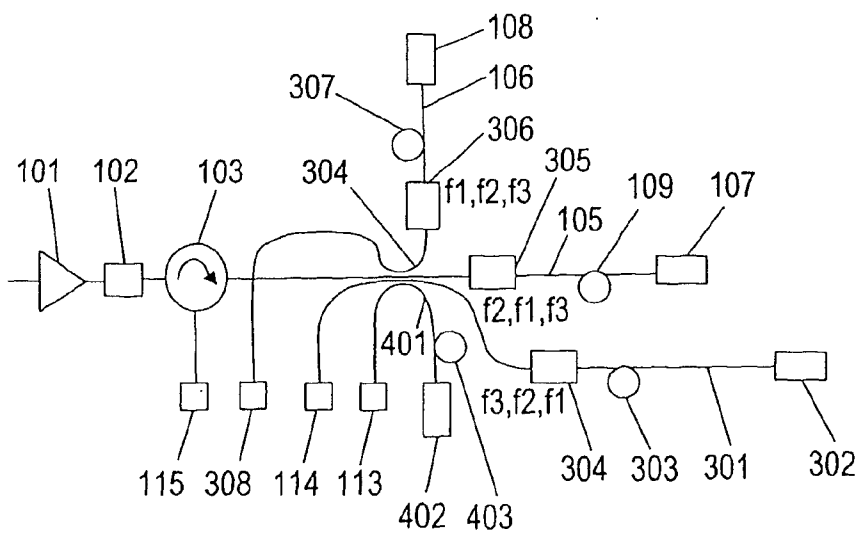


Fig. 4

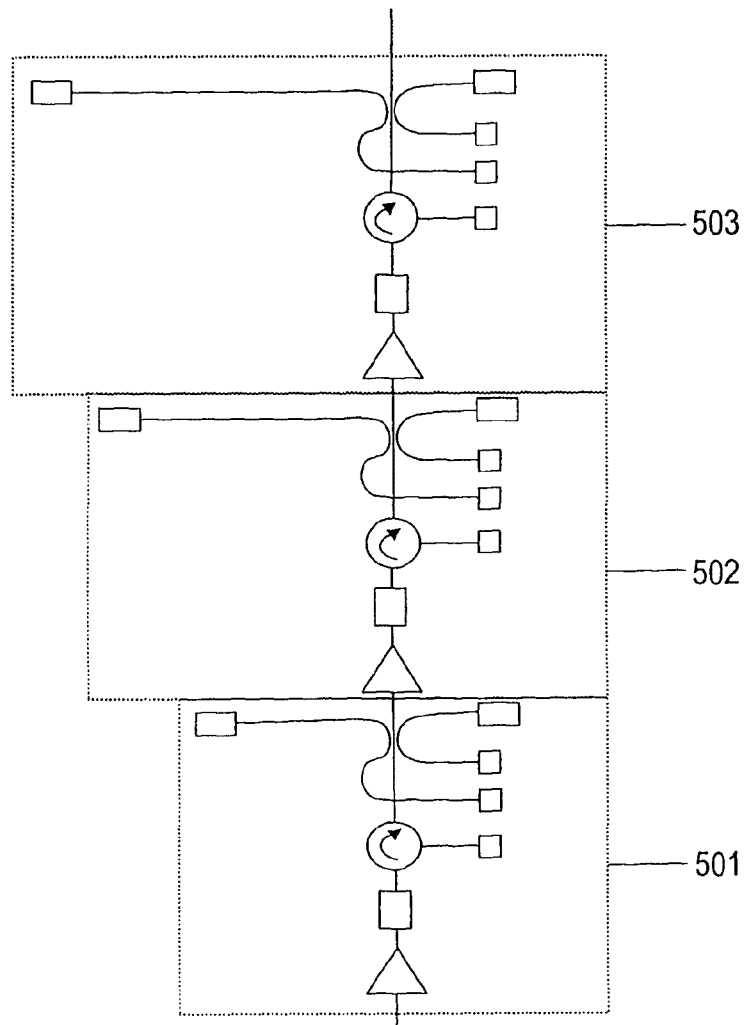


Fig. 5

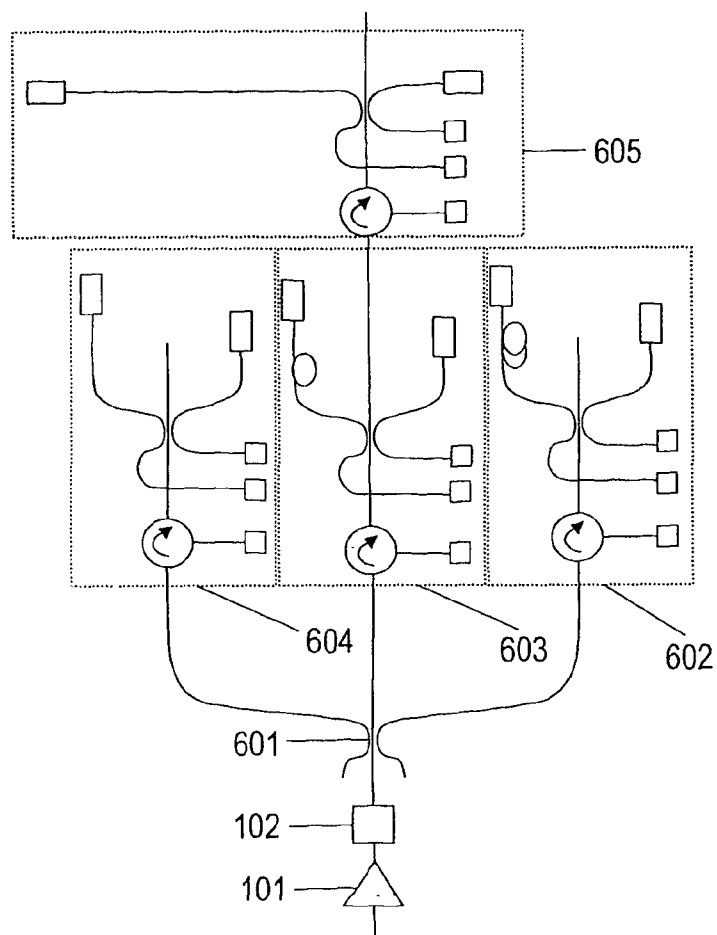


Fig. 6



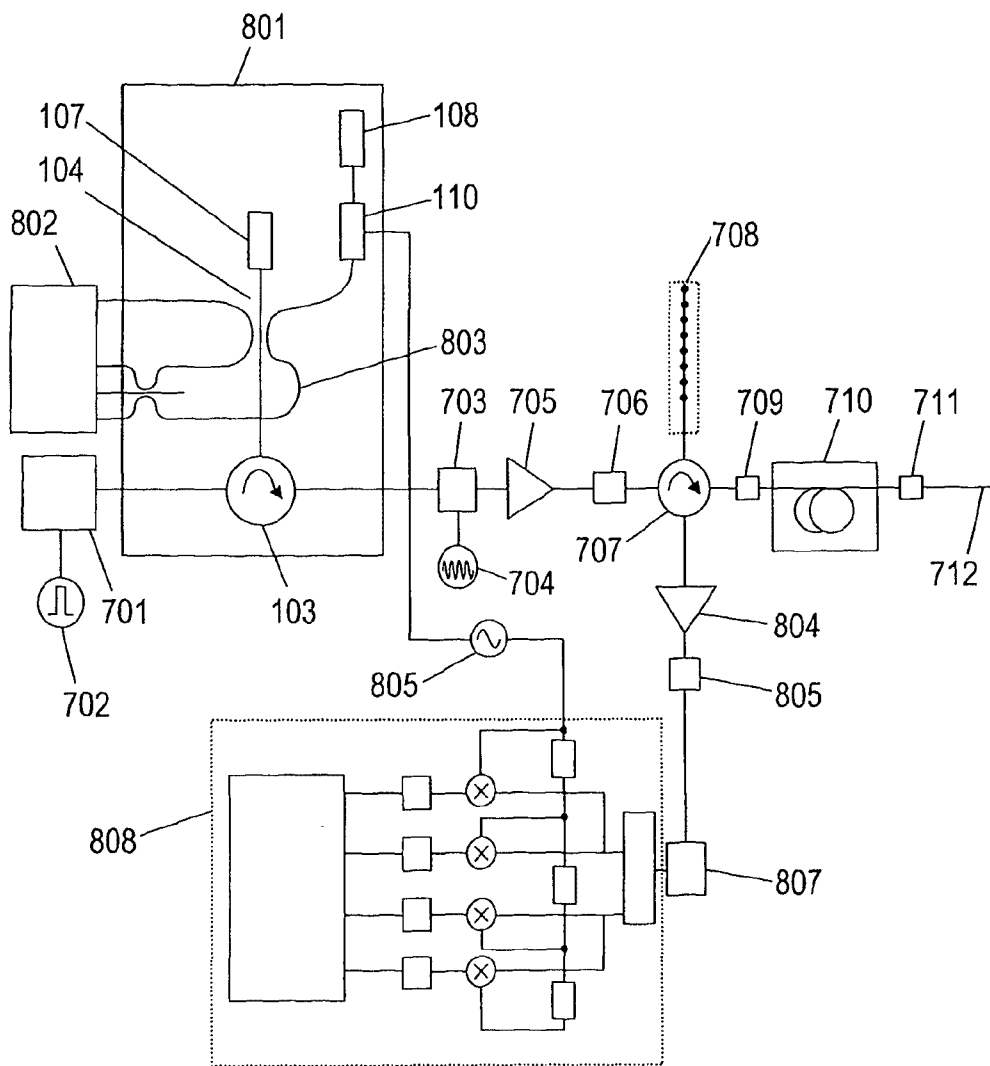


Fig. 8

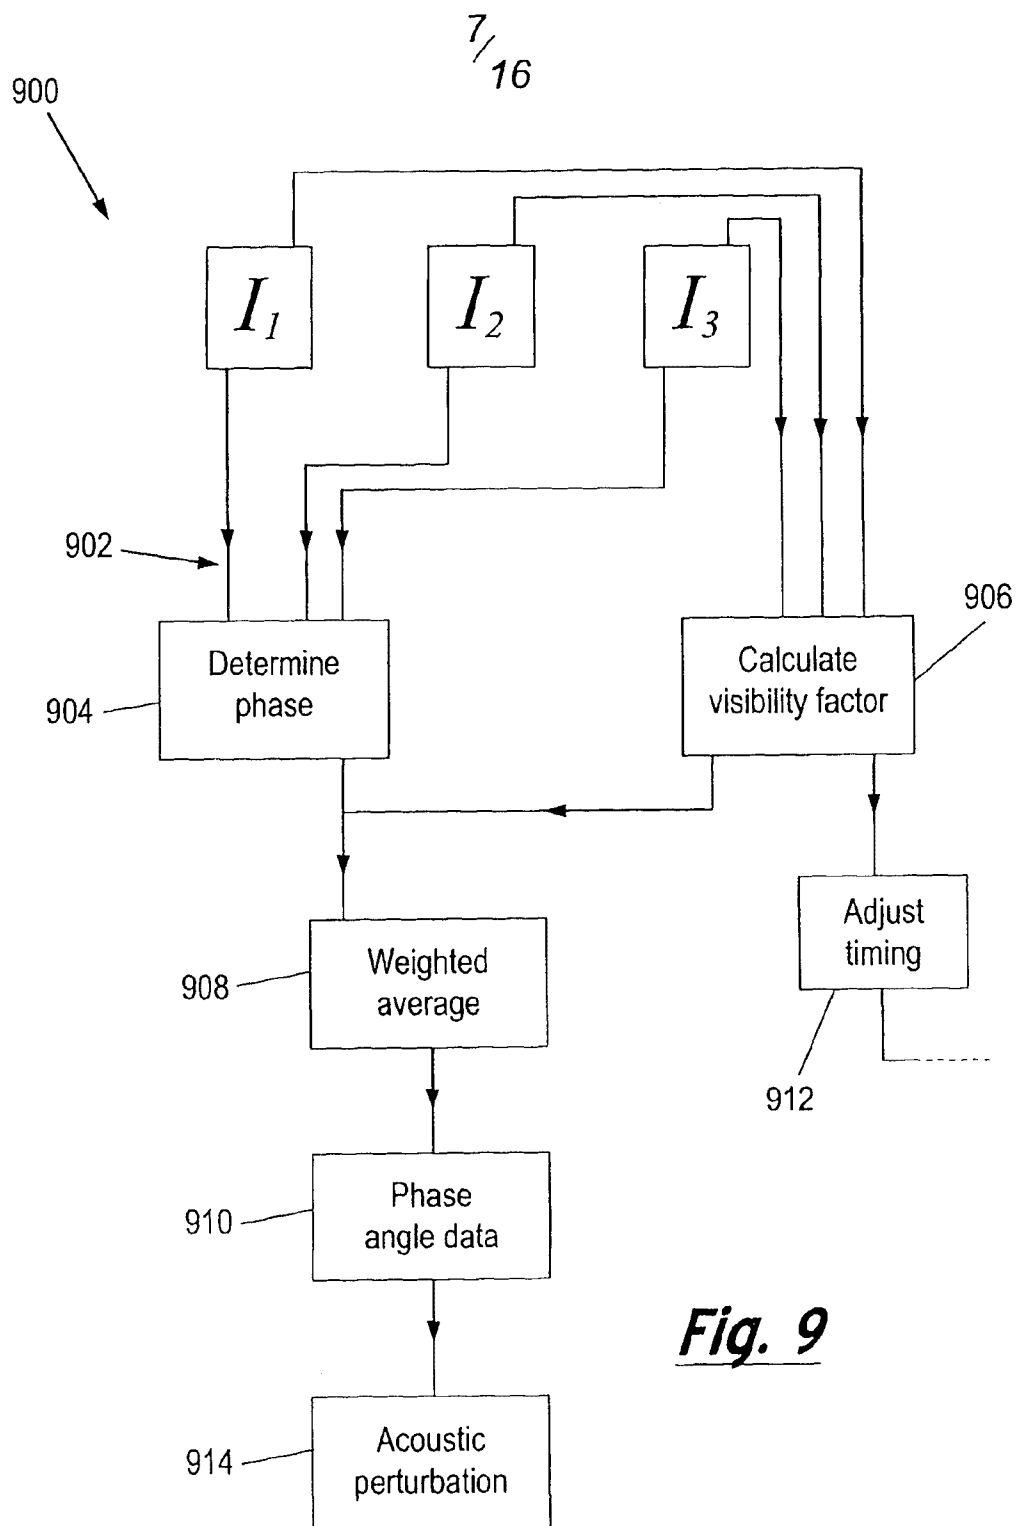


Fig. 9

8/
16

1000

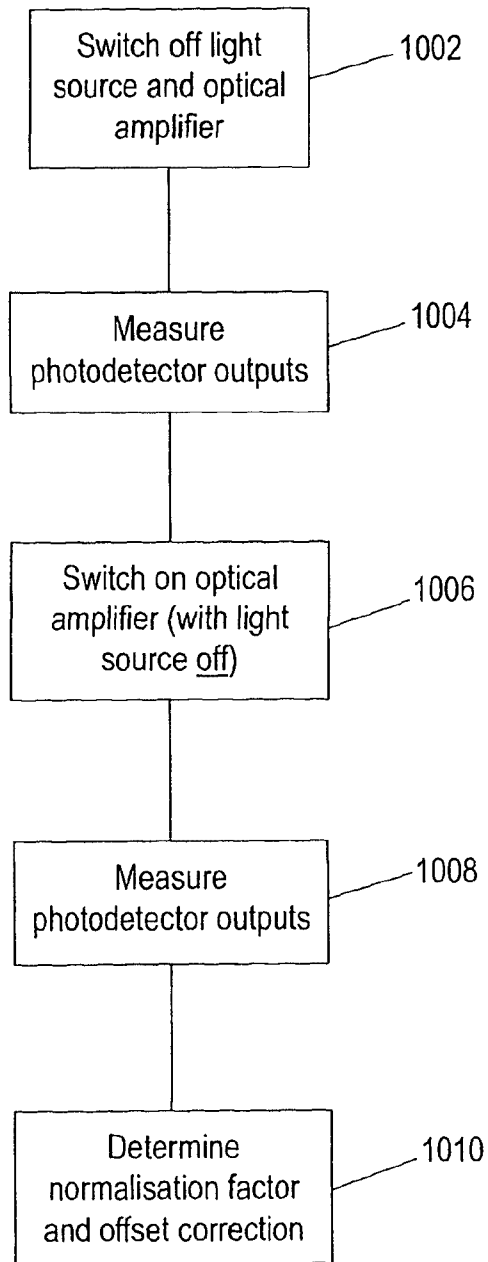


Fig. 10

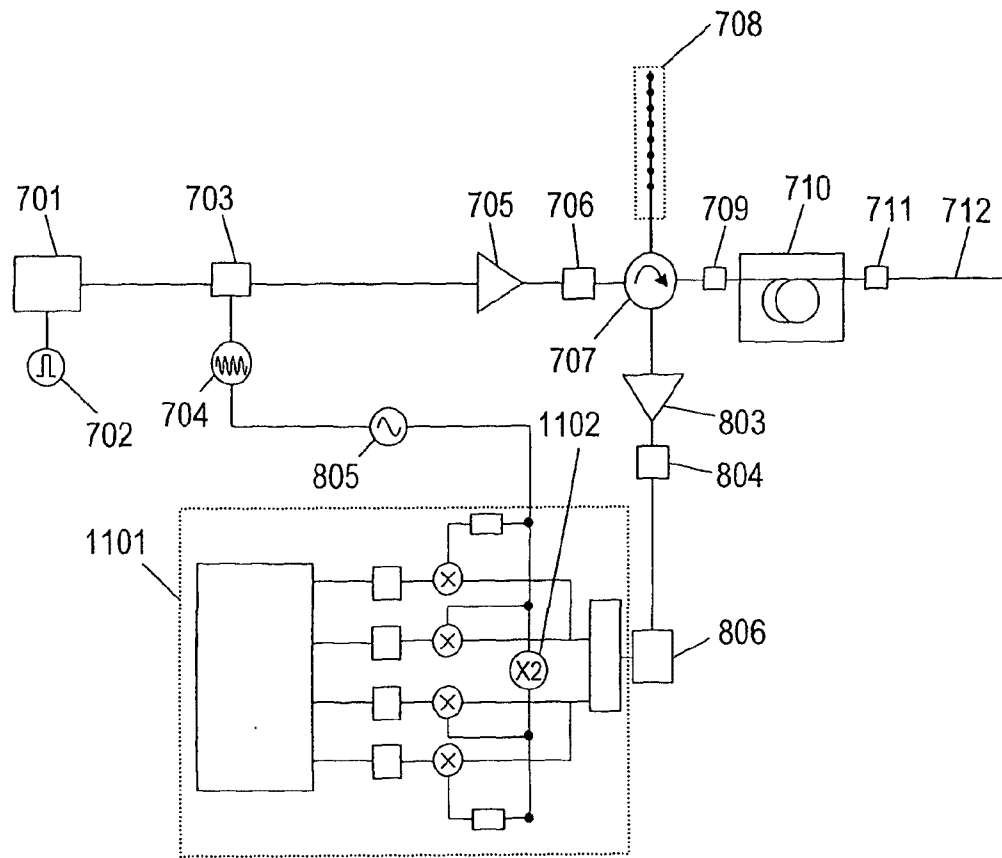


Fig. 11

10/
16

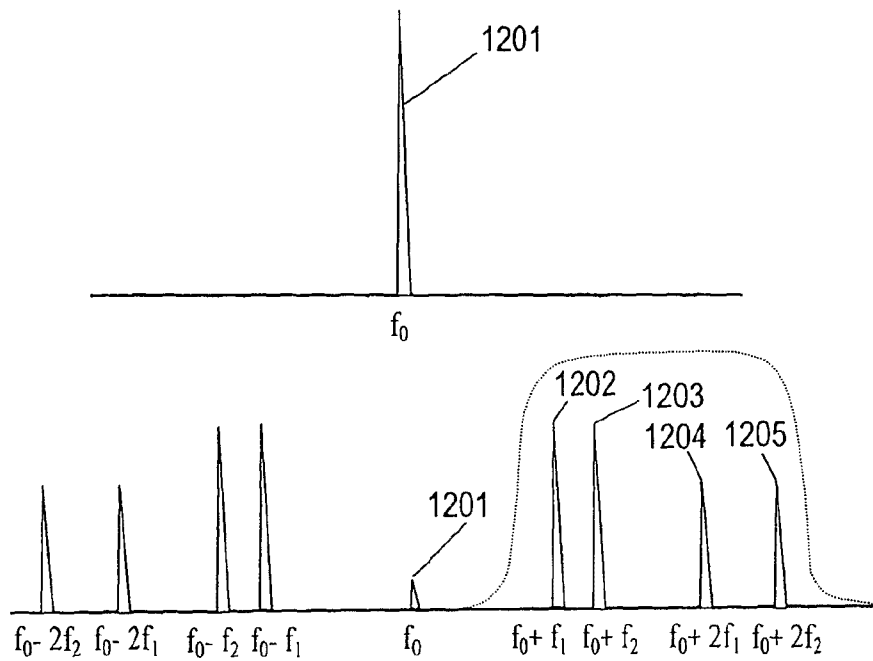


Fig. 12A

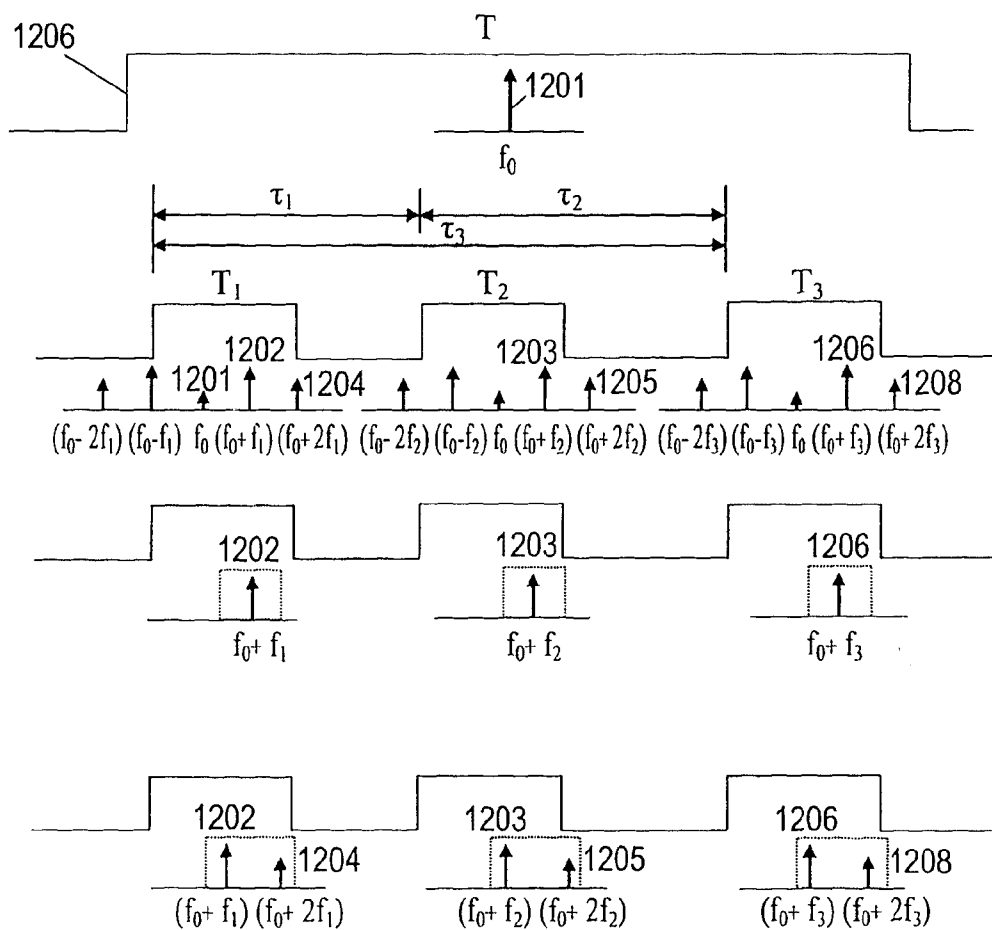


Fig. 12B

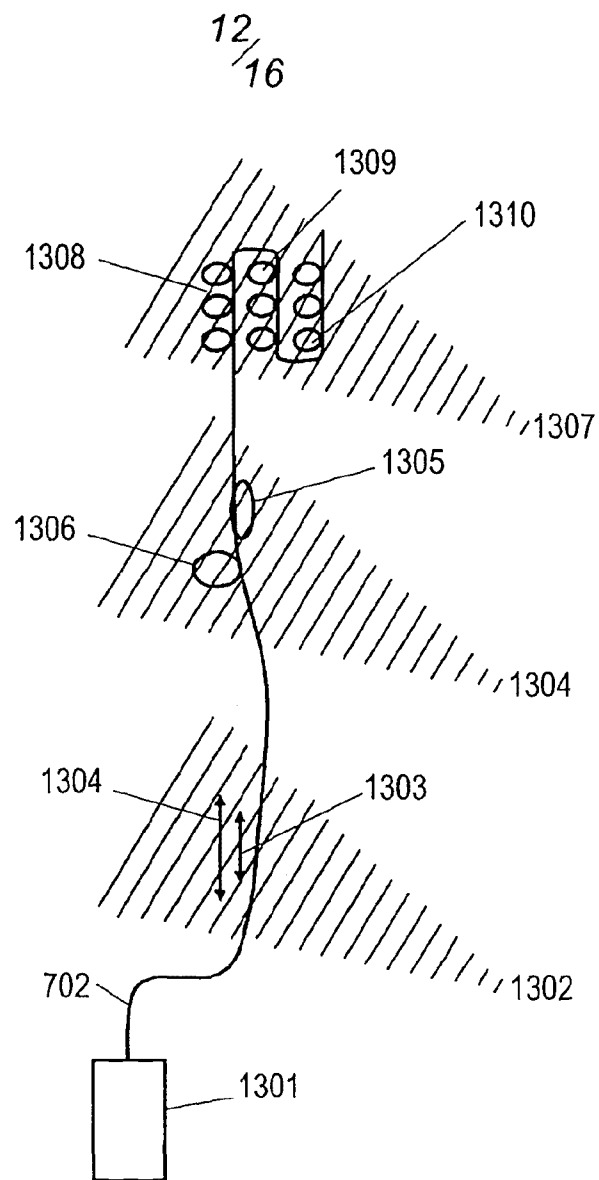
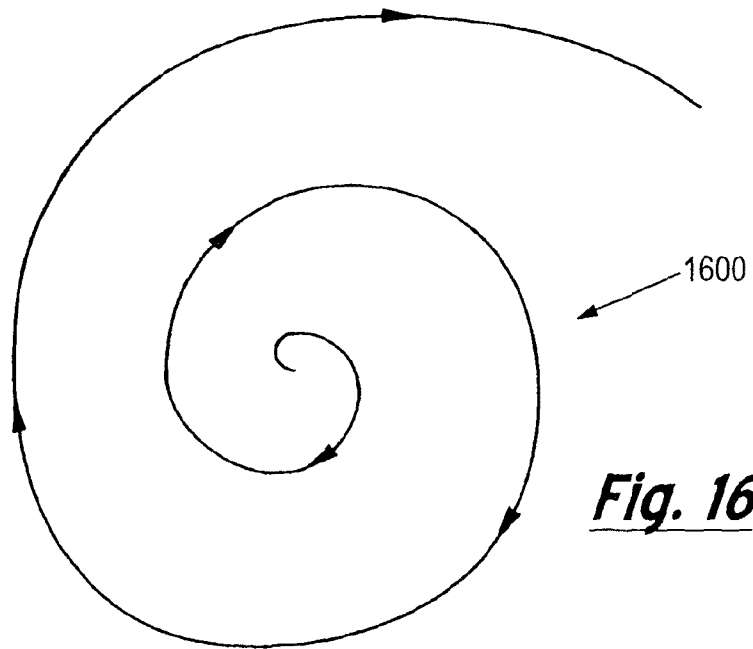
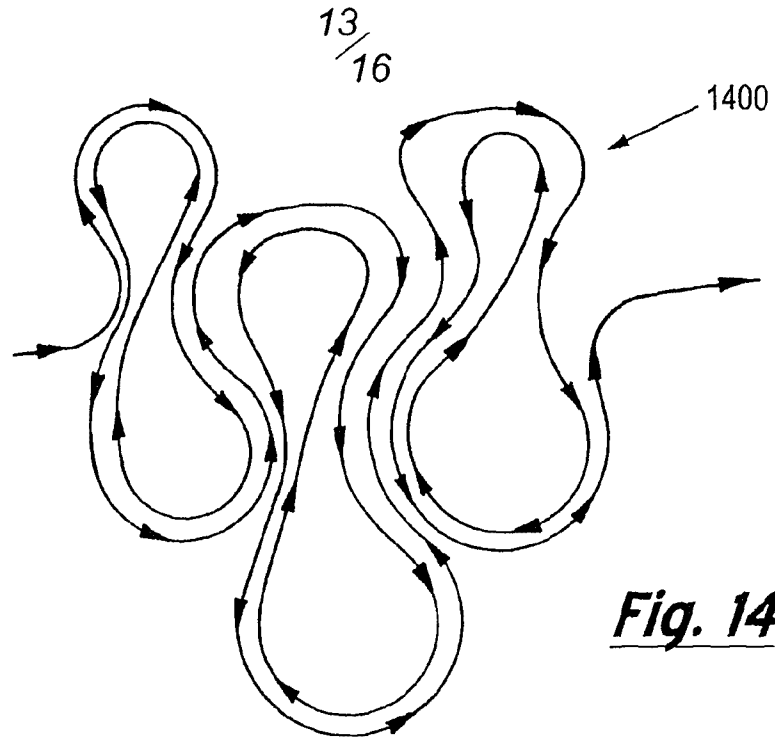


Fig. 13



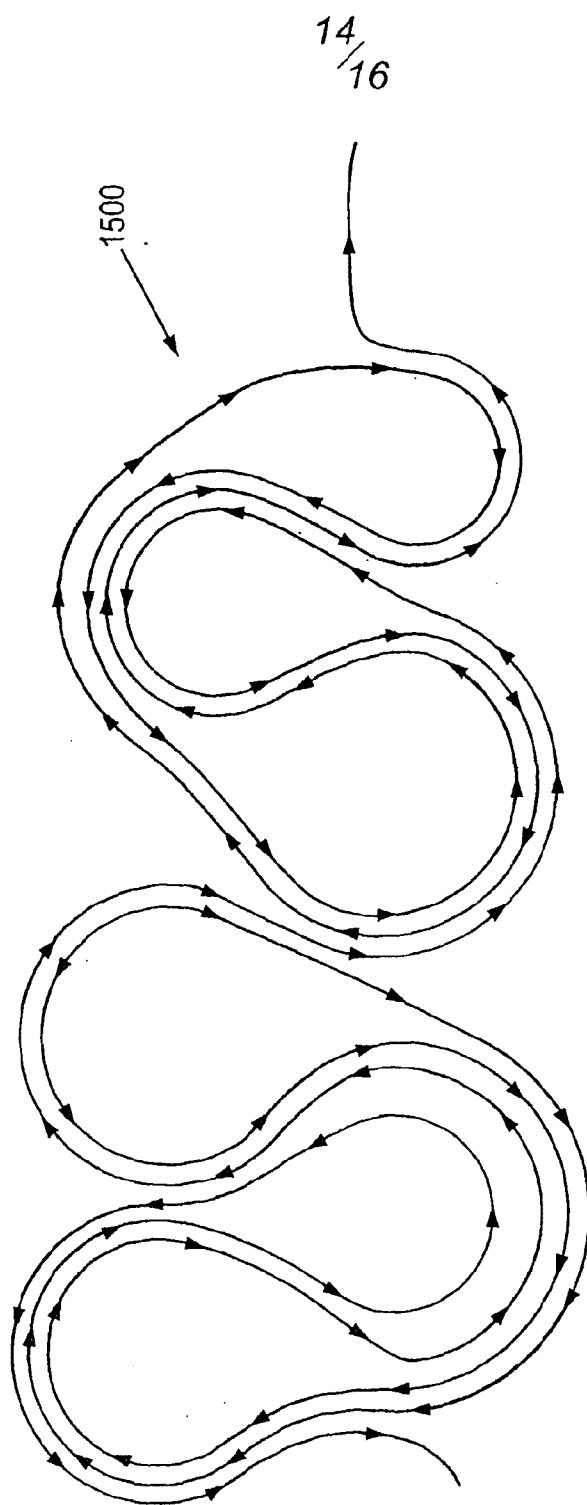


Fig. 15

15/
16

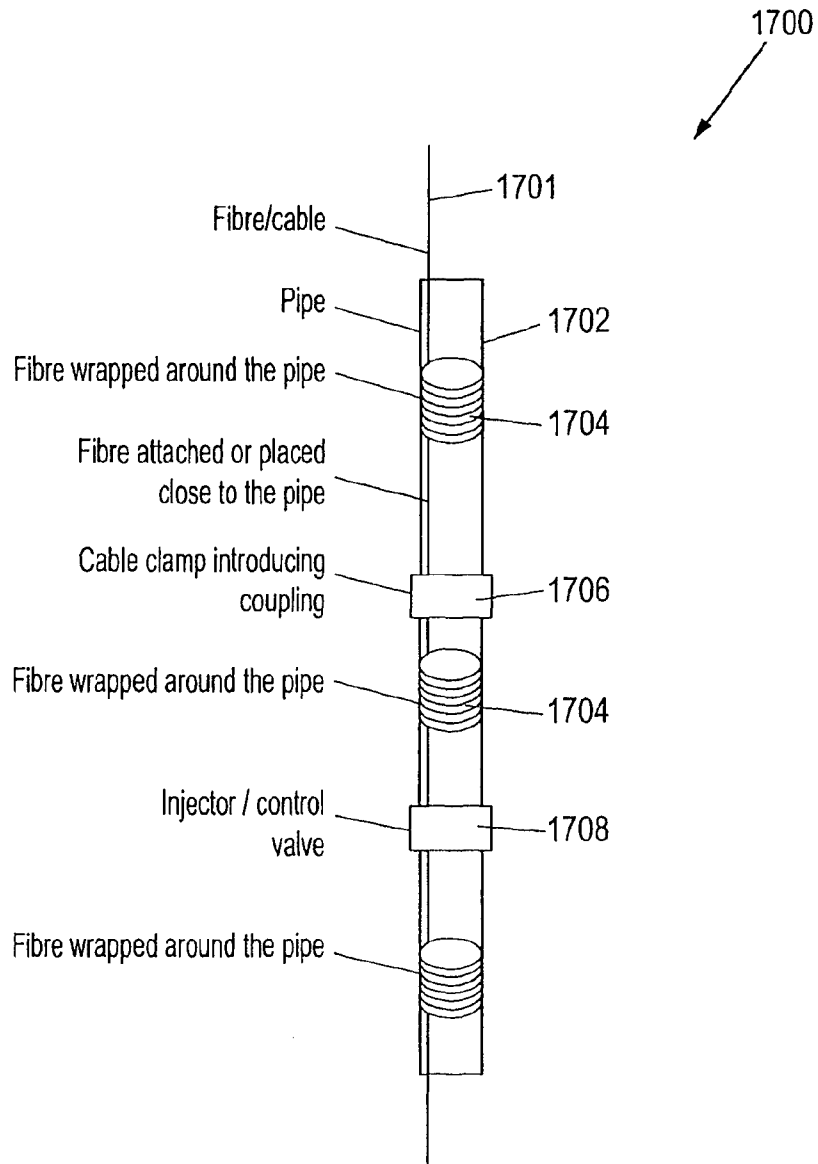


Fig. 17

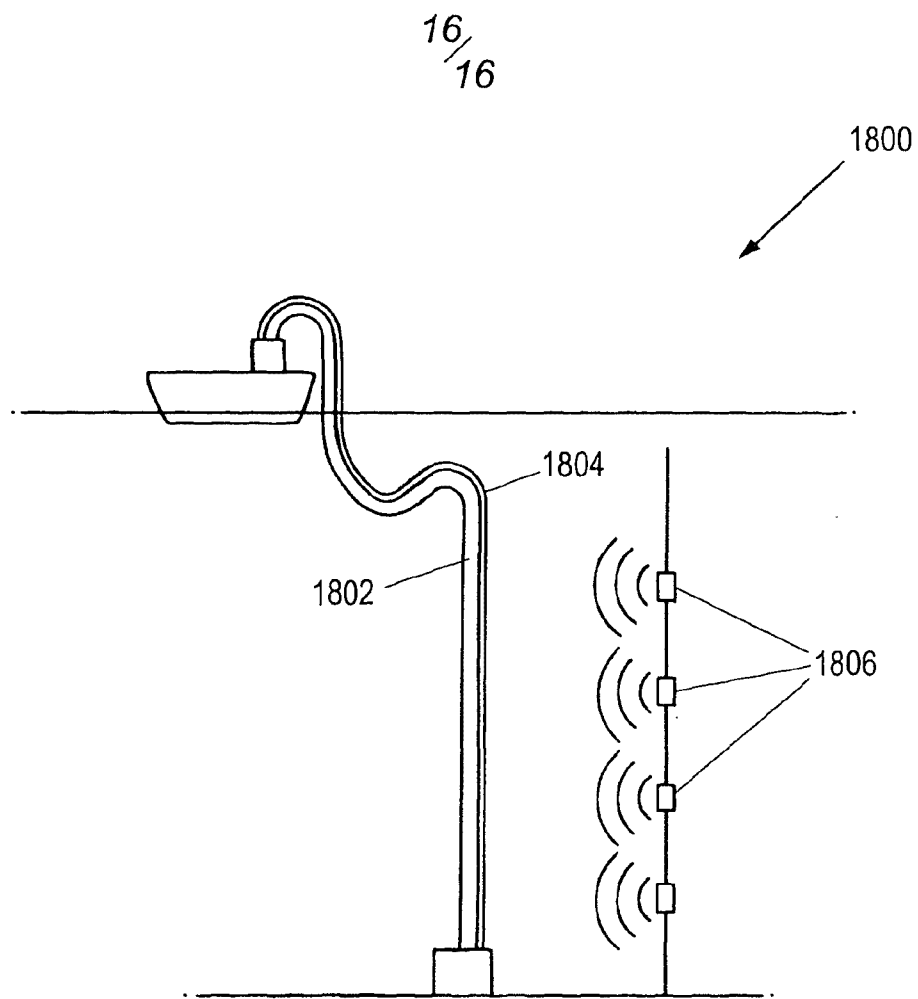


Fig. 18

