Office de la Propriété Intellectuelle du Canada
Un organisme d'Industrie Canada

Canadian Intellectual Property Office
An agency of Industry Canada

CA 2195849 C 2005/05/17

(11)(21) 2 195 849

(12) BREVET CANADIEN
CANADIAN PATENT

(13) C

(86) Date de dépôt PCT/PCT Filing Date: 1995/07/28
(87) Date publication PCT/PCT Publication Date: 1996/02/15
(45) Date de délivrance/Issue Date: 2005/05/17
(85) Entrée phase nationale/National Entry: 1997/01/23
(86) N° demande PCT/PCT Application No.: US 1995/009484
(87) N° publication PCT/PCT Publication No.: 1996/004738
(30) Priorité/Priority: 1994/08/02 (284,775) US

(51) Cl.Int.^{6}/Int.Cl.^{6} H04B 7/08, H04L 1/00

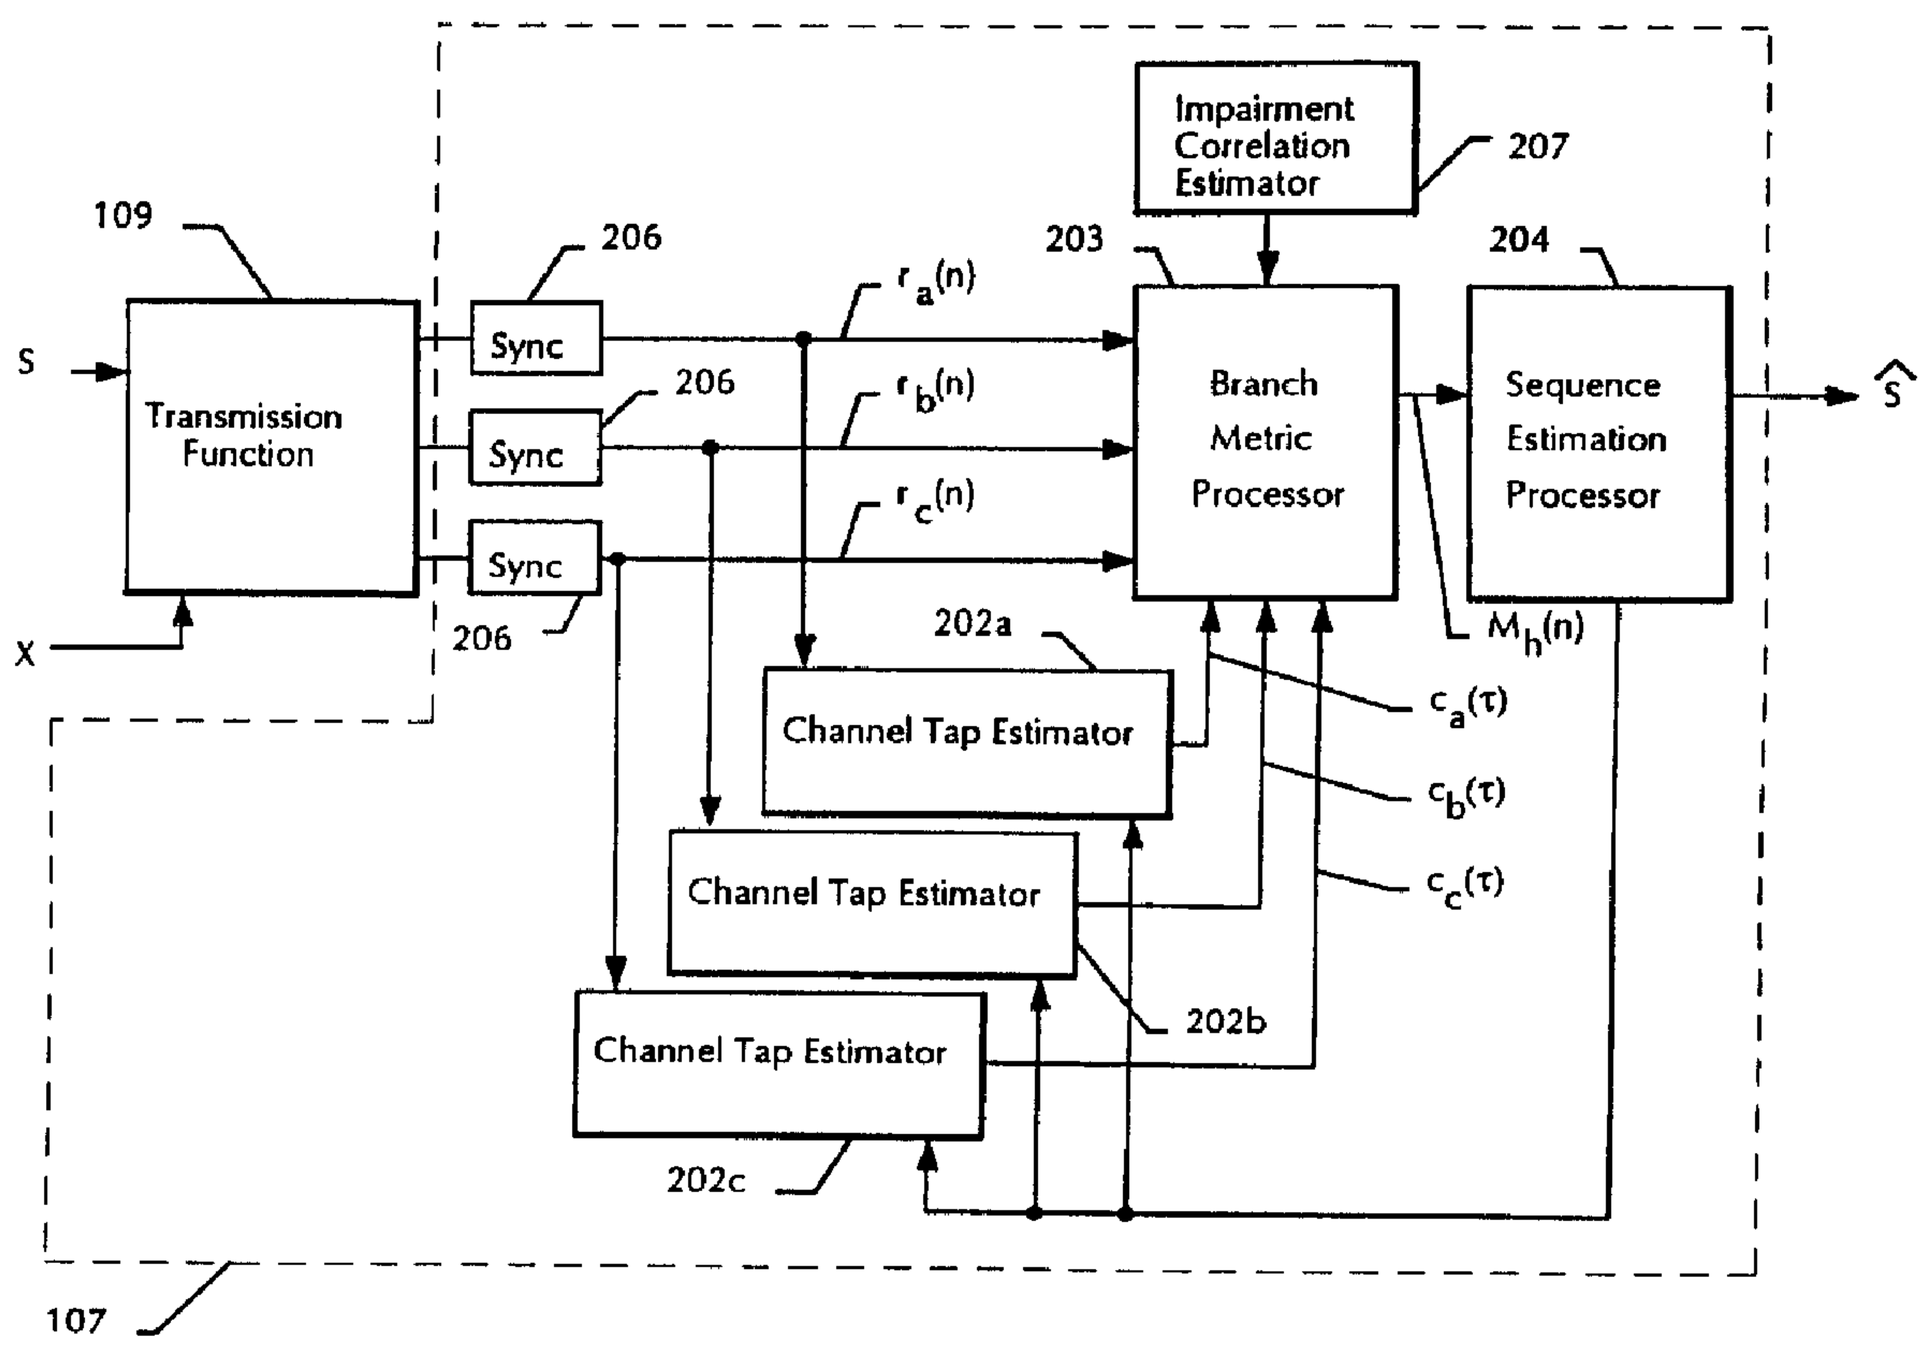
(72) Inventeur/Inventor:
BOTTOMLEY, GREGORY E., US

(73) Propriétaire/Owner:
ERICSSON, INCORPORATED, US

(74) Agent: MARKS & CLERK

(54) Titre : PROCEDE ET DISPOSITIF D'ELIMINATION COMBINEE DES INTERFERENCES DANS DES SYSTEMES DE TELECOMMUNICATIONS CELLULAIRES NUMERIQUES MULTI-ANTENNES

(54) Title: METHOD OF AND APPARATUS FOR INTERFERENCE REJECTION COMBINING IN MULTI-ANTENNA DIGITAL CELLULAR COMMUNICATIONS SYSTEMS



(57) Abrégé/Abstract:
A digital radio communications system is presented in which the deleterious effects of fading, time dispersion and interference found in the channel are mitigated by using interference rejection and diversity combining. Digital signals representative of digital

CA 2195849 C 2005/05/17

(11)(21) 2 195 849

(13) C

(57) Abrégé(suite)/Abstract(continued):
symbol sequences are transmitted through a radio channel in which the signals may be corrupted by fading, time dispersion and interference. The corrupted signals are received by a receiver having one or more antennas. The received signals are processed to form a received signal sample stream $r_d(kT_s)$ for each of the antennas. Estimated received signal samples for each of the antennas are produced by combining hypothesized signal sequences and models of each channel. The received signal samples and the estimated received signal samples are processed in conjunction with an estimate of the impairment correlation properties to produce branch metrics to be used by a Viterbi, or other sequence estimation, algorithm. The branch metric processor may assume one of several configurations depending on whether or not the channel is time-varying.

ABSTRACT OF THE DISCLOSURE

A digital radio communications system is presented in which the deleterious effects of fading, time dispersion and interference found in the channel are mitigated by using interference rejection and diversity combining. Digital signals representative of digital symbol sequences are transmitted through a radio channel in which the signals may be corrupted by fading, time dispersion and interference. The corrupted signals are received by a receiver having one or more antennas. The received signals are processed to form a received signal sample stream $r_d(kT_s)$ for each of the antennas. Estimated received signal samples for each of the antennas are produced by combining hypothesized signal sequences and models of each channel. The received signal samples and the estimated received signal samples are processed in conjunction with an estimate of the impairment correlation properties to produce branch metrics to be used by a Viterbi, or other sequence estimation, algorithm. The branch metric processor may assume one of several configurations depending on whether or not the channel is time-varying.

METHOD OF AND APPARATUS FOR INTERFERENCE REJECTION COMBINING IN MULTI-ANTENNA DIGITAL CELLULAR COMMUNICATIONS SYSTEMS

FIELD OF THE INVENTION

The present invention relates generally to the demodulation of digitally modulated radio signals received by a plurality of antennas and more specifically to the diversity combining of radio signals subjected to multipath fading, time-dispersion and interference.

BACKGROUND OF THE INVENTION

A common problem that occurs in the radio transmission of signals is that the signals are sometimes lost as a result of multipath fading and interference which may exist in a radio transmission channel. Throughout the following, the terms radio transmission channel, radio channel, and channel are used equivalently to refer to the same item. There are basically two multipath effects: flat fading and time dispersion. Flat fading arises from the interaction of the transmitted signal, or main ray, and reflections thereof, or echoes, which arrive at the receiver at approximately the same time. If there are a large number of reflections, flat fading gives rise to a Rayleigh distribution. Time dispersion occurs when the echoes are delayed with respect to the main ray. There may also exist in the radio environment signal sources which are not orthogonal to the desired signal. Non-orthogonal signals, or interference, often come from radios operating on the same frequency (*i.e.*, co-channel interference) or from

radios operating on neighboring frequency bands (*i.e.*, adjacent-channel interference); non-orthogonal signal sources are referred to as interferers.

One known method of reducing the influence of Rayleigh fading is to use a receiver having two or more mutually separated antennas, for instance as described in **Mobile Communications Design Fundamentals** by William C. Y. Lee, Howard W. Sams & Co., Indiana, USA. In section 3.5.1 of this book several examples are given describing how signals from two receiver amplifiers with separate antennas can be combined to counteract fading. These techniques are generally referred to as diversity combining.

Time dispersion may be advantageously corrected by using an equalizer. In the case of digital signal modulation, a maximum likelihood sequence estimation (MLSE) equalizer such as described in **Digital Communications, 2nd Ed.**, by John G. Proakis, Mc-Graw Hill Book Company, New York, New York, USA, 1989 may be used. In section 6.7 of this book, various methods are described for detecting signals corrupted by time dispersion, or inter-symbol interference (ISI), using MLSE equalization.

The impact of other signal interference may be reduced by employing array processing techniques with multiple antennas. For example, adaptive beamforming can be used to "steer" a null in the antenna pattern in the direction of an interferer.

Recently, methods have been proposed that partially solve the problems of multipath fading and interference. In U.S. Patent 5,191,598 to Bäckström, *et al.*, for example, the problem of accurately detecting signals in the presence of flat fading and time dispersion is overcome by using a Viterbi-algorithm having a transmission function estimated for each antenna.

A method of accurately detecting signals in the presence of flat fading and interference was presented in the *IEEE Transactions on Vehicular Technology*, Vol. 42, No. 4, Nov. 1993, J. H. Winters: "Signal Acquisition and Tracking with Adaptive Arrays in the Digital Mobile Radio System IS-54 with Flat Fading".

In a practical radio communication system, there commonly co-exists flat fading, time dispersion, and interference. While the above-mentioned techniques address some of these problems, there exists a need to simultaneously and jointly combat flat fading, time dispersion, and interference.

Summary of the Invention

In view of the foregoing background, it is therefore an object of the present invention to jointly combat and correct for the simultaneous existence of flat fading, time dispersion, and interference.

A method is presented for generating and transmitting a signal representing a transmitted symbol sequence and receiving the signal on one or more antennas. The signal is processed to produce received signal samples for each of the antennas. Channel taps are estimated for each of the antennas. Impairment correlation properties are also estimated. Branch metrics are formed in a branch metric processor using the received signal samples and the channel tap and impairment correlation estimates. The branch metrics are employed in a sequence estimation algorithm to estimate the transmitted symbol sequence.

In one embodiment, branch metrics are formed by generating hypothetical symbol sequences and filtering the hypothetical signal sequences with the channel tap estimates to produce hypothesized received signal samples for each antenna. The hypothesized received signal samples are subtracted from the received signal samples to produce hypothesized error signals which are processed with the estimate of impairment correlation properties to produce branch metrics.

In another embodiment, an estimate of impairment correlation properties is formed by generating tentative detected symbol sequences which are filtered with the channel tap estimates to produce detected signal samples for each antenna. The detected signal samples are subtracted from the received signal samples to produce detected error signals which are processed with the estimate of impairment correlation properties to produce an update of the estimate of the impairment correlation properties.

In still another embodiment, branch metrics are performed by generating hypothetical symbol sequences and calculating pre-computed values for all of the hypothetical symbol sequences using the channel tap estimates and the estimates of impairment correlation properties. The pre-computed values are processed with the received signal samples to produce branch metrics.

In yet a further embodiment branch metrics are formed by generating hypothetical symbol sequences and combining the received signal samples with the

channel tap estimates and the estimate of impairment correlation properties to produce metric multipliers which are processed with the hypothetical symbol sequences to produce branch metrics.

An apparatus is also presented comprising a digital transmitter for generating and transmitting a signal representing a transmitted symbol sequence, a receiver for receiving said signal on one or more antennas, an analog to digital converter for converting the signal into received signal samples for each of the antennas, a channel tap estimator for estimating channel taps for each of the antennas to produce channel tap estimates, an impairment correlation estimator for estimating impairment correlation properties to produce an estimate of impairment correlation properties. The apparatus also comprises a branch metric processor coupled to the channel tap estimators, the impairment correlation estimator and the received signal samples for forming branch metrics using the received signal samples, the channel tap estimates, and the estimate of impairment correlation properties. The output of the branch metric processor is coupled to a sequence estimation processor which produces an estimate of said transmitted symbol sequence.

In another embodiment the branch metric processor comprises a symbol sequence generator for generating hypothetical symbol sequences coupled to a digital filter for filtering the hypothetical signal sequences with the channel tap estimates to produce hypothesized received signal samples for each antenna. The filters are coupled to means for subtracting said hypothesized received signal samples from the received signal samples to produce hypothesized error signals which are coupled to means for processing said hypothesized error signals with said estimate of impairment correlation properties to produce branch metrics.

Yet another embodiment is presented in which the impairment correlation estimator comprises a symbol sequence generator for generating tentative detected symbol sequences coupled to a digital filter for filtering the tentative detected symbol sequences with the channel tap estimates to produce detected signal samples for each antenna. The filter outputs are coupled to means for subtracting said detected signal samples from the received signal samples to produce detected error signals which are coupled to means for processing said detected error signals with said estimate of impairment correlation properties to produce an update of the estimate of impairment correlation properties.

These and other features and advantages of the present invention will be readily apparent to one of ordinary skill in the art from the following written description when read in conjunction with the drawings in which like reference numerals refer to like elements.

Brief Description of the Drawings

Figure 1 is a schematic illustration of a digital radio communication system;

Figure 2 is a schematic illustration of a receiver processor and transmission function according to the present invention;

Figure 3 is a schematic illustration of a transmission function;

Figure 4 is a schematic illustration of a branch metric processor according to the present invention;

Figure 5 is a schematic illustration of an adaptive estimator of the impairment correlation properties;

Figure 6 is a schematic illustration of yet another embodiment of a branch metric processor according to the present invention;

Figure 7 is a schematic illustration of another embodiment of a receiver processor and a transmission function according to the present invention; and

Figure 8 is a schematic illustration of yet another embodiment of a receiver processor and a transmission function according to the present invention.

DESCRIPTION OF THE INVENTION

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, circuit components, techniques,

etc. In order to provide a thorough understanding of the invention. However it will be apparent to one of ordinary skill in the art that the present invention may be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, and circuits are omitted so as not to obscure the description of the present invention with unnecessary detail.

A radio transmitter and receiver system for a radio communication system is illustrated schematically in Figure 1. The radio communication system may operate using frequency division multiple access (FDMA), time division multiple access (TDMA), or code division multiple access (CDMA), or some combination thereof. A transmitter has a digital symbol generator **102** which receives an information carrying signal **101** and generates a corresponding digital symbol sequence, S. The symbols S are subjected to digital to analog (D/A) conversion, modulation, pulse shape filtering, amplification, and are transmitted as analog signal Y by digital transmitter **103** according to known techniques.

In addition to thermal noise, there may also exist an interferer **108** transmitting signal X which may be non-orthogonal to signal Y. Signals Y and X travel through separate radio channels and are intercepted by antennas **104** which are D in number.

Radio units **105** amplify, downconvert, and filter the received signals according to known methods to produce analog signals. Each analog signal is coupled to an analog-to-digital (A/D) converter **106**, which converts the analog signal into a received signal sample stream $r_d(kT_s)$, where T_s is the sample period, the reference numeral k is an integer counter, and the subscript d indicates that the signal arrives from the d^{th} antenna $1 \leq d \leq D$. The sampling period T_s may be less than the symbol period T. The received signal sample streams are collected in processor **107**, which processes these streams to produce an estimate of the transmitted digital symbol stream, $\hat{S}$. In later descriptions, transmission function **109** is used to refer to the signal path through digital transmitter **103**, the radio transmission channel (not shown in Figure 1), antennas **104**, radio units **105** and A/Ds **106** collectively.

The processing unit **107** is illustrated in greater detail in Figure 2 where, for simplicity, the number D of antennas is restricted to three: designated a, b, and c. Processing unit **107** may be, for example, a Digital Signal Processor (DSP) such as a TMS320C50 manufactured by Texas Instruments. The function of processing unit **107**

is to produce an estimate of the transmitted digital symbol stream $\hat{S}$ which accurately corresponds to the symbol sequence S which was originally transmitted.

Transmission function **109** produces the received signal sample streams $r_a(kT_s)$, $r_b(kT_s)$, and $r_c(kT_s)$ which are sent to processing unit **107** where they are processed in accordance with the present invention. The received signal sample streams $r_a(kT_s)$, $r_b(kT_s)$, and $r_c(kT_s)$ are coupled to a signal pre-processor, or sync, block **206** where the received signal sample streams are correlated with known timing/synchronization sequences as described, for example, by Giovanna, *et al.* "Fast Adaptive Equalizers for Narrow-Band TDMA Mobile Radio", *IEEE Transactions on Vehicular Technology,* Vol. 40, No. 2, May 1991, pp. 392-404. For the case of symbol-spaced demodulation, if the sample period T_s is less than symbol period, T, the signal pre-processor **206** performs a decimation of the received signal sample streams $r_a(kT_s)$, $r_b(kT_s)$, and $r_c(kT_s)$ to produce one sample per symbol: designated $r_a(n)$, $r_b(n)$, and $r_c(n)$ respectively. For the case of fractionally-spaced demodulation, more than one sample per symbol is generated.

Estimating circuits **202a, 202c,** and **202c** produce channel tap estimates $c_a(\tau)$, $c_b(\tau)$, and $c_c(\tau)$ which are used to model the radio transmission channel associated with each particular antenna. Initial channel tap estimates can be obtained from sync correlation values or least-squares estimation according to known techniques. If the channel must be tracked, it is typical to use received data and tentative symbol estimate values generated in the sequence estimation processor **204**. Channel tracking is known to those skilled in the art as discussed, for example, in **Digital Communications 2nd Ed.** by Proakis as previously mentioned, and by A. P. Clark and S. Hariharan, "Adaptive Channel Estimates for an HF Radio Link", *IEEE Trans. on Communications*, vol. 37, pp. 918-926, Sept. 1989. The channel tap estimates $c_a(\tau)$, $c_b(\tau)$, and $c_c(\tau)$ are coupled to the input of the branch metric processor **203.**

Also coupled to the branch metric processor **203** is an estimate of the impairment correlation properties obtained from impairment correlation estimator **207.** The estimate of the impairment correlation properties comprises information regarding the impairment correlation properties between the antennas **104,** or between relative sample phases as will be discussed in greater detail hereinafter. The impairment correlation estimator uses impairment process estimates to update and possibly track

the estimate of the impairment correlation properties which is discussed in further detail in the ensuing text and figures.

Branch metric processor **203** uses received signal samples $r_a(n)$, $r_b(n)$, and $r_c(n)$, channel tap estimates $c_a(\tau)$, $c_b(\tau)$, and $c_c(\tau)$, and the estimate of the impairment correlation properties to form branch metric $M_h(n)$. This branch metric is used, for example, in a sequence estimation processor **204** to develop tentative and final estimates of the transmitted symbols.

It will be appreciated by one of ordinary skill in the art how the present invention operates when fractionally-spaced (T/M) equalization is employed. In this case, each signal preprocessor **206** produces M samples per symbol period, which correpond to M different sampling phases. This gives rise to M received signal sample streams per antenna. As a result, branch metric processor **203** receives D times M sample streams. As before, the channel tap estimators **202a - 202c** produce channel tap estimates for antennas a - c respectively. However, these channel tap estimates are more in number, as estimates for each sampling phase must be provided. Also, the impairment correlation estimator **207** estimates impairment correlation properties over antennas and sampling phases. This is done by treating the D antennas and M sampling phases as D times M antennas. As a result, the branch metric processor operates in a manner equivalent to having D times M antennas and one sample per symbol. It is apparent that the present invention can be applied to the case of one receive antenna and fractionally-spaced equalization.

The transmission function **109** is illustrated in greater detail in Figure 3 where, for simplicity, the number of interferers is restricted to one. It is obvious to one skilled in the art that the present invention may also be used for the case where there are two or more interferers. The transmit function **109** begins with the signal path for the symbol sequence S through digital transmitter **103** which transmits analog signal Y. The analog signal Y propagates through a separate radio transmission channel to each of the three receiver antennas: radio channel **301a** to receiver antenna **104a**, radio channel **301b** to receiver antenna **104b**, and radio channel **301c** to receiver antenna **104c**. Similarly, interference signal X also propagates through three other separate radio channels **302a-302c** to receiver antennas **104a-104c** respectively. Radio channels **301a-301c** and **302a-302c** may introduce fading and time dispersion. Omnipresent thermal noise

processes n_a - n_c are also received by receiver antennas **104a-104c** respectively. Each antenna **104a-104c** is coupled to a radio unit **105a-105c** respectively which amplifies, downconverts, and filters the received signals according to known methods to produce an analog signal. Each analog signal is coupled to an analog-to-digital (A/D) converter **106a-106c** which converts the analog signals into received signal sample streams $r_a(kT_s)$, $r_b(kT_s)$, and $r_c(kT_s)$. One method for conversion from analog to digital is to use log-polar signal processing, as described in U. S. Patent 5,048,059 to Dent. For subsequent processing, a conversion from log-polar to rectangular samples is made, so that, for example, I and Q samples, sometimes referred to as complex samples, are used. By using log-polar signal processing initially, a limiting receiver which provides signal strength and phase samples can be used, and adaptive gain control can be made simple.

In an MLSE equalizer, all possible transmitted symbol sequences S are considered. In one implementation, hypothesized symbol values $s_h(n)$ are filtered by channel tap estimates $c_a(\tau)$, $c_b(\tau)$, and $c_c(\tau)$ to produce hypothesized received samples $r_{a,h}(n)$, $r_{b,h}(n)$, and $r_{c,h}(n)$ for each antenna. The differences between the hypothesized $r_{a,h}(n)$-$r_{c,h}(n)$ and the actual $r_a(n)$-$r_c(n)$ received signal sample streams, referred to as the hypothesis errors, give an indication of how good a particular hypothesis is. The squared magnitude of the hypothesis error is used as a metric to evaluate a particular hypothesis. The metric is accumulated for different hypotheses for use in determining which hypotheses are better using the sequence estimation algorithm. This process may be efficiently realized using the Viterbi algorithm, which is a known form of dynamic programming. A description of the Viterbi alrogithm may be found in Fomey, G., "The Viterbi Algorithm", *Proc. of the IEEE*, vol. 61, pp. 268-278, March, 1973. As is obvious to one of ordinary skill in the art, other sequence estimation algorithms, such as the M-algorithm, may also be used.

In an MLSE equalizer, there are states associated with different symbol sequence hypotheses $s_h(n)$. At a given iteration, there are previous states: each associated with an accumulated metric. Each pairing of a previous state with a current state results in a branch metric, $M_h(n)$. The candidate metric for a current state is then the sum of the branch metric $M_h(n)$ and the previously accumulated metric. For each current state, the previous state which gives the smallest candidate metric is selected as the predecessor state, and the smallest candidate metric becomes the accumulated

metric for the current state. For metric combining, as described in aforementioned U.S. Patent 5,191,598, the branch metric can be expressed as:

$$M_h(n) = [r(n) - \mathbf{C}s_h(n)]^H \mathbf{D}[r(n) - \mathbf{C}s_h(n)]$$

where:

$$r(n) = [r_a(n) r_b(n) r_c(n)]$$

$$\mathbf{C} = \begin{bmatrix} c_a(0) & \cdots & c_a(N_t - 1) \\ c_b(0) & \cdots & c_b(N_t - 1) \\ c_c(0) & \cdots & c_c(N_t - 1) \end{bmatrix}$$

$$\mathbf{s}_h(n) = [s_h(n) s_h(n-1) \ldots]^T$$

$$\mathbf{D} = \begin{bmatrix} K_a & 0 & 0 \\ 0 & K_b & 0 \\ 0 & 0 & K_c \end{bmatrix}$$

The channel tap estimates for each signal received on antenna **104a-104c** are designated by $c_a(\tau)$, $c_b(\tau)$, $c_c(\tau)$ respectively where τ is the delay (i.e. $\tau = 0$ is the main ray, $\tau = 1$ is the first echo, *etc.*). N_t is the number of channel taps estimated per antenna and K_a, K_b, K_c are weighting coefficients for antennas **104a-104c** respectively.

The present invention takes advantage of the fact that, from a diversity and equalization point-of-view, the impairment (interference + noise) on multiple receive antennas **104** is often correlated. By expanding diversity combining techniques to exploit this correlation, significant gains are realized. For optimal performance, a whitening, or decorrelation, process may be applied and the optimum branch metric may include the inverse of the impairment correlation matrix. The optimum branch metric $M_h(n)$ according to the present invention is:

$$M_h(n) = [r(n) - C(n)s_h(n)]^H A(n)[r(n) - C(n)s_h(n)] = e_h{}^H(n) A(n) e_h(n)$$

where:

$A(n) = R_{zz}(n)^{-1}$, or a related quantity; $R_{zz}(n) = E(z(n)z^H(n))$

$z(n) = [z_a(n)z_b(n)z_c(n)]^T$; $e_h(n) = r(n) - C(n)s_h(n)$

The time varying nature of the channel and the impairment correlation are denoted with time index n. The $R_{zz}(n)$ matrix is referred to as the impairment correlation matrix at discrete time, n. The A(n) matrix (*i.e.*, the A-matrix) is the inverse of the $R_{zz}(n)$ matrix, or a related quantity such as the adjoint or pseudo-inverse. As is obvious to one of ordinary skill in the art, $R_{zz}(n)$ and A(n) are specific examples of impairment correlation properties of which other forms are known. Throughout the following, the term A-matrix is used generically to refer to any estimate of the impairment correlation properties.

The impairments on antennas **104a-104c** at time n are designated by $z_a(n)$, $z_b(n)$, and $z_c(n)$ respectively. For a given hypothesis, $e_h(n)$ is an estimate of the impairment process. As shown above, the A-matrix, A(n), is the inverse of the impairment correlation matrix $R_{zz}(n)$. For the case of uncorrelated impairment (*i.e.*, no interferer) the A-matrix reduces to diagonal matrix D. When the signal is known or detected correctly, the impairment is given by:

$$z(n) = r(n) - C(n)s_{det}(n)$$

where:

$$s_{det}(n) = [s_{det}(n)s_{det}(n-1)\ldots]^T$$

Note that $s_{det}(n)$ is the known or detected symbol sequence at time n.

Determination of the A-matrix for use in the present invention can be performed in a number of ways depending upon the specific application and the required performance. The simplest approach is to use a fixed set of values for the A-matrix, stored in memory, that are never updated. These values depend primarily on the configuration of the receive antennas and on the carrier frequencies being employed. An alternative approach is to determine the A-matrix from synchronization information

and to keep the A-matrix values constant between synchronization, or other, known fields. At each new occurrence of the synchronization field, the A-matrix can be recomputed, with or without use of the previous A-matrix values. Another alternative approach is to use synchronization fields to initialize, or improve, the A-matrix values and then to use decisions made on the data field symbols to track the A-matrix values.

Also, consideration is given for the method used to track the A-matrix values. Since the A-matrix comprises information regarding the impairment correlation properties standard estimation methods for estimating correlation or inverse correlation matrices can be applied. Using either known or detected symbol values, impairment values can be obtained by taking the differences between the received signal sample streams $r_a(n)$-$r_c(n)$ and the hypothesized received signal sample streams $r_{a,h}(n)$-$r_{c,h}(n)$. At time n, this gives a vector of impairment values, denoted $\mathbf{z}(n)$; one value for each antenna. A straightforward way of forming the A-matrix is given by:

$$\mathbf{R}(n) = \lambda \mathbf{R}(n-1) + K\,\mathbf{z}(n)\,\mathbf{z}^{H}(n)$$

$$\mathbf{A}(n) = \mathbf{R}^{-1}(n)$$

K is a scaling constant, typically 1 or $\sqrt{(1-\lambda)}$. Because $\mathbf{R}(n)$ is a Hermitian matrix, only a portion of the matrix elements need be computed.

Such a straightforward approach is fairly high in complexity. One way to reduce complexity is to apply the matrix inversion lemma and update the A-matrix directly as:

$$\mathbf{A}(n) = \frac{1}{\lambda}\left[\mathbf{A}(n-1) - \left(\frac{1}{\lambda + \mathbf{z}(n)^{H}\,\mathbf{p}(n)}\right)\mathbf{p}(n)\,\mathbf{p}^{H}(n)\right]$$

where:

$$\mathbf{p}(n) = \mathbf{A}(n-1)\,\mathbf{z}(n)$$

Because the A-matrix is Hermitian, it is only necessary to compute those elements on the diagonal and either those elements above or below the diagonal.

These techniques for estimating and tracking the A-matrix are given only for purposes of illustration. In general, the A-matrix can be expressed and estimated in a variety of ways, as is obvious to one of ordinary skill in the art. See, for example, the book by S. Haykin, **Adaptive Filter Theory, Second Edition**, Prentice-Hall, Englewood Cliffs, N.J., 1991. The present invention may also be applied to the blind equalization

problem in which known synchronization sequences are absent. In this case, the A-matrix is estimated in a manner similar to how the channel is estimated.

For the purposes of illustration, the present invention will now be described in greater detail as exemplified in four different embodiments.

Description of Embodiment having a Symbol-Spaced Equalizer with Two Antennas and Adaptive Channel Estimates

In a first embodiment, a processor **107** having a symbol-spaced (i.e., T-spaced) equalizer is presented where the channel must be tracked over the data field, or burst. This embodiment is applicable to the digital cellular system defined by the IS-54B specification which has relatively long TDMA data bursts, or time slots, (6.67 milliseconds) with respect to time. For this embodiment, the branch metric processor **203** is illustrated in greater detail in Figure 4 where, for simplicity, the number of antennas is further restricted to two: designated a and b. This particular embodiment has usefulness in that the use of two receive antennas is common in many cellular systems which already employ some form of diversity combining. As before, it is obvious to one of ordinary skill in the art that this embodiment may also be employed in the case where there are three or more antennas.

The impairment correlation matrix $\mathbf{R}_{zz}$ and the inverse impairment correlation matrix **A** are defined as follows:

$$\mathbf{R}_{zz} = \mathbf{P} = \begin{bmatrix} p_{aa} & p_{ab} \\ p_{ab}^{*} & p_{bb} \end{bmatrix}$$

$$\mathbf{R}_{zz}^{-1} = \frac{1}{\left(p_{aa}p_{bb} - |p_{ab}|^2\right)} \begin{bmatrix} p_{bb} & -p_{ab} \\ -p_{ab}^{*} & p_{aa} \end{bmatrix} = w \begin{bmatrix} p_{bb} & -p_{ab} \\ -p_{ab}^{*} & p_{aa} \end{bmatrix} = \mathbf{A}$$

The variable p_{aa} denotes the impairment power received on antenna a; the variable p_{bb} denotes the impairment power received on antenna b. The off-diagonal matrix elements are the cross correlation values: p_{ab} denotes the correlation of the impairment received on antenna a with the conjugate of that received on antenna b.

The branch metric then becomes:

$$M_h(n) = e_h(n)^H A(n) e_h(n) = w\left[p_{bb}\left|e_{a,h}(n)\right|^2 - 2Re\left\{p_{ab} e_{a,h}(n)^* e_{b,h}(n)\right\} + p_{aa}\left|e_{b,h}(n)\right|^2\right]$$

where:

$$w = \frac{1}{p_{aa}p_{bb} - \left|p_{ab}\right|^2} \qquad \text{and} \qquad e_{d,h}(n) = r_d(n) - r_{d,h}(n)$$

The calculation of this branch metric is schematically illustrated in Figure 4.

A symbol sequence generator **410** generates hypothesized symbol sequences $s_h(n)$. These sequences are filtered in filters **400** using channel tap estimates $c_a(\tau)$ and $c_b(\tau)$ for antennas a and b to produce hypothesized received signal samples $r_{a,h}(n)$ and $r_{b,h}(n)$, respectively. The hypothesized received signal samples, $r_{a,h}(n)$, are subtracted from the actual received signal samples from antenna a, $r_a(n)$, in summing junction **401** to produce error signals $e_{a,h}(n)$. Similarly hypothesized received signal samples, $r_{b,h}(n)$, are subtracted from the actual received signal samples from antenna b, $r_b(n)$, in summing junction **402** to produce error signals $e_{b,h}(n)$. Blocks **403** form the squared magnitudes of the error signals $e_{a,h}(n)$ and $e_{b,h}(n)$. The squared magnitude for error signals $e_{a,h}(n)$ is multiplied at junction **406** by multiplier m_{aa}, the result being coupled to summing junction **408**. The squared magnitude for error signals $e_{b,h}(n)$ are multiplied at junction **407** by multiplier m_{bb}, the result being coupled to summing junction **408**. Finally, multiplier **404** forms the product of $e_{a,h}(n)$ and $e^*_{b,h}(n)$, the product of which is subsequently multiplied by multiplier m_{ab} in multiplier **405**, forming the real part only. The result is subtracted in summing junction **408**, the output of which is the branch metric $M_h(n)$. The multipliers m_{aa}, m_{bb}, and m_{ab} are related to the impairment correlation matrix by:

$$m_{aa} = wp_{bb}$$

$$m_{bb} = wp_{aa}$$

$$m_{ab} = 2wp_{ab}$$

As is obvious to one skilled in the art the w term is common to the branch metric calculation and may be applied in a different manner or even omitted when the denominator to w approaches zero.

At time n, the A matrix elements are updated as:

$$p_{aa}(n+1) = \lambda p_{aa}(n) + |e_a(n)|^2 K$$

$$p_{ab}(n+1) = \lambda p_{ab}(n) + e_a(n)e_b^*(n)K$$

$$p_{bb}(n+1) = \lambda p_{bb}(n) + |e_b(n)|^2 K$$

K is a scaling factor which, if equal to unity, is dropped from the calculation to reduce the number of computations. K may be derived from λ which is the so-called "forgetting factor".

A schematic illustration of the impairment correlation matrix update is shown in Figure 5. Tentative detected symbol values $s_{det}(n)$ from sequence estimation processor **204** are filtered in filters **500** using channel tap estimates $c_a(\tau)$ and $c_b(\tau)$ from channel tap estimators **202** for antennas a and b to produce expected received samples $r_{a,det}(n)$ and $r_{b,det}(n)$, respectively. Impairment signal $z_a(n)$ is produced by subtracting, in summing junction **501** $r_{a,det}(n)$ from the actual received signal samples from antenna a, $r_a(n)$. Similarly, impairment signal $z_b(n)$ is produced by subtracting, in summing junction **502** $r_{b,det}(n)$ from the actual received signal samples on antenna b, $r_b(n)$. If the tentative detected symbol values are correct and the channel tap estimates are accurate, then error signals $z_a(n)$ and $z_b(n)$ represent the impairment received on antennas a and b respectively. Impairment signals $z_a(n)$ and $z_b(n)$ are scaled by the root of the scaling factor K in multipliers **503** and **505** respectively to produce scaled impairment signals which are coupled to blocks **506** and **507**, respectively.

The impairment power received on antenna a, $p_{aa}(n)$, is multiplied in multiplier **511** by the forgetting factor, λ, and summed in junction **510** with the squared magnitude of the scaled impairment signal from block **506** to produce the updated impairment power $p_{aa}(n+1)$. The value of $p_{aa}(n+1)$ is then used to overwrite the memory location **515** of the previous impairment power $p_{aa}(n)$. Similarly, the previous impairment power received on antenna b, $p_{bb}(n)$, is multiplied in multiplier **513** by the forgetting factor, λ, and summed in junction **512** with the squared magnitude of the scaled error signal from block **507** to produce the updated impairment power $p_{bb}(n+1)$ which is used to overwrite the memory location **514** of the previous impairment power $p_{bb}(n)$. To produce the updated impairment cross correlation, the scaled error signal from multiplier **503** is

multiplied with the conjugate of the scaled error signal from multiplier **505** in junction **504**. Also, the previous cross-correlation $p_{ab}(n)$, stored in memory **516**, is scaled by the forgetting factor in multiplier **509**. The output of junction **504** is summed in junction **508** with the output of multiplier **509** to yield the updated cross correlation $p_{ab}(n+1)$. As before, the updated value $p_{ab}(n+1)$ is used to overwrite the memory location **516** of the previous value $p_{ab}(n)$.

There is typically a delay in updating the channel tap estimates which allows the tentative detected symbols to become reliable. In U.S. patent 5,164,961 by Gudmundson, *et al.*, this delay is avoided by using multiple channel models: one for each state in the sequence estimation processor **204**. With the present invention, there is also a delay in updating the A-matrix quantities. It is obvious to one of ordinary skill in the art that this delay can be avoided by using multiple A-matrices; one for each state in the sequence estimation processor **204**.

Description of Embodiment having a Symbol-Spaced Equalizer with Two Antennas and Fixed Channel Estimates

In a second embodiment a receiver having a symbol-spaced equalizer is presented where the channel can be considered static over a TDMA burst. This embodiment is applicable to the digital cellular system defined by the pan-European GSM specification which has relatively short (577 microseconds) TDMA data fields with respect to time. In this case, the impairment correlation matrix $\mathbf{R_{zz}}$, and hence the A-matrix, do not vary over the burst and can be estimated from the sync word embedded in the GSM frame. In this instance, the branch metric can be expressed as:

$$\mathbf{M_h(n) = [r(n) - Cs_h(n)]^H A(r(n) - Cs_h(n))}$$

$$\mathbf{M_h(n) = r^H(n)Ar(n) - 2Re\{s_h(n)^H C^H Ar(n)\} + s_h(n)^H C^H ACs_h(n)}$$

Referring now to Figure 6, processing time is saved by pre-computing and storing in memory **601** the following values for all possible hypothetical symbol sequences, $\mathbf{s_h}$:

$$f_h = 2A^H Cs_h$$

$$g_h = s_h{}^H C^H ACs_h$$

Using these pre-computed values, the branch metric may be simplified as:

$$M_h(n) = -\mathrm{Re}\left\{f_h{}^H r(n)\right\} + g_h$$

where:

$$r(n) = \left[r_a(n) r_b(n)\right]^T$$

For each hypothesized symbol sequence $s_h(n)$, the received signal samples $r_a(n)$ and $r_b(n)$ are multiplied in blocks **602** and **603**, respectively, by the corresponding f_h value, which was precomputed as described above and retrieved from memory **601**; only the real parts of the products are formed. The h-index refers to the hypothesis index which relates a particular f_h value to a particular hypothesized symbol sequence $s_h(n)$. The output of multipliers **602** and **603** are coupled to summing junction **604** where they are summed and the results passed to junction **605** where the output of junction **604** is subtracted from the corresponding g_h value: also precomputed as described above and retrieved from memory **601.** The result is the branch metric $M_h(n)$.

Description of Embodiment having a Fractionally-Spaced Equalizer with one or more Antennas and Adaptive Channel Estimates with Partial Optimization

In a further embodiment a receiver having one or more antennas coupled to a processor **107** comprising a fractionally-spaced (T/M) equalizer with adaptive channel tracking is presented. This particular embodiment is applicable to the digital cellular system defined by the IS-54B specification which has relatively long (6.67 milliseconds) time slots, or bursts, such that the channel tap estimates need to be updated during the duration of the burst. For this embodiment, receiver processor **107** is illustrated in greater detail in Figure 7 where, for simplicity, only a single interferer X and three antennas designated a, b, c are considered and M=2. It is obvious to one of ordinary skill in the art that the present invention may be practiced with a plurality of interferers and a plurality of antennas and a fractional spacing other than M=2. The transmission

function **109** shown in Figure 7 is, for example, identical to that described by Figure 3 which produces three received signal sample streams: $r_a(kT_s)$, $r_b(kT_s)$ and $r_c(kT_s)$. The received signal sample streams: $r_a(kT_s)$-$r_c(kT_s)$ are each coupled to a signal preprocessor **707** which performs correlations with a known synchronization pattern similar to that described for block **206** of Figure 2. Timing is determined from the correlation values using some optimization criterion, such as maximum energy in the channel taps. In this particular embodiment, since M has been chosen equal to 2, each signal pre-processor **707** produces, from each incoming received signal sample stream, two samples per symbol. For example, as shown in Figure 7, $r_{a,0}(n)$, $r_{a,1}(n)$ are generated from received signal sample stream $r_a(kT_s)$. Similarly $r_{b,0}(n)$, $r_{b,1}(n)$ and $r_{c,0}(n)$, $r_{c,1}(n)$ are produced from received signal sample streams $r_b(kT_s)$ and $r_c(kT_s)$ respectively. If, for example, M is chosen to be equal to 4 then 4 samples per symbol would be produced. These signals, $r_{a,0}(n)$, $r_{a,1}(n)$, $r_{b,0}(n)$, $r_{b,1}(n)$, $r_{c,0}(n)$, and $r_{c,1}(n)$, are coupled to the branch metric preprocessor **701** where they are treated as though each signal, $r_{a,0}(n)$, $r_{a,1}(n)$, $r_{b,0}(n)$, $r_{b,1}(n)$ $r_{c,0}(n)$, and $r_{c,1}(n)$, arrived from a separate antenna.

In practice, one can expand the expression for the branch metric and collect computations to provide a lower complexity implementation. Two techniques can be used to reduce complexity: a) expand the branch metric expression and collect like terms, and b) reorder at which iterations certain terms are computed. Using the first technique, metric multipliers, which can be pre-computed for all hypotheses, are expressed as:

$$e(j,n) = \mathbf{c}^H(j,n)\,\mathbf{A}(n)\,\mathbf{r}(n)$$

$$f(j,n) = \mathbf{c}^H(j,n)\,\mathbf{A}(n)\,\mathbf{c}(j,n)$$

$$g(j,k,n) = \mathbf{c}^H(j,n)\,\mathbf{A}(n)\,\mathbf{c}(k,n) \quad \text{where } k > j$$

where $\mathbf{c}(j,n)$ is the jth column of $\mathbf{C}(n)$. J is the number of channel taps. In other words, the received signal vector $\mathbf{r}(n)$ is modeled as:

$$\mathbf{r}(n) = \sum_{j=0}^{J} \mathbf{s}_h(n-j)\,\mathbf{c}(j,n)$$

The values e(j,n), f(j,n), and g(j,k,n) are computed by the branch metric preprocessor **701** and stored in memory (not shown). The indices j and k are ray indices. The values

e(j,n), f(j,n), and g(j,k,n) are referred to as metric multipliers since they can be used in multiplications to form the equalizer metrics in branch metric processor **704**. The values e(j,n), f(j,n), and g(j,k,n) are coupled to branch metric processor **704** which computes the branch metric $M_h(n)$ according to:

$$M_h(n) = -\sum_{j=0}^{J-1} 2\mathrm{Re}\left\{e(j,n)s_h^*(n-j)\right\} + \sum_{j=0}^{J-1} f(j,n)\left|s_h(n-T)\right|^2$$

$$+2\sum_{j=0}^{J-1}\sum_{k=j+1}^{J-1}\mathrm{Re}\left\{g(j,k,n)s_h^*(n-j)s_h(n-k)\right\}$$

In systems where all symbols have the same amplitude, such as binary phase shift keying (BPSK) and quaternary phase shift keying (QPSK) systems, the term $\left|s_h(n-T)\right|^2$ is a constant, independent of hypothesis. Thus, this term can be dropped, obviating the need to compute and use the f(j,n) metric multipliers.

While the embodiment was illustrated for the case of three antennas, it is obvious to one of ordinary skill in the art that the present invention may be practiced with a single antenna and fractionally-spaced equalization.

Description of Embodiment having a Fractionally-Spaced Equalizer with one or more Antennas and Adaptive Channel Estimates with Full Optimization

A further reduction in complexity can be achieved by employing the receiver processor **107** shown in Figure 8. The receiver processor **107** of Figure 8 is essentially identical to that of Figure 7 with the difference being the branch metric preprocessor **801** and the branch metric processor **804**. As shown in Figure 8, branch metric preprocessor **801** pre-computes and stores in memory (not shown) the following alternate metric multipliers:

$$Z(n) = \sum_j \mathbf{c}^H(j,n+j)\,\mathbf{A}(n+j)\,\mathbf{r}(n+j)$$

$$S(k,n) = \sum_j \mathbf{c}^H(j,n+j)\,\mathbf{A}(n+j)\,\mathbf{c}(j+k,n+j)$$

In practice, it may be advantageous to approximate **A**(n+j) with **A**(n) and **c**(j,n+j), **c**(j+k,n+j) with **c**(j,n), **c**(j+k,n) respectively. Alternate metric multipliers Z(n) and S(k,n)

are coupled to branch metric processor **804** which computes the branch metric according to:

$$M_h(n) = \mathrm{Re}\left\{ s_h^*(n)\left[2Z(n) + s_h(n)S(0,n) + \sum_{k\geq 1} 2S(k,n)s_h(n-k) \right] \right\}$$

While the embodiment was illustrated for the case of three antennas, it is obvious to one of ordinary skill in the art that the present invention may be practiced with a single antenna and fractionally-spaced equalization. While the present invention has further been described with respect to a particular digital cellular communications system, those skilled in the art will recognize that the present invention is also applicable to other communications systems and that therefore the present invention is not limited to the specific embodiments described and illustrated herein. Different embodiments and adaptations besides those shown and described as well as many variations, modifications and equivalent arrangements will now be reasonably suggested by the foregoing specification and drawings without departing from the substance or scope of the invention. While the present invention has been described herein in detail in relation to its preferred embodiments, it is to be understood that this disclosure is only illustrative and exemplary of the present invention and is merely for the purposes of providing a full and enabling disclosure of the invention. Accordingly, it is intended that the invention be limited only by the spirit and scope of the claims appended hereto.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method for reducing the effects of signal fading, time dispersion, and interference in a radio communications system, the method comprising the steps of:

(a) generating and transmitting a signal representing a transmitted symbol sequence;

(b) receiving said signal on at least two separate receive antennas;

(c) processing said signal to produce received signal samples for each of said receive antennas;

(d) estimating channel taps for each of said receive antennas to produce channel tap estimates;

(e) estimating impairment correlation properties among the receive antennas to produce an estimate of impairment correlation properties;

(f) forming branch metrics in a branch metric processor using said received signal samples, said channel tap estimates, and said estimate of impairment correlation properties; and

(g) employing said branch metrics in a sequence estimation algorithm to estimate said transmitted symbol sequence.

2. A method according to claim 1, in which processing step (c) employs log-polar signal processing.

3. A method according to claim 1 or 2, in which said estimate of impairment correlation properties is represented as the inverse of an impairment correlation matrix.

4. A method according to claim 1, 2 or 3, in which said forming step (f) comprises:

(a) generating hypothetical symbol sequences;

(b) filtering said hypothetical signal sequences with said channel tap estimates to produce hypothesized received signal samples for each antenna;

(c) subtracting said hypothesized received signal samples from the received signal samples to produce hypothesized error signals; and

(d) processing said hypothesized error signals with said estimate of impairment correlation properties to produce branch metrics.

5. A method of claim 1, 2 or 3, in which said forming step (f) comprises:

a) generating hypothetical symbol sequences;

b) calculating pre-computed values for all of said hypothetical symbol sequences using said channel tap estimates and said estimate of impairment correlation properties; and

c) processing said received signal samples with said pre-computed values to produce branch metrics.

6. A method according to claim 1, 2 or 3, in which said forming step (f) comprises:

a) generating hypothetical symbol sequences;

b) combining the received signal samples with channel tap estimates and said estimate of impairment correlation properties to produce metric multipliers e(j,n);

c) combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce metric multipliers f(j,n) and g(j,k,n); and

d) combining said metric premultipliers with said hypothetical symbol sequences to produce branch metrics.

7. A method according to claim 1, 2 or 3, in which said forming step (f) comprises:

a) generating hypothetical symbol sequences;

b) combining the received signal samples with channel tap estimates and said estimate of impairment correlation properties to produce metric multipliers e(j,n);

c) combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce metric multipliers g(j,k,n); and

d) combining said metric premultipliers with said hypothetical symbol sequences to produce branch metrics.

8. A method according to claim 1, 2 or 3, in which said forming step (f) comprises:

a) generating hypothetical symbol sequences;

b) combining said received signal samples with said channel tap estimates and said estimate of impairment correlation properties to produce Z(n) values;

(b) combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce S(k,n) values; and

(c) combining said Z(n) and S(k,n) values with said hypothetical symbol sequences to produce branch metrics.

9. A method according to any one of claims 1 to 8, in which said estimating step (e) comprises:

(a) generating tentative detected symbol sequences;

(b) filtering said tentative detected symbol sequences with said channel tap estimates to produce detected signal samples for each antenna;

(c) subtracting said detected signal samples from the received signal samples to produce detected error signals; and

(d) processing said detected error signals with said estimate of impairment correlation properties to produce an updated estimate of said impairment correlation properties.

10. The method of any one of claims 1 to 9, in which said employing step (g) further comprises the use of the Viterbi algorithm.

11. A method for reducing the effects of signal fading, time dispersion, and interference in a radio communications system, the method comprising the steps of:

(a) generating and transmitting a signal representing a transmitted symbol sequence;

(b) receiving said signal on one receive antenna;

(c) processing said signal to produce a plurality of received signal sample streams for said receive antenna such that there is one signal sample per symbol period in each of said streams;

(d) estimating channel taps for said receive antenna to produce channel tap estimates;

(e) estimating impairment correlation properties among said multiple receive signal sample streams to produce an estimate of impairment correlation properties;

(f) forming branch metrics in a branch metric processor using said received signal samples, said channel tap estimates, and said estimate of impairment correlation properties; and

(g) employing said branch metrics in a sequence estimation algorithm to estimate said transmitted symbol sequence.

12. A method according to claim 11, in which said forming step (f) comprises:

a) generating hypothetical symbol sequences;

b) combining the received signal samples with channel tap estimates and said estimate of impairment correlation properties to produce metric multipliers e(j,n);

c) combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce metric multipliers f(j,n) and g(j,k,n); and

d) combining said metric premultipliers with said hypothetical symbol sequences to produce branch metrics.

13. A method according to claim 11, in which said forming step (f) comprises:

a) generating hypothetical symbol sequences;

b) combining the received signal samples with channel tap estimates and said estimate of impairment correlation properties to produce metric multipliers e(j,n);

c) combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce metric multipliers g(j,k,n); and

d) combining said metric premultipliers with said hypothetical symbol sequences to produce branch metrics.

14. A method according to claim 11, in which said forming step (f) comprises:

a) generating hypothetical symbol sequences;

b) combining said received signal samples with said channel tap estimates and said estimate of impairment correlation properties to produce Z(n) values;

(b) combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce S(k,n) values; and

(c) combining said Z(n) and S(k,n) values with said hypothetical symbol sequences to produce branch metrics.

15. An apparatus for reducing the effects of signal fading, time dispersion, and interference in a radio communications system, the apparatus comprising:

a digital transmitter for generating and transmitting a signal representing a transmitted symbol sequence;

a receiver for receiving said signal on at least two separate receive antennas;

an analog to digital converter for converting said signal into received signal samples for each of said receive antennas;

a channel tap estimator for estimating channel taps for each of said receive antennas to produce channel tap estimates;

an impairment correlation estimator for estimating impairment correlation properties among the receive antennas to produce an estimate of impairment correlation properties;

a branch metric processor for forming branch metrics using said received signal samples, said channel tap estimates, and said estimate of impairment correlation properties; and

a sequence estimation processor employing said branch metrics to estimate said transmitted symbol sequence.

16. An apparatus of claim 15, in which said analog to digital converter employs log-polar signal processing.

17. An apparatus of claim 15 or 16, in which said branch metric processor comprises:

a symbol sequence generator for generating hypothetical symbol sequences;

means for filtering said hypothetical signal sequences with said channel tap estimates to produce hypothesized received signal samples for each antenna;

means for subtracting said hypothesized received signal samples from the received signal samples to produce hypothesized error signals; and

means for processing said hypothesized error signals with said estimate of impairment correlation properties to produce branch metrics.

18. An apparatus of claim 15 or 16, in which said branch metric processor comprises:

a symbol sequence generator for generating hypothetical symbol sequences;

means for calculating pre-computed values for all of said hypothetical symbol sequences using said channel tap

estimates and said estimate of impairment correlation properties; and

means for processing said received signal samples with said pre-computed values to produce branch metrics.

19. An apparatus of claim 15 or 16, in which said branch metric processor comprises:

a symbol sequence generator for generating hypothetical symbol sequences;

means for combining the received signal samples with the channel tap estimates and said estimate of impairment correlation properties to produce metric multipliers e(j,n) and for combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce metric multipliers f(j,n) and g(j,k,n); and for combining said metric multipliers with said hypothetical symbol sequences to produce branch metrics.

20. An apparatus of claim 15 or 16, in which said branch metric processor comprises:

a symbol sequence generator for generating hypothetical symbol sequences;

means for combining said received signal samples with said channel tap estimates and said estimate of impairment correlation properties to produce Z(n) values and combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce S(k,n) values and for combining said Z(n) and S(k,n) values with said hypothetical symbol sequences to produce branch metrics.

21. An apparatus of any one of claims 15 to 20, in which said impairment correlation estimator comprises:

a symbol sequence generator for generating tentative detected symbol sequences;

a digital filter for filtering said tentative detected symbol sequences with said channel tap estimates to produce detected signal samples for each antenna;

means for subtracting said detected signal samples from the received signal samples to produce detected error signals; and

means for processing said detected error signals with said estimate of impairment correlation properties to produce an update of the estimate the impairment correlation properties.

22. An apparatus of any one of claims 15 to 21, in which said sequence estimation processor employs the Viterbi algorithm.

23. An apparatus for reducing the effects of signal fading, time dispersion, and interference in a radio communications system, the apparatus comprising:

a digital transmitter for generating and transmitting a signal representing a transmitted symbol sequence;

a receiver for receiving said signal on one receive antenna;

an analog to digital converter for converting said signal into a plurality received signal sample streams for said receive antenna such that there is one signal sample per symbol period in each of said streams;

a channel tap estimator for estimating channel taps for said receive antenna to produce channel tap estimates;

an impairment correlation estimator for estimating impairment correlation properties among the receive signal sample streams to produce an estimate of impairment correlation properties;

a branch metric processor for forming branch metrics using said received signal samples, said channel tap

estimates, and said estimate of impairment correlation properties; and

a sequence estimation processor employing said branch metrics to estimate said transmitted symbol sequence.

24. An apparatus of claim 23, in which said branch metric processor comprises:

a symbol sequence generator for generating hypothetical symbol sequences;

means for combining the received signal samples with the channel tap estimates and said estimate of impairment correlation properties to produce metric multipliers e(j,n) and for combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce metric multipliers f(j,n) and g(j,k,n); and for combining said metric multipliers with said hypothetical symbol sequences to produce branch metrics.

25. An apparatus of claim 23, in which said branch metric processor comprises:

a symbol sequence generator for generating hypothetical symbol sequences;

means for combining said received signal samples with said channel tap estimates and said estimate of impairment correlation properties to produce Z(n) values and combining said channel tap estimates with one another and said estimate of impairment correlation properties to produce S(k,n) values and for combining said Z(n) and S(k,n) values with said hypothetical symbol sequences to produce branch metrics.

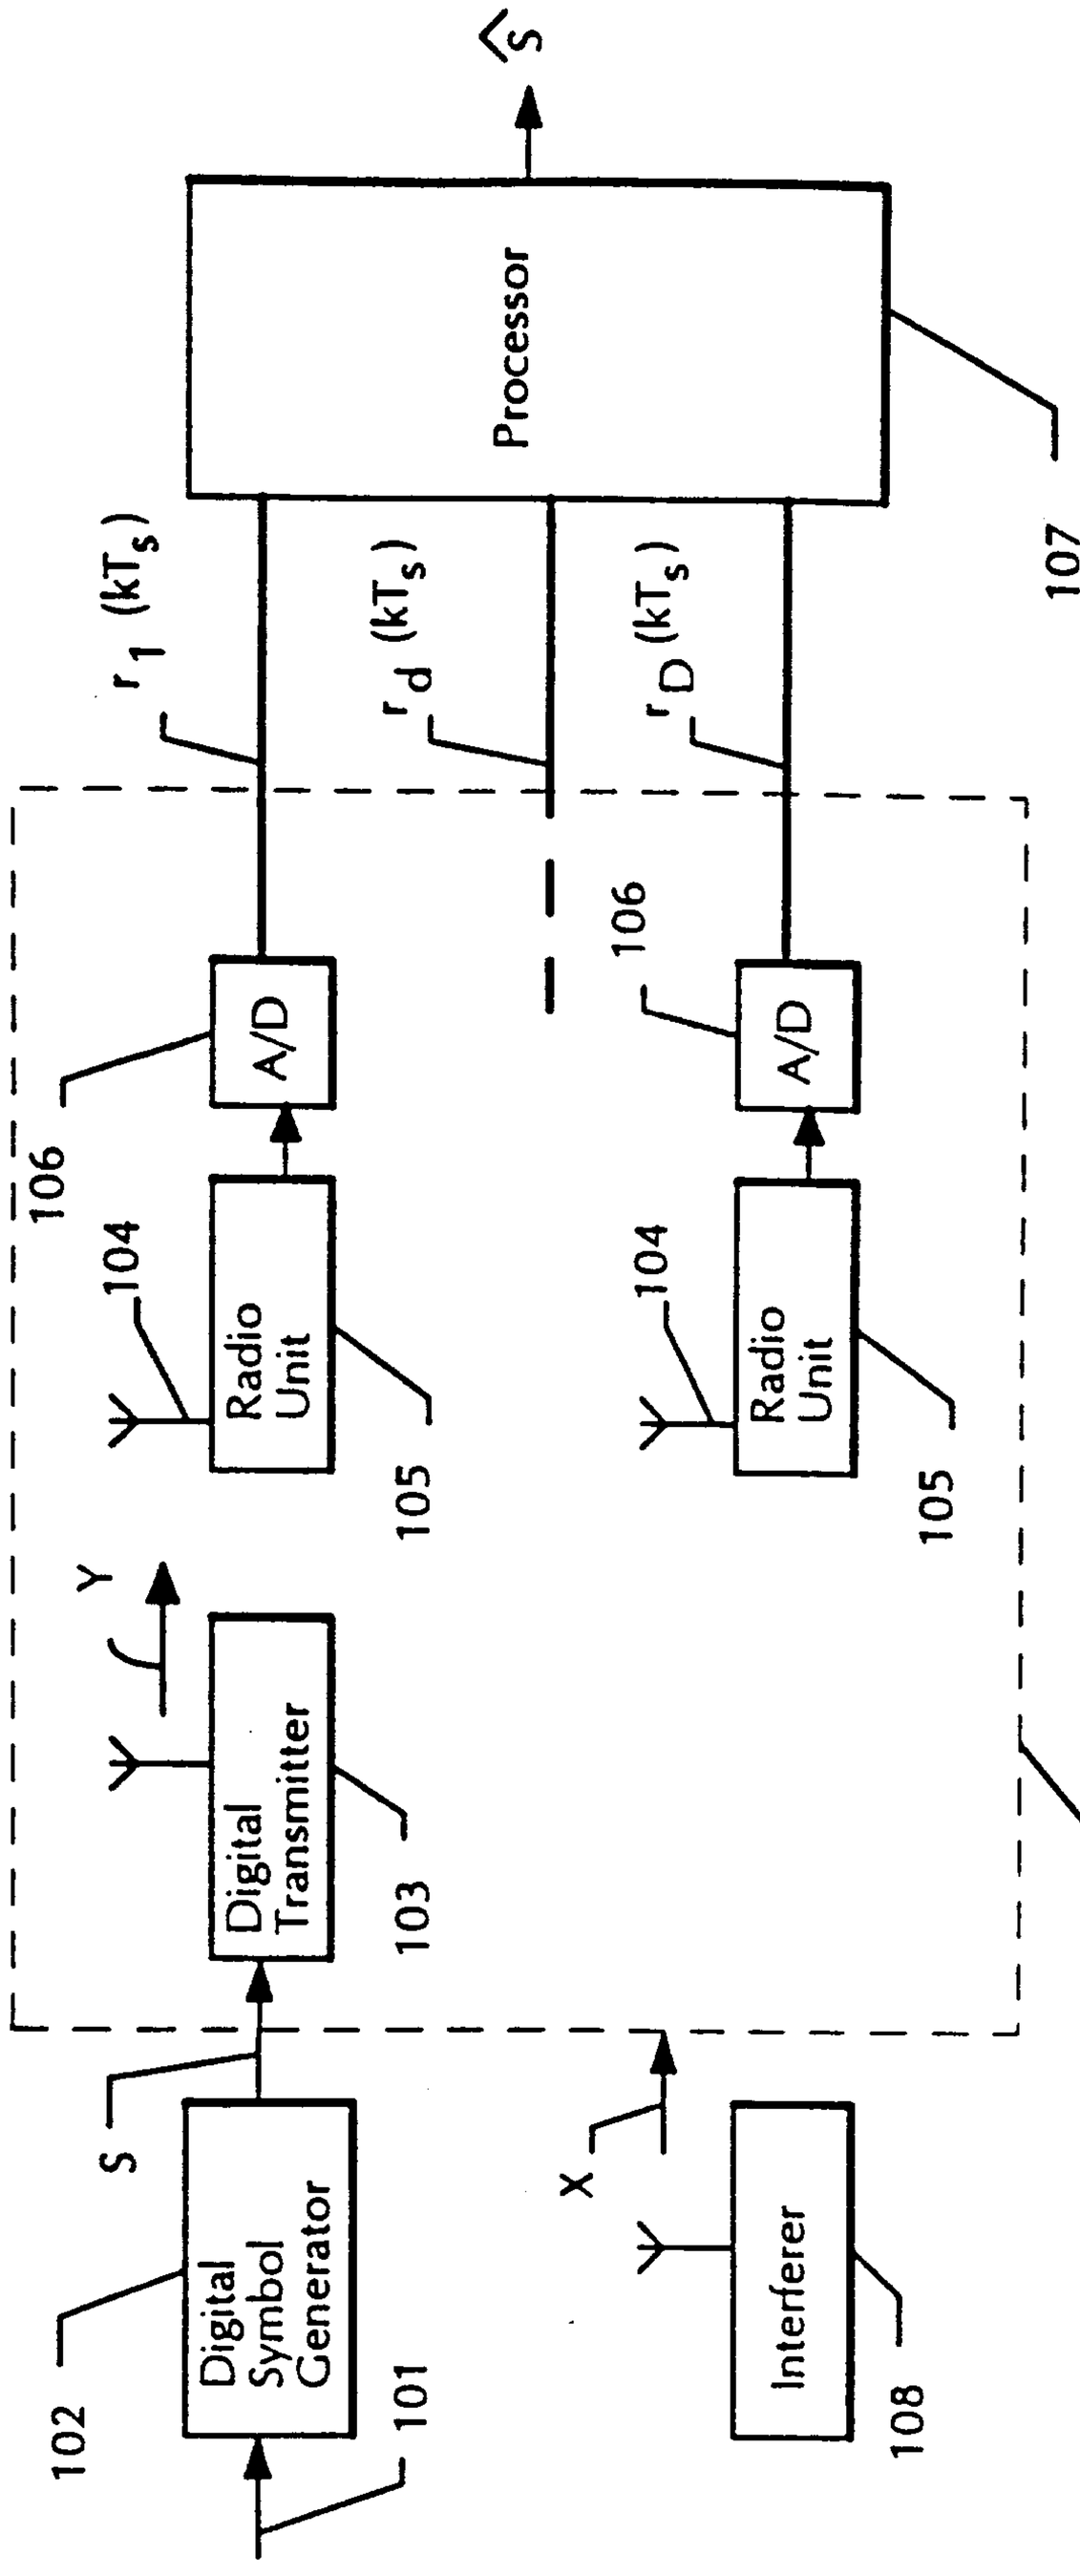

S
Processor
107
r_1 (kT_s)
r_d (kT_s)
r_D (kT_s)
106
A/D
104
Radio Unit
105
Y
Digital Transmitter
103
S
Digital Symbol Generator
102
101
X
Interferer
108
109

Figure 1

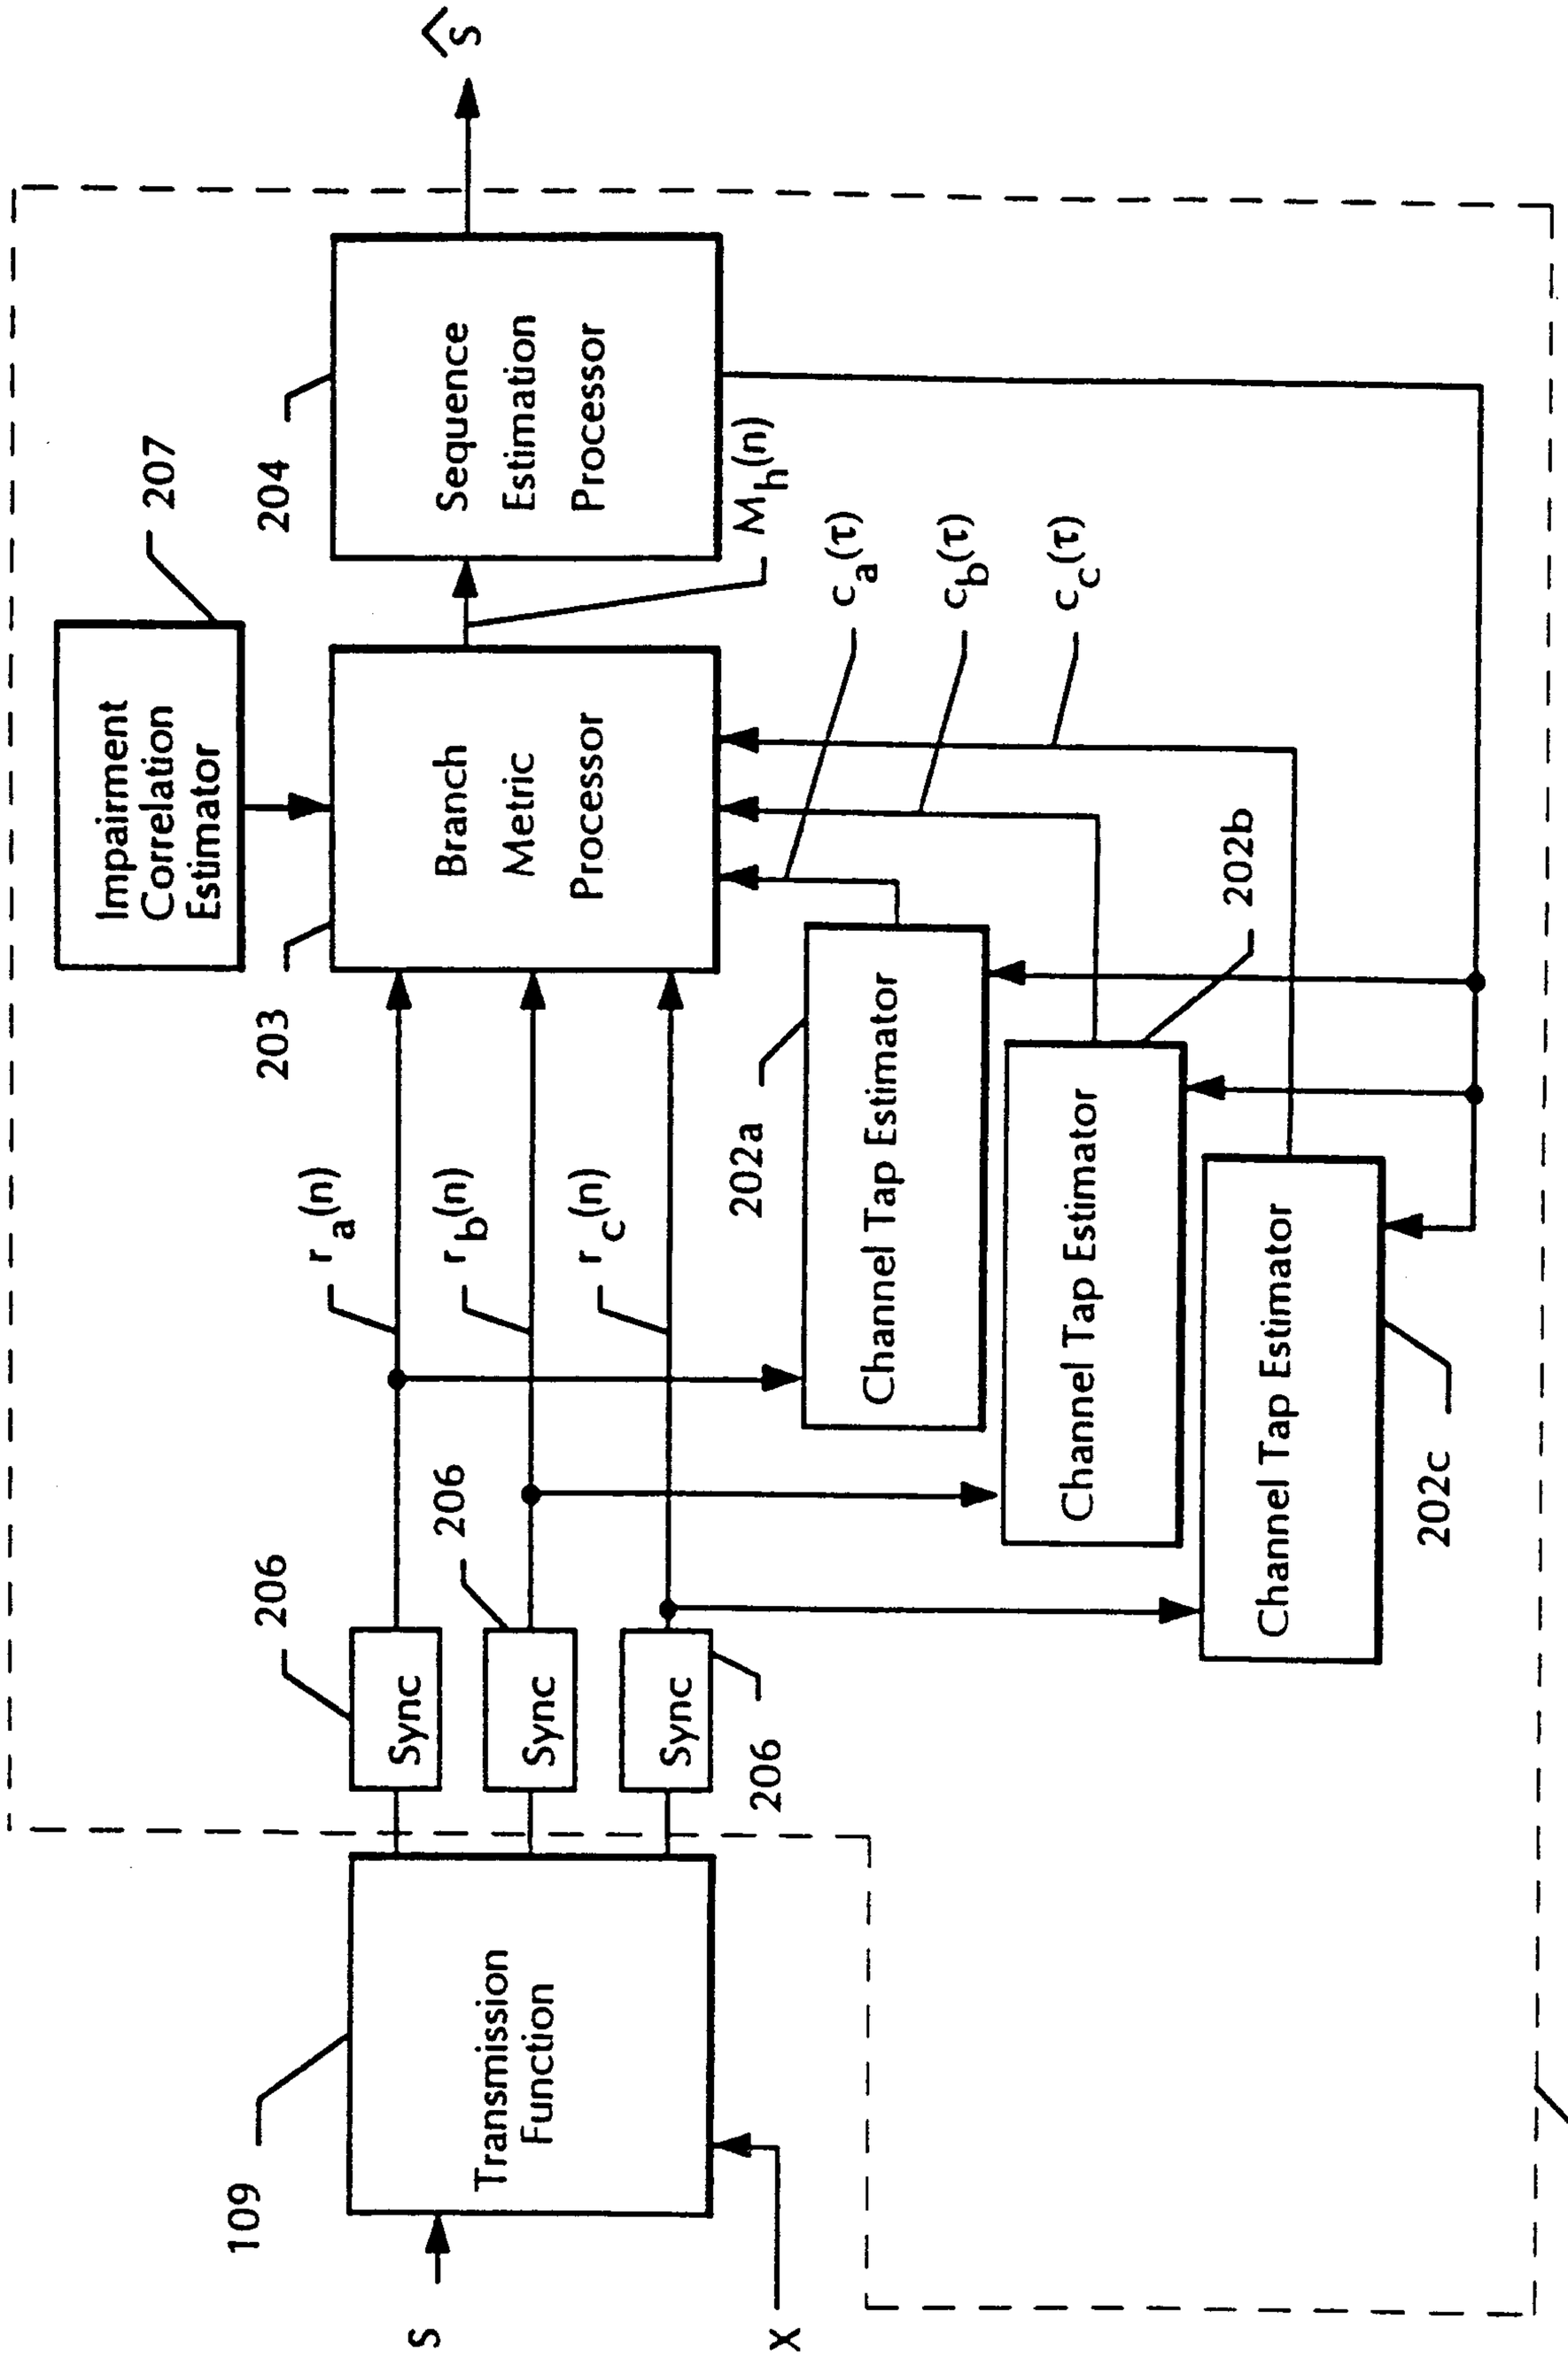

S
204
Sequence Estimation Processor
207
Impairment Correlation Estimator
Branch Metric Processor
203
$M_h(n)$
$c_a(\tau)$
$c_b(\tau)$
$c_c(\tau)$
202a
Channel Tap Estimator
202b
Channel Tap Estimator
202c
Channel Tap Estimator
$r_a(n)$
$r_b(n)$
$r_c(n)$
206
Sync
206
Sync
206
Sync
206
109
Transmission Function
S
X
107

Figure 2

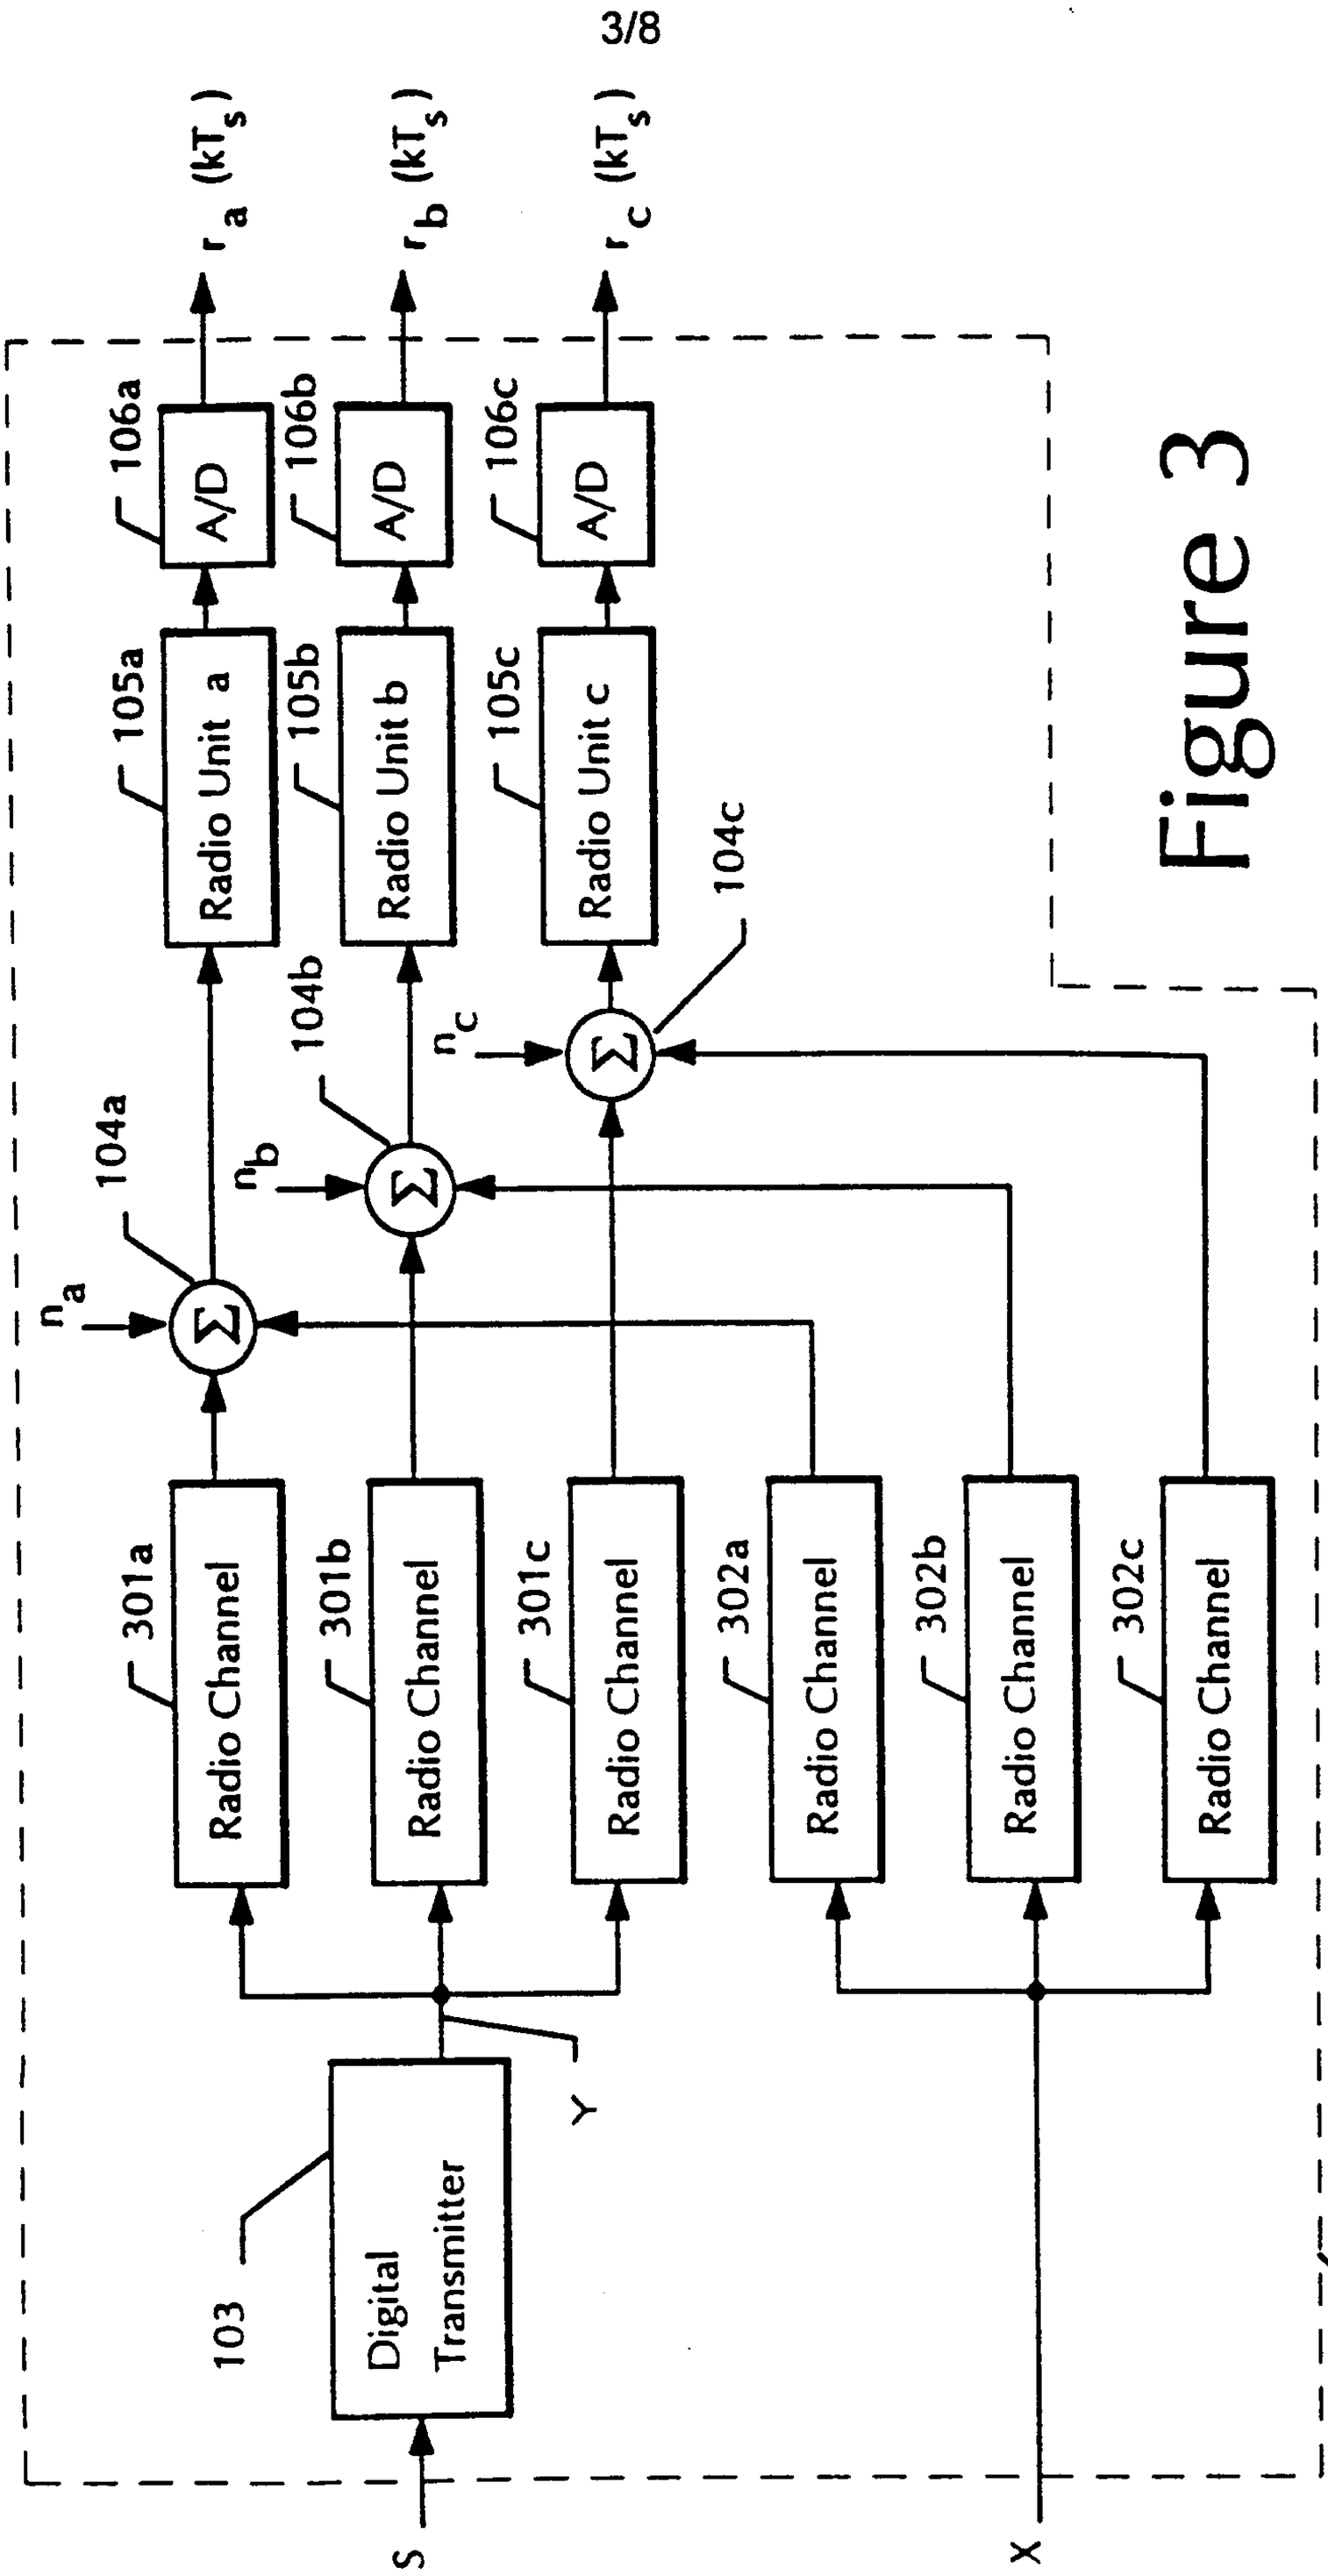

r_a (kT_s)
r_b (kT_s)
r_c (kT_s)
106a
A/D
106b
A/D
106c
A/D
105a
Radio Unit a
105b
Radio Unit b
105c
Radio Unit c
104a
104b
104c
n_a
n_b
n_c
Σ
301a
Radio Channel
301b
Radio Channel
301c
Radio Channel
302a
Radio Channel
302b
Radio Channel
302c
Radio Channel
103
Digital Transmitter
Y
S
X
109

Figure 3

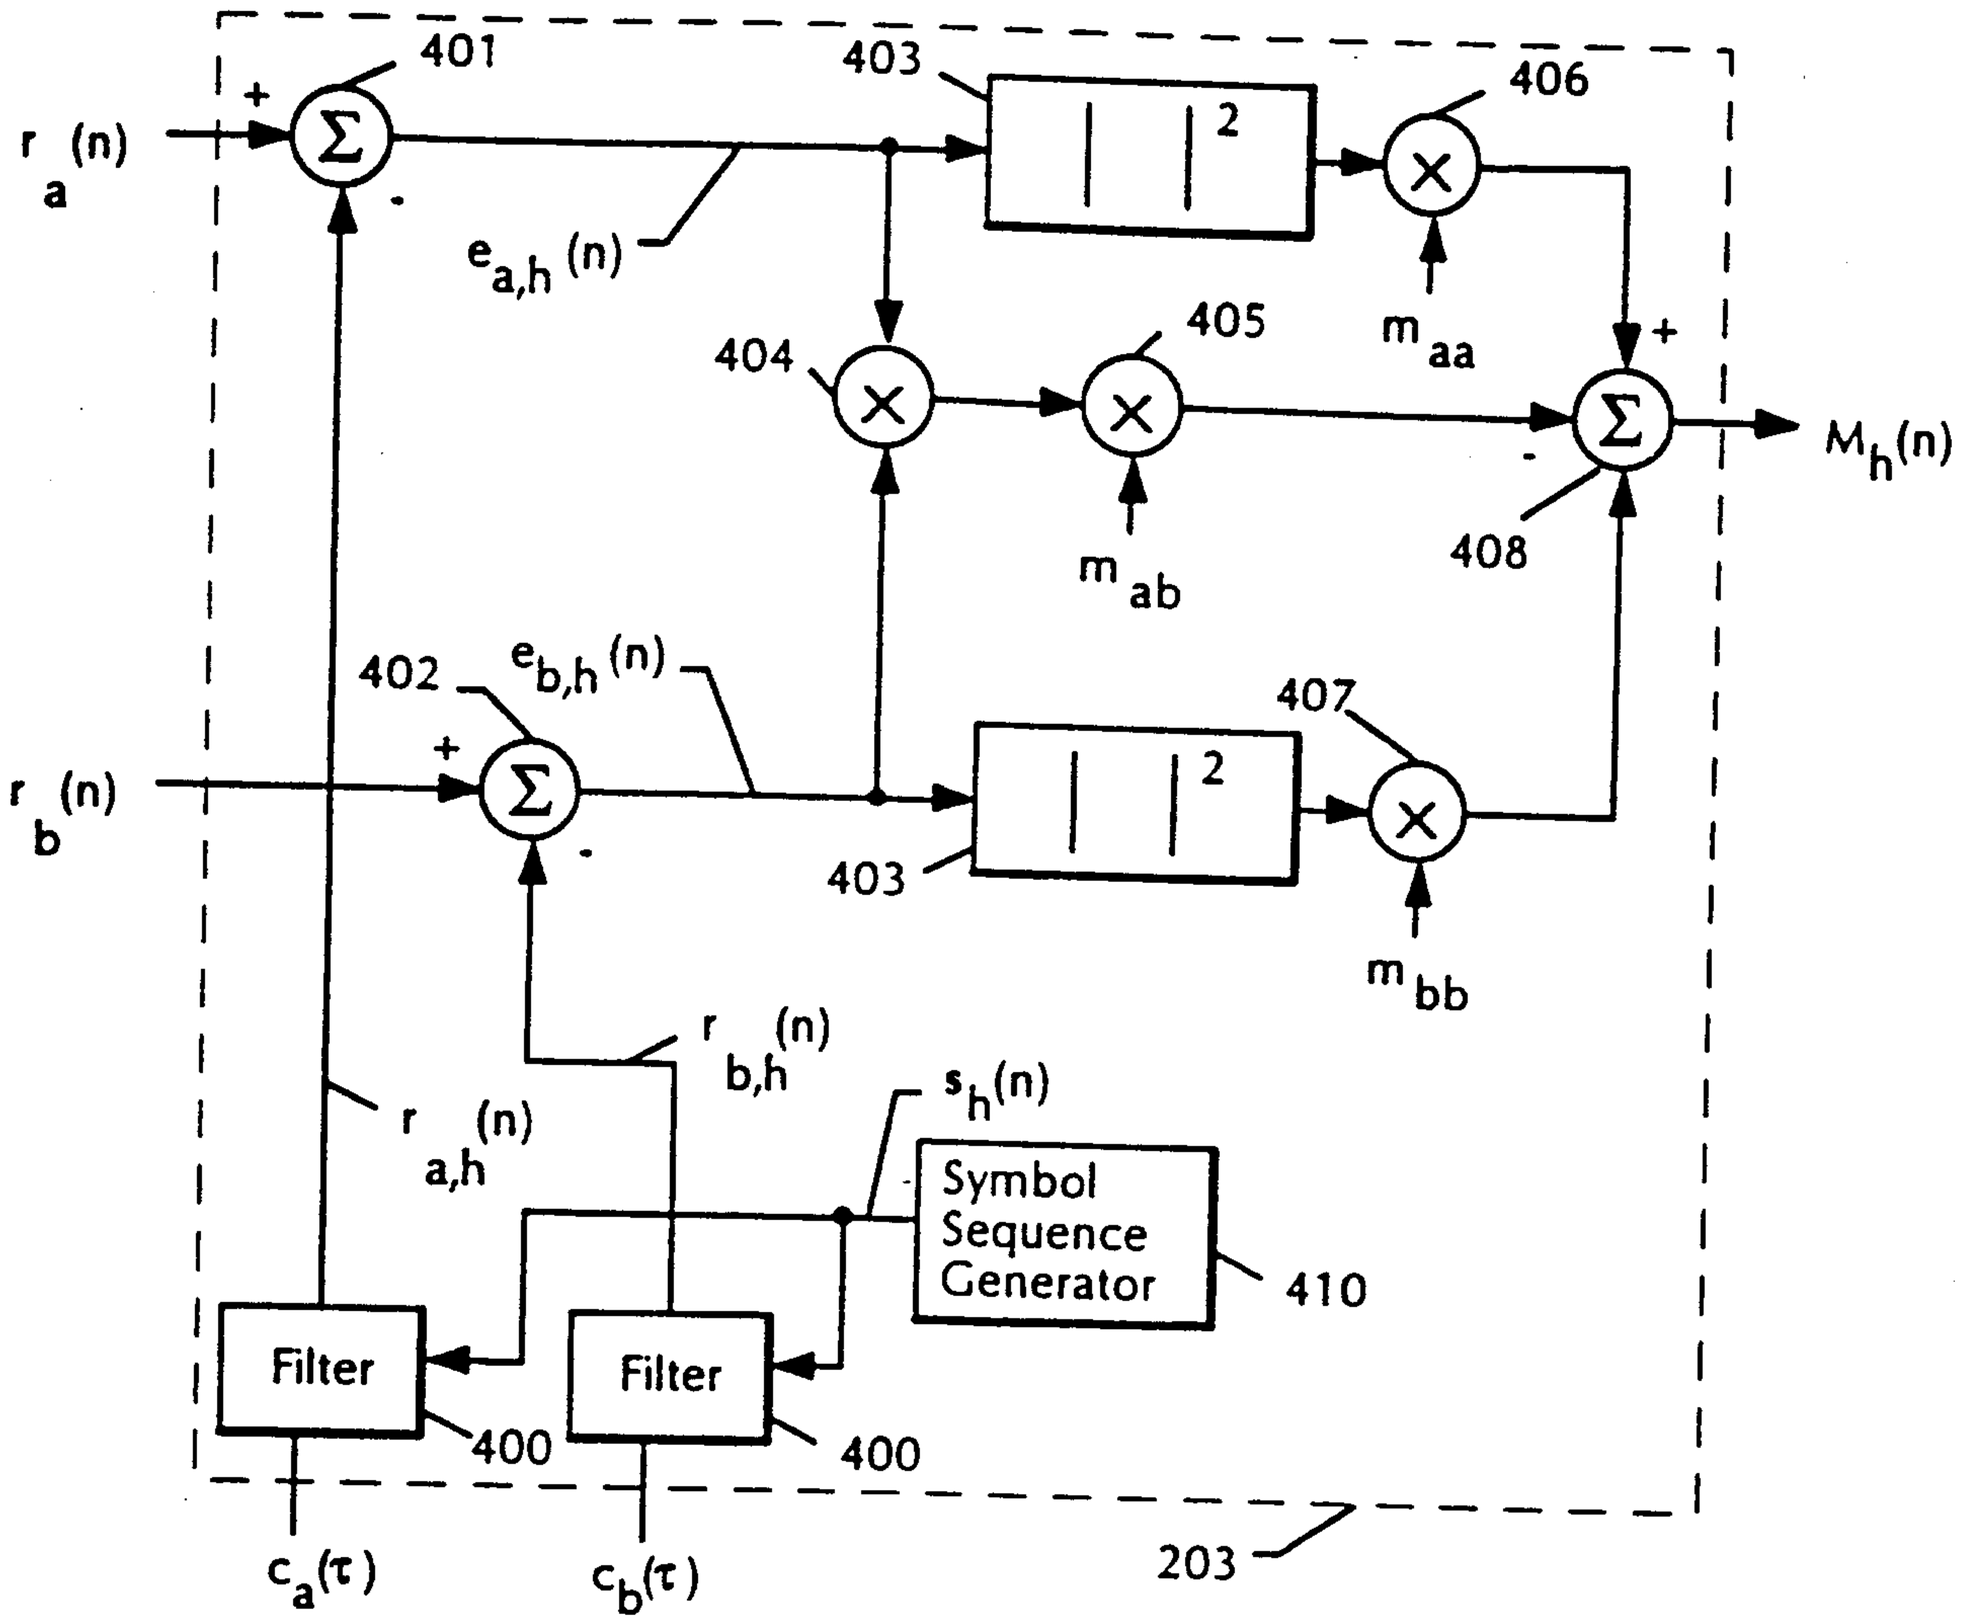

401
403
406
$r_a(n)$
+
$e_{a,h}(n)$
404
405
m_{aa}
+
$M_h(n)$
m_{ab}
408
402
$e_{b,h}(n)$
407
$r_b(n)$
403
m_{bb}
$r_{b,h}(n)$
$s_h(n)$
$r_{a,h}(n)$
Symbol Sequence Generator
410
Filter
Filter
400
400
$c_a(\tau)$
$c_b(\tau)$
203

Figure 4

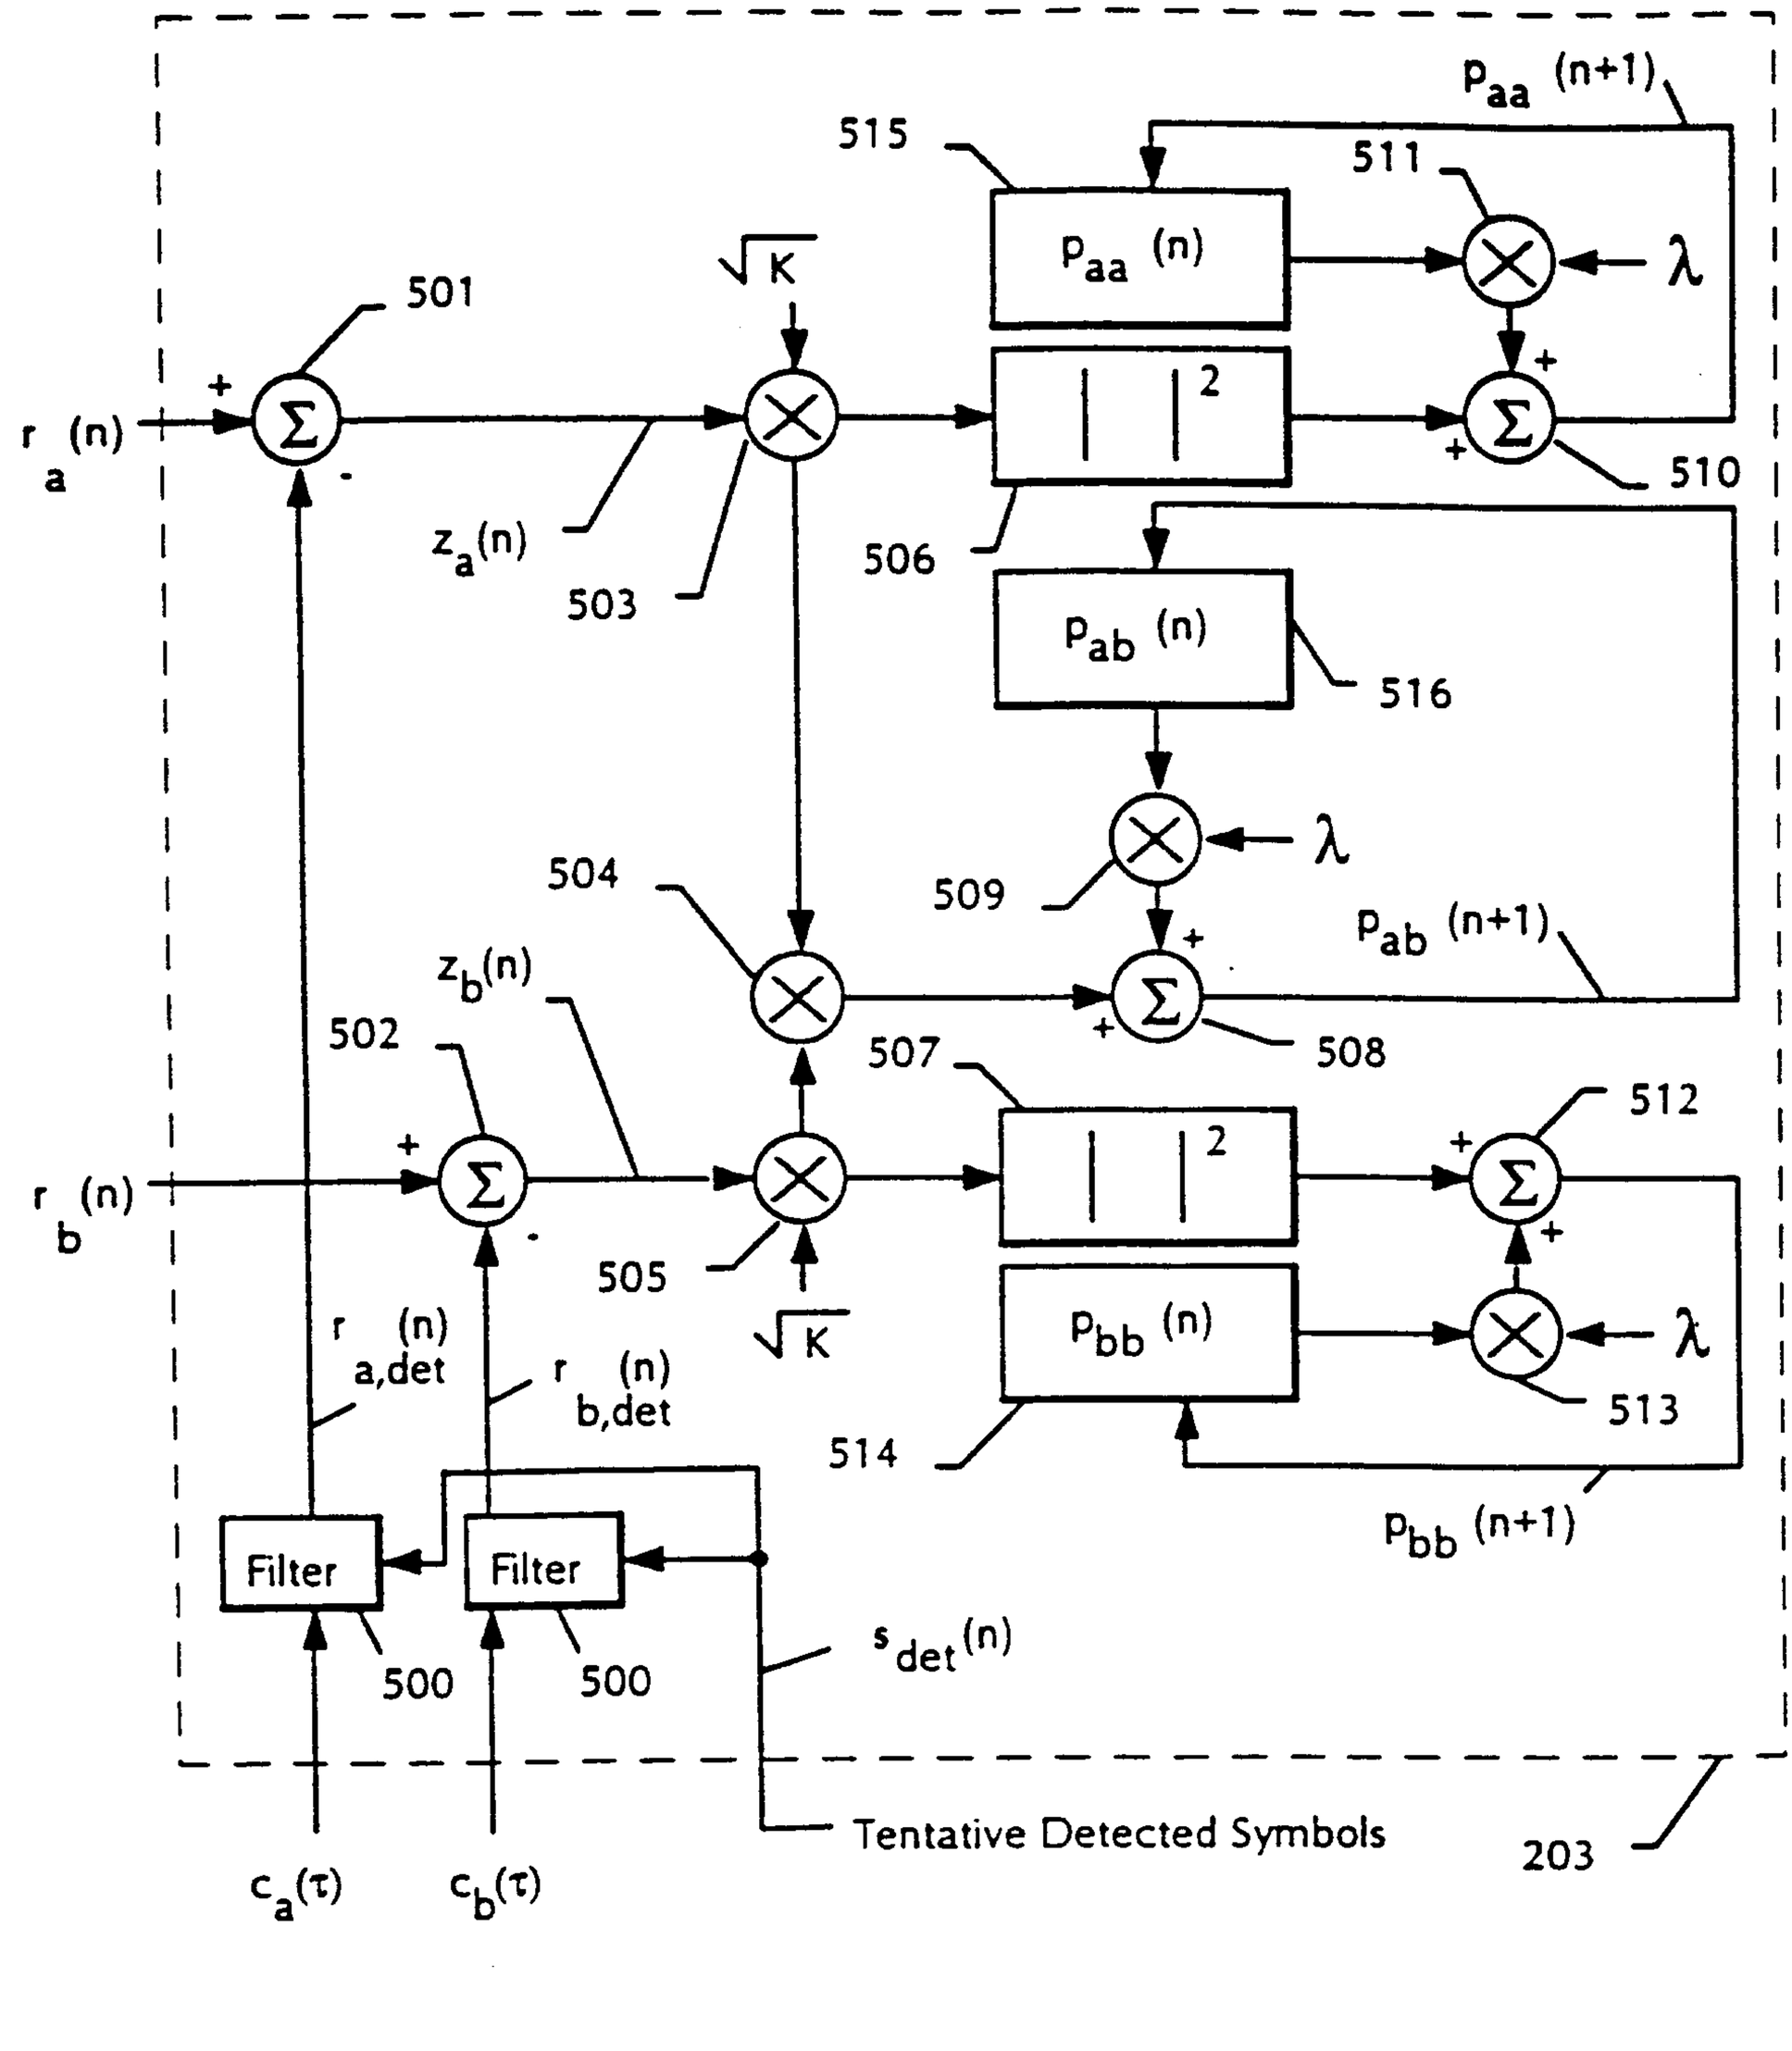

p_{aa} (n+1)
515
511
p_{aa} (n)
λ
√K
501
+
r_a (n)
Σ
-
$|\ |^2$
+
+
Σ
510
z_a(n)
503
506
p_{ab} (n)
516
λ
509
504
+
p_{ab} (n+1)
z_b(n)
Σ
508
502
507
512
+
r_b (n)
Σ
-
$|\ |^2$
+
505
+
λ
√K
p_{bb} (n)
513
$r_{a,det}$ (n)
$r_{b,det}$ (n)
514
p_{bb} (n+1)
Filter
Filter
s_{det}(n)
500
500
$c_a(\tau)$
$c_b(\tau)$
Tentative Detected Symbols
203

Figure 5

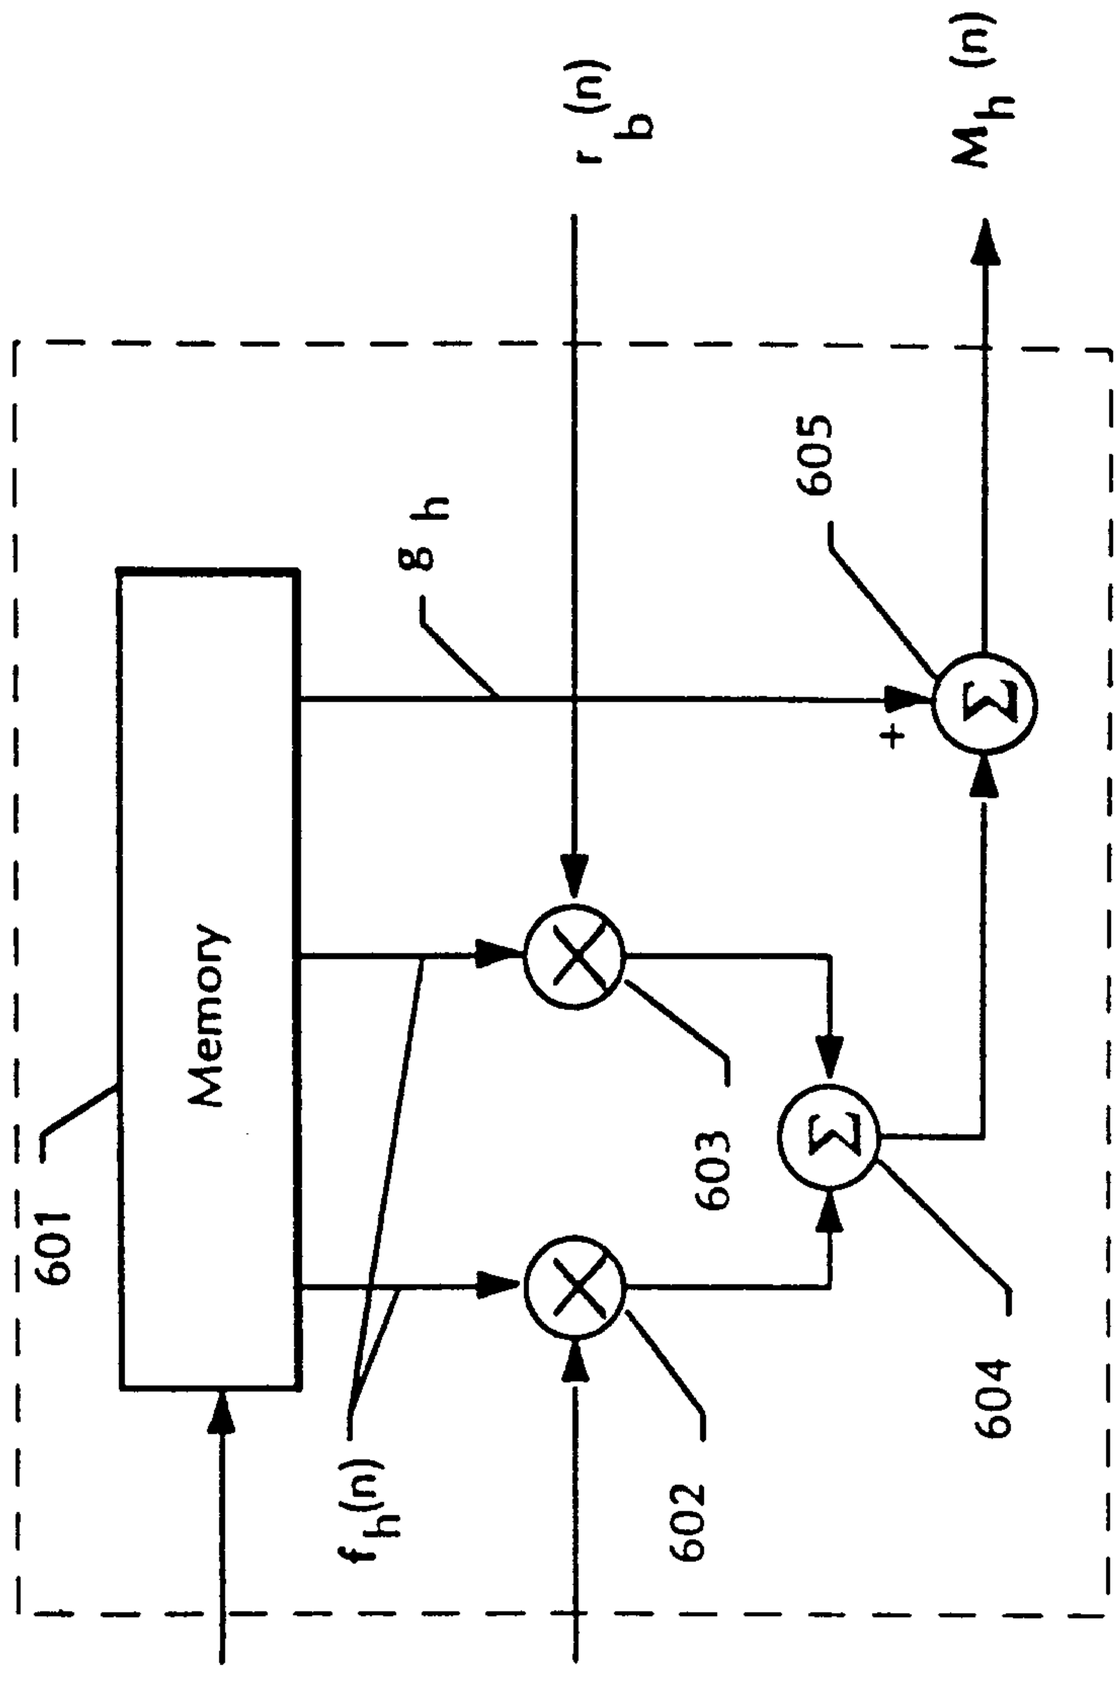


Figure 6

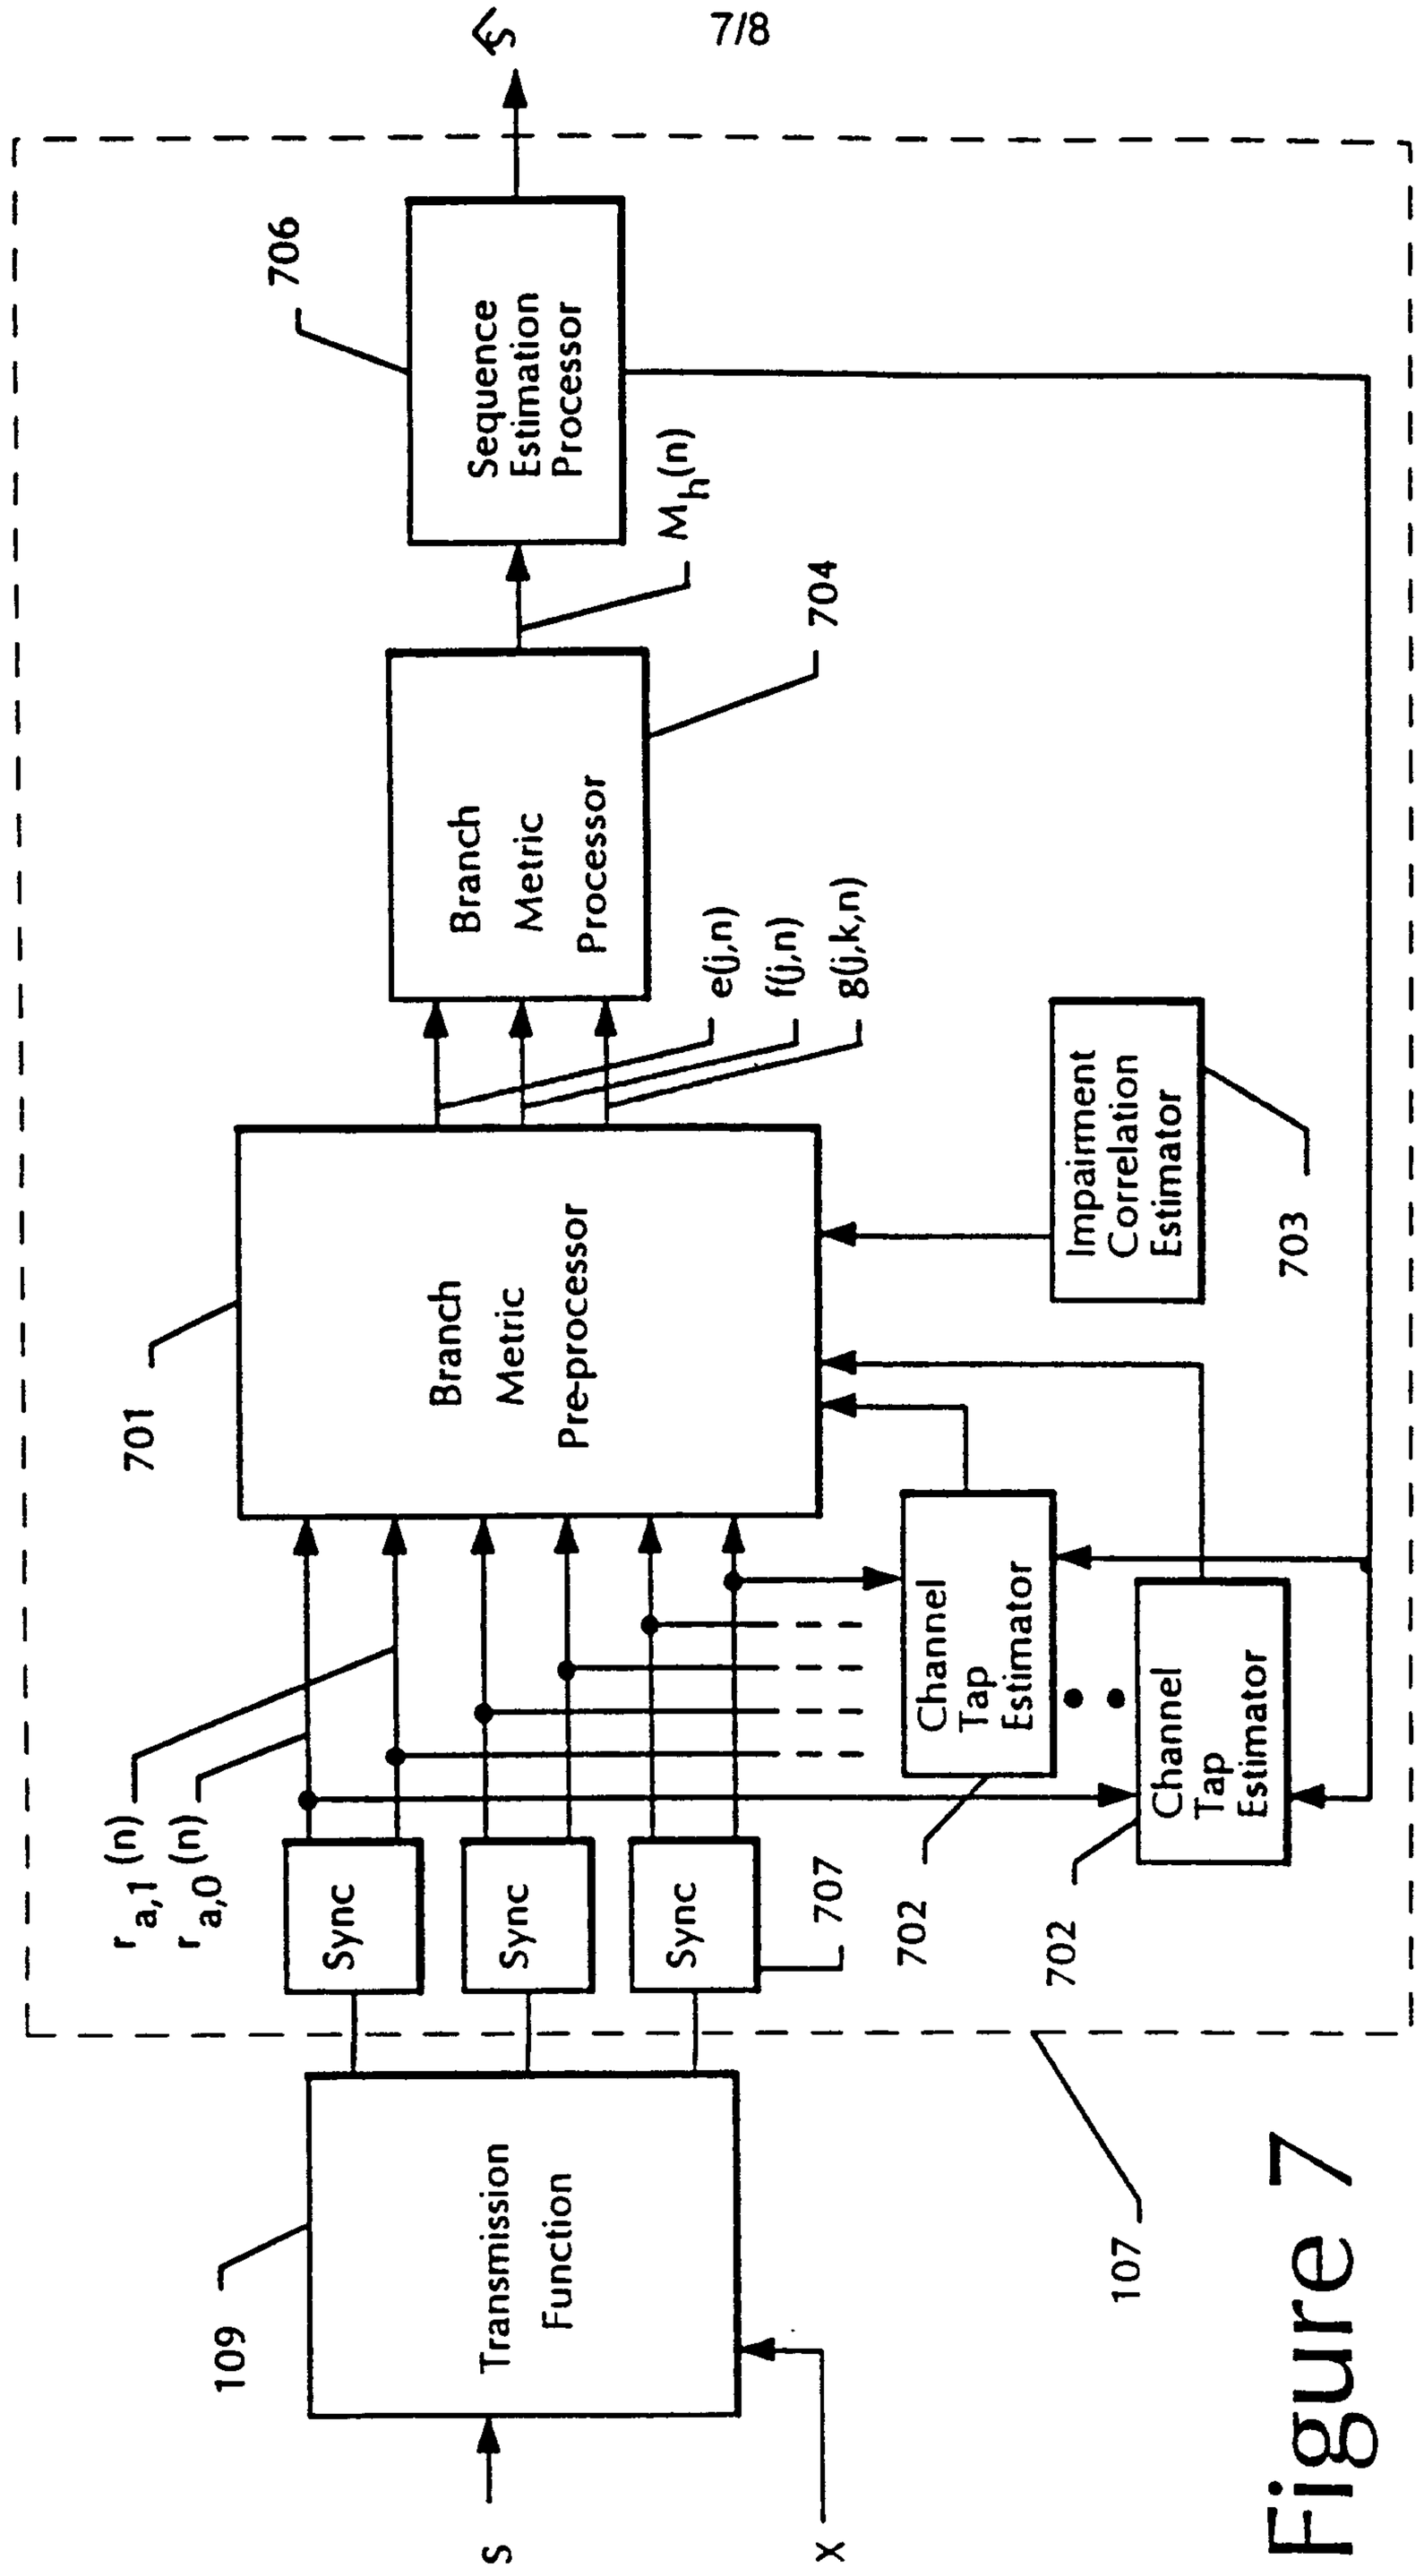


Figure 7

Marks & Clerk

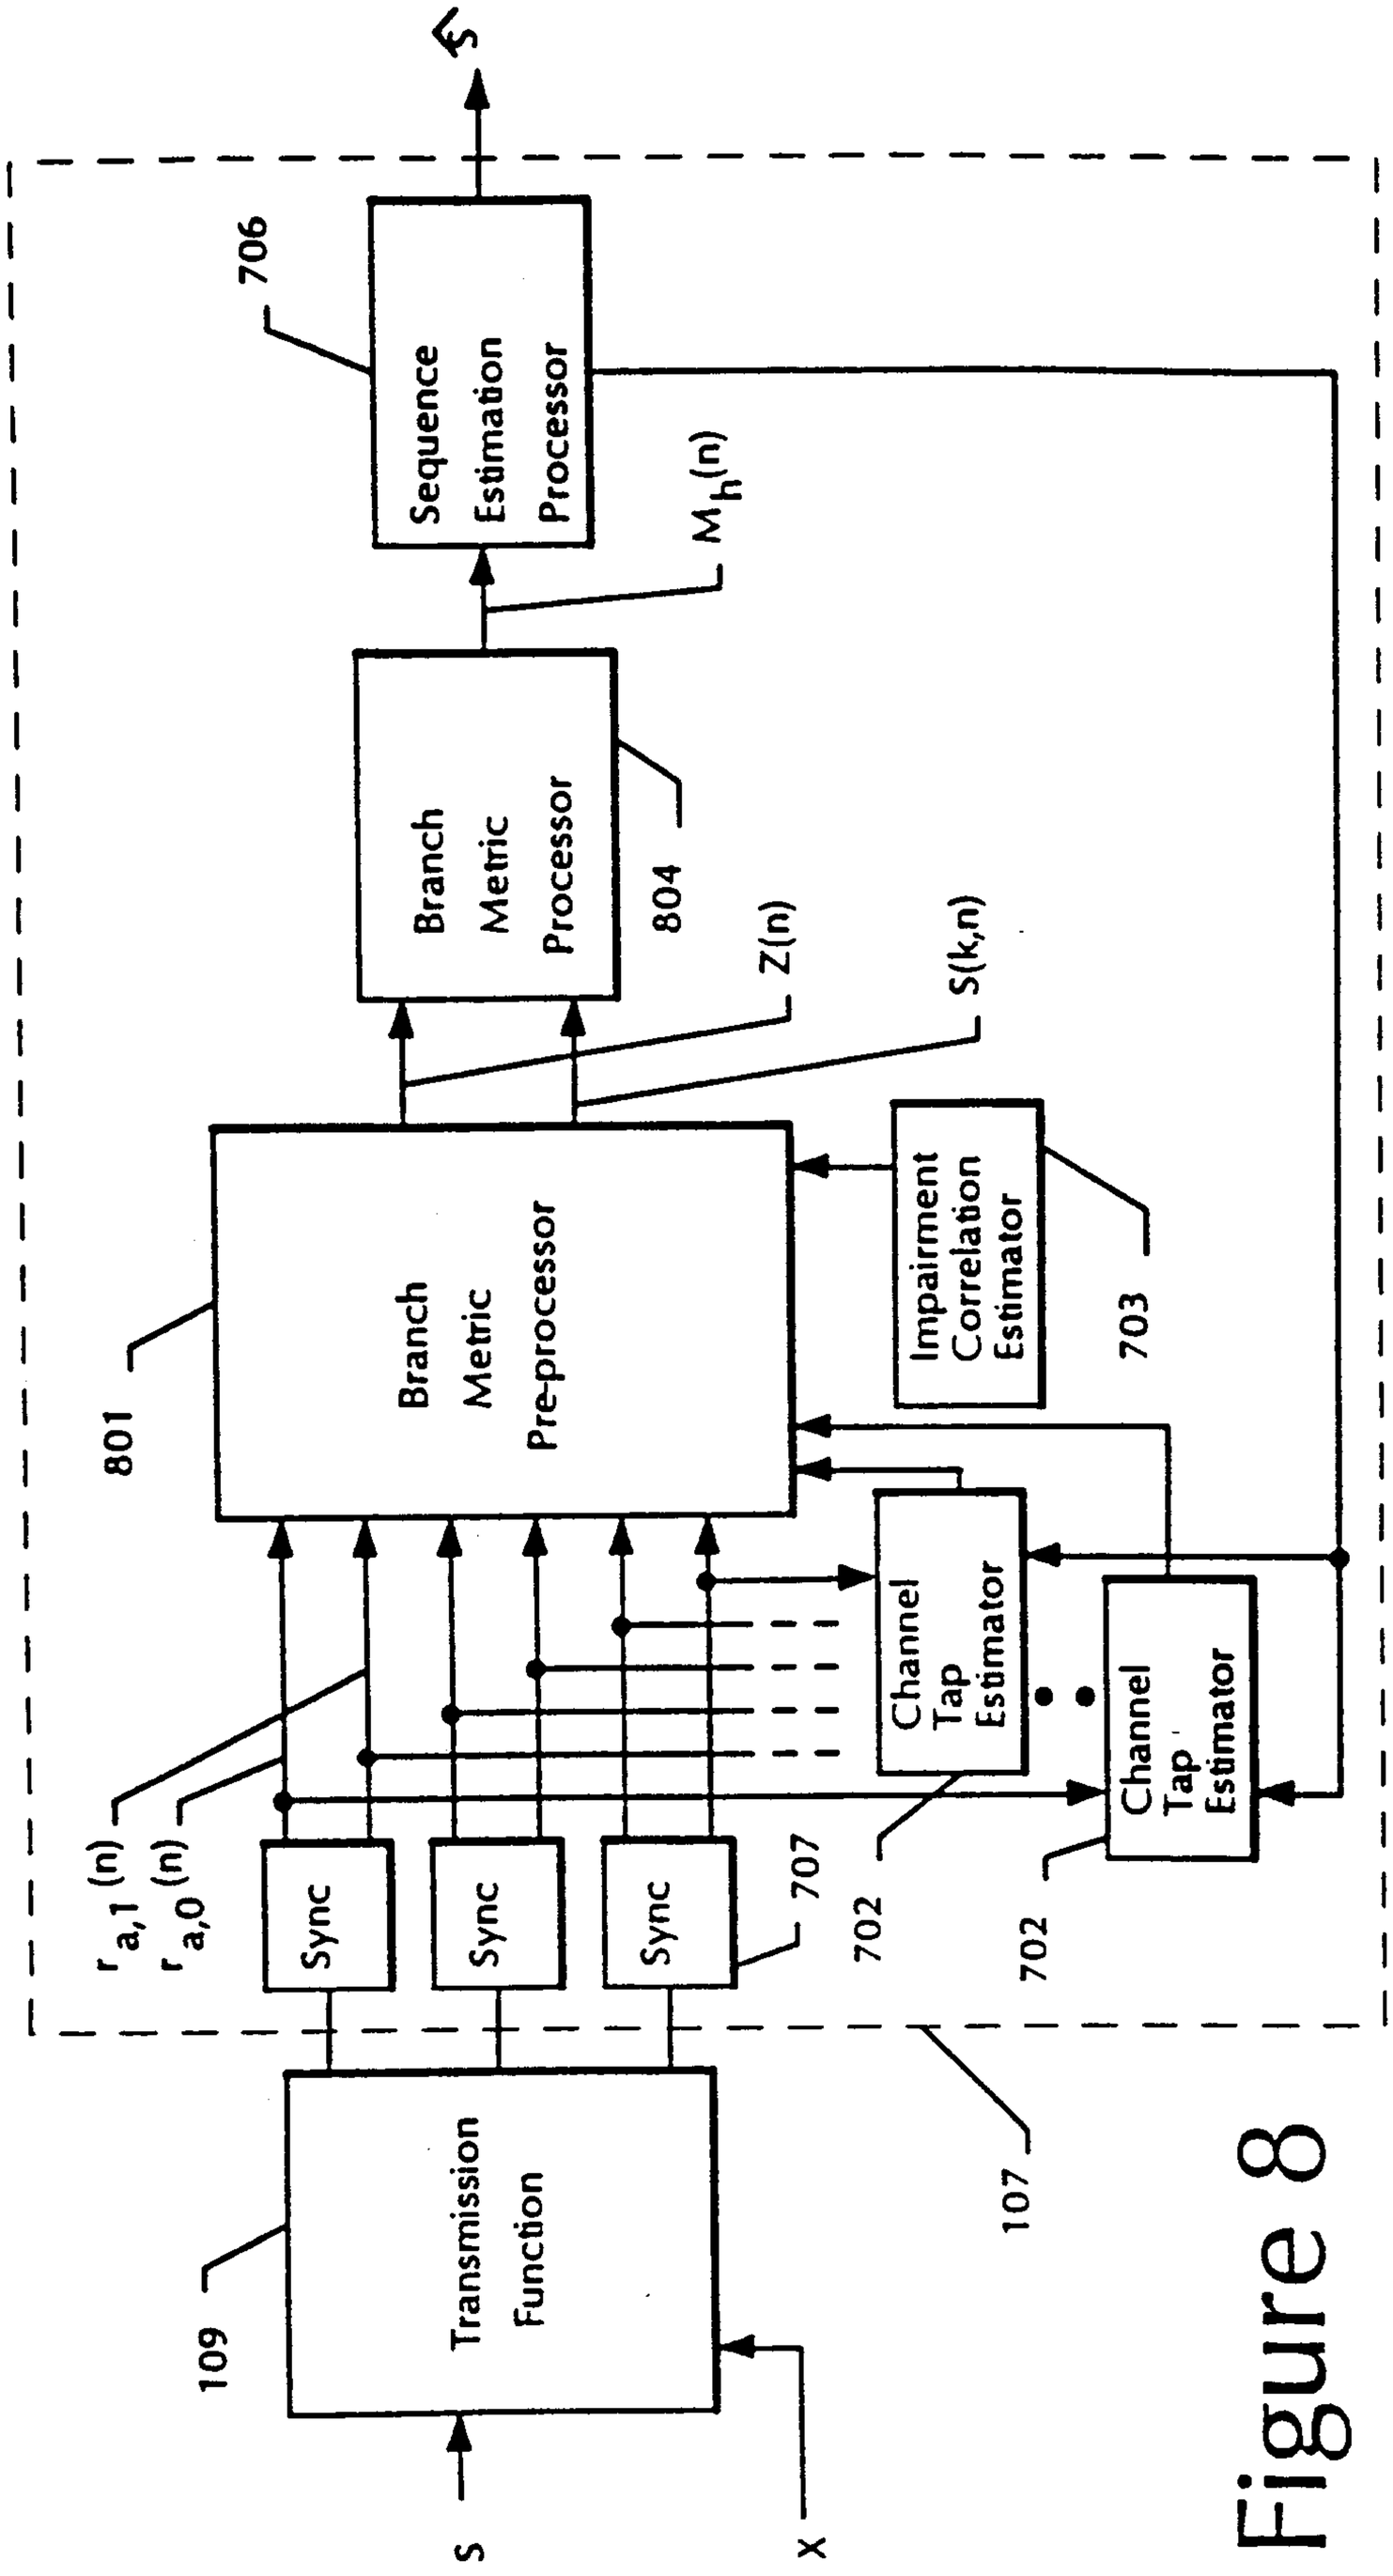
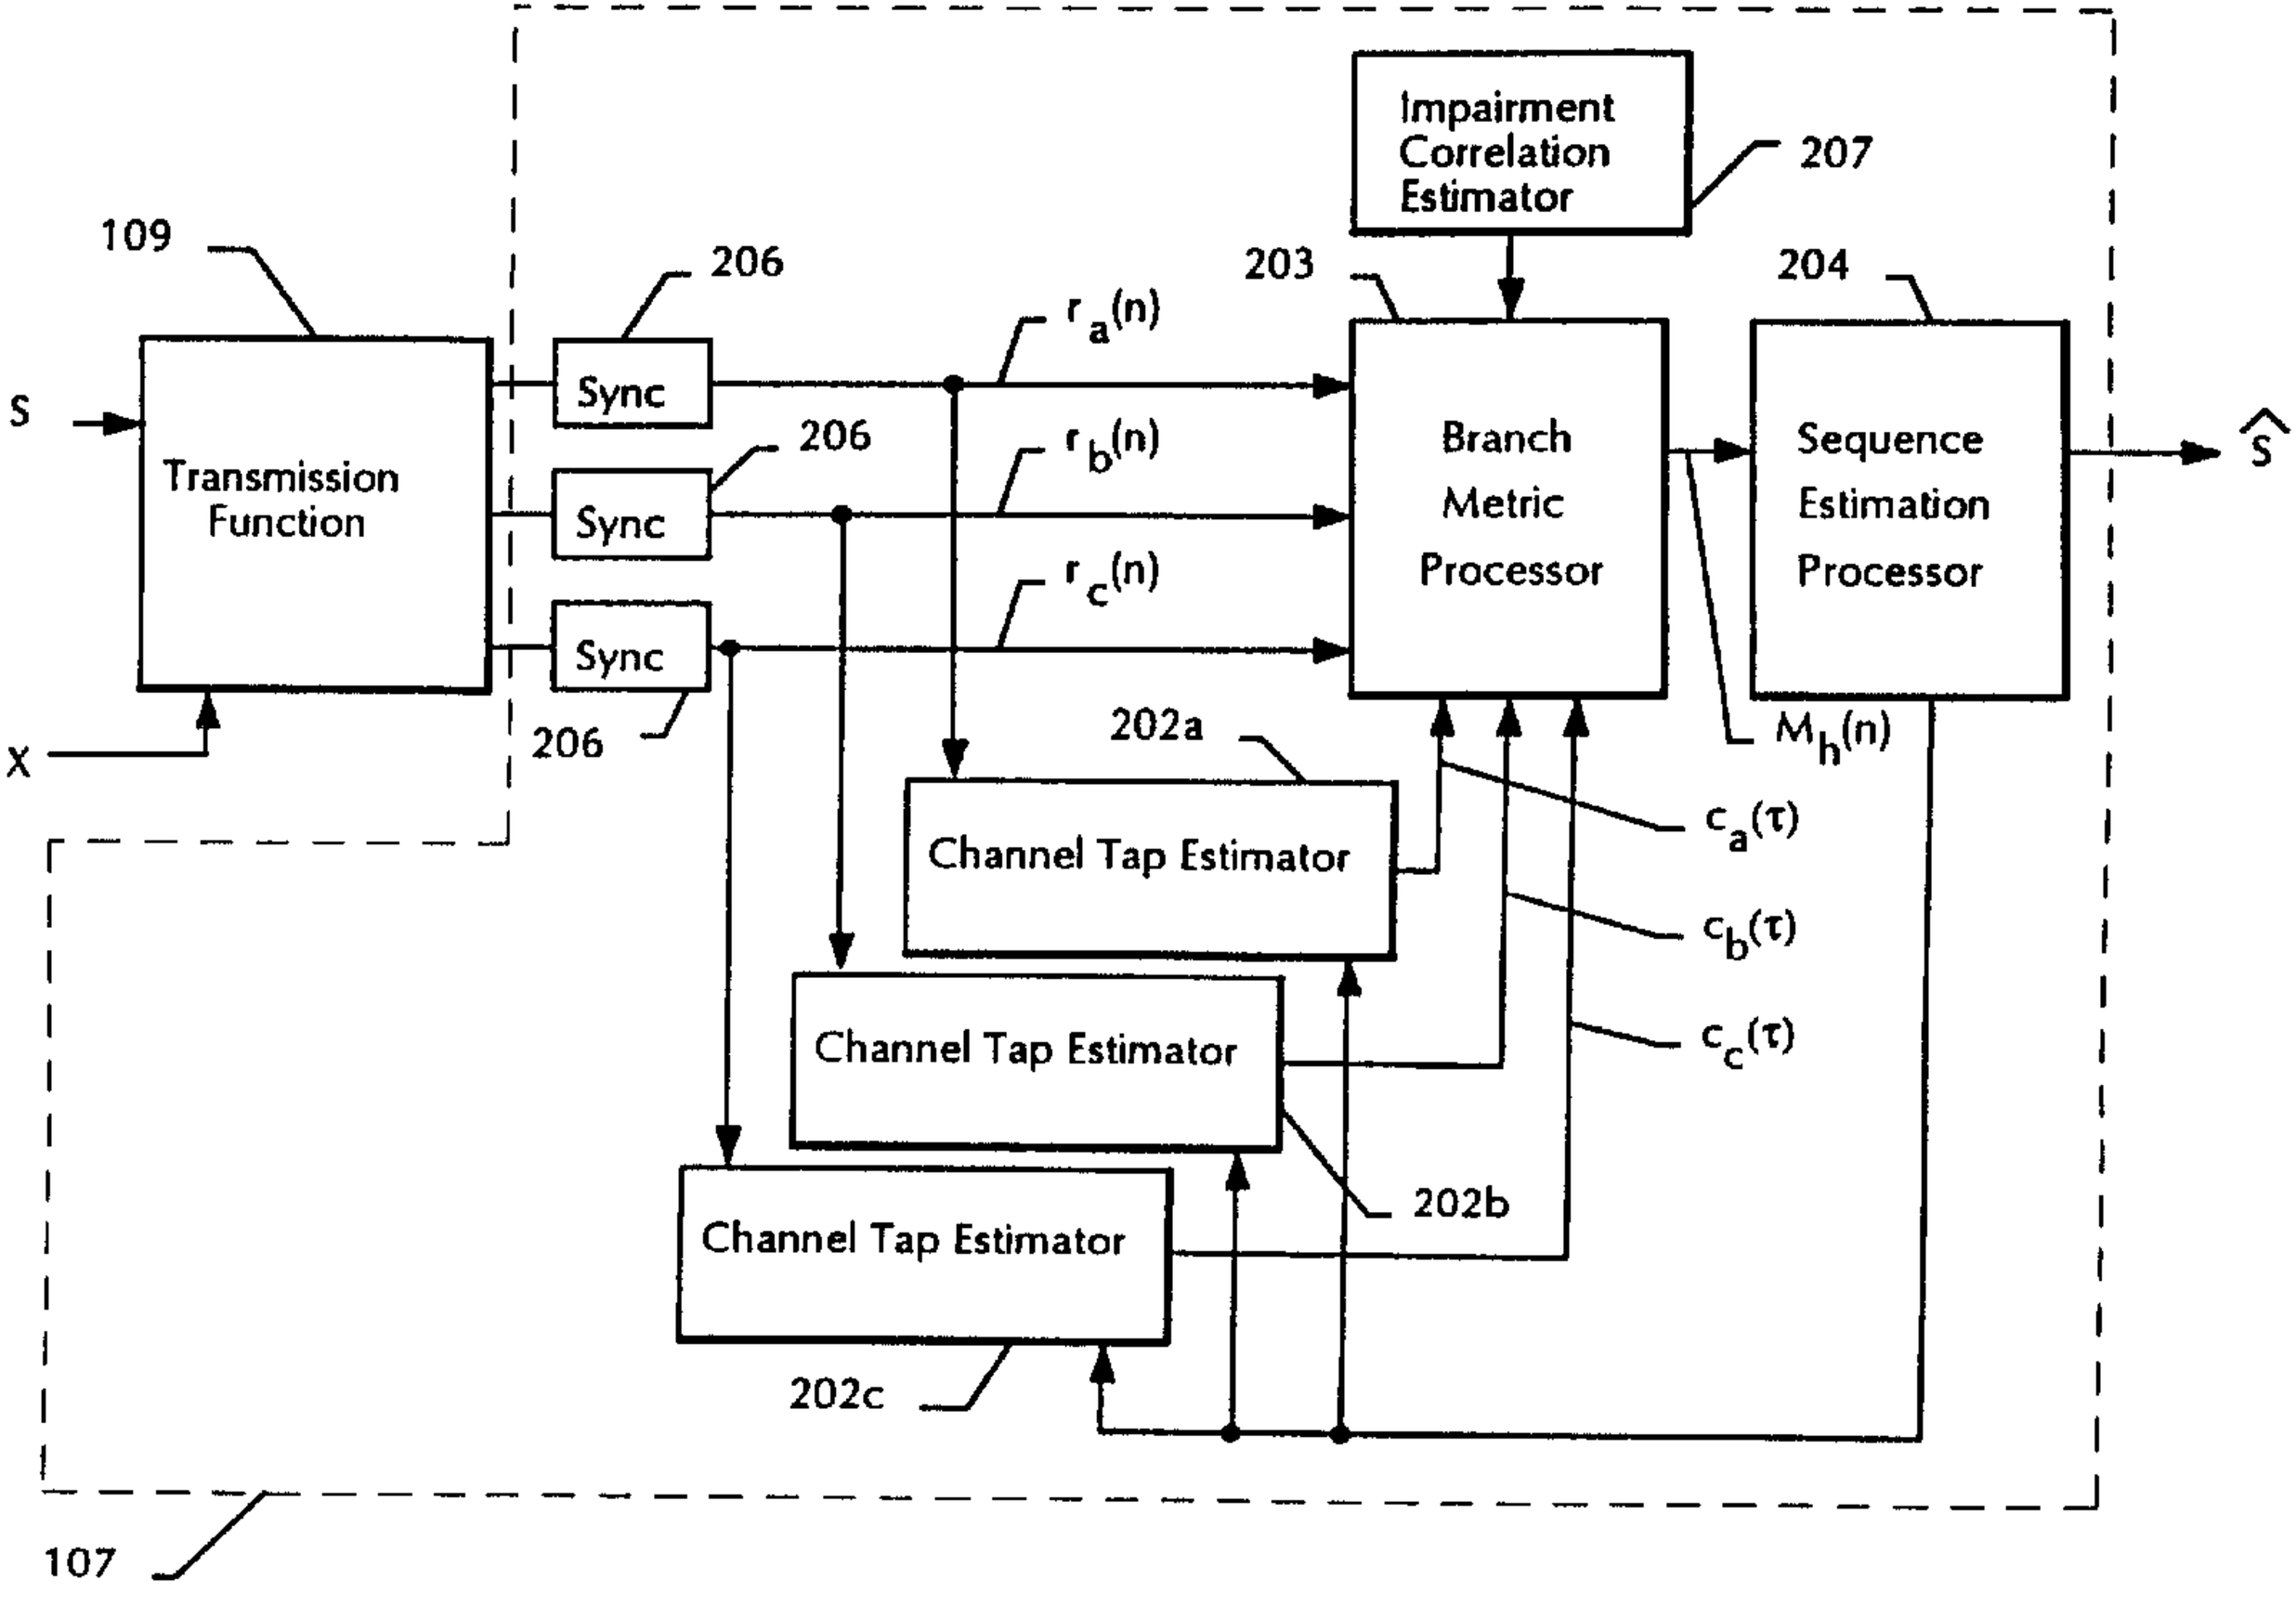

S
706
Sequence Estimation Processor
$M_h(n)$
Branch Metric Processor
804
Z(n)
S(k,n)
801
Branch Metric Pre-processor
Impairment Correlation Estimator
703
Channel Tap Estimator
Channel Tap Estimator
$r_{a,1}(n)$
$r_{a,0}(n)$
Sync
Sync
Sync
707
702
702
109
Transmission Function
107
S
X

Figure 8


109
206
206
206
203
204
207
s
x
Transmission Function
Sync
Sync
Sync
$r_a(n)$
$r_b(n)$
$r_c(n)$
Impairment Correlation Estimator
Branch Metric Processor
Sequence Estimation Processor
$\hat{s}$
$M_h(n)$
202a
Channel Tap Estimator
Channel Tap Estimator
Channel Tap Estimator
202b
202c
$c_a(\tau)$
$c_b(\tau)$
$c_c(\tau)$
107