



(51) International Patent Classification:

*H01Q 1/52* (2006.01)      *H01Q 5/10* (2015.01)  
*H01Q 21/12* (2006.01)    *H01Q 5/40* (2015.01)  
*H01Q 3/26* (2006.01)    *H01Q 5/48* (2015.01)  
*H01Q 5/00* (2015.01)    *H01Q 5/49* (2015.01)

(21) International Application Number:

PCT/US2018/020359

(22) International Filing Date:

01 March 2018 (01.03.2018)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/505,174      12 May 2017 (12.05.2017)      US


(71) Applicant: **COMMSCOPE TECHNOLOGIES LLC**  
[US/US]; 1100 CommScope Place SE, Hickory, North Carolina 28602 (US).

(72) Inventors: **ABBAS, Syed Muzahir**; 21/159 Epping Road, Macquarie Park, New South Wales 2113 (AU). **VARNOOSFADERANI, Mohammad Vatankhah**; 10-12 Lexington drive, Bella Vista, Sydney, New South Wales 2153 (AU). **HU, Zhonghao**; 106 Perisher Road, Beaumont Hills, New South Wales 2155 (AU).

(74) Agent: **AYERS, Randal, D.**; MYERS BIGEL, P.A., PO Box 37428, Raleigh, North Carolina 27627 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,

(54) Title: BASE STATION ANTENNAS HAVING PARASITIC COUPLING UNITS

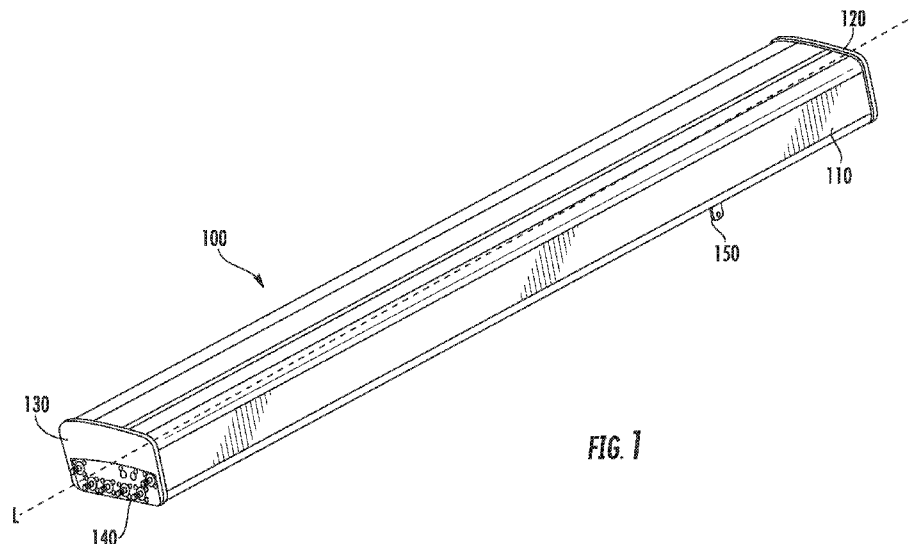

(57) Abstract: A base station antenna includes a panel that has a ground plane, first and second arrays that have respective first and second sets of linearly arranged radiating elements mounted on the panel, and a decoupling unit positioned between a first radiating element of the first array and a first radiating element of the second array. The decoupling unit includes at least a first sidewall that faces the first radiating element of the first array, a second sidewall that faces the first radiating element of the second array and an internal cavity that is defined in the region between the sidewalls. The first and second sidewalls are electrically conductive and electrically connected to the ground plane.



SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,  
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

**(84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

— *with international search report (Art. 21(3))*

## BASE STATION ANTENNAS HAVING PARASITIC COUPLING UNITS

### CROSS-REFERENCE TO RELATED APPLICATION

[0001] The present applications claims priority under 35 U.S.C. § 119 to United Stated Provisional Patent Application Serial No. 62/505,174, filed May 12, 2017, the entire content of which is incorporated herein by reference as if set forth in its entirety.

### FIELD OF THE INVENTION

[0002] The present invention generally relates to radio communications and, more particularly, to base station antennas for cellular communications systems.

### BACKGROUND

[0003] Cellular communications systems are well known in the art. In a cellular communications system, a geographic area is divided into a series of regions that are referred to as "cells" which are served by respective base stations. Each base station may include one or more base station antennas that are configured to provide two-way radio frequency ("RF") communications with fixed and mobile subscribers that are located within the cell served by the base station. Typically, a base station antenna includes at least one vertically-oriented linear array of radiating elements.

[0004] In many cases, each base station is divided into "sectors." In a common configuration, a hexagonally shaped cell is divided into three 120° sectors, and each sector is served by one or more base station antennas. The linear array of radiating elements on each base station antenna may have a radiation pattern (also referred to herein as an "antenna beam") that is directed outwardly in the general direction of the horizon, where the radiation pattern has an azimuth Half Power Beamwidth (HPBW) of approximately 65° so that the radiation pattern will provide coverage to the full 120° sector.

[0005] As demand for additional capacity has increased, the use of multi-band base station antennas has become widespread. A multi-band base station antenna includes multiple vertically-oriented linear arrays of radiating elements that are mounted on a common backplane. Typically somewhere between two and four linear arrays of radiating elements are provided, with one or more of the linear arrays providing service in a first frequency band and the remaining linear arrays providing service in one or more additional, different frequency bands. One common multi-band base station antenna design is the RVV antenna, which includes one linear array of "low-band" radiating elements that are used to provide service in some or all of, for example, the 694-960 MHz frequency band (which is often referred to as the "R-band") and two linear arrays of "high-band" radiating elements that are used to provide service in some or all of, for example, the 1695-2690 MHz frequency band (which is often referred to as the "V-band"). The three linear arrays of radiating elements are mounted in side-by-side fashion. Another known multi-band base station antenna is the RRVV base station antenna, which has two linear arrays of low-band radiating elements and two (or four) linear arrays of high-band radiating elements. RRVV antennas are used in a variety of applications including 4x4 multi-input-multi-output ("MIMO") applications or as multi-band antennas having two different low-bands (e.g., a 700 MHz low-band linear array and an 800 MHz low-band linear array) and two different high bands (e.g., an 1800 MHz high-band linear array and a 2100 MHz high-band linear array).

[0006] RRVV antennas and other antennas that include four or more linear arrays and/or two or more linear arrays of low-band radiating elements may be challenging to implement in a commercially acceptable manner because operators typically desire base station antennas that are relatively narrow in width, such as base station antennas with maximum widths in the 300-380 mm range. Mounting two low-band linear arrays and/or four or more total linear arrays side-by-side within this relatively narrow space while maintaining acceptable performance may be difficult.

#### SUMMARY

[0007] Pursuant to embodiments of the present invention, base station antennas are provided that include a panel that includes a ground plane, a first linear array that includes a first plurality of radiating elements that extend forwardly from the panel, the first linear array extending along a first axis, a second linear array that includes a second plurality of radiating elements that extend forwardly from the panel, the second linear array extending along a second axis that is generally parallel to the first axis, and a parasitic coupling unit between a

first radiating element of the first linear array and a first radiating element of the second linear array and between the first axis and the second axis. The parasitic coupling unit includes a first parasitic coupling structure, the first parasitic coupling structure including a first base that is capacitively coupled to the ground plane and a first wall that extends forwardly from the first base, the first wall including at least one slot.

[0008] In some embodiments, the first wall extends along a third axis that is generally parallel to the second axis, and the at least one slot extends along a fourth axis that is generally parallel to the second axis.

[0009] In some embodiments, the parasitic coupling unit further includes a second parasitic coupling structure, the second parasitic coupling structure including a second base that is capacitively coupled to the ground plane and a second wall that extends upwardly from the second base and extends parallel to the first wall, the second wall including at least one slot. Each of the first and second walls may include at least two slots that extend in parallel to each other. The first parasitic coupling structure may be spaced apart from the second parasitic coupling structure and may not directly contact the second parasitic coupling structure.

[0010] In some embodiments, the parasitic coupling unit further includes a dielectric spacer that separates the parasitic coupling unit from the ground plane. The first base may include a plurality of mounting apertures, and a plurality of dielectric fasteners may extend through the respective mounting apertures to attach the first parasitic coupling structure with the ground plane with the dielectric spacer therebetween.

[0011] In some embodiments, the first base extends parallel to the ground plane. In some embodiments, a height of the first wall above the ground plane is less than a height of at least one of the first plurality of radiating elements above the ground plane.

[0012] In some embodiments, the base station antenna may further include a third plurality of radiating elements that are part of a third linear array and a fourth plurality of radiating elements that are part of a fourth linear array. The first parasitic coupling structure may be between a first of the first plurality of radiating elements and a first of the second plurality of radiating elements, and may further be between a first of the third plurality of radiating elements and a first of the fourth plurality of radiating elements, and each radiating element in the first plurality of radiating elements may be configured to transmit and receive radio frequency signals in at least a first portion of a first frequency band, each radiating element in the second plurality of radiating elements may be configured to transmit and receive radio frequency signals in at least a second portion of the first frequency band, each

radiating element in the third plurality of radiating elements may be configured to transmit and receive radio frequency signals in at least a first portion of a second frequency band that is higher than the first frequency band, and each radiating element in the fourth plurality of radiating elements may be configured to transmit and receive radio frequency signals in at least a second portion of the second frequency band.

[0013] In such embodiments, a height of the first wall above the ground plane may be at least two thirds a height of at least one of the third plurality of radiating elements above the ground plane. Additionally, the first parasitic coupling structure may be configured to act as a radiation shield that isolates at least one of the third radiating elements from at least one of the fourth radiating elements.

[0014] In some embodiments, the first parasitic coupling structure has an L-shaped cross-section.

[0015] In some embodiments, the first and second parasitic coupling structures define an internal cavity therebetween, and a mounting structure for a parasitic strip extends upwardly from the ground plane through the internal cavity.

[0016] In some embodiments, a length of the first wall is at least as long as a length of the at least one slot and no more than the length of the ground plane.

[0017] In some embodiments, a height of the at least one slot in a direction perpendicular to a plane defined by the ground plane is between  $0.02\lambda$  and  $0.15\lambda$  where  $\lambda$  is a wavelength corresponding to a center frequency of the combined operating frequency band of the first and second linear arrays. In such embodiments, a length of each slot in a direction parallel to the plane defined by the ground plane may be between  $0.4\lambda$  and  $0.6\lambda$ .

[0018] In some embodiments, the parasitic coupling unit is configured to collect RF energy radiated by the first linear array and to re-radiate at least some of the collected RF energy.

[0019] Pursuant to further embodiments of the present invention, base station antennas are provided that include a panel that includes a ground plane, a first linear array that includes a first plurality radiating elements that extend forwardly from the panel, the first linear array extending along a first axis, a second linear array that includes a second plurality of radiating elements that extend forwardly from the panel, the second linear array extending along a second axis that is generally parallel to the first axis, and a plurality of parasitic coupling units extending along a third axis between the first linear array and the second linear array. In these antennas, each parasitic coupling unit comprises spaced-apart first and second metal parasitic coupling structures that face each other to define an internal cavity

therebetween, each parasitic coupling structure including a base and a wall that extends forwardly from the base. Additionally, at least some of the parasitic coupling units are tuned to increase the phase alignment between RF energy radiated by the first linear array that is not absorbed by elements of the base station antenna and RF energy radiated by the first linear array that is absorbed by ones of the second plurality of radiating elements and re-radiated therefrom.

[0020] Each wall may include one, two or more slots that extend generally parallel to the second axis. Each of the first and second metal parasitic coupling structures may be mounted on a respective dielectric spacer and is capacitively coupled to the ground plane. The first metal parasitic coupling structure may not directly contact the second metal parasitic coupling structure. A height of each wall above the ground plane may be less than one half a height of at least one of the first plurality of radiating elements above the ground plane

[0021] In some embodiments, the first parasitic coupling structure may be positioned between a first of the first plurality of radiating elements and a first of the second plurality of radiating elements, and may be further positioned between a first of a third plurality of radiating elements that are part of a third linear array and a first of a fourth plurality of radiating elements that are part of a fourth linear array. In such embodiments, each radiating element in the first plurality of radiating elements may be configured to transmit and receive radio frequency signals in at least a first portion of a first frequency band, each radiating element in the second plurality of radiating elements may be configured to transmit and receive radio frequency signals in at least a second portion of the first frequency band, each radiating element in the third plurality of radiating elements may be configured to transmit and receive radio frequency signals in at least a first portion of a second frequency band that is at higher frequencies than the first frequency band, and each radiating element in the fourth plurality of radiating elements may be configured to transmit and receive radio frequency signals in at least a second portion of the second frequency band.

[0022] A height of the each wall above the ground plane may be at least two thirds a height of at least one of the third plurality of radiating elements above the ground plane. The first parasitic coupling structure may be configured to act as an RF shield that isolates at least one of the third radiating elements from at least one of the fourth radiating elements. A length of each slot in a direction parallel to the plane defined by the ground plane may be between  $0.4\lambda$  and  $0.6\lambda$  where  $\lambda$  is a wavelength corresponding to a center frequency of the combined operating frequency band of the first and second linear arrays.

[0023] Pursuant to still further embodiments of the present invention, base station antennas are provided that include a panel that includes a ground plane, a first low-band linear array that includes a first plurality of low-band radiating elements that are mounted to extend forwardly from the panel, a second low-band linear array that includes a second plurality of low-band radiating elements that are mounted to extend forwardly from the panel, a first high-band linear array that includes a first plurality of high-band radiating elements that are mounted to extend forwardly from the panel, a second high-band linear array that includes a second plurality of high-band radiating elements that are mounted to extend forwardly from the panel, and a plurality of parasitic coupling units extending along an axis between the first low-band linear array and the second low-band linear array. Each low-band radiating element is configured to transmit and receive radio frequency signals in at least a portion of a first frequency band and each high-band radiating element is configured to transmit and receive radio frequency signals in at least a portion of a second frequency band that has a lowest frequency that is higher in frequency than the highest frequency in the first frequency band. Each parasitic coupling unit comprises a base and a wall that extends forwardly from the base and is configured to collect and re-radiate RF energy in the first frequency band.

[0024] The plurality of parasitic coupling units may also extend between the first high-band linear array and the second high-band linear array, and/or may be configured to act as RF shields that isolate the first high-band linear array from the second high-band linear array.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0025] **FIG. 1** is a perspective view of a base station antenna according to embodiments of the present invention.

[0026] **FIG. 2** is a perspective view of an antenna assembly of the base station antenna of **FIG. 1**.

[0027] **FIG. 3** is a front view of the antenna assembly of **FIG. 2**.

[0028] **FIG. 4** is a side view of the antenna assembly of **FIG. 2**.

[0029] **FIGS. 5 and 6** are enlarged perspective views of various portions of the of the antenna assembly of **FIGS. 2-4**.

[0030] **FIG. 7** is a perspective view of a parasitic coupling unit according to embodiments of the present invention.

[0031] FIGS. 8A-8D are perspective views of a parasitic coupling units according to further embodiments of the present invention.

#### DETAILED DESCRIPTION

[0032] As discussed above, multi-band base station antennas often include multiple linear arrays of radiating elements that are mounted in side-by-side fashion on a relatively narrow backplane. Unfortunately, when multiple linear arrays of radiating elements are mounted in close proximity to each other, cross coupling may occur between the radiating elements of different linear arrays. For example, an RRVV antenna may include first and second linear arrays of low-band radiating elements that extend down the respective sides of the antenna, and first and second linear arrays of high-band radiating elements that are mounted between the first and second linear arrays of low-band radiating elements, with each linear array in very close proximity to the linear array(s) adjacent thereto. When signals are transmitted through a first of these linear arrays, a portion of the transmitted RF energy may cross-couple to the radiating elements of one or more of the other linear arrays. This cross-coupling can distort the radiation patterns of the transmitting linear array in terms of, for example, azimuth beam width, beam squint and/or cross polarization. The amount of distortion will typically increase with increased cross-coupling, and hence the distortion in the antenna patterns will tend to occur at the frequencies where the cross-coupling is strongest. As noted above, the radiation patterns are designed to cover a certain portion of the azimuth plane, and hence the perturbations to the radiation pattern caused by the cross-coupling may tend to reduce the performance of the base station antenna. Consequently, it may be desirable to reduce cross-coupling between radiating elements of different linear arrays in order to improve the radiation pattern performance of the base station antenna and/or to control the cross-coupling that does occur so that it does not significantly degrade the radiation pattern of the transmitting linear array.

[0033] Pursuant to embodiments of the present invention, parasitic coupling units are provided that may be used to improve the shape of the radiation patterns of first and second linear arrays of a base station antenna. The parasitic coupling units may extend forwardly from the backplane of the antenna and may be positioned between the first and second linear arrays. In some embodiments, each parasitic coupling unit may comprise a pair of facing parasitic coupling structures that each have an L-shaped cross-section. In other embodiments, the parasitic coupling unit may comprises a single parasitic coupling structure.

In each case, a plurality of these parasitic coupling units may extend between the first and second linear arrays.

[0034] In some embodiments, each parasitic coupling structure may include a base and a wall extending upwardly from the base (i.e., the wall extends generally forwardly from the backplane when the base station antenna is mounted for use). One or more slots may be provided in the wall. Each slot may comprise an elongated opening in the wall that extends all the way through the wall. If multiple slots are provided, the slots may extend in parallel to one another, and each slot may extend along a generally vertical axis when the base station antenna is mounted for use. The length of the slots and/or the number of slots may be varied to tune the radiation patterns of the first and second linear arrays. In some embodiments, each parasitic coupling unit may extend only a relatively short distance forwardly from the backplane of the antenna. For example, each parasitic coupling unit may extend forwardly less than half the distance that the radiating elements of the first and second linear arrays extend forwardly from the backplane.

[0035] The parasitic coupling units may be positioned between radiating elements of the first and second linear arrays of a base station antenna in order to control the cross-coupling between the radiating elements of the first and second linear arrays. The parasitic coupling units may be mounted to the backplane of the base station antenna, and a dielectric spacer may be positioned between each parasitic coupling unit and the backplane. The backplane may serve as a ground plane for the radiating elements. The dielectric spacer may be transparent to RF signals, which capacitively couple between the ground plane and the parasitic coupling unit, while blocking direct current (DC) and low frequency signals from passing between the ground plane and the parasitic coupling unit.

[0036] When a first linear array of radiating elements that is near the parasitic coupling unit transmits an RF signal, the electromagnetic field that is generated by the first linear array may extend onto the parasitic coupling unit. The magnetic field perpendicular to one or more slots included in the parasitic coupling unit induce surface currents around or along the slot(s). These surface currents may cause RF energy to re-radiate, some of which may couple to radiating elements of the second linear array from where it may once again re-radiate. The slots in the parasitic coupling unit may act as resonant parasitic magnetic dipoles, with the longest dimension of each slot being the dominant radiator. If the re-radiated signal from the parasitic coupling unit is in phase with the radiating element, then the half power beamwidth will be decreased in the azimuth plane. While the parasitic coupling units may actually increase the amount of coupling between the two linear arrays, the

coupling may be tuned so that it improves the radiation pattern of each linear array, or at least reduces the negative impacts thereof.

[0037] In some embodiments, the parasitic coupling units may be incorporated into a base station antenna having at least two linear arrays of low-band radiating elements and at least two linear arrays of high-band radiating elements. The parasitic coupling units may be positioned so that they are between both high-band linear arrays and so that they also are between both low-band linear arrays. In such an implementation, the parasitic coupling units may act as parasitic coupling units for the low-band linear arrays and may act as RF isolation structures (shields) for the high-band linear arrays.

[0038] Aspects of the present invention will now be discussed in greater detail with reference to the drawings, in which example embodiments are shown.

[0039] **FIGS. 1-6** illustrate a base station antenna **100** according to certain embodiments of the present invention. In particular, **FIG. 1** is a front perspective view of the base station antenna **100**, while **FIGS. 2-4** are a perspective view, a front view and side view, respectively, of an antenna assembly **200** that is included within the radome of base station antenna **100**. **FIGS. 5** and **6** are enlarged partial perspective views of the antenna assembly **200**.

[0040] As shown in **FIGS. 1-6**, the base station antenna **100** is an elongated structure that extends along a longitudinal axis L. When mounted for use, the axis L will generally be oriented vertically (i.e., perpendicular to the plane defined by the horizon). The description of the base station antenna **100** and the antenna assembly **200** thereof that follows will describe the constituent elements thereof assuming that the base station antenna **100** is mounted for use on a tower with the longitudinal axis L of the antenna **100** extending along a vertical axis (i.e., an axis that is generally perpendicular to a plane defined by the horizon) and the front surface of the antenna **100** mounted opposite the tower pointing toward the coverage area for the antenna **100**. Thus, for example, the linear arrays of the base station antenna **100** may be referred to as being "vertically-oriented" linear arrays, as each linear array will generally extend along a respective vertical axis when the base station antenna **100** is mounted for use. The one exception to this convention is references to the "heights" of the radiating elements and the parasitic coupling units of base station antenna **100** above the ground plane. While "height" typically refers to a distance in the vertical dimension, here the referenced heights describe how far forwardly the radiating elements and parasitic coupling units extend from the ground plane when the antenna **100** is mounted for use.

[0041] Referring to **FIG. 1**, the base station antenna **100** may have a tubular shape with generally rectangular cross-section. The antenna **100** includes a radome **110** and a top end cap **120**. One or more mounting brackets **150** are provided on the rear side of the radome **110** which may be used to mount the base station antenna **100** onto an antenna mount (not shown) on, for example, an antenna tower. The base station antenna **100** also includes a bottom end cap **130** which includes a plurality of connectors **140** mounted therein.

[0042] As shown in **FIGS. 2-4**, the base station antenna **100** includes an antenna assembly **200** that may be slidably inserted into the radome **110** from either the top or bottom before the top cap **120** or bottom cap **130** are attached to the radome **110**. The antenna assembly **200** includes a backplane **210** that has sidewalls **212** and a front surface that acts as a reflector **214**. The reflector **214** may comprise a metallic surface (which may or may not comprise a single sheet of metal) that also serves as a ground plane for the radiating elements of the base station antenna **100**. A chamber **216** may be defined between the sidewalls **212** and the back side of the reflector surface **214**. Various mechanical and electronic components of the base station antenna **100** may be mounted in the chamber **216** such as, for example, phase shifters, remote electronic tilt ("RET") units, mechanical linkages, a controller, diplexers, and the like.

[0043] A plurality of radiating elements **300, 400** are mounted to extend forwardly from the reflector **214**. The radiating elements may include low-band radiating elements **300** and high-band radiating elements **400**. As shown best in **FIG. 3**, the low-band radiating elements **300** are mounted in two vertical columns to form two vertically-oriented linear arrays **220-1, 220-2** of low-band radiating elements **300**. Each linear array **220** may extend along substantially the full length of the base station antenna **100** in some embodiments. The high-band radiating elements **400** may likewise be mounted in two vertical columns to form two vertically-oriented linear arrays **230-1, 230-2** of high-band radiating elements **400**. The four linear arrays **220, 230** may be mounted side-by-side on the backplane **210**. Herein, when the base station antennas according to embodiments of the present invention include multiple of the same components, these components may be referred to individually by their full reference numerals (e.g., low-band linear array **220-1**) and may be referred to collectively by the first part of their reference numeral (e.g., the low-band linear arrays **220**).

[0044] The linear arrays **230** of high-band radiating elements **400** are positioned between the linear arrays **220** low-band radiating elements **300**. The low-band linear arrays **220-1, 220-2** may be configured to transmit and receive signals in all or part of a first frequency band. In some embodiments, the first frequency band may comprise the 694-960

MHz frequency band or a portion thereof. The low-band linear arrays **220-1**, **220-2** may or may not be configured to transmit and receive signals in the same portion of the first frequency band. The high-band linear arrays **230-1**, **230-2** may be configured to transmit and receive signals in a second frequency band that is at higher frequencies than the first frequency band. In some embodiments, the second frequency band may comprise the 1695-2690 MHz frequency band or a portion thereof. The high-band linear arrays **230-1**, **230-2** may or may not be configured to transmit and receive signals in the same portion of the second frequency band.

[0045] As is also shown in **FIG. 2**, a plurality of parasitic coupling units **500** may extend forwardly from the reflector **214**. The parasitic coupling units **500** may be mounted along the centreline of the antenna **100** to form a vertically-oriented column of parasitic coupling units **500**. The column of parasitic coupling units **500** may extend between the two high-band linear arrays **230-1**, **230-2**. The parasitic coupling units **500** will be discussed in greater detail below with reference to **FIG. 7**.

[0046] **FIGS. 5-6** are enlarged perspective views of portions of the antenna assembly **200** that illustrate several of the radiating elements **300**, **400** and the parasitic coupling units **500** in greater detail. As can be seen in **FIGS. 2-3** and **5-6**, each low-band radiating element **300** in the first low-band linear array **220-1** is located in relatively close proximity to a low-band radiating element **300** in the second low-band linear array **220-2**. In fact, as can be seen in **FIG. 3**, the spacing between the two low-band linear arrays **220-1**, **220-2** may be less than the width of a low-band radiating element **300**. The two high-band linear arrays **230-1**, **230-2** are in even closer physical proximity to each other, although in terms of operating wavelength, the high-band linear arrays **230-1**, **230-2** may be spaced further apart than the low-band linear arrays **220-1**, **220-2**, since the operating wavelength of the low-band linear arrays **220-1**, **220-2** may be approximately two to three times the operating wavelength of the high-band linear arrays **230-1**, **230-2**.

[0047] Still referring to **FIGS. 5** and **6**, each low-band radiating element **300** may include a feed stalk **310** and one or more radiators **320**. The feed stalks **310** may comprise, for example, printed circuit boards having RF transmission lines thereon that carry RF signals to and from the radiators **320**. The feed stalks **310** mount the radiators **320** above the reflector/ground plane **214**. The radiators **320** comprise a pair of cross-dipole radiators **322**, **324** that are designed to transmit and receive RF signals at slant  $+45^\circ$  and  $-45^\circ$  linear polarizations. Each radiator **322**, **324** may comprise a pair of  $\lambda/4$  dipole arms **326**. All four dipole arms **326** of radiators **322** and **324** may be provided on a common printed circuit board

328. Likewise, each high-band radiating element 400 may include a feed stalk 410 and one or more radiators 420. The feed stalks 410 may comprise, for example, printed circuit boards having RF transmission lines thereon that carry RF signals to and from the radiators 420. The feed stalks 410 mount the radiators 420 above the reflector/ground plane 214. The radiators 420 comprise a pair of cross-dipole radiators 422, 424 that are designed to transmit and receive RF signals at slant +45° and -45° linear polarizations. Each radiator 422, 424 may comprise a pair of  $\lambda/4$  dipole arms 426. All four dipole arms 426 of radiators 422 and 424 may be provided on a common printed circuit board 428.

[0048] Each low-band linear array 220-1, 220-2 and each high-band linear array 230-1, 230-2 may form a separate antenna beam at each of two different polarizations (since the radiating elements 300, 400 are dual polarized radiating elements). Each low-band radiating element 300 in the first low-band linear array 220-1 may be horizontally aligned (i.e., aligned along a plane that is parallel to the plane defined by the horizon when the antenna 100 is mounted for normal use) with a respective low-band radiating element 300 in the second low-band linear array 220-2. Likewise, each high-band radiating element 400 in the first high-band linear array 230-1 may be horizontally aligned with a respective high-band radiating element 400 in the second high-band linear array 230-2. Each low-band linear array 220 may include a plurality of low-band radiating element feed assemblies 250, each of which includes two low-band radiating elements 300. Each high-band linear array 230 may include a plurality of high-band radiating element feed assemblies 260, each of which includes three high-band radiating elements 400. The number of radiating elements 300, 400 per feed assembly 250, 260 may be varied in other embodiments, as may the number of linear arrays 220, 230, the number of radiating elements 300, 400 per linear array 220, 230, etc.

[0049] When a signal is transmitted through the low-band radiating elements 300 of the first low-band linear array 220-1, an electromagnetic field is generated. The electromagnetic field may extend to the low-band radiating elements 300 that are part of the second low-band linear array 220-2, and hence signal energy will cross-couple between the low-band radiating elements 300 of the two low-band linear arrays 220. The degree of cross-coupling may be a function of a variety of different factors including, for example, the distance between the low-band radiating elements 300 of the two low-band linear arrays 220, the amplitude of the RF signal transmitted by the low-band radiating elements 300, and the operating frequency of the low-band radiating elements 300. Generally speaking, stronger cross-coupling will occur the smaller the distance between the low-band radiating elements 300, the greater the power of the RF signal transmitted through the low-band radiating

elements **300**, and the lower the operating frequency since at lower operating frequencies the distance between the two arrays is smaller in terms of wavelength. If the low-band radiating elements **300** of the two low-band linear arrays **220** are designed to transmit in the same frequency band, the cross-coupling tends to be stronger because both radiating elements **300** are impedance matched to operate within the exact same frequency band. Moreover, even in cases where the two low-band linear arrays **220** are designed to transmit in different frequency bands (e.g., one in the 700 MHz frequency band and the other in the 800 MHz frequency band), the cross-coupling still tends to be strong because the low-band radiating elements **300** of the different low-band linear arrays **220** are impedance matched to operate within frequency bands that are not very far apart.

[0050] As discussed above, when cross-coupling occurs between radiating elements of two different linear arrays, the azimuth radiation pattern of the transmitting linear array may be distorted. This distortion may, for example, change the azimuth beam width, beam squint and cross polarization isolation (both within a single linear array and/or within two different linear arrays that operate in the same frequency band) at the frequencies where the cross coupling is relatively strong, moving these characteristics away from desired values. The symmetry of the antenna pattern and the gain may also be degraded.

[0051] As noted above, pursuant to embodiments of the present invention, base station antennas may be provided that include parasitic coupling units that may be used to tune the cross-coupling between the radiating elements of two different linear arrays that operate in the same or closely-spaced frequency bands. In some embodiments, these parasitic coupling units may also be used as decoupling structures to reduce cross-coupling between the radiating elements of other linear arrays.

[0052] FIG. 7 is a perspective view of a parasitic coupling unit **500** according to embodiments of the present invention. As discussed above, a plurality of the parasitic coupling unit **500** may be included on the base station antenna **100**. In some embodiments, the parasitic coupling units **500** may be collinear with each other, extending along a vertical axis down the center of the backplane **210**.

[0053] As shown in FIG. 7, the parasitic coupling unit **500** may comprise a pair of elongated parasitic coupling structures **510-1**, **510-2** that may each have an L-shaped transverse cross-section. Each parasitic coupling structure **510** may include a base **512** and a wall **514**. The parasitic coupling unit **500** does not include any roof. The base **512** may comprise a planar strip that extends along the longitudinal axis L of the base station antenna **100** parallel to a plane defined by the reflector **214**. Each wall **514** may extend forwardly

from an edge of its associated base **512**. In the depicted embodiment, the wall **514** may extend from its associated base **512** at an angle of about ninety degrees, although other angles may be used. Each base **512** may include apertures **516** that may be used to mount the parasitic coupling unit **500** to, for example, the reflector **214** via screws, rivets or other fasteners. The fasteners may be formed of insulating materials so that the fasteners do not provide a direct galvanic connection between the parasitic coupling unit **500** and the ground plane/reflector **214**.

[0054] Each wall **514** may also comprise a planar strip that extends along the longitudinal axis L of the base station antenna **100** perpendicular to the plane defined by the ground plane/reflector **214**. Each wall **514** may include one or more longitudinally extending apertures **518** or "slots." In the depicted embodiment, each wall **514** includes a total of three slots **518**. As will be discussed in further detail below, the number, shape, height and/or length of the slots **518** may be varied to tune the parasitic coupling unit **500** in order to improve the radiation patterns of the low-band linear arrays **220** of base station antenna **100**. The slots **518** can have various different shapes such as a meander line, bow-tie shape, etc. so long as the electrical length of each slot **518** is within an appropriate range so that the unit **500** will operate as a parasitic coupling unit. In some embodiments, the slots may have an electrical length of between about 0.4 to 0.6 wavelengths.

[0055] The parasitic coupling structures **510-1**, **510-2** are mounted adjacent each other so that an internal cavity **520** is defined therebetween. The internal cavity **520** is open on each end thereof and also has an open top. The walls **514** and the ground plane/reflector **214** may define the internal cavity **520**. In some embodiments, each parasitic coupling structure **510** may be formed of a lightweight metal having good corrosion resistance and electrical conductivity such as, for example, aluminum. In the depicted embodiment, each parasitic coupling structure **510** may be formed by stamping material from a sheet of aluminum and then forming the aluminum into the shape shown in **FIG. 7**.

[0056] As is further shown in **FIG. 7**, a dielectric spacer **530** may be interposed between each parasitic coupling structure **510** and the underlying ground plane/reflector **214** (which is not depicted in **FIG. 7**, but extends underneath the dielectric spacer **530**). In some embodiments, a single dielectric spacer **530** may be used that is between both parasitic coupling structure **510-1**, **510-2** and the ground plane/reflector **214**, while in other embodiments a separate, smaller dielectric spacer **530** may be provided for each parasitic coupling structure **510** as is shown in **FIG. 7**. The dielectric spacer **530** may comprise a planar structure and, in some embodiments, may have the same size and shape as the base

**512.** The dielectric spacer **530** may be formed of plastic or another suitable dielectric material. Each dielectric spacer **530** may, in combination with the base **512** of one of the parasitic coupling structure **510** and the ground plane/reflector **214**, form a capacitive connection between each parasitic coupling structure **510** and the ground plane/reflector **214**. This capacitive connection may block DC signals while passing RF signals. A high dielectric constant dielectric spacer **530** may be used in some embodiments to provide increased capacitive coupling.

[0057] Referring again to **FIGS. 2** and **5-6**, it can be seen that base station antenna **100** includes a plurality of the parasitic coupling units **500**. The parasitic coupling units **500** may be arranged as a vertically-oriented linear array of parasitic coupling units **500** that extend down the center of the ground plane/reflector **214**. A parasitic coupling unit **500** is provided between each pair of horizontally (transversely) aligned low-band radiating elements **300**, and hence the number of parasitic coupling units **500** may be equal to the number of low-band radiating elements **300** in each of the low-band linear arrays **220** in some embodiments. Each parasitic coupling unit **500** may be horizontally aligned with a respective low-band radiating element **300** of each of the low-band linear arrays **220-1**, **220-2**. The positions of the parasitic coupling units **500** can be adjusted to tune the decoupling effects.

[0058] As shown in **FIG. 6**, each parasitic coupling unit **500** may extend forwardly from the ground plane/reflector **214** by a first distance  $H_1$ . Likewise, each low-band radiating element **300** may extend forwardly from the ground plane/reflector **214** by a second distance  $H_2$ . The amount that a parasitic coupling unit **500** or a radiating element **300**, **400** extends forwardly from the ground plane/reflector **214** may also be referred to herein as the respective "heights" of the parasitic coupling units **500** and radiating elements **300**, **400**. As can be seen, in some embodiments  $H_1$  is less than  $H_2$ . In some embodiments,  $H_1$  is less than half of  $H_2$ . In some embodiments,  $H_1$  is less than one third of  $H_2$ . In other words, in various embodiments, the height of each the parasitic coupling unit **500** may be less than, less than half, or less than one third, the height of each low-band radiating element **300**. As will be discussed in more detail below, designing the parasitic coupling units **500** to have heights that are substantially less than the heights of the low-band radiating elements **300** may ensure that the parasitic coupling units **500** do not substantially block the radiation emitted by the high-band radiating elements **400** when they are transmitting RF signals.

[0059] When a signal is transmitted through the low-band radiating elements **300** of the first low-band linear array **220-1**, each of the low-band radiating elements **300** will generate an electromagnetic field. In a conventional RRVV base station antenna, each of

these electromagnetic fields may encompass one or more of the radiating elements **300** of the second low-band linear array **220-2**, and will couple most strongly to the low-band radiating element **300** of the second low-band linear array **220-2** that is horizontally aligned with each respective transmitting low-band radiating element **300**. These cross-couplings between the low-band radiating elements **300** of the two low-band linear arrays **220** typically degrades the radiation pattern of the transmitting low-band linear array **220-1**, and may negatively impact the azimuth beamwidth, beam squint, cross-polarization isolation and the like. These negative effects result because a portion of the cross-coupled signals re-radiate from the low-band radiating elements **300** of the second low-band linear array **220-2**. The RF energy radiated from the low-band radiating elements **300** of the second low-band linear array **220-2** typically is not in-phase with respect to the RF energy radiated from the low-band radiating elements **300** of the first low-band linear array **220-1**. As a result, the radiation pattern of the first low-band linear array **220-1** may be distorted in undesirable ways, often including an increased azimuth beamwidth and lower gain values. The same effect occurs when the second low-band linear array **220-2** transmits RF signals.

[0060] The parasitic coupling units **500** may be positioned in the near field of respective low-band radiating elements **300** of the transmitting low-band linear array **220**. In particular, a parasitic coupling unit **500** may be positioned between each pair of horizontally-aligned low-band radiating elements **300**, where a first low-band radiating element **300** of the pair is part of the first low-band linear array **220-1** and the second low-band radiating element **300** of the pair is part of the second low-band linear array **220-2**. When the first low-band radiating element **300** of a pair transmits an RF signal, the resulting electromagnetic field may extend onto the parasitic coupling unit **500**. The slots **518** in the walls **514** may appear as magnetic dipoles which capture energy that would otherwise have impinged on the low-band radiating elements **300** of the non-active low-band linear array **220**. The provision of the parasitic coupling unit **500** may significantly decrease the amount of RF energy that directly couples from the transmitting low-band radiating element **300** of the pair to the non-transmitting low-band radiating element **300** of the pair.

[0061] The electromagnetic field that is generated by the transmitting low-band radiating element **300** may generate surface currents on the forwardly-extending walls **514** of the parasitic coupling unit **500**, and these surface currents may cause RF energy to be re-radiated from the parasitic coupling unit **500**. The parasitic coupling unit **500** may be designed so that this re-radiated energy is largely in-phase with the RF signal energy that is radiated by the transmitting low-band radiating element **300**. In particular, various aspects of

the parasitic coupling unit **500** may be tuned so that the re-radiated energy is more in-phase including the length of the parasitic coupling unit **500** in the vertical direction, the height thereof (i.e., how far the wall **514** extends forwardly), the length of the slots **518** included in the sidewalls **514** in the vertical direction and the number of slots **518** provided. A portion of the energy that is re-radiated energy from the parasitic coupling unit **500** may still couple to the non-transmitting low-band radiating element **300** of the pair, but the parasitic coupling unit **500** may be tuned so that this re-radiated energy is also more in-phase with the RF energy that is radiated by the transmitting low-band radiating element **300**. As a result, the radiation pattern of the transmitting low-band linear array **220** may be improved.

[0062] Moreover, since the cross-coupled RF energy that is re-radiated by the non-transmitting low-band radiating element **300** may be relatively in-phase with the RF energy transmitted by the transmitting low-band radiating elements **300**, the re-radiated cross-coupled energy may appear to increase the aperture size of the first low-band linear array **220-1** in the azimuth plane, thereby narrowing the azimuth beamwidth of the low-band linear arrays **220**. This may be advantageous in antenna designs where size constraints may otherwise make it difficult to provide a sufficiently narrow azimuth beamwidth, particularly for the low-band linear arrays **220**. In some embodiments, the parasitic coupling units **500** may be designed to provide a net increase in the total coupling from a transmitting low-band radiating element **300** to the non-transmitting low-band radiating element **300** of each pair, since the cross-coupling, if properly controlled, can provide beneficial effects such as narrowing of the azimuth beamwidth.

[0063] As noted above, the parasitic coupling units **500** may be tuned by, for example, varying the number of slots **518** and/or the length of the slots **518**. Simulation software such as CST Studio Suite and ANSYS HFSS may be used to select dimensions for the number of slots **518** and the length of the slots **518**. The length and/or the height of the parasitic coupling unit **500** may also be varied to optimize performance of the antenna. Performance may then be further optimized by testing actual antennas with different parasitic coupling unit designs and measuring actual performance. The slots **518** may have a length between  $0.4\lambda$  and  $0.6\lambda$  in some embodiments, where  $\lambda$  is the wavelength corresponding to the center frequency of the low-band in some embodiments.

[0064] In the depicted embodiment, each parasitic coupling unit **500** includes two parasitic coupling structures **510**, namely a first parasitic coupling structure **510-1** that is adjacent the first low-band linear array **220-1** and a second parasitic coupling structure **510-2** that is adjacent the second low-band linear array **220-2**. With such a design, the parasitic

coupling structure **510** that is closest to a transmitting low-band radiating element **300** tends to capture the majority of the RF energy and re-radiate the same. It will be appreciated, however, that in other embodiments a single parasitic coupling structure **510** may be used that, for example, is positioned midway between the two low-band linear arrays **220-1**, **220-2**. Such an embodiment is discussed below with reference to **FIG. 8D**. If only a single parasitic coupling structure **510** is used, it typically is necessary to re-tune the parasitic coupling structure **510** as the position thereof is typically changed and as it no longer interacts with another parasitic coupling structure **510** if the second parasitic coupling structure **510** is omitted.

[0065] It should be noted that while the parasitic coupling structures **510** in the embodiment depicted in **FIG. 7** have an L-shaped cross-section along the length thereof, such a design is not necessary for proper operation of the parasitic coupling units **500**. In particular, the primary functions of the base **512** may be (1) to provide a convenient surface for apertures **516** that are used to mount the parasitic coupling unit **500** to the ground plane/reflector **214** (or other surface) and (2) to provide capacitive coupling to the ground plane/reflector **214**. Accordingly, it will be appreciated that the base **512** need not extend the full length of the parasitic coupling unit **500**. In fact, the necessary capacitive connection may be achieved in a variety of ways, including decreasing the thickness of the dielectric spacer **530** and/or increasing the dielectric constant of the dielectric spacer **530** so that the surface area of the base **512** may be reduced considerably. It should be noted that the fasteners (not shown) used to attach the parasitic coupling unit **500** to the ground plane/reflector **214** may be plastic fasteners in order to avoid a direct galvanic connection between the parasitic coupling unit **500** and the ground plane/reflector **214**.

[0066] Referring again to **FIGS. 2-6**, it can also be seen that the linear array of parasitic coupling units **500** extends between the two high-band linear arrays **230-1**, **230-2**. The height of each high-band radiating element **400** that is included in the high-band linear arrays **230** may be significantly less than the height of each low-band radiating element **300**. In an RRVV antenna, the low-band radiating elements **300** may extend forwardly from the ground plane/reflector **214** two to three times as far as the high-band radiating elements **400**. If the parasitic coupling units **500** have a height that is, for example, between one third and one half the height of a low-band radiating element **300**, then the height of each parasitic coupling unit **500** may be about the same as, or a little less than, the height  $H3$  of a high-band radiating elements **400**. In some embodiments, the height  $H1$  of each parasitic coupling unit **500** may be as follows:

$$0.5*H3 < H1 < H2$$

[0067] It will also be appreciated that the height H1 of the parasitic coupling units 500 may exceed the height H3 of the high-band radiating elements 400.

[0068] Designing the parasitic coupling units 500 to have heights H1 that are less than or equal to the heights H3 of the respective high-band radiating elements 400 may ensure that the parasitic coupling units 500 do not substantially block the radiation emitted by the high-band radiating elements 400 when they are transmitting RF signals. As the parasitic coupling units 500 may be located in very close proximity to the high-band radiating elements 400, it may be important in some antenna designs (and particularly designs with broad azimuth beamwidths) that the parasitic coupling units 500 extend forwardly from the ground plane/reflector 214 less than the high-band radiating elements 400. In other embodiments, the parasitic coupling units 500 may extend forwardly from the ground plane/reflector 214 a greater distance than the high-band radiating elements 400.

[0069] While the parasitic coupling units 500 may act as parasitic structures that capture and re-radiate low-band signal energy to improve the radiation patterns of the low-band linear arrays 220, they may serve a different function with respect to the high-band linear arrays 230. In particular, the parasitic coupling units 500 may act as RF radiation shields with respect to the high-band radiating elements 400. The one or more slots 518 included in the walls 514 may be designed to be relatively transparent at the high-band frequencies, and hence the walls 514 may appear as grounded metallic walls that are interposed between pairs of adjacent high-band radiating elements 400 of the two high-band linear arrays 230. Such (capacitively) grounded walls may act like RF radiation shields, thereby reducing cross-coupling between the transmitting high-band radiating elements 400 and the non-transmitting high-band radiating elements 400 of adjacent high-band linear arrays 230. Moreover, since the parasitic coupling units 500 may be nearly as tall as the high-band radiating elements 400, the parasitic coupling units 500 may be effective as an RF radiation shield in the high-band frequency range.

[0070] As is further shown in FIGS. 2-6, one or more arrays of parasitic strips 600 may also be included in the base station antenna 100. In particular, as shown best in FIGS. 5-6, a central array of parasitic strips 600 may extend along the centerline of the antenna 100. Each parasitic strip 600 may comprise a metal strip (which may be implemented, for example, using an elongated printed circuit board having a substantially continuous metal layer) that is mounted at approximately the same height above the ground plane as the radiators as the low-band radiating elements 300. Support structures 610 may be used to

mount the parasitic strips **600** above the ground plane/reflector **214**. The support structures **610** may be mounted within the internal cavities **520** of the parasitic coupling units **500**, as is shown in **FIGS. 5-6**. In the depicted embodiment, the center of each parasitic strip **600** in the central array is vertically offset with respect to the low-band radiating elements **300**. In other words, in some embodiments, a center of each parasitic strip **600** in the vertical direction falls in the middle of a square defined by four of the low-band radiating elements **300** when the antenna **100** is mounted for use. The positions of the center of each parasitic strip **600** may be varied to modify the radiation pattern.

[0071] In some embodiments, the antenna **100** may include additional arrays of parasitic strips **600** that extend along the outer edges of the antenna assembly **200**. The outer arrays may be identical to the central array described above, except that the parasitic strips in the outer arrays may be vertically aligned with respect to the low-band radiating elements **300** (i.e., a center of each parasitic strip **600** in the outer arrays **270-2, 270-3** may be horizontally aligned with a center of a respective one of the low-band radiating elements **300** in the first low-band linear array **220-1** and with a center of a respective one of the low-band radiating elements **300** in the second low-band linear array **220-2**).

[0072] As described above, the parasitic coupling units **500** according to embodiments of the present invention may capture RF energy transmitted from an adjacent transmitting low-band radiating element **300**, at least some of which otherwise would have coupled to a non-transmitting low-band radiating element **300** of the other (non-transmitting) low-band linear array **220**. The parasitic coupling units **500** may also be designed to re-radiate at least some of this RF energy. Some of the re-radiated RF energy may couple to a non-transmitting low-band radiating element **300** of the non-transmitting low-band linear array **220** and, in some cases, the parasitic coupling units **500** may increase the amount of RF energy that is coupled to a non-transmitting low-band radiating element **300**. The parasitic coupling units **500** may be designed so that the re-radiated RF energy is closer to being in-phase with the RF energy transmitted by the transmitting low-band linear array **220**. The parasitic coupling units **500** may narrow the azimuth beamwidth of the transmitting low-band linear array **220** as compared to the azimuth beamwidth that would be achievable if the parasitic coupling units **500** were not provided.

[0073] As noted above, the length, width and height of the parasitic coupling units **500** according to embodiments of the present invention may be varied to enhance the performance thereof. In some embodiments, the width of the parasitic coupling unit **500** may be between 0.05 and 0.154 of the wavelength corresponding to a center frequency of the

combined operating frequency band of the low-band linear arrays **220**. The height of the parasitic coupling unit **500** may be between 0.02 and 0.15 of the wavelength corresponding to the center frequency of the combined operating frequency band of the low-band linear arrays **220**.

[0074] It will be appreciated that numerous variations may be made to the base station antennas and parasitic coupling units disclosed herein without departing from the scope of the present invention. For example, the number of linear arrays and/or radiating elements included in the base station antenna may be varied, as can the locations of the linear arrays. Likewise, parasitic coupling units may or may not be provided between each pair of radiating elements in different linear arrays. Additionally, the radiating elements in the different linear arrays need not be aligned with each other. It will also be appreciated that the parasitic coupling units could be made longer so that they can be interposed between multiple radiating elements in each of two side-by-side linear arrays, and multiple sets of slots **518** could be formed in these elongated parasitic coupling structures.

[0075] It will also be appreciated that, while the use of parasitic coupling units has primarily been described above with reference to low-band linear arrays that operate in some or all of the 694-960 MHz frequency band, embodiments of the present invention are not limited thereto. Instead, the parasitic coupling units described herein may be designed to perform the same parasitic coupling function with respect to other frequency bands. It will also be appreciated that the parasitic coupling units will not always be designed to act as an RF radiation shield with respect to linear arrays in other frequency bands.

[0076] **FIGS. 8A-8D** are schematic perspective views of example alternative embodiments of the parasitic coupling unit **500**.

[0077] For example, the base **512** of the parasitic coupling unit **500** may be modified in various ways. Referring first to **FIG. 8A**, a parasitic coupling unit **500A** is illustrated that is similar to the parasitic coupling unit **500**, except that the base **512A** on each parasitic coupling structure **510** of parasitic coupling unit **500A** extends inwardly (i.e., toward the other parasitic coupling structure **510**) instead of outwardly as in the case of parasitic coupling unit **500**.

[0078] As another example, **FIG. 8B** illustrates a parasitic coupling unit **500B** that again is similar to the parasitic coupling unit **500** of **FIG. 7**, except that the base on each parasitic coupling structure **510** of parasitic coupling unit **500B** comprises a pair of tabs **512B** as opposed to a strip that extends the full length of the wall **514**. In other embodiments, one or more of the tabs **512B** may extend inwardly instead of outwardly.

[0079] As yet another example, **FIG. 8C** illustrates a parasitic coupling unit **500C** that is similar to the parasitic coupling unit **500A** of **FIG. 8A**, except that the parasitic coupling unit **500C** comprises a unitary base **512C**.

[0080] As mentioned above, in still other embodiments, parasitic coupling units may be provided that include a single parasitic coupling structure **510** as opposed to a pair of parasitic coupling structures **510**. **FIG. 8D** depicts one such parasitic coupling structure **500D**. While the parasitic coupling structure **500D** uses tabs **512C** to implement the base, it will be appreciated that any of the above-described designs for the base could be used, as well as any other base design that performs one or both of the above-described functions of the base.

[0081] The parasitic coupling units according to embodiments of the present invention may work by diverting a portion of the electromagnetic field generated by a radiating element toward the parasitic coupling unit as opposed to toward a radiating element of another linear array. The parasitic coupling unit may then re-radiate RF energy, including RF energy onto one or more of the radiating element of a nearby, non-transmitting linear array. The parasitic coupling unit may be designed so that the re-radiated RF energy is more in-phase with the RF energy emitted by the transmitting radiating elements, and hence may reduce the impact that the radiating elements of the nearby linear array have on the radiation pattern of the transmitting linear array.

[0082] The present invention has been described above with reference to the accompanying drawings, in which certain embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0083] Unless otherwise defined, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. The terminology used in the description of the invention herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used in the description of the invention and the appended claims, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that when an element (e.g., a device, circuit, etc.) is referred to as being "connected" or "coupled" to another element, it can be directly connected or coupled to the other element or intervening elements may be present.

In contrast, when an element is referred to as being "directly connected" or "directly coupled" to another element, there are no intervening elements present.

[0084] In the drawings and specification, there have been disclosed typical embodiments of the invention and, although specific terms are employed, they are used in a generic and descriptive sense only and not for purposes of limitation, the scope of the invention being set forth in the following claims.

THAT WHICH IS CLAIMED IS:

1. A base station antenna, comprising:
  - a panel that includes a ground plane;
  - a first linear array that includes a first plurality of radiating elements that extend forwardly from the panel, the first linear array extending along a first axis;
  - a second linear array that includes a second plurality of radiating elements that extend forwardly from the panel, the second linear array extending along a second axis that is generally parallel to the first axis; and
  - a parasitic coupling unit between a first radiating element of the first linear array and a first radiating element of the second linear array and between the first axis and the second axis,wherein the parasitic coupling unit includes a first parasitic coupling structure, the first parasitic coupling structure including a first base that is capacitively coupled to the ground plane and a first wall that extends forwardly from the first base, the first wall including at least one slot.
2. The base station antenna of Claim 1, wherein the first wall extends along a third axis that is generally parallel to the second axis, and wherein the at least one slot extends along a fourth axis that is generally parallel to the second axis.
3. The base station antenna of Claims 1 or 2, wherein the parasitic coupling unit further includes a second parasitic coupling structure, the second parasitic coupling structure including a second base that is capacitively coupled to the ground plane and a second wall that extends upwardly from the second base and extends parallel to the first wall, the second wall including at least one slot.
4. The base station antenna of Claim 3, wherein each of the first and second walls includes at least two slots that extend in parallel to each other.
5. The base station antenna of Claim 4, wherein the first parasitic coupling structure is spaced apart from the second parasitic coupling structure and does not directly contact the second parasitic coupling structure.
6. The base station antenna of any of Claims 1-5, wherein the parasitic coupling unit further includes a dielectric spacer that separates the parasitic coupling unit from the

ground plane.

7. The base station antenna of Claim 6, wherein the first base includes a plurality of mounting apertures, and wherein a plurality of dielectric fasteners extend through the respective mounting apertures to attach the first parasitic coupling structure with the ground plane with the dielectric spacer therebetween.

8. The base station antenna of any of Claims 1-7, wherein the first base extends parallel to the ground plane.

9. The base station antenna of any of Claims 1-8, wherein a height of the first wall above the ground plane is less than a height of at least one of the first plurality of radiating elements above the ground plane.

10. The base station antenna of any of Claims 1-9, further comprising:  
a third plurality of radiating elements that are part of a third linear array; and  
a fourth plurality of radiating elements that are part of a fourth linear array,  
wherein the first parasitic coupling structure is between a first of the first plurality of radiating elements and a first of the second plurality of radiating elements, and is further between a first of the third plurality of radiating elements and a first of the fourth plurality of radiating elements, and

wherein each radiating element in the first plurality of radiating elements is configured to transmit and receive radio frequency signals in at least a first portion of a first frequency band, each radiating element in the second plurality of radiating elements is configured to transmit and receive radio frequency signals in at least a second portion of the first frequency band, each radiating element in the third plurality of radiating elements is configured to transmit and receive radio frequency signals in at least a first portion of a second frequency band that is higher than the first frequency band, and each radiating element in the fourth plurality of radiating elements is configured to transmit and receive radio frequency signals in at least a second portion of the second frequency band.

11. The base station antenna of Claim 10, wherein a height of the first wall above the ground plane is at least two thirds a height of at least one of the third plurality of radiating elements above the ground plane.

12. The base station antenna of Claim 10, wherein the first parasitic coupling

structure is configured to act as a radiation shield that isolates at least one of the third radiating elements from at least one of the fourth radiating elements.

13. The base station antenna of any of Claims 1-12, wherein the first parasitic coupling structure has an L-shaped cross-section.

14. The base station antenna of any of Claims 3-13, wherein the first and second parasitic coupling structures define an internal cavity therebetween, and wherein a mounting structure for a parasitic strip extends upwardly from the ground plane through the internal cavity.

15. The base station antenna of any of Claims 1-14, wherein a length of the first wall is at least as long as a length of the at least one slot and no more than the length of the ground plane.

16. The base station antenna of any of Claims 1-15, wherein a height of the at least one slot in a direction perpendicular to a plane defined by the ground plane is between  $0.02\lambda$  and  $0.15\lambda$  where  $\lambda$  is a wavelength corresponding to a center frequency of the combined operating frequency band of the first and second linear arrays.

17. The base station antenna of Claim 16, wherein a length of each slot in a direction parallel to the plane defined by the ground plane is between  $0.4\lambda$  and  $0.6\lambda$ .

18. The base station antenna of any of Claims 1-17, wherein the parasitic coupling unit is configured to collect RF energy radiated by the first linear array and to re-radiate at least some of the collected RF energy.

19. A base station antenna, comprising:  
a panel that includes a ground plane;  
a first linear array that includes a first plurality radiating elements that extend forwardly from the panel, the first linear array extending along a first axis;  
a second linear array that includes a second plurality of radiating elements that extend forwardly from the panel, the second linear array extending along a second axis that is generally parallel to the first axis; and  
a plurality of parasitic coupling units extending along a third axis between the first linear array and the second linear array,

wherein each parasitic coupling unit comprises spaced-apart first and second metal parasitic coupling structures that face each other to define an internal cavity therebetween, each parasitic coupling structure including a base and a wall that extends forwardly from the base,

wherein at least some of the parasitic coupling units are tuned to increase the phase alignment between RF energy radiated by the first linear array that is not absorbed by elements of the base station antenna and RF energy radiated by the first linear array that is absorbed by ones of the second plurality of radiating elements and re-radiated therefrom.

20. The base station antenna of Claim 19, wherein each wall includes at least one slot that extends generally parallel to the second axis.

21. The base station antenna of Claims 19 or 20, wherein each of the first and second metal parasitic coupling structures is mounted on a respective dielectric spacer and is capacitively coupled to the ground plane.

22. The base station antenna of any of Claims 19-21, wherein each of the walls includes at least two slots that extend in parallel to each other.

23. The base station antenna of any of Claims 19-22, wherein the first metal parasitic coupling structure does not directly contact the second metal parasitic coupling structure.

24. The base station antenna of any of Claims 19-23, wherein a height of each wall above the ground plane is less than one half a height of at least one of the first plurality of radiating elements above the ground plane.

25. The base station antenna of any of Claims 19-24, wherein the first parasitic coupling structure is positioned between a first of the first plurality of radiating elements and a first of the second plurality of radiating elements, and is further positioned between a first of a third plurality of radiating elements that are part of a third linear array and a first of a fourth plurality of radiating elements that are part of a fourth linear array, and

wherein each radiating element in the first plurality of radiating elements is configured to transmit and receive radio frequency signals in at least a first portion of a first frequency band, each radiating element in the second plurality of radiating elements is configured to transmit and receive radio frequency signals in at least a second portion of the

first frequency band, each radiating element in the third plurality of radiating elements is configured to transmit and receive radio frequency signals in at least a first portion of a second frequency band that is at higher frequencies than the first frequency band, and each radiating element in the fourth plurality of radiating elements is configured to transmit and receive radio frequency signals in at least a second portion of the second frequency band.

26. The base station antenna of Claim 25, wherein a height of the each wall above the ground plane is at least two thirds a height of at least one of the third plurality of radiating elements above the ground plane.

27. The base station antenna of Claim 25, wherein the first parasitic coupling structure is configured to act as an RF shield that isolates at least one of the third radiating elements from at least one of the fourth radiating elements.

28. The base station antenna of Claim 22, wherein a length of each slot in a direction parallel to the plane defined by the ground plane is between  $0.4\lambda$  and  $0.6\lambda$  where  $\lambda$  is a wavelength corresponding to a center frequency of the combined operating frequency band of the first and second linear arrays.

29. A base station antenna, comprising:

- a panel that includes a ground plane;
- a first low-band linear array that includes a first plurality of low-band radiating elements that are mounted to extend forwardly from the panel;
- a second low-band linear array that includes a second plurality of low-band radiating elements that are mounted to extend forwardly from the panel;
- a first high-band linear array that includes a first plurality of high-band radiating elements that are mounted to extend forwardly from the panel;
- a second high-band linear array that includes a second plurality of high-band radiating elements that are mounted to extend forwardly from the panel;
- a plurality of parasitic coupling units extending along an axis between the first low-band linear array and the second low-band linear array,

wherein each low-band radiating element is configured to transmit and receive radio frequency signals in at least a portion of a first frequency band and each high-band radiating element is configured to transmit and receive radio frequency signals in at least a portion of a second frequency band that has a lowest frequency that is higher in frequency than the

highest frequency in the first frequency band, and

wherein each parasitic coupling unit comprises a base and a wall that extends forwardly from the base and is configured to collect and re-radiate RF energy in the first frequency band.

30. The base station antenna of Claim 29, wherein the plurality of parasitic coupling units also extend between the first high-band linear array and the second high-band linear array.


31. The base station antenna of Claim 30, wherein the parasitic coupling units are configured to act as RF shields that isolate the first high-band linear array from the second high-band linear array.


32. The base station antenna of any of Claims 29-31, wherein the walls of at least some of the parasitic coupling units include at least one slot.

33. The base station antenna of any of Claims 29-32, wherein each of the parasitic coupling units is capacitively coupled to the ground plane.

34. The base station antenna of any of Claim 29-33, wherein a height of each wall above the ground plane is less than one half a height of at least one of the first plurality of radiating elements above the ground plane and is at least two thirds a height of at least one of the third plurality of radiating elements above the ground plane.

1/8

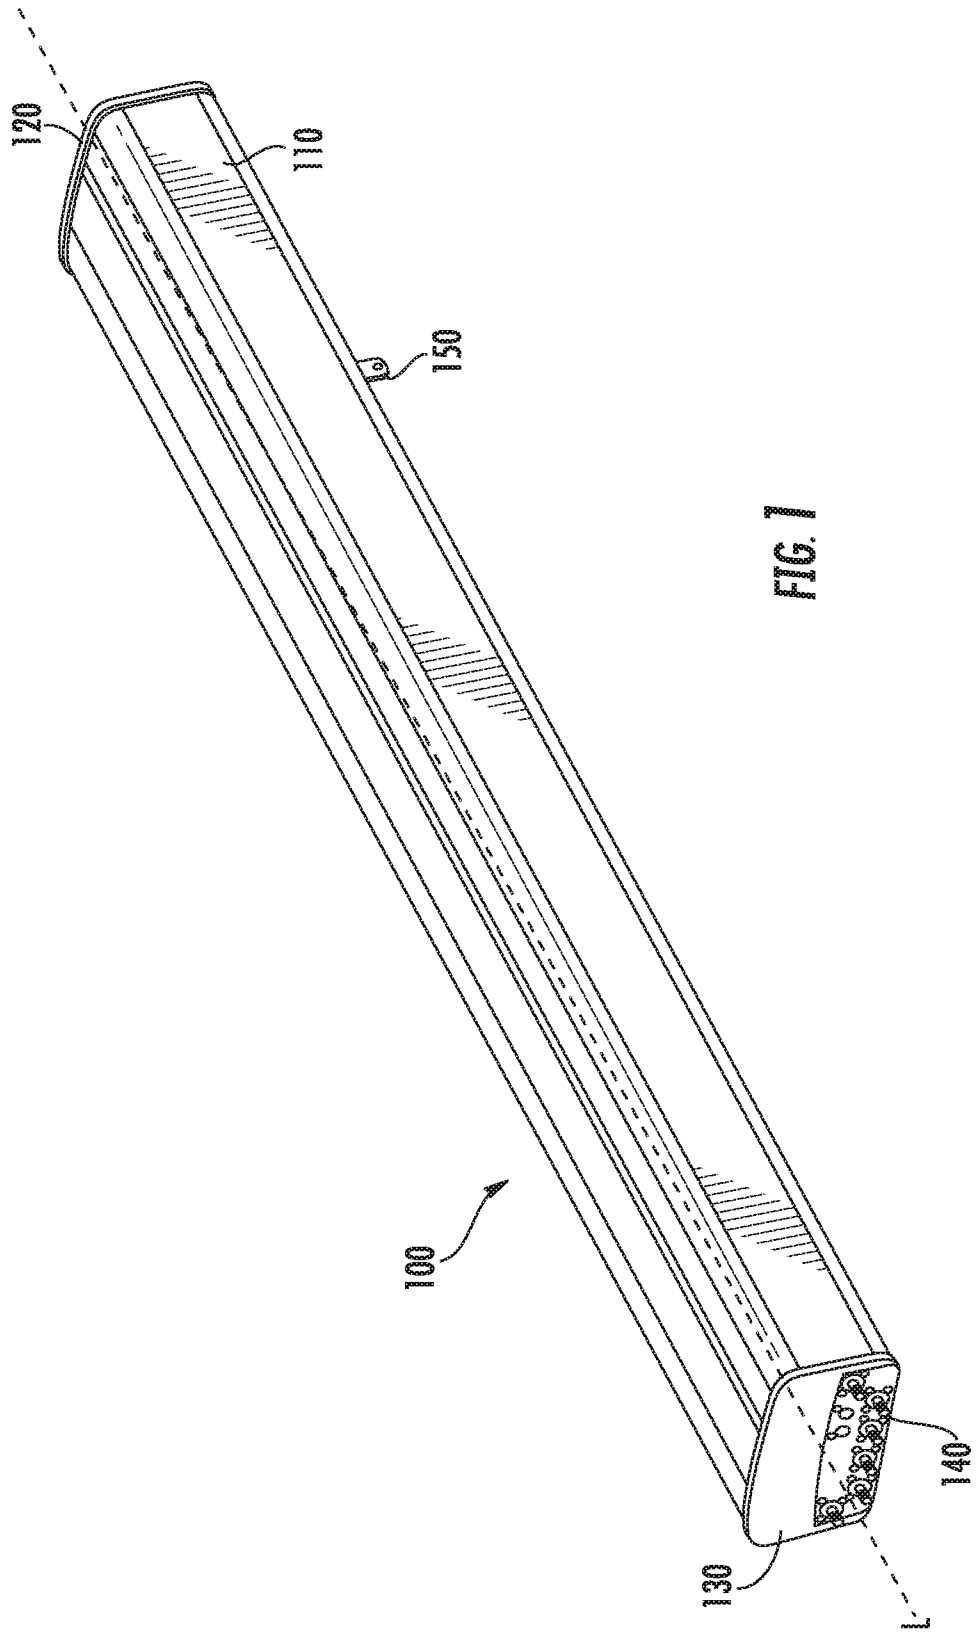

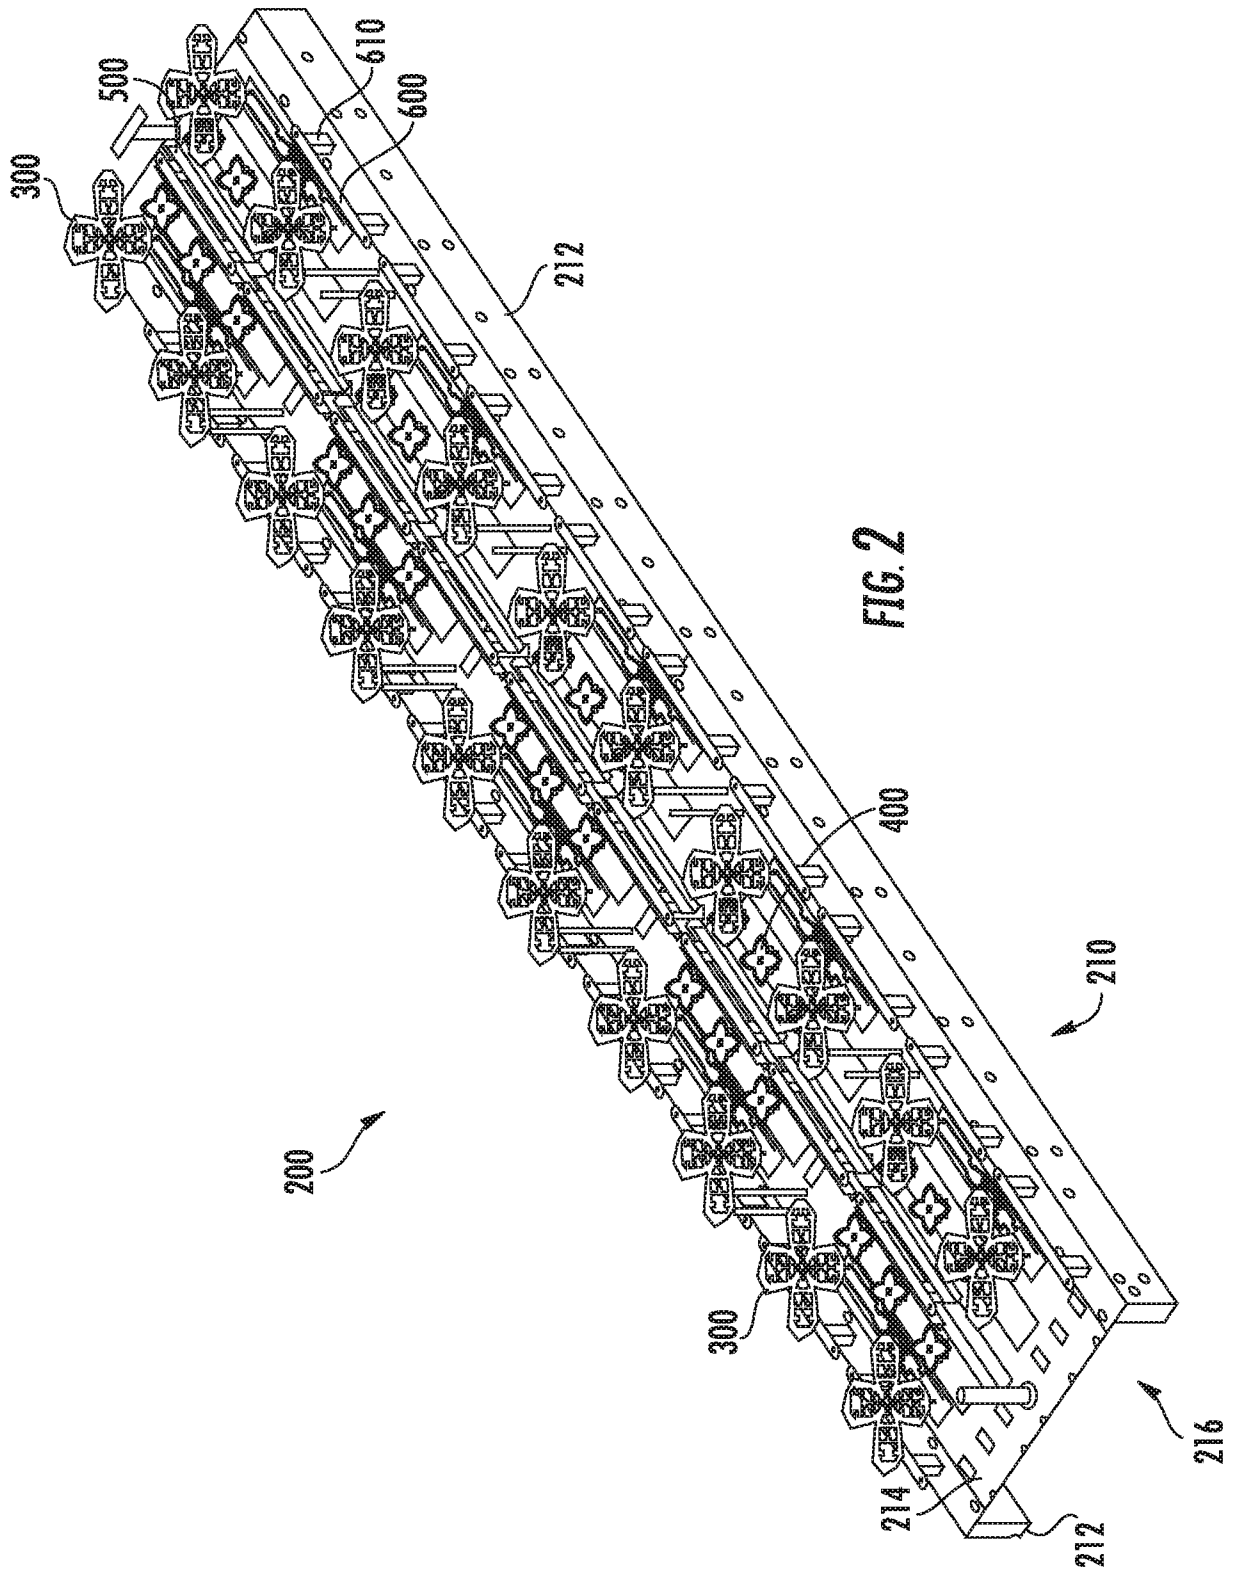

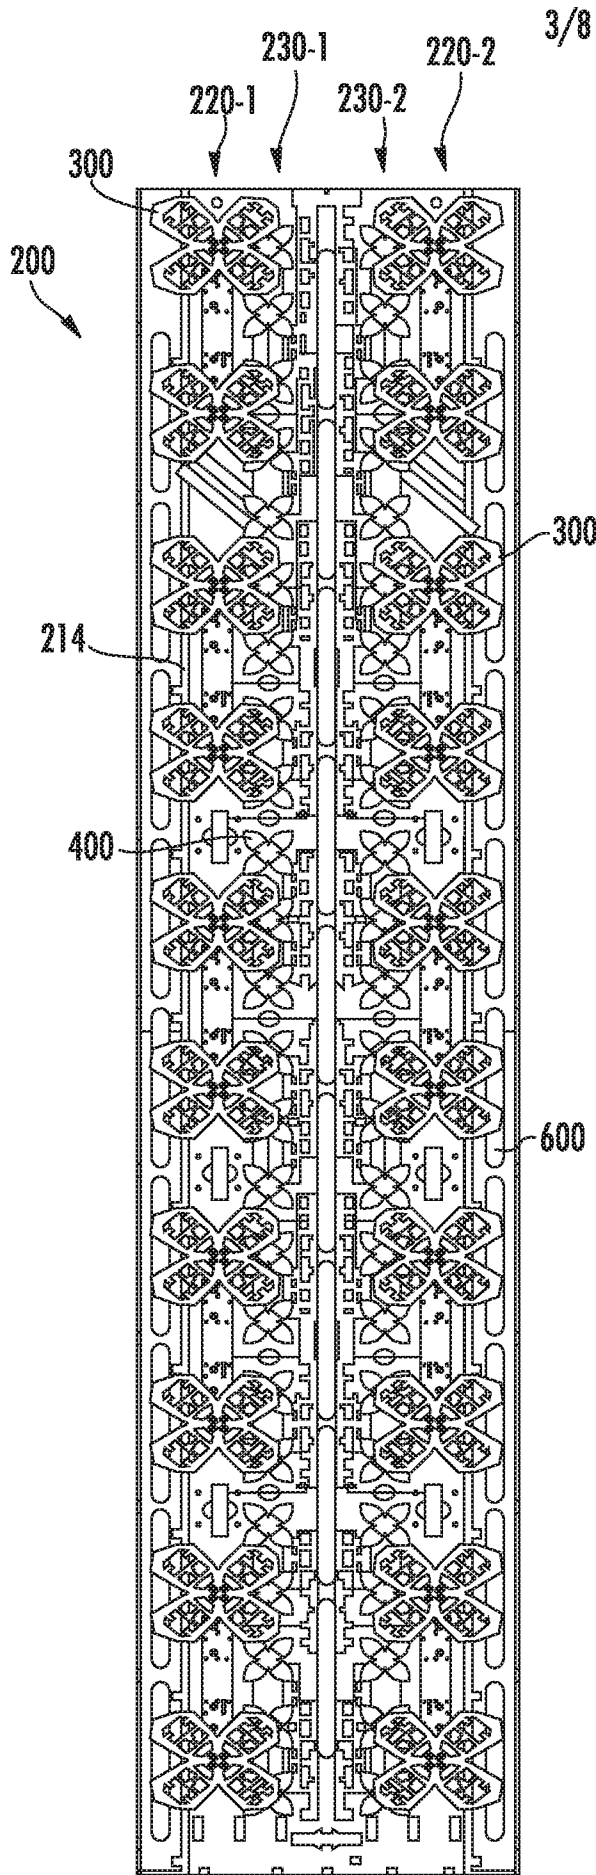


FIG. 3

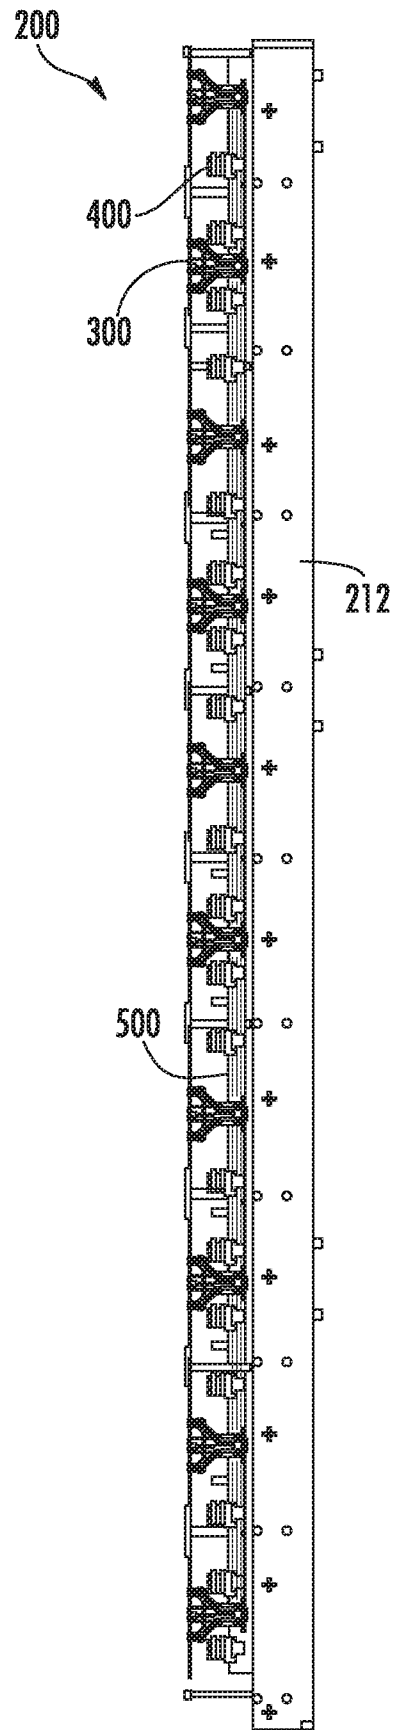


FIG. 4

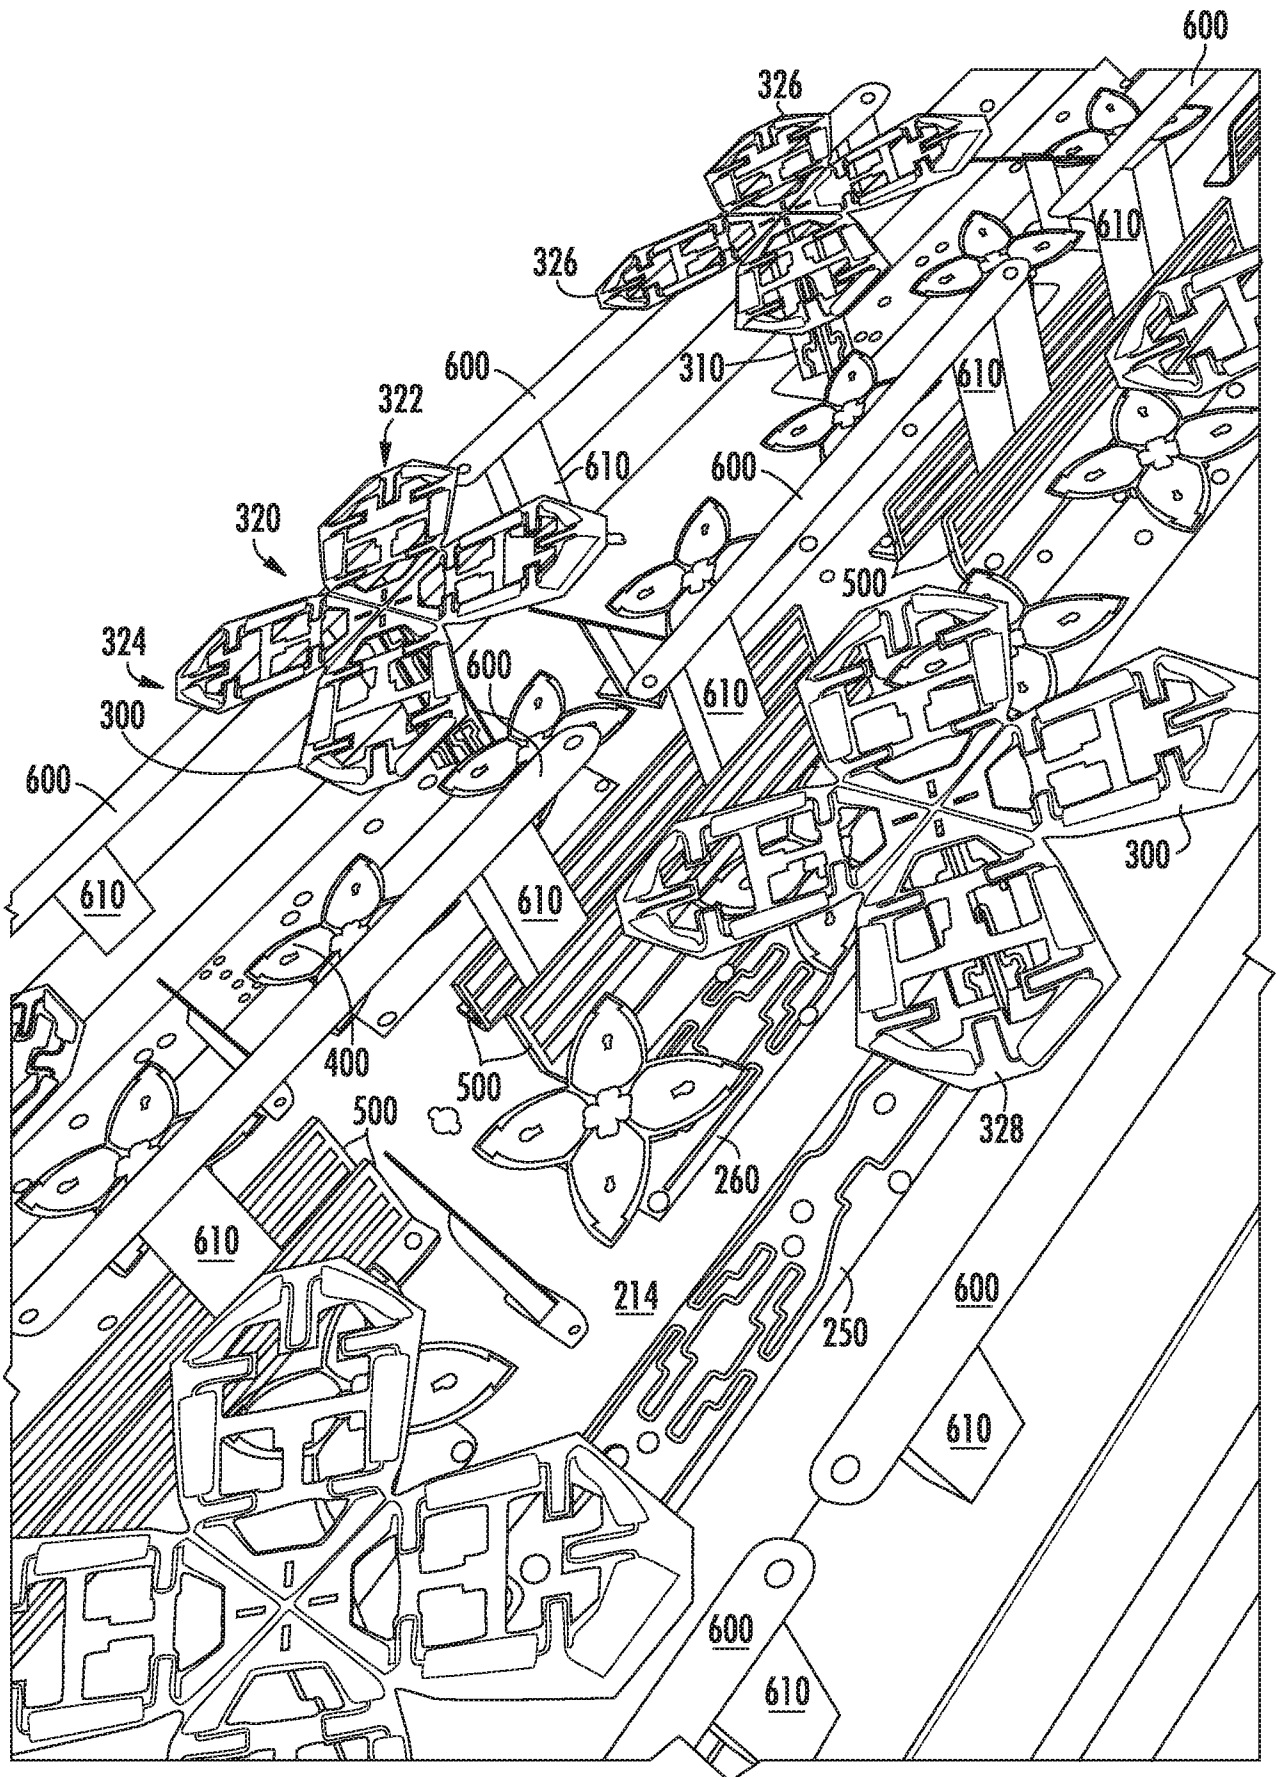


FIG. 5

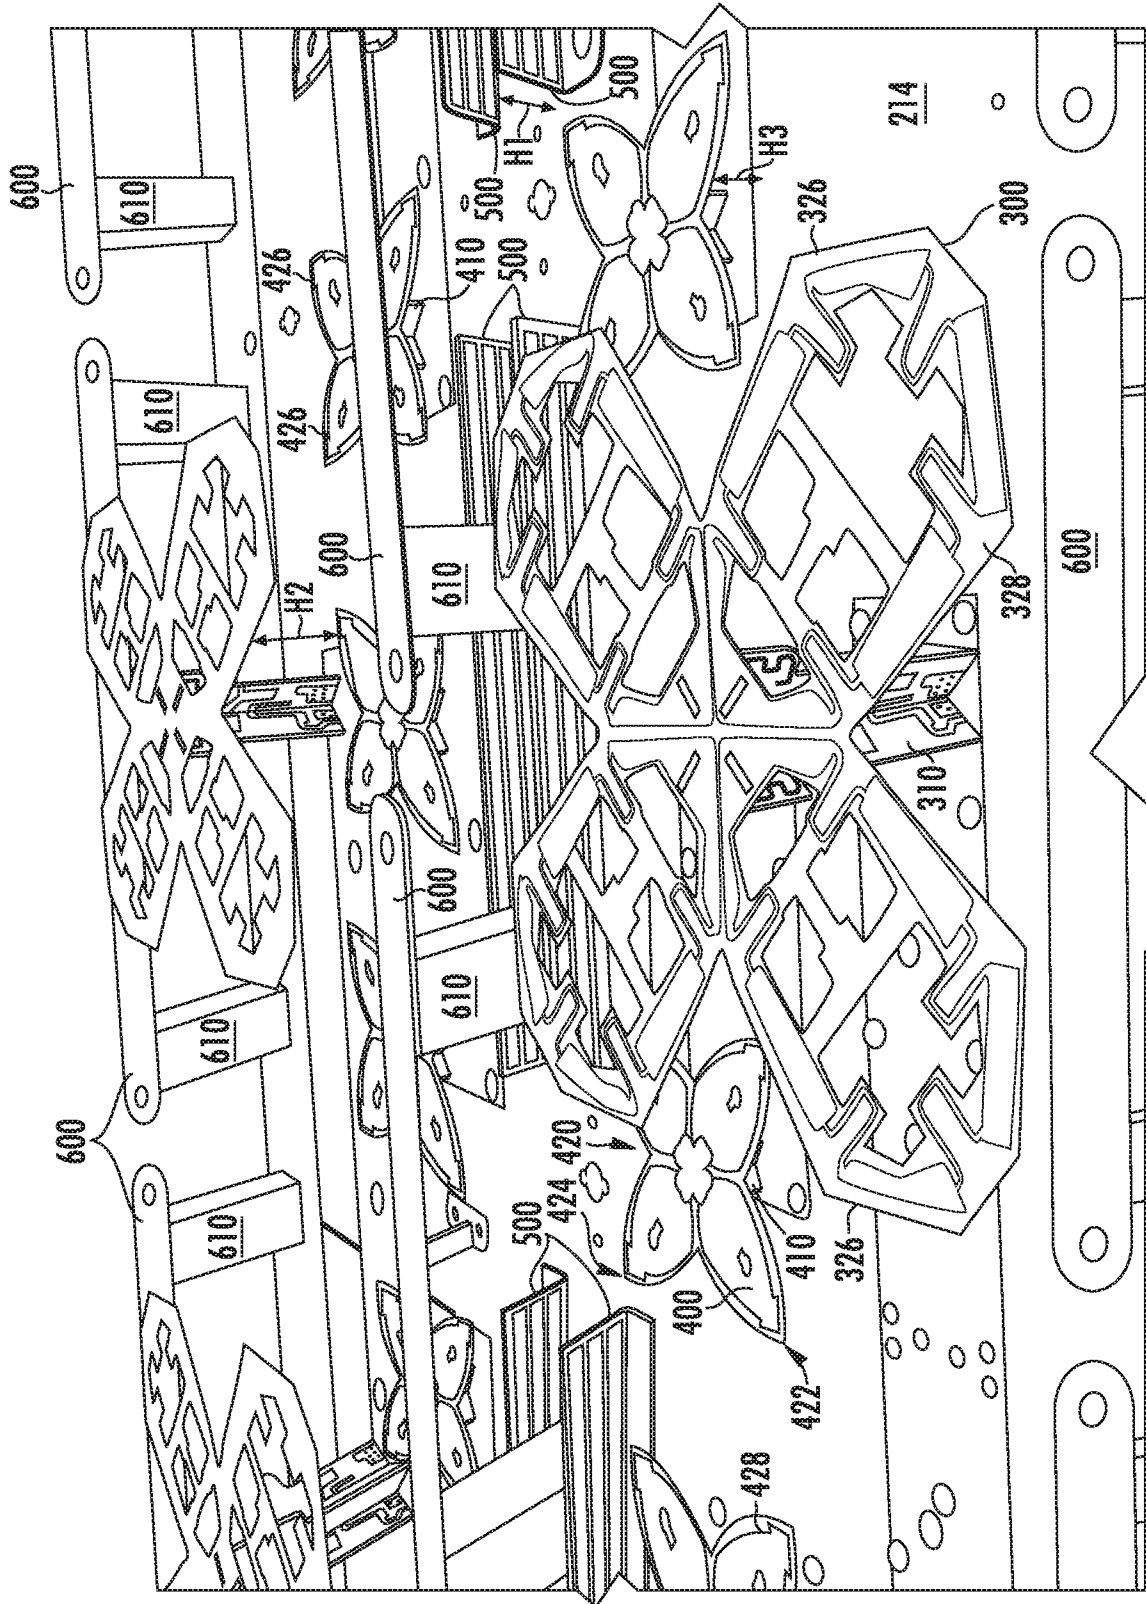


FIG. 6

6/8

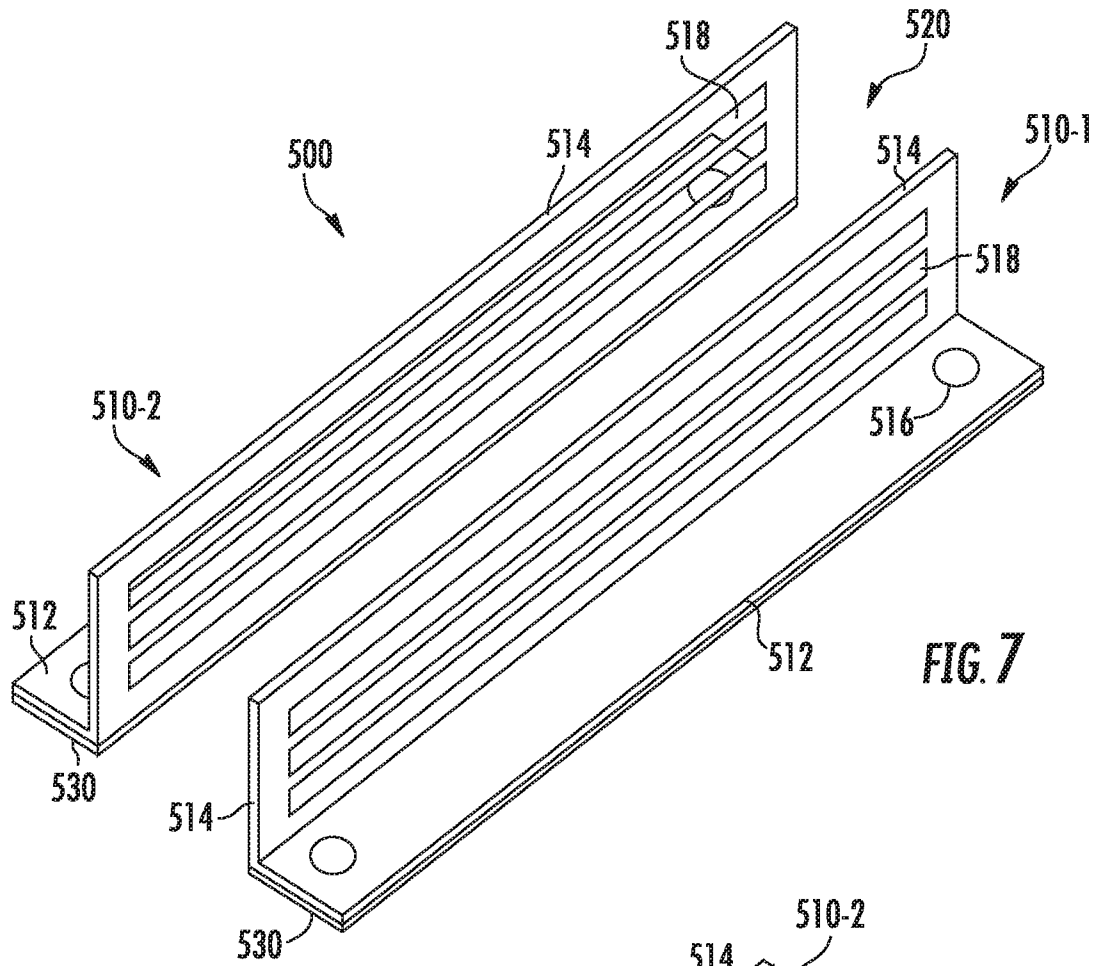


FIG. 7




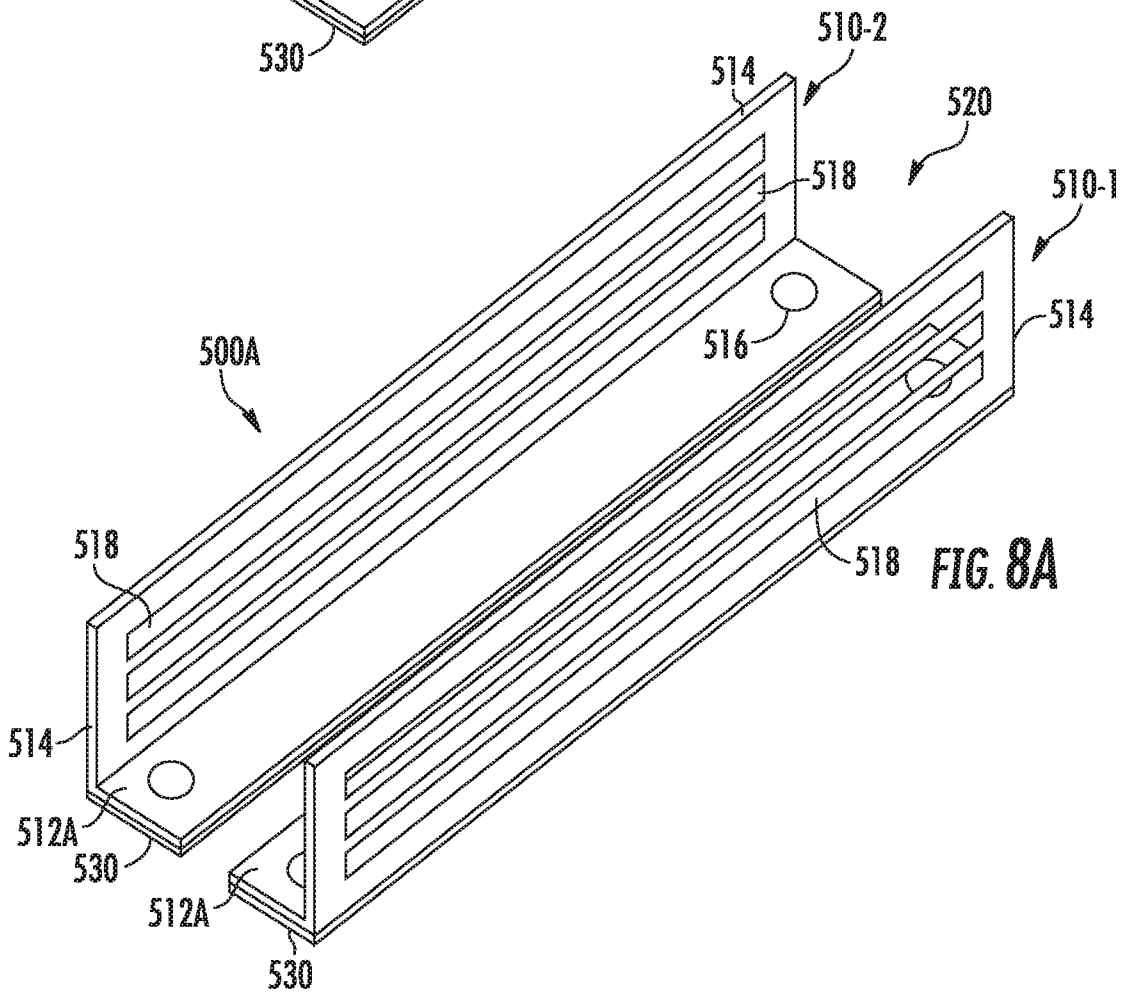


FIG. 8A

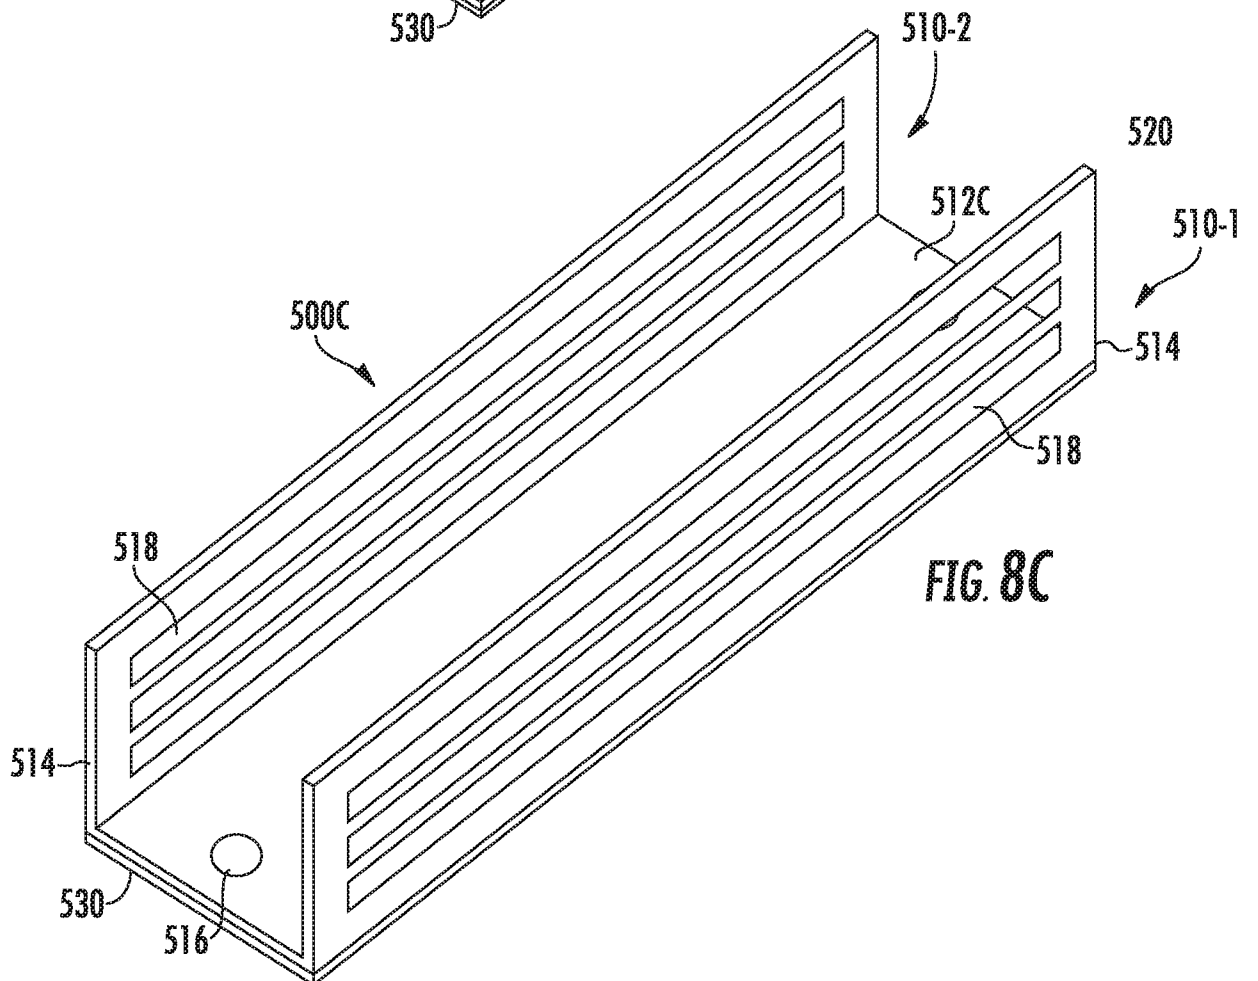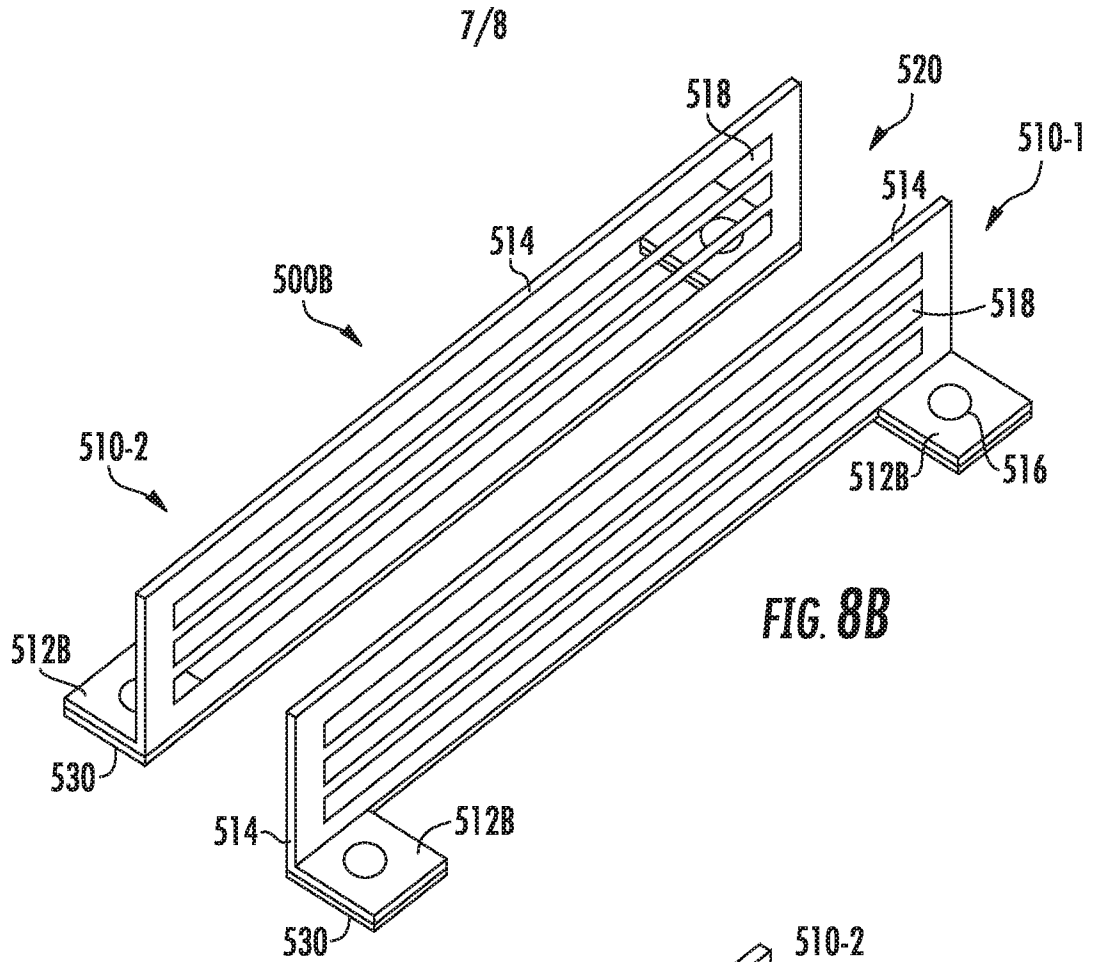

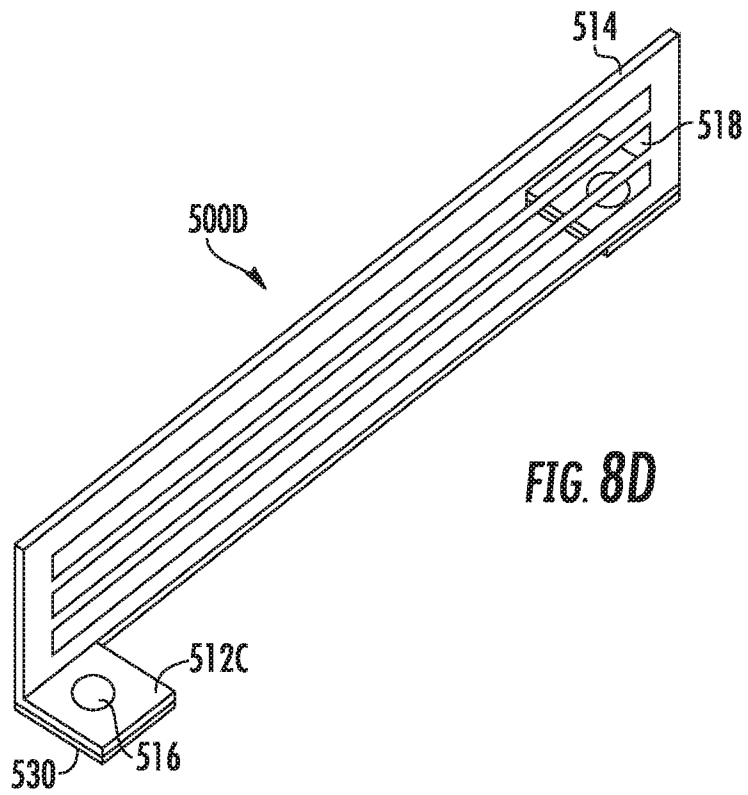

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US18/20359

## A. CLASSIFICATION OF SUBJECT MATTER

IPC - H01Q 1/52, 21/12, 3/26, 5/00, 5/10, 5/40, 5/48, 5/49 (2018.01)

CPC - H01Q 1/52, 1/246, 21/062, 21/12, 21/0037, 3/26, 5/00, 5/10, 5/40, 5/48, 5/49

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

See Search History document

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

See Search History document

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

See Search History document

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y --- A	US 2016/0254594 A1 (COMMSCOPE TECHNOLOGIES LLC) September 1, 2016; FIG. 5, paragraphs [0033]-[0035], [0043]	1-3 --- 19-21 & 29-32
Y	US 2002/0070902 A1 (JOHNSON, G et al.) June 13, 2002; paragraphs [0022] & [0048]	1-3
Y --- A	US 2014/0043195 A1 (JAYBEAM UK) February 13, 2014; FIG. 8A, paragraphs [0067], [0069], & [0071]	1-3 --- 4, 5, & 29-32
A	US 2013/0293425 A1 (ZHU, J et al.) November 7, 2013; FIG. 9, paragraph [0062]	1-5, 19-21, & 29-32
A	US 2003/0193446 A1 (CHEN, S) October 16, 2003; paragraph [0036]	1-5, 19-21, & 29-32
A	US 2011/0006949 A1 (WEBB, K) January 13, 2011; paragraphs [0032], [0037], & [0038]	1-5, 19-21, & 29-32
A	US 2005/0073465 A1 (OLSON, S) April 7, 2005, Fig. 2, paragraph [0016]	1-5, 19-21, & 29-32

 Further documents are listed in the continuation of Box C. See patent family annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

01 May 2018 (01.05.2018)

Date of mailing of the international search report

17 MAY 2018

Name and mailing address of the ISA/

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents

P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer

Shane Thomas

PCT Helpdesk: 571-272-4300

PCI USP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US18/20359

**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.: 6-18, 22-28, 33, & 34  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2.  As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

- Remark on Protest**
- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
  - The additional search fees were accompanied by the applicant's protest but the applicable protest fee was *not paid within the time limit specified in the invitation*.
  - No protest accompanied the payment of additional search fees.