# United States Patent [19]

**Bull**

[11] **Patent Number: 4,620,473**

[45] **Date of Patent: Nov. 4, 1986**


[54] **MECHANISM FOR TIMING STRAND MOVEMENT RELATIVE TO ROTATION OF SPOOL HOLDERS OR CARRIERS FOR STRAND SUPPLY SPOOLS OR BOBBINS**


[76] Inventor: **Jeffrey F. Bull,** 1270 Hazelwood Ave., Akron, Ohio 44305



[21] Appl. No.: **766,493**

[22] Filed: **Aug. 19, 1985**

[51] **Int. Cl.**[4] ..... **D04C 3/06;** D04C 3/24; D04C 3/38; D04C 3/42

[52] **U.S. Cl.** ..... **87/48;** 87/29; 87/33; 87/37; 87/44

[58] **Field of Search** ..... 87/29, 30, 32–34, 87/14–17, 44–48



[56] **References Cited**

U.S. PATENT DOCUMENTS

| | | | |
|---|---|---|---|
| 1,955,206 | 4/1934 | Standish | 87/47 |
| 2,464,899 | 3/1949 | Sokol | 87/48 |
| 3,362,283 | 1/1968 | Dergachen et al. | 87/44 X |
| 3,756,117 | 9/1973 | DeYoung | 87/29 |
| 3,892,161 | 7/1975 | Sokol | 87/29 |
| 4,034,642 | 7/1977 | Iannucci et al. | 87/48 |
| 4,034,643 | 7/1977 | Iannucci et al. | 87/48 |
| 4,130,046 | 12/1978 | Sokol | 87/48 |
| 4,275,638 | 6/1981 | DeYoung | 87/29 X |
| 4,372,191 | 2/1983 | Iannucci et al. | 87/48 |
| 4,380,949 | 4/1983 | Betta | 87/48 |



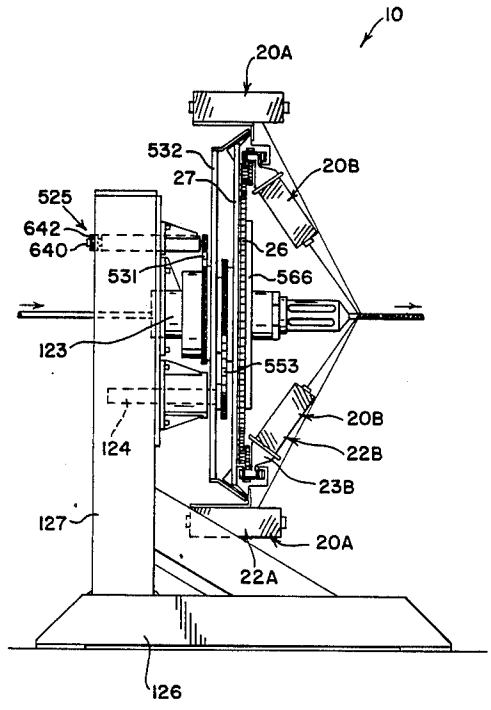
*Primary Examiner*—John Petrakes
*Attorney, Agent, or Firm*—Mack D. Cook, II



[57] **ABSTRACT**

A mechanism for timing strand movement relative to rotation of holders or carriers for strand supply spools or bobbins, being rotated in opposite directions by the drive mechanism of a braiding machine. The drive mechanism is mounted around a stationary shaft extending from a frame member. The mechanism includes an adjustable actuator means carried by the frame member radially of the stationary shaft and housng a selectively rotatable control shaft carrying a first sprocket. A second sprocket connected to the first sprocket by a chain means is connected to a journal sleeve around the stationary shaft. The journal sleeve carries a circular control element. The control element carries either a series of passive deflector cam plates for yarn strands or a cam track for a series of positive wire strand guiding mechanisms. There is also an improved drive mechanism for a braiding machine having a rotating table for carrying a set of outer spool holders.


**4 Claims, 7 Drawing Figures**



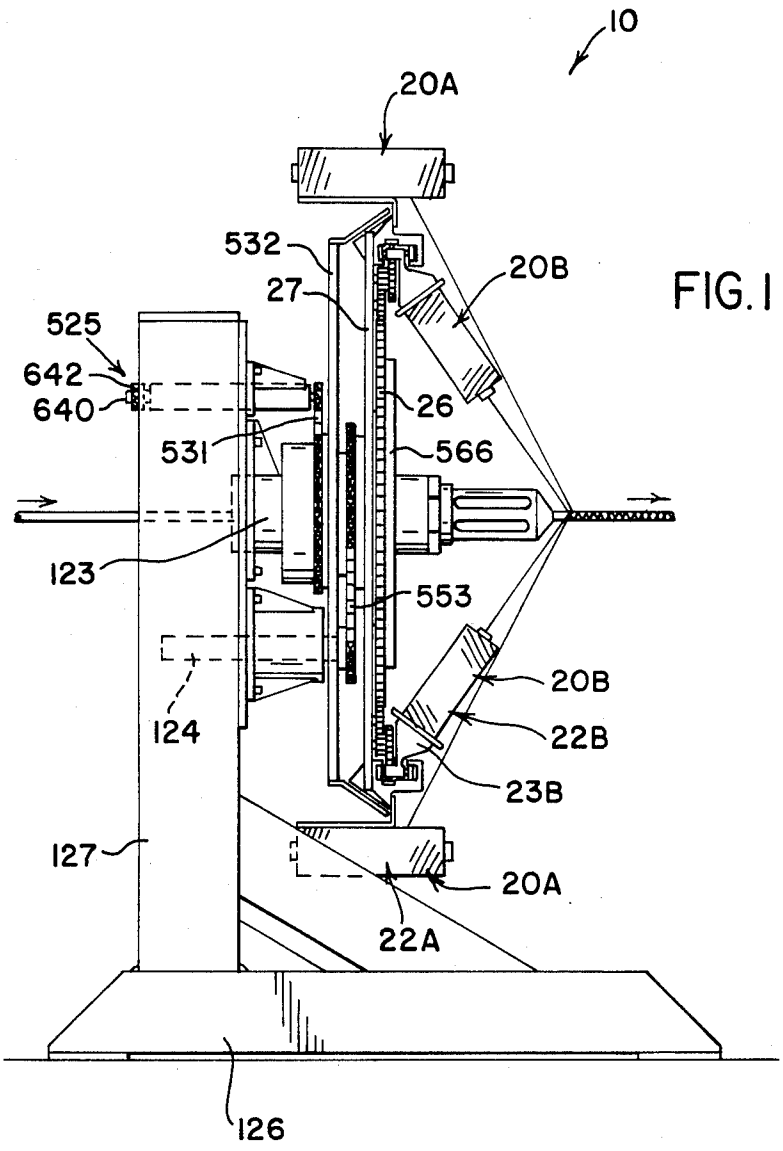
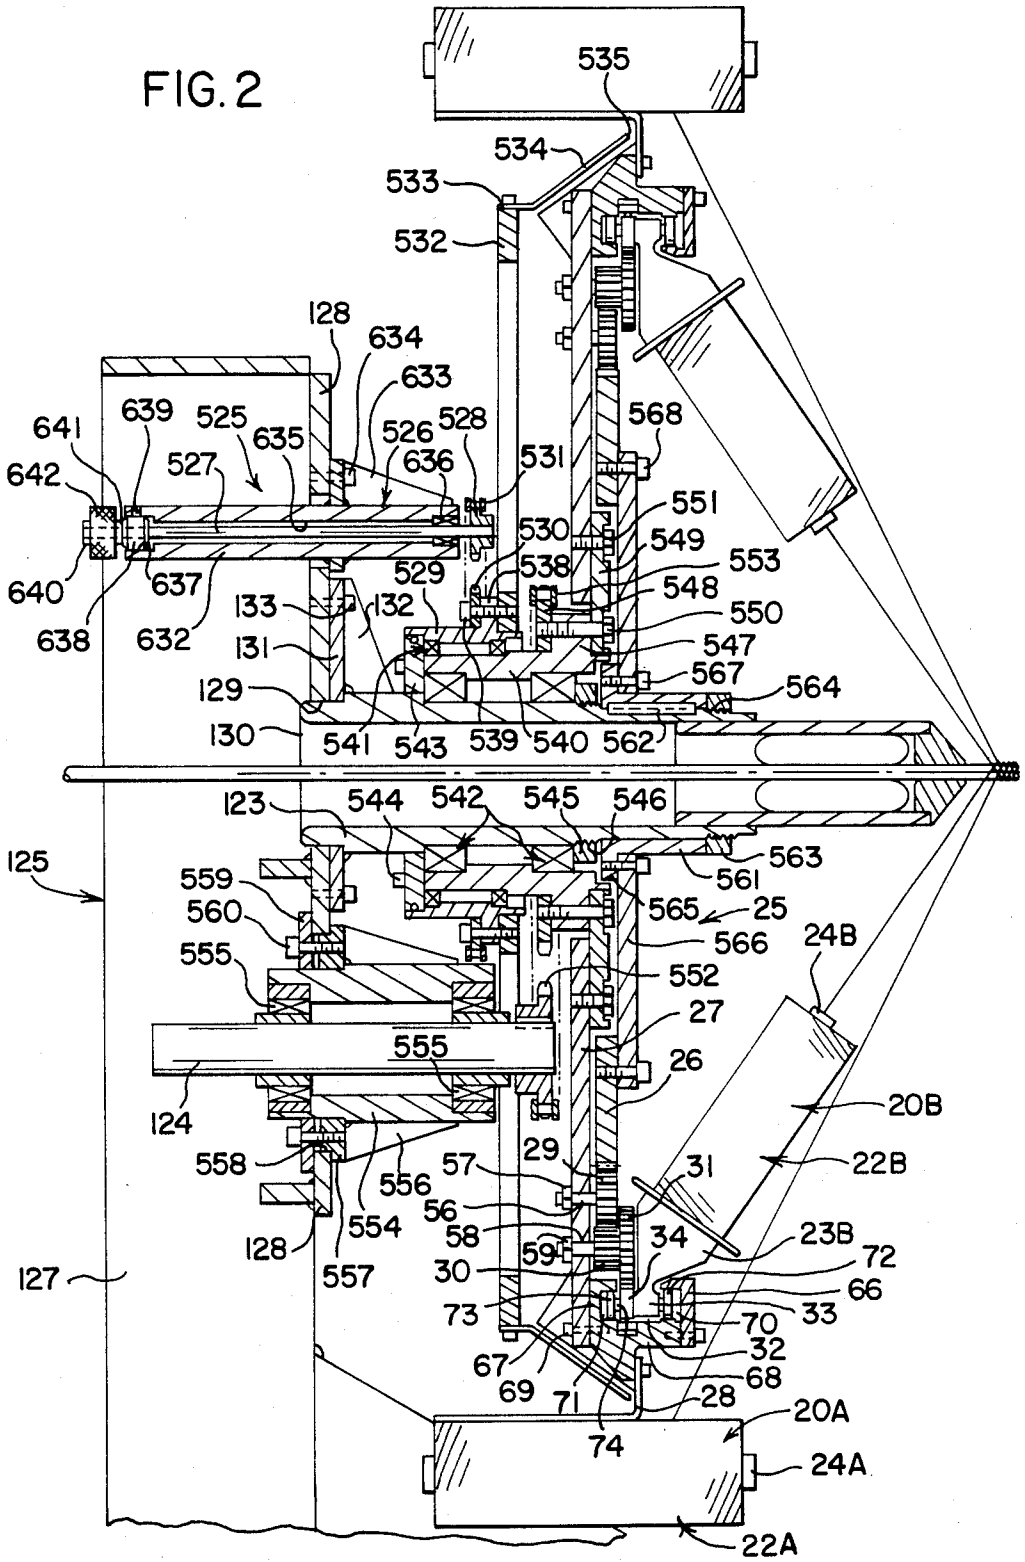

10
20A
532
27
20B
525
642
640
26
531
566
123
553
20B
124
22B
23B
127
20A
22A
126

FIG. 1

FIG. 2


535
534
533
532
128
634
633
641
639
525
635
526
528
568
642
527
636
531
551
530
549
640
637
529
538
553
638
632
133
132
548
550
131
547
129
567
564
130
541
543
539
540
562
123
544
542
545
546
125
563
559
561
560
565
25
566
24B
555
552
27
555
26
124
20B
558
29
57
31
22B
556
56
554
58
34
23B
128
59
72
127
557
30
66
73
33
70
32
67
68
69
71
28
20A
74
24A
22A

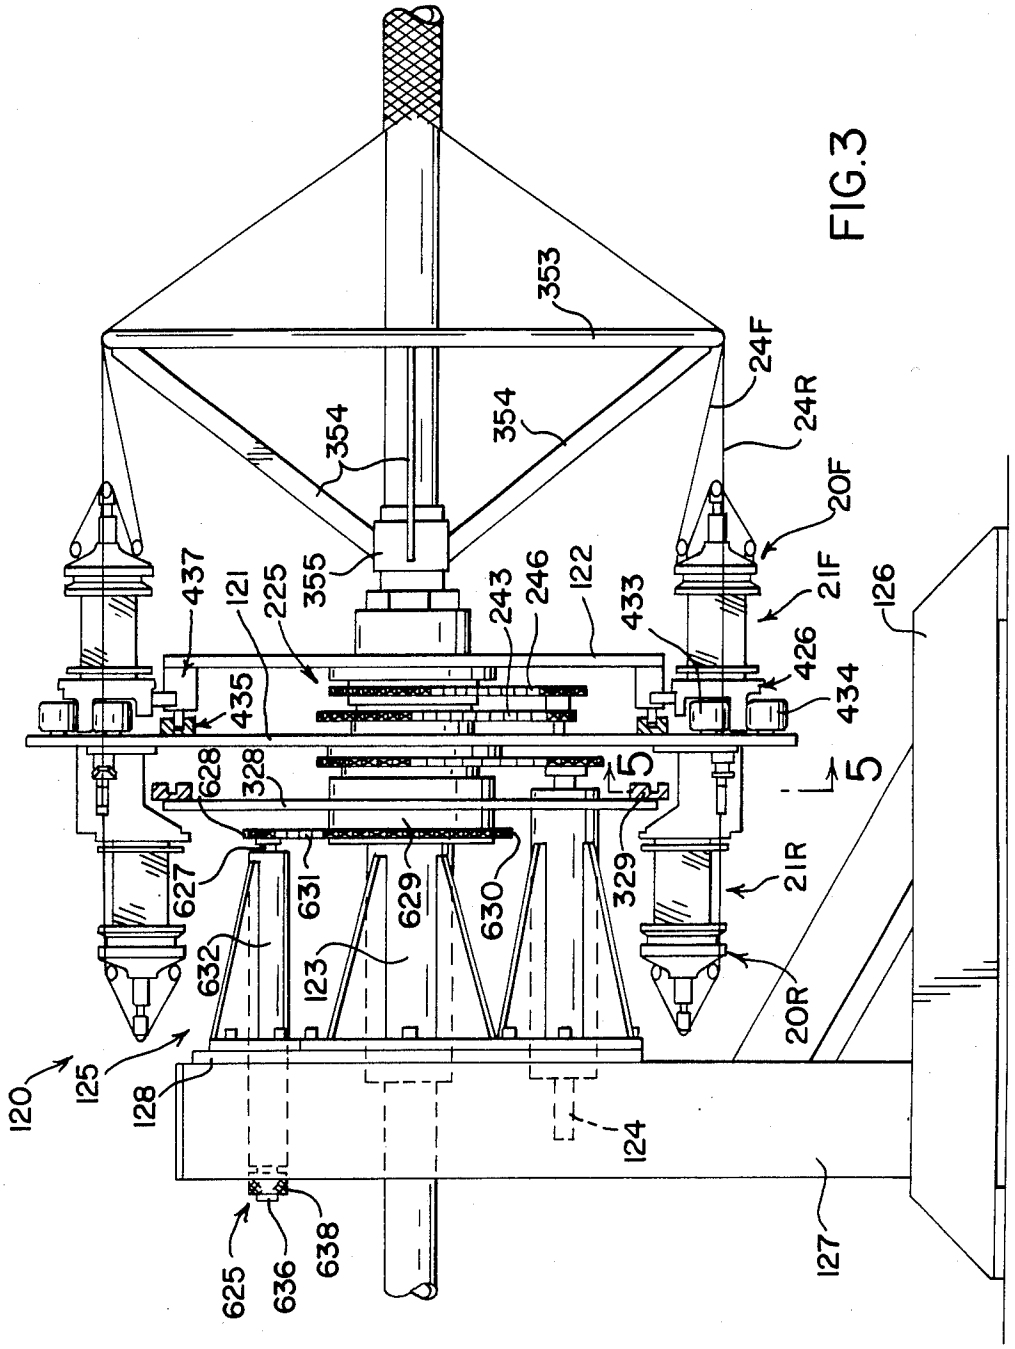
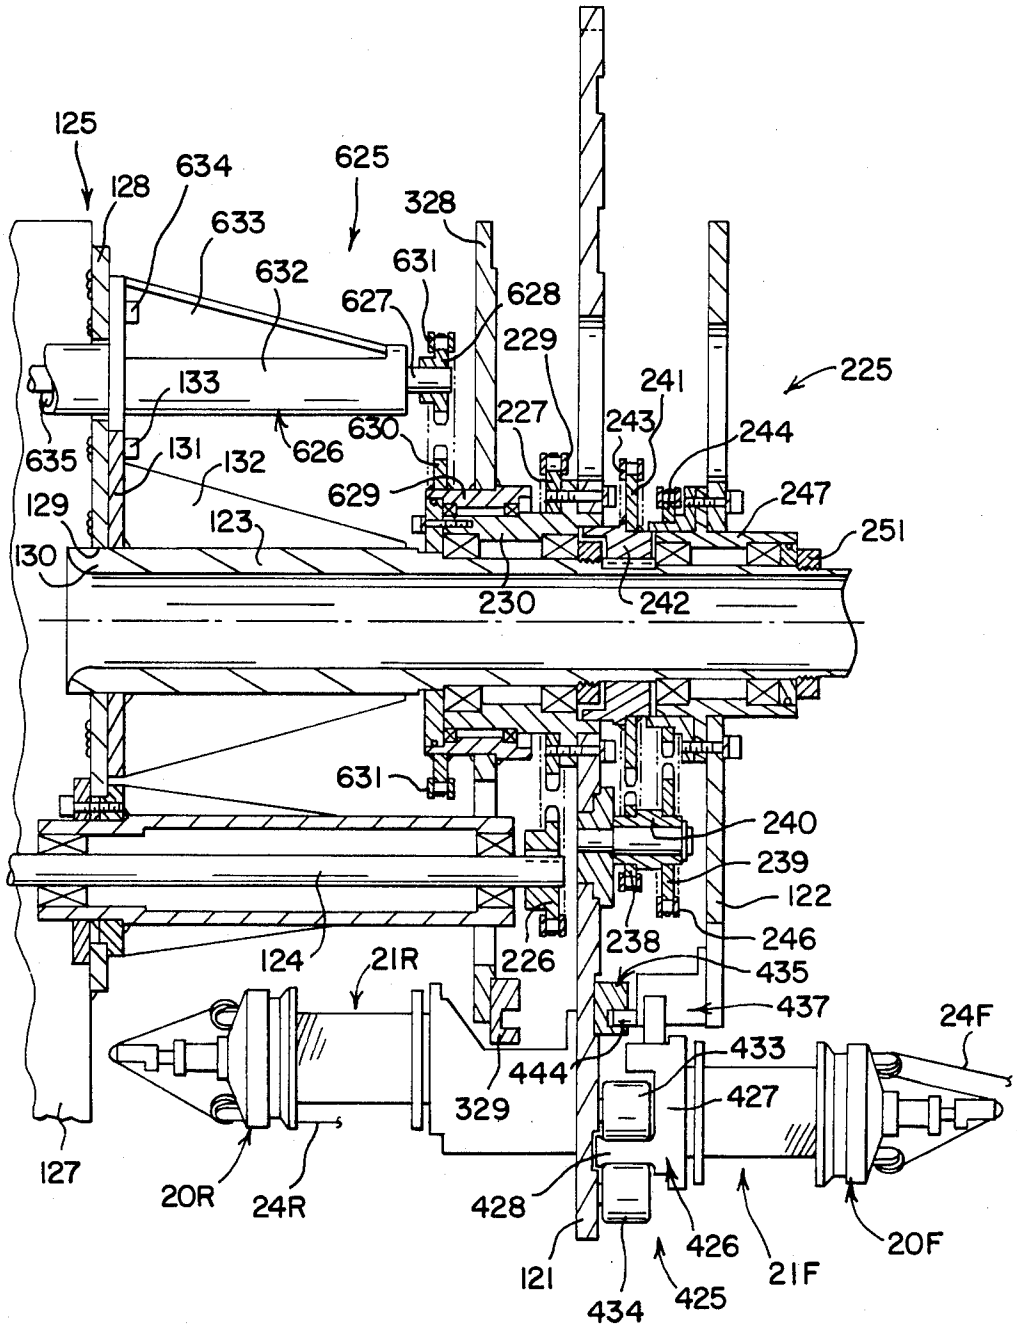

353
24F
24R
354
354
20F
437
121
225
355
243
246
122
433
21F
126
426
435
434
628
328
5
5
627
631
629
630
329
21R
632
123
20R
120
125
128
124
625
636
638
127

FIG.3

FIG. 4


125
128
634
633
632
625
328
631
627
628
229
241
225
133
227
243
244
630
635
131
132
626
629
247
129
123
251
130
230
242
631
240
239
122
238
246
124
21R
226
435
437
24F
433
444
427
329
127
20R
24R
428
426
21F
20F
121
434
425

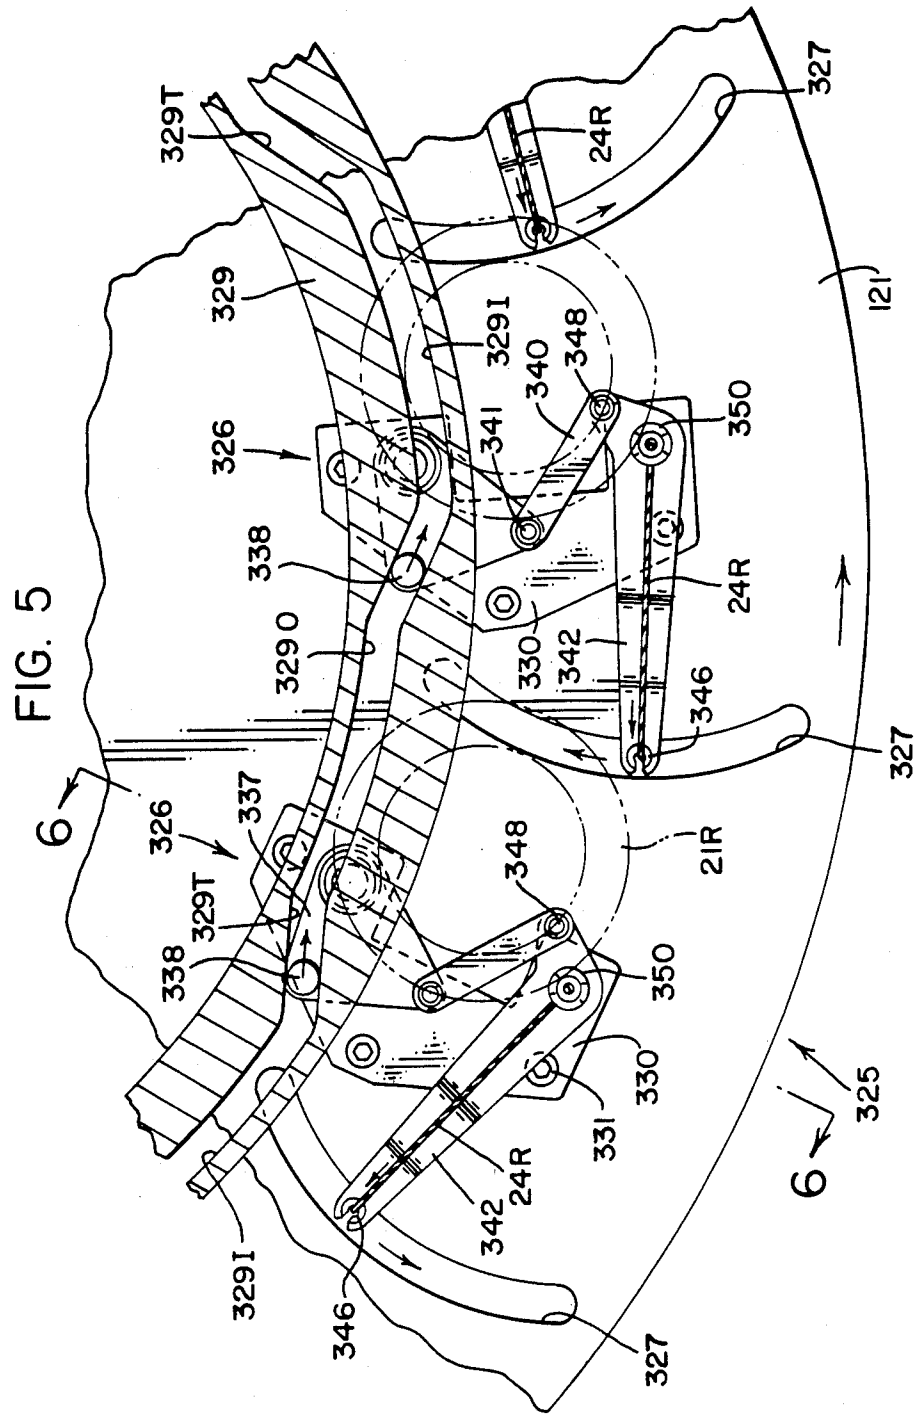

329T
24R
327
329
121
3291
348
340
350
326
341
338
24R
330
342
346
327
337
348
21R
329T
338
350
330
331
325
24R
342
3291
346
327
6
6

FIG. 5

FIG. 6

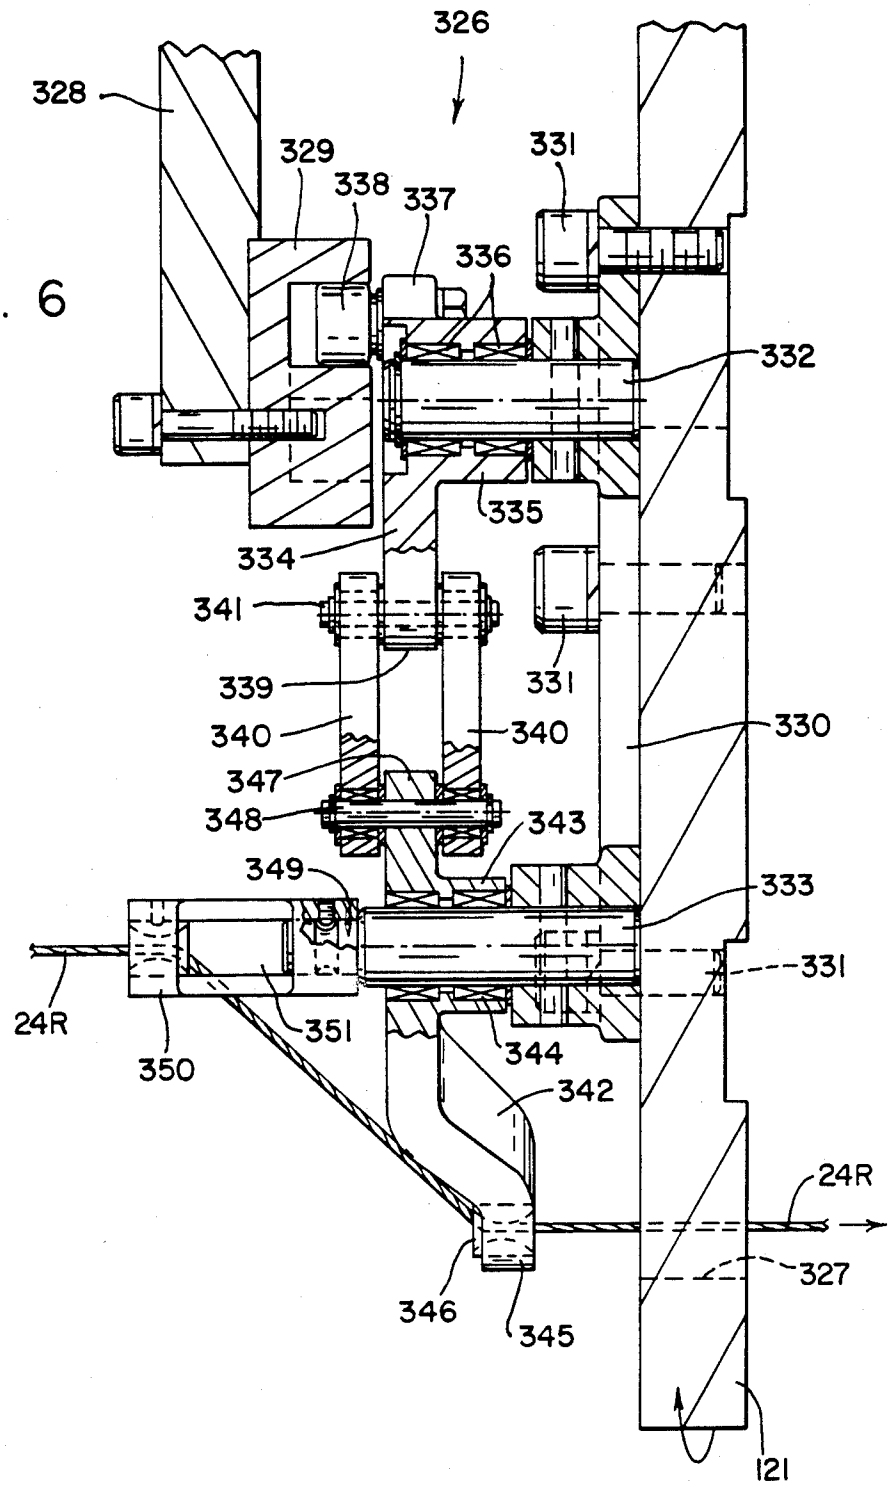
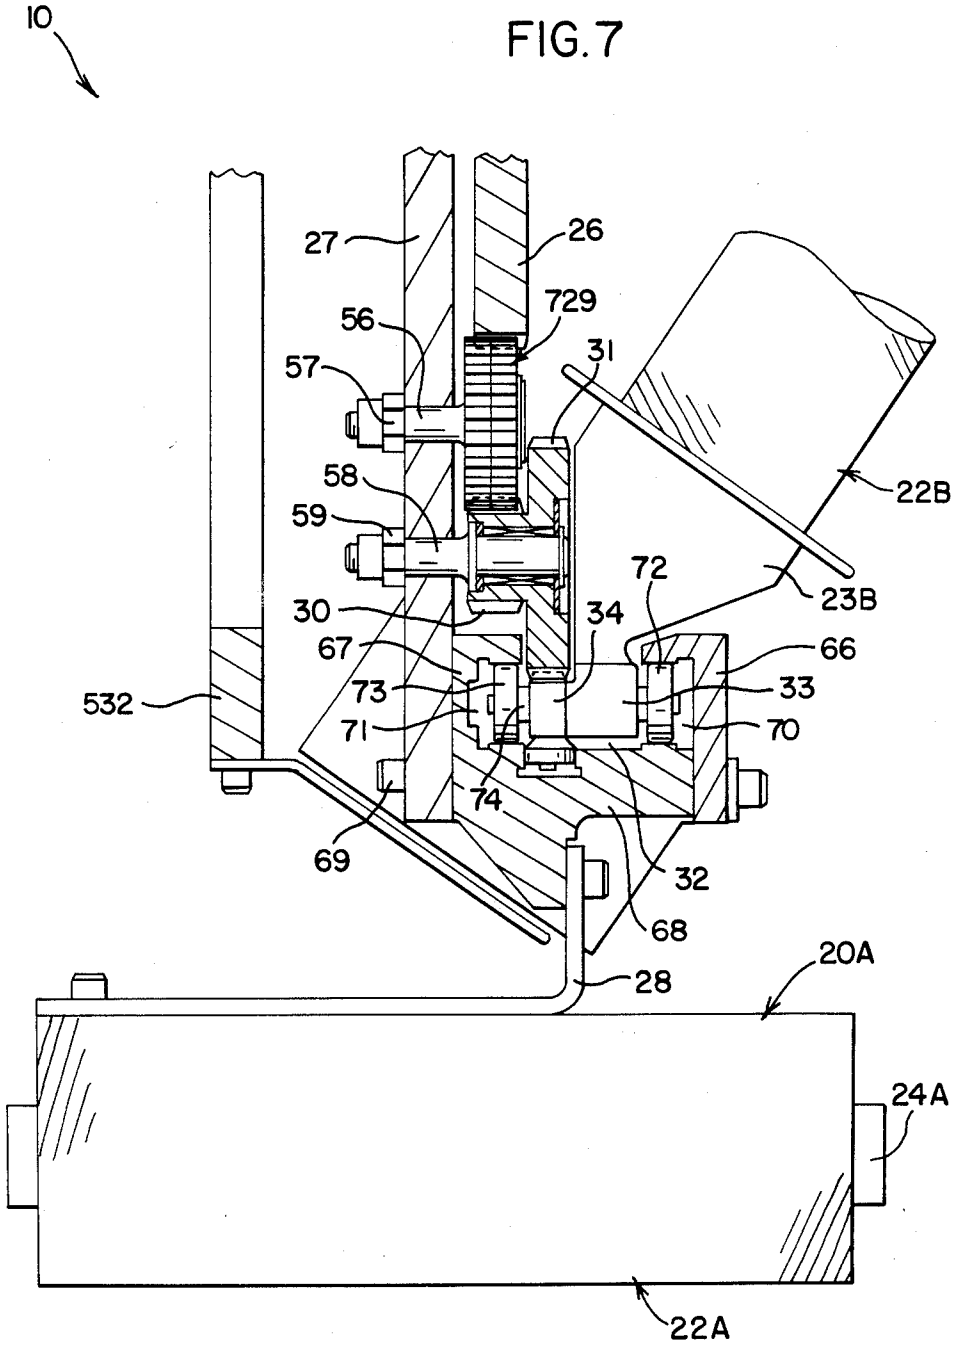

326
328
329
338
337
331
336
332
335
334
341
339
331
340
340
330
347
348
343
349
333
331
24R
350
351
344
342
24R
327
346
345
121

FIG. 7


10
27
26
729
56
31
57
58
22B
59
72
23B
30
34
67
66
532
73
33
71
70
74
69
32
68
20A
28
24A
22A

# MECHANISM FOR TIMING STRAND MOVEMENT RELATIVE TO ROTATION OF SPOOL HOLDERS OR CARRIERS FOR STRAND SUPPLY SPOOLS OR BOBBINS

## BACKGROUND OF THE INVENTION

The invention relates to an improved strand fabricating machine.

More specifically, the invention relates to an improved mechanism for timing strand movement relative to rotation of spool holders or carriers for strand supply spools or bobbins being rotated in opposite directions by the drive mechanism of a braiding machine.

U.S. Pat. No. 4,535,672, 8/1985, Bull et al, Apparatus For Mounting Components For Rotation Of Carriers For Strand Supply Bobbins And For Timing Strand Movement Relative To Rotation, discloses that "[a]nother problem existent with prior art braiding machines . . . carrying a set or series of spools or bobbins, has been providing for selective adjustment of the timing of movement of strand material from a set of rear or lower bobbins, along the central axis of the braiding machine, relative to contra-rotation of a set of front or upper bobbin carriers. The passage of the rear strands between any two carriers for the front bobbins, must occur within the dimensions of a relatively small 'window'. The timing of rear strand passage through the 'window' between the contra-rotating front bobbin carriers should be adjustable. An efficient braiding machine should be able to run with strand materials of varied composition or different outer diameters. A limited timing adjustment will optimize the operating conditions for any one particular form of strand material."

Until the invention disclosed and claimed in U.S. Pat. No. 4,535,672, the "[p]rior art braiding machines known to the inventors have had no easy means of changing timing between rear strand movement and the position of a passing front strand carrier. Timing changes have required disassembly of portions of the braiding machine and reassembly in different positions. Also, timing could never be changed while the braiding machine was operating."

In U.S. Pat. No. 4,535,672, the solution to the timing change problem is provided by an arcuately adjustable means projecting into a frame stanchion medial lattice opening for the support of the rear end of a drive torque tube carrying a control element (328). As generally described in U.S. Pat. No. 4,535,672, a "[c]ontrol element 328, positioned around the central axis stationary shaft 123 and behind the rear side of the first table 121 for carrying and positioning a cam track (329) radially inwardly of the rear carriers 20R, is adjustably rotated for use with a set of mechanisms (326) for guiding strands from bobbins on the rear carriers 20R through an arc segment relative to the central axis of the braiding machine 120, over and around moving strands from bobbins on the front carriers 20F . . . "

As further described in U.S. Pat. No. 4,535,672, "[t]he mounting assembly 125 further has an arcuately adjustable means projecting into the frame stanchion medial lattice opening 135 for support of the rearwardly projecting end or base 139 of the drive torque tube 136 and to adjustably position the control element 328 radially of the central axis stationary shaft 123 for timing movement of strands from a set of rear carriers 20R along the central axis of the braiding machine 120 relative to contra-rotation of the moving strands from a set of front carriers 20F.



As shown, a pitman hanger indicated at 140 interconnects the stationary shaft end 130 and the drive torque tube end 139. The upper end of a pitman hanger 140 has a tightenable clamp ring 141 for securely engaging the shaft end 130. The medial portion of a pitman hanger 140 has a tightenable clamp yoke 142 for securely engaging the tube end 139. The lower end of a pitman hanger 140 has a downwardly projecting lever 143. The pitman hanger lever 143 is selectively engaged for limited adjustable arcuate movement around the central axis of the braiding machine 120 by an adjustment means on the frame stanchion shelf flange 134. As shown, the adjustment means for the pitman hanger lever 143 may be opposed adjustment bolts 144 carried by opposed bolt mounting flanges 145 mounted on the frame stanchion shelf flange 134."

The inventor has recently become involved in a redesign and improvement of a yarn braiding machine of the design and construction disclosed in U.S. Pat. No. 3,756,117, 9/1973, DeYoung. This earlier braiding machine has a set of deflector cam plates with contoured edge surfaces to guide movement of strands from a set of outer spools relative to, over and under, moving strands from a set of inner spools. In this earlier machine, timing changes were made only by disassembly and reassembly of various components.

The inventor has now found that it is possible to provide for the braiding machine of U.S. Pat. No. 3,756,117 a mechanism for timing movement of strands from outer spool holders relative to rotation of inner spool holders, which is precise and effective and which does not require disassembly and reassembly of various components.

The inventor has further found that the braiding machine of U.S. Pat. No. 4,535,672, can be provided with a mechanism for timing movement of strands from rear bobbin carriers relative to rotation from bobbin carriers which is even more precise and effective than before.

The inventor has further found that the braiding machine of U.S. Pat. No. 3,756,117 may be provided with an improved drive mechanism for rotating a set of outer spool holders in one circular direction, and, through a set of planet gears driven by a stationary sun gear, rotate a set of inner spool holders in the opposite direction.

## SUMMARY OF THE INVENTION

It is an object of the invention to provide an improved strand fabricating machine.

It is a further object of the invention to provide an improved mechanism for timing strand movement relative to rotation of spool holders or carriers for strand supply spools or bobbins being rotated in opposite directions by the drive mechanism of a braiding machine.

These and other objects of the invention, as well as the advantages thereof, will become apparent in view of the drawings and detailed description.

A mechanism according to the invention is used for timing strand movement relative to rotation of spool holders or carriers for strand supply spools or bobbins, being rotated in opposite directions by the drive mechanism of a braiding machine. The drive mechanism is mounted around a central axis stationary shaft extending laterally from a base supported frame member.

A strand movement timing mechanism according to the invention will include an adjustable control actuator means carried by the frame member and positioned

radially of the central axis stationary shaft and housing a rotatable control shaft. A first sprocket is carried on the actuator means control shaft. A journal sleeve is positioned around the central axis stationary shaft. A second sprocket is aligned with the first sprocket coaxially around the journal sleeve and connected thereto. A first chain means connects the first sprocket with the second sprocket whereby rotation of the actuator control shaft will rotate the second sprocket and the journal sleeve relative to the central axis stationary shaft. A circular control element is positioned coaxially around the journal sleeve and connected thereto.

The strand movement timing mechanism according to the invention may be used on a braiding machine having a set of deflector cam plates with contoured edge surfaces to guide movement of strands from a set of outer spools relative to, over and under, moving strands from a set of inner spools. In this embodiment, for example, a yarn braiding machine of the design and construction disclosed in U.S. Pat. No. 3,756,117, 9/1973, DeYoung, the circular control element of the strand movement timing mechanism projects radially of the central axis stationary shaft and terminates in an edge positioned adjacent an outer set of spool holders. The strand deflector cam plates are positioned symmetrically around the control element edge and connected thereto.

The strand movement timing mechanism according to the invention may also be used on a wire braiding machine of the design and construction disclosed in U.S. Pat. No. 4,535,674, 8/1985, Bull et al. This braiding machine has rear and front bobbins on sets of rear and front carriers being rotated in opposite directions by a drive mechanism. The drive mechanism is mounted around a central axis stationary shaft extending laterally from a base supported frame member. The set of rear carriers is mounted on the rear side of a first table. The strands from the rear bobbins pass through a set of peripheral slots in the first table which are radially arcuate for movement of a set of strands through an arc segment relative to the axis of the stationary shaft. A second table is in front of the first table. The set of front carriers is mounted on and driven around the front side of the first table by rotation of the second table. The central axis stationary shaft rotatably mounts the first and second tables thereon.

This wire braiding machine further has a set of mechanisms carried on the rear side of the first table for guiding a set of strands from the rear bobbins prior to movement thereof into the first table radially arcuate peripheral slots. A variable radius cam tack is positioned behind the rear side of the first table and radially inwardly of the set of rear carriers. The cam track actuates and controls the set of rear strand guide mechanisms by rotation of the first table.

In this embodiment, the circular control element of the strand movement timing mechanism is positioned coaxially around the journal sleeve and connected thereto behind the rear side of the first table. The variable radius cam track is carried by and adjustably positioned by the circular control element.

The invention also provides an improved drive mechanism for a braiding machine having sets of outer and inner holders for strand supply spools being rotated in opposite directions by the drive mechanism which is mounted around a central axis stationary shaft extending from a frame member. The drive mechanism is driven by a power input shaft extending from the frame member and includes a stationary sun gear and a rotating table mounting the set of outer spool holders and rotatably carrying a set of inner spool holders. The machine has a journal sleeve for a braid control mechanism adjustably fixed in position around the stationary shaft. The drive mechanism further has a journal hub rotatably mounted around the stationary shaft and carrying the journal sleeve. A third sprocket is positioned around the journal hub and connected thereto. A fourth sprocket is aligned with the third sprocket and carried on the power input shaft. A second chain means connects the third sprocket with the fourth sprocket. The rotating table is positioned around the journal hub and connected thereto so that rotation of the fourth sprocket by the power input shaft will rotate the set of outer spool holders in one circular direction, and, through a sun gear, rotate the set of inner spool holders in the opposite direction.

## IN THE DRAWINGS

FIG. **1** is a side view of a yarn braiding machine with components according to the invention;

FIG. **2** is an enlarged section of the braiding machine of FIG. **1**;

FIG. **3** is side view of a wire braiding machine with a component according to the invention;

FIG. **4** is an enlarged section of the braiding machine of FIG. **3**;

FIG. **5** is an enlarged fragmentary rear section, looking toward the front of the braiding machine, taken substantially as indicated on line **5—5** of FIG. **3**;

FIG. **6** is a side view, in section, taken substantially as indicated on line **6—6** of FIG. **5**; and

FIG. **7** is an enlarged fragmentary section of the braiding machine of FIG. **1**.

## DETAILED DESCRIPTION OF THE INVENTION

Referring to FIGS. **1,2** and **7**, a horizontal yarn braiding machine, embodying the present invention, is referred to generally by the numeral **10**. The braiding machine **10** will have a set of outer spools **20A** and a set of inner spools **20B**. The spools **20** are on sets of outer spool holders **22A** and inner spool holders **22B** which are rotated in opposite directions by a drive mechanism referred to generally by the numeral **25**. The spool drive mechanism **25** has elements, numbered within the sequence **26** through **74**, which are equivalent to like numbered elements disclosed in U.S. Pat. No. 3,756,117, 9/1973, DeYoung. The braiding machine **10** has a central axis stationary shaft **123** and a drive mechanism power input shaft **124**, as disclosed in U.S. Pat. No. 4,535,672, 8/1985, Bull and Winiasz. The braiding machine **10** has an assembly referred to generally by the numeral **125** for mounting and powering the spool drive mechanism **25**. The assembly **125** has elements, numbered in the sequence **126** through **133**, which are equivalent to like numbered elements disclosed in U.S. Pat. No. 4,535,672.

An outer spool holder **22A** has a base (not shown). An inner spool holder **22B** has a base **23B**. The spool holder bases house therein suitable mechanisms (not shown) for controlling rotation of spool spindles **24A** and **24B**. The spool holders **22A** and **22B** also have suitable mechanisms (not shown) for strand tension-controlling and actuation of spool release. For such further details as are necessary to understand the opera-

tion of these mechanisms, reference may be made to U.S. Pat. No. 3,756,533, 9/1973, DeYoung.

A spool drive mechanism **25** includes a stationary sun gear **26** and a rotatable support plate **27** mounted in axial alignment around the central axis of the braiding machine **10**. The support plate **27** is powered and carries a first set of base holders **28** for mounting of the outer set of spool holders **22A**. The support plate **27** also carries sets of rotatably mounted and meshing first planet gears **29** and second planet gears **30**. Each planet gear **29** meshes with the sun gear **26**. Each planet gear **30** is axially coupled to a third planet gear **31**.

The support plate **27** also has a circular guideway **32** for the support of the second set of base holders **33** for mounting of the inner set of spool holders **22B**. Each base holder **33** carries a radially inwardly facing gear segment **34** for meshing with the planet gear **31**.

Each planet gear **29** is bearing mounted on a stud **56** projecting from the support plate **27** and attached thereto as by fastening means **57**. Each planet gear **30** is bearing mounted on a stud **58** projecting from the support plate **27** and attached thereto as by fastening means **59**. The distance between the studs **56** and **58** is less than the length of a gear segment **34**. That is, the effective length of each gear segment **34** is greater than the distance between axes of adjacent third planet gears **31**.

The guideway **32** for the baseholders **33** for the inner spool holders **22B** is formed by sets of opposed arcuate plates **66** and **67** separated by a spacer block **68** and attached to the support plate **27** as by fastening means **69**. Each plate **66** and **67** has opposed and aligned channels **70** and **71**. Each base holder **33** has two sets of rollers **72** and **73** carried on a shaft **74** for seating in and movement along the channels **70** and **71**.

Rotation of the support plate **27** in relation to the sun gear **26** will move the base holders **28**, the spool holders **22A** and the outer spools **20A** in one circular direction around the central axis of the braiding machine **10**. Concurrently, each set of planet gears **29, 30** and **31** will transmit power to the arcuate gear segments **34** to move the base holders **33**, the spool holders **22B** and the inner spools **20B** in the opposite circular direction.

The braiding machine **10** has a central axis stationary shaft **123** for fixed mounting of the sun gear **26** and for rotatably mounting of the support plate **27** carrying the outer bobbins **20A**. A drive mechanism power input shaft **124** extends parallel to the stationary shaft **123** toward the support plate **27**.

The mounting assembly **125** has a frame base **126** carrying a vertically extending frame member or stanchion **127**. The frame stanchion **127** has an integral face plate **128** with an upper bore **129** for positioning the base **130** of the stationary shaft **123**. A shaft support plate **131**, having a series of lateral webs **132** securely connected to the stationary shaft **123**, is detachably connected to the stanchion face plate **128** coaxially around the face plate upper bore **129**, as by fastening bolts **133**.

The mechanism for timing movement of strands from a set of outer spools **20A** relative to rotation of spool holders **22B** for a set of inner spools **20B**, is referred to generally by the numeral **525**. The mechanism **525** includes an adjustable control actuator means indicated at **526**, carried by the frame member **127** and positioned radially of the central axis stationary shaft **123**. The control actuator means **526** houses a rotatable control shaft **527**. A first sprocket **528** is carried on the actuator control shaft **527**. A journal sleeve, indicated at **529**, is positioned around the central axis stationary shaft **123**. A second sprocket **530** is aligned with the first sprocket **528** and positioned coaxially around the journal sleeve **529** and connected thereto. A first chain means **531** connects the first sprocket **528** with the second sprocket **530** so that incremental rotation of the actuator control shaft **527** will selectively position the second sprocket **530** and the journal sleeve **529** relative to the central axis stationary shaft **123**.

A circular control element, indicated at **532**, is positioned coaxially around the journal sleeve **529** and connected thereto. The control element **532** projects radially of the central axis stationary shaft **123** and terminates in an edge **533** positioned adjacent the set of outer spools **20A**.

A set of projecting strand deflector cam plates, indicated at **534**, are positioned symmetrically around the control element edge **533** and connected thereto. The contoured edge surfaces **535** of the cam plates **534** guide the movement of strands from the set of outer spools **20A** relative to, over and under, moving strands from the set of inner spools **20B**. The contour and effective length of the control cam plate surfaces **535**, relative to the distance between adjacent inner spool holders **22B**, determines the braid ratio (e.g. 1 outer strand: 2 inner strands). However, a fine and precise adjustment of the position of the cam plates **534** relative to the spacing between inner spool holders **22B** will enable the user of the braiding machine **10** to compensate or allow for variation in strand movement attributable to yarn diameter or by friction caused by yarn movement over the control cam plate surfaces **535**.

The braid control mechanism journal sleeve **529** has an annular shoulder flange **538** for secure connection thereto of the second sprocket **530** and the cam plate control element **532**, as by fastening bolts **539**.

The journal sleeve **529**, adjustably fixed in position relative to the central axis stationary shaft **123**, is carried by a journal hub, indicated at **540**, freely rotatable around the stationary shaft **123**. An outer bearing assembly, indicated at **541**, provides for rotation of the journal hub **540** relative to a fixed journal sleeve **529**. An outer bearing assembly, indicated at **542**, provides for rotation of the journal hub **540** relative to the stationary shaft **123**. The rearward end of the sleeve **529** mounted on the bearings **541** and the rearward end of the hub **540** mounted on the bearings **542**, are secured by an annular end retainer **543** attached to the hub **540**, as by fastening bolts **544**. The forward end of the journal hub **540** is secured around the stationary shaft **123** by a bearing nut **545** having internal threads for mating engagement with external threads **546** on the stationary shaft **123**.

The journal hub **540** is also a component of the spool drive mechanism **25**. Forward of the journal sleeve **529**, the hub **540** has an annular shoulder flange **547** for secure connection thereto of a third or driven sprocket **548** and a table mounting plate **549**, as by fastening bolts **550**. The mounting plate **549** carries and is securely connected to the rotating table **27** of the drive mechanism **25**, as by fastening bolts **551**. A fourth or drive sprocket **552**, aligned with the third sprocket **548** and connected therewith by a second chain means **553**, is securely mounted on the forward end of the power input shaft **24**.

The power input shaft **124** for the spool drive mechanism **25** is rotatably mounted within a housing tube **554** by a bearing assembly, indicated at **555**. A series of

lateral webs **556** and a housing tube support plate **557** are securely connected to the housing tube **554**. The rearward end of the housing tube **554** projects through a lower bore **558** in the stanchion face plate **128**. The shaft support plate **557** is detachably connected to the stanchion plate **128** coaxially around the face plate lower bore **558**, as by a mounting ring **559** and fastening bolts **560**.

The power input shaft **124** is connected to a suitable power source (not shown) to rotate the table **27** of the drive mechanism **25** and the outer spool holders **22A** in one circular direction around the central axis of the braiding machine **10**.

Forward of the bearing nut **545** securing the rotating journal hub **540** around the central axis stationary shaft **123**, the spool drive mechanism **25** includes a hub member **561** for mounting of the stationary sun gear **26**. The hub **561** is fitted coaxially around and coupled to the stationary shaft **123**, as by a key **562**. The forward end of the hub **561** is secured around the stationary shaft **123** by a bearing nut **563** having internal threads for mating with external threads **564** on the stationary shaft **123**. The hub **561** has an annular shoulder flange **565** for secure connection thereto of a sun gear mounting plate **566**, as by fastening bolts **567**. The mounting plate **566** carries and is securely connected to the stationary sun gear **26** of the drive mechanism **25**, as by fastening bolts **567**. During rotation of the table **27** of the drive mechanism **25** by the power input shaft **124**, in one direction, the set of planet gears **29**, **30** and **31** driven by the stationary sun gear **26**, will rotate the inner spool holders **22B** in the opposite circular direction around the central axis of the braiding machine **10**.

Referring to FIGS. **3-6**, a horizontal wire braiding machine, embodying the present invention, is referred to generally by the numeral **120**. The braiding machine **120** will have a set of rear carriers **20R** for a strand supply bobbin mounted on the rear side of a first table **121** for rotation in one direction. The braiding machine **120** will further have a set of front carriers **20F** for a strand supply bobbin movable around the front side of the first table **121** for rotation by a second table **122** in the opposite direction. A stationary shaft **123** on the central axis of the braiding machine rotatably mounts the first table **121** and second table **122** thereon. A drive mechanism power input shaft **124** extends parallel to the stationary shaft **123** and toward the rear side of the first table **121**.

A carrier **20** for a supply bobbin particularly suited for use on a braiding machine **120** may be as disclosed in U.S. Pat. No. 4,529,147, 7/1985, Bull, et al, Carrier for A Strand Supply Bobbin. Reference is made to said patent for such further details as may be required to more fully understand the nature of the invention. A moving length of strand material from a rear carrier **20R** is indicated at **24R**. A moving length of strand material from a front carrier **20F** is indicated at **24F**.

An assembly for mounting of the cental axis stationary shaft **123** and radial positioning of the power input shaft **124**, is referred to generally by the numeral **125**. A mounting for the stationary shaft **123** and the power input shaft **124** is shown only by chain lines. A mounting assembly **125** particularly suited for use on a braiding machine **120** may be as disclosed in U.S. Pat. No. 4,535,672, 8/1985, Bull et al, Apparatus For Mounting Of Components For Rotation Of Carriers For A Strand Supply Bobbin And For Timing Strand Movement Relative To Rotation.

The mounting assembly **125** has a frame base **126** carrying a vertically extending frame member or stanchion **127**. The frame stanchion **127** has an integral face plate **128** with an upper bore **129** for positioning the base **130** of the stationary shaft **123**. A shaft support plate **131**, having a series of lateral webs **132** securely connected to the stationary shaft **123**, is detachably connected to the stanchion face plate **128** coaxially around the face plate upper bore **129**, as by fastening bolts **133**.

A drive mechanism for selectively rotating the first table **121** and the second table **122** in opposite directions around the stationary shaft **123**, in response to rotation of the power input shaft **124**, is referred to generally by the numeral **225**. A drive mechanism **225** particularly suited for use on a braiding machine **120** may be as disclosed in U.S. Pat. No. 4,535,673, 8/1985, Winiasz, Apparatus For Rotation Of Carriers For A Strand Supply Bobbin.

The table drive mechanism **225** has a first sprocket **226** mounted on the forward end of the power input shaft **124** and behind the rear side of the first table **121**. A second sprocket **227** is positioned around the central axis stationary shaft **123** and aligned with the first spocket **226** and connected therewith by a first chain means **229**. A first journal sleeve **230** freely rotates around the stationary shaft **123** and carries the first table **121** and the second sprocket **227** which are securely connected thereto. The rear face of the journal sleeve **230** rotatably carries a circular control element **328**, a component of a strand movement timing mechanism **625** described hereinafter.

A drive mechanism third sprocket **238** and fourth sprocket **239** are carried on and coupled together by a journal bushing **240**. The journal bushing **240** is rotatable around a post shaft extending from the front side of the first table **121**. A fifth or "sun" sprocket **241** is aligned with the third sprocket **238** and positioned around the central axis stationary shaft **123** and coupled thereto by a sleeve **242**. A second chain means **243** connects the sprockets **238** and **241**. A sixth sprocket **244** is positioned around the central axis stationary shaft **123** and aligned with the fourth sprocket **239** and connected therewith by a third chain means **246**. A second journal sleeve **247** freely rotates around the stationary shaft **123** and carries the second table **122** and the sixth sprocket **244** which are securely connected thereto. The journal sleeve **247** is secured around the stationary shaft **123** by a bearing nut **251**.

The apparatus for control of moving strands from the contra-rotating set of strand carriers, **20R** and **20F**, is referred to generally by the numeral **325**. The strand control apparatus **325** includes a set of mechanisms, indicated at **326**, for guiding moving strands **24R** from a set of rear bobbins **21R** through an arc segment relative to the central axis of the braiding machine **120**. The rear set of strands **24R** pass through a set of peripheral and radially arcuate slots **327** in the first table **121** which are positioned between the guide mechanisms **326**. The rear strands **24R** are guided by the mechanisms **326**, prior to movement into the arcuate slots **327**, over an around moving strands **24F** from a set of front bobbins **21F**.

A control element **328** is adjustably positioned coaxially around the central axis stationary shaft **123** behind the rear side of the first table **121**. The control element **328** carries and selectively positions a variable radius cam track **329** radially inwardly of the set of rear carriers **20R**. The cam track **329** actuates and controls the set

of strand guide mechanisms **326** during rotation of the first table **121**. The cam track **329** has a set of alternating inner and outer portions, **329I** and **329O**, providing a "dwell" for the movement of the strand guiding mechanisms **326** at the radially outer and radially inner ends of the arcuate first table slots **327**. The cam track dwell portions **329I** and **329O** are connected by a ramp or transition portion **329T**.

A strand guiding mechanism **326** has a base plate **330** attached to the rear side of the first table **121**, between any two of the radially arcuate slots **327**, as by bolts **331**. A base plate **330** carries a radially inner drive plate pin **332** and a radially outer swing arm pin **333** oriented parallel to the central axis of the braiding machine **120**.

A strand guiding mechanism **326** also has a generally triangularly shaped drive plate indicated at **334**. The drive plate base corner **335** is carried by the inner pin **332** and freely rotates on roller bearing assemblies **336**. The drive plate apex corner **337** carries a rearwardly projecting cam follower **338** for confined engagement within the stationary cam track **329**. The drive plate terminal corner **339** is connected to the base ends of dual connector means or links **340** by a pivot pin **341**.

A strand guiding mechanism **326** further has an elongated rotatable swing arm indicated at **342**. The swing arm base end **343** is carried by the pin **333** and freely rotates on roller bearing assemblies **344**. The swing arm terminal end **345** carries an eyelet **346** for engaging a moving strand **24R** from a rear bobbin **21R** prior to movement thereof into a first table radially arcuate slot **327**. The swing arm base end has an integral crank arm **347** connected to the terminal end of the dual connector links **340** by a pivot pin **348**. The rear strands **24R** are guided through an arc segment relative to the axis of the braiding machine **120**, by movement of the swing arms **342** behind the first table **121**, in a common plane perpendicular to the braiding machine axis during rotation of the first table **121**.

The strand control apparatus **325** may further have a set of strand guide components positioned behind the rear side of the first table **121** and at a point along the axis of rotation for the swing arm **342** to receive a moving strand **24R** from the rear bobbin **21R**, before the moving strand **24R** is engaged by the swing arm eyelet **346**. As shown, the outer or base plate swing arm pin **333** has an extension **349** for mounting a strand guiding eyelet holder **350**. The rearwardly projecting eyelet holder **350** establishes an optimum center point for a moving strand **24R** from a rear bobbin **21R**, irrespective of the actual point at which a strand **24R** leaves a bobbin **21R**. A centered rear strand **24R** exits the eyelet holder **350** by a way of a side slot **351** and moved toward the swing arm terminal end **345**. A set of eyelet holders **350** will establish and maintain an effective diameter of a set of moving strands **24R** from a set of rear bobbins **21R** coincident with the diameter of the axes of rotation of the front bobbins **21F**.

A strand control apparatus **325** for a braiding machine **120** may have a stationary or rotating braiding ring, indicated at **353**, positioned parallel to and in front of the set of front bobbins **21F** and the second table **122**. The braid ring **353** has an outer diameter coincident with the diameter of the axes of rotation of the front bobbins **21F**, and with the effective diameter of a set of moving strands **24R** from a set of rear bobbins **21R** as established by the eyelet holders **350**. All of the moving strands, **24R** and **24F**, are engaged with or bear upon the ring **353** prior to being pulled at the desired braid angle to the "work center" for tight braiding around a core or mandrel moving along the central axis of the braiding machine **120**. As shown, a ring **353** is carried by a plurality of spoke shafts **354** extending outwardly from a hub **355** suitably secured to the central axis stationary shaft **123** forwardly of the second table **122**.

The elements of a strand control apparatus, **325**, numbered with in the sequence **326** through **355** are equivalent to like numbered elements disclosed in U.S. Pat. No. 4,535,674, 8/1985, Bull et al, Apparatus For Control Of Moving Strands From Rotating Strand Supply Bobbins.

Apparatus for mounting a set of front carriers **20F** on the front side of the first table **121** and for driving the front carriers **20F** by rotation of the second table **122**, is referred to generally by the numeral **425**. As shown, each carrier **20F** is mounted for rotation around the central axis stationary shaft **123** on a shuttle indicated at **426**. Each shuttle **426** has a forwardly facing platform **427** for mounting the base of a front carrier. Each shuttle platform **427** has a rearwardly projecting segment of an arcuate slide tang **428** terminating in an enlarged diameter keeper flange. A series of opposed inner and outer rollers **433** and **434**, form a circular shuttle slide track. A shuttle platform **427** is secured in mounted position by positive engagement of a slide tang **428** and a keeper flange between and with the opposed slide roller series **433** and **434**. A circular actuator cam track indicated at **435** is carried on the front side of the first table **121** radially inwardly of the opposed slide roller series **433** and **434**. A set of shuttle drive assemblies, indicated at **437**, is carried on the periphery of the rear side of the second table **122**. Each drive assembly **437** includes a cam follower **444** for confined engagement with the actuator cam track **435**.

The apparatus **425**, for mounting and driving a set of front carriers **20F** relative to moving strands from a set of contra-rotating rear carriers **20R**, is disclosed, in U.S. Pat. No. 4,535,675, 8/1985, Bull et al, Apparatus For Rotating A Set Of Carriers For A Strand Supply Bobbin Relative To Moving Strands From A Set Of Contra-Rotating Carriers For A Strand Supply Bobbin. Reference is made to said patent for such further details as may be required to more fully understand the nature of the invention.

The mechanism for timing movement of strands **24R** from a set of rear carriers **20R** relative to a set of front carriers **20F**, is referred to generally by the numeral **625**. The mechanism **625** includes an adjustable control acutator means indicated at **626**, carried by the frame member **127** and positioned radially of the central axis stationary shaft **123**. The control actuator means **626** houses a rotatable control shaft **627**. A first sprocket **628** is carried on the actuator control shaft **627**. A journal sleeve, indicated at **629**, is positioned around the central axis stationary shaft **123**. A second sprocket **630** is aligned with the first sprocket **628** and positioned coaxially around the journal sleeve **629** and connected thereto. A first chain means **631** connects the first sprocket **628** with the second sprocket **630** so that incremental rotation of the actuator control shaft **627** will selectively position the second sprocket **628** and the journal sleeve **629** relative to the central axis stationary shaft **123**. The braid control mechanism journal sleeve **629**, operably fixed in position relative to the central axis stationary shaft **123**, is carried by the journal sleeve **230** of the drive mechanism **225**.

The control element **328** is positioned coaxially around the journal sleeve **629** and connected thereto. The variable radius cam track **329** of the strand control apparatus **325** is carried on the forward edge of the control element **328**. The length and relative position of the alternating inner and outer portions **329I** and **329O**, of the cam track **329**, relative to the distance between adjacent front carriers **20F**, determines the braid ratio (e.g. 1 rear strand **24R**: 2 front strands **24R**). However, a fine and precise adjustment of the positions of the cam track **329** relative to the spacing between front carriers **20F** will enable the user of the braiding machine **120** to compensate or allow for variation in strand movement attributable to wire friction induced by movement over the braiding ring **353** of the strand control apparatus **325**.

Referring to FIG. **2**, the adjustable control means **526** or **626** for the strand movement timing mechanism **525** or **625** has a sleeve tube **632** mounted on a frame member **127**, as by a webbed bracket **633** and fastening bolts **634**. The forward end of a bore **635** in the sleeve tube **632** has a bushing **636** for rotatable mounting of the forward end of a rotatable control shaft **527** or **627**. The rearward end of the sleeve tube bore **635** opens into a larger bore **637** for seating of stationary ring collar **638**, fixed as by a set screw **639**.

The stationary ring collar **638** positions control shaft **527** or **627** coaxially of a known shaft phasing adjustment mechanism sold under the trademark INFINIT-INDEXER (TM Reg. No. 834,671) by Harmonic Drive Division, Emhart Machinery Group, 51 Amory Street, Wakefield, MA. 01880. This known adjustment mechanism includes an outer or "D" hub **640** connected to the rearward end of a control shaft **527** or **627**. An inner or "S" hub **641** is carried by and connected to the stationary ring collar **638**. The hubs **640** and **641** are housed within a knurled outer adjusting nut **642**. The cooperative relation between the hubs **640** and **641** and the adjusting nut **642** is such that one revolution of the nut **642** results in a slight phase adjustment of the hub **640** and a control shaft **527** or **627**.

The adjustable control means **526** or **626** for the strand movement timing mechanism **525** or **625**, may have equivalent elements for selective and precise rotation of a control actuator shaft **527** or **627**.

In a braiding machine of the design and construction disclosed in U.S. Pat. No. 3,756,117, rotation of the support plate **27** relative to the stationary sun gear **26** powers rotation of the base holders **33** for the inner set of spool holders **22B**. Drive power is transmitted by the reaction of the teeth of the first or primary planet gear **29** with the teeth of the stationary sun gear **26**. The teeth of the gear **29** react with the teeth of a second planet gear **30** axially coupled to a third planet gear **31**. The teeth of the gear **31** react with a gear segment **34** carried on each base holder **33**.

What is claimed is:

**1**. A mechanism for timing strand movement relative to rotation of outer and inner spool holders for outer and inner sets of strand supply spools being rotated in opposite directions by the drive mechanism of a braiding machine, said drive mechanism being mounted around a central axis stationary shaft extending laterally from a base supported frame member, said strand movement timing mechanism comprising:

an adjustable control actuator means carried by said frame member and positioned radially of said central axis stationary shaft and housing a rotatable control shaft;

a first sprocket carried on said actuator means control shaft;

a journal sleeve positioned around said central axis stationary shaft;

a second sprocket aligned with said first sprocket and positioned coaxially around said journal sleeve and connected thereto;

a first chain means connecting said first sprocket with said second sprocket whereby rotation of said actuator control shaft will rotate said second sprocket and said journal sleeve relative to said central axis stationary shaft;

a circular control element positioned coaxially around said journal sleeve and connected thereto and projecting radially of said central axis stationary shaft and terminating in an edge positioned adjacent said outer set of spool holders; and,

a set of strand deflector cam plates positioned symmetrically around said control element edge and connected thereto and having contoured edge surfaces to guide the movement of strands from said set of outer spools relative to, over and under, moving strands from said set of inner spools.

**2**. A mechanism for timing strand movement relative to rotation of rear and front carriers for rear and front sets of strand supply bobbins being rotated in opposite directions by the drive mechanism of a braiding machine, said drive mechanism being mounted around a central axis stationary shaft extending laterally from a base supported frame member, said set of rear carriers being mounted on the rear side of a first table, the strands from said rear bobbins passing through a set of peripheral slots in said first table which are radially arcuate for movement of a set of strands from said rear bobbins through an arc segment relative to the axis of said stationary shaft, there being a second table in front of said first table, said set of front carriers being mounted on and driven around the front side of said first table by rotation of said second table, said central axis stationary shaft rotatably mounting said first and second tables thereon, said braiding machine further having a set of mechanisms carried on the rear side of said first table for guiding a set of strands from said rear bobbins prior to movement thereof into said first table radially arcuate peripheral slots and a variable radius cam track positioned behind the rear side of said first table and radially inwardly of said set of rear carriers, said cam track actuating and controlling said set of rear strand guide mechanisms by rotation of said first table, said strand movement timing mechanism comprising:

an adjustable control acutator means carried by said frame member and positioned radially of said central axis stationary shaft and housing a rotatable control shaft;

a first sprocket carried on said actuator means control shaft;

a journal sleeve positioned around said central axis stationary shaft;

a second sprocket aligned with said first sprocket and positioned coaxially around said journal sleeve and connected thereto;

a first chain means connecting said first sprocket with said second sprocket whereby rotation of said actuator control shaft will rotate said second sprocket and said journal sleeve relative to said central axis stationary shaft;

a circular control element positioned coaxially around said journal sleeve and connected thereto behind the rear side of said first table;

said variable radius cam track being carried and adjustably positioned by said circular control element.

3. In a braiding machine having sets of outer and inner holders for strand supply spools being rotated in opposite directions by a drive mechanism mounted around a central axis stationary shaft extending from a frame member, said drive mechanism being driven from a power input shaft extending from said frame member and including a stationary sun gear and a rotating table mounting said set of outer spool holders and rotatably carrying said set of inner spool holders, said machine having a journal sleeve (**529**) adjustably fixed in position around said stationary shaft, said drive mechanism further having:

a journal hub (**540**) rotatably mounted around said stationary shaft and carrying said journal sleeve;

a driven sprocket (**548**) positioned around said journal hub and connected thereto;

a drive sprocket (**552**) aligned with said third sprocket and carried on said power input shaft; and,

a chain means (**553**) connecting said driven sprocket with said drive sprocket;

said rotating table being positioned around said journal hub and connected thereto so that rotation of said drive sprocket by said power input shaft will rotate said set of outer spool holders in one circular direction, and rotate said set of inner spool holders in the opposite direction.

4. In a braiding machine according to claim **3**, a circular control element positioned around said journal sleeve and connected thereto and projecting radially of said stationary shaft and terminating in an edge postioned adjacent said outer set of spool holders, and, a set of strand deflector cam plates positioned symmetrically around said control element edge and connected thereto and having contoured edge surfaces to guide the movement of strands from said set of outer spools relative to, over and under, moving strands from said set of inner spools.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

# CERTIFICATE OF CORRECTION

PATENT NO. : 4,620,473

DATED : November 4, 1986

INVENTOR(S) : Jeffrey F. Bull

It is certified that error appears in the above-identified patent and that said Letters Patent are hereby corrected as shown below:

Col. 5, line 45 — change "rotatably" ~~to~~ — rotatable

Col. 8, line 62 — change "an around" to — and around

**Signed and Sealed this**

**Third Day of November, 1987**

*Attest:*

DONALD J. QUIGG

*Attesting Officer*

*Commissioner of Patents and Trademarks*