



(11) **EP 4 255 071 B9**

(12) **CORRECTED EUROPEAN PATENT SPECIFICATION**

(15) Correction information:

Corrected version no 1 (W1 B1)

Corrections, see

Claims DE 16, 21

Claims EN 16, 21

Claims FR 16, 21

(48) Corrigendum issued on:

06.11.2024 Bulletin 2024/45

(45) Date of publication and mention
of the grant of the patent:

18.09.2024 Bulletin 2024/38

(21) Application number: **23187843.0**

(22) Date of filing: **31.12.2015**

(51) International Patent Classification (IPC):

H04L 1/16 ^(2023.01) **H04L 1/18** ^(2023.01)

H04W 72/04 ^(2023.01)

(52) Cooperative Patent Classification (CPC):

H04L 1/1607; H04L 1/1829; H04L 1/1893;

H04L 5/00; H04L 5/0051; H04L 5/0053;

H04L 5/0055; H04L 27/26136; H04W 72/21

(54) **METHOD AND APPARATUSES FOR TRANSMITTING AND RECEIVING UPLINK INFORMATION**

VERFAHREN UND VORRICHTUNGEN ZUM SENDEN UND EMPFANGEN VON
UPLINK-INFORMATIONEN

PROCÉDÉ ET APPAREILS POUR ÉMETTRE ET RECEVOIR DES INFORMATIONS DE LIAISON
MONTANTE

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:

04.10.2023 Bulletin 2023/40

(60) Divisional application:

24198011.9 / 4 447 591

(62) Document number(s) of the earlier application(s) in
accordance with Art. 76 EPC:

22156215.0 / 4 084 378

20187784.2 / 3 745 627

15911958.5 / 3 381 233

(73) Proprietor: **NEC Corporation**
108-8001 Tokyo (JP)

(72) Inventors:

- **GAO, Yukai**
Beijing, 100084 (CN)
- **JIANG, Chuangxin**
Beijing, 100084 (CN)
- **SUN, Zhennian**
Beijing, 100084 (CN)
- **WANG, Gang**
Beijing, 100084 (CN)

(74) Representative: **Smith, Jeremy et al**

Mathys & Squire
The Shard
32 London Bridge Street
London SE1 9SG (GB)

(56) References cited:

EP-A2- 2 357 735 EP-A2- 2 533 451
EP-A2- 2 562 981 WO-A2-2010/018977
US-A1- 2011 228 877

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] Embodiments of the present disclosure generally relate to wireless communication techniques and more particularly relate to a method and apparatus for transmitting uplink (UL) information and a method and apparatus for receiving UL information.

BACKGROUND OF THE INVENTION

[0002] In an existing wireless communication, a subframe comprises 2 slots each including seven symbols. As illustrated in Fig. 1, all seven symbols in a slot can be used as UL symbols for Physical Uplink Control Channel (PUCCH) transmission, Demodulation Reference Signal (DMRS) transmission, and etc. The PUCCH is UL channel which carries uplink control information, such as ACK/NACK, Channel Quality Indicator (CQI), Pre-coding Matrix Indicator (PMI), (Rank Indicator) RI, etc. As illustrated in Fig. 1, three middle symbols are used to transmit DMRS and other symbols are used to transmit PUCCH symbols.

[0003] Usually, after a symbol is transmitted, the ACK/NACK will be received on the PUCCH before further four symbols are transmitted, which means a substantial latency. In order to reduce the latency, the number of UL symbols is proposed to be reduced. In future 5 Generation (5G) communication, a frame structure of only one or several symbols is even proposed for latency reduction, which means there is only one symbol or several symbols for UL transmission. For purpose of illustration, Fig. 2 illustrates one of possible new subframe structures, in which there is only one symbol for UL transmission. However, it shall be appreciated that in another possible new subframe structure, the symbol may also be located in another position and/or it comprises more than one UL symbol.

[0004] Therefore, a new PUCCH channel structure and new UL information transmission solution are required so as to adapt for the frame structure with reduced UL symbols. EP2357735 A2 discloses a method for information transmission that is performed by a transmitter in a wireless communication system. EP2562981 A2 discloses a method for transmitting control information through a PUCCH. EP2533451 A2 discloses a method in which a terminal transmits ACK/NACK in a system supporting carrier aggregation. WO2010/018977 A2 discloses a method including transmitting information based on multiple resource index and multiple antennas. US2011/228877 A1 discloses the transmission of reference signals.

SUMMARY OF THE INVENTION

[0005] In the present disclosure, there is provided a new solution for UL information transmission and receiving to mitigate or at least alleviate at least part of the issues in the prior art.

[0006] According to a first aspect of the present disclosure, there is provided a method of transmitting UL information according to appended claim 16.

[0007] In a second aspect of the present disclosure, there is provided a method of receiving UL information according to appended claim 1.

[0008] In a third aspect of the present disclosure, there is also provided an apparatus for transmitting UL information according to appended claim 21.

[0009] In a fourth aspect of the present disclosure, there is provided an apparatus of receiving UL information according to appended claim 6.

[0010] With embodiments of the present disclosure, it provides a new solution for UL transmission and receiving in which the uplink information can be transmitted in reduced uplink symbols so as to adapt for a subframe structure with reduced uplink symbols and thus, the transmission latency can be reduced greatly.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The above and other features of the present disclosure will become more apparent through detailed explanation on the embodiments as illustrated in the embodiments with reference to the accompanying drawings, throughout which like reference numbers represent same or similar components and wherein:

Fig. 1 schematically illustrates UL symbols in the existing subframe structure;

Fig. 2 schematically illustrates one of possible UL symbols in newly proposed subframe structure with reduced UL symbols;

Fig. 3 schematically illustrates PUCCH patterns in the existing communication system;

Fig. 4 schematically illustrates constellation mapping for HARQ ACK/NACK.

Fig. 5 schematically illustrates UL information transmission in the existing PUCCH format 1a/1b ;
 Fig.6 schematically illustrates a base sequence for UL symbols;
 Fig. 7 schematically illustrates UL information transmission in the existing PUCCH format 2a/2b;
 Fig. 8 schematically illustrates a flow chart of a method of transmitting UL information in accordance with one
 5 embodiment of the present disclosure;
 Fig. 9 schematically illustrates a diagram of DMRS and PUCCH information transmission in accordance with one
 embodiment of the present disclosure;
 Fig. 10 schematically illustrates an example new PUCCH structure in accordance with one embodiment of the
 present disclosure;
 10 Fig. 11 schematically illustrates another base sequence which can be used for the DMRS and PUCCH information
 in accordance with one embodiment of the present disclosure;
 Fig. 12 schematically illustrates another new PUCCH structure in accordance with another embodiment of the
 present disclosure;
 Fig. 13 schematically illustrates a further new PUCCH structure in accordance with a further embodiment of the
 15 present disclosure;
 Figs. 14A to 14E schematically illustrates example multiplexing manners of PUCCH and DMRS in accordance with
 one embodiment of the present disclosure;
 Figs. 15A to 15F schematically illustrate example resource mapping manners in accordance with embodiments of
 the present disclosure;
 20 Fig. 16A-16D schematically illustrates example multiplexing manners of PUCCH and DMRS in accordance with one
 embodiment of the present disclosure;
 Fig. 17A to 17D schematically illustrate example resource mapping manners in accordance in accordance with one
 embodiment of the present disclosure;
 Fig. 18A to 18D schematically illustrate example resource mapping manners for common expression in accordance
 25 in accordance with one embodiment of the present disclosure;
 Fig. 19 schematically illustrates a block diagram of DMRS and PUCCH information transmission in accordance with
 another embodiment of the present disclosure;
 Fig. 20 schematically illustrates a new PUCCH structure in accordance with another embodiment of the present
 disclosure;
 30 Fig. 21 schematically illustrates a corresponding relationship between the modulation symbol and a sequence group
 in accordance with one embodiment of the present disclosure;
 Fig. 22 schematically illustrates constellation mapping in accordance with one embodiment of the present disclosure;
 Fig. 23 schematically illustrates cyclic-shift grouping in accordance with one embodiment of the present disclosure;
 Fig. 24 schematically illustrates ACH/NACK constellation mapping for one of the example cyclic-shift grouping as
 35 illustrated in Fig. 21 in accordance with one embodiment of the present disclosure;
 Fig. 25 schematically illustrates a further PUCCH structure in accordance with a further embodiment of the present
 disclosure;
 Figs. 26A and 26B schematically illustrates another option for PUCCH design in accordance with one embodiment
 of the present disclosure ;
 40 Figs. 27A and 27B schematically illustrates another possible UL region designs in accordance with another embod-
 iment of the present disclosure;
 Figs. 28A to 28C schematically illustrates another DMRS window design in accordance with another embodiment
 of the present disclosure;
 Fig. 29 schematically illustrates a flow chart of a method of receiving UL information in accordance with one em-
 45 bodiment of the present disclosure;
 Fig. 30 schematically illustrates a block diagram of an apparatus for transmitting UL information in accordance with
 one embodiment of the present disclosure;
 Fig. 31 schematically illustrates a block diagram of an apparatus for receiving UL information in accordance with
 one embodiment of the present disclosure; and
 50 Fig. 32 further illustrates a simplified block diagram of an apparatus 3310 that may be embodied as or comprised
 in UE and an apparatus 3320 that may be embodied as or comprised in a base station in a wireless network as
 described herein.

DETAILED DESCRIPTION OF EMBODIMENTS

[0012] Hereinafter, the solution as provided in the present disclosure will be described in details through embodiments with reference to the accompanying drawings. It should be appreciated that these embodiments are presented only to enable those skilled in the art to better understand and implement the present disclosure, not intended to limit the scope

of the present disclosure in any manner.

[0013] In the accompanying drawings, various embodiments of the present disclosure are illustrated in block diagrams, flow charts and other diagrams. Each block in the flowcharts or blocks may represent a module, a program, or a part of code, which contains one or more executable instructions for performing specified logic functions, and in the present disclosure, a dispensable block is illustrated in a dotted line. Besides, although these blocks are illustrated in particular sequences for performing the steps of the methods, as a matter of fact, they may not necessarily be performed strictly according to the illustrated sequence. For example, they might be performed in reverse sequence or simultaneously, which is dependent on natures of respective operations. It should also be noted that block diagrams and/or each block in the flowcharts and a combination of thereof may be implemented by a dedicated hardware-based system for performing specified functions/operations or by a combination of dedicated hardware and computer instructions.

[0014] Generally, all terms used in the claims are to be interpreted according to their ordinary meaning in the technical field, unless explicitly defined otherwise herein. All references to "a/an/the/said [element, device, component, means, step, etc.]" are to be interpreted openly as referring to at least one instance of said element, device, component, means, unit, step, etc., without excluding a plurality of such devices, components, means, units, steps, etc., unless explicitly stated otherwise. Besides, the indefinite article "a/an" as used herein does not exclude a plurality of such steps, units, modules, devices, and objects, and etc.

[0015] Additionally, in a context of the present disclosure, a user equipment (UE) may refer to a terminal, a Mobile Terminal (MT), a Subscriber Station (SS), a Portable Subscriber Station (PSS), Mobile Station (MS), or an Access Terminal (AT), and some or all of the functions of the UE, the terminal, the MT, the SS, the PSS, the MS, or the AT may be included. Furthermore, in the context of the present disclosure, the term "BS" may represent, e.g., a node B (NodeB or NB), an evolved NodeB (eNodeB or eNB), a radio base station (RBS), a remote radio head (RRH), a relay, or a low power node such as a femto, a pico, and so on.

[0016] As mentioned hereinabove, in existing sub frame, all seven symbols in a slot can be used as UL symbols. Hereinafter, PUCCH patterns in the existing communication will be first described with reference to Figs. 3 to 7, for a better understanding of the present disclosure.

[0017] Reference is first made to Fig. 3 which illustrates PUCCH patterns in the existing communication system in more detail. In Fig. 3, there are illustrated UL subframe k and UL subframe k+8, and particularly in each of the subframes, the PUCCHs are transmitted at edges of the system bandwidth and hopped in two slots.

[0018] In the existing communication, formats for the PUCCH comprise Format1a/1b and Format 2a/2b, wherein Format 1a/1b is used to transmit ACK/NACK of one bit or two bits, and Format2a/2b is used to transmit uplink CQI and ACK/NACK of one bit or two bits. Usually, PUCCH bit such as ACK/NACK bit is first modulated into ACK/NACK symbol through constellation mapping. For different modulation technologies, different constellation mapping are used. Fig. 4 schematically illustrates different constellation mapping for HARQ ACK/NACK. As illustrated in Figs. 4 and 5, for Binary Phase Shift Keying (BPSK), ACK=1 and DTX/NACK=0 are respectively mapped to -1 and +1; and for Quadrature Phase Shift Key (QPSK), (ACK/NACK)=11, (ACK/NACK)=00, (ACK/NACK)=10, and (ACK/NACK)=01 are mapped to +1, -1, +j, -j.

[0019] Fig. 5 schematically illustrates UL information transmission in the existing PUCCH format 1a/1b. As illustrated in Fig. 5, after modulated into ACK/NACK symbols through constellation mapping, ACK/NACK symbols will be multiplied with a base sequence with a length of 12. The base sequence is illustrated in Fig. 6. The base sequence will be shifted by using different cycle shift and further be multiplied with an OCC sequence, as illustrated in Fig. 5. The resulting signal will be further processed through Inverse Fast Fourier Transform (IFFT) so as to form Single-carrier Frequency-Division Multiple Access (SC-FDMA) symbols #0, #1, #5 and #6. On the other hand, the base sequence shifted by using different cycle shift will be multiplied with the OCC sequence and the resulting signals are processed by IFFT, thereby forming DM-RS symbols. In other word, the forming of DM-RS and the PUCCH is substantially similar except that no NACK symbol d_0 is multiplied for DM-RS symbols.

[0020] Fig. 7 schematically illustrates PUCCH patterns in the existing PUCCH format 2a/2b. The PUCCH pattern in Fig. 7 is similar to that as illustrated in Fig. 5, except that OCC sequence is not used and after QPSK modulation, coded CSI bits (10 bits) are converted into five data d_0 to d_5 through a serial-to-parallel processing and PUCCH symbols and DM-RS symbols have different positions.

[0021] As mentioned hereinbefore, in a case that reduced UL symbols are used, the existing PUCCH patterns cannot be used, and thus a new PUCCH design and new UL control information transmission and receiving solutions are provided in the present disclosure, which will be described in detail with reference to Fig. 8 to 32.

[0022] Fig. 8 schematically illustrates a flow chart of a method of transmitting UL information in accordance with one embodiment of the present disclosure. As illustrated in Fig. 8, first at step 810, the reference signal is transmitted using a first sequence and step 820, the UL control information is transmitted using a second sequence and particularly, the reference signal and the UL control information are staggered-multiplexed in frequency domain.

[0023] For a better understanding of the present disclosure, Fig. 9 further illustrates a diagram of DM-RS and PUCCH information transmission in accordance with one embodiment of the present disclosure. As illustrated in Fig. 9, for DM-RS,

a base sequence 1 with N-length is first transformed to R'_1 through transformation such as cyclic shifting or phase rotation and then is mapped to physical resources. At the same time, the PUCCH information bits are first mapped to information symbols through any of constellation mappings such as illustrated in Fig. 4. Then information symbols d_i are further multiplied with a sequence R'_2 which is transformed from base sequence 2 with M-length, for example cyclic shifted. Then the resulting Y is then mapped to physical resources.

[0024] The PUCCH information will be transmitted with DMRS. When mapping to resource, the reference signal and the UL control information are staggered-multiplexed in frequency domain, as illustrated in Fig. 10 which illustrates an example new PUCCH structure in accordance with one embodiment of the present disclosure. As illustrated in Fig. 10, the PUCCH and the DMRS share the same base sequence with a length of 12, for example as illustrated in Fig. 6. The PUCCH (for example ACK/NACK) bits {0, 1} are first modulated into PUCCH symbol after constellation mapping so as to obtain the PUCCH symbol d_0 . The constellation mapping may be performed in accordance with those illustrated in Fig. 4. The PUCCH symbol is then modulated on the base sequence which is also used for DMRS. The PUCCH symbol Y_n modulated on the base sequence can be expressed as:

$$Y_n = d_0 \cdot R_n, \quad n = 0, 1, \dots, 11$$

wherein Y_n indicates resulting symbol after modulation, d_0 indicates the PUCCH symbol after constellation mapping; and R_n indicates the base sequence. Thus, for the PUCCH, the total number of resource elements is 24.

[0025] Fig. 11 schematically illustrates another base sequence which can be used for the DMRS and PUCCH information in accordance with one embodiment of the present disclosure. The orthogonal sequences $R_n(i)$ may be based on OCC/DFT sequence, it has a length of 6 and there are six orthogonal sequences with an index ranging from 0 to 5. Thus, it is clear that, the sequence for DMRS and the PUCCH is not limited to that illustrated in Fig. 6 or 11; in fact, any suitable sequence can be used as long as the frequency orthogonality is ensured.

[0026] Fig. 12 illustrates another new PUCCH structure in accordance with another embodiment of the present disclosure, which can be used with the base sequence as illustrated in Fig. 11. As illustrated in Fig. 12, the PUCCH and the DMRS also share the same base sequence, but the base sequence has a length of 6, for example as illustrated in Fig. 11. Similarly, the PUCCH (for example ACK/NACK) bits {0, 1} are first modulated into PUCCH symbol after constellation mapping so as to obtain the PUCCH symbol d_0 . The constellation mapping may also be performed in accordance with those illustrated in Fig. 4. The PUCCH symbol is then modulated on the base sequence with a length of 6. The PUCCH symbol Y_n modulated on the base sequence can be expressed as:

$$Y_n = d_0 \cdot R_n(i), \quad i = 0, 1, \dots, 5$$

wherein Y_n indicates resulting symbol after modulation, d_0 indicates the PUCCH symbol after constellation mapping; and $R_n(i)$ indicates the sequence with an index i , as illustrated in Fig. 11.

[0027] The PUCCH symbol will be transmitted with the DMRS and staggered-multiplexed therewith in the frequency domain as illustrated in Fig. 12. Thus, in such a case, for the PUCCH, the total number of resource elements is 12.

[0028] In a further embodiment of the present disclosure, the DMRS uses the base sequence with a length of 12, for example that illustrated in Fig. 6; while the PUCCH uses a different sequence, for example those illustrated in Fig. 11. Fig. 13 schematically illustrates a further new PUCCH structure in accordance with a further embodiment of the present disclosure, which can be used in the embodiment in which sequence with different lengths are used. In such a case, the PUCCH symbol Y_n modulated on the base sequence can be expressed as:

$$Y_n = d_0 \cdot S(i), \quad i = 0, 1, \dots, 5$$

wherein Y_n indicates resulting symbol after modulation, d_0 indicates the PUCCH symbol after constellation mapping; and $S(i)$ indicates the base sequence with an index i for the PUCCH, as illustrated in Fig. 11. In this case, for the PUCCH, two PUCCH symbols will be transmitted with the DMRS and staggered-multiplexed therewith and the total number of resource elements is 24.

[0029] Therefore, in Fig. 9, the two base sequences R_1 and R_2 as illustrated can be the same sequence. For example, the PUCCH can use the base sequence for DMRS as illustrated in Figs. 6 and Fig. 11. In addition, the base sequence R_1 and the base sequence R_2 can share the base sequence. As another option, the two basis sequence can be different ones. For example, the base sequence R_2 may be different root sequence of the base sequence R_1 . In addition, two base sequences R_1 and R_2 can have same lengths i.e., $M=N$; it may or different lengths, i.e., $M \neq N$. The sequence R'_1 for DMRS (the first sequence) can be the same as the base sequence R_1 , or the sequence R'_1 can be transformed from

the base sequence R_1 through cyclic shift or phase rotation. The sequence R'_2 for modulating PUCCH symbol (the second sequence) can be the same as the base sequence R_2 ; or the sequence R'_1 can be transformed from the base sequence R_1 through cyclic shift or phase rotation.

[0030] In embodiments of the present disclosure, the PUCCH and the RS can be stagger-multiplexed in many different manners. For a purpose of illustration, Figs. 14A to 14E illustrate several example multiplexing manners in the frequency domain. As illustrated in Fig. 14A, the RS and PUCCH can be staggered-multiplexed every RE, that is to say, one RS is for one PUCCH. In Fig. 14B, the RS and PUCCH can be staggered-multiplexed every k REs, that is to say, one RS is for k PUCCHs, wherein c_i and d_m are modulated symbols which can come from the same UE or different UE. Fig. 14C illustrates another example multiplexing manners, which is similar to that in Fig. 14B, but in Fig. 14C, the PUCCHs are not continuous in frequency but separated by the DMRS. Fig. 14D further illustrates a further example multiplexing manner, in which the RS and the PUCCH use sequences with different lengths and wherein one PUCCH uses one RS. Fig. 14E illustrates a further example multiplexing manners in accordance with a further embodiment of the present disclosure. In Fig. 14E, the PUCCHs are not separated by any DMRS but continuous in frequency, which means DMRSs are also continuous in frequency.

[0031] Hereinafter, for a purpose of illustration, common expression for one UL symbol transmission will be described wherein d_{mn} ($m \geq 0$, $n \geq 0$) denotes the modulated symbol of information bit. For a given m or n , the symbols can be same, that is to say,

$$d_{mi} = d_{mj} \text{ or } d_{in} = d_{jn}$$

In addition, symbols can also have different phase rotation, i.e.,

$$d_{mi} = e^{jk\theta} * d_{mj} \text{ or } d_{in} = e^{jk\theta} * d_{jn}$$

The symbols can have different orders. For example, one has an increasing order, and the other has a decreasing order, as illustrated in the following:

$$d_{00} = d_{1n}, d_{01} = d_{1n-1}, \dots, d_{0n} = d_{10}.$$

Alternatively, the symbols can also be totally different.

[0032] For RS sequence R_{mn} ($m \geq 0$, $n \geq 0$), the sequence can also be same for a given m or n . In another embodiment of the present disclosure, the RS sequence R_{mn} can be different for a given m or n . Besides, the symbols may also be based on the same base sequence and have different phase rotation or cycle shift values.

[0033] Figs. 15A to 15F schematically illustrate example resource mapping manners in accordance with embodiments of the present disclosure. As illustrated in Fig. 15A, both DMRS sequences and the modulated PUCCH based on the sequence are mapped in sequence, i.e. the modulated PUCCH symbols are mapped in an order of $d_{00}, d_{01}, \dots, d_{0n}, d_{10}, d_{11}, \dots, d_{1n}, \dots, d_{m0}, d_{m1}, \dots, d_{mn}$ and the DMRS sequences are mapped in order of $R_{00}, R_{01}, \dots, R_{0n}, R_{10}, R_{11}, \dots, R_{1n}, \dots, R_{m0}, R_{m1}, \dots, R_{mn}$. While in Fig. 15B, the DMRS sequences and the modulated PUCCH based on the sequence are mapped from edges of band.

[0034] In embodiments of the present disclosure, PUCCH with DMRS can be located on the physical resource blocks (PRB) with a pre-determined order in pre-defined RBs. For example, different PUCCH symbols can be located in different PRBs as illustrated in Fig. 15C. PUCCH symbols can be mapped on both edges of the system band for frequency diversity, as illustrated in Fig. 15D. In Fig. 15D, DMRS R_0 and PUCCH $d_0 * R'_1$ are mapped to a first edge of the system band; DMRS R_1 and the PUCCH $d_1 * R'_1$ are mapped to a second edge of the system band, DMRS R_2 and the PUCCH $d_2 * R'_2$ are mapped to the first edge of the remaining system band, DMRS R_3 and the PUCCH $d_3 * R'_3$ are mapped to the second edge of the remaining system, and so on.

[0035] In another embodiment of the present disclosure, duplicates of PUCCH with DMRS can be located on PRBs. For example, as illustrated in Fig. 15E, DMRS $R_{00}, R_{10}, \dots, R_{m0}$ and PUCCH $d_0 * R'_{00}, d_1 * R'_{10}, \dots, d_m * R'_{m0}$ are first mapped on a first edge of the system band, DMRS $R_{01}, R_{11}, \dots, R_{m1}$ and PUCCH $d_0 * R'_{01}, d_1 * R'_{11}, \dots, d_m * R'_{m1}$ are then mapped from the second opposite edge of the system band, and so on. Besides, Fig. 15F also illustrates another resource mapping manner, DMRS $R_{00}, R_{10}, \dots, R_{m0}$ and PUCCH $d_0 * R'_{00}, d_1 * R'_{10}, \dots, d_m * R'_{m0}$ are first mapped from on a first edge of the system band which is similar to Fig. 15E, DMRS $R_{m1}, R_{m-11}, \dots, R_{01}$ and PUCCH $d_0 * R'_{01}, d_1 * R'_{m-1}, \dots, d_m * R'_{01}$ are then mapped from the second opposite edge of the system band which is in a different order from Fig. 15E, and so on. Besides, the duplicates of PUCCH in different PRBs can also be located on PRBs in a way as illustrated in Fig. 15A or 15B.

[0036] It shall also be notice that the mapping order (e.g. hopping) can be changed with a pre-defined order in different

symbols/subframe/PRBs.

[0037] Hereinbefore, the present disclosure is mainly described with reference to one UL symbol design. In fact, it can also be used in a frame design with L UL symbols, which means the subframe can have reduced UL symbol but the number of UL symbols is larger than 1.

[0038] For each of the L UL symbols, the PUCCH and DMRS can be staggered-multiplexed in the same way, for example as illustrated in Fig. 16A. Or alternatively, there may be hopping in two symbols as illustrated in Fig. 16B. In addition, for $M(1 \leq M \leq L)$ symbols within the L symbols, PUCCH and RS sequence can be staggered-multiplexed every one or more RE in frequency; other (L-K) symbols, can all be used for PUCCH, as illustrated in Fig. 16C.

[0039] In another embodiment of the present disclosure, the PUCCH and RS sequence can be staggered-multiplexed in time. In other words, M ($1 \leq M \leq L$) symbols can be used for RS (can be contiguous or staggered), others can be used for PUCCH as illustrated in Fig. 16D.

[0040] Figs. 17A and 17B illustrate the mapping of PUCCH and RS in sequence and Fig. 17C and 17D illustrate the mapping of PUCCH and DMRS from the edges of the system band. From Fig. 17A and 17B, it can be seen that for L UL symbols, PUCCH and DMRS can be multiplexed in time and be located on PRBs with predetermined order. For example, the PUCCH with DMRS can be mapped in sequence as illustrated in Fig. 17A or mapped from both edges of the system band as illustrated in Fig. 17C. Moreover, the duplicates of PUCCH with DMRS can also be located on PRBs. As another alternative, PUCCH and DMRS may be hopped in symbols as illustrated in Fig. 17B and 17D. In addition, only for a purpose of illustration, Figs. 18A to 18D illustrate the mapping of PUCCH and DMRS in sequence and from the edges of the system band for common expression.

[0041] Fig. 19 schematically illustrates a block diagram of DMRS and PUCCH information transmission in accordance with another embodiment of the present disclosure. In the embodiment of the present disclosure, the PUCCH information symbols are not modulated based on the second sequence but are indicated by the relationship between the first sequence and the second sequence to be transmitted. As illustrated in Fig. 19, for DMRS, a base sequence 1 with N-length is first transformed to R'_1 through transformation such as cyclic shifting or phase rotation and then is mapped to physical resources. At the same time, the PUCCH information bits are first mapped to information symbols through any of constellation mappings such as illustrated in Fig. 4. A sequence R'_2 is transformed from base sequence 2 with M-length, for example is a cyclic shifted or phase-rotated sequence from base sequence 2. Then the resulting sequence R'_2 is then mapped to physical resources. In this solution, the information symbols d_i are not further multiplied with the sequence R'_2 like that in Fig. 9; instead, the information symbols d_i are implicitly indicated by the relationship between the sequence R'_1 and the sequence R'_2 . Then, the R'_2 is transmitted with DMRS sequence R'_1 .

[0042] Fig. 20 schematically illustrates a new PUCCH structure in accordance with one embodiment of the present disclosure, wherein the information symbols d_i are implicitly indicated by the relationship between the sequence R'_1 and the sequence R'_2 and the reference signal and the UL control information such as ACK/NACK are staggered-multiplexed in the frequency domain.

[0043] As illustrated in Fig. 20, in this embodiment of the present disclosure, the base sequences 1 and 2 have the same length of N. The two sequences R'_1 and R'_2 may be different, or transformed, cyclic shifted or phase-rotated from the same base sequence. The base sequences 1 and 2 may be for examples the base sequence as illustrated in Fig. 6. However, it is to be appreciated that other base sequence is also possible. The PUCCH (for example ACK/NACK) bits {0, 1} are first modulated into PUCCH symbol after constellation mapping, for example as BPSK {+1, -1}. Then the modulated symbol is implicitly indicated by the relationship of the sequences R'_1 and R'_2 . The relationship may be for example reflected by cyclic shift which can be expressed as below:

$$R'_n = e^{j\alpha n} R_n, \quad 0 \leq n \leq 11 \quad \alpha = 2\pi k / 12, \quad 0 \leq k \leq 11$$

For the sequences R'_1 and R'_2 , they can use different cycle shifts, which may be expressed by the following equations:

$$e^{j2\pi k_1/12} R_n, \quad e^{j2\pi k_2/12} R_n$$

wherein k_1 and k_2 are the CS index of R_n . If $k_1 - k_2 = 6$, it indicates that the information symbol is +1; if $k_1 - k_2 = -6$, it indicates that the information symbol is -1. In such a way, the PUCCH information symbol can be implicitly indicated by the relationship between the sequences R'_1 and R'_2 . In such a case, the total number of REs for implicating transmitting PUCCH is 24 (2N).

[0044] The PUCCH mapping and multiplexing can be similar to the embodiment as illustrated in Fig. 9 and thus for details, one may refer Fig. 10 to 18.

[0045] Fig. 21 to Fig. 22 further illustrate a further possible solution for DMRS and PUCCH information transmission in accordance with a further embodiment of the present disclosure, in which sequences are divided into k different groups

and the modulated PUCCH symbols are indicated by the predefined groups.

[0046] The PUCCH information bits are denoted by d_i , which are obtained after constellation mapping. If a modulation order is M , it resulting totally 2^M symbols. There are Q sequences which can be used. The Q sequences are grouped into K groups ($K = Q/M$), each group k_j corresponds to one modulation symbol, as illustrated in Fig. 21. Thus, different

[0047] Fig. 22 further schematically illustrates constellation mapping for QPSK in accordance with one embodiment of the present disclosure. As illustrated in Fig. 22, four sequence groups k_1 to k_4 are mapped to four NACK/ACK symbols.

[0048] The Q sequences may be different base sequences, different cyclic shifts of one or several base sequence, or different transformation of one or several base sequences, for example through a phase rotation ($R_1 = e^{j\theta} * R_2$). These sequences can be staggered or continuously mapped in frequency or time domain. The total number of REs for implicitly transmitting PUCCH information is N .

[0049] Figs. 23 to 24 illustrate a specific embodiment of cyclic-shift grouping in accordance with one embodiment of the present disclosure. In Fig. 23, there are illustrated two different cyclic shift grouping. As illustrated in Fig. 23, 12 cyclic shifts are divided into four groups which are illustrated by different patterns. The 12 cyclic shifts can be expressed as:

$$R_n = e^{j\alpha n} R_0, \quad 0 \leq n \leq 11 \quad \alpha = 2\pi k/12, \quad 0 \leq k \leq 11$$

[0050] In one possible grouping, cyclic shifts 0 to 2 are divided into the first group, cyclic shifts 3 to 5 are divided into the second group, cyclic shifts 6 to 8 are divided into the third group, and cyclic shifts 9 to 11 are divided into the fourth group. Fig. 24 schematically illustrates ACK/NACK constellation mapping corresponding to the example cyclic-shift grouping as illustrated in Fig. 21 in accordance with one embodiment of the present disclosure. As illustrated in Fig. 24, the four cyclic shift groups are respectively mapped to QPSK $\{+1, -1, +j, -j\}$.

[0051] Besides, Fig. 23 also illustrates another possible grouping, in which cyclic shifts 0, 4, 8 are divided into the first group, cyclic shifts 1, 5, 9 are divided into the second group, cyclic shifts 2, 6, 10 are divided into the third group, cyclic shifts 3, 7 to 11 are divided into the fourth group. It is to be appreciated that, in addition to the example possible groupings, the cyclic shifts can be divided in any other suitable example possible groupings, the cyclic shifts can be divided in any other suitable manner. In such a way, different cyclic shift groups can be used to indicate different PUCCH symbols. Moreover, different UE may use different cyclic shifts in a cyclic shift group to indicate their own PUCCH symbols. In a case the base sequence is 12, the total number of REs for implicitly transmitting PUCCH is 12.

[0052] Fig. 25 schematically illustrates a new PUCCH structure in accordance with one embodiment of the present disclosure. As illustrated, the PUCCH information symbol is implicitly indicated by R_n with a predetermined transformation such phase rotation (PR) or cyclic shift (CS). The R_n will be mapped to physical resource and transmitted in the UL symbol.

[0053] It is to be appreciated that the PUCCH information can be mapped to L symbols ($L \geq 1$) wherein L can be predefined value. The L can be dynamically or semi-statically informed by a base station, such as eNB; and in such a case, it may provide bits in dynamic control region or RRC message. In addition, the PUCCH resource index can be also predefined or informed dynamically or semi-statically by the eNB. It is to be noted that sequences and/or mapping orders can be different or same in PRBs or symbols; and OCC, phase rotation, etc. can be used in PRBs or symbols.

[0054] Additionally, subcarrier spacing for PUCCH can be different with other symbols. It is also possible to use a new modulation; for example, constant modulus can be used, such as 8PSK for maintaining low PAPR in one or several symbols. Moreover, the sequence length for PUCCH can be adapted with different payload.

[0055] In an embodiment of the present disclosure, PUCCH can be classified into groups, some are modulated on ZC/PN sequence or expressed with cyclic shift, and others are expressed with different sequences or not modulated on a sequence as illustrated in Figs. 26A and 26B. Usually, the important PUCCH information can be modulated with DMRS sequences to obtain accuracy results. For example, ACK/NACK is more important than CSI, and thus, it may be modulated on ZC/PN sequence or expressed with cyclic shift. By contrast, the CSI is less important and thus, CSI can be not modulated on ZC/PN sequence. The ZC/PN sequence for ACK/NACK can be used as demodulation RS for CSI which may obtain additional benefits for some PUCCH without an available reference signal. In a case, the UL control information and the reference signal might be transmitted with different time periods, in another case, not all UL control information is transmitted together with a reference signal. However, in either of the two cases, there might some PUCCH without an available reference signal. In such a case, it is possible to use previous reference signal, for example the one which is nearest thereto. As an alternative option, it may also use a sequence for previous control information since the received sequence per se carries the channel information, which may be used as RS for other PUCCH. In a special embodiment of the present disclosure, the reference signal for UL control information without an available reference signal can be determined dependent on a time distance from the previous reference signal and the previous control information to the UL control information without an available reference signal. That is to say, if the PUCCH has a shorter time distance from the previous PUCCH than the previous RS, it may use the sequence for the previous PUCCH as the reference

signal for the PUCCH. Thus, it is possible to obtain PUCCH information with a high accuracy. This solution can be used with any of PUCCH transmission solution as mentioned hereinabove so as to achieve higher accuracy.

[0056] Fig. 27A illustrates one possible UL region design in accordance with embodiment of the present disclosure. It is assumed that there are N symbols for UL, M symbols for UL control (PUCCH), and L symbols for DMRS ($L \geq 0$). In an embodiment of the present disclosure, one or several symbols/PRBs can be modulated on ZC/PN sequence or modulated with cyclic shift of ZC/PN sequence. As illustrated in Fig. 27A, For M symbols PUCCH, K symbols can be modulated on ZC/PN sequence or modulated with cyclic shift of ZC/PN sequence ($K \geq 0$); other M-K symbols can be any kind of control information. Fig. 27B also illustrate another possible UL region design in accordance with embodiment of the present disclosure, wherein there is one symbol for DMRS and one symbol for modulated PUCCH. DMRS and/or PUCCH symbols can be continuous or staggered. It is to be noted that position of DMRS, PUCCH and data can be different from those illustrated in Figs. 27A and 27B.

[0057] Besides, in embodiments of the present disclosure, there can be provided one or more DMRS in a window time for demodulation as illustrated in Figs. 28A to 28C. In an embodiment of the present disclosure, in the window time, there can be several subframes as illustrated in Fig. 28A, or several symbols as illustrated in Fig. 28B or it may be a hybrid of the previous solutions as illustrated in Fig. 28C. The window time value can be pre-defined or dynamically/semi-statically informed.

[0058] Hereinbefore, description is mainly made to the solution of UL information transmission. In the present disclosure, there is also provided a method of receiving UL information, which will be described with reference Fig. 29.

[0059] As illustrated in Fig. 29, the method 2900 may start from step 2910, in which a reference signal transmitted using a first sequence is first received. The first sequence for the reference signal may have a base sequence as illustrated in Fig. 6, may be one of the sequences as illustrated in Fig. 11 or any other sequence with frequency-domain orthogonality. The first reference signal can be a sequence transformed from a base sequence through cyclic shifting, phase rotation or any other transformation. Moreover, the reference signal may be for example a DMRS signal or any other reference signal.

[0060] In step 2920, control information transmitted using a second sequence is received. Similarly, the second sequence for the control information can have a base sequence as illustrated in Fig. 6, may be one of the sequences Fig. 11, or any other sequence with frequency-domain orthogonality. The second reference signal can be a sequence transformed from a base sequence through cyclic shifting, phase rotation or any other transformation. The first sequence and the second sequence may be identical or share the same base sequence. Or alternatively, the first sequence and the second sequence have different base sequences with same or different lengths. For example, the first sequence may have the base sequence as illustrated in Fig. 6, while the second sequence may be one of the sequences as illustrated in Fig. 11. The control information may be PUCCH information, such as NACK/ACK, or CQI, PMI, RI, etc.

[0061] Next in step 2930, the control information is demodulated using the reference signal. Particularly, the reference signal and the UL control information are staggered-multiplexed in frequency domain. In one embodiment of the present disclosure, the demodulating the control information may further comprise obtaining the UL control information using channel information together with the second sequence, wherein the channel information is obtained from the reference signal by using the first sequence. That is to say, the channel information will be first obtained from the reference signal based on the first sequence and then a control information bit can be obtained by demodulating the received control information based on the channel information and the second sequence.

[0062] In another embodiment of the present disclosure, the demodulating the control information may further comprise: obtaining the second sequence using channel information, wherein the channel information is obtained from the reference signal by using the first sequence; and obtaining the control information based on a relationship between the first sequence and the second sequence. In such a case, after obtaining the channel information based on the reference signal, the second sequence can be further obtained based on the channel information, then it further determines the relationship between the first sequence and the second sequence, which implicitly indicates the control information. Therefore, in this embodiment, the information bit is transmitted in an implicit way; in other words, the information bit itself is not multiplexed with the second sequence but be implicitly indicated by the first sequence and the second sequence.

[0063] In embodiments of the present disclosure, the reference signal and the UL control information are staggered-multiplexed in many different ways. For example, the reference signal and the UL control information can be staggered-multiplexed every one resource element with one reference signal for one piece of UL control information. As another option, the reference signal and the UL control information can be staggered-multiplexed every more than one resource element with one reference signal shared by more than one piece of the UL control information.

[0064] In embodiments of the present disclosure, the UL control information and the reference signal are mapped in any suitable manner. For example, the UL control information and the reference signal can be mapped at both edges of system bandwidth. Additionally or alternatively, the UL control information and the reference signal can hop in two symbols.

[0065] In an embodiment in which the UL control information and the reference signal are transmitted with different

time periods or not all UL control information is transmitted together with a reference signal, one of a previous reference signal and a sequence for previous control information can be used as a reference signal for demodulating UL control information without an available reference signal. In such a case, the method may further comprise determining the reference signal for UL control information without an available reference signal dependent on a time distance from the previous reference signal and the previous control information to the UL control information without an available reference signal.

[0066] Some details about the PUCCH design, the first sequence, the second sequence, the staggering-multiplexing, resource mapping and so on are already described in detail with reference to Fig. 8 to 28 and thus these details will not be elaborated herein for simplification purposes and for details about them, please see the description with reference to Figs. 8 to 28.

[0067] With embodiments of the present disclosure, it provides a new solution for UL transmission and receiving in which the uplink information can be transmitted in reduced uplink symbols so as to adapt for a subframe structure with reduced uplink symbols and thus, the transmission latency can be reduced greatly.

[0068] Fig. 30 schematically illustrates a block diagram of an apparatus for transmitting UL information in accordance with one embodiment of the present disclosure. As illustrated in Fig. 30, the apparatus 3000 comprises a reference signal transmission unit 3010, and a control information transmission unit 3020. The reference signal transmission unit 3010 may be configured for transmitting reference signal using a first sequence. The control information transmission unit 3020 may be configured for transmitting UL control information using a second sequence. Particularly, the reference signal and the UL control information are staggered-multiplexed in frequency domain.

[0069] In an embodiment of the present disclosure, the UL control information is modulated based on the second sequence, that is to say a bit of the UL control information will be transmitted implicitly. In another embodiment of the present disclosure, the first sequence and the second sequence may have a predetermined relationship which is used to implicitly indicate the UL control information.

[0070] In embodiments of the present disclosure, the first sequence and the second sequence are identical or share the same base sequence. Or alternatively, the first sequence and the second sequence can have different base sequences.

[0071] In embodiments of the present disclosure, the reference signal and the UL control information can be staggered-multiplexed in any suitable manner. For example, the reference signal and the UL control information can be staggered-multiplexed every one resource element with one reference signal for one piece of UL control information, or the reference signal and the UL control information can be staggered-multiplexed every more than one resource element with one reference signal shared by more than one piece of the UL control information.

[0072] In embodiments of the present disclosure, the reference signal and the UL control information can be mapped in any suitable manner. In an embodiment of the present disclosure, the UL control information and the reference signal are mapped at both edges of system bandwidth. In another embodiment of the present disclosure, the UL control information and the reference signal are hopping in two symbols.

[0073] In an embodiment of the present disclosure, the UL control information and the reference signal can be transmitted with different time periods. In another embodiment of the present disclosure, not all UL control information is transmitted together with a reference signal. In both cases, it means that there is some UL control information without an available reference signal. In such case, one of a previous reference signal and a sequence for previous control information can be used as a reference signal for UL control information without an available reference signal. In an embodiment of the present disclosure, the reference signal for UL control information without an available reference signal may be dependent on a time distance from the previous reference signal and the previous control information to the UL control information without an available reference signal.

[0074] Fig. 31 further illustrates an apparatus for receiving UL information. As illustrated in Fig. 31, the apparatus 3100 comprises: reference signal receiving unit 3110, and a control information receiving unit 3120 and a demodulation unit 3130. The reference signal receiving unit 3110 may be configured for receiving reference signal transmitted using a first sequence. The control information receiving unit 3120 may be configured for receiving control information transmitted using a second sequence. The demodulation unit 3130 may be configured for demodulating the control information using the reference signal. Particularly, the reference signal and the UL control information are staggered-multiplexed in frequency domain.

[0075] In an embodiment of the present disclosure, the demodulating unit 3130 is further configured for obtaining the UL control information using channel information together with the second sequence, wherein the channel information is obtained from the reference signal by using the first sequence.

[0076] In another embodiment of the present disclosure, the demodulating unit 3130 may be further configured for: obtaining the second sequence using channel information, wherein the channel information is obtained from the reference signal by using the first sequence; and obtaining the control information based on a relationship between the first sequence and the second sequence.

[0077] In an embodiment of the present disclosure, the first sequence and the second sequence can be identical or

share the same base sequence. In another embodiment of the present disclosure, the first sequence and the second sequence can have different base sequences.

[0078] In an embodiment of the present disclosure, the reference signal and the UL control information are staggered-multiplexed every one resource element with one reference signal for one piece of UL control information. In another embodiment of the present disclosure, the reference signal and the UL control information are staggered-multiplexed every more than one resource element with one reference signal shared by more than one piece of the UL control information.

[0079] In an embodiment of the present disclosure, wherein the UL control information and the reference signal are mapped at both edges of system bandwidth. In another embodiment of the present disclosure, the UL control information and the reference signal can hop in two symbols.

[0080] In an embodiment of the present disclosure, one of a previous reference signal and a sequence for previous control information can be used as a reference signal for demodulating UL control information without an available reference signal. In such a case, the apparatus 3100 may further comprise: a reference signal determination unit 3140 configured for determining the reference signal for UL control information without an available reference signal dependent on a time distance from the previous reference signal and the previous control information to the UL control information without an available reference signal.

[0081] Hereinbefore, the apparatuses 3000 and 3100 are described in brief with reference to Figs. 30 and 31. It is noted that the apparatuses 3000 and 3100 may be configured to implement functionalities as described with reference to Figs. 8 to 29. Therefore, for details about the operations of modules in these apparatuses, one may refer to those descriptions made with respect to the respective steps of the methods with reference to Figs. 8 to 29.

[0082] It is further noted that the components of the apparatuses 3000 and 3100 may be embodied in hardware, software, firmware, and/or any combination thereof. For example, the components of apparatuses 3000 and 3100 may be respectively implemented by a circuit, a processor or any other appropriate selection device. Those skilled in the art will appreciate that the aforesaid examples are only for illustration not for limitation.

[0083] In some embodiment of the present disclosure, apparatuses 3000 and 3100 may comprise at least one processor. The at least one processor suitable for use with embodiments of the present disclosure may include, by way of example, both general and special purpose processors already known or developed in the future. Apparatuses 3000 and 3100 may further comprise at least one memory. The at least one memory may include, for example, semiconductor memory devices, e.g., RAM, ROM, EPROM, EEPROM, and flash memory devices. The at least one memory may be used to store program of computer executable instructions. The program can be written in any high-level and/or low-level compliable or interpretable programming languages. In accordance with embodiments, the computer executable instructions may be configured, with the at least one processor, to cause apparatuses 3000 and 3100 to at least perform operations according to the method as discussed with reference to Figs. 8 to 29 respectively.

[0084] Fig. 32 further illustrates a simplified block diagram of an apparatus 3210 that may be embodied as or comprised in a terminal device such as UE for a wireless network in a wireless network and an apparatus 3220 that may be embodied as or comprised in a base station such as NB or eNB as described herein.

[0085] The apparatus 3210 comprises at least one processor 3211, such as a data processor (DP) and at least one memory (MEM) 3212 coupled to the processor 3211. The apparatus 3210 may further comprise a transmitter TX and receiver RX 3213 coupled to the processor 3211, which may be operable to communicatively connect to the apparatus 3220. The MEM 3212 stores a program (PROG) 3214. The PROG 3214 may include instructions that, when executed on the associated processor 3211, enable the apparatus 3210 to operate in accordance with the embodiments of the present disclosure, for example to perform the method 800. A combination of the at least one processor 3211 and the at least one MEM 3212 may form processing means 3215 adapted to implement various embodiments of the present disclosure.

[0086] The apparatus 3220 comprises at least one processor 3221, such as a DP, and at least one MEM 3222 coupled to the processor 3221. The apparatus 3220 may further comprise a suitable TX/ RX 3223 coupled to the processor 3221, which may be operable for wireless communication with the apparatus 3210. The MEM 3222 stores a PROG 3224. The PROG 3224 may include instructions that, when executed on the associated processor 3221, enable the apparatus 3220 to operate in accordance with the embodiments of the present disclosure, for example to perform the method 2900. A combination of the at least one processor 3221 and the at least one MEM 3222 may form processing means 3225 adapted to implement various embodiments of the present disclosure.

[0087] Various embodiments of the present disclosure may be implemented by computer program executable by one or more of the processors 3211, 3221, software, firmware, hardware or in a combination thereof.

[0088] The MEMs 3212 and 3222 may be of any type suitable to the local technical environment and may be implemented using any suitable data storage technology, such as semiconductor based memory devices, magnetic memory devices and systems, optical memory devices and systems, fixed memory and removable memory, as non-limiting examples.

[0089] The processors 3211 and 3321 may be of any type suitable to the local technical environment, and may include

one or more of general purpose computers, special purpose computers, microprocessors, digital signal processors DSPs and processors based on multicore processor architecture, as non-limiting examples.

[0090] In addition, the present disclosure may also provide a carrier containing the computer program as mentioned above, wherein the carrier is one of an electronic signal, optical signal, radio signal, or computer readable storage medium. The computer readable storage medium can be, for example, an optical compact disk or an electronic memory device like a RAM (random access memory), a ROM (read only memory), Flash memory, magnetic tape, CD-ROM, DVD, Blue-ray disc and the like.

[0091] The techniques described herein may be implemented by various means so that an apparatus implementing one or more functions of a corresponding apparatus described with one embodiment comprises not only prior art means, but also means for implementing the one or more functions of the corresponding apparatus described with the embodiment and it may comprise separate means for each separate function, or means that may be configured to perform two or more functions. For example, these techniques may be implemented in hardware (one or more apparatuses), firmware (one or more apparatuses), software (one or more modules), or combinations thereof. For a firmware or software, implementation may be made through modules (e.g., procedures, functions, and so on) that perform the functions described herein.

[0092] Exemplary embodiments herein have been described above with reference to block diagrams and flowchart illustrations of methods and apparatuses. It will be understood that each block of the block diagrams and flowchart illustrations, and combinations of blocks in the block diagrams and flowchart illustrations, respectively, can be implemented by various means including computer program instructions. These computer program instructions may be loaded onto a general purpose computer, special purpose computer, or other programmable data processing apparatus to produce a machine, such that the instructions which execute on the computer or other programmable data processing apparatus create means for implementing the functions specified in the flowchart block or blocks.

[0093] While this specification contains many specific implementation details, these should not be construed as limitations on the scope of any implementation or of what may be claimed, but rather as descriptions of features that may be specific to particular embodiments of particular implementations. Certain features that are described in this specification in the context of separate embodiments can also be implemented in combination in a single embodiment. Conversely, various features that are described in the context of a single embodiment can also be implemented in multiple embodiments separately or in any suitable sub-combination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a sub-combination or variation of a sub-combination.

[0094] It will be obvious to a person skilled in the art that, as the technology advances, the inventive concept can be implemented in various ways. The above described embodiments are given for describing rather than limiting the disclosure. The protection scope of the disclosure is defined by the accompanying claims.

Claims

1. A method performed by a base station (3220), the method comprising:

transmitting to a User Equipment (3210), UE, in a Radio Resource Control, RRC, signaling, a parameter indicating a number of symbol(s) for a first type of Physical Uplink Control Channel, PUCCH; and receiving from the UE (3210), a first sequence for the first type of PUCCH, wherein:

the first sequence is defined by $e^{j\alpha n} R(n)$, $0 \leq n \leq 11$,

$R(n)$ is a base sequence, and

α is defined by an equation $\alpha = 2\pi k/12$, $0 \leq k \leq 11$, wherein a value of k is based on one of four sets of two bit-pair values of Hybrid Automatic Repeat Request acknowledgement, HARQ-ACK, information bits, each value of k being different for each one of the four sets at one symbol in time domain,

wherein each bit of the HARQ-ACK information bits is: 0 representing a negative acknowledgement, NACK, or 1 representing an acknowledgement, ACK, and

wherein the four sets of two bit-pair values are: 00, 01, 10, and 11.

2. The method according to claim 1, wherein the first sequence is mapped to resource elements without being multiplied with symbols modulated from the HARQ-ACK information bits.

3. The method according to claim 1, wherein the first type of PUCCH is received without frequency-domain multiplexing with a Demodulation Reference Signal, DMRS.

4. The method according to claim 1, wherein:

one of values of k among $\{0, 1, 2\}$ is based on a first set of the four sets,
 one of values of k among $\{3, 4, 5\}$ is based on a second set of the four sets,
 one of values of k among $\{6, 7, 8\}$ is based on a third set of the four sets, and
 one of values of k among $\{9, 10, 11\}$ is based on a fourth set of the four sets.

5. The method according to claim 1, wherein each value of k corresponding to a single two bit-pair of values of HARQ-ACK information bits is UE specific at the one symbol in the time domain.

6. A base station (3220) comprising:

means for transmitting, to a User Equipment (3210), UE, in a Radio Resource Control, RRC, signaling, a parameter indicating a number of symbol(s) for a first type of Physical Uplink Control Channel, PUCCH; and
 means for receiving, from the UE (3210), a first sequence for the first type of PUCCH,
 wherein:

the first sequence is defined by $e^{j\alpha n} R(n)$, $0 \leq n \leq 11$,
 $R(n)$ is a base sequence, and
 α is defined by an equation $\alpha = 2\pi k/12$, $0 \leq k \leq 11$, wherein a value of k is based on one of four sets of two
 bit-pair values of Hybrid Automatic Repeat Request acknowledgement, HARQ-ACK, information bits, each
 value of k being different for each one of the four sets at one symbol in time domain,

wherein each bit of the HARQ-ACK information bits is: 0 representing a negative acknowledgement, NACK, or
 1 representing an acknowledgement, ACK, and
 wherein the four sets of two bit-pair values are: 00, 01, 10, and 11.

7. The base station (3220) of claim 6, further comprising:

means for interpreting at least either the NACK or the ACK from the one of the four sets, based on the first sequence.

8. The base station (3220) according to claim 6, wherein the base sequence is defined by a formula $R(n) = e^{j\varphi(n)\pi/4}$, and
 wherein values of $\varphi(n)$ vary among -1, 1, -3, or 3 depending on a value of n .

9. The base station (3220) according to claim 6, wherein the first sequence is mapped to resource elements without
 being multiplied with symbols modulated from the HARQ-ACK information bits.

10. The base station (3220) according to claim 6, wherein the first type of PUCCH is received without frequency-domain
 multiplexing with a Demodulation Reference Signal, DMRS.

11. The base station (3220) according to claim 10, wherein the first type of PUCCH is received without time-domain
 multiplexing with the DMRS.

12. The base station (3220) according to claim 6, wherein:

one of values of k among $\{0, 1, 2\}$ is based on a first set of the four sets,
 one of values of k among $\{3, 4, 5\}$ is based on a second set of the four sets,
 one of values of k among $\{6, 7, 8\}$ is based on a third set of the four sets, and
 one of values of k among $\{9, 10, 11\}$ is based on a fourth set of the four sets.

13. The base station (3220) according to claim 6, wherein each value of k corresponding to a single two bit-pair of values
 of HARQ-ACK information bits is UE specific at the one symbol in the time domain.

14. The base station (3220) according to claim 6, wherein the number of symbol(s) is 1.

15. The base station (3220) according to claim 6, wherein α is a cyclic shift.

16. A method performed by a User Equipment (3210), UE, comprising:

receiving from a base station (3220), in a Radio Resource Control, RRC, signaling, a parameter indicating a number of symbol(s) for a first type of Physical Uplink Control Channel, PUCCH; and
transmitting to the base station (3220), a first sequence for the first type of PUCCH,
wherein:

the first sequence is defined by $e^{j\alpha n} R(n)$, $0 \leq n \leq 11$,

$R(n)$ is a base sequence, and

α is defined by an equation $\alpha = 2\pi k/12$, $0 \leq k \leq 11$, wherein a value of k is based on one of four sets of two bit-pair values of Hybrid Automatic Repeat Request acknowledgement, HARQ-ACK, information bits, each value of k being different for each one of the four sets at one symbol in time domain,

wherein each bit of the HARQ-ACK information bits is: 0 representing a negative acknowledgement, NACK, or 1 representing an acknowledgement, ACK, and

wherein the four sets of two bit-pair values are: 00, 01, 10, and 11.

17. The method according to claim 16, wherein the first sequence is mapped to resource elements without being multiplied with symbols modulated from the HARQ-ACK information bits.

18. The method according to claim 16, wherein the first type of PUCCH is transmitted without frequency-domain multiplexing with a Demodulation Reference Signal, DMRS.

19. The method according to claim 16, wherein:

one of values of k among {0, 1, 2} is based on a first set of the four sets,

one of values of k among {3, 4, 5} is based on a second set of the four sets,

one of values of k among {6, 7, 8} is based on a third set of the four sets, and

one of values of k among {9, 10, 11} is based on a fourth set of the four sets.

20. The method according to claim 16, wherein each value of k corresponding to a single two bit-pair of values of HARQ-ACK information bits is UE specific at the one symbol in the time domain.

21. A User Equipment (3210), UE, comprising:

means for receiving from a base station (3220), in a Radio Resource Control, RRC, signaling, a parameter indicating a number of symbol(s) for a first type of Physical Uplink Control Channel, PUCCH; and
means for transmitting to the base station (3220), a first sequence for the first type of PUCCH,
wherein:

the first sequence is defined by $e^{j\alpha n} R(n)$, $0 \leq n \leq 11$,

$R(n)$ is a base sequence, and

α is defined by an equation $\alpha = 2\pi k/12$, $0 \leq k \leq 11$, wherein a value of k is based on one of four sets of two bit-pair values of Hybrid Automatic Repeat Request acknowledgement, HARQ-ACK, information bits, each value of k being different for each one of the four sets at one symbol in time domain,

wherein each bit of the HARQ-ACK information bits is: 0 representing a negative acknowledgement, NACK, or 1 representing an acknowledgement, ACK, and

wherein the four sets of two bit-pair values are: 00, 01, 10, and 11.

22. The UE (3210) according to claim 21, wherein the base sequence is defined by a formula $R(n) = e^{j\varphi(n)\pi/4}$, and wherein values of $\varphi(n)$ vary among -1, 1, -3, or 3 depending on a value of n .

23. The UE (3210) according to claim 21, wherein the first sequence is mapped to resource elements without being multiplied with symbols modulated from the HARQ-ACK information bits.

24. The UE (3210) according to claim 21, wherein the first type of PUCCH is transmitted without frequency-domain multiplexing with a Demodulation Reference Signal, DMRS.

25. The UE (3210) according to claim 24, wherein the first type of PUCCH is transmitted without time-domain multiplexing with the DMRS.

26. The UE (3210) of claim 21, wherein:

one of values of k among $\{0, 1, 2\}$ is based on a first set of the four sets,
 one of values of k among $\{3, 4, 5\}$ is based on a second set of the four sets,
 one of values of k among $\{6, 7, 8\}$ is based on a third set of the four sets, and
 one of values of k among $\{9, 10, 11\}$ is based on a fourth set of the four sets.

27. The UE (3210) according to claim 21, wherein each value of k corresponding to a single two bit-pair of values of HARQ-ACK information bits is UE specific at the one symbol in the time domain.

28. The UE (3210) according to claim 21, wherein the number of symbol(s) is 1.

29. The UE (3210) according to claim 21, wherein α is a cyclic shift.

Patentansprüche

1. Verfahren, das durch eine Basisstation (3220) ausgeführt wird, wobei das Verfahren die Schritte aufweist:

Übertragen eines Parameters, der eine Anzahl von Symbolen für einen ersten PUCCH-, physikalischer Uplink-Steuerkanal, Typ anzeigt, an ein Benutzergerät (3210), UE, in einer RRC-, Funkressourcensteuerung, Signalisierung; und Empfangen einer ersten Sequenz für den ersten PUCCH-Typ vom UE (3210), wobei:

die erste Sequenz durch $e^{j\alpha n} R(n)$, $0 \leq n \leq 11$ definiert ist,

$R(n)$ eine Basissequenz ist, und

α durch eine Gleichung $\alpha = 2\pi k/12$ definiert ist, wobei $0 \leq k \leq 11$ ist, wobei ein Wert von k auf einem von vier Sätzen von zwei Bit-Paar Werten von HARQ-ACK-, Hybrid Automatic Repeat Request Acknowledgement, Informationsbits basiert, wobei jeder Wert von k für jeden der vier Sätze bei einem Symbol im Zeitbereich unterschiedlich ist,

wobei jedes Bit der HARQ-ACK-Informationsbits ist: 0, was eine negative Bestätigung, NACK, darstellt, oder 1, was eine Bestätigung, ACK, darstellt, und

wobei die vier Sätze von zwei Bit-Paar Werten sind: 00, 01, 10, und 11.

2. Verfahren nach Anspruch 1, wobei die erste Sequenz auf Ressourcenelemente abgebildet wird, ohne mit Symbolen multipliziert zu werden, die von den HARQ-ACK-Informationsbits moduliert werden.

3. Verfahren nach Anspruch 1, wobei der erste PUCCH-Typ ohne Frequenzbereichmultiplexen mit einem Demodulationsreferenzsignal, DMRS, empfangen wird.

4. Verfahren nach Anspruch 1, wobei

einer der Werte von k unter $\{0, 1, 2\}$ auf einem ersten Satz der vier Sätze basiert,
 einer der Werte von k unter $\{3, 4, 5\}$ auf einem zweiten Satz der vier Sätze basiert,
 einer der Werte von k unter $\{6, 7, 8\}$ auf einem dritten Satz der vier Sätze basiert, und
 einer der Werte von k unter $\{9, 10, 11\}$ auf einem vierten Satz der vier Sätze basiert.

5. Verfahren nach Anspruch 1, wobei jeder Wert von k , der einem einzelnen zwei Bit-Paar von Werten von HARQ-ACK-Informationsbits entspricht, bei dem einen Symbol im Zeitbereich UE-spezifisch ist.

6. Basisstation (3220), mit:

einer Einrichtung zum Übertragen eines Parameters, der eine Anzahl von Symbolen für einen ersten PUCH-, physikalischer Uplink-Steuerkanal, Typ anzeigt, an ein Benutzergerät (3210), UE, in einer RRC-, Funkressour-

censteuerung, Signalisierung; und
 einer Einrichtung zum Empfangen einer ersten Sequenz für den ersten PUCCH-Typ vom UE (3210),
 wobei:

die erste Sequenz durch $e^{j\alpha n} R(n)$, $0 \leq n \leq 11$ definiert ist,
 $R(n)$ eine Basissequenz ist, und
 α durch eine Gleichung $\alpha = 2\pi k/12$ definiert ist, wobei $0 \leq k \leq 11$ ist, wobei ein Wert von k auf einem von
 vier Sätzen von zwei Bit-Paar Werten von HARQ-ACK-, Hybrid Automatic Repeat Request Acknowledge-
 ment, Informationsbits basiert, wobei jeder Wert von k für jeden der vier Sätze bei einem Symbol im Zeit-
 bereich unterschiedlich ist,

wobei jedes Bit der HARQ-ACK-Informationsbits ist: 0, was eine negative Bestätigung, NACK, darstellt, oder
 1, was eine Bestätigung, ACK, darstellt, und
 wobei die vier Sätze von zwei Bit-Paar Werten sind: 00, 01, 10, und 11.

7. Basisstation (3220) nach Anspruch 6, ferner mit:
 einer Einrichtung zum Interpretieren der NACK und/oder der ACK von einem der vier Sätze basierend auf der ersten
 Sequenz.

8. Basisstation (3220) nach Anspruch 6, wobei die Basissequenz durch eine Formel $R(n) = e^{j\varphi(n)\pi/4}$ definiert ist, und
 wobei Werte von $\varphi(n)$ in Abhängigkeit von einem Wert von n zwischen - 1, 1, -3 oder 3 variieren.

9. Basisstation (3220) nach Anspruch 6, wobei die erste Sequenz auf Ressourcenelemente abgebildet wird, ohne mit
 Symbolen multipliziert zu werden, die von den HARQ-ACK-Informationsbits moduliert werden.

10. Basisstation (3220) nach Anspruch 6, wobei der erste PUCCH-Typ ohne Frequenzbereichmultiplexen mit einem
 Demodulationsreferenzsignal, DMRS, empfangen wird.

11. Basisstation (3220) nach Anspruch 10, wobei der erste PUCCH-Typ ohne Zeitbereichmultiplexen mit dem DMRS
 empfangen wird.

12. Basisstation (3220) nach Anspruch 6, wobei:

einer der Werte von k unter $\{0, 1, 2\}$ auf einem ersten Satz der vier Sätze basiert,
 einer der Werte von k unter $\{3, 4, 5\}$ auf einem zweiten Satz der vier Sätze basiert,
 einer der Werte von k unter $\{6, 7, 8\}$ auf einem dritten Satz der vier Sätze basiert, und
 einer der Werte von k unter $\{9, 10, 11\}$ auf einem vierten Satz der vier Sätze basiert.

13. Basisstation (3220) nach Anspruch 6, wobei jeder Wert von k , der einem einzelnen zwei Bit-Paar Werten von HARQ-
 ACK-Informationsbits entspricht, bei dem einen Symbol im Zeitbereich UE-spezifisch ist.

14. Basisstation (3220) nach Anspruch 6, wobei die Anzahl der Symbole 1 beträgt.

15. Basisstation (3220) nach Anspruch 6, wobei α eine zyklische Verschiebung ist.

16. Verfahren, das durch ein Benutzergerät (3210), UE, ausgeführt wird, mit den Schritten:

Empfangen eines Parameters, der eine Anzahl von Symbolen für einen ersten PUCCH-, physikalischer Uplink-
 Steuerkanal, Typ anzeigt, von einer Basisstation (3220) in einer RRC-, Funkressourcensteuerung, Signalisie-
 rung; und
 Übertragen einer ersten Sequenz für den ersten PUCCH-Typ an die Basisstation (3220), wobei:

die erste Sequenz durch $e^{j\alpha n} R(n)$, $0 \leq n \leq 11$ definiert ist,

$R(n)$ eine Basissequenz ist, und
 α durch eine Gleichung $\alpha = 2\pi k/12$ definiert ist, wobei $0 \leq k \leq 11$ ist, wobei ein Wert von k auf einem
 von vier Sätzen von zwei Bit-Paar Werten von HARQ-ACK-, Hybrid Automatic Repeat Request Ack-
 nowledge-ment, Informationsbits basiert, wobei jeder Wert von k für jeden der vier Sätze bei einem

Symbol im Zeitbereich unterschiedlich ist,

wobei jedes Bit der HARQ-ACK-Informationsbits ist: 0, was eine negative Bestätigung, NACK, darstellt, oder 1, was eine Bestätigung, ACK, darstellt, und

wobei die vier Sätze von zwei Bit-Paar Werten sind: 00, 01, 10, und 11.

17. Verfahren nach Anspruch 16, wobei die erste Sequenz auf Ressourcenelemente abgebildet wird, ohne mit Symbolen multipliziert zu werden, die von den HARQ-ACK-Informationsbits moduliert werden

18. Verfahren nach Anspruch 16, wobei der erste PUCCH-Typ ohne Frequenzbereichmultiplexen mit einem Demodulationsreferenzsignal, DMRS, übertragen wird.

19. Verfahren nach Anspruch 16, wobei:

einer der Werte von k unter $\{0, 1, 2\}$ auf einem ersten Satz der vier Sätze basiert, einer der Werte von k unter $\{3, 4, 5\}$ auf einem zweiten Satz der vier Sätze basiert, einer der Werte von k unter $\{6, 7, 8\}$ auf einem dritten Satz der vier Sätze basiert, und einer der Werte von k unter $\{9, 10, 11\}$ auf einem vierten Satz der vier Sätze basiert.

20. Verfahren nach Anspruch 16, wobei jeder Wert von k , der einem einzelnen zwei Bit-Paar von Werten von HARQ-ACK-Informationsbits entspricht, bei dem einen Symbol im Zeitbereich UE-spezifisch ist.

21. Benutzergerät (3210), UE, mit:

einer Einrichtung zum Empfangen eines Parameters, der eine Anzahl von Symbolen für einen ersten PUCCH-, physikalischer Uplink.-Steuerkanal, Typ anzeigt, von einer Basisstation (3220) in einer RRC-, Funkressourcensteuerung, Signalisierung; und einer Einrichtung zum Übertragen einer ersten Sequenz für den ersten PUCCH-Typ an die Basisstation (3220), wobei:

die erste Sequenz durch $e^{j\alpha n} R(n)$, $0 \leq n \leq 11$ definiert ist,

$R(n)$ eine Basissequenz ist, und

α durch eine Gleichung $\alpha = 2\pi k/12$ definiert ist, wobei $0 \leq k \leq 11$ ist, wobei ein Wert von k auf einem von vier Sätzen von zwei Bit-Paar Werten von HARQ-ACK-, Hybrid Automatic Repeat Request Acknowledgement, Informationsbits basiert, wobei jeder Wert von k für jeden der vier Sätze bei einem Symbol im Zeitbereich unterschiedlich ist,

wobei jedes Bit der HARQ-ACK-Informationsbits ist: 0, was eine negative Bestätigung, NACK, darstellt, oder 1, was eine Bestätigung, ACK, darstellt, und

wobei die vier Sätze von zwei Bit-Paar Werten sind: 00, 01, 10, und 11.

22. UE (3210) nach Anspruch 21, wobei die Basissequenz durch eine Formel $R(n) = e^{j\varphi(n)\pi/4}$ definiert ist, und wobei Werte von $\varphi(n)$ in Abhängigkeit von einem Wert von n zwischen -1, 1, -3 oder 3 variieren.

23. UE (3210) nach Anspruch 21, wobei die erste Sequenz auf Ressourcenelemente abgebildet wird, ohne mit Symbolen multipliziert zu werden, die von den HARQ-ACK-Informationsbits moduliert werden.

24. UE (3210) nach Anspruch 21, wobei der erste PUCCH-Typ ohne Frequenzbereichmultiplexen mit einem Demodulationsreferenzsignal, DMRS, übertragen wird.

25. UE (3210) nach Anspruch 24, wobei der erste PUCCH-Typ ohne Zeitbereichmultiplexen mit dem DMRS übertragen wird.

26. UE (3210) nach Anspruch 21, wobei:

einer der Werte von k unter $\{0, 1, 2\}$ auf einem ersten Satz der vier Sätze basiert, einer der Werte von k unter $\{3, 4, 5\}$ auf einem zweiten Satz der vier Sätze basiert,

einer der Werte von k unter $\{6, 7, 8\}$ auf einem dritten Satz der vier Sätze basiert, und
einer der Werte von k unter $\{9, 10, 11\}$ auf einem vierten Satz der vier Sätze basiert.

27. UE (3210) nach Anspruch 21, wobei jeder Wert von k , der einem einzelnen zwei Bit-Paar von Werten von HARQ-ACK-Informationsbits entspricht, bei dem einen Symbol im Zeitbereich UE-spezifisch ist

28. UE (3210) nach Anspruch 21, wobei die Anzahl der Symbole 1 beträgt.

29. UE (3210) nach Anspruch 21, wobei α eine zyklische Verschiebung ist.

Revendications

1. Procédé réalisé par une station de base (3220), le procédé comprenant:

la transmission, à un équipement utilisateur (3210), UE, dans une signalisation de commande de ressource radio, RRC, d'un paramètre indiquant un nombre de symbole(s) pour un premier type de canal physique de commande de liaison montante, PUCCH; et
la réception, à partir de l'UE (3210), d'une première séquence pour le premier type de PUCCH, dans lequel:

la première séquence est définie par $e^{j\alpha n}R(n)$, $0 \leq n \leq 11$,
 $R(n)$ est une séquence de base, et

α est défini par une équation $\alpha = 2\pi k/12$, $0 \leq k \leq 11$, dans lequel une valeur de k est basée sur un parmi quatre ensembles de valeurs de paire de deux bits de bits d'information d'accusé de réception de demande de répétition automatique hybride, HARQ-ACK, chaque valeur de k étant différente pour chacun des quatre ensembles au niveau d'un symbole dans un domaine temporel, dans lequel chaque bit des bits d'information HARQ-ACK est: 0 représentant un accusé de réception négatif, NACK, ou 1 représentant un accusé de réception positif, ACK, et dans lequel les quatre ensembles de valeurs de paire de deux bits sont: 00, 01, 10 et 11.

2. Procédé selon la revendication 1, dans lequel la première séquence est mappée à des éléments de ressource sans être multipliée avec des symboles modulés à partir des bits d'information HARQ-ACK.

3. Procédé selon la revendication 1, dans lequel le premier type de PUCCH est reçu sans multiplexage de domaine fréquentiel avec un signal de référence de démodulation, DMRS.

4. Procédé selon la revendication 1, dans lequel:

une de valeurs de k parmi $\{0, 1, 2\}$ est basée sur un premier ensemble des quatre ensembles,
une de valeurs de k parmi $\{3, 4, 5\}$ est basée sur un deuxième ensemble des quatre ensembles,
une de valeurs de k parmi $\{6, 7, 8\}$ est basée sur un troisième ensemble des quatre ensembles, et
une de valeurs de k parmi $\{9, 10, 11\}$ est basée sur un quatrième ensemble des quatre ensembles.

5. Procédé selon la revendication 1, dans lequel chaque valeur de k correspondant à une unique paire de deux bits de valeurs de bits d'information HARQ-ACK est spécifique à l'UE au niveau de l'un symbole dans le domaine temporel.

6. Station de base (3220) comprenant:

des moyens pour transmettre, à un équipement utilisateur (3210), UE, dans une signalisation de commande de ressource radio, RRC, un paramètre indiquant un nombre de symbole(s) pour un premier type de canal physique de commande de liaison montante, PUCCH; et
des moyens pour recevoir, à partir de l'UE (3210), une première séquence pour le premier type de PUCCH, dans laquelle:

la première séquence est définie par $e^{j\alpha n}R(n)$, $0 \leq n \leq 11$,
 $R(n)$ est une séquence de base, et

α est défini par une équation $\alpha = 2\pi k/12$, $0 \leq k \leq 11$, dans laquelle une valeur de k est basée sur un parmi

quatre ensembles de valeurs de paire de deux bits de bits d'information d'accusé de réception de demande de répétition automatique hybride, HARQ-ACK, chaque valeur de k étant différente pour chacun des quatre ensembles au niveau d'un symbole dans un domaine temporel, dans laquelle chaque bit des bits d'information HARQ-ACK est: 0 représentant un accusé de réception négatif, NACK, ou 1 représentant un accusé de réception positif, ACK, et dans laquelle les quatre ensembles de valeurs de paire de deux bits sont: 00, 01, 10 et 11.

7. Station de base (3220) selon la revendication 6, comprenant en outre: des moyens pour interpréter au moins soit le NACK soit l'ACK à partir de l'un des quatre ensembles, sur la base de la première séquence.

8. Station de base (3220) selon la revendication 6, dans laquelle la séquence de base est définie par une formule $R(n) = e^{j\varphi(n)\pi/4}$, et dans laquelle des valeurs de $\varphi(n)$ varient entre -1, 1, -3 ou 3 en fonction d'une valeur de n .

9. Station de base (3220) selon la revendication 6, dans laquelle la première séquence est mappée à des éléments de ressource sans être multipliée avec des symboles modulés à partir des bits d'information HARQ-ACK.

10. Station de base (3220) selon la revendication 6, dans laquelle le premier type de PUCCH est reçu sans multiplexage de domaine fréquentiel avec un signal de référence de démodulation, DMRS.

11. Station de base (3220) selon la revendication 10, dans laquelle le premier type de PUCCH est reçu sans multiplexage de domaine temporel avec le DMRS.

12. Station de base (3220) selon la revendication 6, dans laquelle:

une de valeurs de k parmi {0, 1, 2} est basée sur un premier ensemble des quatre ensembles, une de valeurs de k parmi {3, 4, 5} est basée sur un deuxième ensemble des quatre ensembles, une de valeurs de k parmi {6, 7, 8} est basée sur un troisième ensemble des quatre ensembles, et une de valeurs de k parmi {9, 10, 11} est basée sur un quatrième ensemble des quatre ensembles.

13. Station de base (3220) selon la revendication 6, dans laquelle chaque valeur de k correspondant à une unique paire de deux bits de valeurs de bits d'information HARQ-ACK est spécifique à l'UE au niveau de l'un symbole dans le domaine temporel.

14. Station de base (3220) selon la revendication 6, dans laquelle le nombre de symbole(s) est 1.

15. Station de base (3220) selon la revendication 6, dans laquelle α est un décalage cyclique.

16. Procédé réalisé par un équipement utilisateur (3210), UE, comprenant:

la réception, à partir d'une station de base (3220), dans une signalisation de commande de ressource radio, RRC, d'un paramètre indiquant un nombre de symbole(s) pour un premier type de canal physique de commande de liaison montante, PUCCH; et

la transmission, à la station de base (3220), d'une première séquence pour le premier type de PUCCH, dans lequel:

la première séquence est définie par $e^{j\alpha n}R(n)$, $0 \leq n \leq 11$, $R(n)$ est une séquence de base, et

α est défini par une équation $\alpha = 2\pi k/12$, $0 \leq k \leq 11$, dans lequel une valeur de k est basée sur un parmi quatre ensembles de valeurs de paire de deux bits de bits d'information d'accusé de réception de demande de répétition automatique hybride, HARQ-ACK, chaque valeur de k étant différente pour chacun des quatre ensembles au niveau d'un symbole dans un domaine temporel, dans lequel chaque bit des bits d'information HARQ-ACK est: 0 représentant un accusé de réception négatif, NACK, ou 1 représentant un accusé de réception positif, ACK, et dans lequel les quatre ensembles de valeurs de paire de deux bits sont: 00, 01, 10 et 11.

17. Procédé selon la revendication 16, dans lequel la première séquence est mappée à des éléments de ressource

sans être multipliée avec des symboles modulés à partir des bits d'information HARQ-ACK.

18. Procédé selon la revendication 16, dans lequel le premier type de PUCCH est transmis sans multiplexage de domaine fréquentiel avec un signal de référence de démodulation, DMRS.

19. Procédé selon la revendication 16, dans lequel:

une de valeurs de k parmi $\{0, 1, 2\}$ est basée sur un premier ensemble des quatre ensembles,
une de valeurs de k parmi $\{3, 4, 5\}$ est basée sur un deuxième ensemble des quatre ensembles,
une de valeurs de k parmi $\{6, 7, 8\}$ est basée sur un troisième ensemble des quatre ensembles, et
une de valeurs de k parmi $\{9, 10, 11\}$ est basée sur un quatrième ensemble des quatre ensembles.

20. Procédé selon la revendication 16, dans lequel chaque valeur de k correspondant à une unique paire de deux bits de valeurs de bits d'information HARQ-ACK est spécifique à l'UE au niveau de l'un symbole dans le domaine temporel.

21. Équipement utilisateur (3210), UE, comprenant:

des moyens pour recevoir, à partir d'une station de base (3220), dans une signalisation de commande de ressource radio, RRC, un paramètre indiquant un nombre de symbole(s) pour un premier type de canal physique de commande de liaison montante, PUCCH; et
des moyens pour transmettre, à la station de base (3220), une première séquence pour le premier type de PUCCH,
dans lequel:

la première séquence est définie par $e^{j\alpha n}R(n)$, $0 \leq n \leq 11$,
 $R(n)$ est une séquence de base, et
 α est défini par une équation $\alpha = 2\pi k/12$, $0 \leq k \leq 11$, dans lequel une valeur de k est basée sur un parmi quatre ensembles de valeurs de paire de deux bits de bits d'information d'accusé de réception de demande de répétition automatique hybride, HARQ-ACK, chaque valeur de k étant différente pour chacun des quatre ensembles au niveau d'un symbole dans un domaine temporel,
dans lequel chaque bit des bits d'information HARQ-ACK est: 0 représentant un accusé de réception négatif, NACK, ou 1 représentant un accusé de réception positif, ACK, et
dans lequel les quatre ensembles de valeurs de paire de deux bits sont: 00, 01, 10 et 11.

22. UE (3210) selon la revendication 21, dans lequel la séquence de base est définie par une formule $R(n) = e^{j\varphi(n)\pi/4}$, et dans lequel des valeurs de $\varphi(n)$ varient entre -1, 1, -3 ou 3 en fonction d'une valeur de n .

23. UE (3210) selon la revendication 21, dans lequel la première séquence est mappée à des éléments de ressource sans être multipliée avec des symboles modulés à partir des bits d'information HARQ-ACK.

24. UE (3210) selon la revendication 21, dans lequel le premier type de PUCCH est transmis sans multiplexage de domaine fréquentiel avec un signal de référence de démodulation, DMRS.

25. UE (3210) selon la revendication 24, dans lequel le premier type de PUCCH est transmis sans multiplexage de domaine temporel avec le DMRS.

26. UE (3210) selon la revendication 21, dans lequel:

une de valeurs de k parmi $\{0, 1, 2\}$ est basée sur un premier ensemble des quatre ensembles,
une de valeurs de k parmi $\{3, 4, 5\}$ est basée sur un deuxième ensemble des quatre ensembles,
une de valeurs de k parmi $\{6, 7, 8\}$ est basée sur un troisième ensemble des quatre ensembles, et
une de valeurs de k parmi $\{9, 10, 11\}$ est basée sur un quatrième ensemble des quatre ensembles.

27. UE (3210) selon la revendication 21, dans lequel chaque valeur de k correspondant à une unique paire de deux bits de valeurs de bits d'information HARQ-ACK est spécifique à l'UE au niveau de l'un symbole dans le domaine temporel.

28. UE (3210) selon la revendication 21, dans lequel le nombre de symbole(s) est 1.

29. UE (3210) selon la revendication 21, dans lequel α est un décalage cyclique.

5

10

15

20

25

30

35

40

45

50

55

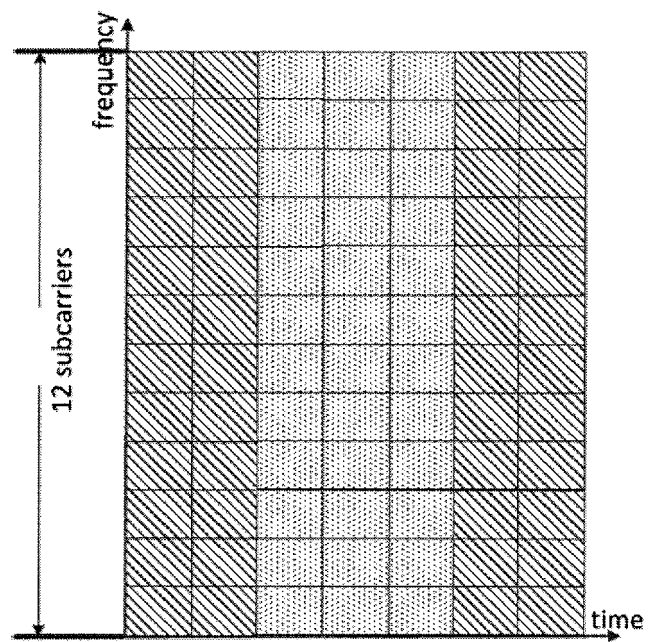


Fig. 1

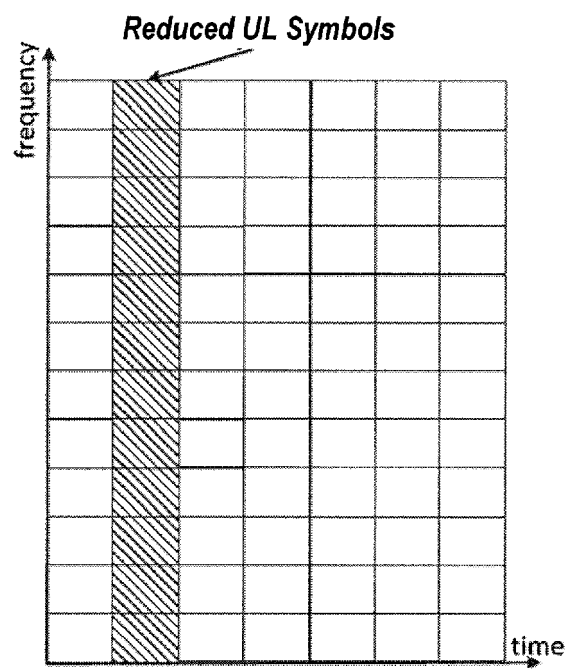


Fig. 2

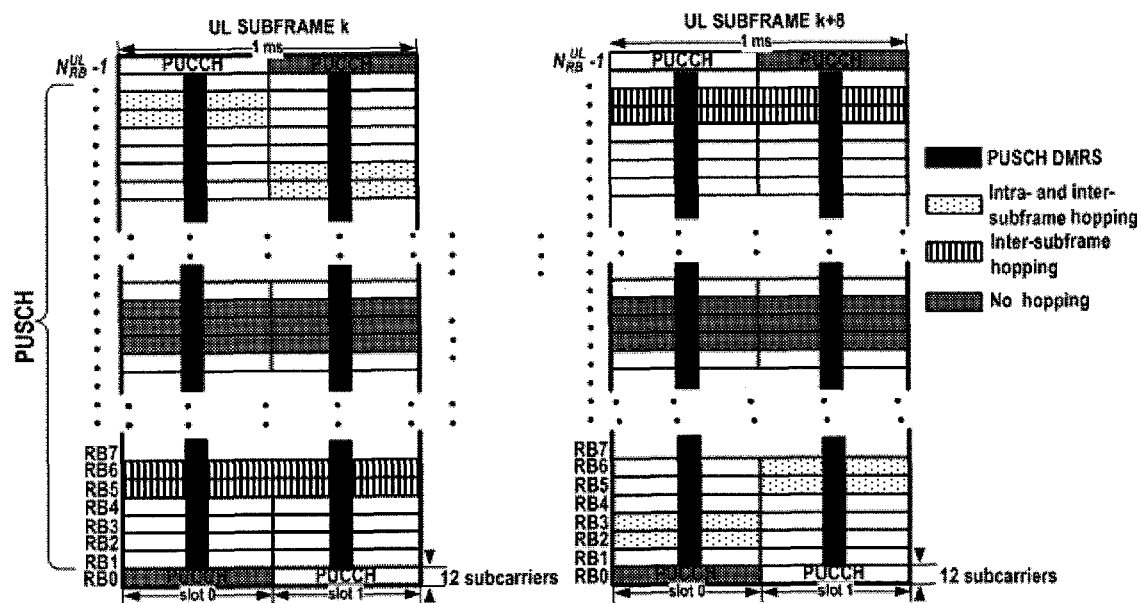


Fig. 3

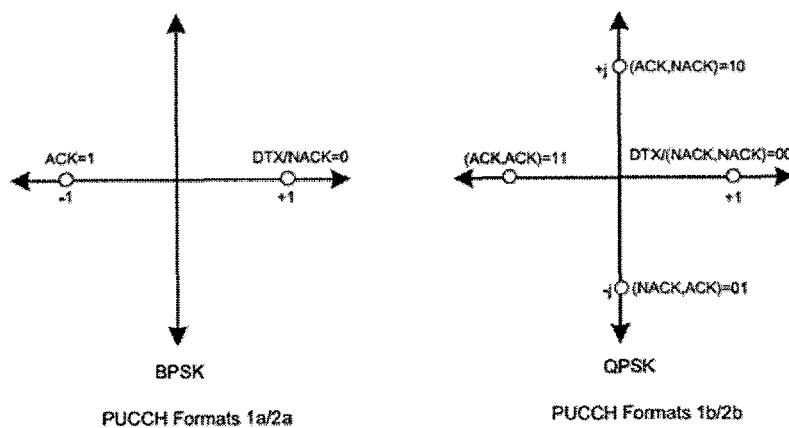


Fig. 4

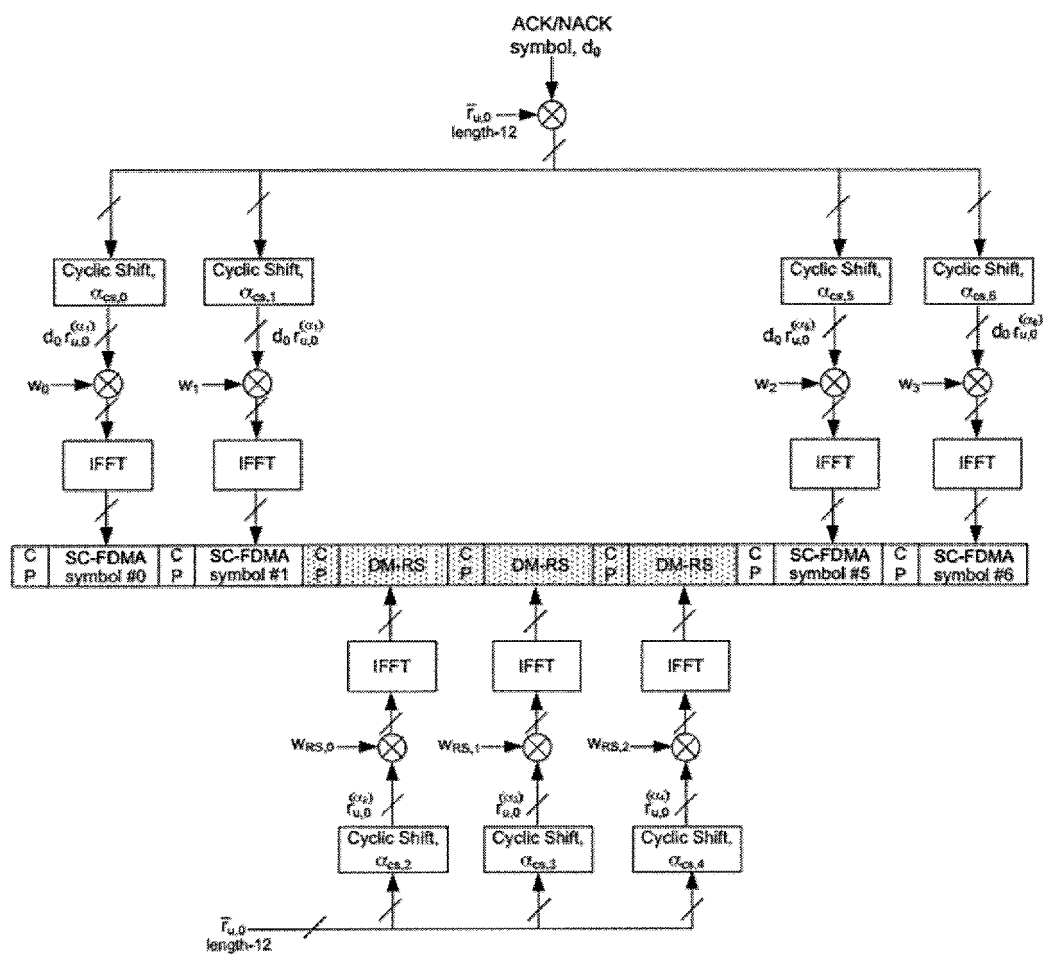


Fig. 5

Base sequence $R_n = e^{j\varphi(n)\pi/4}$, $0 \leq n \leq 11$

u	$\varphi(0), \dots, \varphi(11)$											
0	-1	1	3	-3	3	3	1	1	3	1	-3	3

Fig. 6

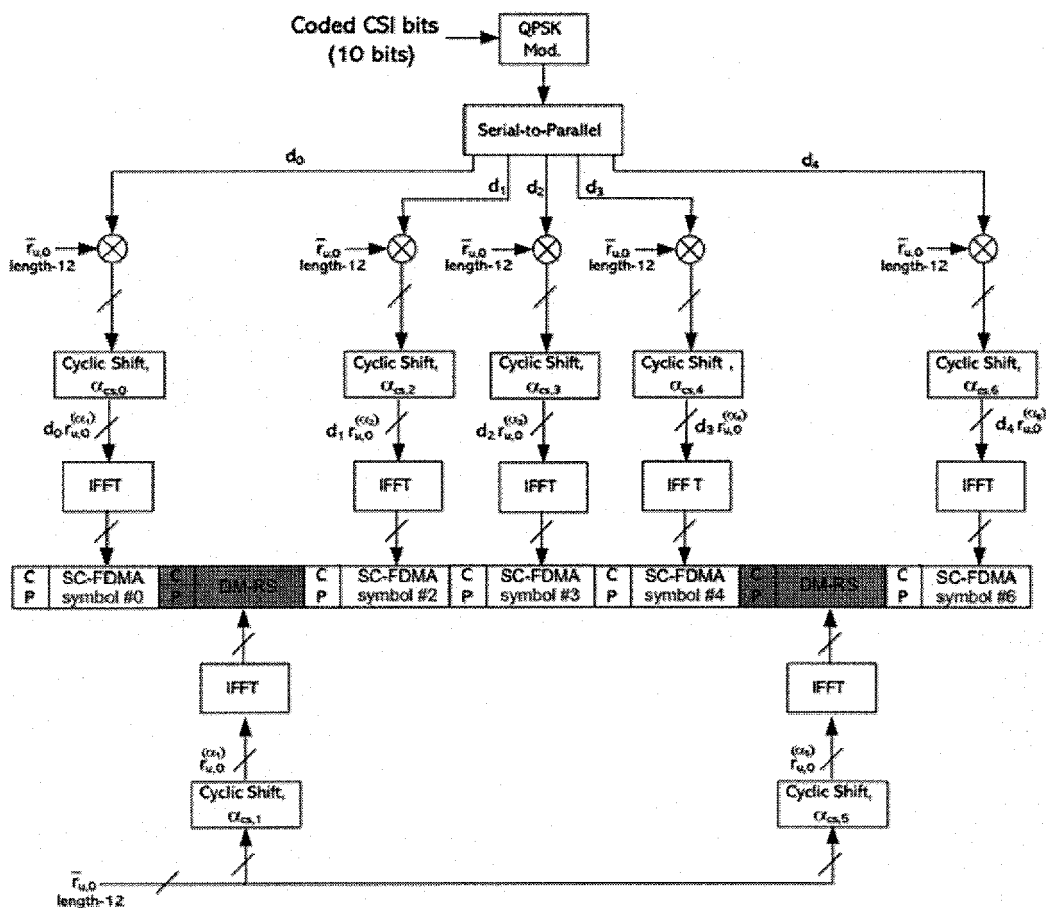


Fig. 7

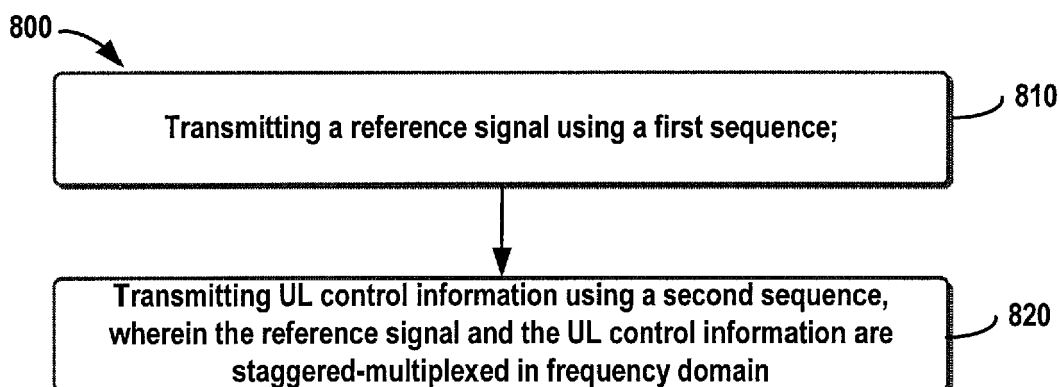


Fig.8

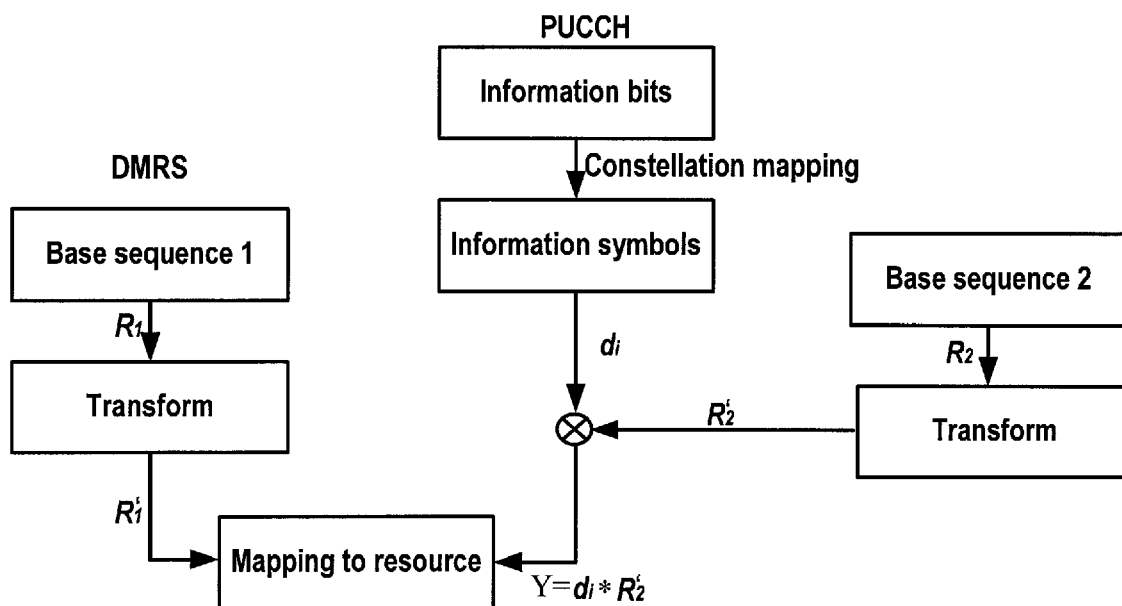


Fig. 9

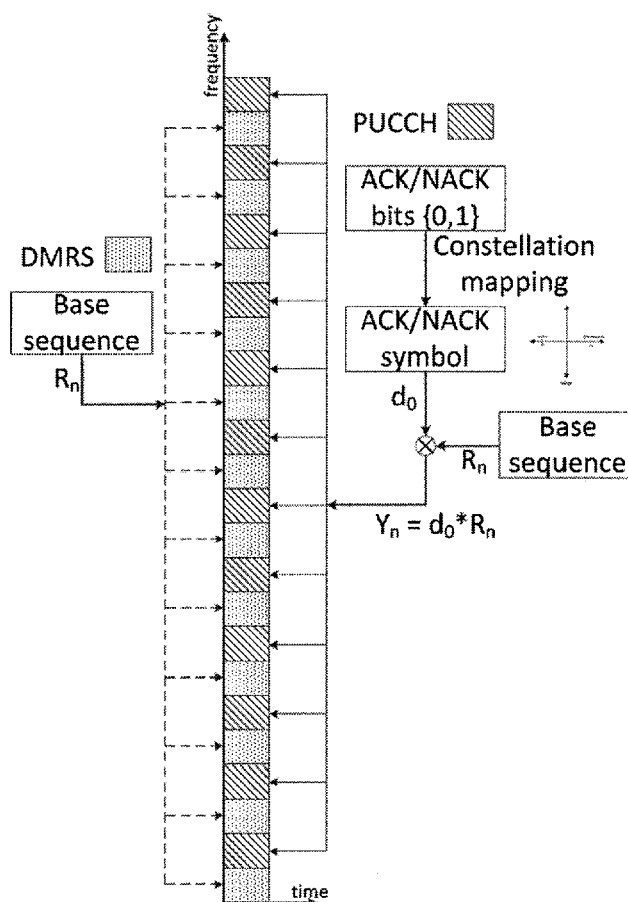


Fig. 10

Sequence index n	Orthogonal sequence $[R_n(0) \ R_n(1) \ \dots \ R_n(5)]$
0	$[1 \ 1 \ 1 \ 1 \ 1 \ 1]$
1	$[1 \ e^{j2\pi/6} \ e^{j4\pi/6} \ e^{j6\pi/6} \ e^{j8\pi/6} \ e^{j10\pi/6}]$
2	$[1 \ e^{j4\pi/6} \ e^{j8\pi/6} \ 1 \ e^{j4\pi/6} \ e^{j8\pi/6}]$
3	$[1 \ -1 \ 1 \ -1 \ 1 \ -1]$
4	$[1 \ e^{j8\pi/6} \ e^{j4\pi/6} \ 1 \ e^{j8\pi/6} \ e^{j4\pi/6}]$
5	$[1 \ e^{j10\pi/6} \ e^{j8\pi/6} \ e^{j6\pi/6} \ e^{j4\pi/6} \ e^{j2\pi/6}]$

Fig. 11

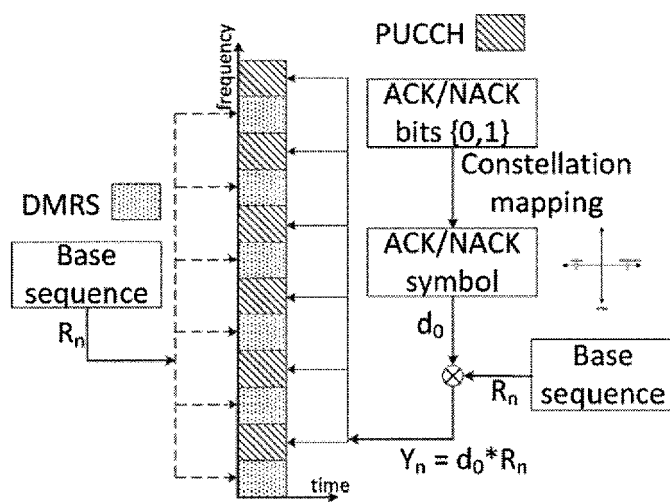


Fig. 12

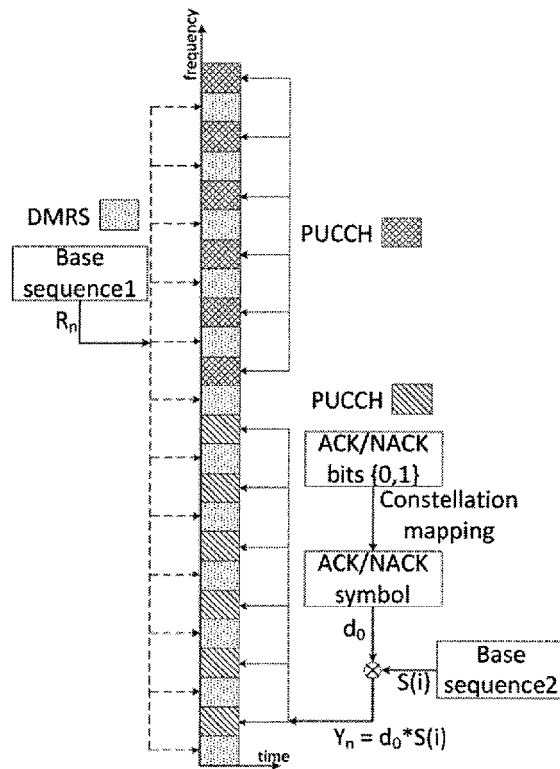


Fig. 13

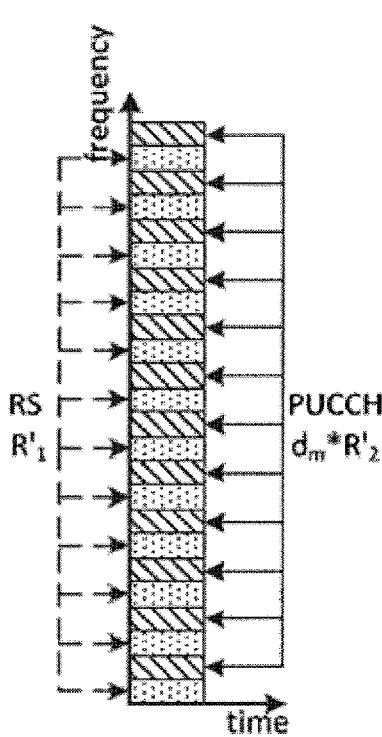


Fig. 14A

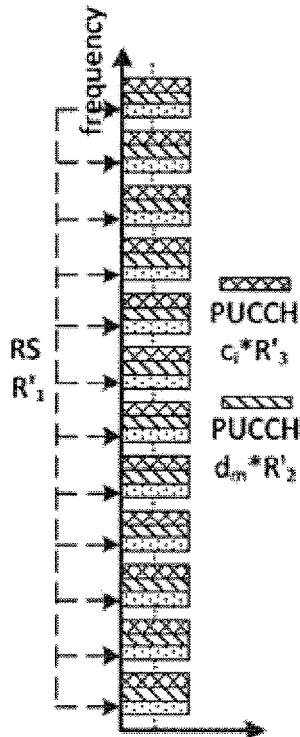


Fig. 14B

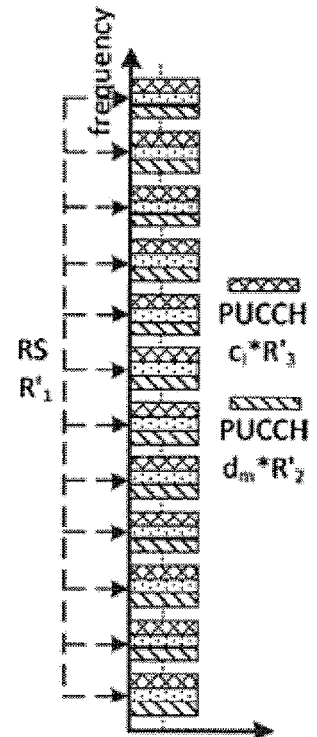


Fig. 14C

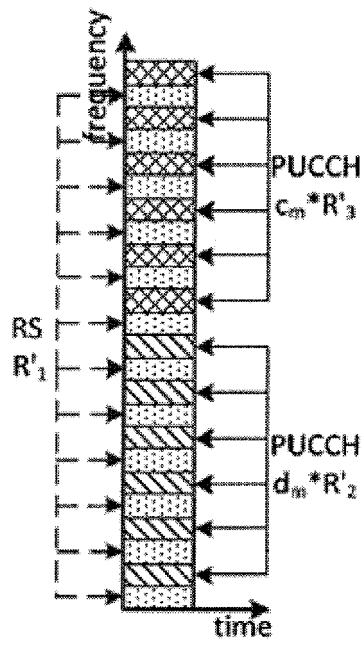


Fig. 14D

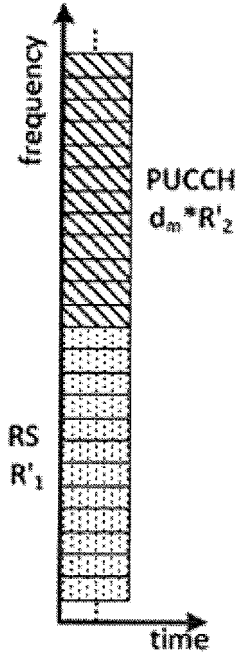


Fig. 14E

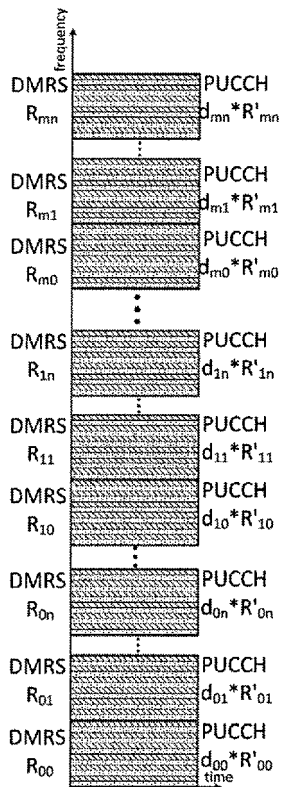


Fig. 15A

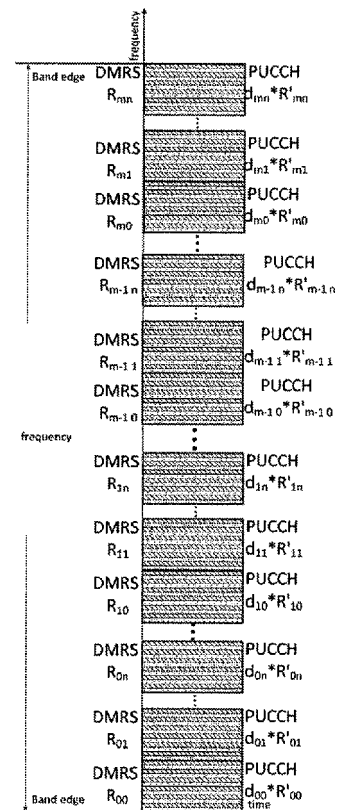


Fig. 15B




Fig. 15C

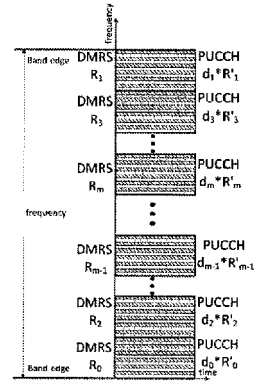


Fig. 15D

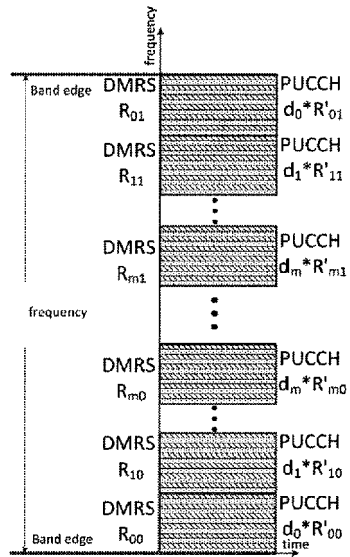


Fig. 15E

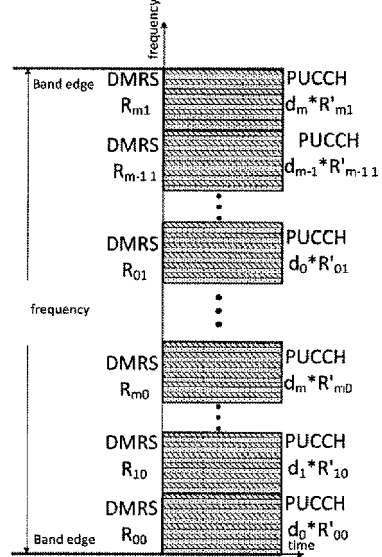


Fig. 15F

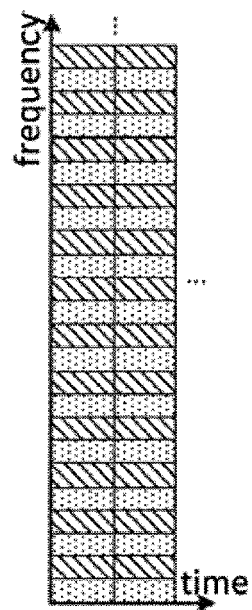


Fig. 16A

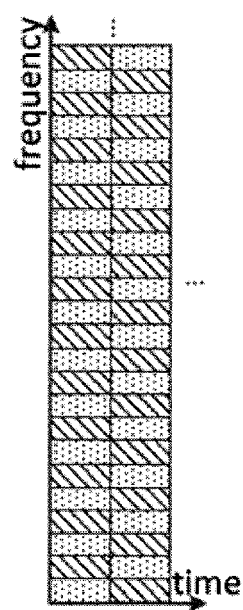


Fig. 16B

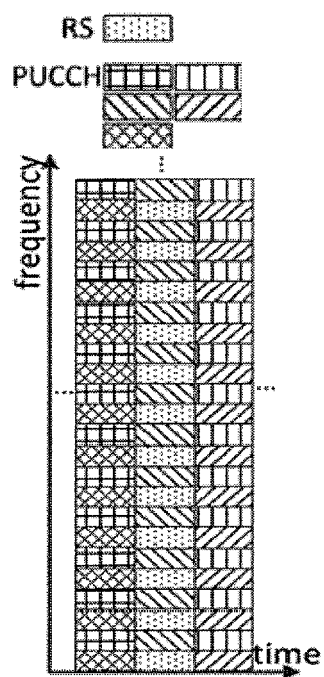


Fig. 16C

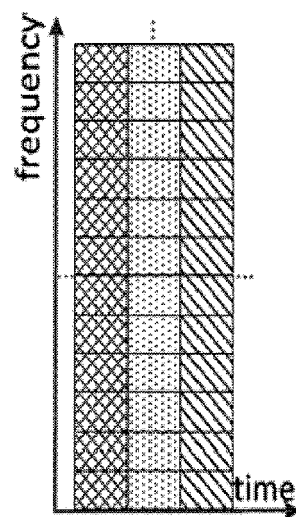


Fig. 16D

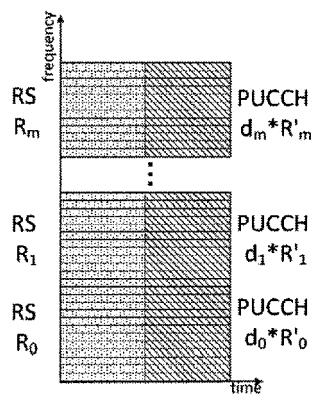


Fig. 17A

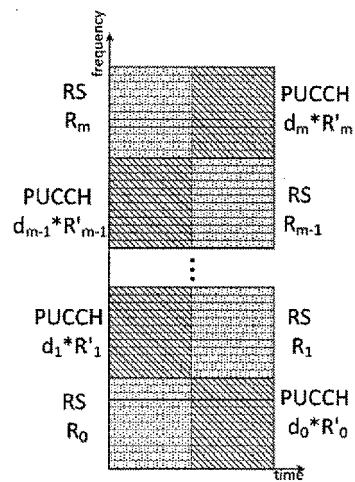


Fig. 17B

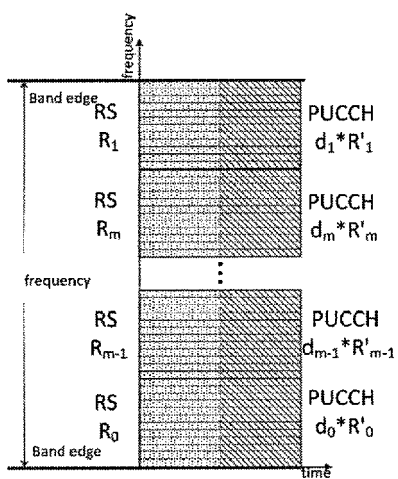


Fig. 17C

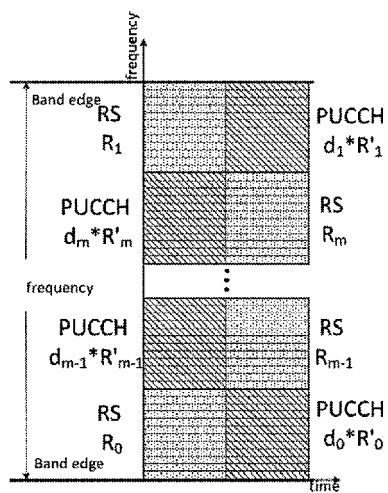


Fig. 17D

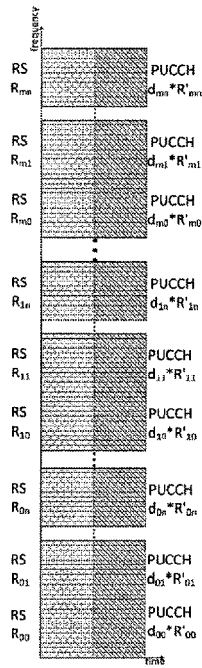


Fig. 18A

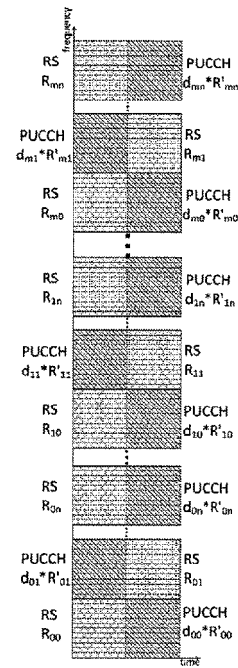


Fig. 18B

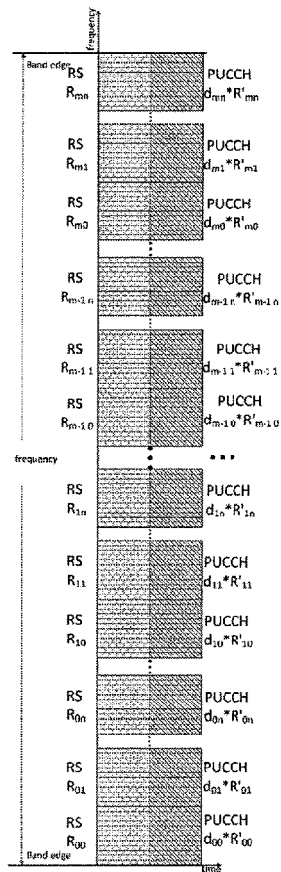


Fig. 18C

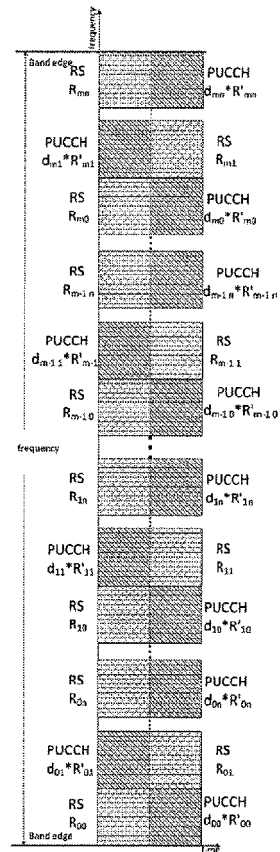


Fig. 18D

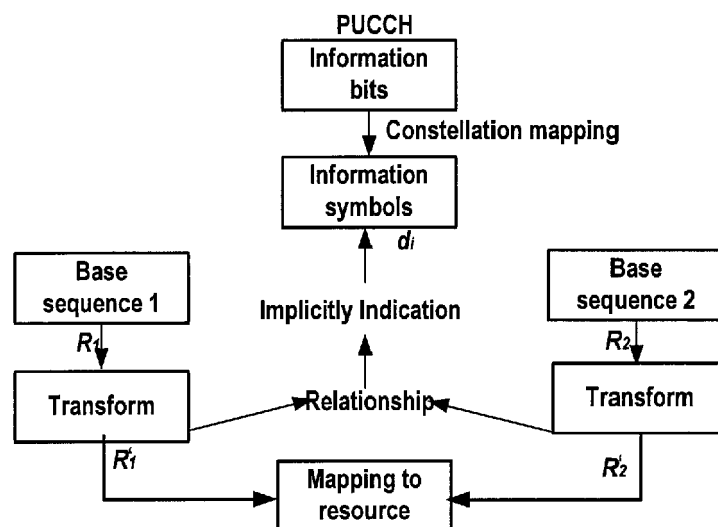


Fig. 19

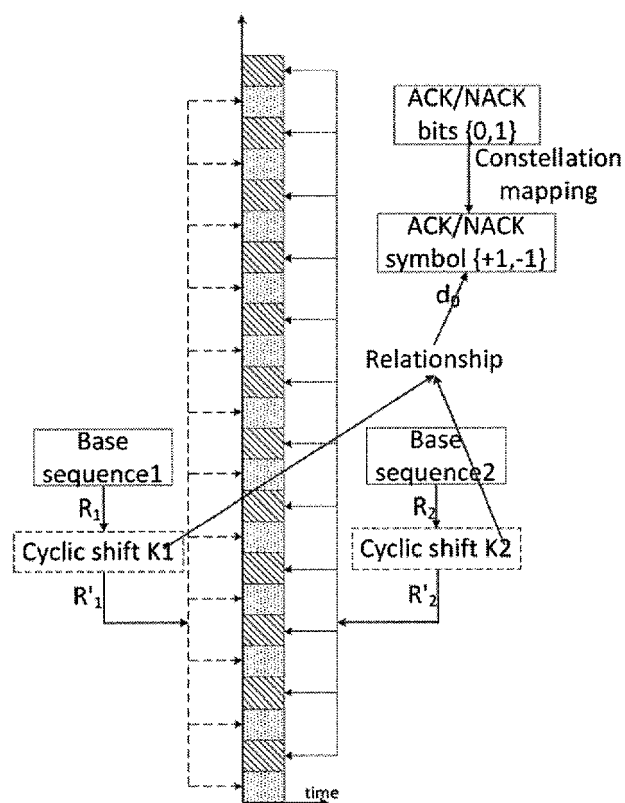


Fig. 20

Modulation symbol	d_1	d_2	...	d_i
Sequence group	k_1	k_2	...	k_i

Fig. 21

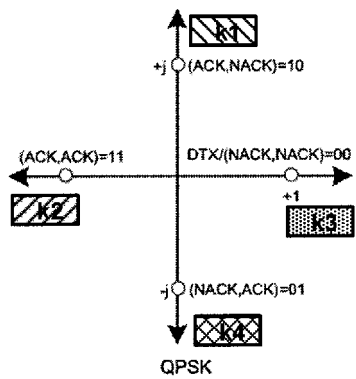


Fig. 22

cyclicShift	modulation	Or modulation
0	$+1$	$+1$
1	$+1$	-1
2	$+1$	$+j$
3	-1	$-j$
4	-1	$+1$
5	-1	-1
6	$+j$	$+j$
7	$+j$	$-j$
8	$+j$	$+1$
9	$-j$	-1
10	$-j$	$+j$
11	$-j$	$-j$

Fig. 23

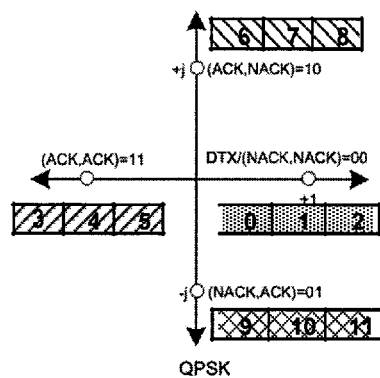


Fig. 24

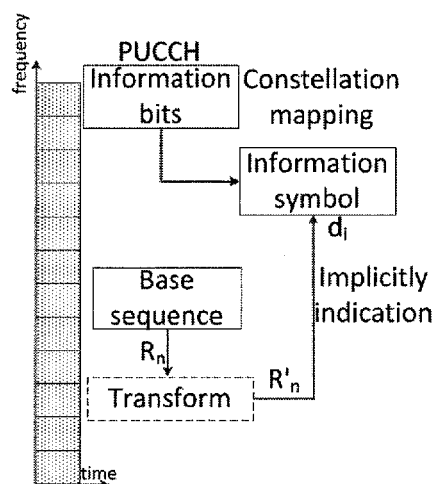


Fig. 25

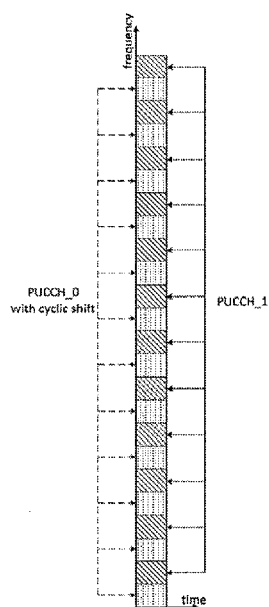


Fig. 26A

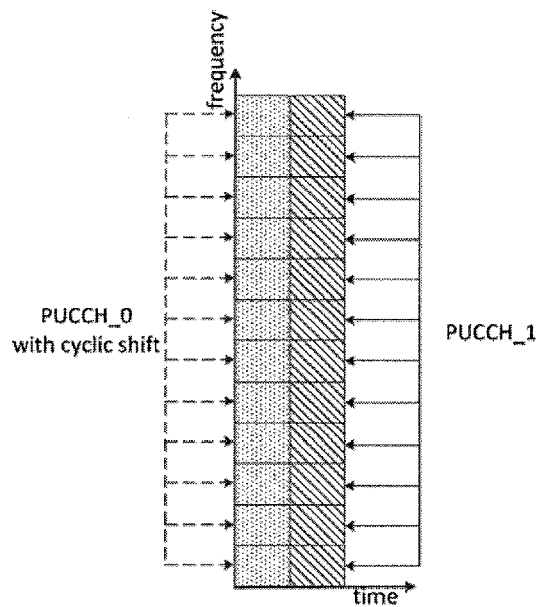


Fig. 26B

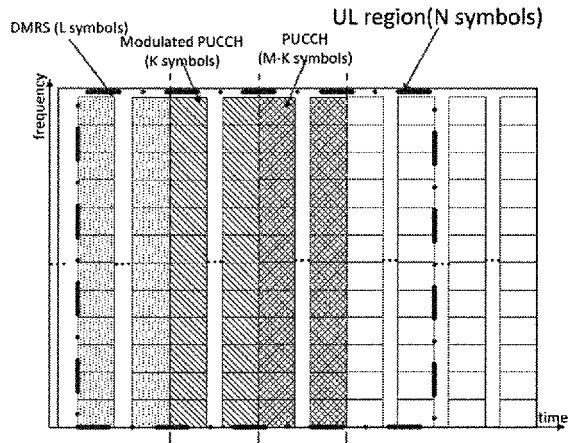


Fig. 27A

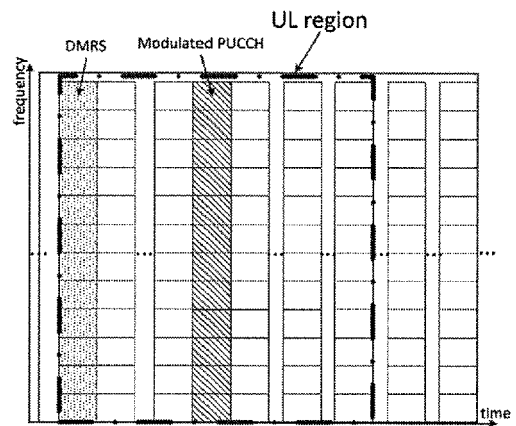


Fig. 27B

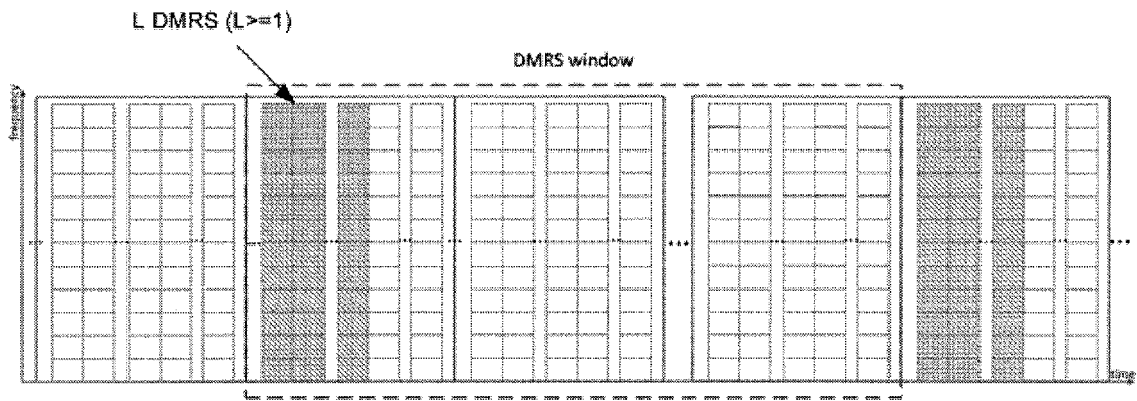


Fig. 28A

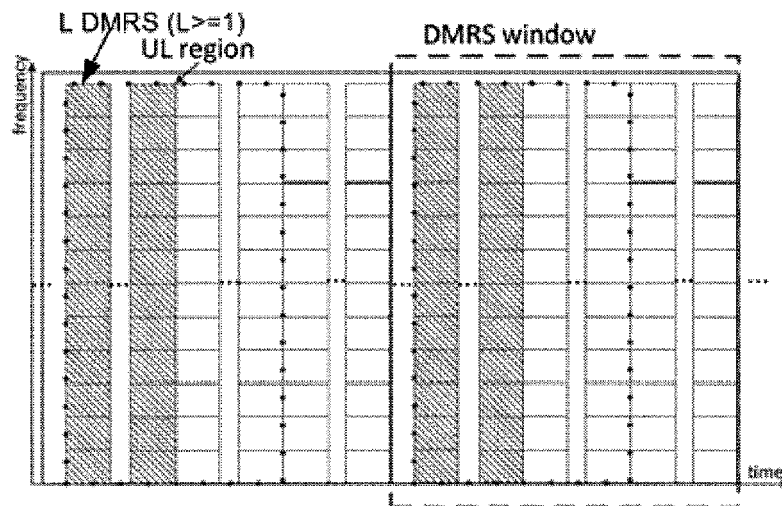


Fig. 28B

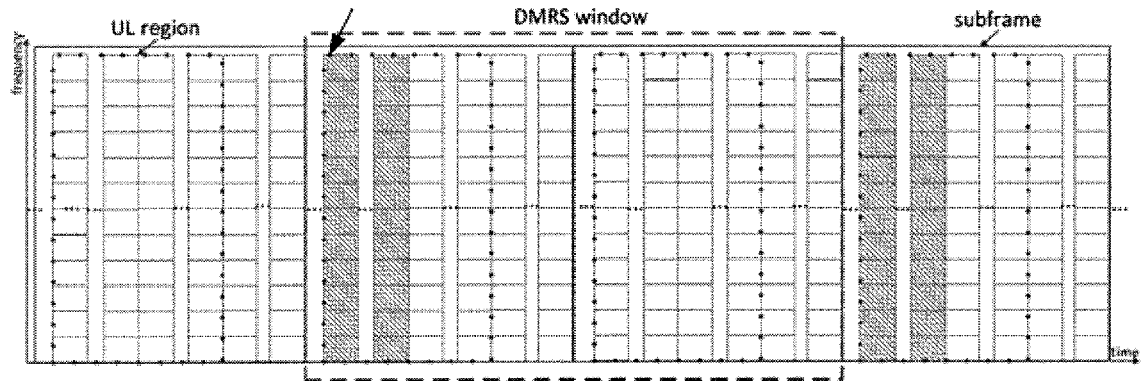


Fig. 28C

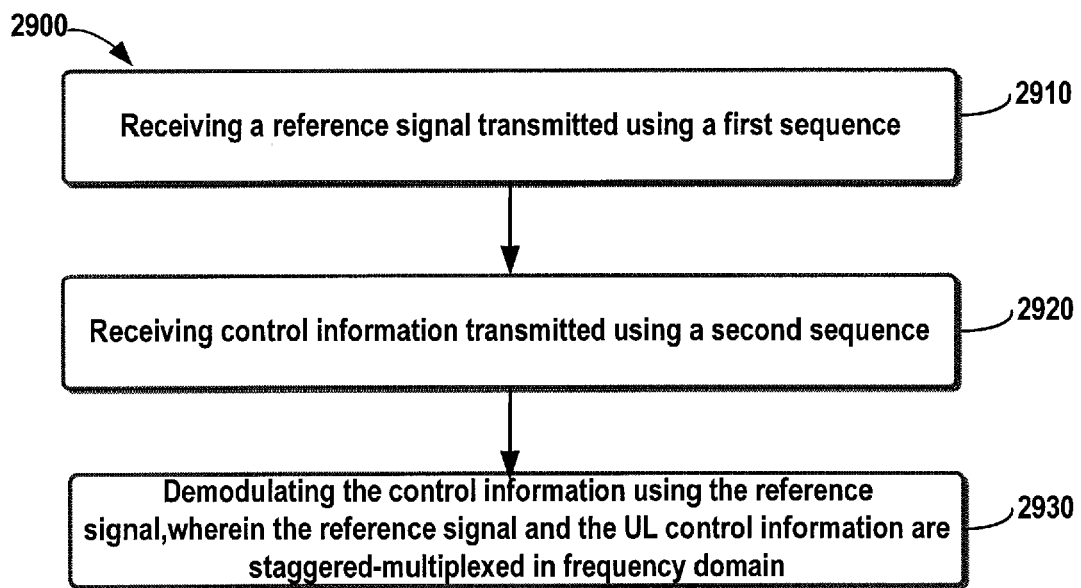


Fig. 29

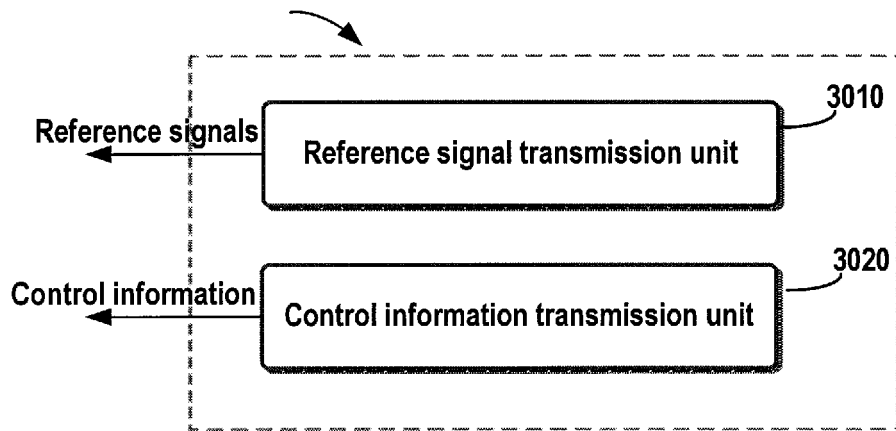


Fig. 30

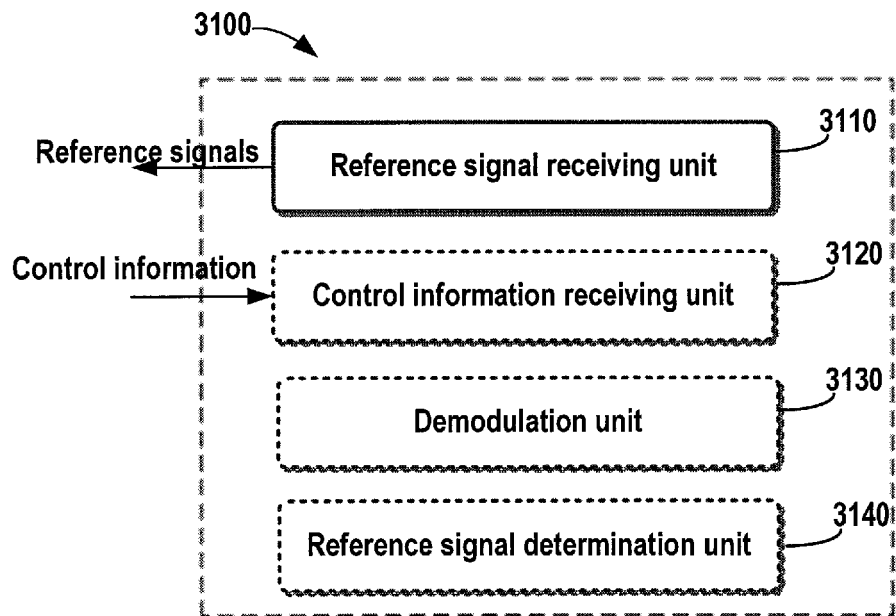


Fig. 31

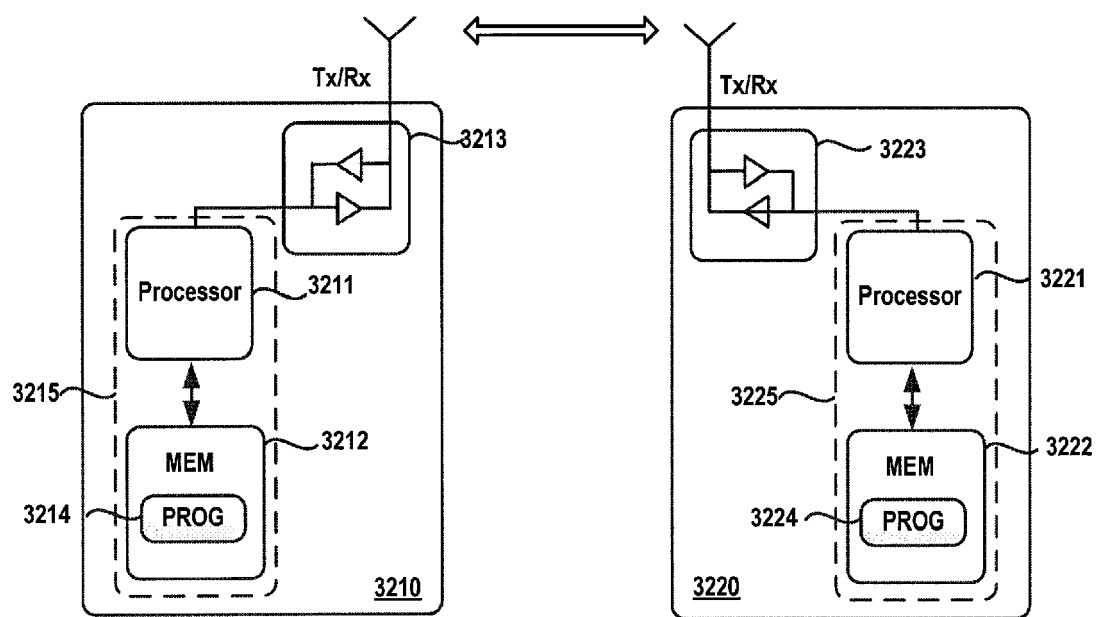


Fig. 32

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- EP 2357735 A2 [0004]
- EP 2562981 A2 [0004]
- EP 2533451 A2 [0004]
- WO 2010018977 A2 [0004]
- US 2011228877 A1 [0004]