


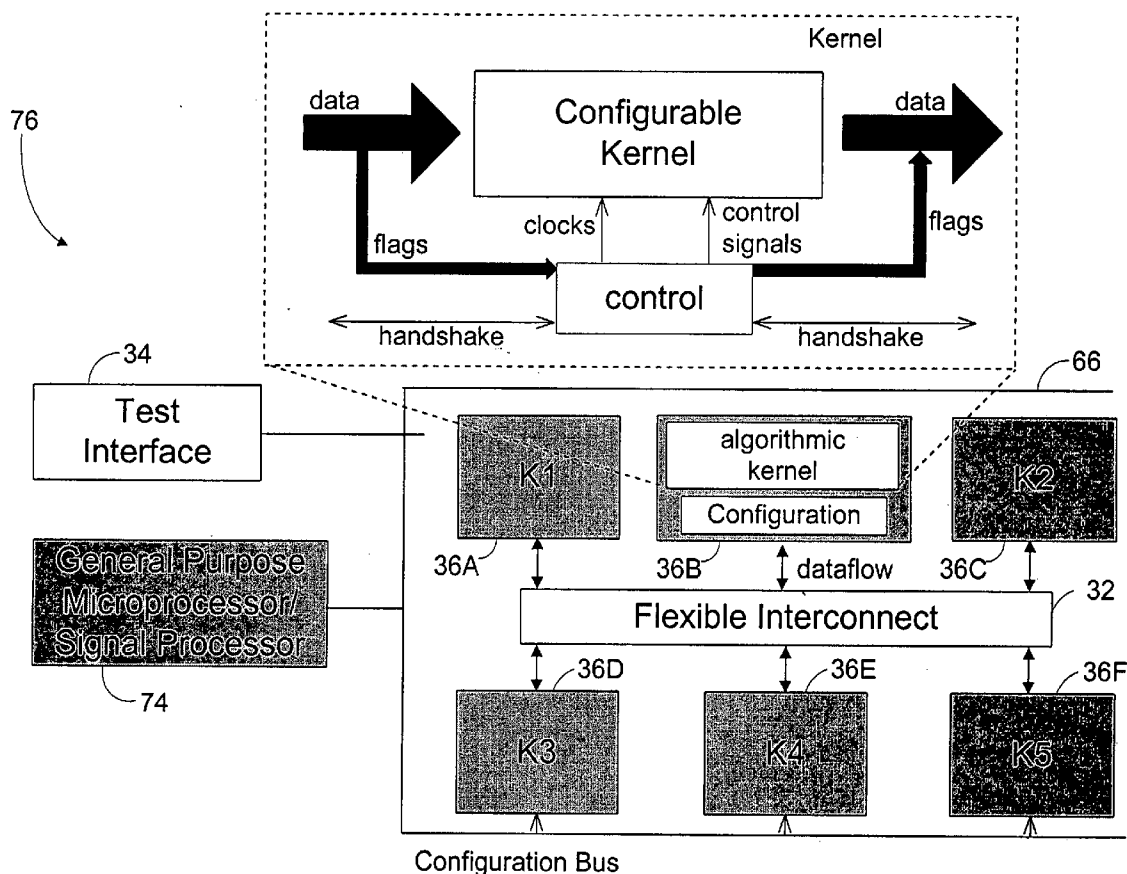

US 20060039317A1

(19) **United States**(12) **Patent Application Publication**  
Subramanian et al.(10) **Pub. No.: US 2006/0039317 A1**(43) **Pub. Date: Feb. 23, 2006**(54) **METHOD AND APPARATUS TO SUPPORT  
MULTI STANDARD, MULTI SERVICE  
BASE-STATIONS FOR WIRELESS VOICE  
AND DATA NETWORKS**(60) Provisional application No. 60/173,630, filed on Dec.  
30, 1999. Provisional application No. 60/178,815,  
filed on Jan. 28, 2000.**Publication Classification**(75) Inventors: **Ravi Subramanian**, Mountain View,  
CA (US); **Keith Rieken**, Cupertino, CA  
(US); **Uma Jha**, Placentia, CA (US);  
**Joel D. Medlock**, Campbell, CA (US);  
**Christopher C. Woodthorpe**, Los  
Gatos, CA (US)(51) **Int. Cl.**  
**H04Q 7/00** (2006.01)  
(52) **U.S. Cl.** ..... **370/328; 370/522**Correspondence Address:  
**DARBY & DARBY P.C.**  
**P.O. BOX 5257**  
**NEW YORK, NY 10150-5257 (US)**(73) Assignee: **Infineon Technologies AG**, Munich (DE)(21) Appl. No.: **11/200,854**(22) Filed: **Aug. 9, 2005****Related U.S. Application Data**(63) Continuation of application No. 09/752,050, filed on  
Dec. 29, 2000, now Pat. No. 6,967,999.(57) **ABSTRACT**

An apparatus for digitally processing signals within wireless communications base-stations which includes a channel pooling signal processor and a digital signal processor. The channel pooling signal processor includes a plurality of computation units typically realized in a heterogeneous multiprocessing architecture, a test interface for testing the function of the plurality of the computation units, a general-purpose microprocessor for managing the dataflow into and out of the channel pooling signal processor as well as effecting the control and configuration of the computation units, and an interconnect mechanism for connecting the plurality of computation units to the input, output, test interface, and the general-purpose microprocessor.



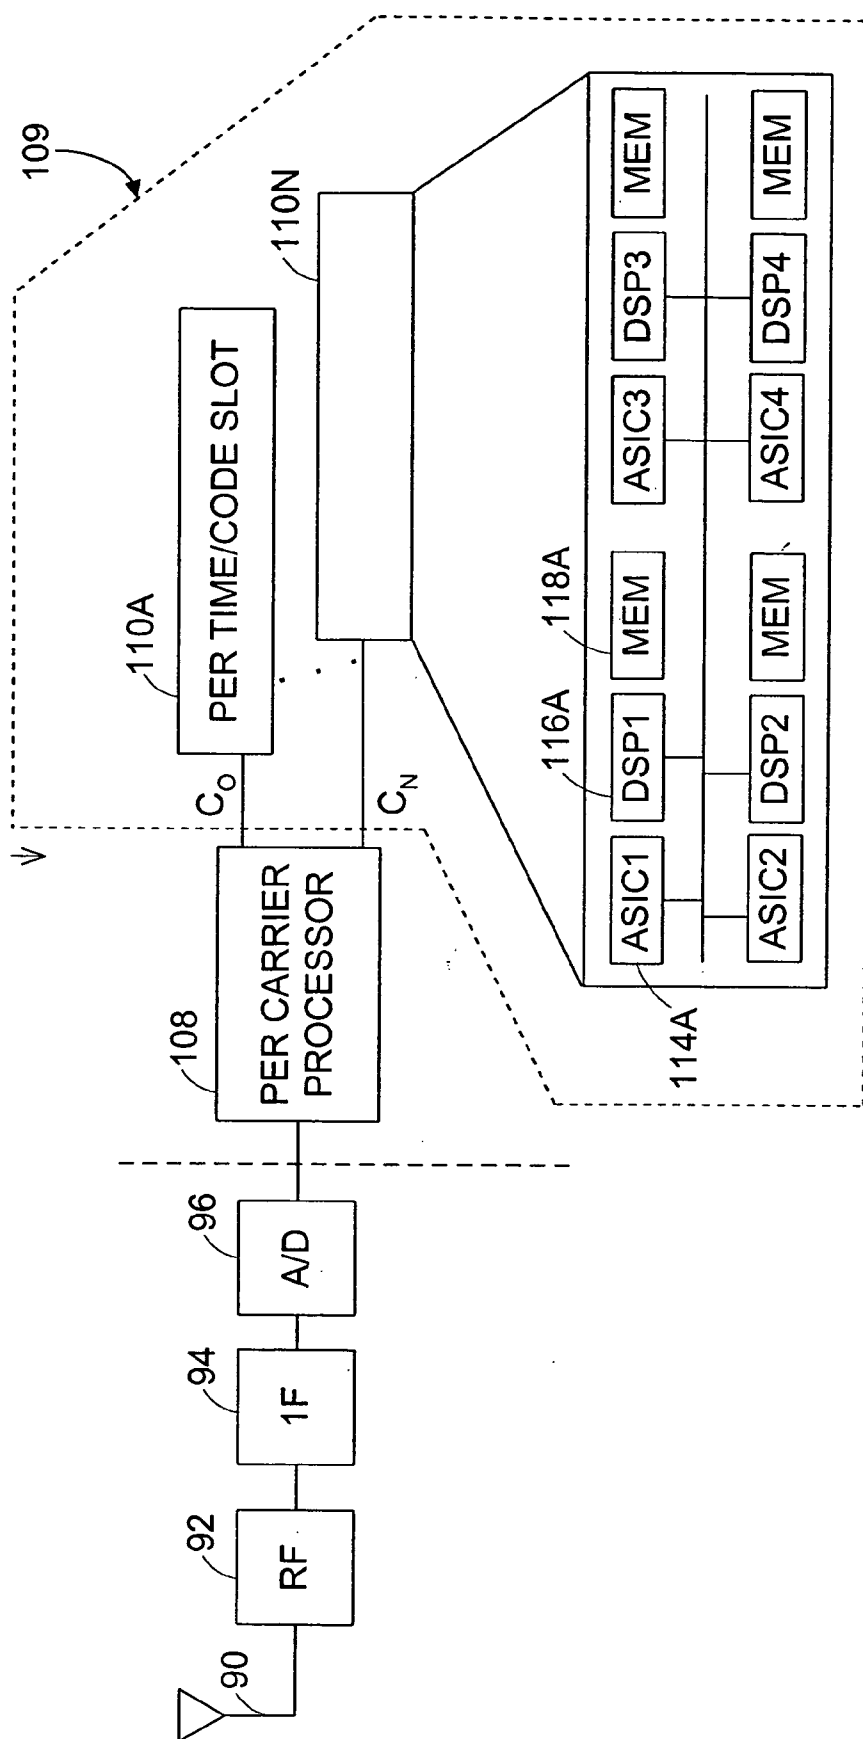


FIG. 1

(PRIOR ART)

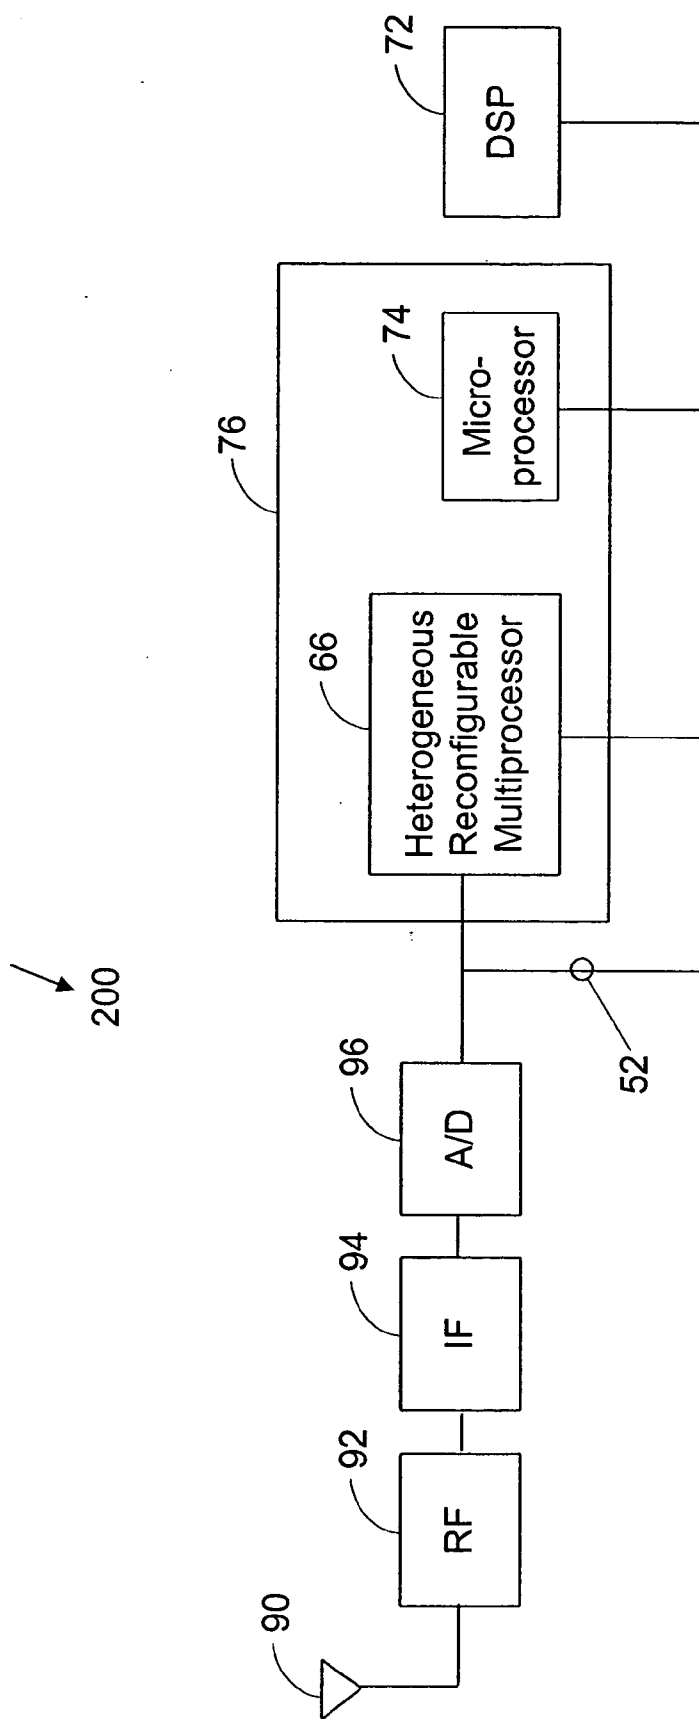


FIG. 2

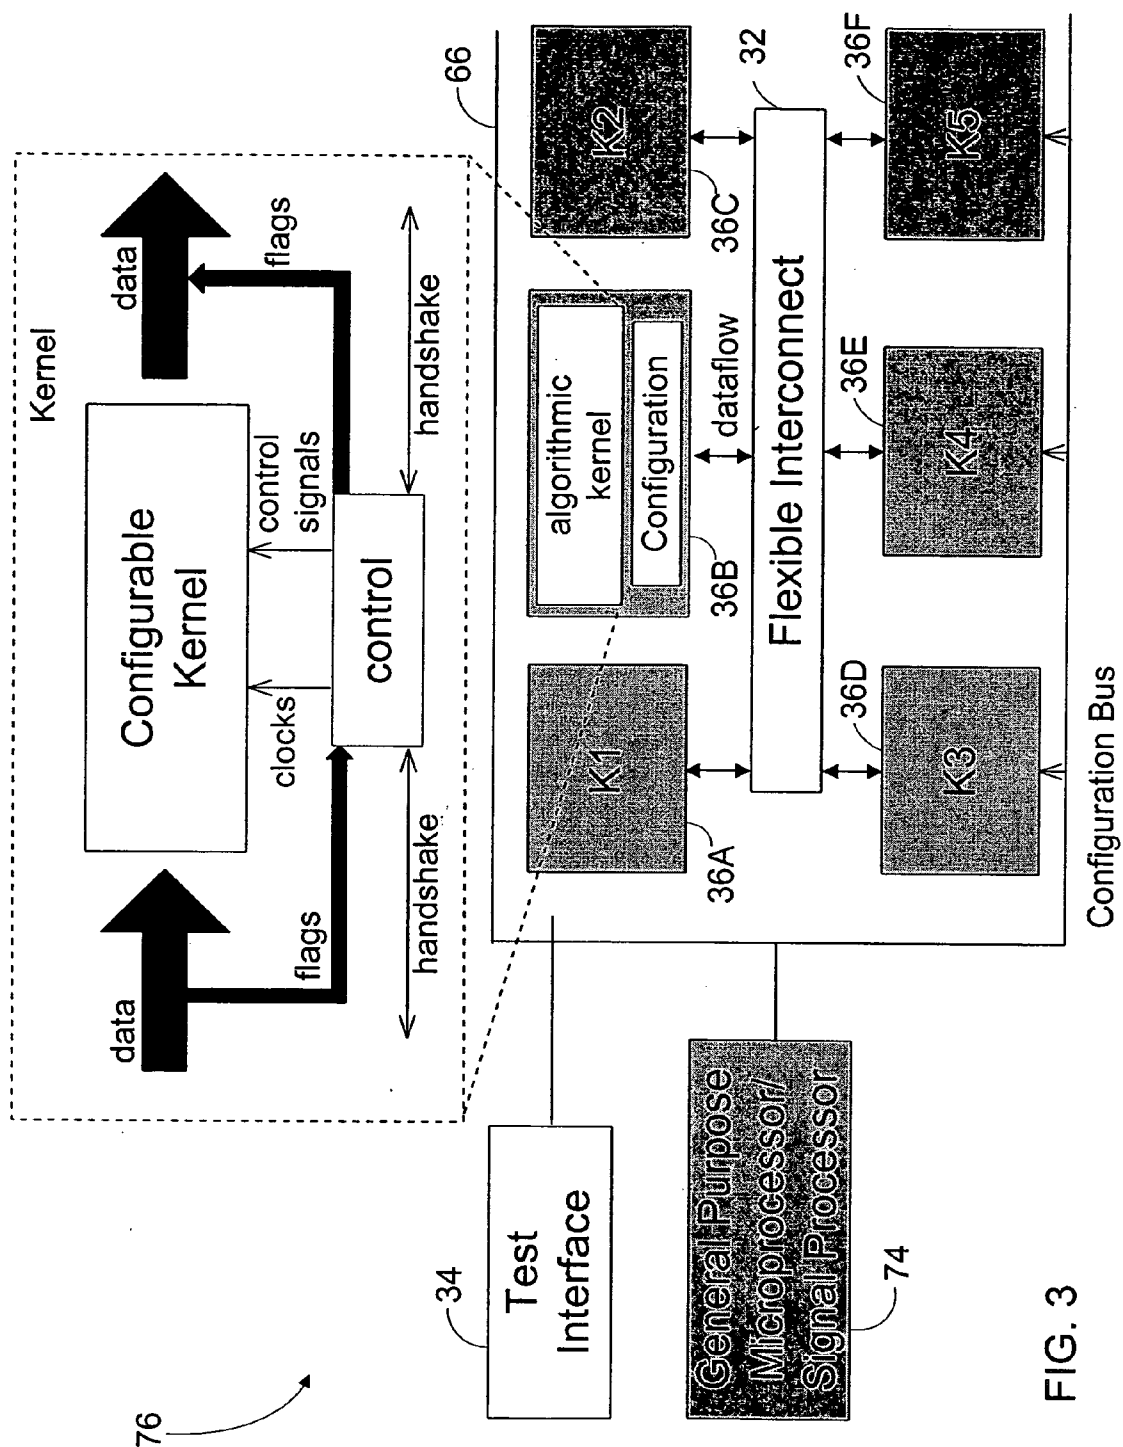


FIG. 3

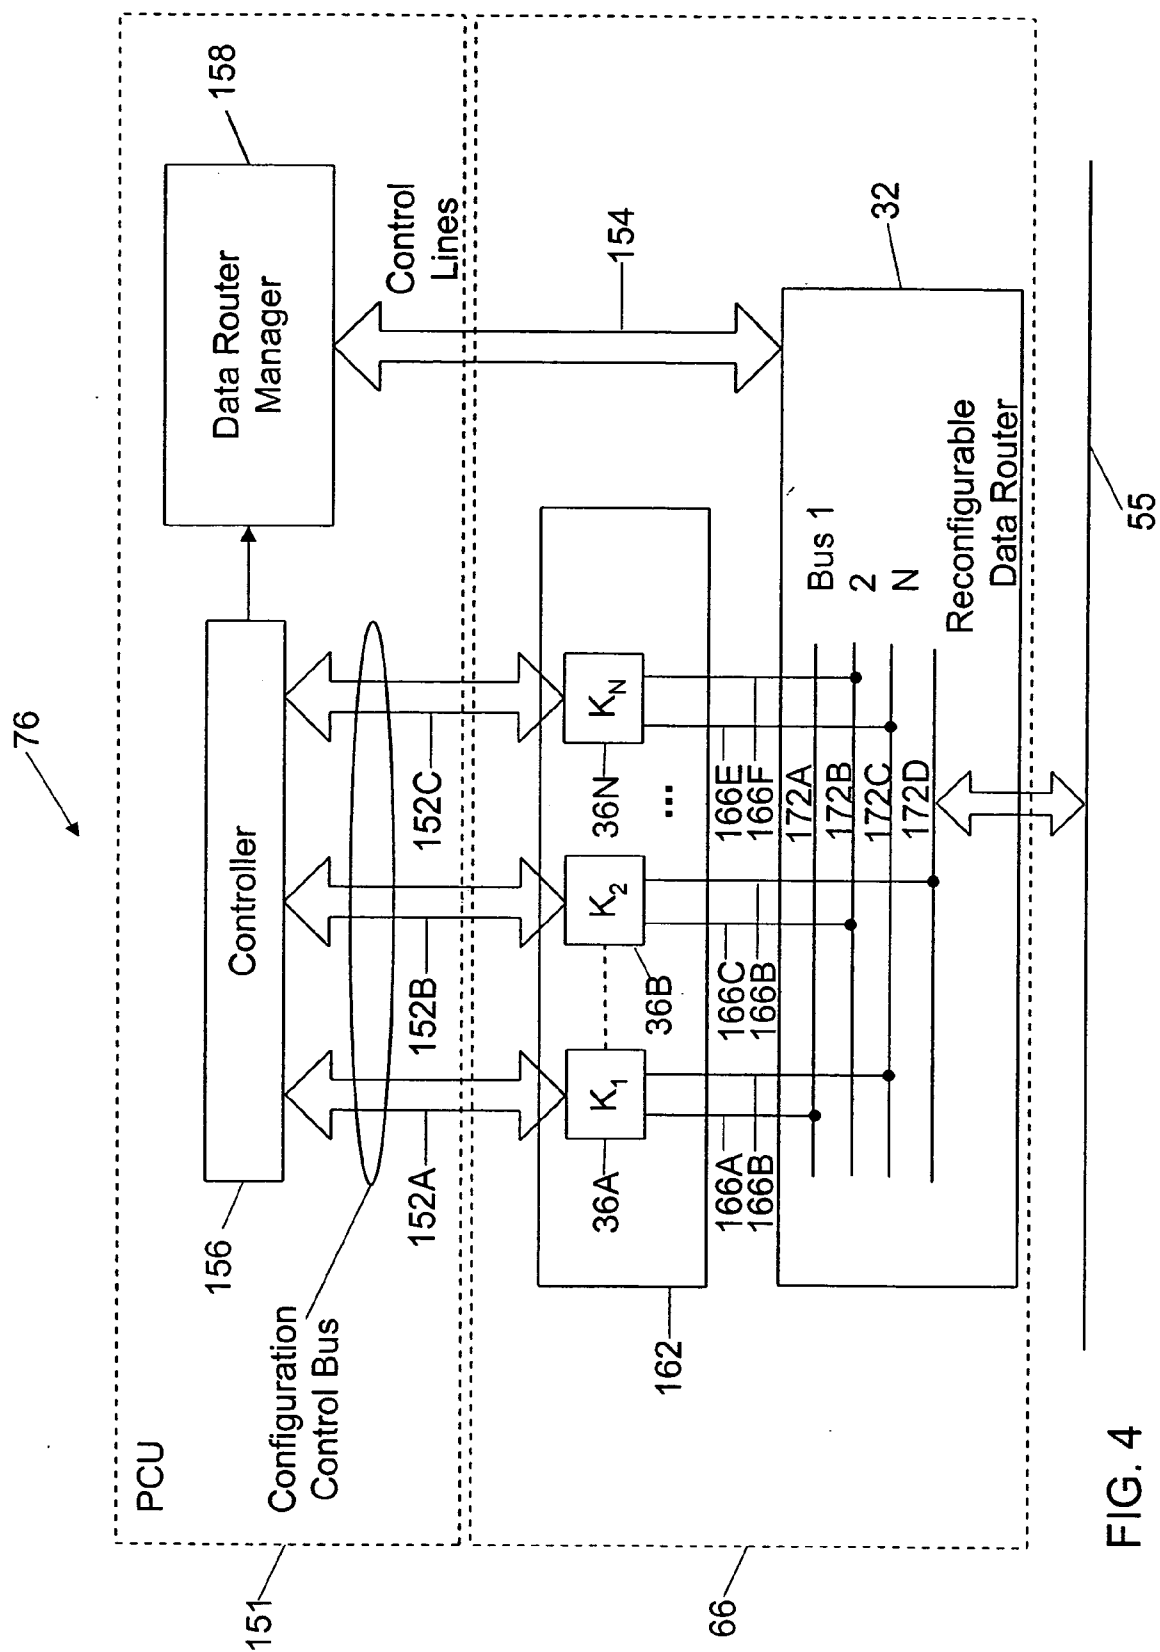


FIG. 4

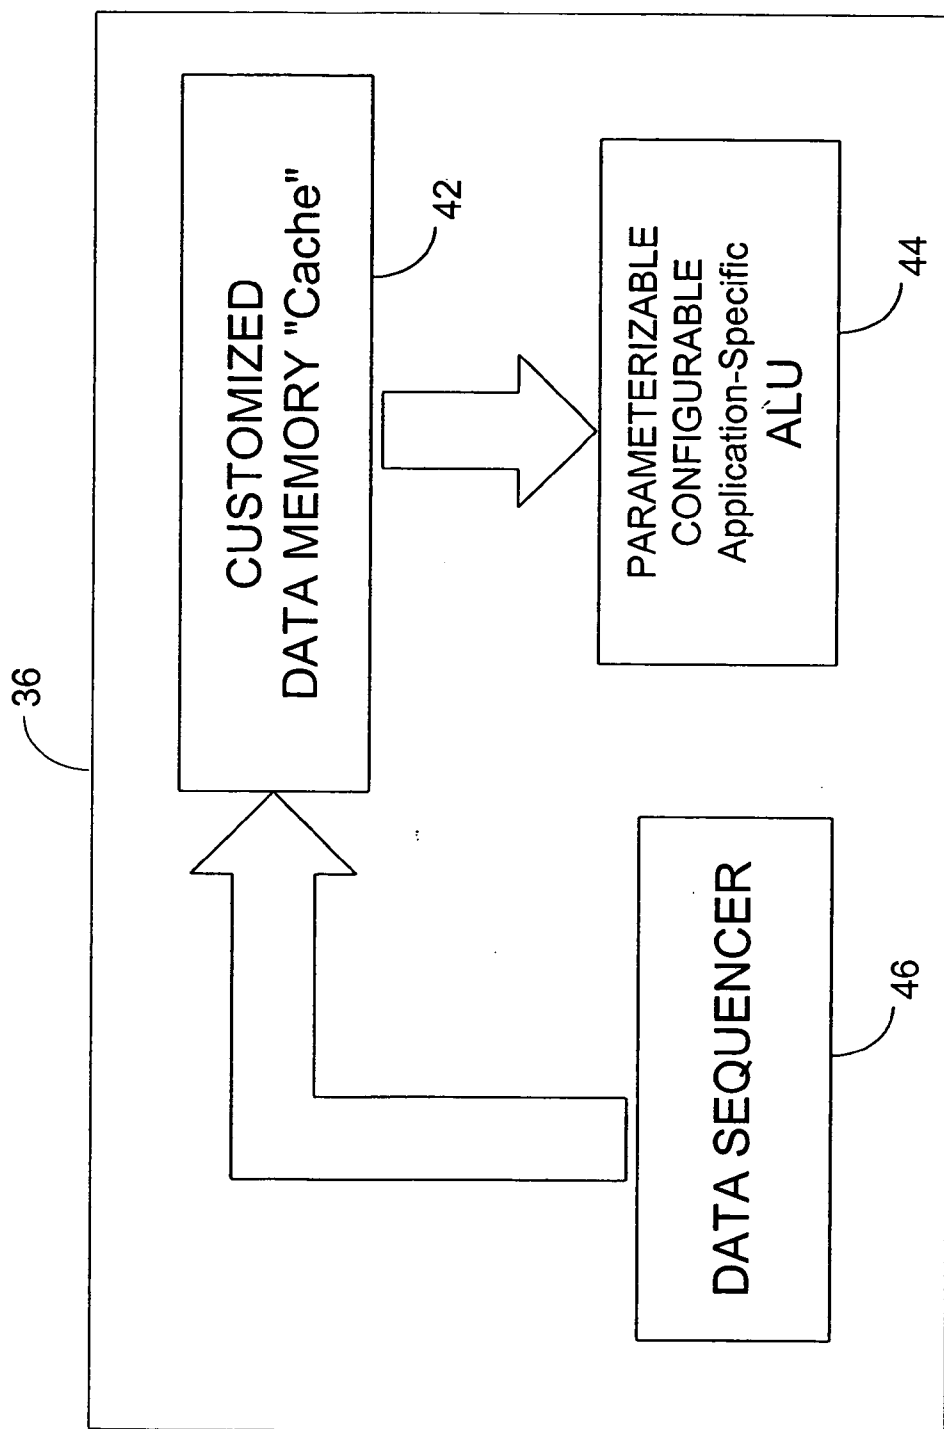


FIG. 5

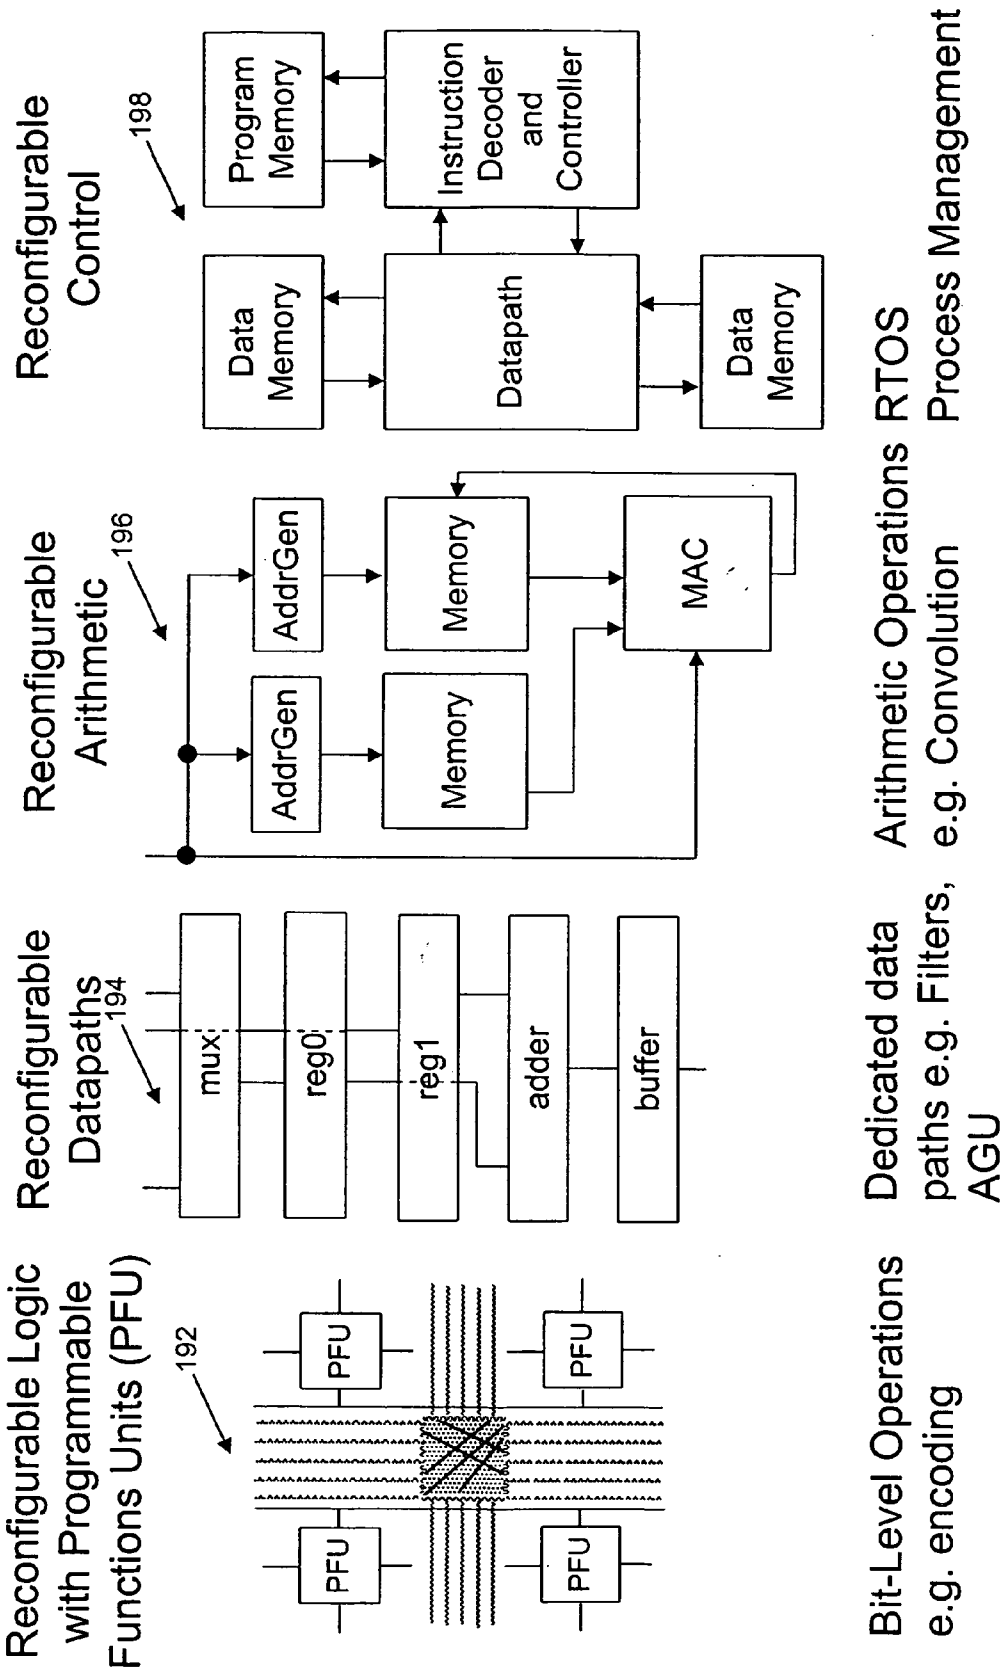


FIG. 6

Bit-Level Operations  
e.g. encoding

Dedicated data paths e.g. Filters, e.g. Convolution AGU

Arithmetic Operations  
RTOS  
Process Management

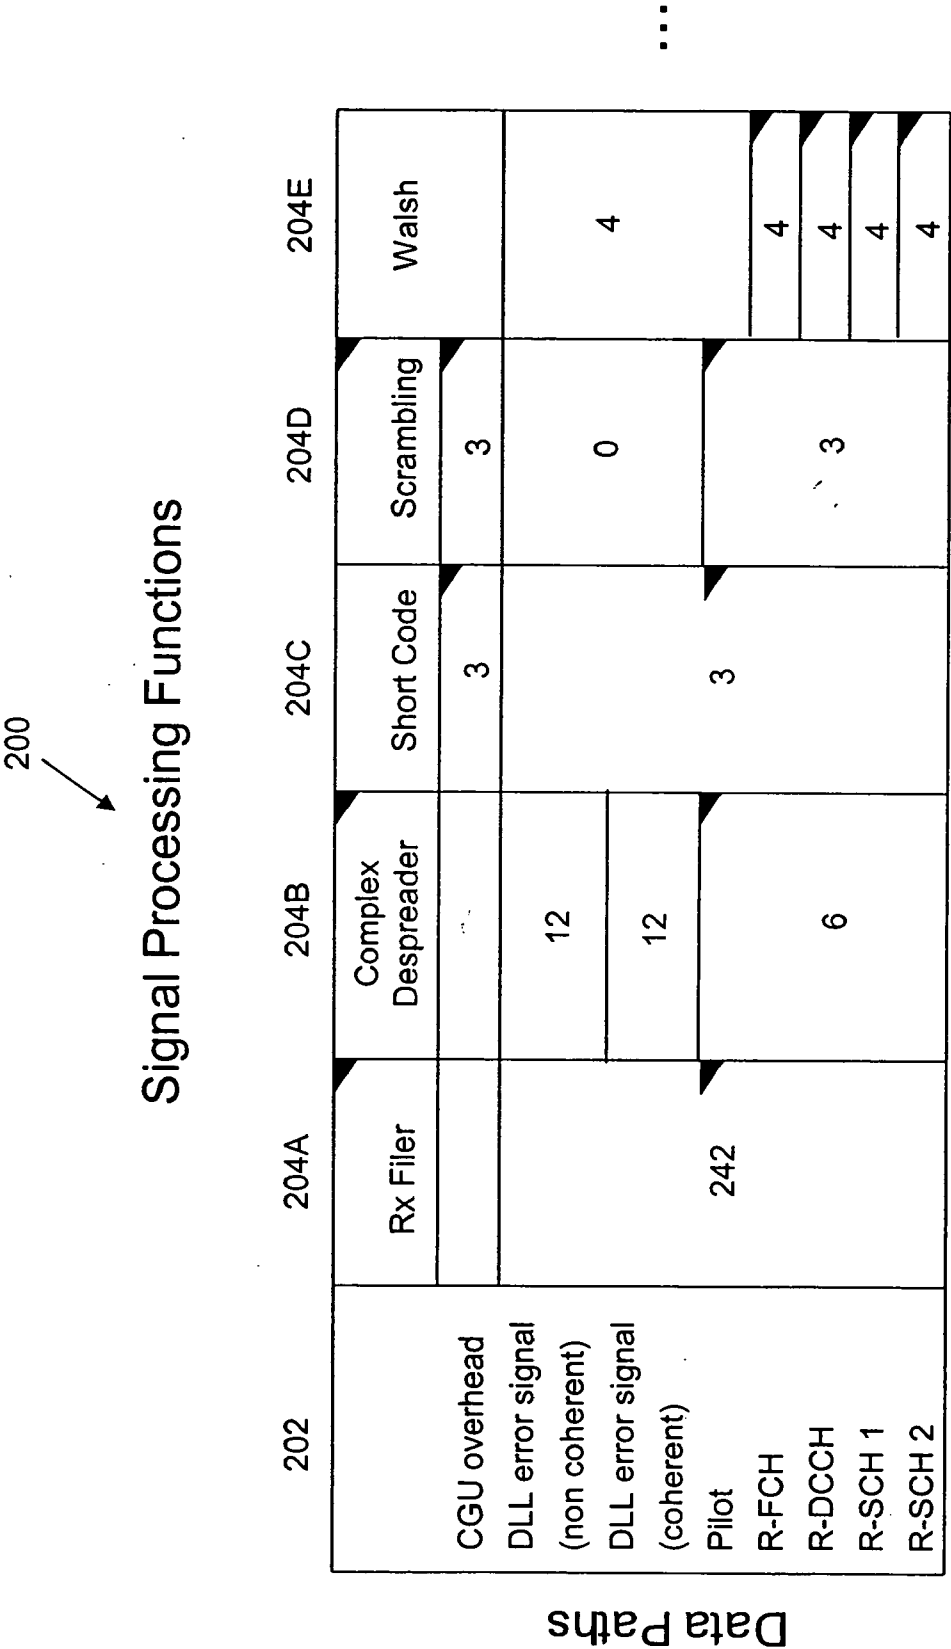


FIG. 7



220



	TDMA				CDMA				
	IS136	GSM	GPRS	EDGE	IS-95B	IS-2000	WCDMA-FDD	GPS	GLOBALSTAR
Parameter Estimation Functions									
IMS Channel Estimator		X	X	X					
Windowed Average Energy Estimator	X	X	X	X	X	X	X		
ML Symbol Timing Estimator	X	X	X	X	X	X	X	X	X
ML Carrier Phase Estimator	X	X	X	X	X	X	X	X	X
PN Correlator						X	X		X
Matched Filter							X	X	
Interference Energy Estimator						X	X		

FIG. 8

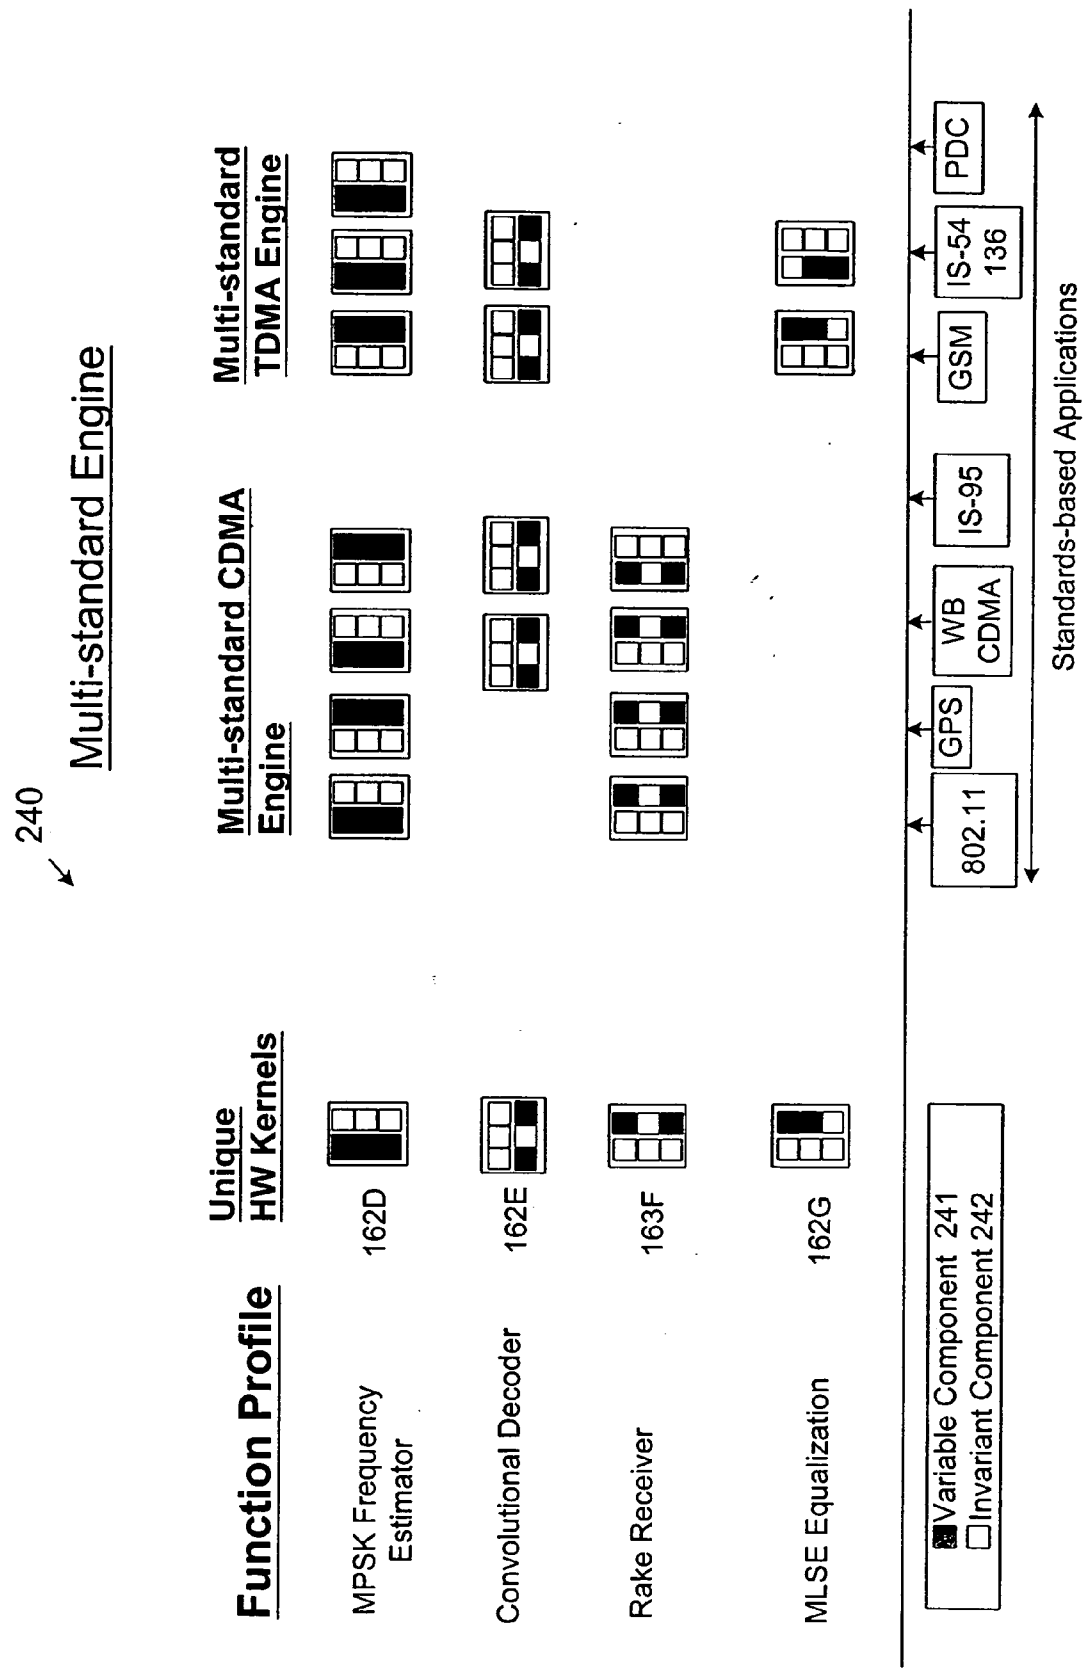
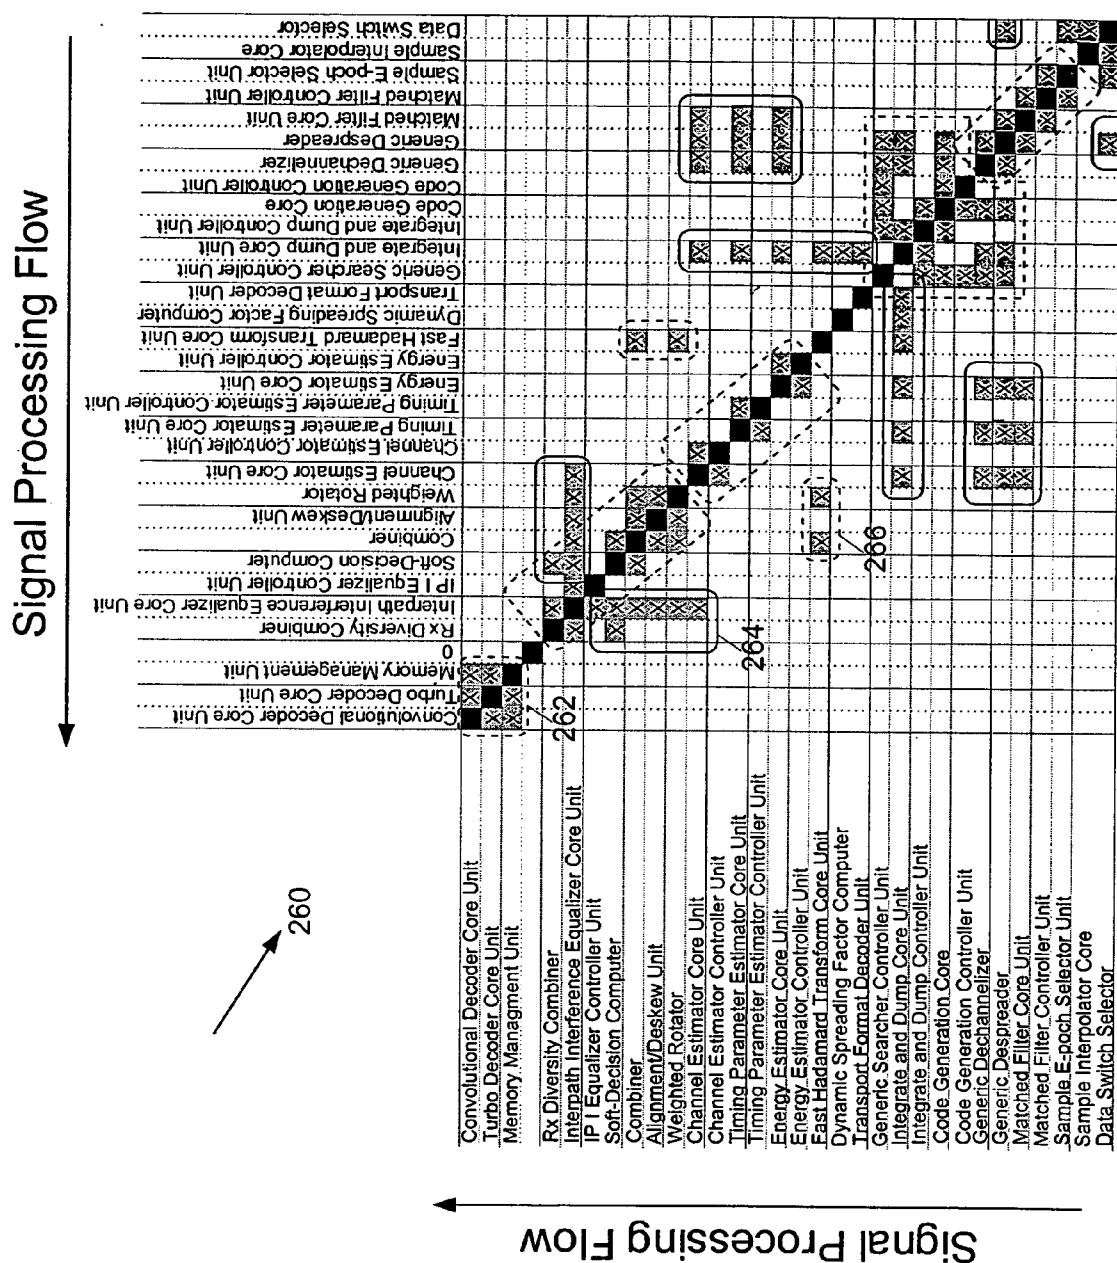


FIG. 9

FIG. 10



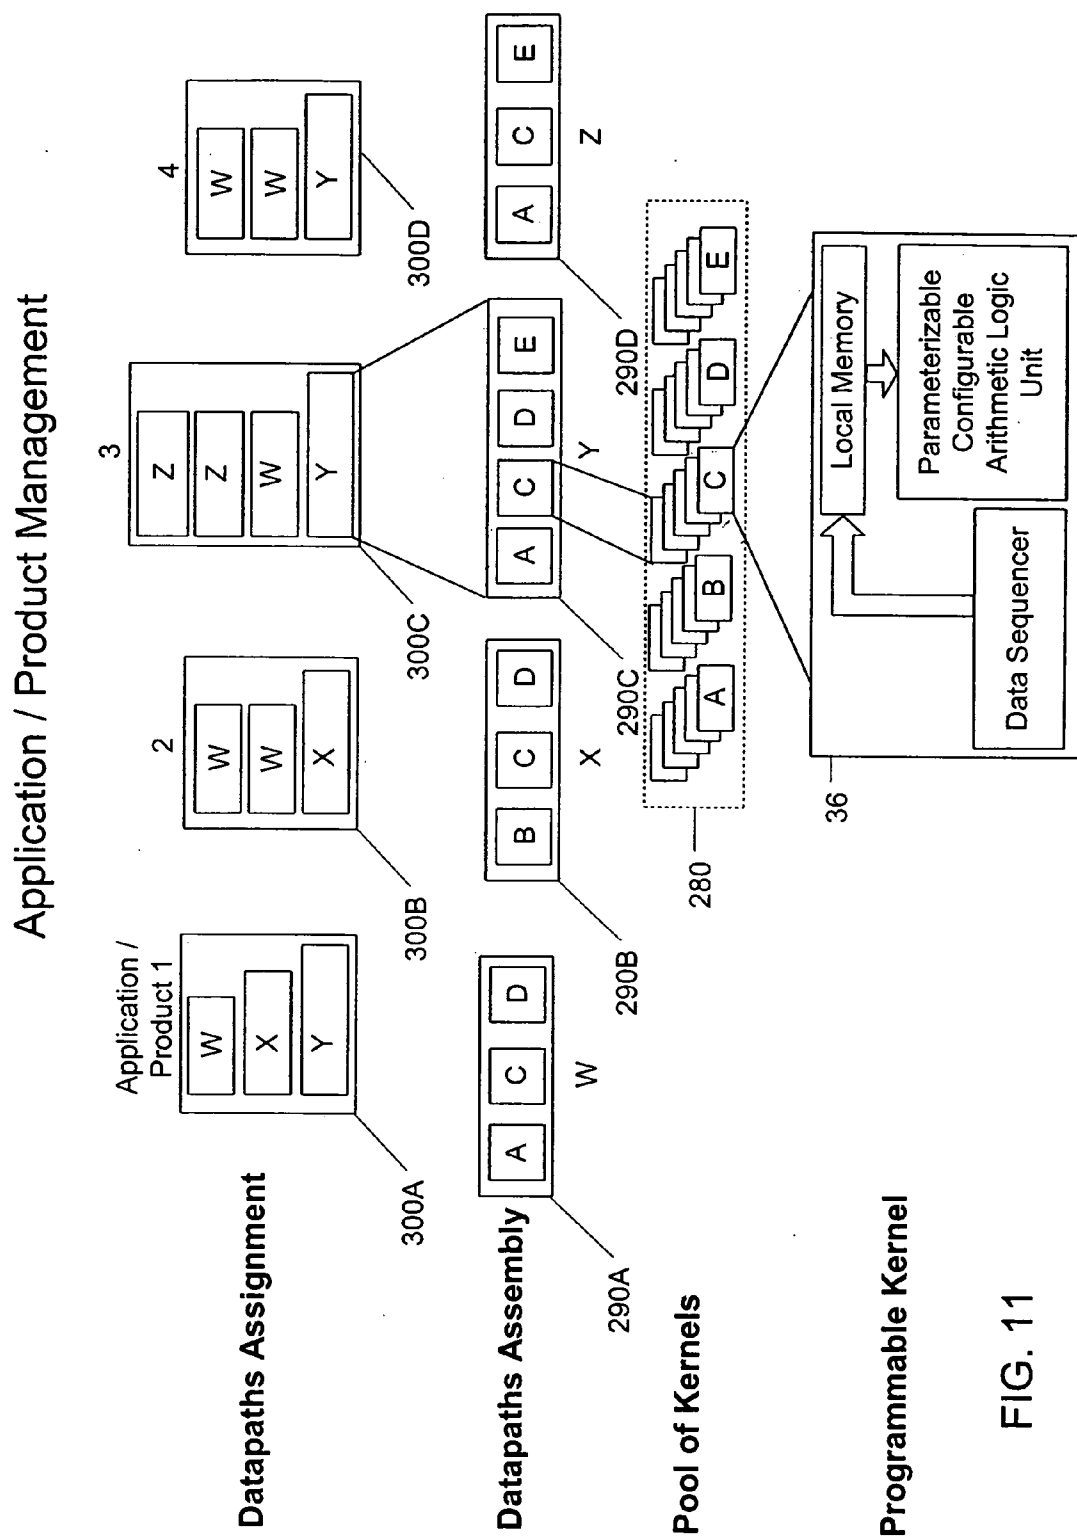
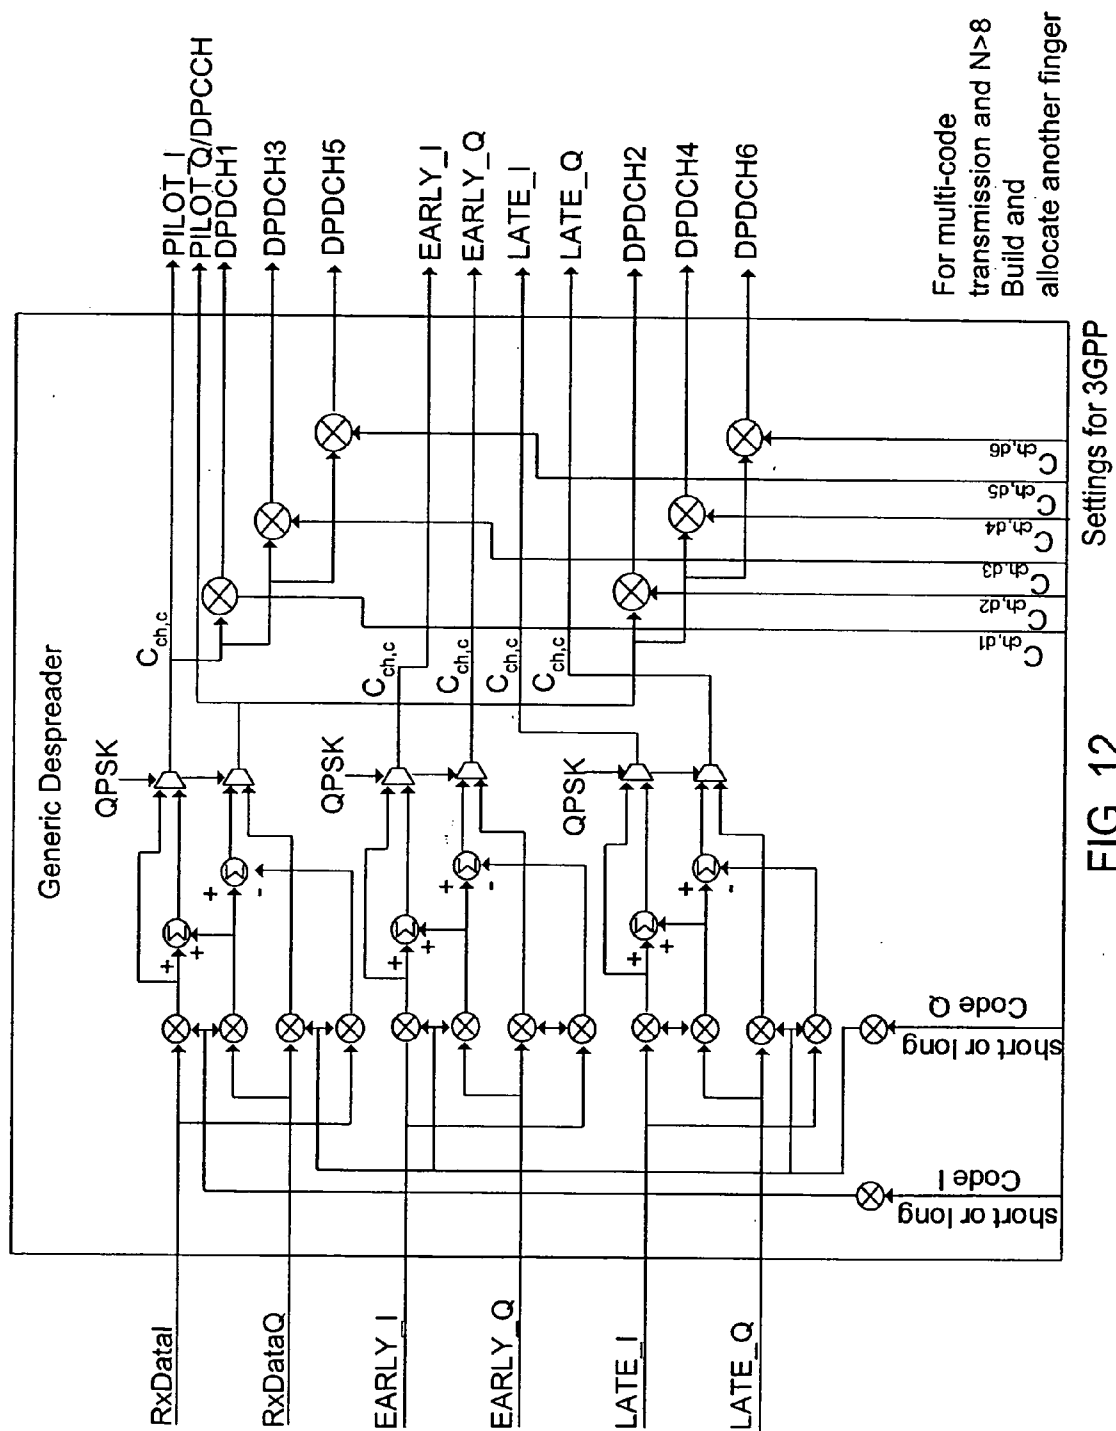


FIG. 11




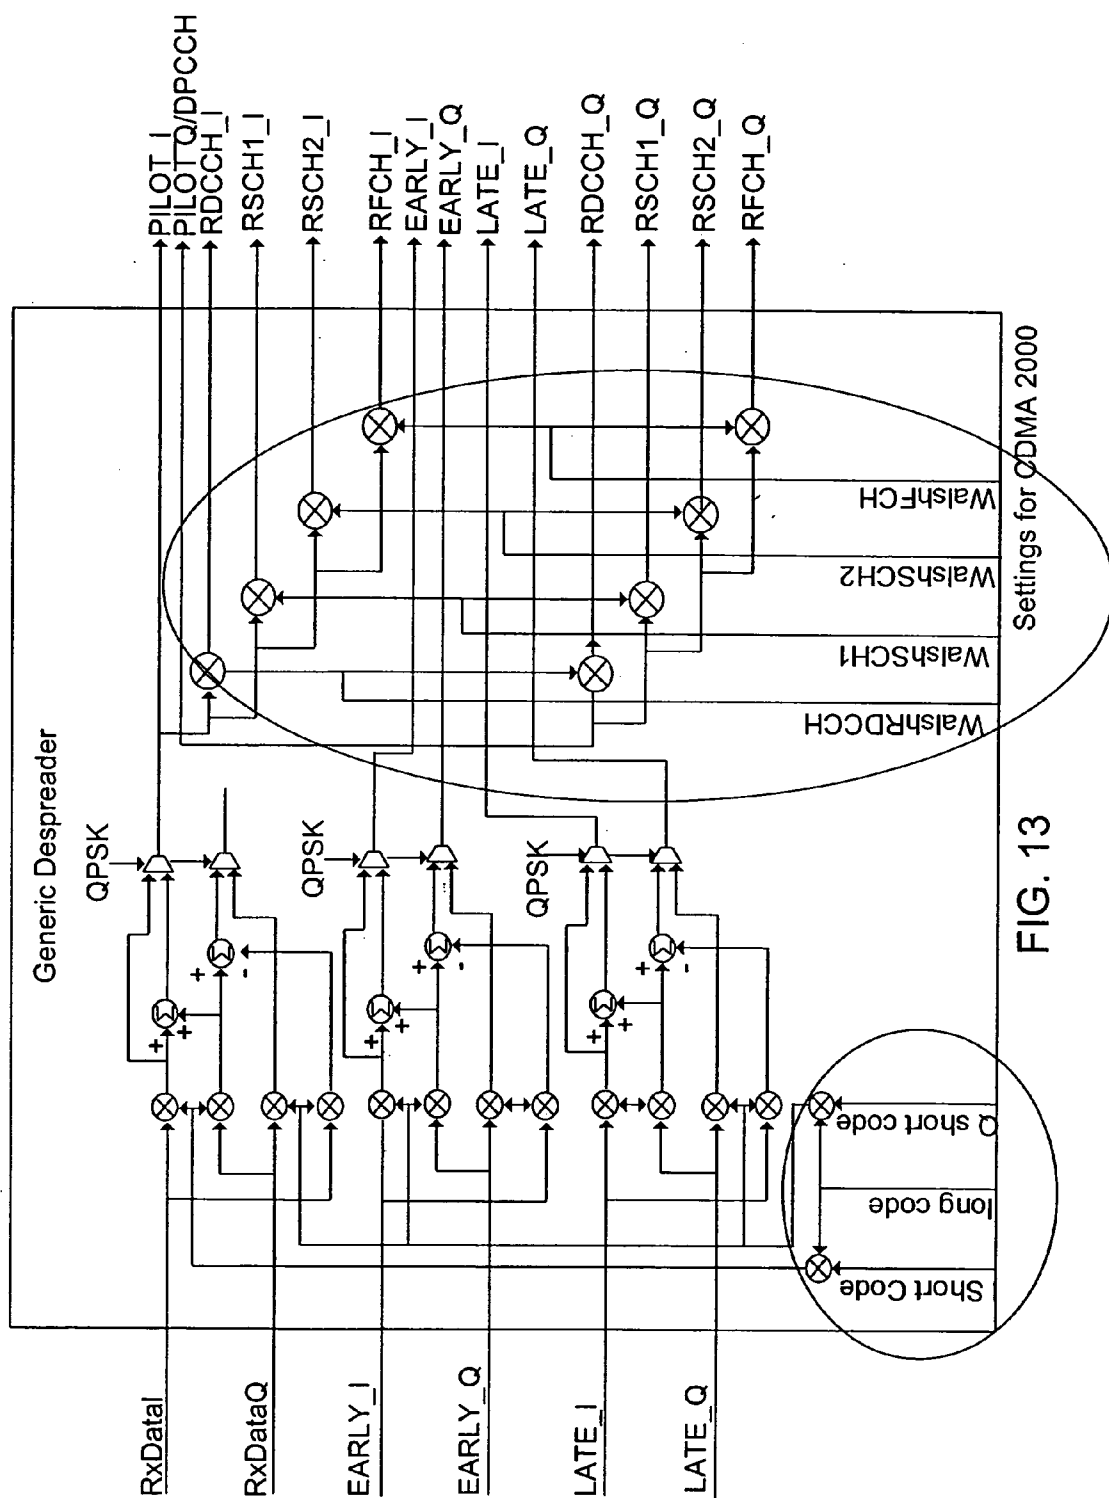


FIG. 13

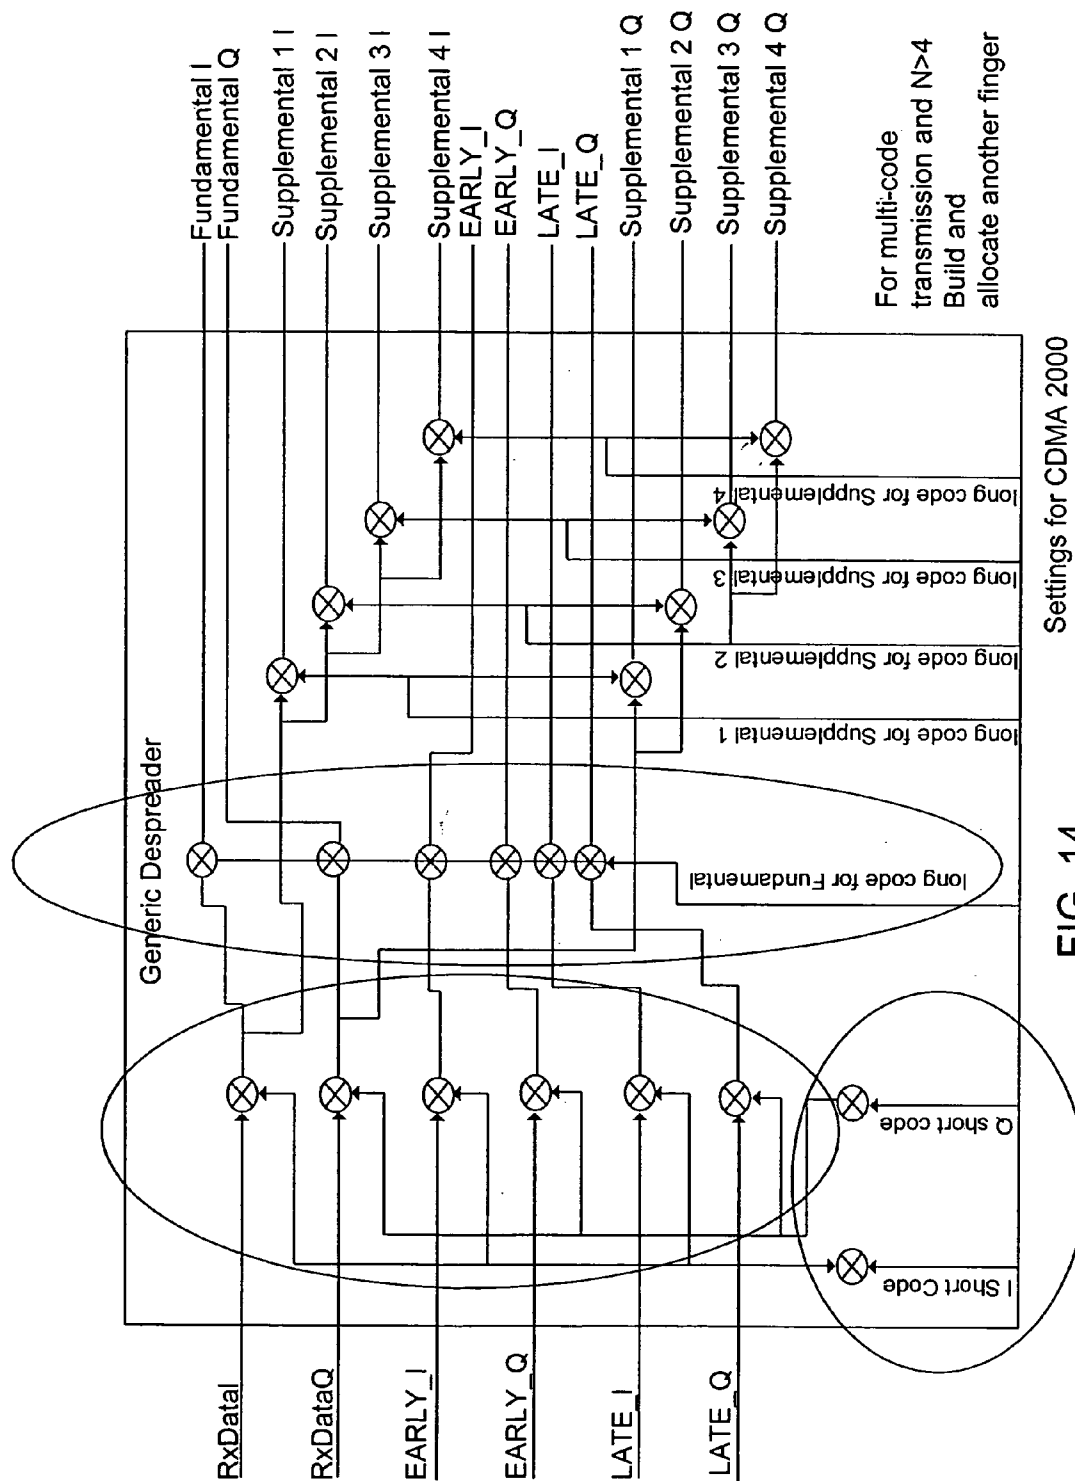

Settings for CDMA 2000

FIG. 14

CDMA Computation Unit Library	
<i>Front End Processing</i> Sample Interpolation	<i>Parameter Estimation</i> Energy Estimator Timing Parameter Estimator Channel Estimator
<i>Chip Rate Processing</i> Sample Epoch Selection Matched Filter Generic Despreader Generic Dechannelizer Code Generation Unit Integrate and Dump Generic Searcher Control	<i>Channel Element Processing</i> Alignment/Deskewing Combiner Soft Decision Computer Interpath Interference Equalizer Receive Antenna Diversity Combiner
<i>Symbol Sequence Processing</i> Transport Format Decoder Dynamic Spreading Factor Computer Fast Hadamard Transform Rotator/Squarer	<i>Interleaving</i> Deinterleaver Controller
	<i>Channel Decoding</i> Turbo Decoder Convolutional Decoder

FIG. 15



TDMA Computer Unit Library	
<i>TDMA Modem Transmitter</i> Pulse-shaping Multiplexing	<i>TDMA Modem Receiver</i> Front-end Filtering Adaptive Demodulation
Link Adaptation (AMR) Antenna Transmit Diveristy	Synchronization Adaptive Parameter Estimation Diversity Combining Link Adaptation
<i>Channel Decoder</i> Reed Solomon Codes Decoding Fire Codes Decoding Decryption Deinterleaving	
	<i>Channel Encoder</i> Encoding Encryption Interleaving

FIG. 16

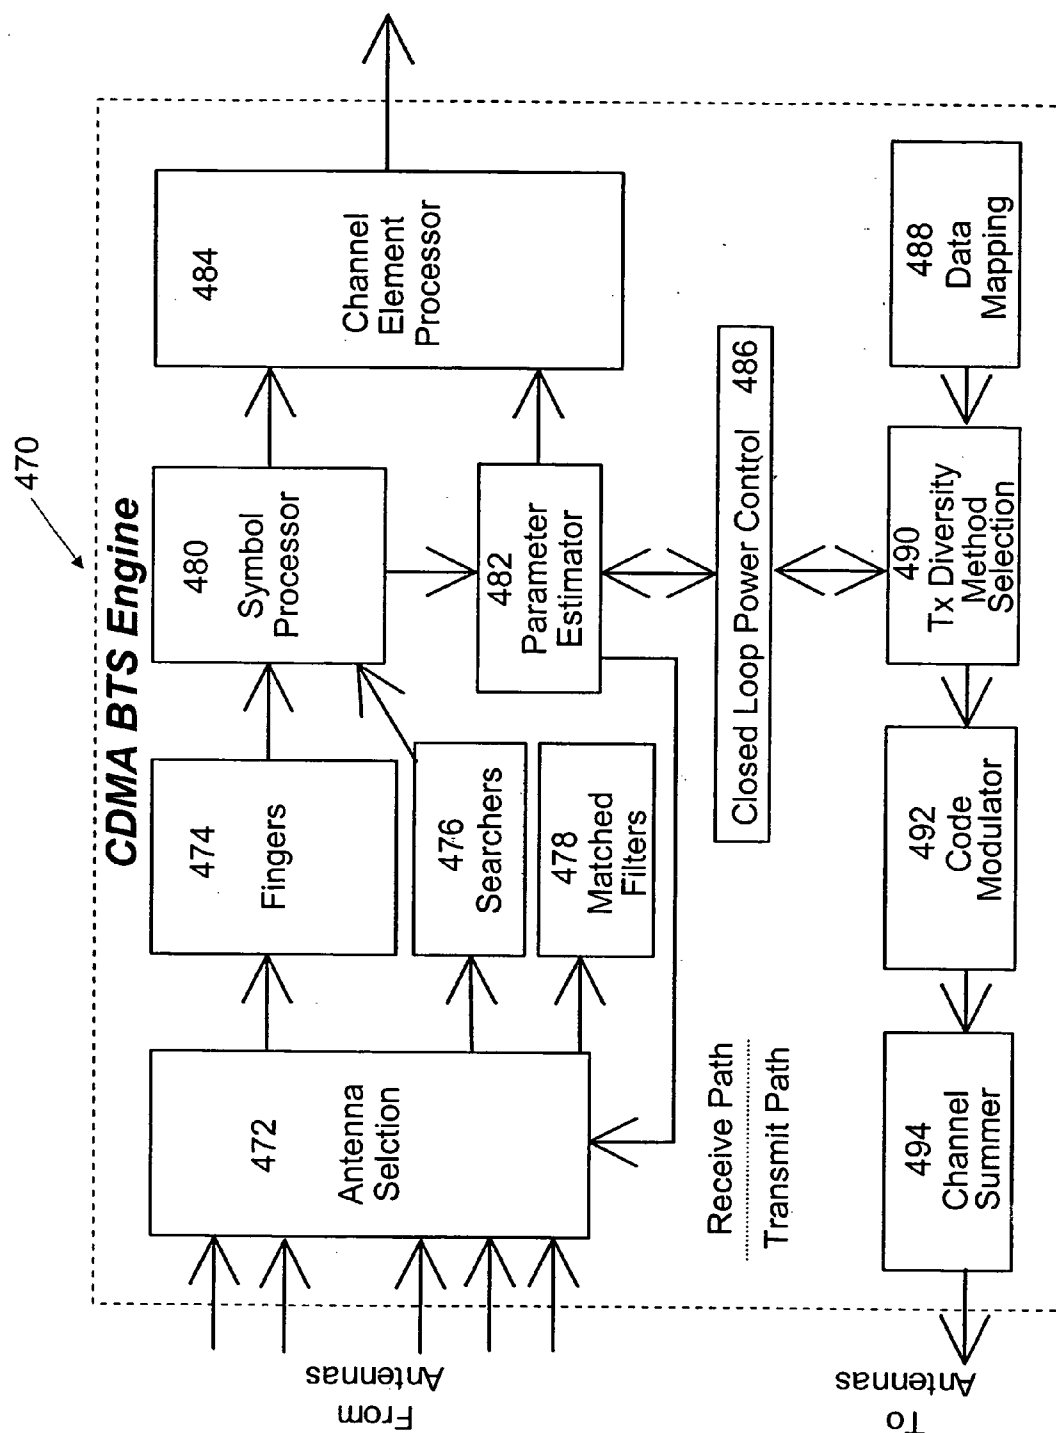


FIG. 17

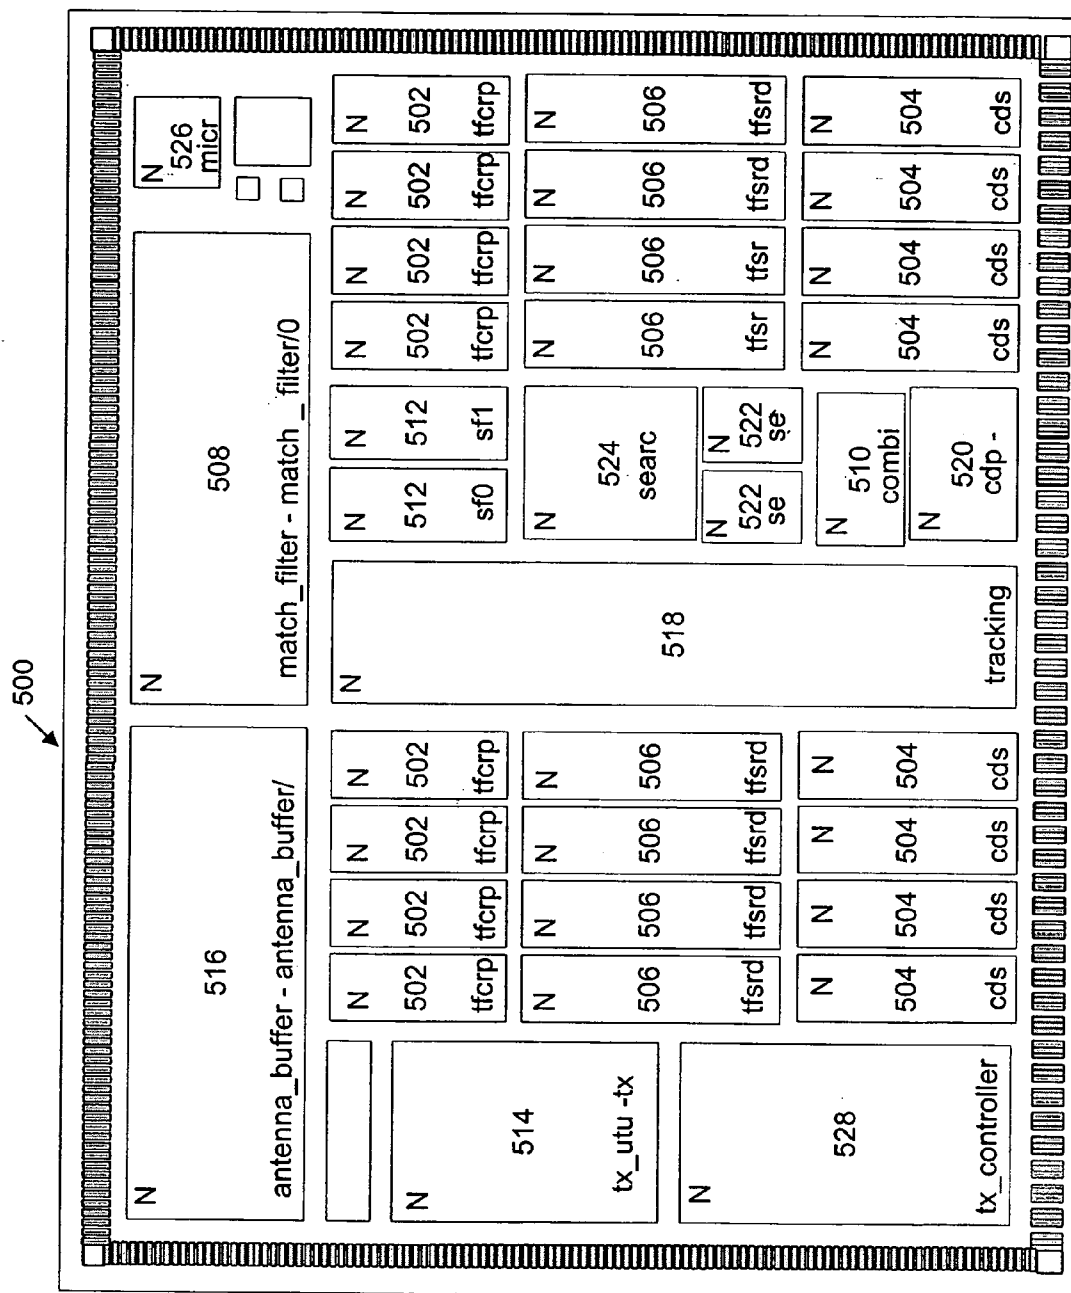


FIG. 18

## METHOD AND APPARATUS TO SUPPORT MULTI-STANDARD, MULTI SERVICE BASE-STATIONS FOR WIRELESS VOICE AND DATA NETWORKS

[0001] This application claims priority to the provisional patent applications with the following Ser. Nos.: 60/173,630 and 60/178,815, filed on Dec. 30, 1999 and Jan. 28, 2000, respectively.

### CROSS REFERENCES

[0002] This application is related to the following applications which are incorporated herein by reference: a U.S. patent application entitled "A CONFIGURABLE ALL-DIGITAL COHERENT DEMODULATOR SYSTEM FOR SPREAD SPECTRUM APPLICATIONS", bearing application Ser. No. \_\_\_\_\_; a U.S. patent application entitled "A CONFIGURABLE MULTI-MODE DESPREADER FOR SPREAD SPECTRUM APPLICATIONS" bearing application Ser. No. \_\_\_\_\_; a U.S. patent application entitled "APPARATUS AND METHOD FOR CALCULATING AND IMPLEMENTING A FIBONACCI MASK FOR A CODE GENERATOR" bearing application Ser. No. \_\_\_\_\_; a U.S. patent application entitled "A FAST INITIAL ACQUISITION & SEARCH DEVICE FOR A SPREAD SPECTRUM COMMUNICATION SYSTEM" bearing application Serial No. \_\_\_\_\_; and a U.S. patent application entitled "A CONFIGURABLE CODE GENERATOR" bearing application Ser. No. \_\_\_\_\_. All of the above applications are filed simultaneously herewith on \_\_\_\_\_.

[0003] In addition, this application is related to a U.S. patent application entitled "IMPROVED APPARATUS AND METHOD FOR MULTI-THREADED SIGNAL PROCESSING" bearing application Ser. No. 09/492,634, filed on Jan. 27, 2000, which is likewise incorporated herein by reference.

### BRIEF DESCRIPTION OF THE INVENTION

[0004] This invention relates generally to reconfigurable signal processors. Such processors are useful in wireless communication systems and, more particularly, in a method and apparatus for transmitting voice and data between multi-standard, multi-service base-stations. The invention will be described in such context.

### BACKGROUND OF THE INVENTION

[0005] In order to transmit and receive circuit and packet-switched voice and data traffic in a multi-user wireless communications environment, with services such as voice, video, image, data, fax, IP-based traffic transmissions, etc., it is necessary to employ a base-station transceiver system (hereafter referred to as "BTS"). A BTS provides a link for sending and receiving wireless communications within a localized region. Recently, there has been an increase in demand for different types of wireless communication services.

[0006] This has led to the need for data services (the term "data services" includes both voice and data services) requiring greater bandwidths and an increased number of channels. In addition, there is a growing need for BTSs to support multiple standards and protocols (i.e., service classes). Traditional signal processing architectures, such as

that shown in **FIG. 1**, do not accommodate enough channels of each service class to satisfy the needs of these data services.

[0007] The prior art signal processing architecture shown in **FIG. 1** shows a processor **108** that performs signal processing to condition, mix, and filter a signal residing on a radio frequency (RF) carrier. The RF signal is initially received at an antenna **90**, is processed by radio frequency circuitry **92** and intermediate frequency (IF) circuitry **94**, prior to being digitized with an analog-to-digital (A/D) converter **96**. The processor **108** delivers a signal to a system **109**, which includes individual circuits **110A-N** for each time slot or code slot. A per-time-slot system is used in TDMA based multiple access communication systems. A per-code-slot system is used in CDMA based multiple access communication systems.

[0008] Each circuit **110** is typically realized as a single-bus shared memory co-processing architecture which includes at least one application specific fixed function integrated circuit **114**, one digital signal processor **116**, and one memory **118** for processing data in that channel. A problem associated with the traditional signal processing architecture, such as that shown in **FIG. 1**, is an inadequate level of integration when the number of channels and the data rate increase. This is due to the single bus, shared-memory architecture. Typically, as the number of channels increases, an increase in the system operating frequency is required. This is typically manifested by using a traditional digital signal processor at a very high clock speed to support this higher channel density. An increasingly greater portion of this increased horsepower is used up in being able to read and write data into memory fast enough. This results in practical implementations of these single-bus shared-memory architectures requiring a greater than linear increase in clock speed to obtain a linear increase in the channel density. In the prior art, the level of integration, such as trunking efficiency, is typically increased by increasing the speed and/or number of digital signal processors on a circuit **110**. The problem with this approach is that achieving increased channel demodulation and decoding processing power is often at the expense of significantly increased power dissipation, silicon area and product cost.

[0009] The problems of inadequate efficiency, demand for greater bandwidths, and more channels per data service have necessitated the development of an efficient, cost effective mechanism for the processing of wireless data.

### SUMMARY OF THE INVENTION

[0010] In one embodiment of the invention, signal processing is performed in a signal processor that includes a plurality of computation units, a test interface, a general purpose microprocessor, and an interconnect mechanism. The signal processor is referred to as a "channel pooling signal processor." Additionally, in an exemplary embodiment, a separate digital signal processor is also used with the channel pooling signal processor.

[0011] The computation units are flexibly configured and connected in that they may be used to achieve any one of several different transceiver functions. For example, the computation units can be configured to perform downconversion, dechannelization, demodulation, decoding, equalization, despreading, encoding, modulation, spreading,

diversity processing. These computation units are typically able to support a specific type of signal processing associated with a specific class of waveforms (time-division, code-division, or frequency-division), represented by a mathematical function or sequence of mathematical functions operating across a variety of data rates, as well as multiple modes of operation.

[0012] The test interface is used for testing all internal states of the channel pooling signal processor, including testing the functions of the computation units. The general purpose microprocessor manages control of how the data flowing into and out of the channel pooling signal processor. Typically, the general purpose microprocessor is a programmable microprocessor capable of setting up the interconnect to route data from the input of the channel pooling signal processor, to and from any computation unit, and to the output of the channel pooling signal processor. The interconnect mechanism is used for connecting the components of the channel pooling signal processor to one another. In other words, the interconnect mechanism joins the computation units, the test interface, and the input-output interface, such that all of these components are under the control of the general-purpose microprocessor.

[0013] In another embodiment of the invention, the signal processing is performed using more than one channel pooling signal processor. The additional channel pooling signal processor(s) allow the method and structure to process multiple data streams corresponding to multiple channels of voice or data information.

[0014] An advantage of the method and structure of an embodiment of the invention is the ability to provide a linear increase in channel density solely via a linear increase in the system operating frequency or clock speed.

[0015] Another advantage of the method and structure of an embodiment of the invention includes the ability to use more than one channel pooling signal processor. Using multiple channel pooling signal processors allows multiple data streams corresponding to multiple channels to be processed.

[0016] Another advantage of the disclosed technology is that the general purpose microprocessor can enable configuration across different operating modes, for example, including: service type, channel type, data protection type, modulation type, and reception type.

[0017] An additional advantage of the invention is that a set of computation units may be optimized for the execution of functions with high computational complexity.

[0018] Still another advantage of the invention is that a greater number of channels can be processed on the same BTS, thus circumventing limitations of the prior art.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0019] FIG. 1 illustrates a prior-art architecture of a traditional base-station transceiver system.

[0020] FIG. 2 illustrates an exemplary base-station transceiver system in accordance with an embodiment of the invention.

[0021] FIG. 3 illustrates an exemplary channel pooling signal processor in accordance with an embodiment of the invention.

[0022] FIG. 4 illustrates a detailed embodiment of the architecture of FIG. 3.

[0023] FIG. 5 illustrates a computation unit (kernel) constructed in accordance with an embodiment of the invention.

[0024] FIG. 6 illustrates configurable architectures that may be implemented in accordance with an embodiment of the invention.

[0025] FIG. 7 illustrates profiling of computationally intensive functions in accordance with an embodiment of the invention.

[0026] FIG. 8 illustrates profiling commonality of functions across wireless communications standards in accordance with an embodiment of the invention.

[0027] FIG. 9 illustrates the characterization of data processing computation units with variable and invariant components in accordance with an embodiment of the invention.

[0028] FIG. 10 illustrates profiling data flow among data processing computation units in accordance with an embodiment of the invention.

[0029] FIG. 11 illustrates an exemplary process to configure one or more products in accordance with an embodiment of the invention.

[0030] FIG. 12 illustrates an exemplary functional configuration of a chip-rate processing computation unit for the 3GPP standard in accordance with an embodiment of the invention.

[0031] FIG. 13 illustrates an exemplary functional configuration of a chip-rate processing computation unit for the CDMA 2000 standard in accordance with an embodiment of the invention.

[0032] FIG. 14 illustrates an exemplary functional configuration of a chip-rate processing computation unit for the IS-95 standard in accordance with an embodiment of the invention.

[0033] FIG. 15 illustrates an exemplary library of CDMA computation units in accordance with an embodiment of the invention.

[0034] FIG. 16 illustrates an exemplary library of TDMA computation units in accordance with an embodiment of the invention.

[0035] FIG. 17 illustrates a functional block diagram of an exemplary CDMA base-station engine architecture in accordance with an embodiment of the invention.

[0036] FIG. 18 illustrates an exemplary silicon layout of the CDMA base-station engine in accordance with an embodiment of the invention.

#### DETAILED DESCRIPTION OF THE INVENTION

[0037] FIG. 2 illustrates an exemplary base station transceiver system (BTS) 200 in accordance with an embodiment of the invention. The BTS 200 receives signals via the antenna 90. The received signals are processed by the RF circuitry 92 and the IF circuitry 94 to provide one or more intermediate frequency signals. Next, the processed signal is digitized via the A/D converter 96, whose output is placed on a bus 52. Signals from the bus 52 are routed to a

heterogeneous reconfigurable hardware multiprocessor **66**, a general purpose microprocessor **74** and a DSP microprocessor **72**. In an exemplary embodiment, the heterogeneous reconfigurable hardware multiprocessor **66** and the general purpose microprocessor **74** are referred to as a channel pooling signal processor **76**. In another exemplary embodiment, the DSP microprocessor **72** is a commercially available DSP microprocessor, such as the TMS320C6X family of DSPs made by Texas Instruments, the Starcore SC140 DSP made by Lucent, or the Tigersharc DSP made by Analog Devices.

[0038] In an exemplary embodiment, the heterogeneous reconfigurable multiprocessor **66** includes a pool of parallel hardware signal processors referred to as computation units or kernels. The computation units perform the more computationally intensive signal processing operations required by a set of telecommunications standards, applications and services of interest, and are selected and configured in a modular, non-redundant manner. The individual computation units and their interconnections can be quickly reconfigured, so that the BTS **200** can quickly switch from one standard, application, and/or service of interest to another. The DSP **72** performs the less computationally intensive signal processing functions, while the microprocessor **74** performs control and other functions.

[0039] Each hardware device is controlled by a corresponding software module. A detailed description of the relationship between the software module and the hardware devices (i.e., multiprocessor **66**, DSP **72**, and general purpose microprocessor **74**) is explained in U.S. patent application entitled "Reprogrammable Digital Wireless Communication Device and Method of Operating Same" bearing Ser. No. 09/565,687. This application is hereby incorporated by reference for all purposes.

[0040] FIG. 3 illustrates an exemplary architecture of the channel pooling signal processor **76** in accordance with an embodiment of the invention. The channel pooling signal processor **76** includes the heterogeneous reconfigurable hardware multiprocessor **66**, the general purpose microprocessor **74**, and a test interface **34**. In an exemplary embodiment, the heterogeneous reconfigurable hardware multiprocessor **66** includes multiple computation units **36A-36F** and an interconnect mechanism **32**. In an exemplary embodiment, the general purpose microprocessor **74** is a programmable microprocessor capable of routing data from the input of the channel pooling signal processor **76** to and from any computation unit **36**. In another exemplary embodiment, the general purpose microprocessor **74** manages the dataflow into and out of a system of multiple channel pooling signal processors **76**. This dataflow is typically executed in a data-pump fashion, with local memory being the destination and source of the data into and out of the channel pooling signal processors **76**.

[0041] The interconnect mechanism **32** provides a means for connecting the computation units **36**, other components of the channel pooling signal processor **76**, and other components in the BTS **200** to each other. For example, the interconnect mechanism **32** is capable of changing configurations for specific channels, while maintaining the status and operation modes of all other channels in an unchanged condition. In one embodiment, the interconnect mechanism **32** can be any interconnect mechanism known in the art such

as a switch and switch controller, or a set of buses and a bus-controller. Preferably, the switch controller or bus-controller includes software to change the configurations for specific channels while maintaining the status and operating modes of all other channels in an unchanged state.

[0042] The test interface **34** allows the user to test the channel pooling signal processor **76** in all operating modes, including testing the computation units **36** in various modes of operation. The flexibility of the interconnect mechanism **32** and the general purpose microprocessor **74** allows individual computation units **36** to be tested for functionality and reliability while maintaining the status and operating modes of all other channels in an unchanged state. In an exemplary embodiment, the test interface **34** is implemented using JTAG or a proprietary testing interface.

[0043] The computation units **36A-36F** perform the more computationally intensive operations required of BTS**200**. In an exemplary embodiment, computation units **36** are flexibly configurable and may be used to achieve any one of several different functions. These functions include, but are not limited to, channel decoding, equalization, chip-rate processing, synchronization, digital down-conversion and channelization, and parameter estimation of signal energy, interference energy, number of interferers, timing signals, coding signals, frequency signals, and error signals. Computation units **36** may be implemented to support a mathematical function operating across a variety of data rates, and/or modes of operation. In the usual case, these modes of operation correspond to specific predefined variations of existing dataflow or control flow algorithms, including, but not limited to, demodulation, despreading, detection, MLSE equalization, parameter estimation, energy estimation, synchronization estimation, channel estimation, interference estimation, channel decoding, convolutional decoding, and turbo decoding for narrowband and wideband TDMA, CDMA, and OFDM systems.

[0044] The type and number of computation units **36** required by the BTS **200** is determined according to system architecture requirements. The system designer bases system architecture requirements on factors including the number of channels required to support the BTS **200** and the I/O bandwidth required per BTS **200**. The resulting BTS **200** architecture may have either a homogeneous or heterogeneous set of computation units **36**. A detailed description of an exemplary method used to determine the type and number of computation units **36** is explained in U.S. patent application entitled "Method of Profiling Disparate Communications and Signal Processing Standards and Services" bearing Ser. No. 09/565,654. This application is hereby incorporated by reference for all purposes.

[0045] FIG. 4 schematically illustrates a detailed exemplary embodiment of the channel pooling signal processor **76** in FIG. 3. The channel pooling signal processor **76** includes a program control unit (PCU) **151** and a heterogeneous reconfigurable multiprocessor **66**. In one embodiment, the program control unit **151** is controlled by the general purpose microprocessor **74** according to a respective module of the executive code running on microprocessor **74**. The executive code is a segment of the microprocessor executable programs stored in memory that orchestrates overall configuration and functionality. In an exemplary embodiment, the program control unit **151** includes a con-

troller 156 and a data router manager 158. The controller 156 configures a set of quasi-fixed-function logic computation units 36A-N in the heterogeneous reconfigurable multiprocessor 66. In a typical application, the executive code executes on the general purpose microprocessor 74 or the DSP microprocessor 72, and the functionality of controller 156 is allocated to these microprocessors (72 and 74) and associated peripherals such as memory and various bus interfaces. FIG. 4 further illustrates that individual computation units 36 may be interconnected either directly, as per representative path 164, or via reconfigurable data router 32. Reconfigurable data router 32 further receives input data from and delivers output data to bus 55. Reconfigurable data router 32 is controlled by the data router manager 158 via control bus 154, and in turn via controller 156 and the executive code.

[0046] If there are multiple non-identical computation units, the heterogeneous reconfigurable multiprocessor 66 operates during execution as a heterogeneous multiprocessing machine. Based on the selection of computation units 36, an augmented instruction set is defined for the heterogeneous reconfigurable multiprocessor 66. This augmented instruction set can be created, for example, by using a wide-word instruction by appending bits to an existing instruction word, with the new bit fields exclusively devoted to the decoding of instructions for the control and data flow for the heterogeneous reconfigurable multiprocessor. The instruction word, when decoded, feeds control units 156 and 158 of FIG. 4. Controller 156 performs the role of taking the decoded instruction fields and configuring the computation units 36 and reconfigurable data router 32, via data router manager 158. The control of the reconfigurable data router 32 is effected via a control word, which, in a preferred implementation, is a bit field extracted from the instruction word.

[0047] FIG. 5 illustrates an exemplary computation unit 36 in accordance with an embodiment of the invention. The computation unit 36 is designed to execute the computationally intensive portions of the digital signal processing algorithms required to extract data from each of the channels processed in the BTS 200. In an exemplary embodiment, the computation unit 36 includes a customized data memory 42, a configurable ALU 44, and a data sequencer 46. The memory 42, which serves as a high-speed cache, may be used to store operating instructions, results of an algorithmic computation, or the like, of the computation unit 36. The data sequencer 46 controls the execution of the program defining the operating instructions that runs in the computation unit 36. The ALU 44 performs required mathematical operations on signal samples or data. Computation units 36 are compute engines, and their nature as well as that of their interconnection is governed by any bit-slice, nibble-slice, and word-slice routing control mechanism, including, but not limited to, a programmable bus.

[0048] For further illustration, FIG. 6 shows several representative or available configurable architectures that may be implemented by one or more computation units 36. Computation units 36 can be reconfigured via control lines 152 to determine what operations are possible. Similarly, the reconfigurable data router 32 of FIG. 4 can be controlled to effectively re-order the sequence of signal processing operations performed by computation units 36.

[0049] The heterogeneous reconfigurable multiprocessor 66 is designed according to a method referred to as profiling. Profiling includes the first step of surveying all signal processing and control functions required to accommodate the standards, applications, and/or services of interest. The most computationally intensive of these functions are then targeted to the heterogeneous reconfigurable multiprocessor 66, while the remaining functions are targeted to the DSP microprocessor 72. Typically, computational intensity is enumerated in units of millions of operations per second (MOPS). For example, FIG. 7 depicts functions 204A-E and corresponding MOPS required by each function 204 that could be performed by heterogeneous reconfigurable hardware multiprocessor 66. These metrics are calculated for the various pertinent signal processing datapaths listed in the column 202.

[0050] Additionally, computationally intensive functions are further categorized according to type of operation, e.g., arithmetic/logical, control, and memory access. For each category, characteristic power per MOPS is determined for hardware or software implementation from vendor data, analysis, or other means. Power, e.g., milliwatts, required per function is thereby characterized for implementation in both reconfigurable hardware or in software (i.e., running on a processor whose power-per-MOPS has been characterized). In addition, the corresponding code size (and therefore memory requirement) for software implementation is determined. From the above, and from budgeted power and memory resources, allocation of processing operations to hardware and software processors can be determined.

[0051] The entries in spreadsheet 200 correspond to a measurement of the number of static operations of a given type required to realize a receiver for a particular standard, i.e., to a specific time within a dynamic operational scenario. The analysis of FIG. 7 must be repeated as necessary to reflect important temporal variations in the type, number, and sequence of operations during representative/realistic scenarios for all standards, applications, and/or services of interest. The results of these analyses must be interpreted to reveal additional critical metrics of computational intensity, including, but not limited to, average and peak MOPS for each relevant operation. This enables the requisite specifications for the hardware and software processing resources to be further evaluated.

[0052] The second step of profiling involves analysis of commonality of signal processing functions across the standards, applications, and/or services of interest. An exemplary analysis is represented in FIG. 8. Included in abridged spreadsheet 220 are representative standards/applications, and respective relevant signal processing functions within the general category of parameter estimation. FIG. 8 shows, for example, that a Windowed Average Energy Estimator is required by seven of the listed standards. The designer would research the respective requirements of each of these seven standards to determine the required superset and seven subsets of functionality.

[0053] The third profiling step, defining the data processing computation units 36 necessary to serve the standards, applications, and/or services of interest, is shown conceptually in FIG. 9 for a different set of standards. In general, each unique type of computation unit 36 includes a combination of variable and invariant components. Invariant com-

ponents **241** are determined by the above steps to be common across the standards, applications, and/or services of interest, while variable components **242** are determined by the above steps to be necessary to adapt to the various standards, applications, and/or services of interest. Each computation unit **36** is designed to include sufficient control and interface functionality to permit reconfiguration according to the end operational scenario.

[0054] The interconnection of computation units **36** must also be determined from profiling as shown in the exemplary abridged matrix **260** of FIG. 10. The rows and columns of matrix **260** show a representative set of hardware signal processing computation units that have been defined according to the above profiling steps, along with all connections necessary to serve a representative set of CDMA-based wireless communication standards. Rather than using general-purpose interconnect, such as shared buses, which allows for the realization of all connections between all computation units at a great loss in energy and computational efficiency, the interconnection flexibility required can be derived by analyzing the dataflow from profiling, thereby ensuring that unnecessary flexibility is in fact avoided. Along the axes of matrix **260**, signals generally flow from bottom to top, or from right to left, with exceptions as indicated. Each cell containing an "X" represents a required interface between the respective computation units **36**. It can be seen that in the vicinity of the diagonal, interconnections are tightly clustered, as for example cluster **262**. Other types of interconnections include parallel connections, e.g., **264**, and isolated connections, e.g., **266**. Where common across all standards, applications, and/or services of interest, these interconnections are made directly, as represented by connection **164** of FIG. 4. Conversely, connections that must change as a function of standard etc. must be effected by the reconfigurable data router **32** of FIG. 4.

[0055] To summarize, reconfiguration of the heterogeneous reconfigurable multiprocessor **66** is affected by i) selection of hardware processing computation unit types, ii) control of the variable computation unit functionality, and iii) control of the reconfigurable data router **32**.

[0056] Once the computation unit types and interconnections have been determined, the multiplicity of each computation unit type needs to be determined, as illustrated in FIG. 11. A computation unit pool **280** includes a sufficient number of each type of computation unit **36** to permit the assembly of multiple datapaths **290**. In turn, a sufficient multiplicity of datapaths **290A-D** is assembled to accommodate the signal processing requirements of a particular standard, service or application. This is illustrated for a number of representative applications and/or products **300A-D**. The portfolio **300A-D** can represent either a single product having multi-mode/standard/application capability, or multiple, separate products based on common underlying hardware and software resources.

[0057] Thus, a manufacturer can enjoy mass customization based on a common product "platform." Initial or subsequent configuration can be performed in the factory, at point-of-sale, by the network operator at time of delivery, or by the network operator or service provider while in the field. Post-delivery customization can be based upon any of a number of techniques, including but not limited to smart card, wired interface, and over-the-air/over-the-network download and billing.

[0058] Typically, in a CDMA base station transceiver system, at least one computation unit **36** should perform the function of chip-rate processing, including descrambling and dechannelization functions. The computation unit **36** utilized to perform such functions generally has a fixed hardware portion and a flexible hardware portion. The flexible hardware portion can be reconfigured to comply with different standards. FIGS. 12, 13, and 14 illustrate exemplary signal paths of chip-rate processing computation units **36** for three different standards. In FIG. 12, the signal path shown represents a computation unit **36** that is configured to perform descrambling and dechannelization under the 3GPP standard. In FIG. 13, the signal path shown represents a computation unit **36** that is configured to perform descrambling and dechannelization under the CDMA 2000 standard. In FIG. 14, the signal path shown represents a computation unit **36** that is configured to perform descrambling and dechannelization under the IS-95 standard. In both FIGS. 13 and 14, the circled portions have been reconfigured to comply with the respective standards. In an exemplary embodiment, the data sequencer **46** in the computation unit **36** controls the reconfiguration of the flexible portion of the computation unit.

[0059] Using the profiling steps described above, functions to be performed by a CDMA, TDMA or OFDM system can be categorized and a library of reconfigurable computation units **36** for each such multiple access system can be created. FIG. 15 illustrates an exemplary library of CDMA system computation units (kernels). Similarly, FIG. 16 illustrates an exemplary library of TDMA system computation units (kernels). The lists in FIG. 15 and FIG. 16 comprise exemplary computation unit types and are not exhaustive of all possible computation unit types.

[0060] FIG. 17 illustrates an exemplary functional block diagram of a CDMA BTS engine **470** having multiple computation units performing various functions and an exemplary interconnection of the computation units as represented by arrows shown. The multiple computation units performs functions including antenna selection functions **472**, finger functions **474**, searcher functions **476**, matched filter functions that perform preamble processing **478**, symbol processor functions **480**, parameter estimator functions **482**, and channel element processor functions **484** in the receive path. Further, in the transmit path, the engine **470** includes data mapping functions **488**, diversity method selection functions **490**, code modulator functions **492**, and channel summer functions **494**. In addition, closed loop power control functions **486** are needed in both the receive path and the transmit path.

[0061] In an exemplary embodiment, the stated functions of the CDMA BTS engine **470** are performed by processors **66**, **72**, and **74** (see FIG. 2). Allocation of these functions is determined according to the profiling method discussed above.

[0062] FIG. 18 illustrates an exemplary silicon layout **500** of the CDMA BTS engine **470**, whereby one or more functions described above are implemented by one or more computation units. In FIG. 18, the floor plan **500** includes multiple finger computation units **502**, multiple code generator computation units **504**, multiple searcher computation units **506**, a single preamble processor computation unit **508**, multiple combiner computation units **510**, multiple param-



eter estimator computation units **512**, a single transmitter computation unit **514**, an antenna buffer **516**, a tracking scheduler **518**, a combined data processor (cdp) **520**, multiple search multi-selects **522**, a search control **524**, a microprocessor interface **526**, and a transmitter controller **528**.

[0063] In an exemplary embodiment, the finger computation units **502** despread and demodulate received signals, and provide symbols to the combiner computation unit **512**. In an exemplary embodiment, each finger computation unit corresponds to a specific received multipath or echo for a specific user.

[0064] The code generator computation units **504** generate local replica of the scrambling and channelization codes. The output of the code generator computation units **504** is fed to the finger computation units **502**, searcher computation units **506**, and the preamble processor computation unit **508**. In one embodiment, each finger computation unit **502**, searcher computation unit **506**, and the preamble processor computation unit **508** has its own corresponding code generator computation unit **504**.

[0065] The searcher computation units **506** are hypothesis testing devices used to search for a new mobile that entered the antenna-sector of interest or search for a new multipath for an existing mobile.

[0066] The preamble processor computation unit **508** detects the presence of access bursts from new mobiles. An access burst is a random access attempt by a mobile.

[0067] The combiner computation units **510** ensure multipath and antenna diversity. The combiner computation units **510** take a set of finger computation units **502** corresponding to a single mobile and produce output statistics (e.g., sum, or weighted sum, etc.) that combines signals into one output.

[0068] The parameter estimator computation units **512** provide estimates for three types of random variables, namely, synchronization estimates (i.e., timing and frequency control estimates), channel estimates (i.e., amplitude, phase and delay estimates), and energy and interference estimates (i.e., signal interference ratio estimates).

[0069] The transmitter computation unit **514** generates downlink transmit signals of all common and dedicated control traffic channels.

[0070] The antenna buffer **516** performs antenna data decimation, antenna data buffering, and antenna source select functions.

[0071] The tracking scheduler **518** performs master timing control, uplink protocol timing updates, codes generation (except searcher), uplink context memory control and scheduling (except searcher), microprocessor interface **526** control, and time-slice pipeline control functions.

[0072] The combined data processor **520** performs combined-data scaling, receive-transmit data interface, and miscellaneous interfaces and functions.

[0073] The multiple search multi-selects **522** perform searcher symbol-rate processing and threshold and multi-dwell search algorithms.

[0074] The search control **524** performs searcher scheduling and context memory control, pipeline control, and microprocessor interface **526** control functions.

[0075] The microprocessor interface **526** provides general interface functions to a microprocessor. The transmitter controller **528** performs transmission control functions.

[0076] Advantageously, the architecture of the invention optimally combines fixed-function and reconfigurable logic resources. The system has reconfigurable control and data paths. The invention extends the performance efficiency of microprocessors and digital signal processors via the augmentation of data paths and control paths through a reconfigurable co-processing machine. The reconfigurability of the data path optimizes the performance of the data flow in the algorithms implemented on the processor.

[0077] The architecture efficiently redirects functions previously running on a fixed function data arithmetic logic unit to a more flexible heterogeneous reconfigurable multiprocessing unit. The invention does not depend upon the fine-grained reconfigurability of existing programmable logic devices, and hence solves an inherent problem to such devices, whereby the area and power of the chip are dominated by the routing resources. Furthermore, the invention does not substantially rely on instruction-set programmable processors. Instead, a quasi-fixed set of hardware computational resources that span the signal processing requirements of the standards, applications, and/or services of interest are configured together in a reprogrammable manner. This architecture can be applied to implement signal processing and/or control of processing applications.

[0078] In an exemplary embodiment, a base-station architecture may include only homogeneous computation units, where each homogeneous computation unit is identical in functionality, modes, and performance. In another exemplary embodiment, a base-station architecture may include heterogeneous computation units, where the computation units typically cover two or three different functions per channel.

[0079] For a given architecture, there are typically up to four modes of operation. These four modes of operation include, but are not limited to:

[0080] Mode 1: Initialization Mode: During the initialization mode, the general purpose microprocessor **74** initializes all memory locations, all state machines, and all configurations for each computation unit **36**. Based on a predetermined initialization table, the general purpose microprocessor **74** also determines the dataflow or data routing destinations based on the incoming frame formats. A specific handshake protocol with each computation unit **36** determines the flow of data packets.

[0081] Mode 2: Data-Pump Mode: The data-pump mode is the steady-state operation mode of this system. In this mode, the software in the general purpose microprocessor **74** handles all data routing functionality. This data routing controls the pumping of data streams to the appropriate computation unit **36A-F** for signal processing. Upon completion of the processing at computation units **36A-F**, the data is either automatically routed to the next computation unit (if a predetermined sequence of operations is configured) or back to the I/O interface of the processor via interconnect mechanism **32**.

**[0082]** Mode 3: Configure Request Handling Mode: The Configure Request Handling mode is used when there is a change in a cell's traffic profile. This type of change may occur because of a request from an existing user for a specific type of data service, or because a new user is roaming into a cell that already has a specific session underway that needs continued support. The request is passed on to the BTS **200** controller. Configuration information is then passed on to the BTS **200** controller, which instructs the general purpose microprocessor **74** in the channel pooling signal processor **76** to establish a new session. New sessions must be established without detrimentally affecting existing voice and data sessions already being supported by the channel pooling signal processor. The request appears in a random manner, and the general purpose microprocessor **74** must accommodate this traffic, typically within the maximum allowed setup time specified by the network designers.

**[0083]** Mode 4: Test Mode: The test mode is used to test all internal states of the channel pooling signal processor system, including the general purpose microprocessor **74**, the interconnect mechanism **32**, and computation units **36A-F**.

**[0084]** Preferably, each of these modes of operation is set directly, via in-situ or over-the-network programming.

**[0085]** The foregoing description, for purposes of explanation, used specific nomenclature to provide a thorough understanding of the invention. However, it will be apparent to one skilled in the art that the specific details are not required in order to practice the invention. The embodiments were chosen and described in order to best explain the principles of the invention and its practical applications, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the following claims and their equivalents.

**1-8.** (canceled)

**9.** Method for reconfiguring a signal processor having a plurality of computational units in a base-station transceiver system to support at least one of a plurality of service classes of interest that include at least one of multiple cellular telephone telecommunication system standards, applications and protocols, comprising the steps of:

profiling the function to be performed by the signal processor by:

first surveying all signal processing and control functions required to accommodate the service classes of interest,

analyzing the commonality of signal functions across the service classes of interest;

defining the data processing computational units necessary to serve the services of interest;

analyzing the data flow from the profiling; and

interconnecting the plurality of computational units based on the results of the data flow analysis.

**10.** The method as claimed in claim 9 wherein the step of defining operates to consider at least two different sets of cellular telephone telecommunication system standards.

**11.** The method as claimed in claim 10, wherein the sets of cellular telephone telecommunication system standards include CDMA, TDMA and OFDM systems.

**12.** The method as claimed in claim 9 wherein the signal processor is a reconfigurable microprocessor and the base station transceiver also includes a DSP processor, and the step of interconnecting directs the most computational intensive function to the computational units of the reconfigurable microprocessor and the remaining functions to the DSP processor.

**13.** The method as claimed in claim 12 wherein the microprocessor is a heterogeneous reconfigurable microprocessor.

**14.** The method as claimed in claim 12 wherein the step of defining operates to consider at least two different sets of cellular telephone telecommunication system standards.

**15.** The method as claimed in claim 13, wherein the sets of cellular telephone telecommunication system standards include CDMA, TDMA and OFDM systems.

**16.** The method as claimed in claim 10, wherein the profiling step assigns invariant functions across all of multiple cellular telephone telecommunication system standards and variable functions to a specific system standard.

**17.** The method as claimed in claim 9 further comprising the step of utilizing the results of the profiling step to compile a library of functions to be performed by at least one of a CDMA, TDMA or OFDM cellular telephone telecommunication system.

**18.** The method as claimed in claim 9 wherein the step of profiling the computational functions further comprises:

categorizing the functions according to a type of operation such as one of arithmetic/logical, control and memory access; and

determining the characteristic computational power required to perform each such function.

**19.** The method as claimed in claim 10 further comprising:

measuring the number of static operations of a given type required to realize a receiver for a particular system standard.

**20.** A CDMA base station transceiver system for operating across a plurality of cellular telephone telecommunication system standards comprising:

a computational unit having a fixed hardware portion and flexible hardware portion; and

means for reconfiguring the flexible hardware portion to accommodate each of the different cellular telephone telecommunication system standards.

**21.** A CDMA base station transceiver as claimed in claim 20 wherein said flexible hardware portion comprises:

a channel pooling signal processor, including:

a reconfigurable multiprocessor having a plurality of computational units and an interconnect mechanism, each said computational unit having a data sequencer for controlling program execution, a configurable logic unit and a dedicated memory.

**22.** A CDMA base station transceiver system as claimed in claim 21 and further comprising:

a general purpose microprocessor for managing data flow into and out of said channel pooling signal processor;

wherein the interconnect mechanism connects said plurality of computational units and said general purpose microprocessor; and

a digital signal processor connected to said channel pooling signal processor;

wherein said channel pooling signal processor performs more computationally intensive signal processing operations and said digital signal processor performs less computationally intensive signal processing operations.

**23.** A CDMA base station transceiver system as claimed in claim 22 wherein there are multiple computational units that perform one or more of the functions in the base station system receiver part of

antenna selection,

finger function,

searching functions,

matched filter functions to perform preamble processing,

symbol processing,

parameter estimator, and

channel element processing.

**24.** The CDMA base station transceiver system as claimed in claim 22 wherein said multiple computation units perform one or more of the functions in the base station system transmitter part of:

data mapping

diversity method selection,

code modulation, and

a channel summer.

**25.** The CDMA base station transceiver system as claimed in claim 22 wherein said multiple computational units also perform the function of a closed loop power control in the base station transmitter part.

**26.** A CDMA base station transceiver system as claimed in claim 20 wherein:

said computational unit flexible portion performs at least one of the functions of descrambling and dechannelization of a received signal.

\* \* \* \* \*