

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 February 2003 (20.02.2003)

PCT

(10) International Publication Number
WO 03/013401 A1

(51) International Patent Classification⁷: **A61F 2/66, 2/60**

(21) International Application Number: PCT/NL02/00497

(22) International Filing Date: 23 July 2002 (23.07.2002)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:
1018616 23 July 2001 (23.07.2001) NL

(71) Applicant (*for all designated States except US*): **STICHTING VOOR DE TECHNISCHE WETENSCHAPPEN** [NL/NL]; Van Vollenhovenlaan 661, NL-3527 JP Utrecht (NL).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **COOL, Jan, Constant** [NL/NL]; Acacialaan 32, NL-2641 AC Pijnacker (NL). **TE RIELE, Frederik, Lambert, Silvio** [NL/NL]; Paul van Kempenstraat 13, NL-7558 HB Hengelo (NL). **HEKMAN, Edsko, Evert, Geert** [NL/NL]; Tolstraat 18, NL-7534 CH Enschede (NL).

(74) Agent: **VAN BREDA, Jacques**; Octrooibureau Los en Stigter B.V., Weteringschans 96, NL-1017 XS Amsterdam (NL).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,

[Continued on next page]

(54) Title: PROTHESIS OR ORTHESIS FOR A MEMBER OF A HUMAN BODY

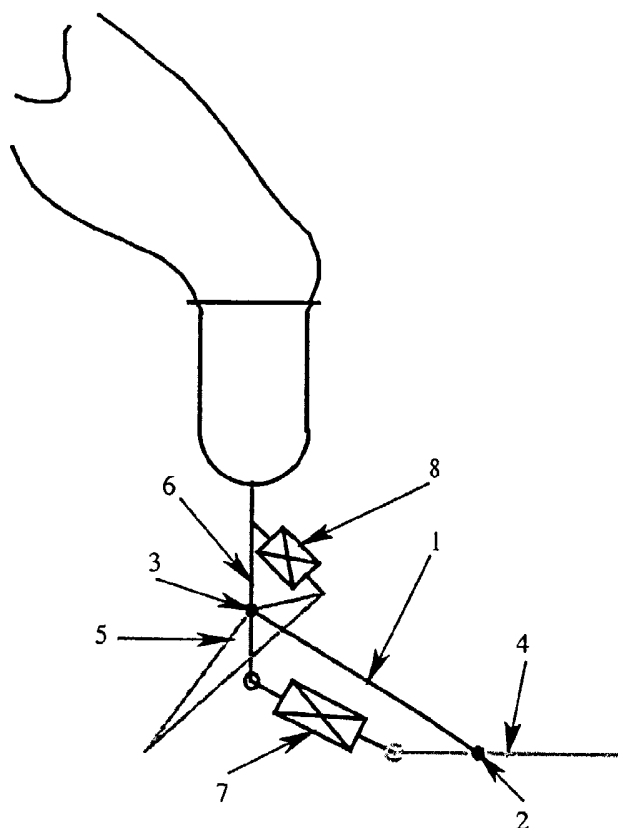

(57) Abstract: The invention relates to a prosthesis or orthosis for a member of a human body, comprising limb-forming components, which components are connected by pivoting couplings, and at least one first element (7) whose ends are coupled with components that are distinguishable from each other, wherein the first spring element (7) spans at least two pivoting couplings. The parts comprise a lower leg portion (6), a heel portion (5), a front portion of the foot (1) and a toe portion (4).



WO 03/013401 A1



SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VN, YU, ZA, ZM, ZW.

Published:

— with international search report

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Prosthesis or orthosis for a member of a human body

The invention relates to a prosthesis or orthosis for a member of a human body, comprising limb-forming components, which components are connected by pivoting couplings, and at least one first spring element whose ends
5 are coupled with components that are distinguishable from each another.

Such a prosthesis is known from the Dutch patent application NL-A-1010209. In the known prosthesis a spring means is used coupling a toe portion with a heel portion.
10 A damper is provided to complete the thus formed mass spring system.

DE-C-309066 relates to a prosthetic foot comprised of various parts that are connected with each other and in which, in order to restrict the movability of the
15 middle part of the foot, the same is pivotingly connected with two levers connected on the one hand with the lower leg and on the other hand with the middle part of the foot. The object of the construction is to provide a restriction to the movability of the parts of the foot in
20 relation to one another.

WO 00/23017 relates to a prosthesis fitted to the lower leg and comprising an energy storage element in the form of a leaf spring, with a lever being pivotingly coupled to the lower side of said leaf spring. Between the
25 lever and the leaf spring an energy transmission element is provided in the form of an inelastic cord. In this way the movement of the lever translates into a corresponding energy storage in the leaf spring.

The known prosthesis and also other prior art
30 prostheses and orthoses have disadvantages which the present invention is intended to eliminate.

One problem of the known prostheses and orthoses is that they do not allow the user to assume a natural gait. On the one hand this is to do with the suboptimal
35 energy efficiency of known prostheses and orthoses, and on

the other hand this is do with the inadequate support that the known prostheses and orthoses afford the body of the user during walking. This is particularly relevant during the push-off. The poor functioning of the known prosthesis results in the user being moderately comfortable when walking and becoming very fatigued.

In a first aspect of the invention, the prosthesis and orthosis referred to in the preamble is according to the inventors characterized in that a coupling element is provided spanning at least two pivoting couplings of a limb-forming component or part. In this way an energetic, substantially neutral use of the prosthesis or orthosis can be achieved for which no or very little external energy needs to be supplied. The energy that during the walking motion is stored in the first spring element can be made available with a high conversion efficiency to a further spring element that may form a part of the prosthesis or orthosis.

The idea of the invention outlined above can be used for the lower leg where a knee-ankle coupling has to be provided but, for example, also for a prosthesis or orthosis for the upper leg where the coupling between the torso and the knee has to be provided. Other parts of the body may also be substituted or supported by a prosthesis or orthosis in the manner proposed by the invention; in this connection the application as prosthetic foot may be mentioned. The invention will be further elucidated with reference to such a prosthetic foot. However, the invention is obviously not limited thereto.

In a further aspect of the invention, the prosthetic foot or orthosis is characterized in that the parts comprise a lower leg portion, a heel portion, a front portion of the foot and a toe portion, wherein the front portion of the foot at either side ends in an ankle hinge and a toe hinge, respectively, for the coupling of on the one hand the heel portion and the lower leg portion, and on the other end the toe portion, and in that the coupling element spans the pivot couplings of the front portion of the foot.

The coupling element preferably spans the pivoting coupling of the front portion of the foot in such a manner that the same is connected on the one hand with the toe portion and on the other hand with a selection made
5 from the group comprised of the lower leg portion and the heel portion.

Preferably the first coupling element is connected on the one hand with the toe portion and on the other hand with the lower leg portion. This allows the
10 prosthetic foot or orthosis to be embodied relatively simply making it even possible to integrate the front portion of the foot and the heel part.

The prosthesis or orthosis may be constructed relatively simply by allowing the coupling element and the
15 first spring element to coincide, that is to say by embodying the coupling element as spring element.

In still another aspect of the invention the prosthesis or orthosis is characterized in that the heel portion and the lower leg portion share the ankle hinge of
20 the front portion of the foot, while also being mutually coupled via a second spring element. This second spring element can then fulfil the above-mentioned energy-exchange function with the first spring element.

Herein below the invention will be further elucidated with reference to a non-limiting exemplary embodiment of a prosthetic foot and with reference to the accompanying drawing.

The drawing shows in:

- Fig. 1 a schematic illustration of a prosthetic
30 foot according to the invention;

- Fig. 2 a schematic illustration of various stages of use a to d of the prosthetic foot according to the invention; and

- Fig. 3 a schematic illustration of an alternative embodiment of the prosthetic foot according to the
35 invention; and

- Fig. 4 various stages of use of the prosthetic foot according to Fig. 3.

Identical reference numbers used in the figures refer to identical parts.

Referring first to Fig. 1, a front part of a foot is shown indicated by reference number 1, ending in a toe hinge 2 and an ankle hinge 3. By means of toe hinge 2 a toe portion 4 is coupled with the front portion of the foot 1. Ankle hinge 3 couples the front portion of the foot 1 and the heel portion 5. Ankle hinge 3 also couples a lower leg portion 6. In this embodiment shown in Fig. 1, the lower leg portion 6 extends past the ankle hinge 3 and via a so-called plantar spring element 7, this lower leg portion 6 is coupled with the toe portion 4. In this way the plantar spring element 7 spans both the ankle hinge 3 and the toe hinge 2. The heel portion 5 is further coupled with the lower leg portion 6 by a so-called dorsal spring element 8.

The use of the embodiment of the prosthetic foot according to the invention discussed with reference to Fig. 1 is schematically shown in Figs. 2a to d. In situation a the prosthetic foot is unloaded. In situation b, the heel portion 5 makes loaded contact with the ground, and the dorsal spring element 8 is under tension. The energy generated by the prosthetic foot coming down is thus stored in the dorsal spring element 8. This energy is at a maximum when the heel portion 5 has reached maximal plantar flexure (turned clockwise) in relation to the lower leg portion 6. In situation b, the lower leg portion 6 is shown to be tilted in relation to the vertical. However, this does not mean that the front portion of the foot 1 is necessarily always in a condition of plantar flexure in relation to the lower leg portion 6. When continuing the walking motion as shown in situation c, the user of the prosthetic foot will flex dorsally, which results in the release of the dorsal spring element 8 and the tensioning of the plantar spring element 7. The energy stored in the dorsal spring element 8 during placement of the prosthetic foot as shown in Sub-Fig. b is released, making it available for tensioning the plantar spring element 7, which

provides the coupling between the toe portion 4 and the lower leg portion 6.

Sub-Fig. d shows the situation in which the amount of built-up plantar flexing moment developed by the plantar spring element 7 around the ankle hinge is such, that the heel portion 5 comes off the ground, while the front portion of the foot 1 undergoes plantar flexure in relation to the lower leg portion 6. This provides the desired elongation of the lower leg portion 6, with the result that the user's torso continues to be supported at a correct height. During the further push-off of the prosthetic foot the loads will decrease further so that the plantar spring element will be released also.

Figs. 1 and 2 show the construction and working of the prosthetic foot, with the plantar spring element 7 providing the coupling between the toe portion 4 and the lower leg portion 6.

Figs. 3 and 4 show the construction and working with the plantar spring element 7 being coupled between the toe portion 4 and the heel portion 5. In the construction shown in Fig. 3, the heel portion 5 then needs to be coupled to the lower leg portion 6 by means of a heel spring element 9. For the remainder, the mutual coupling between the lower leg portion 6, the front of the foot part 1, the heel portion 5 and the toe portion 4 is provided in a similar manner as that shown in the embodiment of Fig. 1. It should be noted at this point that the said coupling of the heel portion 5 with the lower leg portion 6 by means of the heel spring element 9 is realised using a switching coupling 10.

Situation a in Fig. 4 shows the prosthetic foot in the unloaded condition; the heel spring element 9 is uncoupled. Situation b shows that the heel portion 5 is in contact with the ground; the dorsal spring 8 is under tension and, as shown in situation c, the plantar spring element 7 in turn also comes under tension, effecting the coupling of the heel spring element 9 with the lower leg portion 6. When subsequently dorsal flexure occurs as shown in situation d, the dorsal spring 8 is released, the

heel spring element 9 comes under tension and the plantar spring 7 remains under tension. In the further rolling-off motion of the prosthetic foot, in which the front portion of the foot 1 undergoes plantar flexure in relation to the lower leg portion 6, the plantar spring 7 and the heel spring element 9 are released. Eventually the heel spring element 9 will uncouple from the lower leg portion to allow the prosthetic foot to return to the unloaded condition (see situation a).

10 It should be noted that although the design of the prosthetic foot elucidated in Figs. 3 and 4 illustrating the second embodiment requires a switching mechanism, this switching mechanism may also be omitted by suitably dimensioning the prosthetic foot.

15 The prosthesis and/or orthosis proposed in accordance with the invention shows that plantar flexure (straightening) of the prosthesis according to the invention can be realised, which makes it possible to achieve the necessary elongation of the leg in the push-off stage of the rolling-off motion of the foot. The combined application of the plantar spring element and the dorsal spring element as proposed in accordance with the invention allows the prosthetic foot according to the invention to be used at a very high energy conversion efficiency.

CLAIMS

1. A prosthesis or orthosis for a member of a human body, comprising limb-forming components, which components are connected by pivoting couplings, and at least one first spring element whose ends are coupled with components that are distinguishable from each another, **characterized** in that a coupling element is provided spanning at least two pivoting couplings of a limb-forming component or part.

2. A prosthesis or orthosis according to claim 1, wherein the member is a foot, **characterized** in that the parts comprise a lower leg portion, a heel portion, a front portion of the foot and a toe portion, wherein the front portion of the foot **at either side ends in an ankle hinge and a toe hinge**, respectively, for the coupling of on the one hand the heel portion and the lower leg portion, and on the other end the toe portion, and in that the coupling element spans the pivot couplings of the front portion of the foot.

3. A prosthesis or orthosis according to claim 2, **characterized** in that the coupling element is connected on the one hand with the toe portion and on the other hand with a selection made from the group comprised of the lower leg portion and the heel portion.

4. A prosthesis or orthosis according to claim 2 or 3, **characterized** in that the coupling element is connected on the one hand with the toe portion and on the other hand with the lower leg portion.

5. A prosthesis or orthosis according to claim 4, **characterized** in that the front portion of the foot and the heel part are integrated to form a whole.

6. A prosthesis or orthosis according to one of the preceding claims, **characterized** in that the coupling element is the first spring element.

7. A prosthesis or orthosis according to one of the claims 2-6, **characterized** in that the heel portion and the lower leg portion share the ankle hinge of the front

8

portion of the foot, while also being mutually coupled via a second spring element.

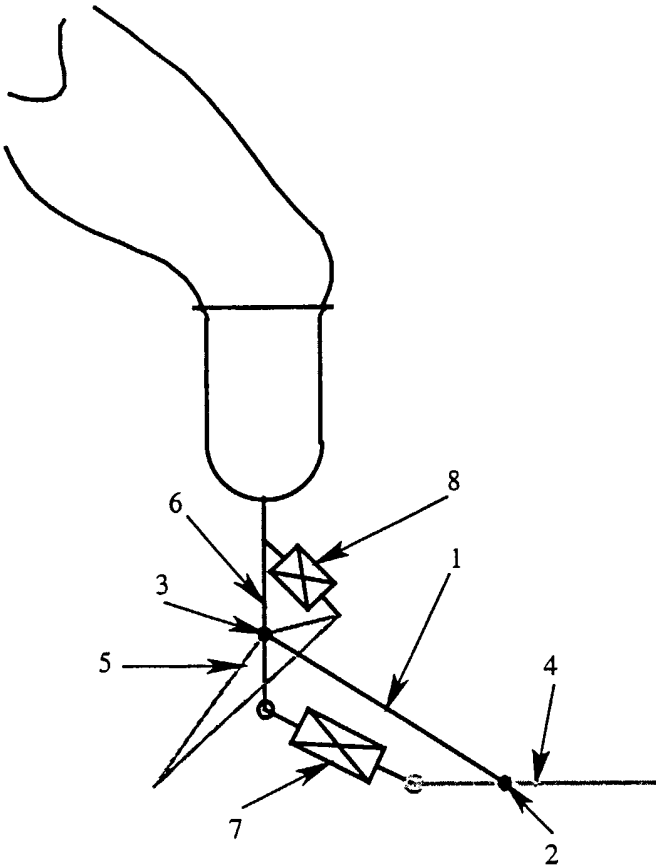


FIG. 1

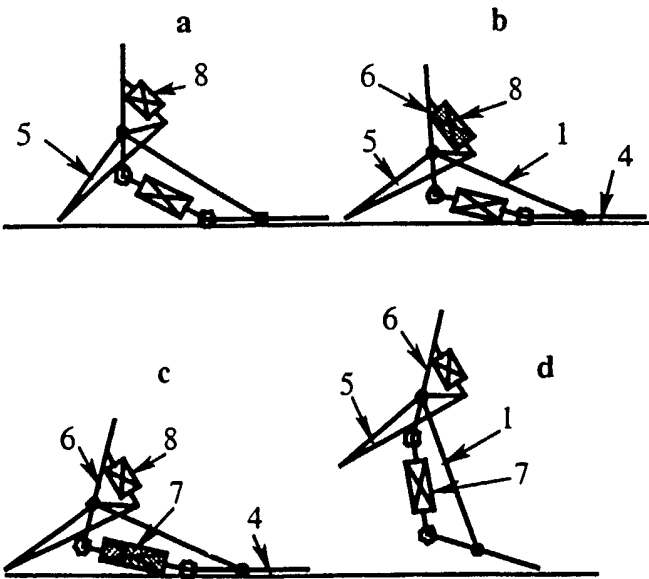


FIG. 2

INTERNATIONAL SEARCH REPORT

PCT/NL 02/00497

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61F2/66 A61F2/60

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	DE 100 10 302 A (HORACEK GREGOR) 20 September 2001 (2001-09-20) claims; figures ---	1,2,6
X	DE 309 066 C (ELSASSER OSKAR) 13 November 1917 (1917-11-13) cited in the application page 1, line 56 -page 2, line 87; claims; figures ---	1-4,6
X	WO 00 23017 A (FOUNTAINHEAD) 27 April 2000 (2000-04-27) cited in the application page 3, last line -page 6, line 1; claims; figures ---	1
A	---	2-7
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

21 October 2002

Date of mailing of the international search report

06/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kuehne, H-C

INTERNATIONAL SEARCH REPORT

PCT/NL 02/00497

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	NL 1 003 979 C (ARIE VAN WIERINGEN VIDEO FILM) 9 March 1998 (1998-03-09) page 5, line 23 -page 6, line 7 figures 6,7	1,6
A	----- NL 1 010 209 C (GRIFFIONEN TE LOENEN A M W) 30 March 2000 (2000-03-30) cited in the application claims; figures -----	1

INTERNATIONAL SEARCH REPORT

PCT/NL 02/00497

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
DE 10010302	A	20-09-2001	DE	10010302 A1	20-09-2001
DE 309066	C		NONE		
WO 0023017	A	27-04-2000	US	6306178 B1	23-10-2001
			AU	1445600 A	08-05-2000
			WO	0023017 A1	27-04-2000
NL 1003979	C	09-03-1998	NL	1003979 C2	09-03-1998
NL 1010209	C	30-03-2000	NL	1010209 C2	30-03-2000