




(86) **Date de dépôt PCT/PCT Filing Date:** 2013/04/30
(87) **Date publication PCT/PCT Publication Date:** 2013/11/07
(45) **Date de délivrance/Issue Date:** 2020/09/22
(85) **Entrée phase nationale/National Entry:** 2014/10/28
(86) **N° demande PCT/PCT Application No.:** US 2013/038778
(87) **N° publication PCT/PCT Publication No.:** 2013/165957
(30) **Priorité/Priority:** 2012/04/30 (US61/640,369)

(51) **Cl.Int./Int.Cl. B67D 1/12** (2006.01),
B65D 33/38 (2006.01), **B67D 3/00** (2006.01)
(72) **Inventeur/Inventor:**
JOHNSON, JAMES, US
(73) **Propriétaire/Owner:**
LIQUI-BOX CORPORATION, US
(74) **Agent:** METHOD LAW PROFESSIONAL
CORPORATION

(54) **Titre : DOUILLE DE TUBE A UTILISER AVEC UNE DOUILLE DE ROBINET POUR DISTRIBUER DES FLUIDES**
(54) **Title: A TUBE FITMENT FOR USE WITH A VALVE FITMENT FOR DISPENSING FLUIDS**

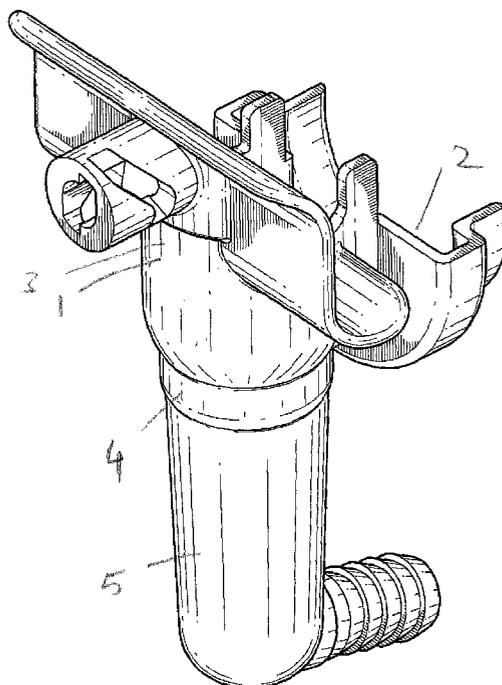

(57) **Abrégé/Abstract:**

This invention relates to a tube fitment that is used with a valve fitment assembly used to dispense fluids or flowable materials from a container. The tube fitment is utilized in conjunction with the valve fitment assembly to allow the fitment assembly to be used with a spout and valve assembly attached to a container holding fluid. This invention also relates to a process for dispensing fluid using the adapter described herein.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau(10) International Publication Number
WO 2013/165957 A1(43) International Publication Date
7 November 2013 (07.11.2013)

(51) International Patent Classification:

B67D 1/12 (2006.01) **B67D 3/00** (2006.01)
B65D 33/38 (2006.01)

(21) International Application Number:

PCT/US2013/038778

(22) International Filing Date:

30 April 2013 (30.04.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/640,369 30 April 2012 (30.04.2012) US

(71) Applicant: **LIQUI-BOX CORPORATION** [US/US];
P.O. Box 494, 6950 Worthington-Galena Raod, Worthington, Ohio 43085-0494 (US).(72) Inventor: **JOHNSON, James**; 1516 Cheshire Road,
Delaware, Ohio 43015 (US).(74) Agents: **MEHTA, Rakesh** et al.; P.O. Box 494, 1313 N.
Market Street, Wilmington, Delaware 19899-0951 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

[Continued on next page]

(54) Title: A TUBE FITMENT FOR USE WITH A VALVE FITMENT FOR DISPENSING FLUIDS

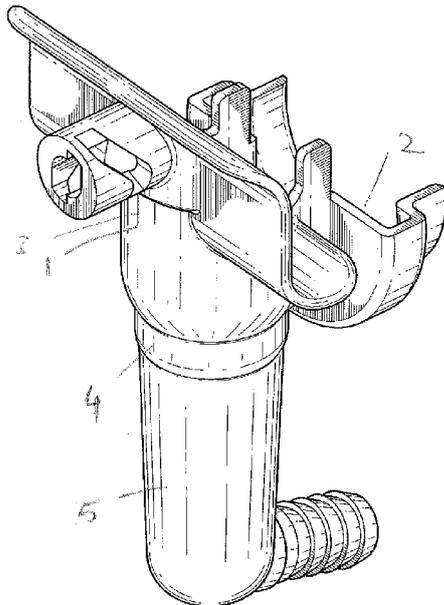


FIG. 1

(57) Abstract: This invention relates to a tube fitment that is used with a valve fitment assembly used to dispense fluids or flowable materials from a container. The tube fitment is utilized in conjunction with the valve fitment assembly to allow the fitment assembly to be used with a spout and valve assembly attached to a container holding fluid. This invention also relates to a process for dispensing fluid using the adapter described herein.

WO 2013/165957 A1

WO 2013/165957 A1 

- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

Title**A Tube Fitment for Use with a Valve Fitment for Dispensing Fluids****Field of Invention**

5 This invention relates to a tube fitment that is used with a valve fitment assembly used to dispense fluids or flowable materials from a container. The tube fitment is utilized in conjunction with the valve fitment assembly to allow the fitment assembly to be used with a spout and valve assembly attached to a container holding fluid.

Background

10 For example, a valve fitment assembly may be used to dispense liquid from a collapsible bag or container. However, this fitment assembly can only be used in conjunction with a certain design of spout and valve assembly that is attached to the container. Containers having a different spout and valve assembly design cannot be used with this valve fitment assembly.

15

The tube fitment of this invention allows for the use of such a valve fitment to be used with other spout and valve assemblies attached to a fluid container.

Summary of Invention

20 In one embodiment, this invention relates to a tube fitment used in a fitment valve assembly comprising:

(I) a vertical cylindrical housing, and

(II) a horizontal cylindrical channel;

25

wherein said vertical cylindrical housing comprises a top section, a middle section, and a lower section;

wherein said vertical cylindrical housing and said horizontal cylindrical channel are connected
30 to each other in a T-shape;

wherein said top section of said vertical cylindrical housing comprises a front wall, and is partially open at the back wall, wherein said opening is the locus for connecting a spout-valve assembly attached to a container that dispenses fluid;

5 wherein said horizontal cylindrical channel comprises at least a first opening;

wherein said first opening is at the first end proximate to the joint of said T-shaped tube fitment, and at the top of said horizontal cylindrical channel such that said first opening opens at the bottom of said first section of said vertical cylindrical housing and at the top of said second
10 section of said vertical cylindrical housing;

wherein at the base of said third section said vertical cylindrical housing directly below said first opening in said horizontal cylindrical channel comprises an activator pin;

15 wherein at the top of said first opening proximate to the bottom of said first section said vertical cylindrical housing is an O-ring for sealing attachment with said spout-valve assembly;

wherein said O-ring is situated in said second section of said vertical cylindrical housing that is narrower than said first section of said vertical cylindrical housing.

20

In one embodiment, this invention relates to the tube fitment as recited above, wherein said front wall, on the inside, comprises a locking groove for locking said tube fitment to said spout-valve assembly.

25 In one embodiment, this invention relates to the tube fitment as recited above, wherein said front wall, on the inside, also comprises a locking hole above said locking groove for locking said tube fitment to said spout-valve assembly through a twist knob movable between the in and out position through said locking hole.

30 In another embodiment, this invention relates to the tube fitment as recited above, wherein said top section of said vertical cylindrical housing comprises two optionally J-shaped pull-tabs attached to the two sides of said front wall, such that said vertical cylindrical housing's side walls protrude over the base of said J-shaped pull-tabs.

In yet another embodiment, this invention relates to the tube fitment as recited above, wherein attached to the opening at the back wall of said vertical cylindrical housing is an U-shaped tray that supports said spout-valve assembly attached to the fluid dispensing container.

5

In another embodiment, this invention relates to the tube fitment as recited above, wherein said tray is U-shaped.

In another embodiment, this invention relates to the tube fitment as recited above, wherein said
10 activator pin is supported by at least one ridge.

In yet another embodiment, this invention relates to the tube fitment as recited above, wherein said at least one ridge is rectangular.

15 In another embodiment, this invention relates to the tube fitment as recited above, wherein said activator pin is cylindrical.

Brief Description of Drawings

Fig. 1 is a line diagram of the perspective view of the tube fitment in the front view;

20

Fig. 2 is a line diagram of the front view of the tube fitment;

Fig. 3 is a line diagram of the left side view of the tube fitment;

25 Fig. 4 is a line diagram of the back view of the tube fitment;

Fig. 5 is a line diagram of the right side view of the tube fitment;

Fig. 6 is a line diagram of the top view of the tube fitment;

30

Fig. 7 is a line diagram of the bottom view of the tube fitment;

Fig. 8 is a line diagram of the perspective view of the tube fitment in the back view;

Fig 9 is a line diagram of the cross-sectional view of the tube fitment in the side view;

5 Fig. 10 is a line diagram of the perspective view of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment;

Fig. 11 is a line diagram of the front view of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment;

10 Fig. 12 is a line diagram of the left side view of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment;

Fig. 13 is a line diagram of the bottom side view of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment;

15 Fig. 14 is a line diagram of the right side view of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment;

20 Fig. 15 is a line diagram of the back view of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment;

Fig. 16 is a line diagram of the bottom view of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment;

25 Fig. 17 is a line diagram of the perspective view from the back of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment; and

30 Fig. 18 is a line diagram of the cross-sectional view of the tube fitment attached to the spout and valve dispensing system with the locking twist knob inserted in the tube fitment, in the side view.

Detailed Description of the Invention

Ranges are used herein in shorthand, so as to avoid having to list and describe each and every value within the range. Any appropriate value within the range can be selected as the upper value, lower value, or the terminus of the range.

- 5 As used herein, the singular form of a word includes the plural, and vice versa, unless the context clearly dictates otherwise. Thus, the references “a,” “an,” and “the” are generally inclusive of the plurals of the respective terms. For example, reference to “a method” includes a plurality of such “methods.” Likewise, the terms “include,” “including,” and “or” should all be construed to be inclusive, unless such a construction is clearly prohibited from the context.
- 10 Similarly, the term “examples,” particularly when followed by a listing of terms, is merely exemplary or illustrative and should not be deemed to be exclusive or comprehensive.

The term “comprising” is intended to include embodiments encompassed by the terms “consisting essentially of” and “consisting of.” Similarly, the term “consisting essentially of” is
15 intended to include embodiments encompassed by the term “consisting of.”

The methods and compositions and other advances disclosed herein are not limited to particular equipment or processes described herein because, as the skilled artisan will appreciate, they may vary. Further, the terminology used herein is for the purpose of describing particular
20 embodiments only, and is not intended to, and does not, limit the scope of that which is disclosed or claimed.

Unless defined otherwise, all technical and scientific terms, terms of art, and acronyms used herein have the meanings commonly understood by one of ordinary skill in the art in the field(s)
25 of the invention, or in the field(s) where the term is used. Although any compositions, methods, articles of manufacture, or other means or materials similar or equivalent to those described herein can be used in the practice of the present invention, the preferred compositions, methods, articles of manufacture, or other means or materials are described herein.

30

The discussion of those references is intended merely to summarize the assertions made therein. No admission is made that any such patents, patent applications,

publications or references, or any portion thereof, are relevant, material, or prior art. The right to challenge the accuracy and pertinence of any assertion of such patents, patent applications, publications, and other references as relevant, material, or prior art is specifically reserved.

5 As used herein, the term "flowable material" encompasses materials that are flowable under gravity or may be pumped. Such materials include liquids, for example, milk, water, fruit juice, oil; emulsions, for example, ice cream mix, soft margarine; pastes, for example, meat pastes, peanut butter; preserves, for example, jams, pie fillings, marmalade; jellies; doughs; ground
10 meat, for example, sausage meat; powders, for example, gelatin powders, detergents; granular solids, for example, nuts, sugar; and like materials. The invention described herein is particularly useful for flowable foods such as wine or milk.

A perspective view from the top, a perspective view from the front and a perspective view from the back are shown for the tube fitment-spout combination of the present invention in Figs. 6, 7,
15 and 8, respectively. The tube fitment comprises of a vertically oriented housing, that comprises of (1) a top section or the first cylindrical section; (2) a middle section or the second cylindrical section; and (3) a lower section or the third cylindrical section. The cylindrical sections are preferably of a tapered shape. Extending from the top section to its back side, is a horizontal channel. The vertical housing has a top end, middle end, and the lower end. The top end is
20 partially open to the outside, towards its back side, forming the horizontal channel.

In one embodiment, the tube fitment is a single piece of plastic. The vertical housing is generally cylindrical, with an opening on its back side, that is, the top end of the vertical cylinder is only partially complete. As a matter of fact, in one embodiment, the back side of the vertical
25 housing is open such that only about two-thirds of the top end of the cylinder is closed, and which displays a cut-away section.

The open portion of the top end of the vertical cylindrical housing on its back side is used to connect the tube fitment to a spout and a valve assembly attached to a fluid container. Attached
30 to the top of the vertical cylindrical housing on either side of the top end of the open cylinder on the outside of the cylinder are two, optionally J-shaped (optionally, nominally S-shaped), pull tabs that are used to detach the tube fitment from the spout and valve assembly attached to the fluid container. The partial cylindrical portion that extends above the J-shaped pull tabs is

designed dimensionally such that attachment of the tube fitment to the spout and valve assembly of the fluid container helps activate the spout and valve, to open the fluid container and initiate the flow of the fluid out of the container.

5 When the tube fitment is attached to the spout and the valve assembly, the partial vertical cylindrical housing extending beyond the J-shaped pull tabs activates at least one, and preferably two optionally horizontal wings attached to the spout and valve assembly, by moving them vertically upward. This vertically upward movement opens the valve within the spout and valve assembly thereby rendering the flow movement out to the middle to lower end of the
10 vertical cylindrical housing. The activation is also aided by an optional seal activator pin described below. The vertical cylindrical housing wall at its top end extends as high as the top portion of the J-shaped pull tabs, and in some instances, even higher. In some instances, it is below the J-shaped pull tabs.

15 In the extended portion of the cylindrical wall, at the top, on the inside, and in between the J-shaped pull tabs is a locking groove or an indentation channel that goes within the depth of the vertical cylindrical housing's extended portion. The locking groove locks the tube fitment to the top ridge of the spout and valve assembly attached to the fluid container. In the extended portion of the cylindrical wall, at the top, on the inside, above the locking groove, and in between
20 the J-shaped pull tabs is an indentation that goes within the depth of the vertical cylindrical housing's extended portion. The indentation is the locus for inserting a locking peg or pin, that is inserted by a twist knob at the other end of the pin, residing on the outside of the J-shaped pull tabs. The twist knob's rotary action moves the locking pin towards the inside of the J-shaped pull tabs. In one embodiment, when the tubing fitment is attached to the spout and
25 valve assembly attached to the fluid container, the twist knob is inserted inward so that the locking pin sits above the top of the upper ridge of the spout and valve assembly. This position of the locking pin ensures that the tube fitment is not detached from the spout and valve assembly, accidentally or otherwise. The locking pin can be snugly fit over the top ridge of the spout and valve assembly, or, in an alternative embodiment, a gap exists between the locking pin
30 and the top ridge of the spout and valve assembly.

The locking pin locks the tube fitment to the top ridge of the spout and valve assembly attached to the fluid container. When the tube fitment is locked with the spout and valve assembly, the

spout and valve assembly fits snugly within the partially open vertical cylindrical housing. A bottom tray attached to the bottom portion of the open vertical cylindrical housing helps in snugly fitting the spout and valve assembly to the tube fitment. The preferably U-shaped bottom tray with two vertical walls is attached (in the embodiment that is a monolithic tube fitment) to the partial cylindrical wall of the vertical housing and forms the protrusion beyond the partial cylindrical wall and appears in a U-shape when viewed in the back view of the tube fitment.

The vertical cylindrical housing of the tube fitment, in a preferred embodiment, can taper into a second cylindrical section, a middle section, located at the joint of the two legs of the L-shaped tube fitment (a preferred embodiment is a monolithic structure without a joint). The second cylindrical section, which is smaller than the vertical cylindrical housing in diameter, houses a snugly fit O-ring or other device that also helps secure the tube fitment to the valve and spout fitment on the dispensing container. The O-ring provides the seal between the horizontal cylindrical channel of the tube fitment and the spout of the valve and spout assembly, such that, when the valve is opened as a result of the activator action, the fluid flows out the horizontal cylindrical channel and down for dispensation.

The second cylindrical section, or the middle section, extends into an optionally tapered third section, or the lower section. At the bottom, and on the inside of the third section, is provided an optional cylindrical shaped pin also known as seal activator pin, which acts as an activator to commence fluid dispensation. The cylindrical pin extends upwards, from the base of the lower section up to the middle section, where, its tip helps activate the valve of the spout and valve assembly. The force of action of attachment of the tube fitment to the valve and spout assembly pushes the pin upwards, into the spout, and activates the spout by opening the seal inside the spout. This activation is in conjunction with the lifting of the two horizontal wings on the spout and valve assembly, which also aid in activation and fluid flow as the wings are internally mechanically attached to facilitate the opening of the seal. The cylindrical pin located at the bottom of the horizontal cylinder's first end is optionally supported by ridges, that in preferred embodiments are one or more triangular vertical ridges attached to the cylindrical pin. The ridges, triangular or otherwise, help against the bending of the cylindrical pin upon exertion of pressure on the pin for activation purposes. In one embodiment, the ridges or ribs are

rectangular and perpendicular to the surface of the cylindrical pin and in a radial orientation, extending from the base of the pin to its tip.

5 Once the pin activates the valve, fluid flows from the spout, through the valve, an external to the pin, in the flow channels. The flowing fluid is taken for dispensation by an additional tubing attached to the lower end of the vertical cylindrical housing.

10 The tube fitment acts as an in-between sleeve—on its one end, it has adequate design that connects with the spout and valve assembly, and on the other end, it has design features that help connect with the dispensing system. The tube fitment is generally locked in with the dispensing system, and not the spout and valve fitment assembly. The tube fitment-dispensing system assembly is jointly connected with the spout and valve assembly as and when needed. Stated another way, once the dispensation of the fluid is completed, the tube fitment is left
15 attached to the dispensing mechanism, and not the spout and valve assembly because once the tube fitment (or the tube fitment-dispensing mechanism assembly) is attached to the spout valve system, the overall assembly would in an open position with the fluid flowing into the dispensing system.

20 This invention relates to a process for dispensing fluid from a fluid container using the parts described above.

Abbreviations

- 1 vertical cylindrical housing
- 2 horizontal channel
- 25 3 top cylindrical section or first cylindrical section
- 4 middle cylindrical section or second cylindrical section
- 5 lower cylindrical section or third cylindrical section
- 6 locking groove
- 7 opening on backside of the vertical housing or cut-away section
- 30 8 spout and valve assembly connected to fluid container
- 9 J-shaped pull tabs
- 10 partial cylindrical portion that extends above the J-shaped pull tabs
- 11 horizontal wings

- 12 seal activator pin
- 15 top ridge of the spout and valve assembly
- 16 bottom tray
- 17 vertical walls of the U-shaped bottom tray
- 5 18 second cylindrical section
- 19 vertical cylindrical housing tapered into a second cylindrical section
- 21 O-ring
- 23 dispensing setup
- 25 locked position (open channel for fluid flow) of the dispensing setup and the tube fitment
- 10 26 flexible pipe
- 100 tube-fitment

CLAIMS

1. A tube fitment used in a fitment valve assembly comprising:
 - (I) a vertical cylindrical housing, and (II) a horizontal cylindrical channel;
wherein said vertical cylindrical housing comprises a top section, a middle section, and a lower section;
wherein said vertical cylindrical housing and said horizontal cylindrical channel are connected to each other in a T-shape;
wherein said top section of said vertical cylindrical housing comprises a front wall, and is partially open at the back wall, wherein said opening is the locus for connecting a spout-valve assembly attached to a container that dispenses fluid;
wherein said horizontal cylindrical channel comprises at least a first opening;
wherein said first opening is at the first end proximate to the joint of said T-shaped tube fitment, and at the top of said horizontal cylindrical channel such that said first opening opens at the bottom of said top section of said vertical cylindrical housing and at the top of said middle section of said vertical cylindrical housing;
wherein at the base of said lower section said vertical cylindrical housing directly below said first opening in said horizontal cylindrical channel comprises an activator pin;
wherein at the top of said first opening proximate to the bottom of said top section said vertical cylindrical housing is an O-ring for sealing attachment with said spout-valve assembly;
wherein said O-ring is situated in said middle section of said vertical cylindrical housing that is narrower than said top section of said vertical cylindrical housing.
2. The tube fitment as recited in Claim 1, wherein said front wall, on the inside, comprises a locking groove for locking said tube fitment to said spout-valve assembly.
3. The tube fitment as recited in Claim 2, wherein said front wall, on the inside, also comprises a locking hole above said locking groove for locking said tube fitment to said spout-valve assembly through a twist knob movable between the in and out position through said locking hole.

4. The tube fitment as recited in Claim 3, wherein said top section of said vertical cylindrical housing comprises two optionally J-shaped pull-tabs attached to the two sides of said front wall, such that said vertical cylindrical housing's side walls protrude over the base of said J-shaped pull-tabs.
5. The tube fitment as recited in Claim 4, wherein attached to the opening at the back wall of said vertical cylindrical housing is a tray that supports said spout-valve assembly attached to the fluid dispensing container.
6. The tube fitment as recited in Claim 5, wherein said tray is U-shaped.
7. The tube fitment as recited in Claim 6, wherein said activator pin is supported by at least one ridge.
8. The tube fitment as recited in Claim 7, wherein said at least one ridge is rectangular.
9. The tube fitment of Claim 8, wherein said activator pin is cylindrical.

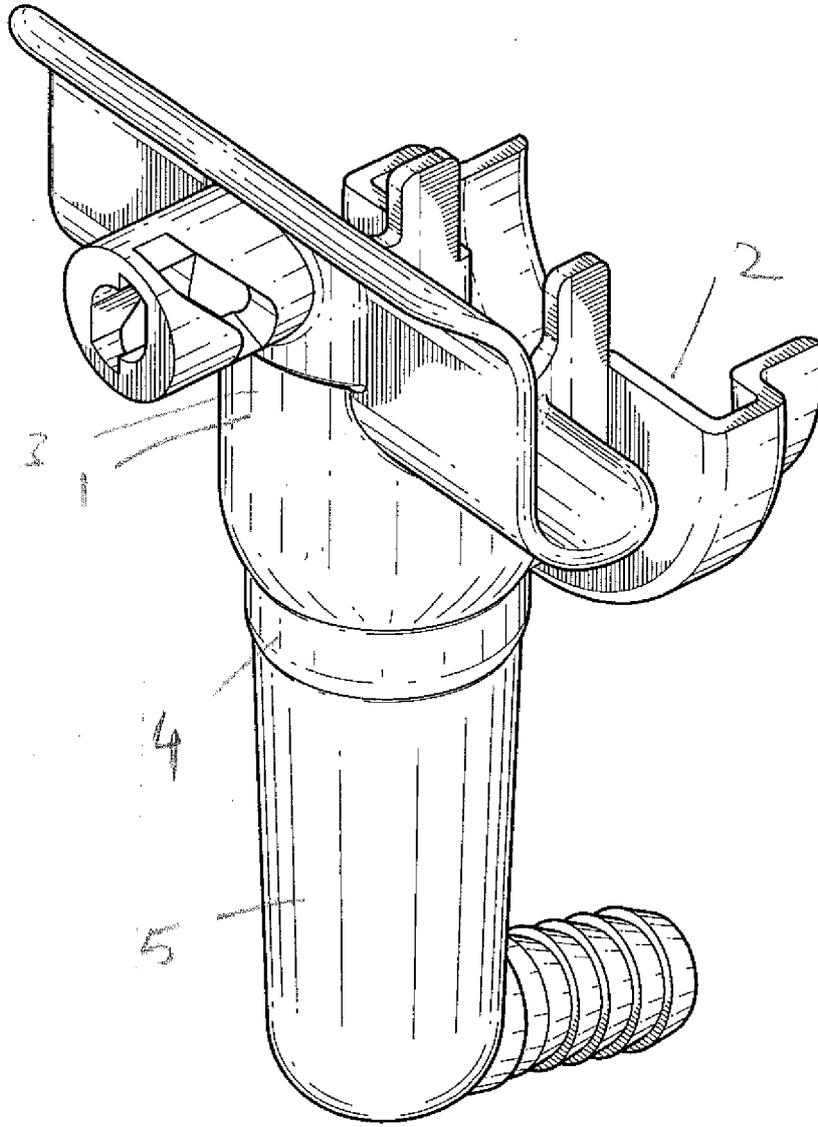


FIG. 1

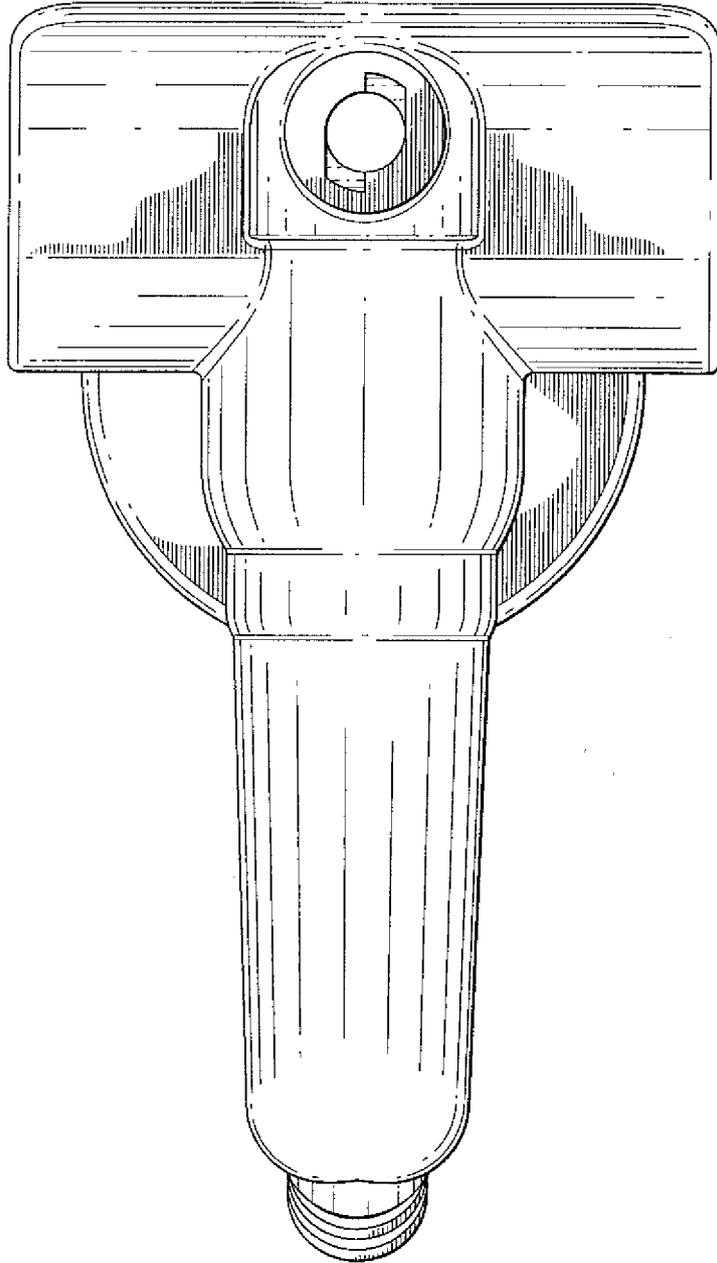


FIG. 2

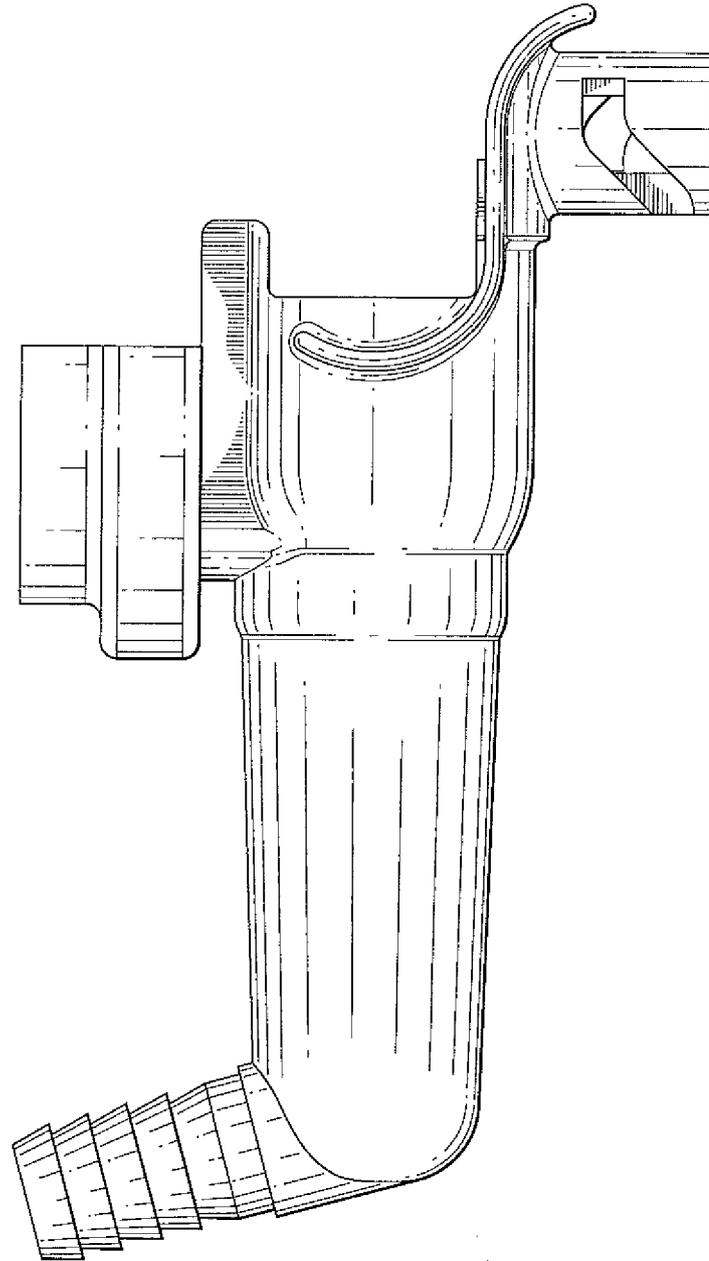


FIG. 3

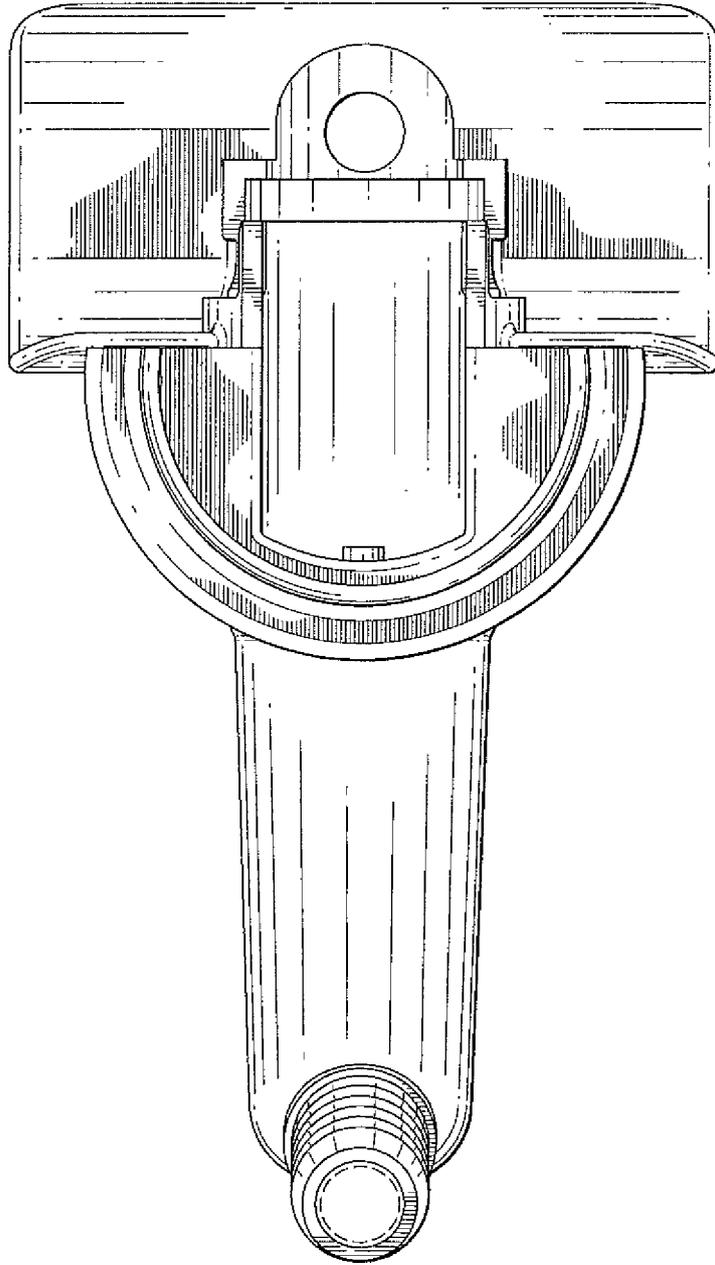


FIG. 4


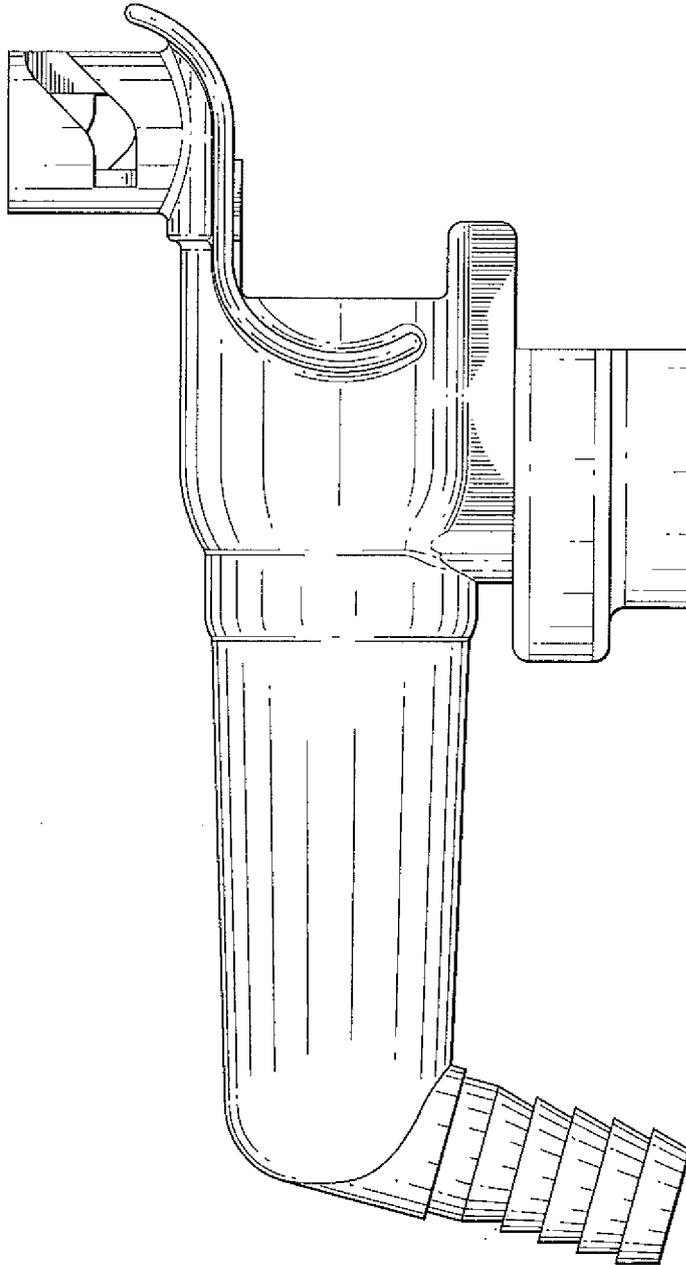


FIG. 5

→ FIG. 9

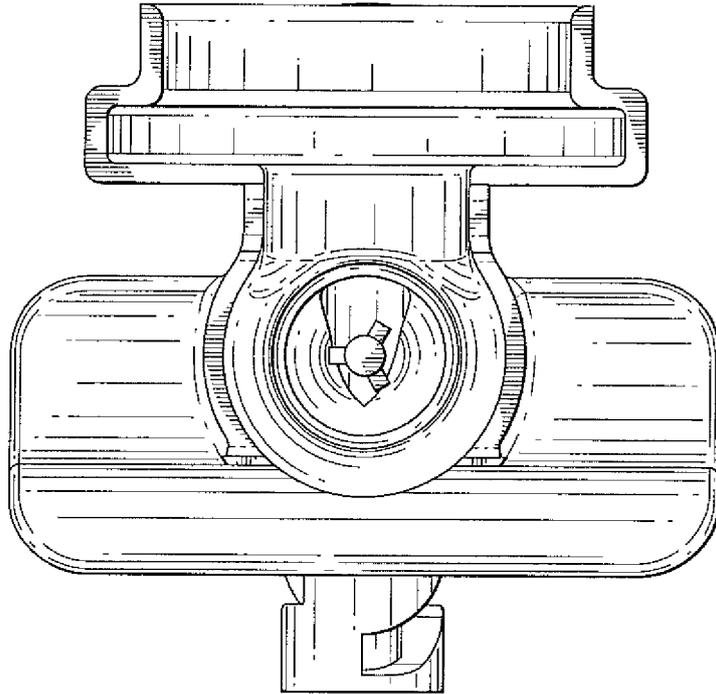

→ FIG. 9

FIG. 6

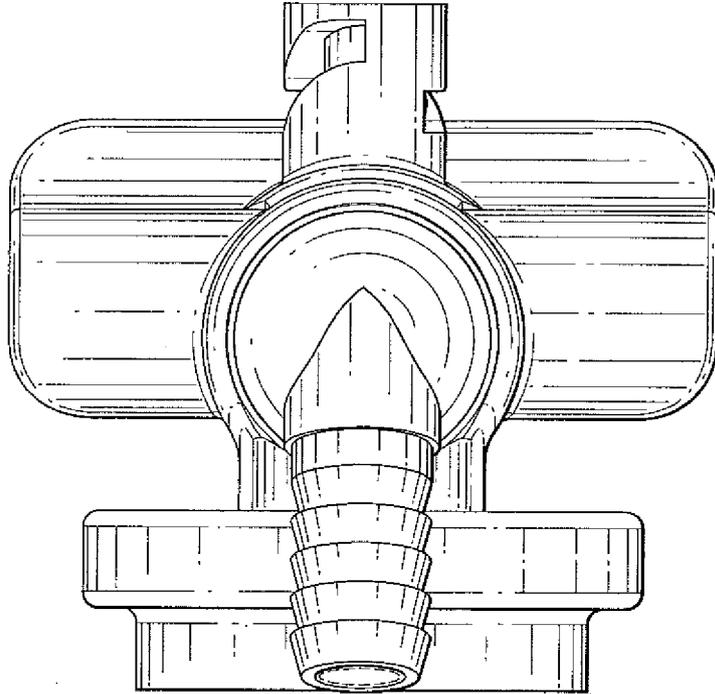


FIG. 7

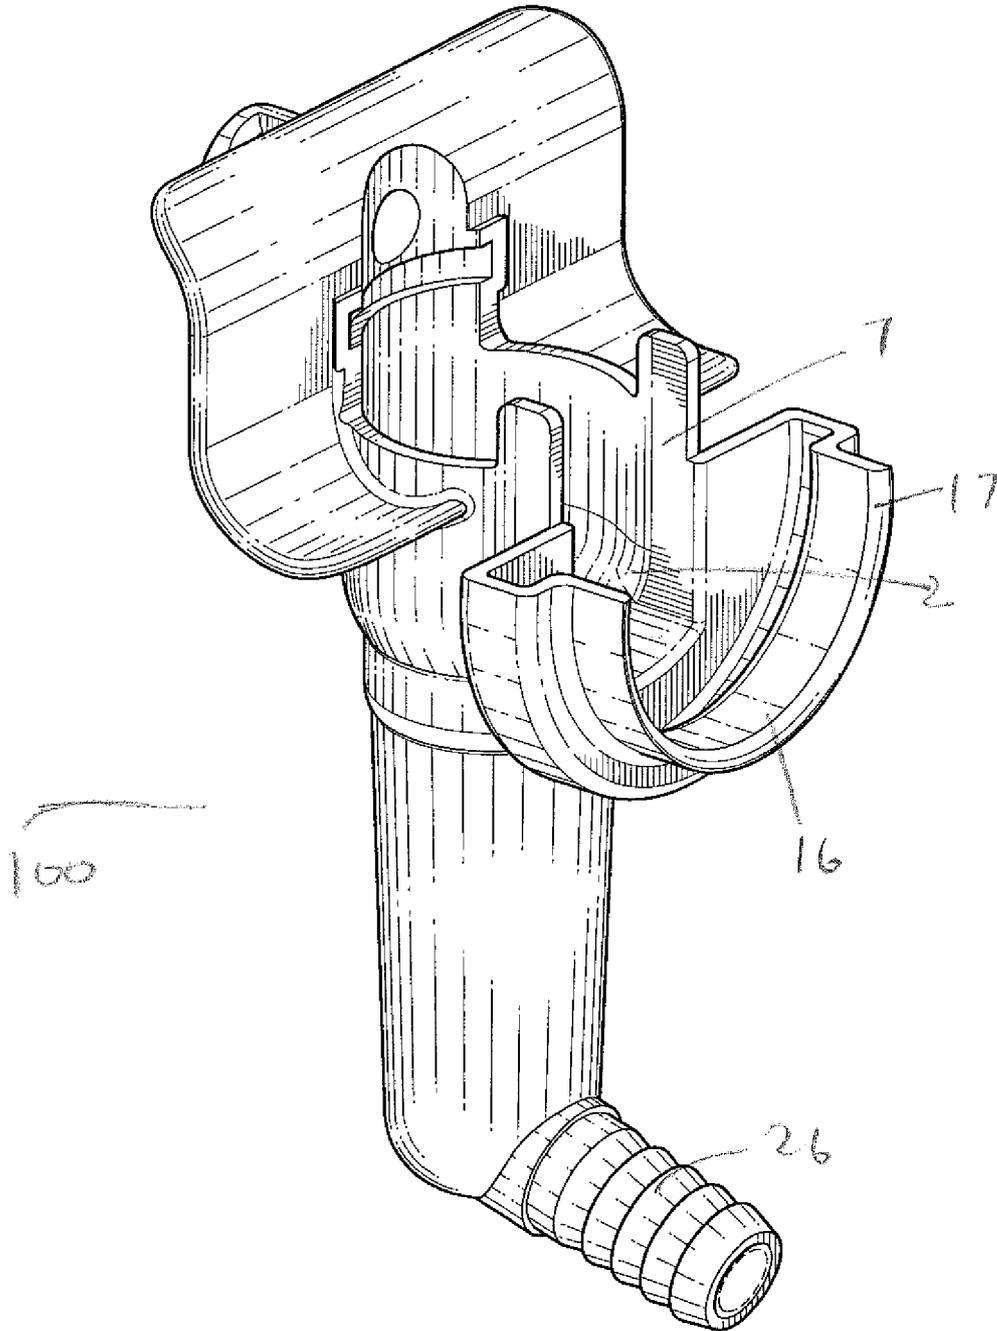


FIG. 8

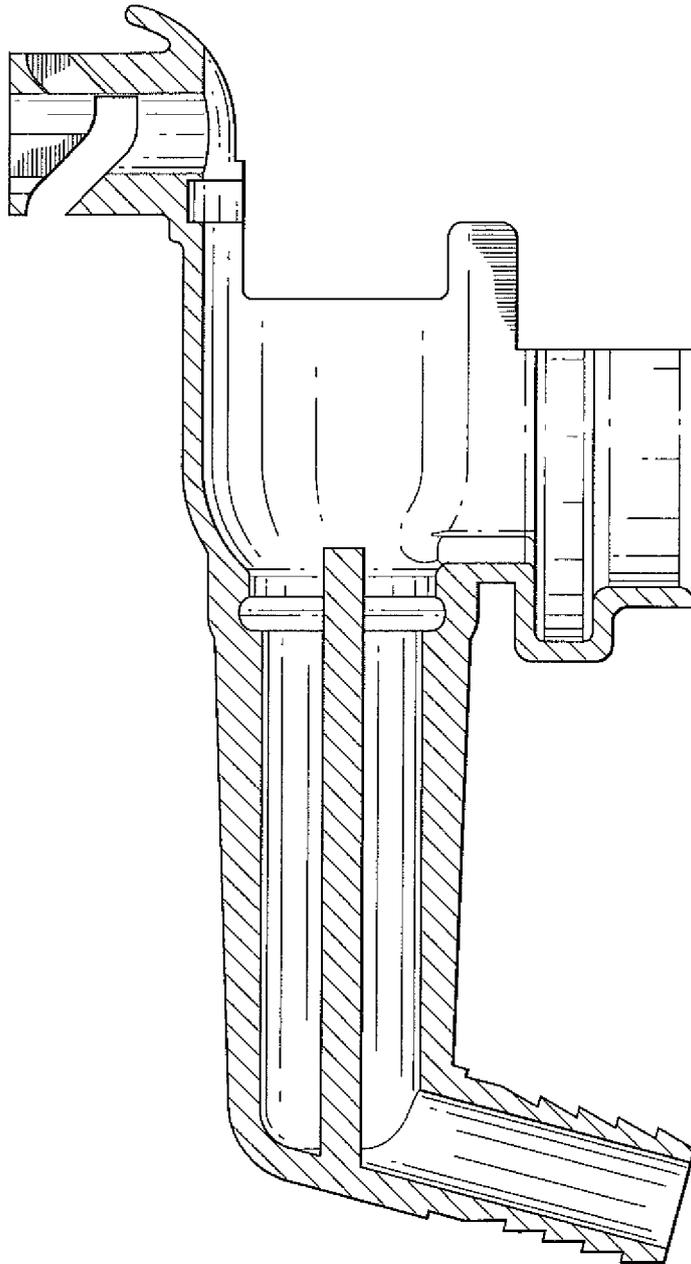


FIG. 9

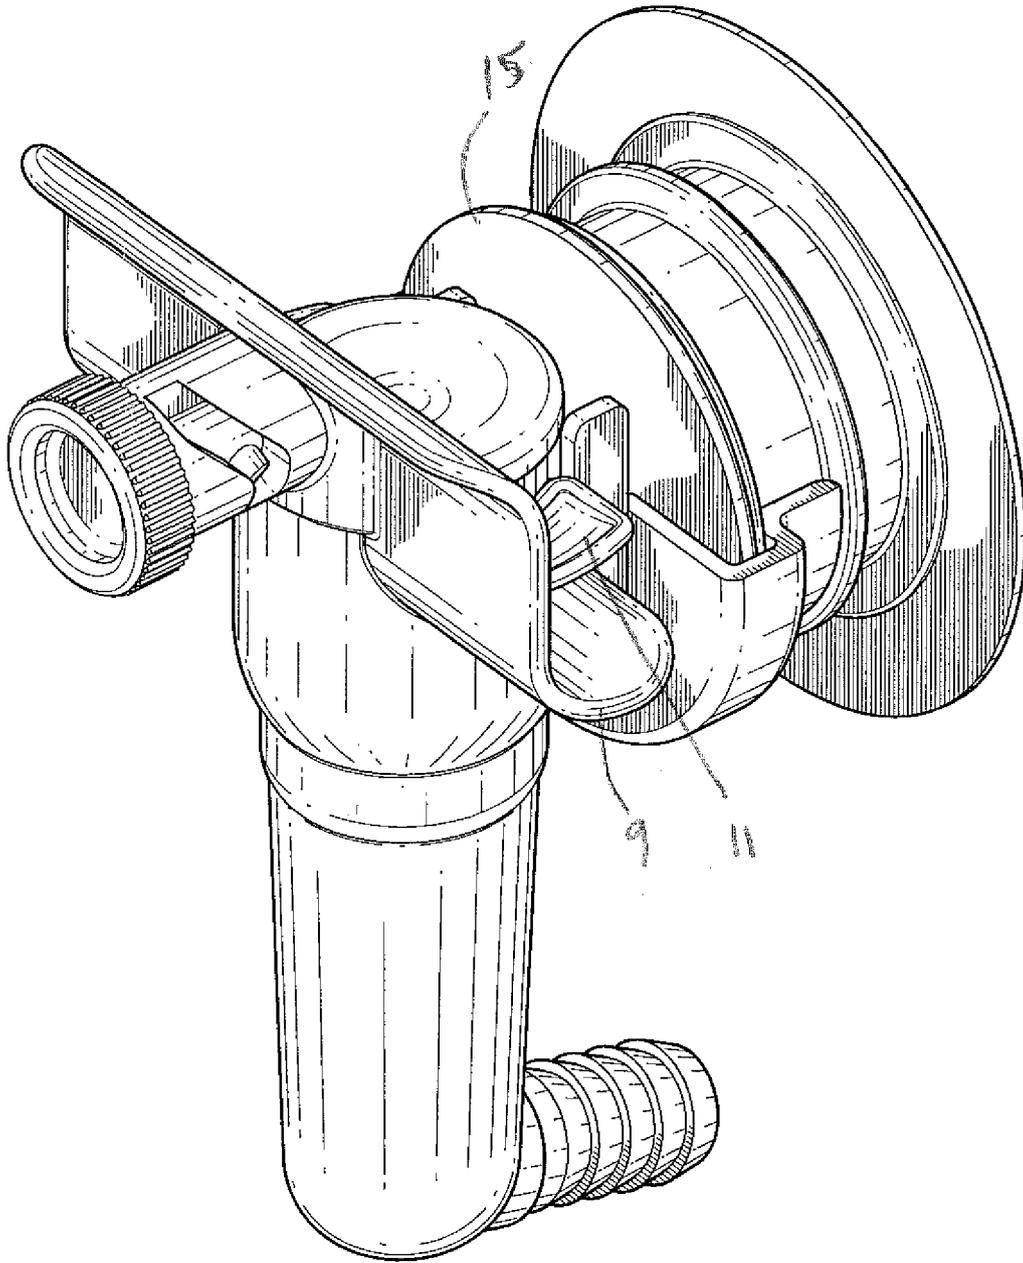


FIG. 10

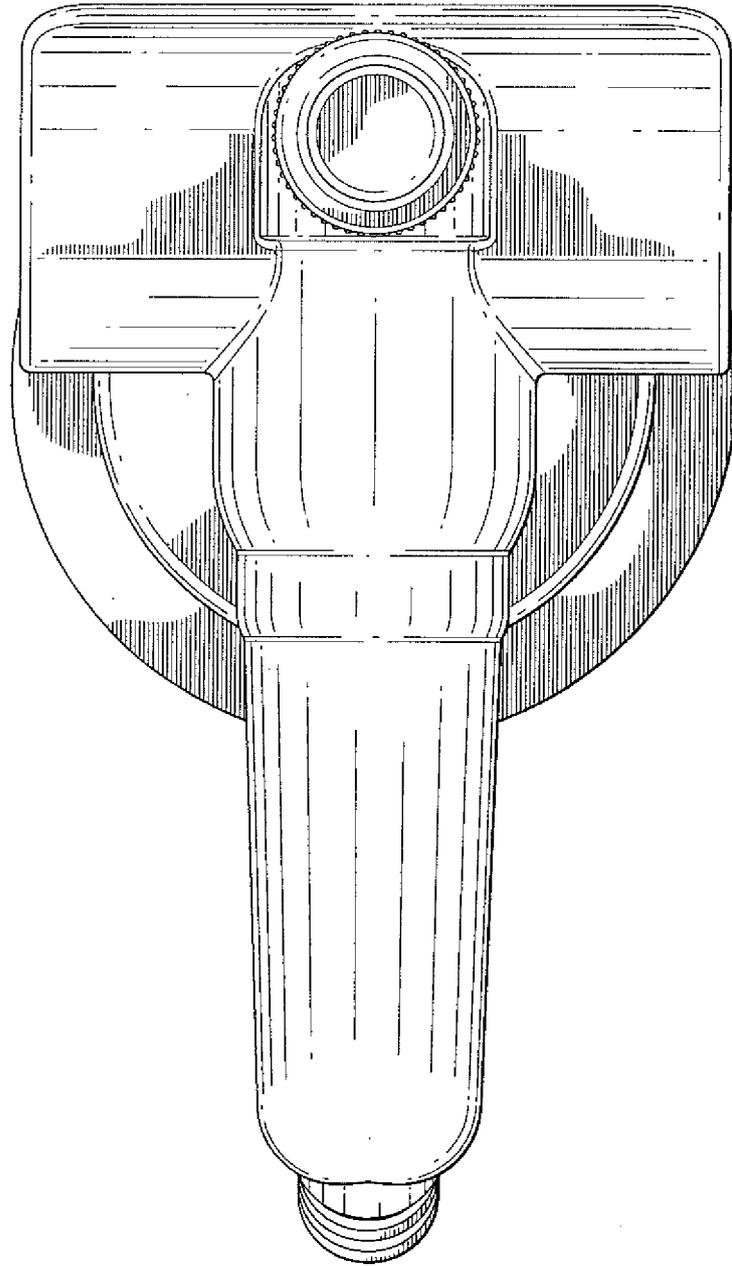


FIG. 11

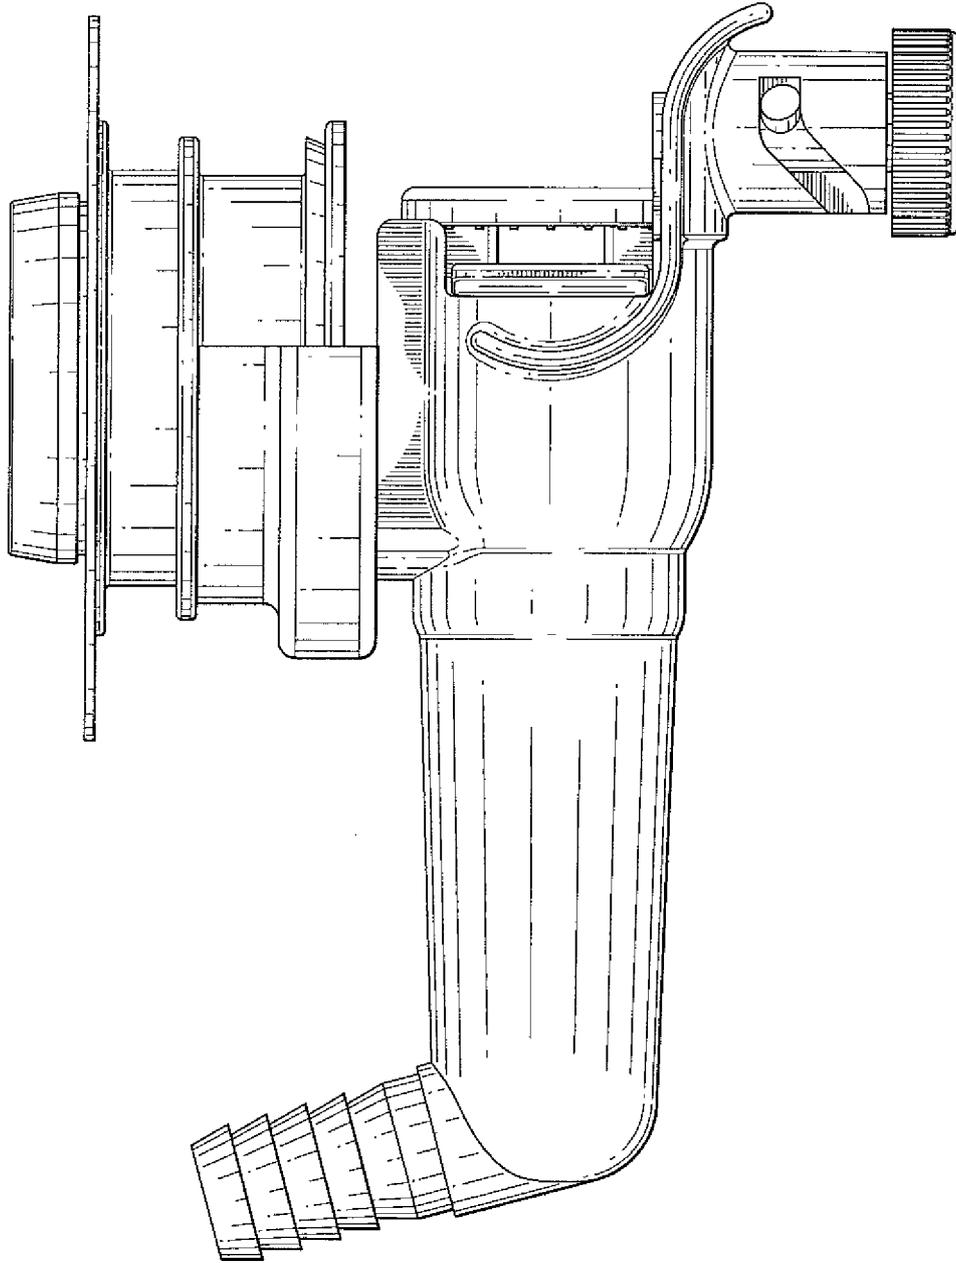


FIG. 12

13 of 18

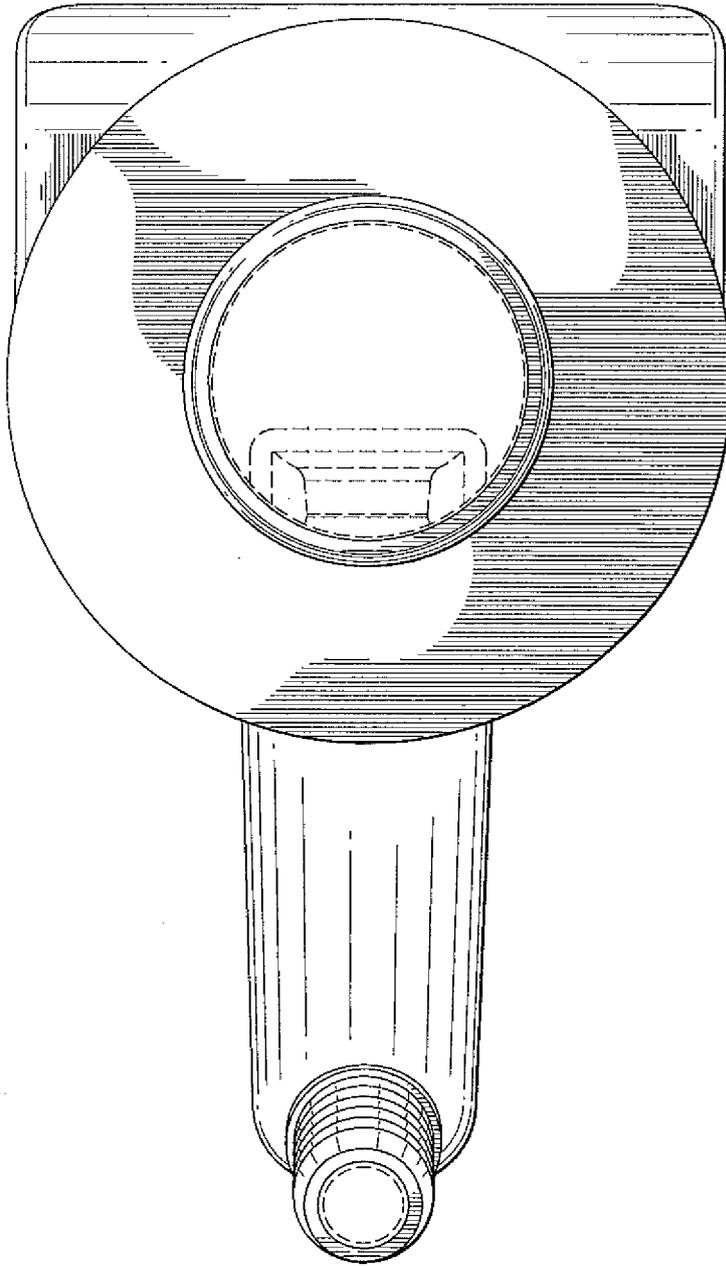


FIG. 13


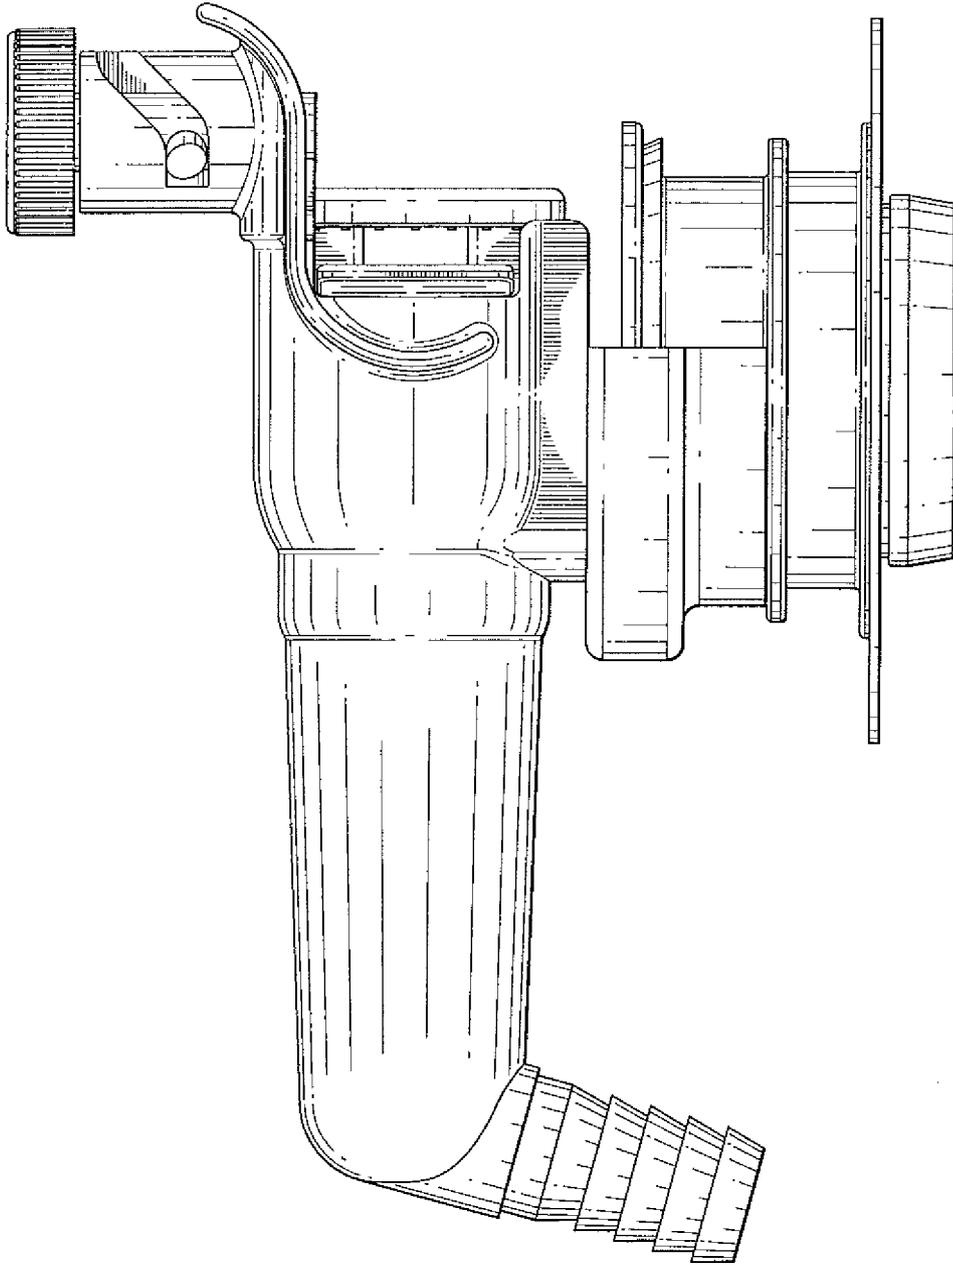


FIG. 14

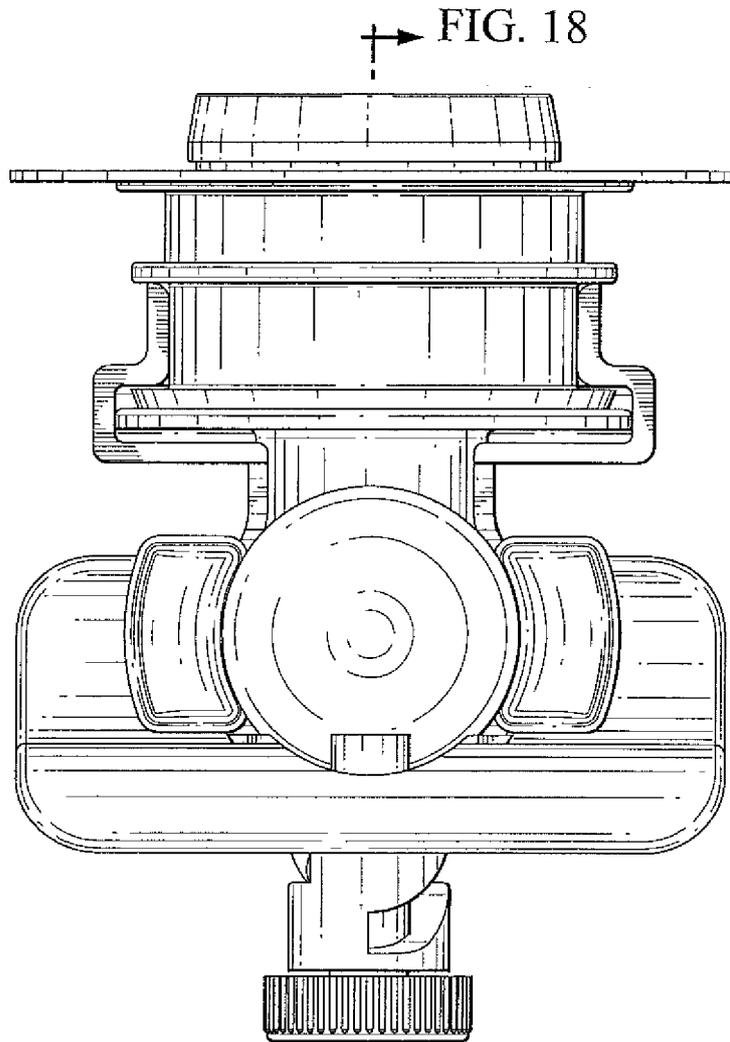

→ FIG. 18

→ FIG. 18

FIG. 15

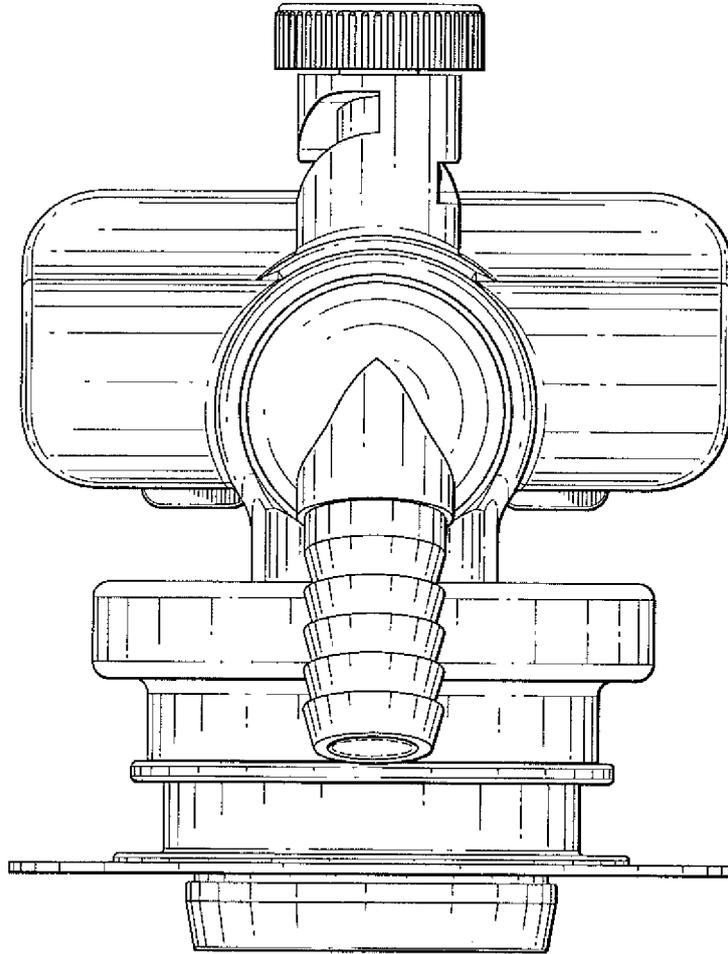


FIG. 16

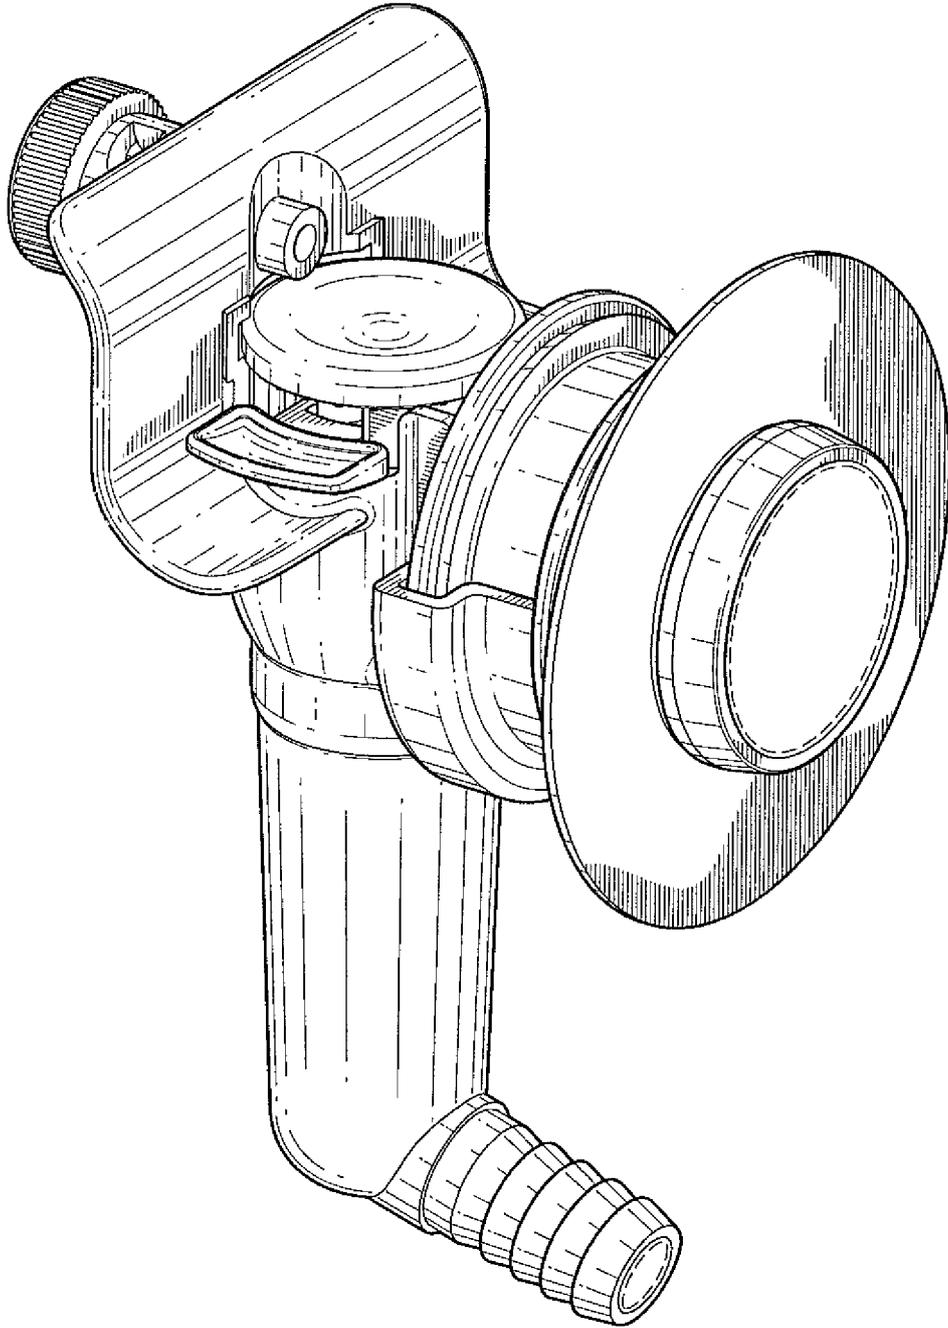


FIG. 17

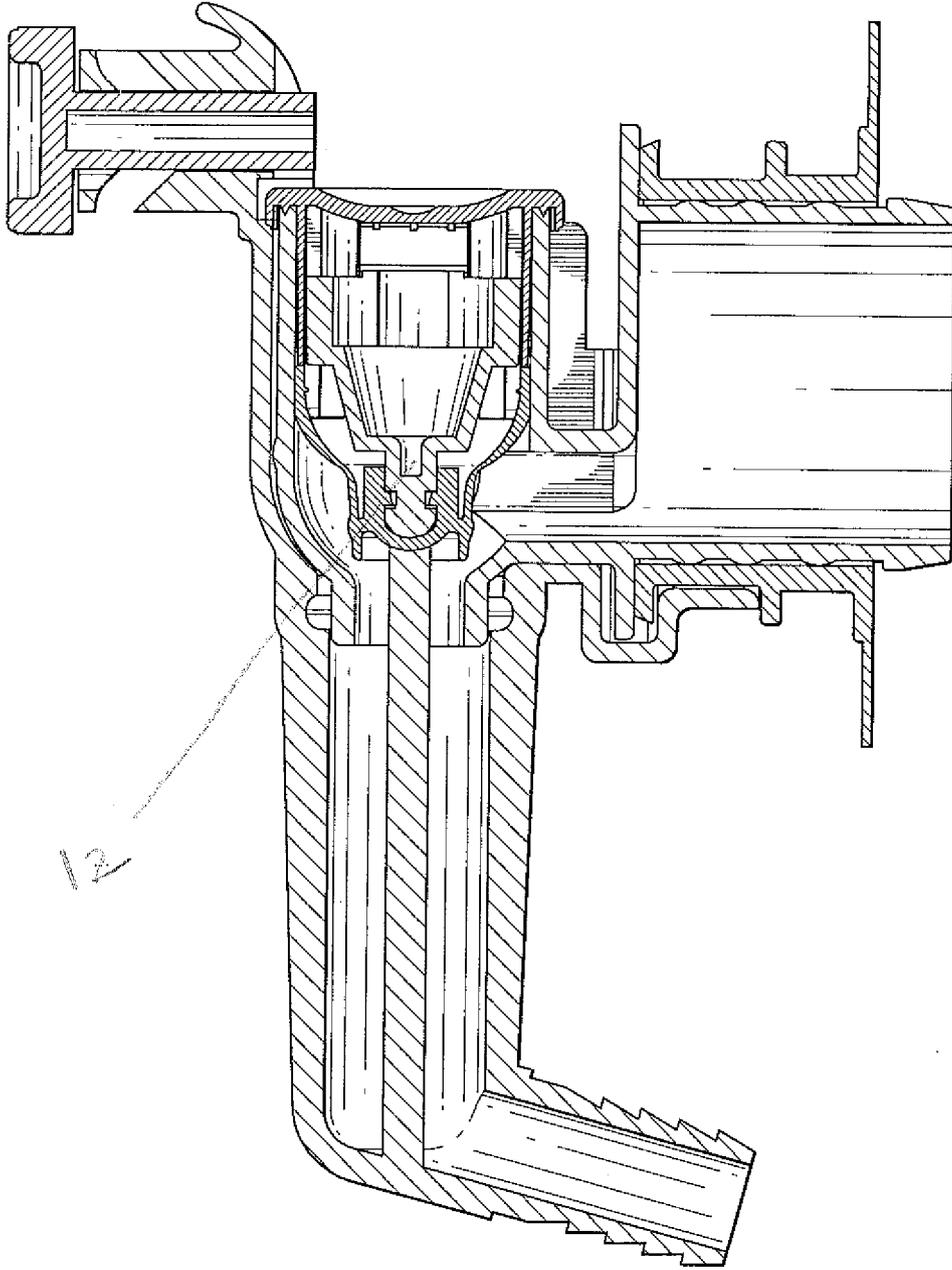


FIG. 18

