




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04B 1/58, H04M 1/00</b>	<b>A1</b>	(11) International Publication Number: <b>WO 97/02662</b> (43) International Publication Date: 23 January 1997 (23.01.97)
(21) International Application Number: PCT/US96/03488 (22) International Filing Date: 15 March 1996 (15.03.96) (30) Priority Data: 08/497,580                      30 June 1995 (30.06.95)                      US (71) Applicant: SIEMENS COMPONENTS, INC. [US/US]; 10950 North Tantau Avenue, Cupertino, CA 95014 (US). (72) Inventor: WHITNEY, David; 235 Porter Lane, San Jose, CA 95127 (US). (74) Agents: CODISPOTI, Joseph, S. et al.; Siemens Corporation, Intellectual Property Dept., 186 Wood Avenue South, Iselin, NJ 08830 (US).		(81) Designated States: CA, CN, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i>

(54) Title: A DATA ACCESS ARRANGEMENT HAVING IMPROVED TRANSMIT-RECEIVE SEPARATION

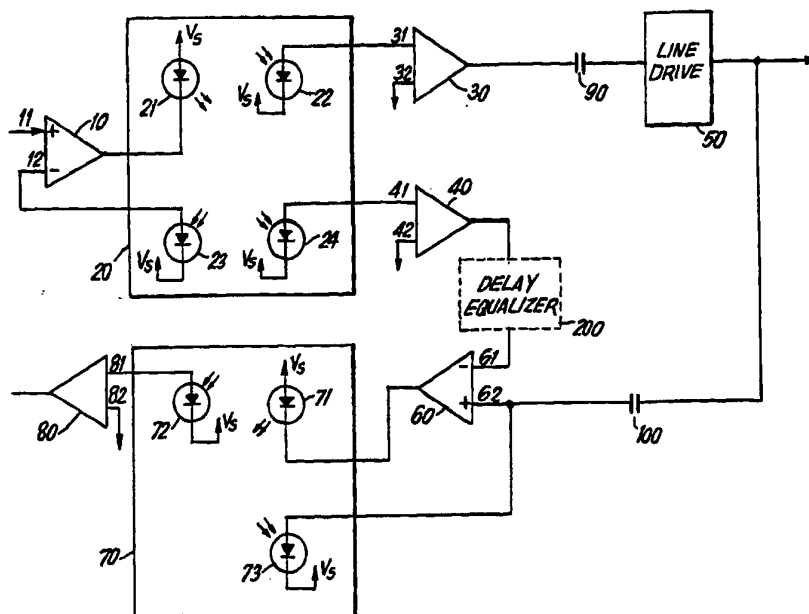

## (57) Abstract

A data access arrangement (DAA) having a transhybrid circuit for separating a transmit signal from a received signal by providing a transmit cancellation signal to the inverting input of a servo-feedback differential amplifier on the receive channel of the DAA. The cancellation signal is provided by a photodiode optically coupleable with a light emitting diode within an optical isolator on the transmission channel of the DAA. The gain of the cancellation signal can be independently controlled.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

**A DATA ACCESS ARRANGEMENT HAVING IMPROVED  
TRANSMIT-RECEIVE SEPARATION**

**FIELD OF THE INVENTION**

5

The present invention generally relates to a device, known as a "data access arrangement" (or "DAA"), for coupling a data terminal equipment ("DTE") with a telephone line. In particular, the present invention relates to an  
10 optical data access arrangement (DAA) including an optically isolated transhybrid having improved transmit-receive separation.

**BACKGROUND OF THE INVENTION**

15

Telephone signals are provided to subscribers through the public switched telephone network ("PSTN" or "the network"). The subscriber portion of the network has two wires known as "tip" and "ring". These wires carry information being transferred to and from the subscribers,  
20 as well as control signals, such as a connection request (or "ring") signal. The bandwidth of the network is between about 300 Hz to 3.4 KHz. Accordingly, any data terminal equipment (DTE), such as data modems, facsimile machines, (non-cellular) portable telephones, speaker  
25 phones, and message answering machines, for example, must be compatible with the network (PSTN) to function properly. To this end, data access arrangements (DAAs) provide an interface to bridge any inconsistencies between the data terminal equipment (DTE) and the network (PSTN).

30

Furthermore, the network (PSTN) must be protected from damage due to, for example, faulty data terminal equipment (DTE) or inadvertent shorts through the data terminal equipment (DTE) to its power line. Indeed, the United  
35 States Federal Communications Commission ("FCC") requires a 1500 volt isolation between the data terminal equipment (DTE) and the public switched telephone network (PSTN). In

the past, data access arrangements (DAAs) used transformers to provide such electrical isolation. Although transformers adequately isolated the network from the DTE and although transformers permitted bi-directional signal transfer (i.e., an AC signal on a primary would induce a signal on the secondary and an AC signal on the secondary would induce a signal on the primary), they have several limitations. First, transformers are costly relative to solid state devices. Second, transformers are relatively large and heavy. Thus, transformers are not well-suited for applications requiring the interface to have minimal volume and weight, e.g., portable DTEs such as portable personal computers, portable facsimile machines, and portable modems. Therefore, an inexpensive, small, and lightweight data access arrangement (DAA) is needed.

Moreover, the data terminal equipment (DTE) are typically four wire devices, having separate transmit and receive wire pairs. Accordingly, the data access arrangements (DAAs) must include a duplexing circuit, or transhybrid, to bridge the two-wire network and the four-wire data terminal equipment (DTE). Since data can be transmitted and received simultaneously, the transhybrid must separate the transmit and receive signal paths. This separation is achieved by suppressing the level of the transmit signal at the output of the transhybrid, and inverting this signal to form a transmit cancellation signal. This signal is added to the receive input of the transhybrid, thereby separating the transmitted signal from the received signal. In known DAAs, the transmit cancellation signal is derived from the output of the line drive circuit. Unfortunately, the cancellation signal cannot be independently controlled. Thus, a DAA having an improved transmit-receiver separation circuit is needed.

The data access arrangement (DAA) should ideally have a flat frequency response, a constant group delay, extremely small amplitude and frequency distortion, and should match the impedance of the network line.

**SUMMARY OF THE INVENTION**

Briefly, the present invention provides a data access arrangement that includes a transhybrid which produces a transmit cancellation signal independent of the line drive circuit to achieve transmit-receive separation. Thus, for example, the gain of the cancellation signal produced by the transhybrid may be independently controlled.

**BRIEF DESCRIPTION OF THE DRAWINGS**

For a better understanding of the invention, reference is made to the following description of an exemplary embodiment thereof, and to the accompanying drawings, wherein:

Figure 1 is a block schematic of a data access arrangement (DAA) provided with a transmit-receive separation circuit constructed in accordance with the present invention.

**DETAILED DESCRIPTION**

Figure 1 is a block schematic of a data access arrangement (DAA) of the present invention. Data to be transmitted from the data terminal equipment (DTE) is provided to a first (non-inverting) input 11 of a first differential (or servo feedback) amplifier 10. The first differential amplifier 10 produces an output based on a difference between the data provided to its first (non-inverting) input 11 and a feedback signal provided to its second (inverting) input 12. The output of the first differential amplifier 10 is coupled with the cathode of a light emitting diode (or "LED") 21. The anode of the LED 21 is coupled with a supply voltage  $V_s$ . Thus, the voltage provided at the output of the first differential amplifier 10 controls the amount of current passing through the LED 21. Alternatively, the output of the first differential amplifier can be coupled with the anode of the LED 21 and the LED 21 can have its cathode coupled with ground, such that the first differential amplifier 10 sources the

current through the LED 21. Accordingly, the LED 21 emits light having an intensity based on the output of the first differential amplifier 10. However, since the current-voltage characteristic of LEDs is non-linear, the output of the LED 21 is non-linear with respect to its input.

The LED 21 is part of a first optical isolating circuit 20. The first optical isolating circuit 20 also includes a first photodiode 22, a second photodiode 23, and a third photo diode 24, each of which is optically coupleable with the LED 21. Thus, when the LED 21 emits light based on the signal output by the first differential amplifier 10, each of the first, second, and third photodiodes (22, 23, and 24, respectively) produce a current based on the intensity of the light emitted by the LED 21. In the embodiment illustrated in the figure, the photodiodes 22-24 are reverse biased depletion layer diodes, operating below the breakdown voltage. However, other types of photodiodes and biasing may be used in alternative embodiments which will be apparent to those skilled in the art. The current produced by the second photodiode 23 is fed back to the second (inverting) input 12 of the first differential amplifier 10. The feedback current produced by the second photodiode 23 facilitates linear operation of the first optically isolating circuit 20.

The current produced by the second photo diode 22 is provided to a first input 31 of a first operational amplifier (output opamp) 30. The output of the first opamp 30 is provided to a line drive circuit 50, via a first capacitor 90. The first capacitor 90 acts as a high pass filter, blocking the DC component of the output. The line drive circuit 50, which drives a local telephone line of the public switched telephone network (PSTN), may be a conventional line drive circuit. The line drive circuit 50 may include an impedance buffer, such as a bipolar transistor, for example. A biasing network, such as a voltage divider network for example, may be provided at the

gate of the bipolar transistor such that the bipolar transistor operates in its most linear region.

The current produced by the third photodiode 24 is provided to a first input 41 of a second operational amplifier (opamp) 40. The output of the second opamp 40 is provided to a first (inverting) input 61 of a second differential (or servo feedback) amplifier 60. The gain of the second opamp 40 can be appropriately adjusted to amplify the transmit cancellation signal properly. The second (non-inverting) input 62 of the second differential amplifier 60 is coupled, via a second capacitor 100 to the local public switched telephone network (PSTN). The second capacitor 100 acts as a high pass filter, blocking the DC component of the signal.

The output of the second differential amplifier 60 is provided to the cathode of an LED 71 which has an anode coupled with a supply voltage  $V_s$ . Thus, the output voltage provided by the second differential amplifier 60 controls the amount of current flowing through the LED 71. As discussed above, the second differential amplifier 60 may be coupled with the anode of the LED 71 so that it sources the current through the LED 71. The LED 71 is included in a second optical isolation circuit 70. The second optical isolation circuit 70 also includes a first photodiode 72 and a second photodiode 73, each of which are optically coupleable to the LED 71. When the LED 71 emits light, a current based on the intensity of the emitted light is produced by the photodiode 72. The anode of the photodiode 72 is coupled with a first input 81 of a third operational amplifier (opamp) 80. The output of the third opamp 80 is provided to a receiver.

The second photodiode 73 also produces a current based on the intensity of the light emitted by the LED 71. The anode of the second photodiode is coupled with the second (non-inverting) input 62 of the second difference (servo) amplifier 60, thereby providing a feedback signal to

facilitate linear operation of the second optically isolating circuit 70.

As discussed above, in the embodiment illustrated in the figure, the photodiodes 72 and 73 are reverse biased depletion layer diodes, operating below the breakdown voltage. However, other types of photodiodes and biasing may be used in alternative embodiments which will be apparent to those skilled in the art.

As shown in phantom in the figure, a delay equalizer 200 may be provided between the second opamp 40 and the third opamp 60 for equalizing the transmit cancellation signal with the transmitted signal, i.e., for delaying the transmit cancellation signal such that it is synchronized with the transmitted signal.

The embodiments described herein are merely illustrative of the principles of the present invention. Various modifications may be made thereto by persons ordinarily skilled in the art, without departing from the scope or spirit of the invention.



**WHAT IS CLAIMED IS:**

1. In a data access arrangement for coupling a data terminal equipment having a transmit and receive line with  
5 a network, a circuit comprising:
- (a) a first optical isolating circuit having
    - i) a light emitting diode,
    - ii) an output photo-optical device, being optically coupleable with the light emitting  
10 diode, for providing an output signal based on light detected by it,
    - iii) a servo-feedback photo-optical device, being optically coupleable with the light emitting diode, for providing an output signal based on  
15 light detected by it, and
    - iv) a cancellation signal photo-optical device, being optically coupleable with the light emitting diode, for providing an output signal based on light detected by it;
  - 20 (b) a second optical isolating circuit having
    - i) a light emitting diode,
    - ii) an output photo-optical device, being optically coupleable with the light emitting diode of the second optical isolating circuit,  
25 for providing an output signal based on light detected by it, and
    - iii) a servo-feedback photo-optical device, being optically coupleable with the light emitting diode of the second optical isolating circuit,  
30 for providing an output signal based on light detected by it;
  - (c) a first differentiator having
    - i) a first input coupleable with the transmit line of the data terminal equipment,
    - 35 ii) a second input provided with the output signal of the servo-feedback photo-optical device of the first optical isolating circuit, and

iii) an output coupled with the light emitting diode of the first optical isolating circuit, for providing an output signal representing a difference between its first input and its second input;

5

(d) a first driver having an input provided with the output signal of the output photo-optical device of the first optical isolating circuit and having an output coupleable with the network;

10

(e) a second driver having an input provided with the output signal of the cancellation signal photo-optical device and having an output;

(f) a second differentiator having

15

i) a first input provided with the output signal of the servo-feedback photo-optical device of the second optical isolating circuit, and coupleable with the network,

ii) a second input coupled with the output of the second driver,

20

iii) an output coupled with the light emitting diode of the second optical isolating circuit, for providing an output representing a difference between its first input and its second input; and

(g) a third driver having

25

i) an input provided with the output signal of the output photo-optical device of the second optical isolating circuit, and

ii) an output coupleable with the receive line of the data terminal equipment.

30

2. The circuit of claim 1, wherein the output provided by the second driver is a transmit cancellation signal.

3. The circuit of claim 1, wherein each of the output and servo feedback photo-optical devices of the first and second optical isolating circuits and the cancellation signal photo-optical device is a photodiode.

35

4. The circuit of claim 3, wherein each of the photodiodes is reverse biased.
5. The circuit of claim 4, wherein the photodiodes operate below their breakdown voltages.
6. The circuit of claim 1, wherein each of the first and second differentiators is a differential amplifier.
- 10 7. The circuit of claim 1, wherein each of the first, second, and third drivers is an operational amplifier.
8. The circuit of claim 1, further comprising a line drive circuit having an input coupled with the output of the first driver and an output coupleable with the network.
- 15 9. The circuit of claim 8, wherein the line drive circuit includes an impedance buffer.
- 20 10. The circuit of claim 9, wherein the impedance buffer is a transistor.
11. The circuit of claim 10, further comprising a biasing network coupled at the input stage of the transistor, for providing a bias voltage to the transistor such that the transistor operates in its most linear region.
- 25 12. The circuit of claim 1, further comprising:  
a first capacitor having a first terminal coupled with the output of the first driver and a second terminal coupleable with the network; and  
a second capacitor having a first terminal coupled with the first input of the second differentiator and the servo-feedback photo-optical device of the second optical isolating circuit, and a second terminal coupleable with the network.
- 30  
35

13. The circuit of claim 2, further comprising a delay equalizer, coupled between the output of the second driver and the second input of the second differentiator, for equalizing a delay of the transmit cancellation signal with  
5 a delay of a signal applied to the first input of the second differentiator.

1 / 1

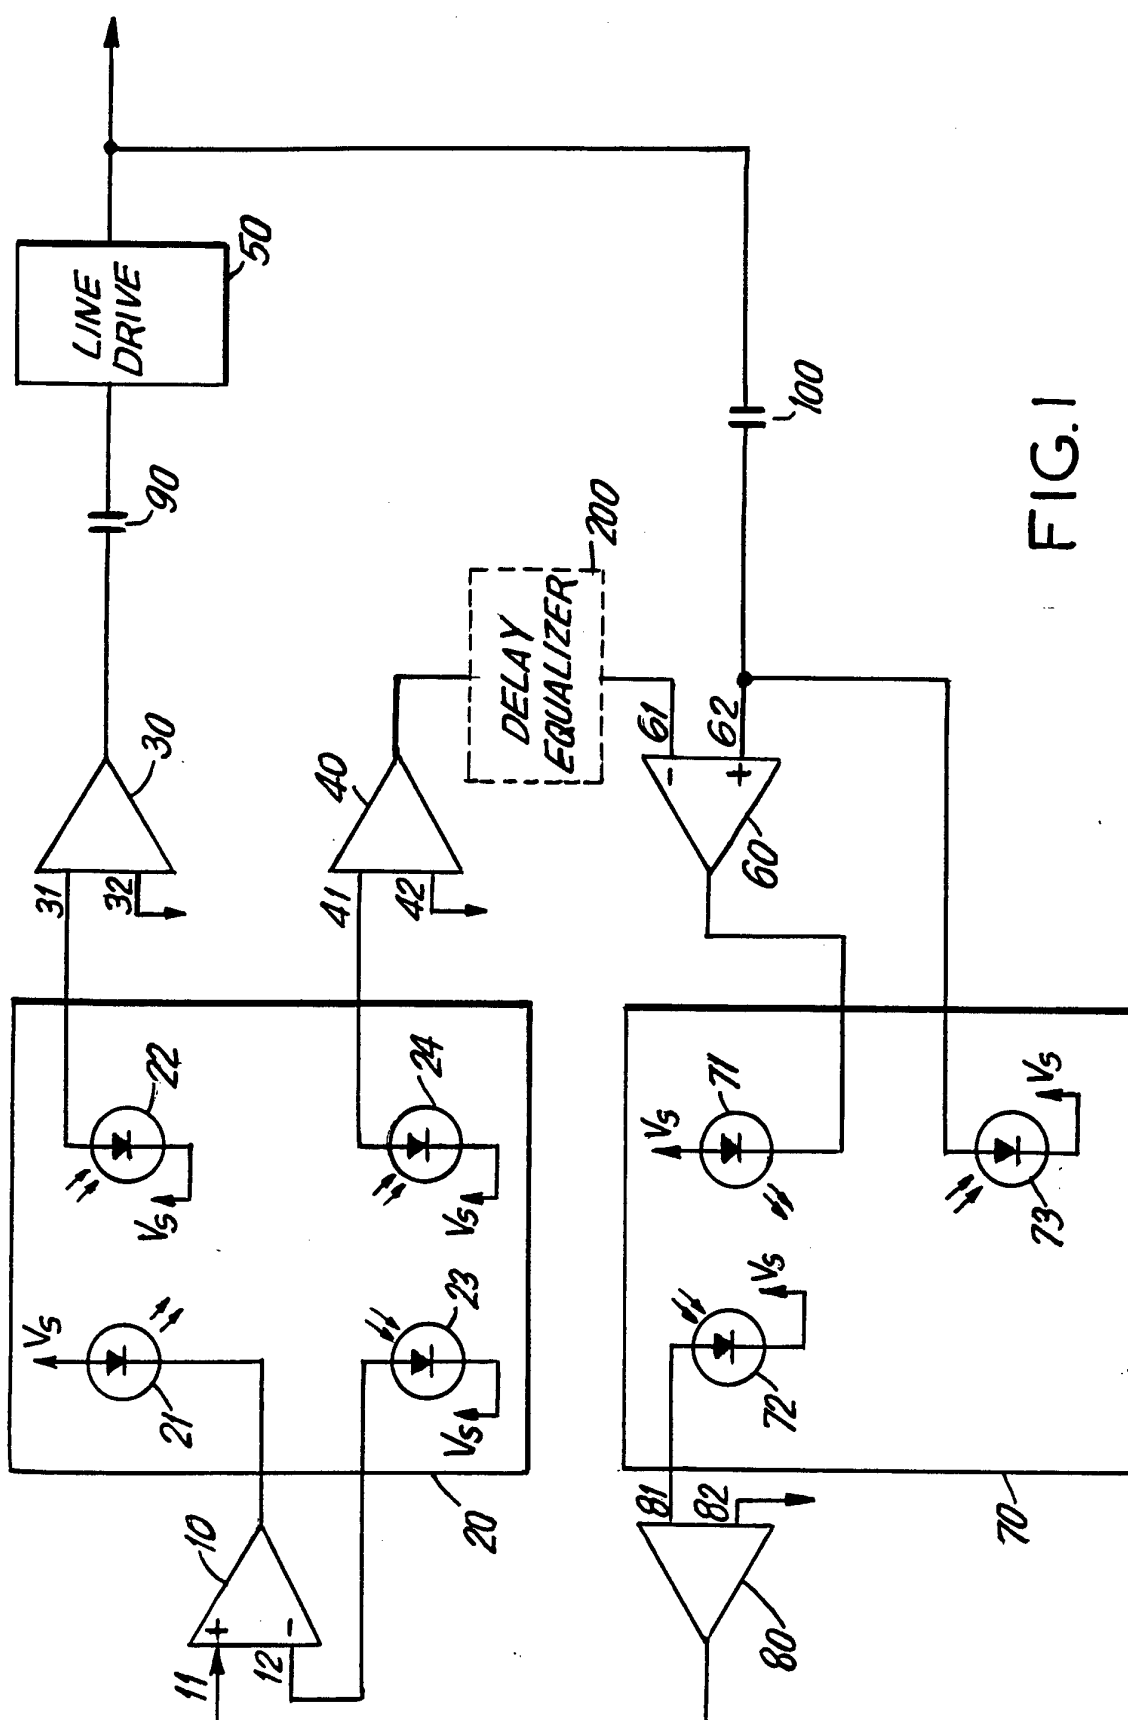


FIG. 1

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 96/03488

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H04B1/58 H04M1/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04B H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 313 225 (CARBREY ROBERT L ET AL) 26 January 1982 see column 1, line 53 - column 2, line 24; figure 1	1-4,6-9
A	--- US,A,3 855 430 (LEROUGE P ET AL) 17 December 1974 see abstract; figure 3 -----	1,2

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

6 August 1996

Date of mailing of the international search report

1 3. 09. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Andersen, J.G.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/03488

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4313225	26-01-82	NONE	
US-A-3855430	17-12-74	FR-A- 2160308	29-06-73
		AU-B- 473175	17-06-76
		AU-B- 4821672	02-05-74
		BE-A- 791416	16-05-73
		CA-A- 977083	28-10-75
		CH-A- 564888	31-07-75
		DE-A- 2255972	24-05-73
		GB-A- 1389560	03-04-75
		NL-A- 7215540	22-05-73