

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
17 April 2008 (17.04.2008)

PCT

(10) International Publication Number
WO 2008/043756 A1

(51) International Patent Classification:
H05B 39/00 (2006.01)

(74) Agent: **DALL'OLIO, Giancarlo**; Via Delle Armi 1,
I-40137 Bologna (IT).

(21) International Application Number:
PCT/EP2007/060707

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(22) International Filing Date: 9 October 2007 (09.10.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
BO2006U 000086 11 October 2006 (11.10.2006) IT

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (*for all designated States except US*): **O.C.E.M. S.P.A.** [IT/IT]; Via 2 Agosto 1980, 11, I-40016 S.Giorgio Di Piano (BO) (IT).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **CANNISTRA', Giovanni** [IT/IT]; Via Turati 4, I-40134 Bologna (IT).
FACCHINI, Gianni [IT/IT]; Via Bernini 7, I-44047 San Carlo (Ferrara) (IT).

Published:
— with international search report

(54) Title: A CURRENT REGULATION UNIT IN A CIRCUIT OF LIGHT SOURCES CONNECTED IN SERIES

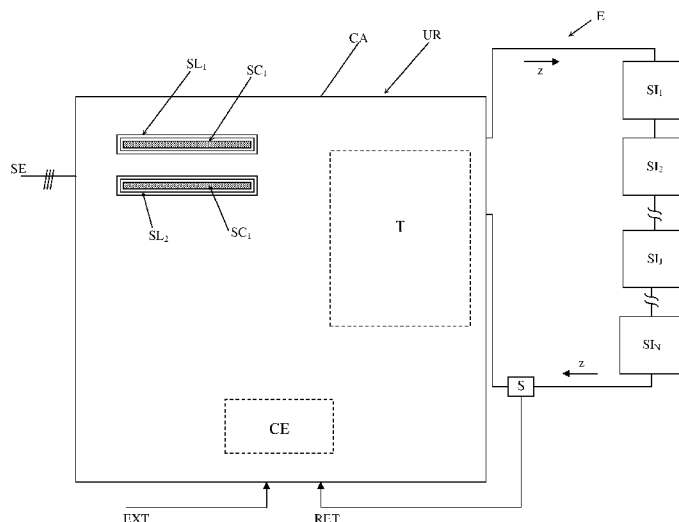

(57) Abstract: A current regulation unit in a circuit composed of light sources, connected in series, interposed between an electric source (SE) and the series connection electric circuit (E) of the light sources (SI₁, SI₂, ..., SI_j, SI_{j+1}, ..., SI_N), ..., includes: at least one conversion apparatus (AC₁, AC₂) for generating an alternating voltage, having pre-settable characteristics; a transformer (T), connected in cascade to the conversion apparatus (AC₁, AC₂) and connected to the electric circuit (E); and an electric control unit (CE), connected to the conversion apparatus (AC₁, AC₂) for controlling the modulation of the alternating voltage supplied by the conversion apparatus, in order to obtain a current (z) circulating in the electric circuit (E) having pre-settable electric characteristics. The conversion apparatus (AC₁, AC₂) is mounted on a printed board (SC₁, SC₂), removable from a corresponding slot (SL₁, SL₂), made in the regulation unit (UR).

**A CURRENT REGULATION UNIT IN A CIRCUIT OF LIGHT SOURCES
CONNECTED IN SERIES**

FIELD OF THE INVENTION

5 The present invention lies in the technical field of constant current regulation units, aimed at feeding light sources connected in series, for example for serving the airport runways.

10 **DESCRIPTION OF THE PRIOR ART**

Current regulation units are provided, even in large number, for feeding light sources connected in series, such as the runways lights in an airport (see Figure 1, prior art) and each regulation unit is connected for
15 example to a three-phase (or single-phase) power line SE to power an electric circuit E, in which a plurality of light sources $SI_1, SI_2, \dots, SI_J, \dots, SI_N$ are connected in series; said regulation unit URN includes substantially: a conversion apparatus ACN composed, in turn, of an AC/DC
20 rectifier, supplied by the three-phase (or single-phase) power line SE, that converts the alternating voltage in a direct voltage, and an inverter DC/AC, arranged in cascade with the rectifier AC/DC, and aimed at converting the direct voltage in an alternate voltage wave form,
25 having pre-settable characteristics (frequency and/or amplitude and/or rms value; an electric transformer TN, having primary winding connected to the output of the same DC/AC inverter and the secondary winding connected to the electric circuit E; and an electric control unit
30 C, that receives in input an external signal EXT, transmitted for example by the control tower, and a feedback control signal RET, supplied by a sensor S (such

-2-

as a current transformer TA), representative of the current z circulating in the electric circuit E. The control unit is aimed at controlling the modulation of the voltage supplied by the DC/AC inverter by means of a
5 corresponding signal KK.

Each light source SI_J includes a corresponding auxiliary device D_J , of known type, that supplies a relevant lamp L_J , for example a half-dipped signaling lamp (also known to those skilled in the field as "light signal").

10 As specified, the electric control unit C has the task of controlling the modulation of the voltage created by the DC/AC inverter, for example in terms of variation of its rms value, depending on the result of the comparison between the external signal EXT and the feedback control
15 signal RET: in particular, the external signal EXT contains information related to the light level required in the runway, therefore, in other words, the electric control unit C governs the control and regulation of the current z circulating in the electric circuit E, thus
20 determining corresponding current values (not indicated) to supply the lamps $L_1, L_2, \dots, L_J, \dots, L_N$, the current being delivered by the auxiliary devices $D_1, D_2, \dots, D_J, \dots, D_N$.

The just described supply system must have high
25 reliability standards, so as to ensure continuous and regular supply of the light sources $SI_1, SI_2, \dots, SI_J, \dots, SI_N$, for obvious security reasons. Consequently, some solutions (few, as a matter of fact) include a redundant regulation unit (not shown), arranged in parallel with
30 the URN service unit and aimed at being set in operation, in case of failure or maintenance of the latter. Obviously, this solution protects the regular operation

-3-

of this supply system, yet it causes a substantial increase of the overall costs and dimensions.

SUMMARY OF THE INVENTION

5 In the light of what above, it is an object of the present invention to propose a unit for regulation of the current in a circuit composed of light sources connected in series, which is newly conceived and which resolves satisfactorily the just mentioned disadvantages of the
10 prior art. It is intended to provide a unit that ensures high reliability standards and whose overall costs and dimensions are lower than the ones of the known solutions.

The above mentioned objects are obtained, in accordance
15 with the contents of the claims, by a current regulation unit in a circuit composed of light sources, connected in series, the regulation unit being functionally interposed between an electric source and an electric circuit including the said light sources, connected in series,
20 the regulation unit including:

at least one conversion apparatus, supplied by said electric source for generating an alternating voltage, having pre-settable characteristics;

25 an electric transformer, electrically connected in cascade to the same conversion apparatus and functionally connected to said electric circuit of said light sources; and

30 an electric control unit, connected to at least said conversion apparatus for controlling modulation of the alternating voltage supplied by said conversion apparatus so as to obtain a current in said electric

-4-

circuit of said light sources having pre-settable electric characteristics,
the current regulation unit being characterized in that said conversion apparatus is mounted on a
5 board, removable from a corresponding slot, made in the same regulation unit.

BRIEF DESCRIPTION OF THE DRAWINGS

The characteristic features of the invention, not
10 appearing from what has been just said, will be better pointed out in the following description, in accordance with the contents of the claims and with help of the enclosed figures, in which:

- Figure 1 is an electric block diagram of the above
15 described regulation unit of known type and of the electric circuit, supplied thereby, composed of a plurality of light sources, connected in series;
- Figure 2 is an electric block diagram of the regulation unit proposed by the present invention, as well as of
20 the electric circuit, supplied thereby, composed of the above mentioned plurality of light sources, connected in series;
- Figure 3 is a front, schematic view of the regulation unit and of the electric circuit, supplied thereby.

25

BEST MODES OF CARRYING OUT THE INVENTION

In the following description, regarding Figures 2, 3, some numerical references, already defined in Figure 1 (prior art), will be maintained, since relating to

-5-

elements, electric signals or electric units, common from the operation point of view.

The regulation unit UR, proposed by the invention (see in particular Figure 2), is connected for example to a
5 three-phase (or single-phase) power line SE to supply the electric circuit E; which has said plurality of light sources $SI_1, SI_2, \dots, SI_J, \dots, SI_N$, arranged in series. The regulation unit UR includes substantially: two
conversion apparatuses AC_1, AC_2 , arranged in parallel,
10 each of which includes, in turn, an AC/DC rectifier, supplied by the power line SE, that converts the alternating three-phase or single-phase voltage in a direct voltage, and an inverter DC/AC, arranged in cascade with the corresponding rectifier AC/DC, aimed at
15 converting the direct voltage again in an alternate voltage wave form, having pre-settable characteristics (frequency and/or amplitude and/or rms value; an electric transformer T, having primary winding connected to the output of the same DC/AC inverters of the two
20 conversion apparatuses AC_1, AC_2 and the secondary winding connected to the electric circuit E. An electric control unit CE receives in input the external signal EXT, transmitted for example by the control tower, and the feedback control signal RET, supplied by the sensor S
25 (such as a current transformer TA), representative of the current z circulating in the electric circuit E. The control unit is aimed at controlling the modulation of the voltage supplied by the DC/AC inverters by means of the corresponding signals K_1, K_2 .

30 As specified also in the introductory note, the electric control unit CE has the task of controlling the modulation of the voltage generated by the DC/AC inverter of the conversion apparatus AC_1 or AC_2 , for example in

-6-

terms of variation of its rms value, depending on the result of the comparison between the external signal EXT, containing the information about the light level required in the runway and the feedback control signal RET.

5 therefore, the electric control unit CE governs the control and regulation of the current z circulating in the electric circuit E, so as to obtain corresponding current values (not indicated) to supply the lamps $L_1, L_2, \dots, L_J, \dots, L_N$, the current being delivered by the auxiliary

10 devices $D_1, D_2, \dots, D_J, \dots, D_N$.

According to Figure 2, there can be switches I_1, I_2 , situated for example, upstream of the conversion apparatuses AC_1, AC_2 and downstream of the branch point D of the latter, respectively. The activation/deactivation

15 of the switches I_1, I_2 on the corresponding branch, in which they are inserted, is regulated for example by the electric control unit CE by the corresponding command signals S_1, S_2 .

The regulation unit UR, see Figure 3, is contained in a

20 casing CA, whose front part features the openings of two slots SL_1, SL_2 , for introduction/removal of corresponding printed boards SC_1, SC_2 , on which said conversion apparatuses AC_1, AC_2 are mounted respectively. The printed boards SC_1, SC_2 have relative wiping contacts (not shown

25 as known), aimed at engaging, on the introduction of the boards SC_1, SC_2 , into corresponding inner seats of the slots SL_1, SL_2 (likewise not shown), so as to allow the conversion apparatuses AC_1, AC_2 to be connected electrically to the electric source SE, the transformer T

30 and the electric control unit CE, thus obtaining the full operation of the regulation unit UR (Figure 2).

Figure 2 shows a possible operation configuration of the regulation unit UR, in which the switch I_1 is closed,

-7-

allowing the supplying of the conversion apparatus AC_1 , mounted on the board SC_1 , and the switch I_2 is open; obviously, the light sources $SI_1, SI_2, \dots, SI_J, \dots, SI_N$ will be supplied only by the conversion apparatus AC_1 . A
5 contrary situation would occur if the switch I_1 were open and the switch I_2 were closed. In particular, the presence of the switches I_1, I_2 allows introducing/removing each board SC_1, SC_2 into/from the suitable slot SL_1, SL_2 , safely for the operator. The transfer of energy through one or
10 the other conversion apparatus AC_1, AC_2 , for supplying the light sources $SI_1, SI_2, \dots, SI_J, \dots, SI_N$, can be obtained by controlling the operation of the corresponding rectifier AC/DC and/or DC/AC inverter, as known.

Consequently, beginning from the configuration shown in
15 Figure 2, in case, for example, of a failure of the conversion apparatus AC_1 , it is possible to divert the energy flow through the conversion apparatus AC_2 , having the redundancy function, after having closed the switch I_2 , thus ensuring the continuity of the supply to the
20 light sources $SI_1, SI_2, \dots, SI_J, \dots, SI_N$.

After having opened the switch I_1 , the operator would be able to remove easily the faulty board SC_1 , repairing it or substituting it with another one. The removal of the faulty board AC_1 and the introduction of a new one require
25 few moments and can be performed later on, after the failure event, without particular hurry, since the regulation unit UR continues to work regularly, due to the activation of the redundancy apparatus AC_2 .

Advantageously, the regulation unit UR is thus compact
30 and extremely reliable, since its most critical elements, exactly from the reliability point of view, belong, as known, to the two conversion apparatuses AC_1, AC_2 , one in service and the other in reserve or redundant, which

-8-

however, as they are mounted on the respective boards SC_1 , SC_2 , can be removed and introduced quickly by the operator in case of possible malfunction, failure or maintenance of one of them. Moreover, with respect to the known solutions, a considerable reduction of the dimensions is followed by a consistent reduction of costs, due to the smaller number of functional elements (for example only one transformer T) of the regulation unit UR, proposed by the invention, with respect to two units of known type, one in service and one redundant, parallel to each other, substantially reliable to the same extent.

It is specified that if the electric source SE supplied a direct voltage, the rectifier devices AC/DC would be useless; therefore, each conversion apparatus AC_1 , AC_2 would be formed substantially by the DC/AC inverter (the only mounted on the corresponding boards SC_1 , SC_2).

It is also possible to provide more than two conversion apparatuses (not shown), one in service and the others redundant, or vice-versa, aimed at engaging with corresponding slots made in the regulation unit UR, according to a functional arrangement and an operation wholly comparable with what described above, in relation to the embodiment shown in the enclosed Figures.

Moreover, it is not excluded to use contemporarily the service apparatus AC_1 and the redundant one AC_2 (or ones, in case of more than two conversion apparatuses mounted on the corresponding slots), for the operation of the regulation unit UR.

The protective scope of the present invention includes also only one conversion apparatus AC_1 mounted on a suitable board SC_1 .

-9-

In this case, the possible malfunction or damage to one element of the same apparatus AC_1 will require the immediate substitution of the board SC_1 by the operator, which will be rapid and simple removing safely the faulty
5 board SC_1 and substituting it with a new one.

It is specified, in general, that the above mentioned conversion apparatuses, one redundant and two or more in service or vice-versa, can be connected to each other in series and/or in parallel.

CLAIMS

1. A current regulation unit in a circuit composed of light sources, connected in series, the regulation unit
5 being functionally interposed between an electric source (SE) and an electric circuit (E) including the said light sources ($SI_1, SI_2, \dots, SI_J, \dots, SI_N$), connected in series, the regulation unit including:
- 10 at least one conversion apparatus (AC_1, AC_2), supplied by said electric source (SE) for generating an alternating voltage, having pre-settable characteristics;
- 15 an electric transformer (T), electrically connected in cascade to the same conversion apparatus (AC_1, AC_2) and functionally connected to said electric circuit (E) of said light sources ($SI_1, SI_2, \dots, SI_J, \dots, SI_N$); and
- 20 an electric control unit (CE), connected to at least said conversion apparatus (AC_1, AC_2) for controlling modulation of the alternating voltage supplied by said conversion apparatus so as to obtain a current (z) in said electric circuit (E) of said light sources ($SI_1, SI_2, \dots, SI_J, \dots, SI_N$) having pre-settable electric characteristics,
- 25 the current regulation unit being characterized in that said conversion apparatus (AC_1, AC_2) is mounted on a board (SC_1, SC_2), removable from a corresponding slot (SL_1, SL_2), made in the same regulation unit (UR).

-11-

2. A regulation unit, according to claim 1, including at least two of said conversion apparatuses (AC_1 , AC_2), for generating an alternating voltage, having pre-settable characteristics, functionally interposed
5 between said electric source (SE) and said electric transformer (T), each of said conversion apparatuses (AC_1 , AC_2) being mounted on a corresponding board (SC_1 , SC_2), removable from a corresponding slot (SL_1 , SL_2), made in said regulation unit (UR).
- 10
3. A regulation unit, according to claim 2, wherein said conversion apparatuses (AC_1 , AC_2), functionally interposed between said electric source (SE) and said electric transformer (T), are arranged in parallel one
15 to another.
4. A regulation unit, according to claim 2, wherein said conversion apparatuses (AC_1 , AC_2), functionally interposed between said electric source (SE) and said
20 electric transformer (T), are connected in series.
5. A regulation unit, according to claim 2, wherein said conversion apparatuses (AC_1 , AC_2), functionally interposed between said electric source (SE) and said
25 electric transformer (T), are one in service and the other redundant or in reserve, and are also arranged in parallel.
6. A regulation unit, according to claim 1 or 2, wherein
30 said board (SC_1 , SC_2), of said corresponding conversion apparatus (AC_1 , AC_2) is a printed board with wiping

-12-

contacts, so that introduction or removal of the board from a corresponding slot (SL_1 , SL_2) determines electric connection or disconnection, respectively, with and from corresponding parts on said regulation unit (UR).

7. A regulation unit, according to claim 1 or 2, wherein said electric source (SE) supplies a direct voltage and each of said conversion apparatuses (AC_1 , AC_2) include an DC/AC inverter for transforming direct voltage, supplied by said electric source (SE), into alternating voltage, having pre-settable characteristics, supplied by said transformer (T).

8. A regulation unit, according to claim 1 or 2, wherein said electric source (SE) supplies an alternating voltage, and each of said conversion apparatuses (AC_1 , AC_2) includes:

a rectifier AC/DC, powered by said electric source (SE) for converting alternating voltage supplied by the same electric source (SE) into direct voltage; and

a DC/AC inverter for transforming direct voltage, supplied by said rectifier AC/DC, into alternating voltage having pre-settable characteristics, supplied to said transformer (T).

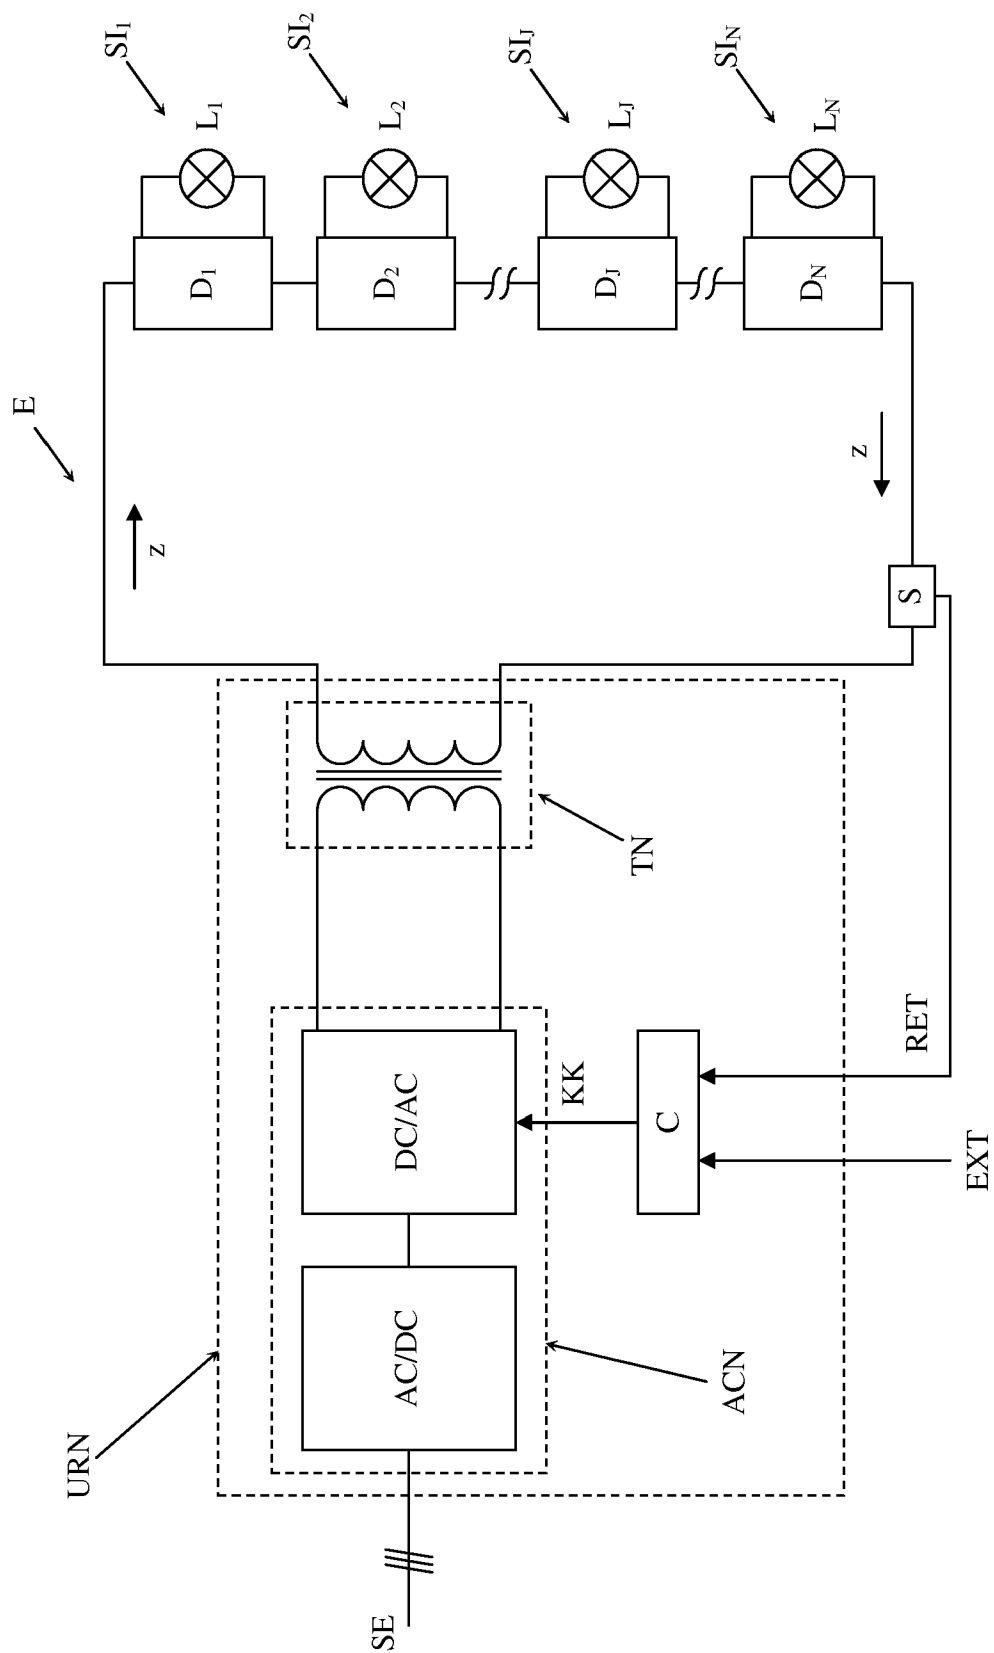


FIGURE 1 (PRIOR ART)

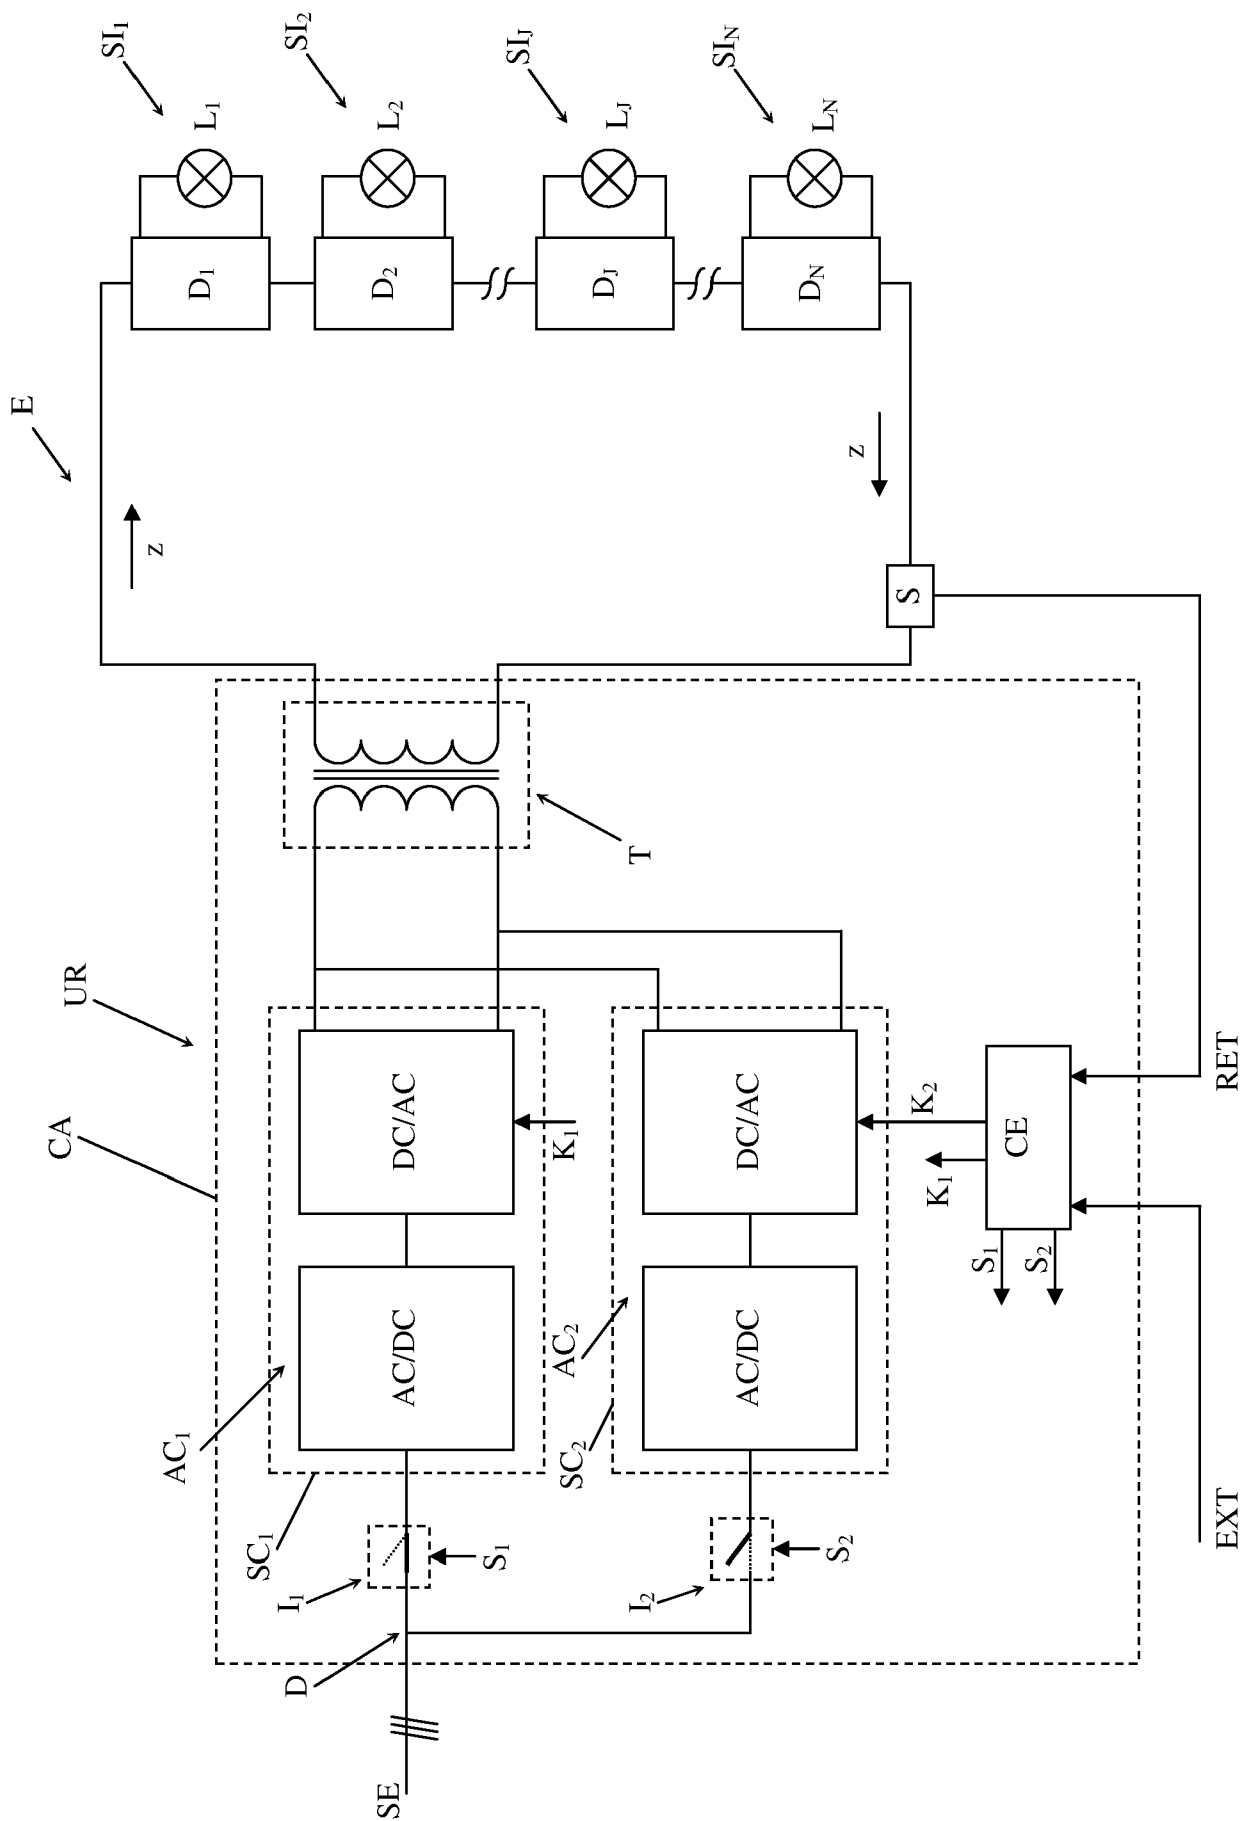


FIGURE 2

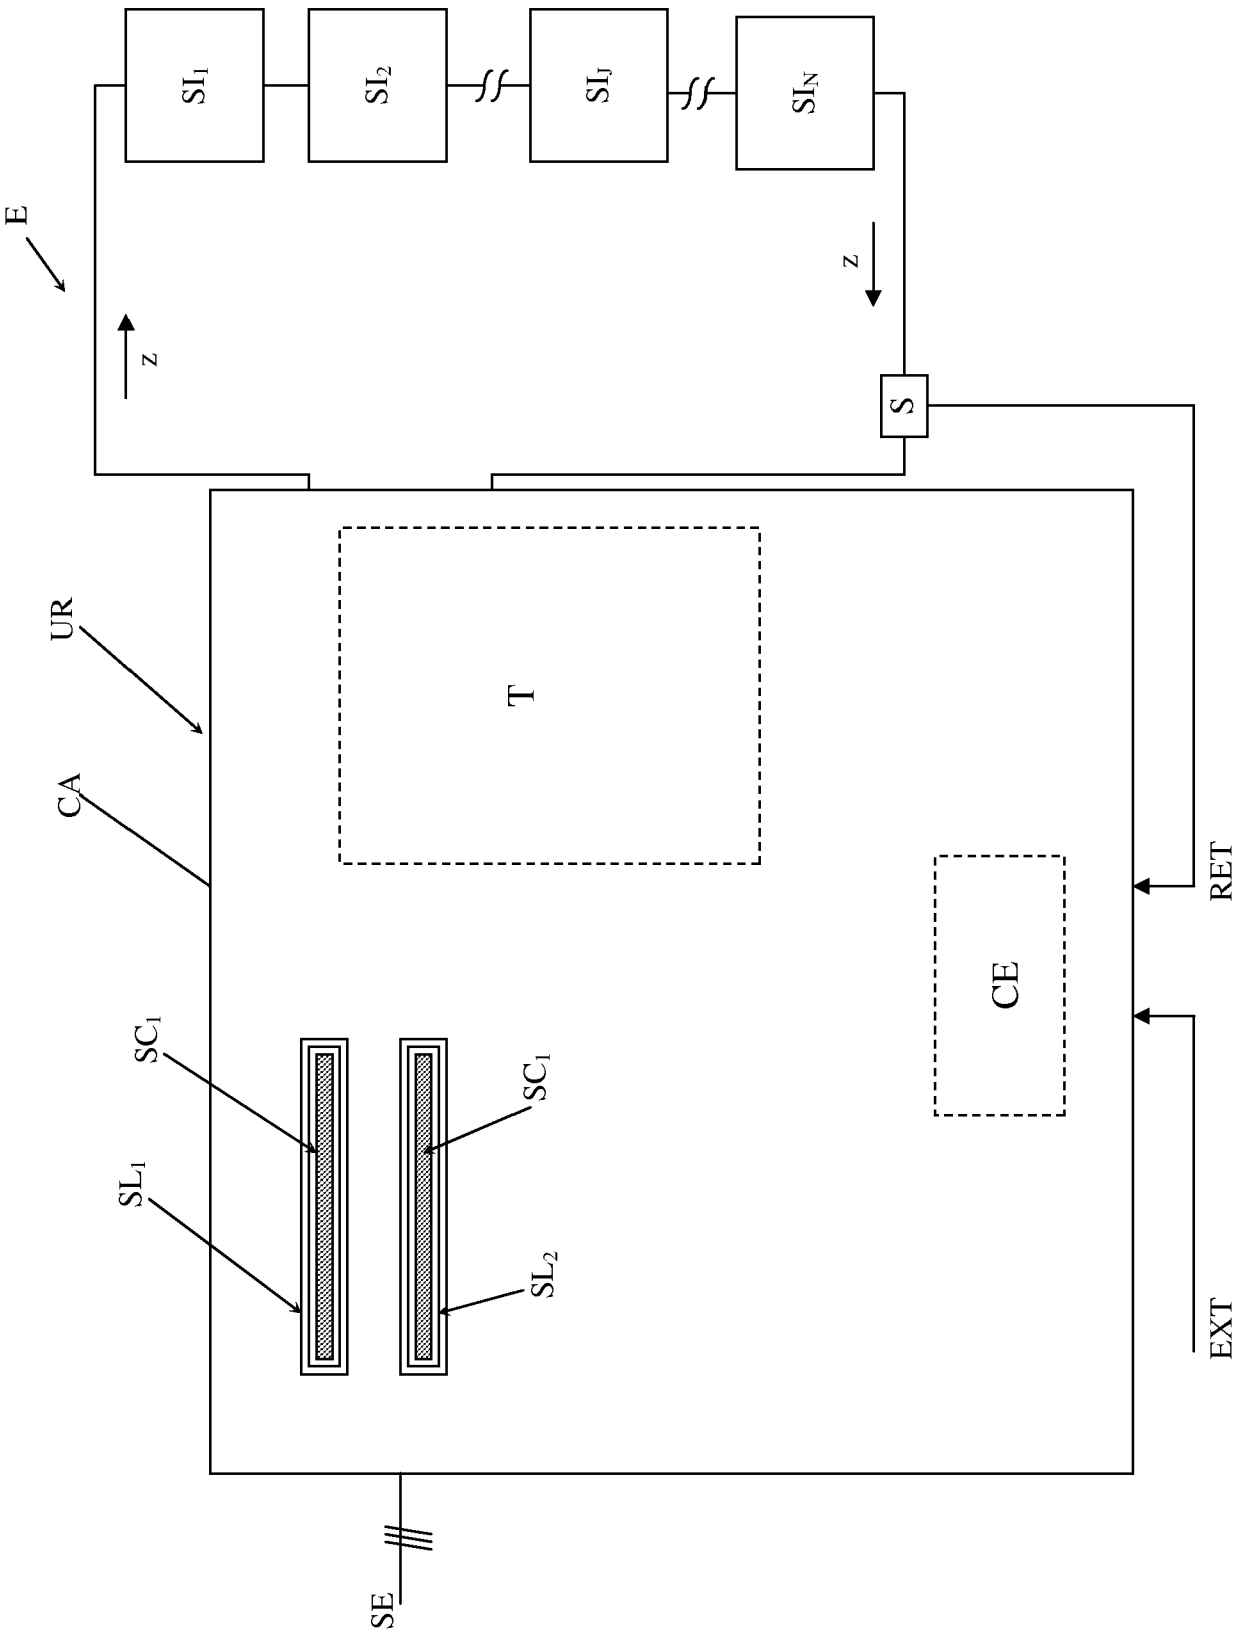


FIGURE 3

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2007/060707

A. CLASSIFICATION OF SUBJECT MATTER

INV. H05B39/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 95/17707 A (SIEMENS AG [DE]; VONGEHR OTTO [DE]) 29 June 1995 (1995-06-29) page 1, line 5 - page 3, line 7; figures 1-3	1-8
Y	US 5 352 958 A (CUNNINGHAM DAVID W [US] ET AL) 4 October 1994 (1994-10-04) column 3, line 43 - column 6, line 21; figures 1-6	1-8
A	EP 0 652 689 A (VARI LITE INC A DELAWARE CORP [US]) 10 May 1995 (1995-05-10)	
A	US 3 943 397 A (YANCEY LEROY D) 9 March 1976 (1976-03-09)	
A	WO 99/08489 A (SIEMENS AG [DE]) 18 February 1999 (1999-02-18)	
	-/-	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

3 January 2008

Date of mailing of the international search report

15/01/2008

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Albertsson, Gustav

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2007/060707

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/160707 A1 (NORMAN ROLF [SE] ET AL) 28 August 2003 (2003-08-28) -----	
A	EP 0 382 357 A (LEE COLORTAN INC [US] COLORTAN INC [US]) 16 August 1990 (1990-08-16) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2007/060707

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9517707	A	29-06-1995	CA 2179754 A1 EP 0737333 A1 US 5751566 A	29-06-1995 16-10-1996 12-05-1998
US 5352958	A	04-10-1994	DE 69316914 D1 DE 69316914 T2 EP 0670101 A1 WO 9412006 A1	12-03-1998 27-08-1998 06-09-1995 26-05-1994
EP 0652689	A	10-05-1995	AU 693477 B2 AU 7766794 A CA 2134848 A1 DE 69422686 D1 JP 7241085 A TW 387650 Y US 5640061 A	02-07-1998 18-05-1995 06-05-1995 24-02-2000 12-09-1995 11-04-2000 17-06-1997
US 3943397	A	09-03-1976	NONE	
WO 9908489	A	18-02-1999	EP 1002449 A1 PL 338142 A1	24-05-2000 25-09-2000
US 2003160707	A1	28-08-2003	NONE	
EP 0382357	A	16-08-1990	DE 69018494 D1 DE 69018494 T2 JP 2242590 A MX 166792 B US 4972125 A	18-05-1995 10-08-1995 26-09-1990 04-02-1993 20-11-1990