



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 371 807 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.12.2003 Bulletin 2003/51

(51) Int Cl.7: **E06B 9/32**

(21) Application number: **02254014.0**

(22) Date of filing: **10.06.2002**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicants:
• **Nien Made Enterprise Co Ltd**
Chang Hua Hsien (TW)
• **INDUSTRIAL TECHNOLOGY RESEARCH
INSTITUTE**
Hsin-Chu Hsien 311 (TW)

(72) Inventors:
• **Wen, Yu-Che**
Gueishan Shiang, Taoyuan (TW)
• **Lui, Song-He**
Shinshing Chiu, Kaohsiung (TW)
• **Hsu, Ya-Wei**
Hsin Chu City (TW)

(74) Representative:
Cheyne, John Robert Alexander Mackenzie
Haseltine Lake & Co.,
Imperial House,
15-19 Kingsway
London WC2B 6UD (GB)

(54) **Electromagnetic clutch-controlled electric blind**

(57) An electromagnetic clutch-controlled electric blind is constructed to include a blind body formed of a headrail defining a receiving chamber, a set of slats, and a bottom rail, a power drive, the power drive including a reversible motor and electromagnetic clutch means connectable to the motor, an amplitude modulation set coupled to the motor for rotation with the motor to lift/lower the slats to the desired elevation, a frequency modulation set coupled to the motor through the electromagnetic clutch means and adapted for controlling tilting angle of the slats.

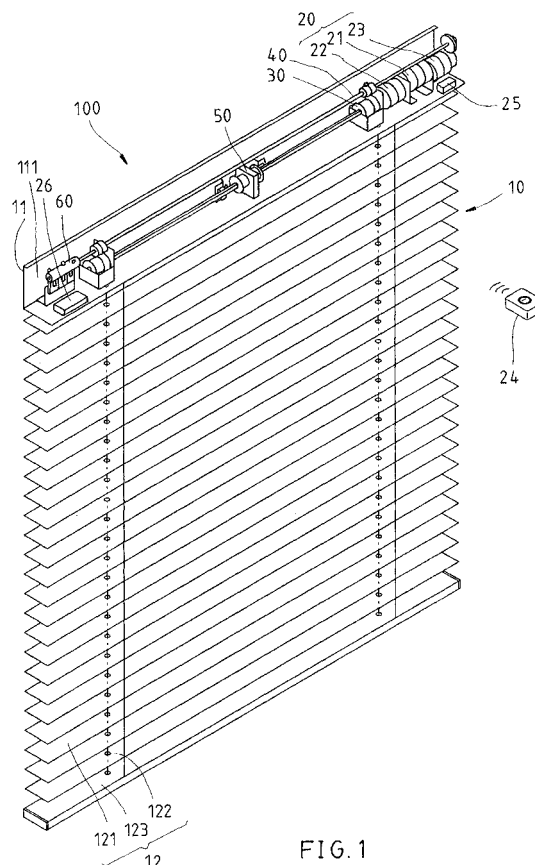


FIG. 1

EP 1 371 807 A1

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention:

[0001] The present invention relates to Venetian blinds and, more specifically, to an electromagnetic clutch-controlled electric blind.

2. Description of the Related Art:

[0002] A regular Venetian blind comprises headrail, a bottom rail, a plurality of slats arranged in parallel between the headrail and the bottom rail, an amplitude modulation control mechanism for controlling lifting and positioning of the bottom rail to change the extending area of the blind, a frequency modulation control mechanism for controlling the tilting angle of the slats to regulate the light. The amplitude modulation control mechanism comprises an endless lift cord suspended from the headrail at one lateral side for pulling by hand to lift/lower the bottom rail. The frequency modulation control mechanism comprises a frequency modulation member disposed at one lateral side of the blind for permitting rotation by the user to regulate the tilting angle of the slats. When adjusting the elevation of the bottom rail, the user must approach the blind and pull the lift cord by hand with much effort. Further, because the lift cord is not kept out of reach of children, children may pull the lift cord for fun. In case the lift cord is hung on a child's head, a fetal accident may occur.

[0003] US Patent No. 5103888 discloses a motor-driven blind, which keeps the lift cord from sight. According to this design, a motor is mounted in the headrail or bottom rail, and controlled by a remote controller to roll up or let off the lift cord. The motor is used to control lifting of the lift cord only. When adjusting the tilting angle of the slats, the user must approach the blind and touch-control a tilting control unit. This operation manner is still not convenient.

SUMMARY OF THE INVENTION

[0004] The present invention has been accomplished to provide an electromagnetic clutch-controlled electric blind, which eliminates the aforesaid drawbacks. It is the main object of the present invention to provide an electromagnetic clutch-controlled electric blind, which controls lifting/lowering of the slats and bottom rail of the Venetian blind as well as tilting of the slats. It is another object of the present invention to provide an electromagnetic clutch-controlled electric blind, which is compact, and requires less installation space. It is still another object of the present invention to provide an electromagnetic clutch-controlled electric blind, which is inexpensive to manufacture. To achieve these objects of the present invention, the electromagnetic clutch-controlled

electric blind comprises a blind body formed of a headrail, a set of slats, and a bottom rail, a power drive, the power drive including a reversible motor and electromagnetic clutch means connectable to the motor, an amplitude modulation set coupled to the motor for rotation with the motor to lift/lower the slats to the desired elevation, a frequency modulation set coupled to the motor through the electromagnetic clutch means and adapted for controlling tilting angle of the slats.

BRIEF DESCRIPTION OF THE DRAWINGS

[0005]

FIG. 1 is a perspective view of an electromagnetic clutch-controlled electric blind according to a first embodiment of the present invention.

FIG. 2 is a side view in an enlarged scale of a part of the electromagnetic clutch-controlled electric blind shown in FIG. 1.

FIG. 3 is an elevational view in an enlarged scale of a part of the electromagnetic clutch-controlled electric blind shown in FIG. 1, showing the arrangement of the power drive and the amplitude modulation set.

FIG. 4 is an elevational view in an enlarged scale of a part of the electromagnetic clutch-controlled electric blind shown in FIG. 1, showing the arrangement of the power drive, the amplitude modulation set, and the frequency modulation set.

FIG. 5 is an elevational view in an enlarged scale of a part of the electromagnetic clutch-controlled electric blind shown in FIG. 1, showing the arrangement of the amplitude modulation detection unit.

FIGS. 6~8 show the operation of the amplitude modulation set according to the first embodiment of the present invention.

FIG. 9 is an elevational view in an enlarged scale of a part of the first embodiment of the present invention, showing the arrangement of the frequency modulation detection unit.

FIG. 10 is a system block diagram of the first embodiment of the present invention.

FIG. 11 is a system block diagram of a second embodiment of the present invention.

FIG. 12 is a system block diagram of a third embodiment of the present invention.

FIG. 13 is a system block diagram of a fourth embodiment of the present invention.

FIG. 14 is a system block diagram of a fifth embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

[0006] Referring to FIG. 1, an electromagnetic clutch-controlled electric blind **100** is shown comprised of a blind body **10**, a power drive **20**, an amplitude modula-

tion set **30**, a frequency modulation set **40**, an amplitude modulation detection unit **50**, and a frequency modulation detection unit **60**.

[0007] The blind body **10**, as shown in FIG. 1, is a Venetian blind comprised of a headrail **11** and a slat set **12**. The headrail **11** is mountable to the top side of a window, comprising an inside holding chamber **111**, and two through holes **112** bilaterally disposed at a bottom side in communication with the holding chamber **111**. The slat set **12** is comprised of a plurality of slats **121** and a bottom rail **123**. Each slat **121** has two through holes **122** corresponding to the through holes **112** of the headrail **11**.

[0008] The power drive **20** comprises a double side reversible motor **21**, two electromagnetic clutches **22**; **23**, a signal transmitter **24**, a signal receiver **25**, and a battery **26**.

[0009] Referring to FIG. 2, the motor **21** is mounted inside the holding chamber **111** of the headrail **11**. The electromagnetic clutches **22**; **23** are coupled to the motor **21** at two sides to act upon rotation of the motor **21**. The signal transmitter **24** can be a remote controller or wired controller for providing control signal to the signal receiver **25**. According to the present preferred embodiment, the signal transmitter **24** is a remote controller for providing a radio control signal. The signal receiver **25** is electrically connected to the motor **21** and the electromagnetic clutches **22**; **23**, and adapted to control the operation of the motor **21** and the connection between the motor **21** and the electromagnetic clutches **22**; **23** subject to the nature of the control signal received from the signal transmitter **24**. The battery **25** can be storage battery, dry battery, planar battery, cylindrical battery, or mercury battery mounted inside of the holding chamber **111** and electrically connected to the motor **21** to provide the motor **21** with the necessary working power.

[0010] Referring to FIGS. 2 and 3, the amplitude modulation set **30** comprises a spindle **31**, two holders **32**, two bobbins **33**, and two amplitude modulation lift cords **34**. The spindle **31** is a rod member having a non-circular cross section. According to this embodiment, the spindle **31** is a rectangular rod member having one end coupled to one electromagnetic clutch **22**. The holders **32** are fixedly mounted in the holding chamber **111** of the headrail **11** corresponding to the through holes **112** of the headrail **11**, each defining a holding chamber **321** respectively disposed in communication with the through holes **112** of the headrail **11**. The bobbins **33** are respectively mounted in the holding chambers **321** of the holders **32** for synchronous rotation with the spindle **31**. Each bobbin **33** has an axial through hole **331** fitting the cross section of the spindle **31**. The peripheral wall of each bobbin **33** defines a lift cord winding face **333** and a conical guide face **332** at one end of the lift cord winding face **333**. The conical guide faces **332** of the bobbins **33** are respectively disposed in vertical alignment with the through holes **112** of the headrail **11**. Each amplitude modulation lift cord **34** has one end fixedly

connected to the end of the lift cord winding face **333** of one bobbin **33**, and the other end wound round the lift cord winding face **333** and the conical guide face **332** of the corresponding bobbin **33** and then inserted through one through hole **112** of the headrail **11** and one through hole **122** of each slat **12** and then fixedly connected to the bottom rail **123**. By means of rotating the bobbins **33** to roll up or let off the respective amplitude modulation lift cords **34**, the bottom rail **123** is lifted or lowered to the desired elevation.

[0011] Referring to FIG. 4 and FIG. 1 again, the frequency modulation set **40** is comprised of a transmission gear set **41**, a spindle **42**, two wheels **43**, and two frequency modulation lift cords **44**. The transmission gear set **41** is (comprised of a first gear **411** and a second gear **412**) coupled to the other electromagnetic clutch **23** and controlled to rotate by the electromagnetic clutch **23**. The spindle **42** has one end fixedly connected to the transmission gear set **41**, for rotation with the transmission gear set **41**. The wheels **43** are respectively mounted on the spindle **42** corresponding to the through holes **112** of the headrail **11** for synchronous rotation with the spindle **42**, each having an axial hole **431** that fits the cross section of the spindle **42**. The frequency modulation lift cords **44** are respectively wound round the wheels **43**, each having two ends respectively inserted through the through holes **112** of the headrail **11** and fixedly connected to the slats **121** and the bottom rail **123** for controlling tilting of the slats **121** to regulate the amount of light passing through the blind **10**.

[0012] Referring to FIG. 5 and FIG. 1 again, the amplitude modulation detection unit **50** is installed in the holding chamber **111** of the headrail **11** between the holders **32** of the amplitude modulation set **30**, and adapted to stop the motor **21** of the power drive **20** when the slats **121** lowered to the lower limit position or lifted to the upper limit position. The amplitude modulation detection unit **50** is comprised of a mounting plate **51**, locating block **52**, a roller **53**, and two limit switches **54**; **55**. The mounting plate **51** is fixedly fastened to the peripheral wall of the holding chamber **111** of the headrail **11**. The locating block **52** is fixedly mounted inside the holding chamber **111** of the headrail **11**, having a center screw hole **521**. The roller **53** is coupled to the spindle **31** of the amplitude modulation set **30** for synchronous rotation, having an outer thread **532** threaded into the center screw hole **521** of the locating block **52**. The roller **53** has an axial hole **531** fitting the cross section of the spindle **31**. Rotation of the spindle **31** causes synchronous rotation of the roller **53** with the spindle **31** and axial movement of the roller **53** relative to the locating block **52**. The limit switches **54**; **55** are respectively mounted on the mounting plate **51** at two sides relative to the wheel **53** (in positions of the ends of the path of the axial movement of the wheel **53** corresponding to the upper limit position and lower limit position of the slats **121** of the blind **10**), and electrically connected to the motor **21**. When the slats **121** moved to the upper or lower limit

position, the wheel **53** touches one limit switch **54** or **55**, thereby causing the limit switch **54** or **55** to stop the motor **21**.

[0013] Referring to FIG. 9 and FIG. 1 again, the frequency modulation detection unit **60** is comprised of a wheel **61**, a support **62**, and a sensor **63**. The wheel **61** is fixedly fastened to one end of the spindle **42** of the frequency modulation set **40** remote from the transmission gear set **41** for synchronous rotation with the spindle **42**, having three pins protruded from the periphery at different angles, namely, the left limit position detection pin **611**, the horizontal position detection pin **612**, and the right limit position detection pin **613**. The support **62** is fixedly mounted in the holding chamber **111** of the headrail **11**. The sensor **63** is fixedly mounted on the support **62** and electrically connected to the motor **21** of the power drive **20**, having a left limit position detection portion **631**, a horizontal position detection portion **632**, and a right limit position detection portion **633** respectively disposed corresponding to the left limit position detection pin **611**, the horizontal position detection pin **612**, and the right limit position detection pin **613**. During operation of the motor **21** to rotate the spindle **42** of the frequency modulation set **40**, the wheel **61** is rotated with the spindle **42**. When the slats **121** tilted leftwards to the limit, the left limit position detection pin **611** induces the left limit position, detection portion **631**, thereby causing the sensor **63** to stop the motor **21**. When the slats **121** tilted rightwards to the limit, the right limit position detection pin **613** induces the right limit position detection portion **633**, thereby causing the sensor **63** to stop the motor **21**.

[0014] With respect to the amplitude modulation control of lifting (receiving) the blind, the operation of the present invention is outlined hereinafter. When the user operated the signal transmitter **23** of the power drive **20** to transmit a control signal of lifting the blind, the signal receiver **24** immediately receives the signal. Upon receipt of the signal, the signal receiver **24** switches on one electromagnetic clutch **22** to connect the amplitude modulation set **30** to the motor **21** and switches off the other electromagnetic clutch **23** to disconnect the frequency modulation set **40** from the motor **21** and, at the same time drives the motor **21** to rotate in one direction, thereby causing the spindle **31** of the amplitude modulation set **30** to be rotated with the motor **21**. Therefore, the bobbins **33** are rotated with the spindle **31** to roll up the amplitude modulation lift cords **34** along the respective conical guide faces **332** and then the respective lift cord winding faces **333** smoothly to lift the bottom rail **123** and then the slats **121** to the desired elevation. When the slat set **12** received to the upper limit position, the amplitude modulation detection unit **50** is induced to stop the motor **21**.

[0015] With respect to the amplitude modulation control of lowering (extending out) the blind, the operation of the present invention is outlined hereinafter. When the user operated the signal transmitter **23** of the power

drive **20** to transmit a control signal of lowering the blind, the signal receiver **24** immediately receives the signal. Upon receipt of the signal, the signal receiver **24** switches on one electromagnetic clutch **22** to connect the amplitude modulation set **30** to the motor **21** and switches off the other electromagnetic clutch **23** to disconnect the frequency modulation set **40** from the motor **21** and, at the same time drives the motor **21** to rotate in the reversed direction, thereby causing the spindle **31** of the amplitude modulation set **30** to be rotated with the motor **21**. Therefore, the bobbins **33** are rotated with the spindle **31** to let off the amplitude modulation lift cords **34** and to further lower the bottom rail **123** and the slats **121**. When the slat set **12** lowered to the lower limit position, the amplitude modulation detection unit **50** is induced to stop the motor **21** (see FIGS. 6~8).

[0016] With respect to the control of tilting of the slats **121**, the operation is described hereinafter. At first, the user operates the signal transmitter **23** to transmit a slat tilting control signal to the signal receiver **24**. Upon receipt of the control signal, the signal receiver **24** immediately switches off one electromagnetic clutch **22** to disconnect the amplitude modulation set **30** from the motor **21** and switches on the other electromagnetic clutch **23** to connect the frequency modulation set **40** to the motor **21** and, at the same time drives the motor **21** to rotate in one direction, thereby causing the transmission gear set **41** to rotate the spindle **42** and the wheels **43** of the frequency modulation set **40**, so as to turn the frequency modulation lift cords **44** in tilting the slats **121**. When the slats **121** tilted to the left or right limit position, the left limit position detection pin **611** or right limit position detection pin **613** of the frequency modulation detection unit **60** immediately stops the motor **21**.

[0017] Further, when receiving or extending out the slats **121**, the signal receiver **25** switches on the electromagnetic clutch **23** to connect the frequency modulation set **40** to the motor **21**, for enabling the slats **121** to be automatically regulated to the horizontal position (by means of the control of the relative action between the horizontal position pin **612** and the horizontal position detection portion **632**), i.e., when the horizontal position pin **612** and the horizontal position detection portion **632** matched, the electromagnetic clutch **23** is switched off to disconnect the frequency modulation set **40** from the motor **21** and the electromagnetic clutch **22** is switched on to connect the amplitude modulation set **30** to the motor **21** before adjusting the slats **121**.

[0018] Based on the above description, the present invention can be explained by means of the system block diagram of FIG. 10. As illustrated, the two sides of the motor **21** are respectively connected to the amplitude modulation set **30** and the frequency modulation set **40** by the electromagnetic clutches **22;23**. One single driving source is sufficient to drive the amplitude modulation set **30** and the frequency modulation set **40**.

[0019] FIG. 11 is a system block diagram showing a second embodiment of the present invention. According

to this embodiment, the amplitude modulation set **30** is directly coupled to the motor **21**, and the frequency modulation set **40** is coupled to the motor **21** through the transmission gear set **41** and the electromagnetic clutch **23**. When lifting/lowering the slats, switch off the electromagnetic clutch **23** to disconnect the frequency modulation set **40** from the motor **21**. When tilting the slats, switch on the electromagnetic clutch **23** to connect the frequency modulation set **40** to the motor **21**. At this time, the amplitude modulation set **30** moves slightly following the action of the frequency modulation set **40**. However, because this movement causes the bottom rail to be lifted or lowered within a short distance only, this insignificant amount of movement does not affect the reliability of the operation.

[0020] FIG. 12 is a system block diagram showing a third embodiment of the present invention. According to this embodiment, the motor **21'** is a single side motor coupled to the transmission gear set **41**; the amplitude modulation set **30** and the frequency modulation set **40** are connected in parallel to the transmission gear set **41** through the electromagnetic clutches **22;23** respectively.

[0021] FIG. 13 is a system block diagram showing a fourth embodiment of the present invention. According to this embodiment, the motor **21'** is a single side motor coupled to the transmission gear set **41**; the amplitude modulation set **30** is directly connected to the transmission gear set **41**; the frequency modulation set **40** is connected to the transmission gear set **41** through the electromagnetic clutch **23**.

[0022] FIG. 14 is a system block diagram showing a fifth embodiment of the present invention. According to this embodiment, the amplitude modulation set **30** is coupled between the single side motor **21'** and the transmission gear set **41**, and the frequency modulation set **40** is coupled to the transmission gear set **41** through the electromagnetic clutch **23**.

[0023] The structure and function of the present invention are well understood from the aforesaid detailed description. The advantages of the present invention are outlined hereinafter.

1. Slat lifting and tilting dual-control function:

Two electromagnetic clutches are used to couple the amplitude modulation set, which controls lifting of the slats, and the frequency modulation set, which controls tilting of the slats, to the motor, enabling the amplitude modulation set and the frequency modulation set to be driven by motor to lift or tilt the slats.

2. Single driving source and compact size:

Because two electromagnetic clutches are used to control connection of the amplitude modulation set and the frequency modulation

set, one single driving source is sufficient to drive the amplitude modulation set and the frequency modulation set. Therefore, the invention is inexpensive, and requires less installation space.

3. Durable mechanical design:

The electromagnetic clutch-controlled electric blind is provided with detector means to detect the positioning of the slats and to automatically stop the motor when the slats moved to the limit in each mode, preventing damage to the parts of the mechanism.

Claims

1. An electromagnetic clutch-controlled electric blind comprising:

a blind body, said blind body having a headrail and a slat set, said headrail having an internal holding chamber, said slat set having a plurality of slats;

a power drive, said power drive having a reversible motor, and at least one electromagnetic clutch controlled between a first position coupled to said motor and a second position disconnected from said motor;

an amplitude modulation set, said amplitude modulation set having a spindle coupled to said motor for rotation with said motor to lift/lower said slats to the desired elevation;

a frequency modulation set, said frequency modulation set having a spindle coupled to said motor through said electromagnetic clutch and adapted for controlling tilting angle of said slats.

2. The electromagnetic clutch-controlled electric blind as claimed in claim 1, wherein said motor is a single side reversible motor.

3. The electromagnetic clutch-controlled electric blind as claimed in claim 1, wherein said motor is a double side reversible motor.

4. The electromagnetic clutch-controlled electric blind as claimed in claim 1, the spindle of said amplitude modulation set is coupled to said motor through a electromagnetic clutch.

5. The electromagnetic clutch-controlled electric blind as claimed in claim 1, wherein said power drive further comprises a transmission gear set coupled between said motor and said amplitude modulation set.

6. The electromagnetic clutch-controlled electric blind as claimed in claim 1, further comprising an amplitude modulation detection unit mounted in the internal holding chamber of said headrail and adapted to stop said motor when said amplitude modulation detection unit lifted/lowered said slats to a limit position. 5
7. The electromagnetic clutch-controlled electric blind as claimed in claim 6, wherein said amplitude modulation detection unit comprises a locating block fixedly mounted in the internal holding chamber of said headrail, said locating block having a center screw hole, two limit switches provided inside the internal holding chamber of said headrail and disposed at two sides relative to said locating block, a roller fixedly mounted on the spindle of said amplitude modulation set for synchronous rotation and threaded into the center screw hole of said locating block for axial movement between said limit switches to trigger said limit switches to stop said motor when touched one of said limit switch upon rotation of the spindle of said amplitude modulation set. 10 15 20
8. The electromagnetic clutch-controlled electric blind as claimed in claim 1, further comprising a frequency modulation detection unit mounted in the internal holding chamber of said headrail and adapted to stop said motor when said frequency modulation set tilted said slats to a limit angular position. 25 30
9. The electromagnetic clutch-controlled electric blind as claimed in claim 8, wherein said frequency modulation detection unit comprises a wheel fixedly fastened to one end of the spindle of said frequency modulation set for synchronous rotation, the wheel of said frequency modulation detection unit having a left limit position detection pin, a horizontal position detection pin, and a right limit position detection pin, and a sensor mounted in the internal holding chamber of said headrail and electrically connected to said motor of said power drive, said sensor having a left limit position detection portion, a horizontal position detection portion, and a right limit position detection portion respectively disposed corresponding to the left limit position detection pin, horizontal position detection pin, and right limit position detection pin of the wheel of said frequency modulation detection unit; when said motor started to drive said frequency modulation set to tilt said slats leftwards to a left limit angular position, said left limit position detection pin induces said left limit position detection portion, thereby causing sensor to stop said motor; when said motor started to drive said frequency modulation set to tilt said slats rightwards to a right limit angular position, said right limit position detection pin induces said right limit position detection portion, thereby causing sensor to stop said motor. 35 40 45 50 55
10. The electromagnetic clutch-controlled electric blind as claimed in claim 1, wherein said power drive further comprises a signal transmitter adapted to transmit one of a series of control signals, a signal receiver electrically connected to said motor and said at least one electromagnetic clutch and adapted to receive control signal from said signal transmitter and to switch on/off said at least one electromagnetic clutch and said motor subject to the nature of the control signal received, and a battery electrically connected to said motor and said at least one electromagnetic clutch to provide the necessary working power.
11. The electromagnetic clutch-controlled electric blind as claimed in claim 1, wherein said amplitude modulation set further comprises two holders fixedly mounted in the internal holding chamber of said headrail, two bobbins respectively mounted in said holders and fixedly mounted on the spindle of said amplitude modulation set for synchronous rotation, and two amplitude modulation lift cords, said amplitude modulation lift cords connected in parallel between said the bobbins of said amplitude modulation set and said bottom rail.
12. The electromagnetic clutch-controlled electric blind as claimed in claim 11, wherein each bobbin of said amplitude modulation set defines a lift cord winding face and a conical guide face at one end of said lift cord winding face for guiding winding of the corresponding amplitude modulation lift cord on the corresponding bobbin.
13. The electromagnetic clutch-controlled electric blind as claimed in claim 1, wherein said frequency modulation set further comprises a transmission gear set fixedly connected to the spindle of said frequency modulation set and coupled to said motor through one of said at least one electromagnetic clutch, two wheels respectively mounted on the spindle of said frequency modulation set for synchronous rotation, and two frequency modulation lift cords respectively wound round the wheels of said frequency modulation set, said frequency modulation lift cords each having two ends respectively connected in parallel to said slats and said bottom rail.

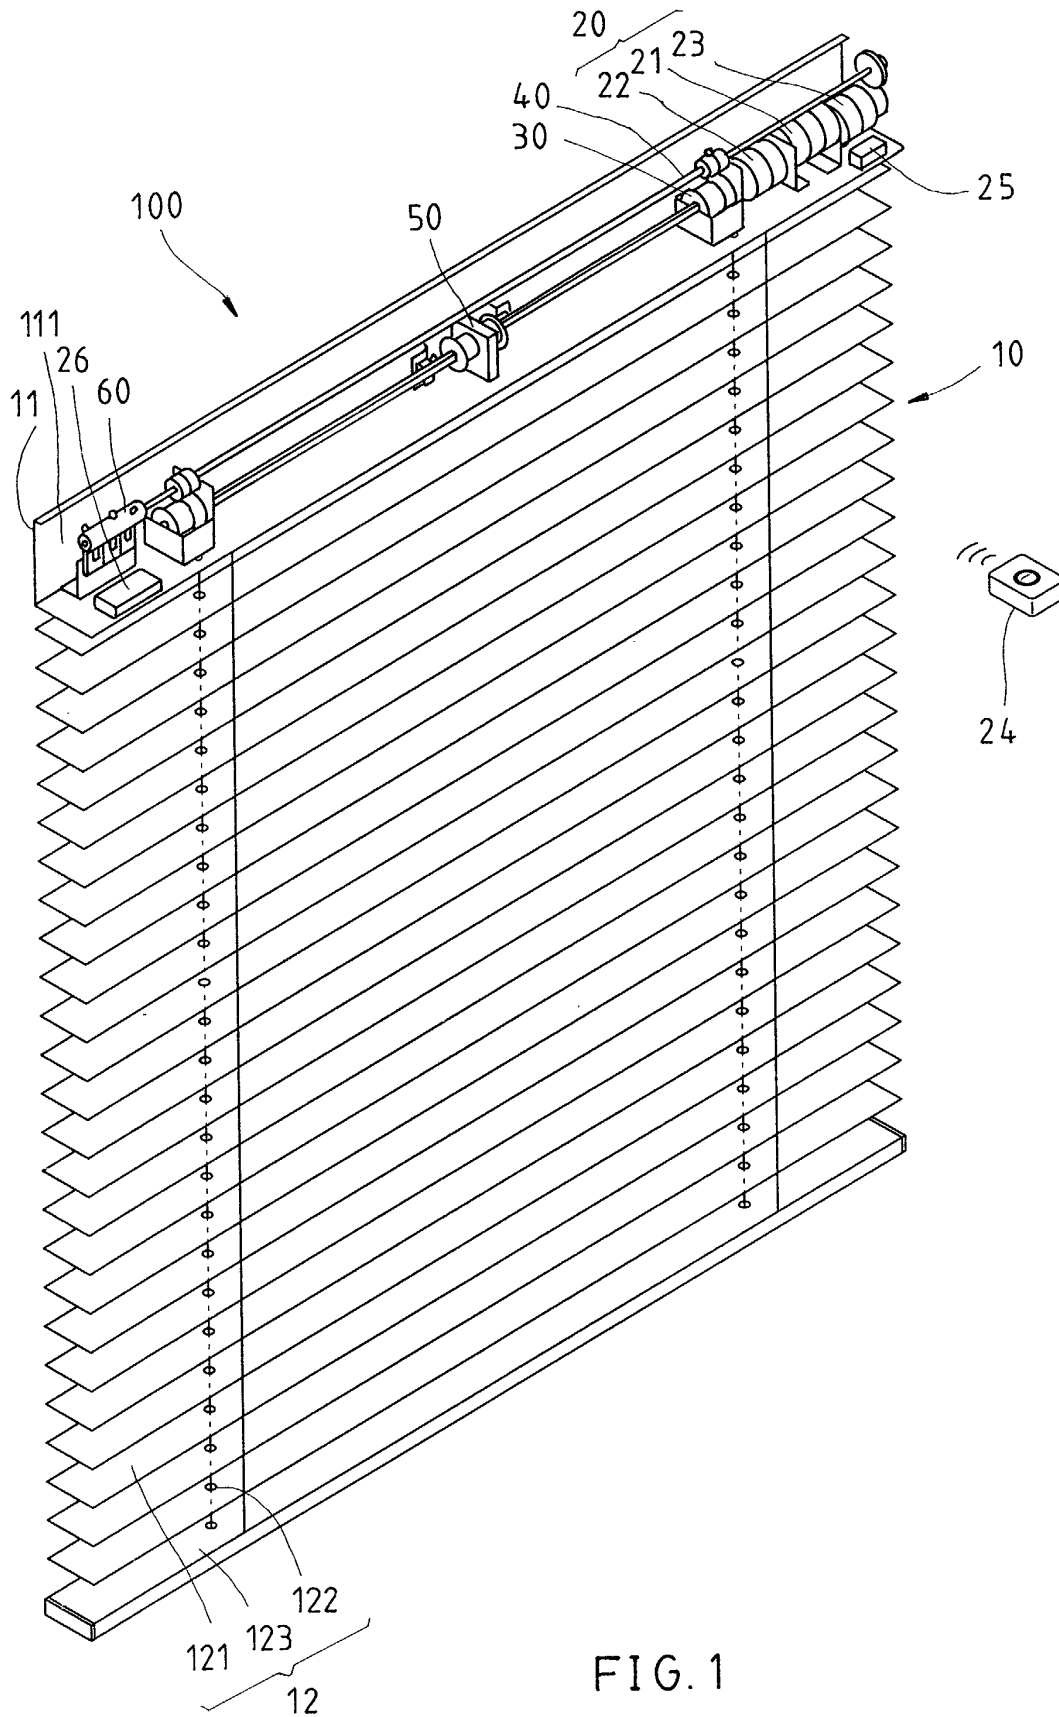


FIG. 1

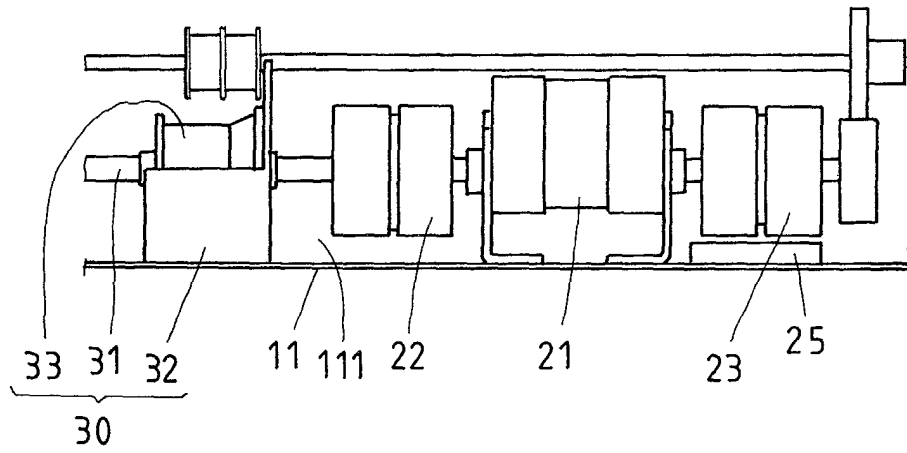


FIG. 2

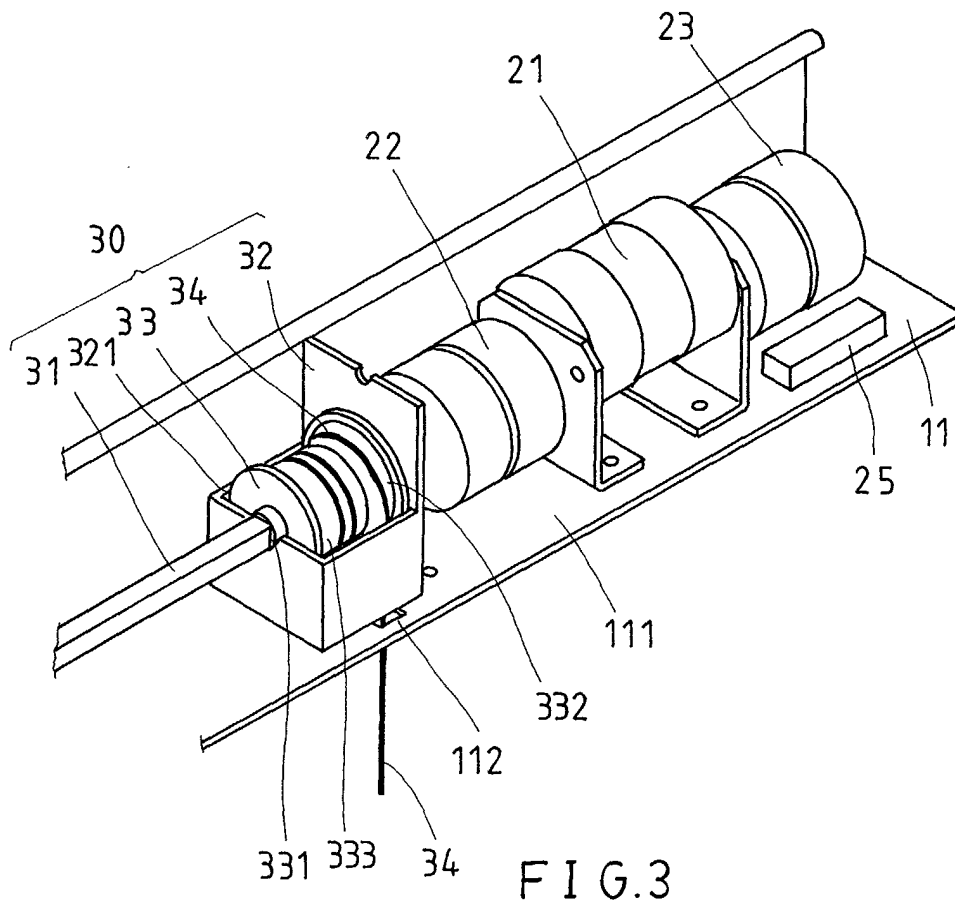
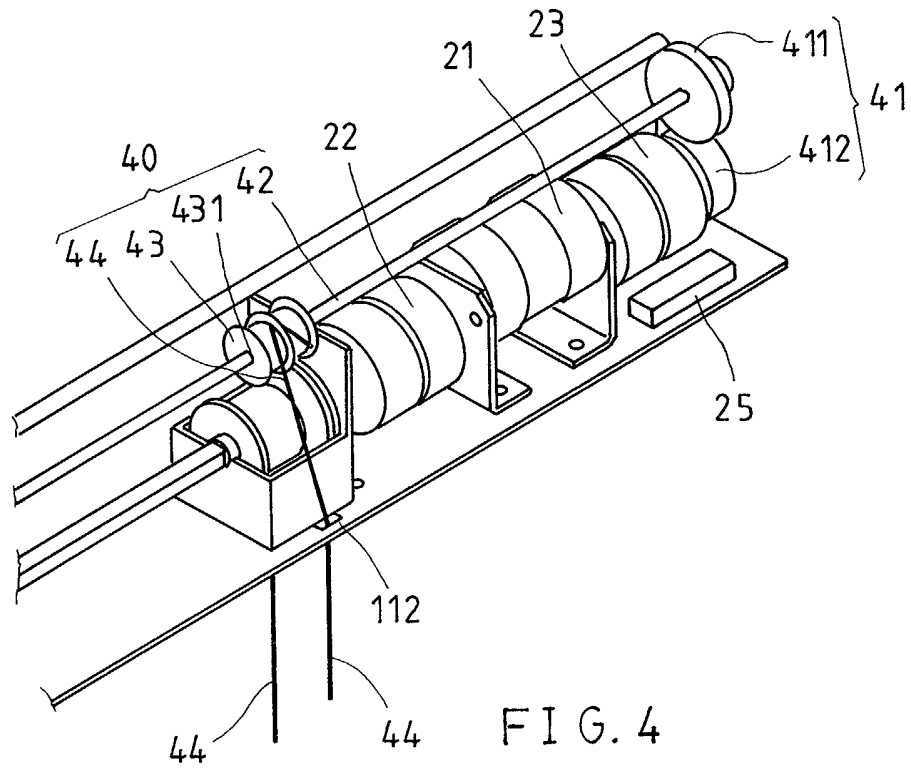
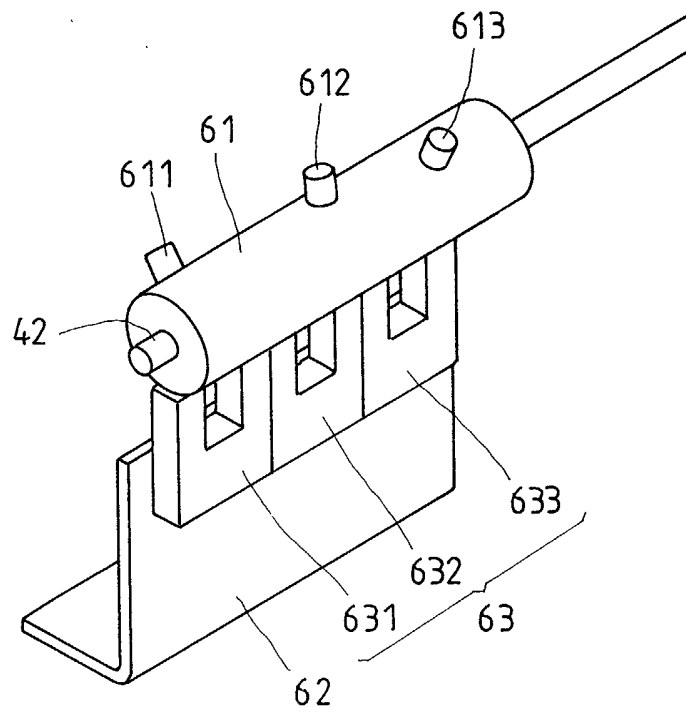


FIG. 3



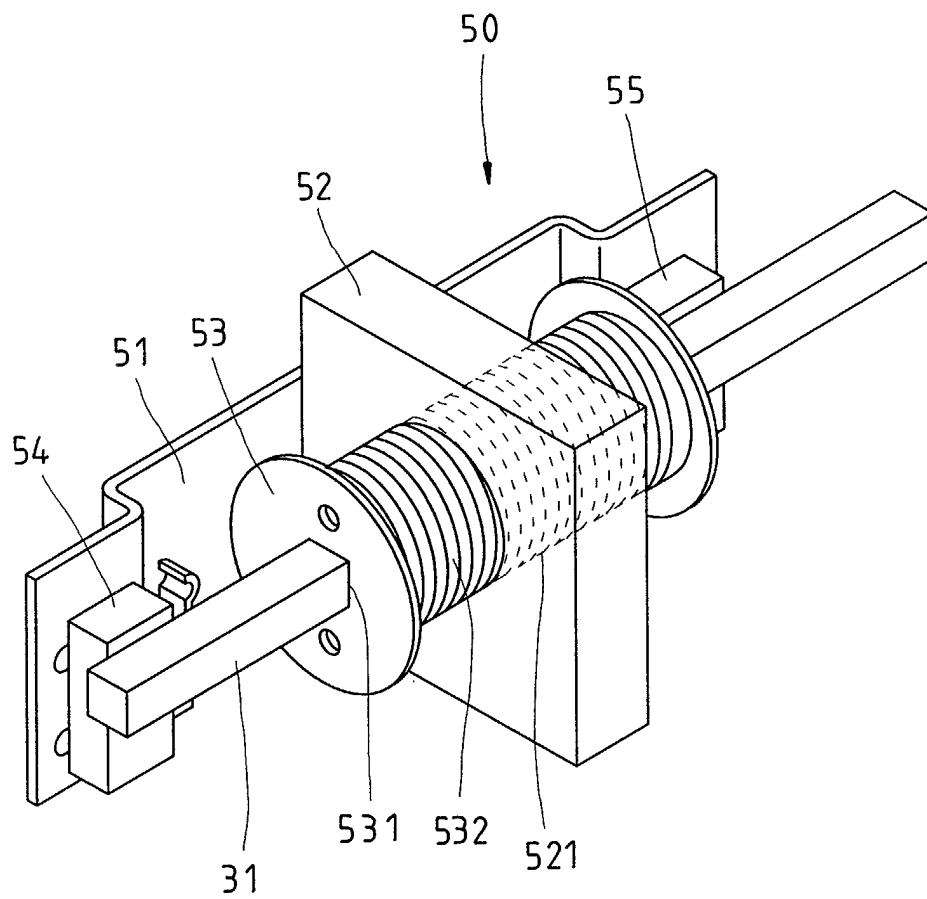
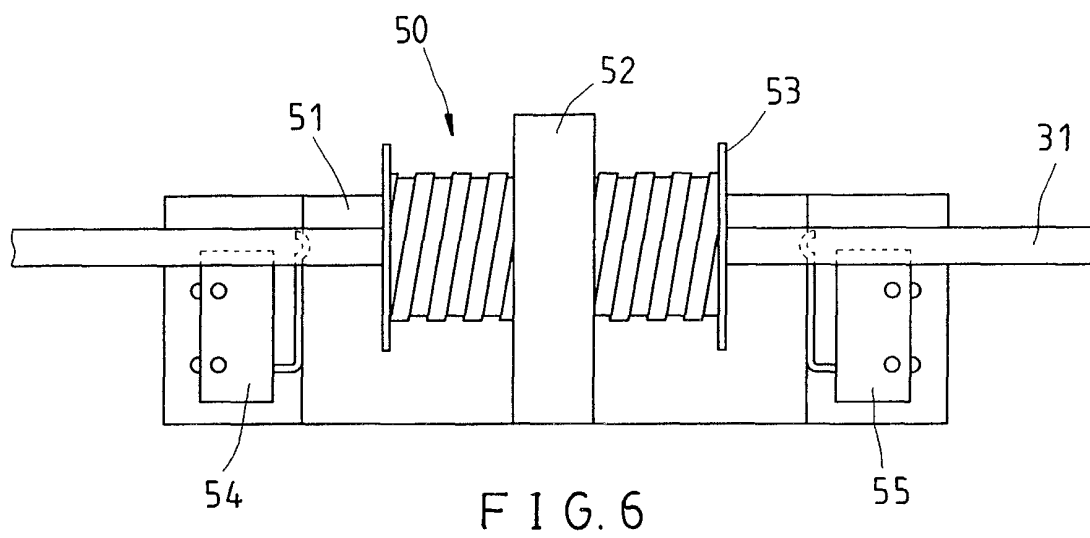
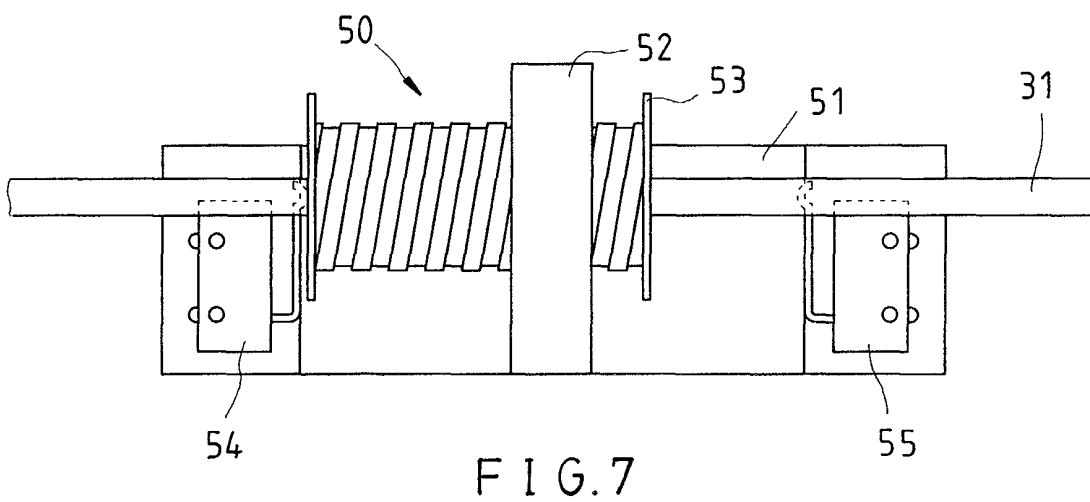
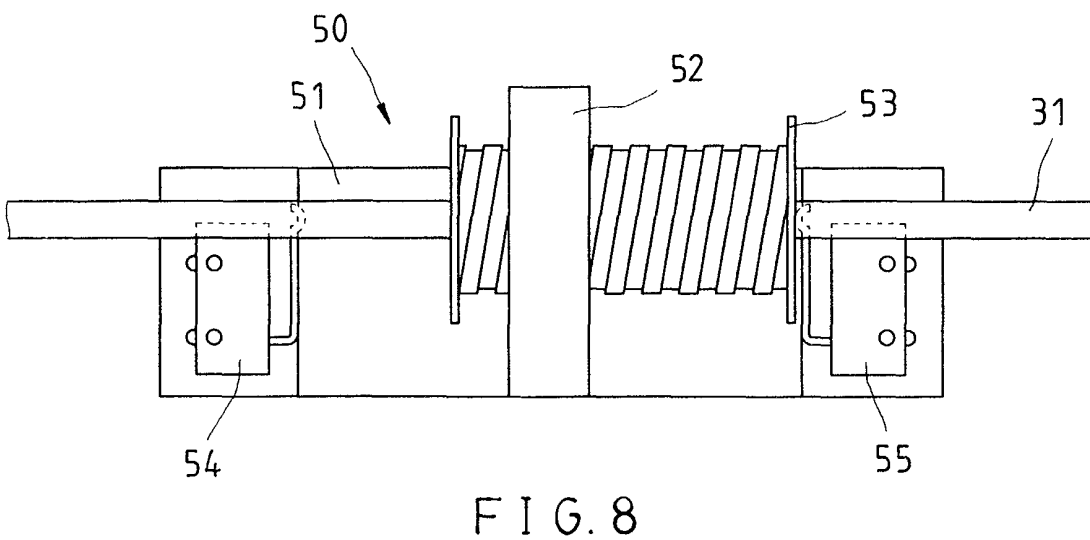


FIG. 5



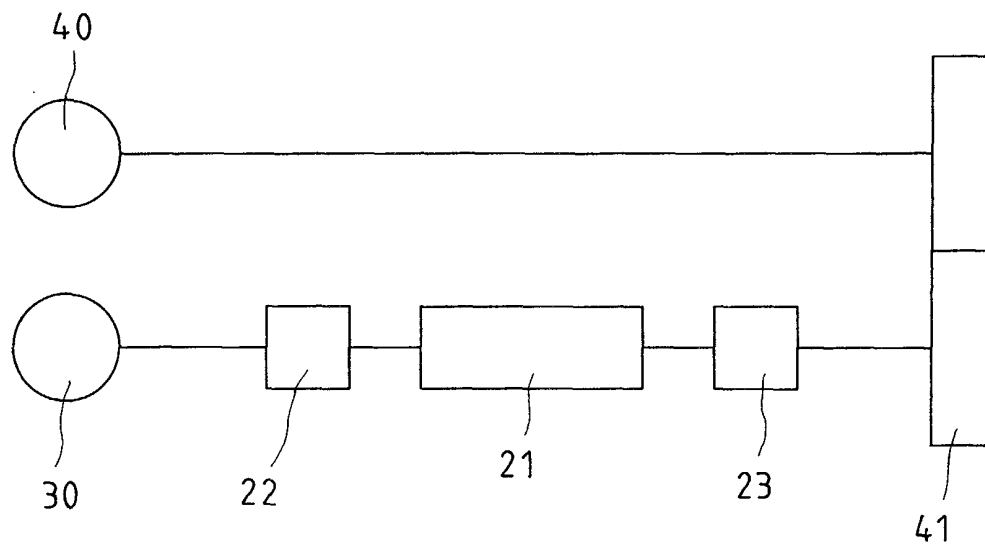


FIG. 10

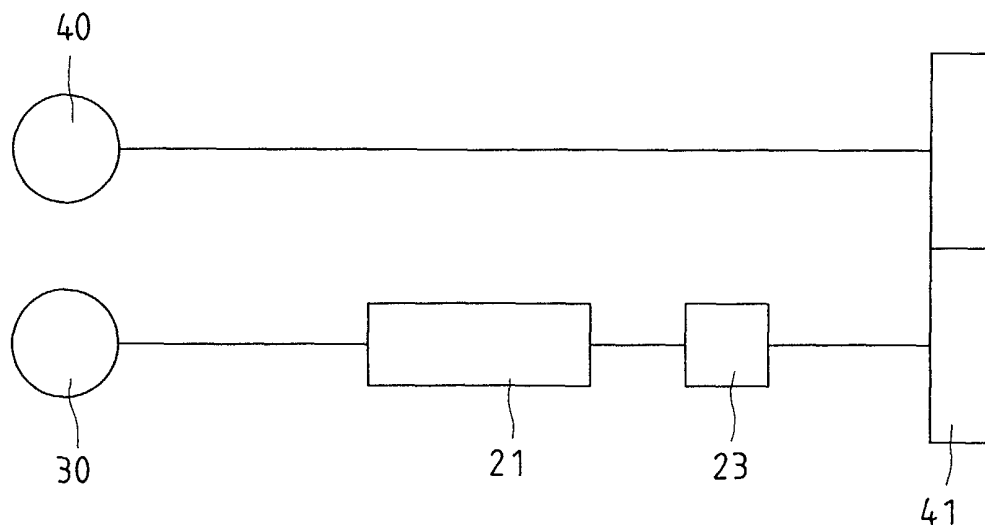


FIG. 11

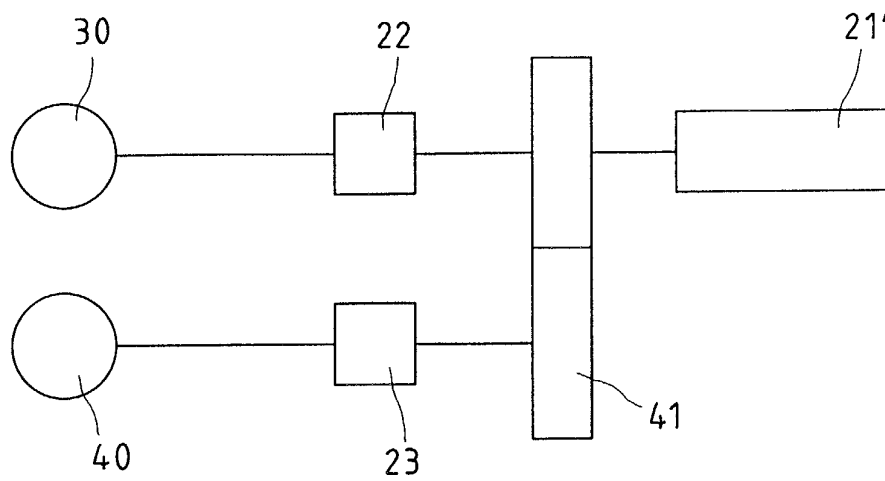


FIG. 12

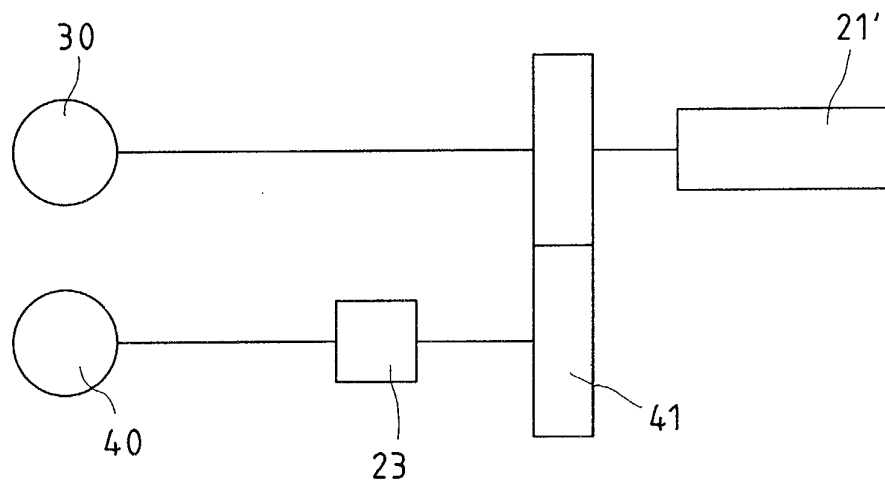


FIG. 13

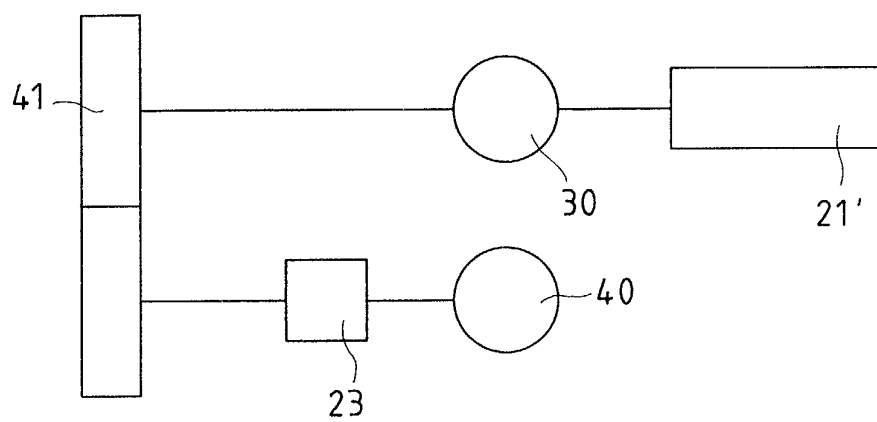


FIG. 14



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 4014

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	GB 1 046 268 A (AVERY & CO EST 1834 LTD J) 19 October 1966 (1966-10-19) * page 2, line 96 - page 3, line 53 *	1,2,4-8, 10,11	E06B9/32
Y	PATENT ABSTRACTS OF JAPAN vol. 016, no. 258 (M-1264), 11 June 1992 (1992-06-11) & JP 04 062288 A (TOSO CO LTD), 27 February 1992 (1992-02-27) * abstract *	1,2,4-7	
Y	PATENT ABSTRACTS OF JAPAN vol. 014, no. 046 (M-0926), 26 January 1990 (1990-01-26) & JP 01 275891 A (TOKYO BLIND KOGYO KK), 6 November 1989 (1989-11-06) * abstract *	8	
Y	US 6 079 471 A (KUCHAR OTTO) 27 June 2000 (2000-06-27) * column 7, line 38 - column 8, line 27; figure 9 *	10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 26, 1 July 2002 (2002-07-01) & JP 2001 248368 A (NICHIBEI CO LTD), 14 September 2001 (2001-09-14) * abstract *	11	E06B
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 6 November 2002	Examiner Knerr, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 4014

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

06-11-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 1046268	A	19-10-1966	NONE	
JP 04062288	A	27-02-1992	NONE	
JP 01275891	A	06-11-1989	JP 1830049 C	15-03-1994
US 6079471	A	27-06-2000	US 5531257 A	02-07-1996
			US 5482100 A	09-01-1996
			US 6330899 B1	18-12-2001
			US 6234236 B1	22-05-2001
			US 2001018954 A1	06-09-2001
			CA 2146086 A1	07-10-1995
			DE 69518940 D1	02-11-2000
			EP 1013871 A1	28-06-2000
			EP 1243742 A2	25-09-2002
			EP 0677638 A1	18-10-1995
JP 2001248368	A	14-09-2001	NONE	