

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 March 2002 (07.03.2002)

PCT

(10) International Publication Number  
**WO 02/19320 A1**

(51) International Patent Classification<sup>7</sup>: **G11B 5/584**

Nick, Petrus, Carolus, Johannes, Nicolaas [NL/NL];  
Kapteynlaan 25, NL-5505 AV Veldhoven (NL).

(21) International Application Number: PCT/NL01/00633

(22) International Filing Date: 28 August 2001 (28.08.2001)

(74) Agent: PRINS, A., W.; Vereenigde, Nieuwe Parklaan 97,  
NL-2587 BN The Hague (NL).

(25) Filing Language: Dutch

(81) Designated State (national): US.

(26) Publication Language: English

(30) Priority Data:  
1016037 28 August 2000 (28.08.2000) NL

(84) Designated States (regional): European patent (AT, BE,  
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,  
NL, PT, SE, TR).

(71) Applicant (for all designated States except US): ON-  
STREAM HOLDING B.V. [NL/NL]; Lodewijkstraat 1,  
NL-5652 AC Eindhoven (NL).

**Published:**


- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

(72) Inventors; and

(75) Inventors/Applicants (for US only): VAN HEES, Ian,  
Johannes, Bernardus [NL/NL]; Citadel 19, NL-6301 JG  
Zaltbommel (NL). FAN, Yujian [NL/NL]; Gen. Van Mer-  
lenstraat 1, NL-5623 GC Eindhoven (NL). ROSIELLE,

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: APPARATUS FOR POSITIONING AN OBJECT IN A TWO-STEP CONFIGURATION

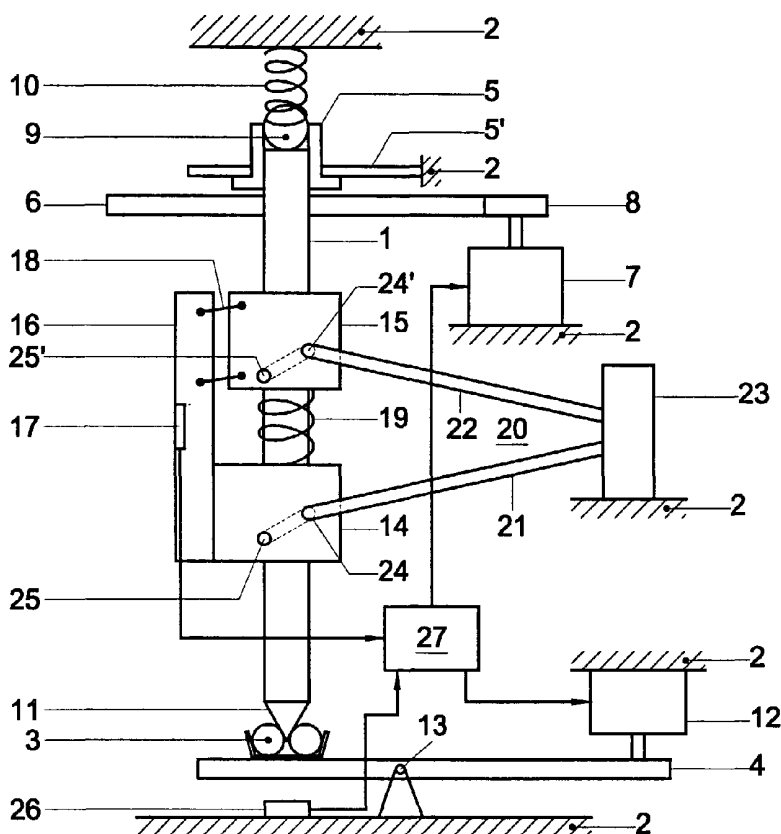

(57) Abstract: In an apparatus for positioning an object in a two-step configuration, such as, for instance, a magnetic head, in a recording and/or reproducing device relative to a magnetic tape, the object is coarsely movable by means of a spindle driven by a first motor and finely movable by means of a second motor. The spindle itself is movable in its longitudinal direction by means of the second motor. Not only the motor of the coarse positioning of the spindle, but also that of the fine positioning is fixed in the housing or frame of the apparatus.

WO 02/19320 A1

Title: Apparatus for positioning an object in a two-step configuration.

The present invention relates to an apparatus for positioning an object in a two-step configuration, such as, for instance, a magnetic head, in a recording and/or reproducing device relative to a magnetic tape, the object being coarsely movable by means of a spindle driven by a first motor and  
5 finely movable by means of a second motor. The apparatus is generally applicable in coarse-fine positioning systems where high positioning accuracies are of great importance.

If in a recording and/or reproducing device information is to be written by means of a magnetic head into a large number of tracks on a  
10 magnetic tape or is to be read from a magnetic tape, for instance in 192 tracks on a 8 mm wide tape, the magnetic head must be able to be accurately positioned in the width direction of the tape. In practice, such a positioning takes place by means of a servo loop, which, responding to track following signals in the tape, adjusts the magnetic head on the tape. In this  
15 regard, the magnetic head must be able to be adjusted both dynamically from one track to the other track and be kept on a track, even if small changes of position occur in the tape. To accurately realize such an adjustment, it is known to make use of a two-step actuator, in which by means of a spindle driven by a first motor a coarse positioning becomes  
20 possible so as to, in particular rapidly, move the magnetic head from one track to the other, while by means of a second motor a fine positioning becomes possible so as to keep, in particular, the magnetic head on the relevant track. In this known two-step actuator, the magnetic head with the second motor and the means for moving the magnetic head by means of this  
25 second motor are moved together as one whole along a spindle extending in the width direction of the tape, which spindle is controlled by the first

motor. Consequently, this two-step actuator may be regarded as one that is active in series configuration. Within this whole, the means for moving the magnetic head by means of the second motor comprise, for instance, a pivot axis. It is a drawback of this construction that a relatively great mass must  
5 be moved along the spindle for the coarse positioning, which implies a limitation to the accuracy attainable in rapid positioning.

It is an object of the invention to remove these drawbacks and further, more in general, to provide an apparatus for positioning an object in a two-step configuration, by which a rapid change of position becomes  
10 possible, while yet a very high positioning accuracy can be attained and, in particular, an apparatus for positioning a magnetic head which enables a rapid positioning of the magnetic head from one track to the other, while yet a very high positioning accuracy of the magnetic head can be attained.

According to the invention, the apparatus as described in the opening  
15 paragraph is therefore characterized in that the spindle itself is movable in its longitudinal direction by means of the second motor. When used in a recording and/or reproducing device, the magnetic head can be moved with a very small additional mass directly, so as to keep the distance between the above position-determining spindle and the magnetic head as small as  
20 possible, and rapidly, driven in its center of gravity, along the spindle in the width direction of the tape, while furthermore, independently thereof, the spindle with the magnetic head can be finely positioned in the width direction of the tape. This two-step actuator can be regarded as one that is active in parallel configuration, the two motors being firmly connected with  
25 the housing or a frame in which the object is movably arranged.

In a preferred embodiment, the spindle is, at one end, spring-supported in a housing or frame relative to which the object is movable and at the other end in a bearing movable in the longitudinal direction of the spindle by means of the second motor. To realize the spring support of one  
30 end of the spindle as much as possible without friction, this spring support

may comprise a ball resting on this end and a spring located between the ball and the housing or frame. To obtain a good centering and a support of the spindle in the bearing substantially free from play both axially and radially, the bearing may be designed as ball bearing and the end of the spindle supported thereon may be tapered. The bearing, and hence the spindle, is preferably movable in the longitudinal direction of the spindle by means of a lever driven by the second motor. Such a lever construction enables a high adjusting accuracy of the position of the spindle. The lever is tiltable in a hinge under spring pressure to limit the play in the hinge as much as possible, while the lever is balanced around its pivoting point, so that the fine adjustment is less shock sensitive. Furthermore, to determine the position of the lever and thus of the bearing and hence the spindle and the object in the longitudinal direction of the spindle, a sensor is provided.

In a first embodiment, the object may be arranged on a carrier which is firmly connected with a first spindle nut element movable along the spindle, and which is movably connected with a second spindle nut element movable along the spindle, while between the two spindle nut elements a spring element is provided. In this embodiment, the object may be connected with the second spindle nut element by means of a leaf spring parallelogram construction. In this embodiment, play in the spindle movement is inhibited, because in this construction the spring element keeps the first and the second spindle nut element against the groove edges of the spindle, pressed away from each other as far as possible.

In a second embodiment, the object is arranged on a carrier, which is firmly connected with a first and a second spindle nut element movable along the spindle. To inhibit the play in the spindle movement, another measure, referred to below, may be used.

In both embodiments, it is favorable if means are provided to inhibit a rotation of the object around the axis of the spindle. These means may be designed in the form of a spring construction. This spring construction is

preferably in fixed contact with a housing or frame part located behind the spindle relative to the object, while the free ends of the spring construction extend through openings in the first and the second spindle nut element and in the grooves of the spindle. In the second embodiment, this spring construction has yet another function, to wit: ensure that the play in the spindle movement is inhibited. To this end, however, the openings in one of the two spindle nut elements firmly connected with the carrier for the object are formed by slotted holes.

10           The invention will now be explained in more detail with reference to the accompanying drawing. In this drawing:

          Fig. 1 diagrammatically shows the apparatus according to the invention in a first embodiment; and

          Fig. 2 shows a detail thereof in a second embodiment.

15           The embodiment of the apparatus according to the invention shown in Fig. 1 is used in a recording and/or reproducing device, in which, in a two-step configuration, a magnetic head can be positioned relative to a magnetic tape, and comprises a spindle 1, which, at the upper end, is spring-supported in a housing or frame 2 and, at the lower end, is supported  
20 in a bearing 3 provided at one end of a lever 4. At the upper end, a bush 5 is provided around the spindle 1, and around this bush a leaf spring 5' mounted to the housing or frame 2 is provided. A toothed wheel 6 is connected with the spindle 1. The spindle 1 is driven by means of a first motor 7 with a toothed wheel 8 engaging with the toothed wheel 6. The  
25 spring support of the spindle comprises a ball 9 resting on the upper end of the spindle and surrounded by the bush 5 and a spring 10 arranged between the ball 9 and the housing or frame 2. The support of the spindle 1 in the bearing 3 is realized by designing the bearing as ball bearing and by giving the spindle a tapered end 11 and allowing this tapered end 11 to rest  
30 centrally in the ball bearing. The lever 4 is tiltably arranged in the housing

or frame 2 and is driven by a second motor 12 with a spindle adjustment. The motor 12 can move the ball bearing 3 in the longitudinal direction of the spindle 1, while the motor 7 can rotate the spindle 1. The place of the pivoting point 13 of the lever 4 is selected mainly in the center of gravity of the lever 4. The pivoting point 13 is of flexible design to avoid play in the lever.

Along the spindle two spindle nut elements 14 and 15 are movable. The spindle nut element 14 is provided with a carrier 16 for a magnetic head 17. The carrier 16 is coupled with the spindle nut element 15 by means of a leaf spring parallelogram construction 18. To enable compensation for play in the movement of the spindle nut elements 14 and 15 in the longitudinal direction of the spindle 1, a spring element 19 is provided between the two spindle nut elements 14 and 15 and around the spindle 1. Furthermore, a spring construction 20 is provided to inhibit a rotation of the spindle nut elements 14 and 15 and hence of the carrier 16 with the magnetic head 17 relative to the spindle 1. In the embodiment shown, the spring construction 20 consists of two rods 21 and 22 which, at one end, are secured to a housing or frame part 23 located behind the spindle 1 relative to the magnetic head 17, while the free ends of these rods 21 and 22 are put through openings 24 and 24', respectively, in the spindle nut elements 14 and 15, passed around a part of the grooves of the spindle 1 and passed outwards again through openings 25 and 25', respectively.

To determine the position of the spindle in the vertical direction, a reflection sensor 26 is provided on the housing or frame 2, that is to say directly below the part of the lever 4 on which the bearing 3 is located. On the basis of track following signals read from a magnetic tape passed along the magnetic head 17 and of output signals from the sensor 26, control signals for the motors 7 and 12 are derived in the control unit 27. In this regard, it holds that for relatively coarse positioning steps, for instance to pass the magnetic head from a first track on the magnetic tape to a second

track thereon, only the motor 7 is energized, while for a fine positioning, for instance to keep the magnetic head on a track to be followed, only the motor 12 is energized.

In the embodiment shown in Fig. 2, the two spindle nut elements 14 and 15' and the carrier 16 with the magnetic head 17 form one whole. Consequently, the spring element 19 and the leaf spring parallelogram construction 18 are not necessary herein. To compensate for play in the movement of the above whole relative to the spindle 1, the openings in the spindle nut element 15' are formed by slotted holes 28, and a force pushing these rods apart is provided between the two rods 21 and 22, so that the whole of spindle nut elements, carrier and magnetic head is always pushed against the lower edge of a groove in the spindle. In this embodiment, the spring construction 20 therefore has both the function of inhibiting rotation of the above whole around the spindle and the function of compensating for play in the movement in the longitudinal direction of the whole relative to the spindle.

The invention is not limited to the embodiments described herein with reference to the drawing, but comprises all kinds of modifications thereof, of course as far as falling within the scope of protection of the appended claims.

## CLAIMS

1. An apparatus for positioning an object in a two-step configuration, such as, for instance, a magnetic head, in a recording and/or reproducing device relative to a magnetic tape, the object being coarsely movable by means of a spindle driven by a first motor and finely movable by means of a second motor, characterized in that the spindle itself is movable in its longitudinal direction by means of the second motor.
2. An apparatus according to claim 1, characterized in that the spindle, at one end, is spring-supported in a housing or frame relative to which the object is movable and, at the other end, is supported in a bearing movable in the longitudinal direction of the spindle by means of the second motor.
3. An apparatus according to claim 2, characterized in that the spring support of one end of the spindle comprises a ball resting on this end and a spring located between the ball and the housing or frame.
4. An apparatus according to claim 2 or 3, characterized in that the bearing is a ball bearing and the end of the spindle supported thereon is tapered.
5. An apparatus according to claims 2–4, characterized in that the bearing and hence the spindle is movable in the longitudinal direction of the spindle by means of a lever driven by the second motor.
6. An apparatus according to claim 5, characterized in that a sensor is provided to determine the position of the bearing in the longitudinal direction of the spindle.
7. An apparatus according to any one of the preceding claims, characterized in that the object is arranged on a carrier which is firmly connected with a first spindle nut element movable along the spindle, and which is movably connected with a second spindle nut element movable



along the spindle, while between the two spindle nut elements a spring element is provided.


8. An apparatus according to claim 7, characterized in that the magnetic head is connected with the second spindle nut element by means of a leaf  
5 spring parallelogram construction.

9. An apparatus according to any one of the preceding claims, characterized in that the object is arranged on a carrier, which is firmly connected with a first and a second spindle nut element movable along the spindle.


10. An apparatus according to any one of claims 7–9, characterized in that means, such as a spring construction, are provided to inhibit a rotation of the object around the axis of the spindle.

11. An apparatus according to claim 10, characterized in that the spring construction is connected without play with a housing or frame part located  
15 behind the spindle relative to the object, and that the free ends of the spring construction extend through openings in the first and the second spindle nut element and in the grooves of the spindle.

12. An apparatus according to claim 11, characterized in that the openings in one of the two spindle nut elements firmly connected with the  
20 carrier for the object are formed by slotted holes.

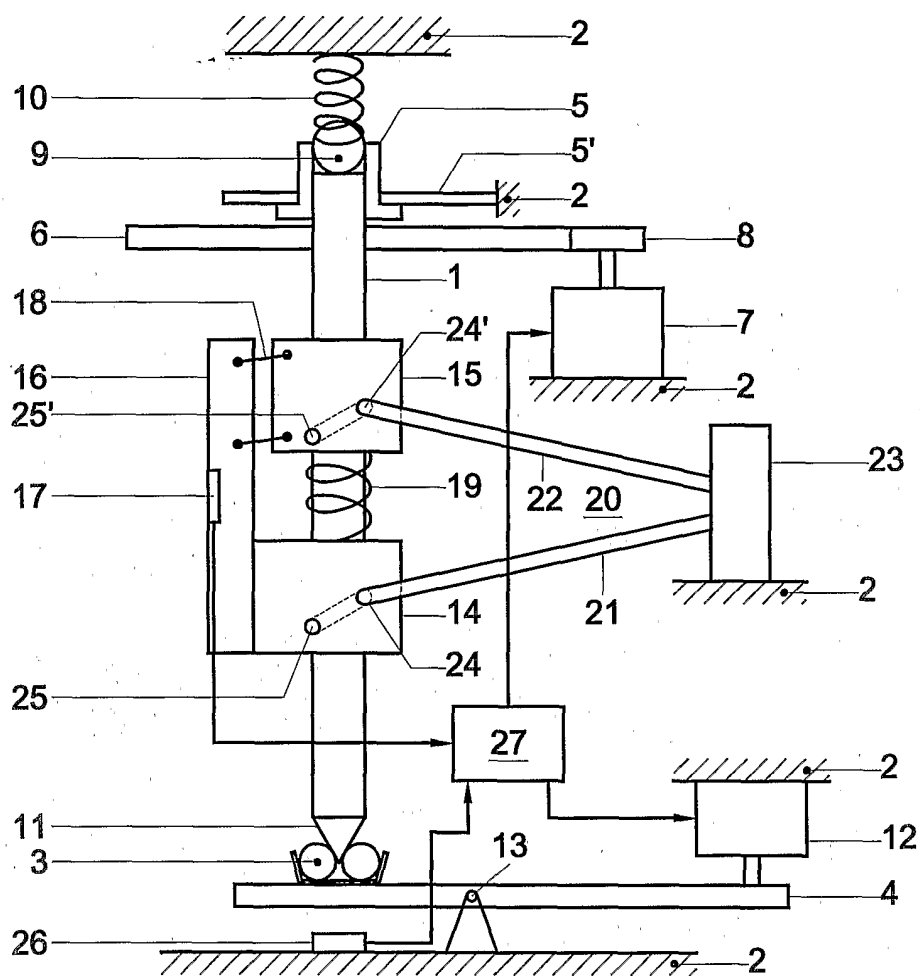

**Fig. 1**

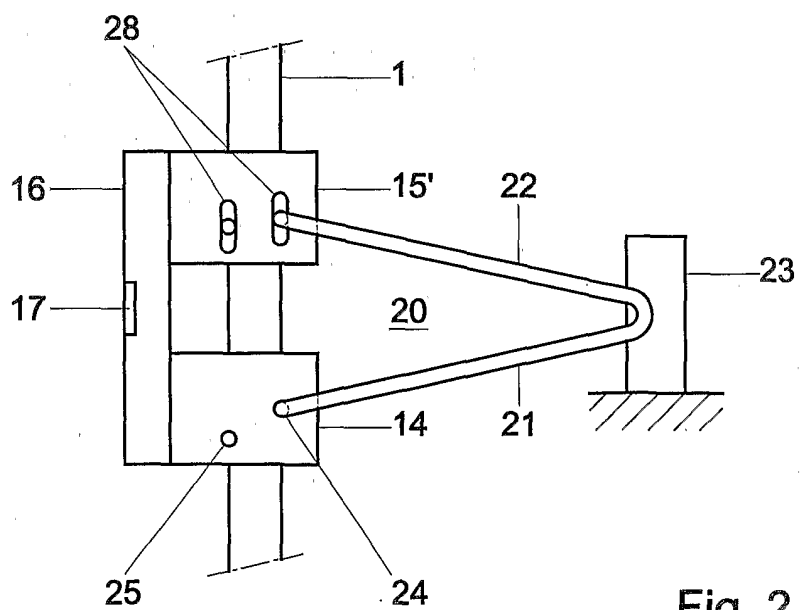

**Fig. 2**

## INTERNATIONAL SEARCH REPORT

Int I Application No

PCT/NL 01/00633

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B5/584

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 075 678 A (SALIBA GEORGE A) 13 June 2000 (2000-06-13) column 6, line 6 -column 10, line 24 ---	1
X	US 5 379 170 A (SCHWARZ THEODORE A) 3 January 1995 (1995-01-03)	1
A	column 2, line 52 -column 3, line 51; claim 1; figures 1,2 ---	2,5-10
X	US 5 434 732 A (RICHARDS DURKEE B ET AL) 18 July 1995 (1995-07-18)	1
A	column 5, line 23 -column 6, line 39; figures 3,4 ---	2,5-10
A	US 5 438 469 A (RUDI GUTTORM) 1 August 1995 (1995-08-01) column 2, line 49 -column 3, line 48; figures 2,4,6 ---	1
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

9 January 2002

Date of mailing of the international search report

17/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Ressenaar, J-P

## INTERNATIONAL SEARCH REPORT

Int. Patent Application No  
PCT/NL 01/00633

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 829 852 A (THOMSON BRANDT GMBH) 18 March 1998 (1998-03-18) page 3, line 3 - line 48; figure 1 ---	1
A	EP 0 529 930 A (MINNESOTA MINING & MFG) 3 March 1993 (1993-03-03) column 3, line 3 -column 4, line 33 ---	1
A	US 4 858 047 A (CANNON THOMAS G ET AL) 15 August 1989 (1989-08-15) column 3, line 47 -column 5, line 40 -----	1

## INTERNATIONAL SEARCH REPORT

 In: Application No  
 PCT/NL 01/00633

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 6075678	A	13-06-2000	DE	19913384 A1	14-10-1999
			GB	2335784 A	29-09-1999
			JP	11353629 A	24-12-1999
US 5379170	A	03-01-1995	CN	1078818 A	24-11-1993
			DE	69318617 D1	25-06-1998
			DE	69318617 T2	15-04-1999
			EP	0565918 A1	20-10-1993
			JP	6028647 A	04-02-1994
			NO	931349 A	14-10-1993
			US	5434732 A	18-07-1995
US 5434732	A	18-07-1995	CN	1078818 A	24-11-1993
			DE	69318617 D1	25-06-1998
			DE	69318617 T2	15-04-1999
			EP	0565918 A1	20-10-1993
			JP	6028647 A	04-02-1994
			NO	931349 A	14-10-1993
			US	5379170 A	03-01-1995
US 5438469	A	01-08-1995	DE	69232043 D1	11-10-2001
			EP	0556436 A1	25-08-1993
			JP	5342544 A	24-12-1993
EP 0829852	A	18-03-1998	EP	0829852 A1	18-03-1998
			JP	10116408 A	06-05-1998
			NO	974124 A	16-03-1998
			TW	381257 B	01-02-2000
			US	6043958 A	28-03-2000
EP 0529930	A	03-03-1993	US	5280402 A	18-01-1994
			EP	0529930 A1	03-03-1993
			JP	5210830 A	20-08-1993
			NO	923381 A	01-03-1993
US 4858047	A	15-08-1989	US	4943877 A	24-07-1990