



- (51) **International Patent Classification:**
C10M 145/34 (2006.01) *C10M 145/26* (2006.01)
- (21) **International Application Number:**
PCT/US2016/059979
- (22) **International Filing Date:**
2 November 2016 (02.11.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
62/251,795 6 November 2015 (06.11.2015) US
- (71) **Applicant:** SHRIEVE CHEMICAL PRODUCTS, INC.
[US/US]; 1755 Woodstead Court, The Woodlands, Texas 77380 (US).
- (72) **Inventors:** DIXON, Elizabeth; c/o Shrieve Products International Limited, 40 Churchill Street, Suite 39, Kings Hill Kent ME194YU (GB). SEETON, Christopher; c/o Shrieve Chemical Products, Inc., 1755 Woodstead Court, The Woodlands, Texas 77380 (US).
- (74) **Agents:** FLEISCHUT, Paul I. J. et al.; Senniger Powers LLP, 100 North Broadway, 17th Floor, St. Louis, Missouri 63102 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

Published:

- with international search report (Art. 21(3))

(54) **Title:** OIL MISCIBLE POLYALKYLENE GLYCOLS AND USES THEREOF





FIG 1.

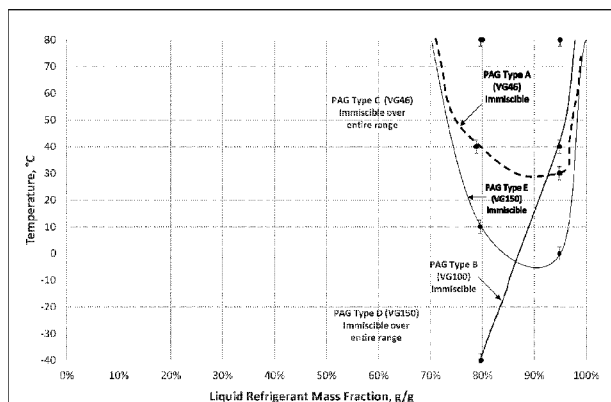

(57) **Abstract:** A polyalkylene glycol having an end-group of the general formula: (Formula (I)) in which each R^2 independently represents a hydroxyl, alkyl, alkenyl, aryl, heteroaryl, benzyl, or polyalkylene glycol group, and each R^3 independently represents a hydroxyl, alkyl, alkenyl, aryl, heteroaryl, benzyl, or polyalkylene glycol group; m is 0, 1, 2, 3, 4, 5 or 6; and n is 0, 1, 2 or 3. A lubricating oil composition comprising this polyalkylene glycol. A refrigerant composition comprising this polyalkylene glycol. A method of lubricating moving parts of an industrial or automotive system comprising applying a composition to the parts, wherein the composition comprises this polyalkylene glycol.

OIL MISCIBLE POLYALKYLENE GLYCOLS AND USES THEREOF

FIELD OF THE INVENTION

[0001] This invention relates to a new polyalkylene glycol (PAG) oil for use in industrial and automotive lubricating applications. Specifically, the oil may be used in applications where mineral oil compatibility is of benefit

BACKGROUND TO THE INVENTION

[0002] The use of PAGs in lubricating compositions has been known for a considerable time, however their hydrophilic nature results in a tendency towards insolubility/immiscibility in mixtures with mineral oils.

[0003] Table 1 below provides a qualitative assessment of the relative benefits and disadvantages of the common lubricant base oil types.

Property	Mineral	Di- ester	Polyol Ester	Dimer Ester	Aromatic Ester	Mono- Ester	PAO	PAG	Silicone
Viscosity Index	F	VG	VG	VG	P	VG	G	E	E
Low Temp Fluidity	P	E	VG	G	F	E	E	E	E
High Temp Stability (inhibited)	P	G	VG	F	G	P	G	G	E
Low Volatility	P	E	E	E	E	F	E	G	VG
Frictional Properties	F	E	VG	E	G	G	G	E	P
Biodegradability	P	E	VG	G	P	E	F	F	P
Hydrolytic Stability	E	F	G	F	F	P	E	E	VG
Additive Solubility	E	VG	VG	VG	VG	VG	G	F	P
Elastomer Compatibility	VG	P	F	VG	P	P	G	VG	VG
Paint Compatibility	G	P	G	E	P	P	E	P	VG
Petroleum (mineral oil) Compatibility	E	G	G	VG	G	G	E	P	P
Initial Cost	E	G	G	VG	G	G	VG	G	P

(E = Excellent, VG = Very Good, G = Good, F = Fair, P= Poor).

Table 1

[0004] In the field of refrigeration, the global warming impact of HCFC gases such as R22 (chlorodifluoromethane, CHClF_2), has led to increased use of HFC gases such as HFC R134a (1,1,1,2-tetrafluoroethane, CH_2FCF_3), HFC R407C, a non-ozone depleting zeotropic blend of difluoromethane (R-32), pentafluoroethane (R-125) and 1,1,1,2-tetrafluoroethane (R-134a), and R-410A, a non-ozone depleting zeotropic blend of difluoromethane (R-32) and pentafluoroethane (R-125). R407C is designed to match as closely as possible the R22 pressure and performance characteristics to enable smooth transition to R407C. R410A was designed to

provide benefits in efficiency and system size by increasing system pressure and taking advantage of thermodynamic properties. Under the terms of the Montreal Protocol, as of Jan 1 2020 US manufacturers will no longer be able to utilize R22 to service existing equipment. Equipment transition from R22 to R407C / R410A similarly requires a compressor lubricant transition from R-22 miscible lubricant types, commonly mineral oil based products, to HFC miscible lubricants which are commonly polar synthetic lubricant types such as polyol esters (POEs) and PAGs.

[0005] In many respects PAGs provide a superior choice with respect to performance characteristics, however they are disadvantaged by a lack of compatibility with petroleum derived mineral oils. Currently, no economically-viable PAG having a broad spectrum of mineral oil compatibility over a range of petroleum base-oil types and across the broad temperature range required for many industrial lubricating applications, is available. The problem to be solved therefore is to find a PAG offering broad petroleum-derived base-oil compatibility, suitably with respect to both paraffinic and naphthenic types, across a broad temperature operating range, whilst retaining the property benefits typically associated with PAGs.


[0006] A number of attempts have been made to provide such PAGs. Generally, these have required the use of alkylene oxide units having high molecular weight. Thus, US 4481123 discloses a PAG lubricant suitable for power-transmission gears, wherein such lubricants are obtained by polymerization of an α -alkylene oxide, said α -alkylene oxide having an alkylene radical which contains 8 to 26 carbon atoms, and a tetrahydrofuran. EP-A-0-246612 discloses a PAG of the type: $R[(C_nH_{2n}O)_x (C_mH_{2m}O)_y H]_z$, wherein R is the residue of a compound having 1-8 active hydrogen atoms, n = integer of 2-4, m = integer of 6-40, x and y are an integer, and z = 1-8.

[0007] These PAGs have a molecular weight of 500-100,000 and a C_6 - C_{40} alkylene oxide content of 15-60% of the entire molecule weight.

[0008] US 4,973,414 discloses monofunctional polyethers characterised in that they contain as built-in terminal groups or monomers, a) from 1 to 30% by weight of one or more C_4 - to C_{24} - alkylmonophenols, b) from 1 to 30% by weight of one or more C_8 - to C_{24} - monoalkanols, c) from 1 to 30% by weight of one or more C_{10} - to C_{20} - 1,2-epoxyalkanes, and d) from 45 to 80% by weight of propylene oxide or a lower alkylene oxide mixture predominantly comprising propylene oxide, with the sum of components a) to d) adding up to 100% by weight; and in that they have mean molecular weights of from 600 to 2500.

[0009] US 5,143,640 discloses a polyalkylene glycol of the formula: $R^1X-[(C_3H_6O)_n(C_yH_{2y}O)_p-H]_m$, wherein R is an alkyl or alkylphenyl group having 9 to 30 carbons atoms; X = O, S or N; x is 2 to 4; y is 6 to 30; m is 1 or 2; and n and p are such that the polyether contains between 1 and 35wt% of $(C_yH_{2y}O)$ units and between 35 and 80wt% of $[(C_3H_6O)]$ units.

[0010] EP 0 532 213 discloses a sequential block copolymer which has the formula:




wherein R^1 = alkyl or alkaryl having 1 to 30 carbons atoms, X is O, S or N, x is an integer of 2 to 4, y is an integer of 6 to 30, q = 1 when X is O or S and q = 2 when X is N; and m and n are such that the molecular weight is in the range 600 – 4000. US 5,652,204 discloses similar polyethers capped with a hydrocarbyl end group containing from 1 to 30 carbon atoms. All of the above documents attempt to achieve mineral oil soluble PAGs by using C_4 and higher alkylene oxide monomers. Generally, such PAGs have limited commercial viability due to cost. In addition, none of the documents discloses the use of the polyethers described as lubricants for application in refrigeration / air-conditioning applications where temperature extremes are commonly encountered.

[0011] WO 01/57164 discloses compositions comprising a lubricating oil and a refrigerant, the lubricating oil comprising a PAG of formula $RX(R^aO)_x(R^bO)_y(R^cO)_zR^d$, wherein R is a C_3 to C_{15} substituent comprising a heterocyclic ring in which the heteroatom(s) in said ring is/are oxygen and/or sulfur; R^a , R^b and R^c are respectively C_2 , C_3 and C_4 alkylene groups; R^d is the same as R, or is H, C_1 - C_{20} alkyl or C_1 - C_{20} acyl; x, y and z are 0 to 100, and the sum of x, y and z is 4-100. Preferred heterocycles present in R are C_{4-6} heterocycles. This disclosure is concerned with refrigeration and air-conditioning, and the stated advantage is that there is no separation from refrigerant at low temperature. There is no suggestion of mineral oil compatibility.

[0012] We have now found that the inclusion of a specific heterocyclic end group in a PAG leads to a product with desirable lubricant properties which is fully miscible with mineral oil, unlike the products exemplified in WO 01/57164.

SUMMARY OF THE INVENTION

[0013] The invention provides a polyalkylene glycol having an end-group of the general formula:

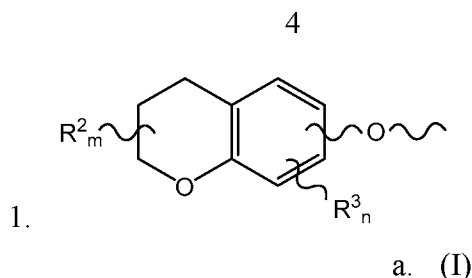

[0014] in which each R^2 independently represents a hydroxyl, alkyl, alkenyl, aryl, heteroaryl, benzyl, or polyalkylene glycol group, and each R^3 independently represents a hydroxyl, alkyl, alkenyl, aryl, heteroaryl, benzyl, or polyalkylene glycol group; m is 0, 1, 2, 3, 4, 5 or 6; and n is 0, 1, 2 or 3.

[0015] The invention further provides a lubricating oil composition comprising a polyalkylene glycol according to the invention; a refrigerant composition which comprises a refrigerant together with a polyalkylene glycol or a lubricating oil composition according to the invention; and a refrigeration system which comprises a refrigerant composition according to the invention.

[0016] In method aspects, the invention provides a method of lubricating moving parts of an industrial or automotive system, which comprises applying to moving parts a polyalkylene glycol or a lubricating oil composition according to the invention; and a method of servicing an industrial or automotive system, which comprises adding a polyalkylene glycol or a lubricating oil composition, to that system.

DETAILED DESCRIPTION OF THE INVENTION

[0017] In the formula I, ~O~ indicates the point at which the PAG chain is bonded to the end group. The PAG according to the invention may contain C_2 alkylene oxide (ethylene oxide) monomer units, C_3 alkylene oxide (propylene oxide) monomer units, and/or higher alkylene oxide units, for example (C_{4-8})alkylene oxide units. It may be a homopolymer or it may contain a mixture of different units, for example in the form of a random copolymer or a block copolymer. It may be linear or branched, but is preferably linear. If it is a linear PAG, it may for example have the general formula:

$$i. R[(C_xH_{2x}O)_p(C_yH_{2y}O)_q(C_zH_{2z}O)_r]R^1 \quad (II)$$

wherein

R is the group of formula I;

R^1 is a hydrogen atom, an alkyl group, especially a C_{1-20} alkyl group, an acyl group, especially a C_{1-20} acyl group, or a group of formula I;

x is 2; y is 3; and z is from 4 to 8;

and each of p, q and r independently is a number from 0 to 350, provided that the total of p, q and r is at least 2, preferably at least 4.

[0018] Although it is possible to use higher alkylene units in the PAG of the invention and obtain all the advantages of the invention, it is a major economic advantage of the present invention that its benefits can be obtained by using only C₂ and/or C₃ alkylene oxide units. Therefore preferably the number of higher (C₄ and greater) alkylene oxide units, for example r in formula II, is 0. Preferably the number of C₂ units, p in the above formula, is lower than the number of C₃ units, for example q in the above formula, and is preferably 0. Preferably the number of C₃ units, for example q in the above formula, is from 2 to 350, for example from 2 to 50, especially from 4 to 50. Except where the context requires otherwise, any reference to a PAG according to the invention throughout this Specification should be understood to include a specific reference to a PAG which contains only C₂ and/or C₃, especially only C₃, alkylene oxide units.

[0019] Preferably the end group of formula I contains at least one substituent R³ or, preferably, R², which is an alkyl or alkenyl, especially alkyl, group having from 8 to 20, especially from 12 to 20, carbon atoms.

[0020] If more than one R² group is present, these may be the same or different. Preferably each group R² present is an alkyl group. An alkyl or alkenyl group R² may be straight-chain or branched, and preferably has up to 20 carbon atoms. An aryl group R² is preferably a phenyl group optionally substituted by one or more C₁₋₄, especially methyl, groups. A heteroaryl group R² preferably contains from 5 to 10 ring atoms of which from 1 to 3 are heteroatoms selected from oxygen, sulfur and nitrogen. An acyl group group R² preferably has the formula R^{2a}CO- in which R^{2a} is a benzyl or, especially, alkyl group, especially an alkyl group having up to 20 carbon atoms. A polyalkylene group R² may be as described above. Preferably at least one R² which is an alkyl or alkenyl, especially alkyl, group having from 8 to 20, especially from 12 to 20, carbon atoms is present, in which case any other R² groups present are preferably methyl groups.

[0021] If more than one R³ group is present, these may be the same or different. Preferably each group R³ present is an alkyl group. An alkyl or alkenyl group R³ may be straight-chain or branched, and preferably has up to 20 carbon atoms, especially up to 4 carbon atoms, and is preferably a methyl group. An aryl group R³ is preferably a phenyl group optionally substituted by one or more C₁₋₄, especially methyl, groups. A heteroaryl group group R³ preferably contains from 5 to 10 ring atoms of which from 1 to 3 are heteroatoms selected


from oxygen, sulfur and nitrogen. An acyl group R^3 preferably has the formula $R^{3a}CO-$ in which R^{3a} is a benzyl or, especially, alkyl group, for example an alkyl group having up to 20 carbon atoms, especially an alkyl group having up to 4 carbon atoms. A polyalkylene group R^3 may be as described above.

[0022] Preferably m is 2, and preferably one R^3 represents a methyl group and the other R^3 represents a C_{8-20} , especially C_{12-20} , alkyl group. Preferably n is 1, 2 or 3 and, preferably each R^3 is a hydroxyl group or, especially, a methyl group.


[0023] The number of end groups in the PAG according to the invention will of course depend on whether the PAG is linear or branched. A linear PAG has two end groups, and a branched PAG has three or more end groups depending on the degree of branching. It is possible for both or all of the end groups to be a group of the formula I. Preferably however only one end group is a group of the formula I, and the or each other end group(s), R^1 in Formula II, is a methyl group or, especially, a hydrogen atom.

[0024] Preferably the total number of carbon atoms in the end group of the formula I is at least 16, especially at least 20, most preferably at least 25. Throughout this Specification, except where the context requires otherwise, any reference to a PAG according to the invention should be understood to include a specific reference to a PAG in which the total number of carbon atoms in the end group of the formula I is at least 16, especially at least 20, most preferably at least 25.


[0025] Tocopherols are readily available natural products, and in one preferred embodiment, the group of formula I is derived from a tocopherol, which may for example be alpha-tocopherol, beta-tocopherol, gamma-tocopherol or delta-tocopherol, or any mixture thereof:

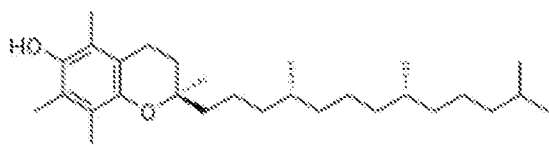


alpha-tocopherol



beta-tocopherol



gamma-tocopherol



delta-tocopherol,

bonding to the rest of the PAG molecule being via the oxygen atom of the hydroxyl group.

[0026] Preferably the number average molecular weight of the PAG according to the invention is from 518 to 20,000. Suitably it exhibits a kinematic viscosity in the range 10 to 430 cSt at 40°C (measured according to ASTM D445), a flashpoint (measured using the Cleveland Open Cup, COC, method) of at least 260°C, and/or a pourpoint of at least -10 °C.

[0027] The PAGs according to the invention may be prepared by methods analogous to methods known in the art. A variety of methods of making end-capped PAGs are known, and any of these may be used. For example, an alcohol, for example a tocopherol, may be used as an initiator for a polymerization reaction, and the PAG chain may be built up from appropriate alkylene oxide units. If a monoalcohol is used, a PAG containing one PAG chain will result. If it is desired to prepare a compound having two or more PAG chains, an alcohol having two or more hydroxyl groups may be used as an initiator.

Utility

[0028] The PAG according to the invention finds utility as a lubricant, for example in industrial and automotive applications, where it may be used to lubricate the moving parts of any industrial plant or vehicle by application to the moving parts of the equipment. In a preferred embodiment, it finds utility as a lubricant in refrigerant compositions, particularly as a lubricant for use in the compressors of air conditioning, other refrigeration, or heat pump systems.

[0029] The invention therefore provides a lubricant oil composition containing a PAG according to the invention. The PAG according to the invention may be the only oil in such a lubricant composition, or one or more other lubricating oils, for example a petroleum derived mineral oil, an alkylbenzene, a polyalphaolefin, a polyol ester, a polyvinylether, or another PAG, or mixtures thereof, may also be present. Preferably the lubricating oil present in a composition according to the invention contains at least 0.1%wt, especially at least 1.0%wt, for example at least 10%wt or at least 20%wt of the PAG according to the invention. When a mineral oil is present, this is preferably present in an amount of less than 20%wt, the balance of the lubricating oil being PAG, which may consist entirely of a PAG according to the invention or which may in addition contain one or more known PAGs. Preferably however the composition according to the invention contains no lubricating oil other than the PAG according to the invention optionally together with one or more known PAGs, the proportion of the PAG

according to the invention in such a composition preferably being one of those mentioned above. Compositions according to the invention which contain a PAG according to the invention together with a known PAG, there being no other lubricating oil present, form one preferred embodiment of the invention.

[0030] Although the oil in a lubricating composition according to the invention preferably only contains PAGs, the miscibility of the PAG according to the invention with other oils and particularly with mineral oil provides a major advantage. This is because, when systems using a lubricant, for example refrigerant systems, are serviced, or more particularly retrofitted, fresh lubricant needs to be added and this is frequently a different type of lubricant from that which is originally provided with the system. Lack of miscibility when changing from mineral oil based lubricants to PAG type lubricants, or topping up existing lubricant, can cause major problems within the system. Therefore miscibility with other lubricants, and specifically with mineral oil lubricants which are the most widely used type of lubricant, is a major advantage. The lubricant composition of the invention may be used as the initial lubricant in a system, but in one preferred embodiment, it is used as a top-up or replacement fluid during repair or servicing of a system, for example it may be used in a system where that system has previously utilized a mineral oil-based lubricant and where residual mineral oil is or may be present in the system.

[0031] The PAG according to the invention is believed to exhibit full miscibility with paraffinic and naphthenic mineral oils in all weight % ratios over the entire temperature range of +60 °C to -40°C. Further, it imparts miscibility to blends with other PAGs. Specifically, at a minimum concentration of 1.0%wt in a typical oil-immiscible PAG, full mineral oil compatibility can be shown to be imparted to the blend.

[0032] Lubricant compositions according to the invention will generally include one or more known additives depending on the particular application. They may for example contain additives selected from those that provide improved antiwear properties, extreme pressure resistance, oxidation stability, corrosion inhibition, antifoaming, suppression of pourpoint, improvement of viscosity index, and reduction of acid content. Such additives are preferably present in an amount of up to 15% by weight of the composition.

[0033] Suitably the lubricating composition of the invention exhibits a kinematic viscosity in the range 10 to 430 cSt at 40°C, a flashpoint of at least 260°C, and/or a pourpoint of at least -10 °C.

[0034] Refrigerant systems should be understood to include air-conditioning systems, for example in building or, especially, vehicles, other cooling systems such as industrial and domestic refrigeration systems, and heat pump systems. The refrigerant utilized in the refrigerant system may for example comprise a refrigerant selected from hydrofluorocarbons (HFC), hydrochlorofluorocarbons (HCFC), for example R22, carbon dioxide, ammonia, hydrocarbons (HC), for example R600a (i-butane) and R290 (propane), and hydrofluoro-olefins (HFO) such as 1,3,3,3-tetrafluoroprop-1-ene and 2,3,3,3-tetrafluoroprop-1-ene.

[0035] Accordingly, the present invention provides a refrigerant composition which comprises a refrigerant, together with, as lubricant, a PAG according to the invention or a lubricant composition according to the invention. Preferably the refrigerant is selected from an HCFC, HFC, HFO, HC, CO₂ or NH₃.

[0036] The present invention provides a lubricant demonstrating the advantage of oil miscibility with preferential refrigerant miscibility characteristics, thus facilitating refrigeration system retrofitting from R22 to R407C/R410A as described above without the need for complete removal of residual mineral oil from the system.

[0037] In addition to application as automotive and industrial refrigeration lubricants, the present invention finds utility in other industrial and automotive situations where lubrication is required, for example automotive gearbox and crankcase lubricants, and industrial gearbox lubricants. For example, the application of the lubricating oil compositions described herein as components of semi-synthetic automotive crankcase lubricants in combination with petroleum derived mineral oils can enable a reduction in the use of viscosity index modifiers traditionally required for viscosity retention in mineral oil based lubricants, with a corresponding reduction in the likelihood of valve deposits resulting from the degradation of viscosity index improvers.

BRIEF DESCRIPTION OF THE DRAWINGS

[0038] Figures 1, 2 and 3 show the results of testing carried out as described in the Examples herein.

[0039] Figure 1 shows the miscibility of comparative PAGs with refrigerant R407C.

[0040] Figure 2 shows the miscibility of the product 10TP of Invention Example 1 with refrigerant R407C.

[0001] Figure 3 shows the miscibility of the product 20TP of Invention Example 2 with refrigerant R407C.

The following Examples illustrate the invention.

EXAMPLES

COMPARISON PRODUCTS

[0002] The miscibility of PAGs according to the invention was compared with miscibility of commercially available PAGs developed and marketed specifically as “oil soluble” polyalkylene glycols for a variety of industrial applications, and also PAGs developed and marketed specifically for refrigeration systems, which are generally not regarded as being “oil soluble”. Sample PAG composition was determined using ¹H and ¹³C NMR as solutions in CDCl₃. Spectra were acquired at ambient temperature on a Bruker DPX400 NMR spectrometer operating at 400.13MHz for ¹H (MT/CMS/20).

[0003] The following comparative examples were utilized in the testing:

	Oil Soluble Comparison PAG Type A				Oil Soluble Comparison PAG Type B		Refrigeration Comparison PAG Type C (dicapped PAG)		Refrigeration Comparison PAG Type D (uncapped PAG)		Refrigeration Comparison PAG Type E (uncapped PAG)	
ISO Viscosity Grade (cSt at 40°C)	32	46	68	220	22	100	46	150	46	150	46	150
Pag Initiator type (R)	Linear C12 alcohol	Linear C12 alcohol	Linear C12 alcohol	Linear C12 alcohol	Linear & branched C16-C17 alcohol	Linear & branched C12-C15 alcohol	Tetrahydro-furfuryl alcohol	Tetrahydro-furfuryl alcohol	Butanol	Butanol	Butanol	Butanol
Ethylene Oxide (wt%) (C2H4O)	0	0	0	0	0	0	0	0	0	0	50	50
Propylene Oxide (wt%) (C3H6O)	48.8	43.1	49.9	49.8	100	100	100	100	100	100	50	50
Butylene Oxide (wt%) (C4H8O)	51.2	56.9	50.1	50.2	0	0	0	0	0	0	0	0
Terminating Species (R1)	-OH	-OH	-OH	-OH	-OH	-OH	-CH3	-CH3	-OH	-OH	-OH	-OH
Oxide arrangement	random	random	random	random	-	-	-	-	-	-	random	random
Number average molecular weight, Mn	780	1010	1260	2790	477	1775	1050	1880	1005	1800	1000	2000

Table 2

where Type A = Dow marketed Oil Soluble PAGs, Type B = Sasol marketed Oil Soluble PAGs, Type C = Shrieve marketed dicapped RFL Refrigeration PAG, Type D = Shrieve marketed single end-capped water insoluble Zerol PAG, Type E = Shrieve marketed single end-capped water soluble Zerol PAG.

Physical property data was determined for comparative samples as follows:

Property	Test Method	Comparison PAG Type A		Comparison PAG Type B		Comparison PAG Type C		Comparison PAG Type D		Comparison PAG Type E	
PAG ISO Viscosity Grade		46	220	22	100	46	150	46	150	46	150
Viscosity at 40°C, cSt	ASTM D445	48.4	211.2	20	79.4	47.7	157.4	44.2	131.3	51	139.6
Viscosity at 100°C, cSt	ASTM D445	8.7	31.7	4.17	14.2	9.9	28.7	8.8	28	10.8	27
Viscosity Index	ASTM D2270	159.8	194.5	110.9	186.3	201.9	222.9	183.5	251.8	209.4	231.4
Pourpoint, °C	ASTM D97	<-45	-40	-40	-45	<-45	-40	<-45	-40	<-40	-40
Flashpoint (COC), °C	ASTM D92	238	245	211	232	257	248	220	234	250	268
4-ball wear scar (mm)	ASTM D 4172	0.59	0.42	0.61	0.46	0.57	0.61	0.46	0.48	0.55	0.52
Falex failure load (lb)	ASTM D3233	500	750	500	750	1000	1000	1000	1000	750	1250

Table 3

Measurement of miscibility

[0044] Measurement of miscibility was performed in accordance with the principles of Ashrae 86, in which the blend of mineral oil and test lubricant is prepared and sealed in a sealed glass tube. The temperature of the tube is lowered in 10°C increments from ambient temperature, to a minimum of -40°C, before warming in 10°C increments to +60°C before returning to ambient. For each incremental temperature the sealed glass tube is maintained at that temperature for a period of one hour to observe miscibility, if significant changes in miscibility are observed the temperature increment is reduced to 5°C.

[0045] Typical properties of the mineral oils utilized in the miscibility testing are as follows :

Property	Test Method	SN150 Paraffinic	1150 Naphthenic
ISO Viscosity Grade		32	32
Viscosity at 40°C, cSt at 40°C	ASTM D445	30.0	30.1
Viscosity at 100°C, cSt at 40°C	ASTM D445	5.1	4.5
Viscosity Index	ASTM D2270	96.5	22.9
Flashpoint (COC), °C	ASTM D92	208	182
API Gravity at 15°C	ASTM D1250	31.8	34.2
Total Acid Number, mgKOH/g	ASTM D974	0.02	0.03
Molecular Weight, g/mol	ASTM D2502	390	328
Pourpoint, °C	ASTM D5950	-15	-43

Table 4

[0046] Miscibility data was obtained for the combinations of mineral oil and comparative polyalkylene glycol grades as shown:

Lubricant composition (wt%)											Observations	Conclusion
	Comparable PAG Product Grades											
Paraffinic SN150 MO	Type A VG220	Type A VG46	Type A VG68	Type C VG46	Type B VG32	Type B VG100	Type E VG50	Type E VG150	Type D VG 50	Type D VG50		
20	80										Miscible -40 to 60°C	Pass
50	50										Miscible 20 to 60°C , cloudy -40 to -20°C, Stridations -10 to -10 °C	Fail
80	20										Miscible -40 to 60°C	Pass
80		20									Miscible -40 to 60°C , Cloudy -40 to -20°C	Fail
20		80									Miscible -40 to 60°C	Pass
80			20								Miscible -40 to 60°C , Cloudy -40 to -20°C	Fail
20			80								Miscible -40 to 60°C	Pass
80				20							2 Phase -40 to 10°C; Miscible 20 to 60°C	Fail
20				80							Miscible -40 to 60°C	Pass
80							20				2 phase from -40 to 60degC	Fail
80								20			2 phase from -40 to 60degC	Fail
80									20		2 Phase -40 to 10°C; Miscible 20 to 60°C	Fail
20									80		Miscible -40 to 60°C	Pass
80										20	2 phase from -40 to 60degC	Fail
20					80						Miscible -40 to 60°C , Cloudy -40 to -20°C	Fail
50					50						Miscible -40 to 60°C , Cloudy -40 to -20°C	Fail
80					20						Miscible -40 to 60°C	Pass
20						80					Miscible -40 to 60°C , Cloudy -40 to -20°C	Fail
50						50					Miscible 20 to 60°C , Cloudy -40 to -20°C, Stridations -10 to -10 °C	Fail
80						20					Miscible -40 to 60°C	Pass

[0047] Table 5 – Paraffinic Mineral Oil Miscibility with Comparative PAGs

Lubricant composition {wt%						Observations	Conclusion
Naphthenic L150 MO	Type A VG220	Type A VG46	Type C VG46	Type B VG32	Type B VG100		
20	80					Miscible -40 to 60°C	Pass
50	50					Miscible -40 to 60°C	Pass
80	20					Miscible -40 to 60°C	Pass
80		20				Miscible -40 to 60°C	Pass
20		80				Miscible -40 to 60°C	Pass
80			20			Miscible -40 to 60°C	Pass
20			80			Miscible -40 to 60°C	Pass
20				80		Miscible -40 to 60°C, hazy at -40 to -20°C	Fail
50				50		Miscible -40 to 60°C, hazy at -40 to -30°C	Fail
80				20		Miscible -40 to 60°C, hazy at -40°C	Fail
20					80	Miscible -40 to 60°C	Pass
50					50	Miscible -40 to 60°C	Pass
80					20	Miscible -40 to 60°C	Pass

Table 6 – Naphthenic Mineral Oil Miscibility with Comparative PAGs

[0048] Figure 1 shows the miscibility of the various comparative PAGs with refrigerant R407C.

[0049] The criteria required for full mineral oil/polyalkylene glycol miscibility was complete homogeneity of the mixture across the temperature range of test -40 °C to +60 °C. Phase separation, cloudiness, haze and striations are indicative of incomplete homogeneity. Results demonstrate a lack of comprehensive mineral oil miscibility across the paraffinic/naphthenic mineral oil types, temperature range of test, and ratios of mineral oil:PAG for the comparative types tested.

INVENTION EXAMPLES

Example 1 – 10 mole tocopherol propoxylate (sample “10TP)

[0050] In a first step, 213g of Mixed Tocopherol (commercially available as Mixed Tocopherol, ex-J Edwards International Inc) was dried to a moisture level <10ppm, and catalysed with solid potassium hydroxide to a dosage of 0.125wt% in the final product. The catalysed material was dried to 0.01wt% water content and reacted with 287g of propylene oxide at 135°C until pressure line-out in the reaction vessel indicated reaction completion. The catalyst was thereafter removed from the product prior to sample testing. The resulting product contained 10 propylene oxide units per molecule.

Example 2 – 20 mole tocopherol propoxylate (sample “20TP)

[0051] In a first step 200g of product from Example 1, prior to catalyst removal, was reacted with 115g of propylene oxide at 135°C until pressure line-out in the reaction vessel indicated reaction completion. The catalyst was thereafter removed from the product prior to sample testing. The resulting product contained 20 propylene oxide units per molecule.

Example 3: Testing of the products of Examples 1 and 2

[0052] The properties of the products of Examples 1 and 2 were measured using standard industry testing methods. Miscibility was measured as described above. Table 7 shows the basic physical properties. Table 8 shows the mineral oil compatibility of the products. Table 9 shows the minimum quantity of the products of Invention Examples 1 and 2 required to solubilize 90/10 (wt/wt) comparative PAGs D and E and mineral oils. Figures 2 and 3 show the miscibility of the products of Invention Examples 1 and 2 with refrigerant R407C.

Property	Test Method	Example 1 : 10 mole Tocopherol Propoxylate (10TP)	Example 2 : 20 mole Tocopherol Propoxylate (20TP)
PAG ISO Viscosity Grade		200	200
Viscosity at 40°C, cSt	ASTM D445	194.2	204
Viscosity at 100°C, cSt	ASTM D445	17.8	22.4
Viscosity Index	ASTM D2270	99.4	134.1
Pourpoint, °C	ASTM D97	-28	-32
Flashpoint (COC), °C	ASTM D92	302	293
4-ball wear scar (mm)	ASTM D 4172	0.47	0.44
Falex failure load (lb)	ASTM D3233	750	750

Table 7: Basic physical properties of Invention Examples 1 and 2

Lubricant composition (wt%)			Observations	Conclusion
Mineral Oil	Invention Examples			
Paraffinic SN150 MO	Example 1 : "10TP"	Example 2 : "20TP"		
20	80		Miscible -40 to 60°C	Pass
50	50		Miscible -40 to 60°C	Pass
80	20		Miscible -40 to 60°C	Pass
20		80	Miscible -40 to 60°C	Pass
50		50	Miscible -40 to 60°C	Pass
80		20	Miscible -40 to 60°C	Pass
Naphthenic L150 MO	Example 1 : "10TP"	Example 2 : "20TP"	Observations	Conclusion
20	80		Miscible -40 to 60°C	Pass
50	50		Miscible -40 to 60°C	Pass
80	20		Miscible -40 to 60°C	Pass
20		80	Miscible -40 to 60°C	Pass
50		50	Miscible -40 to 60°C	Pass
80		20	Miscible -40 to 60°C	Pass

Table 8 – Mineral Oil miscibility for Invention Examples 1 and 2

Lubricant composition (wt%)				Observations	Conclusion
Mineral Oil	Comparative Samples		Invention Example		
Paraffinic SN150 MO	Comparative PAG Type E VG150	Comparative PAG Type D VG150	invention Example : Tocopherol Propoxylate		
10.0	90.0			Immiscible at room temperature	Fail
7.5	67.5		25.0	Miscible -40 to 60°C	Pass
10.0		90.0		Immiscible at room temperature	Fail
9.9		89.1	1.0	Miscible -40 to 60°C	Pass
Naphthenic L150 MO	Comparative PAG Type E VG150	Comparative PAG Type D VG150	invention Example : Tocopherol Propoxylate		
10.0	90.0			Immiscible at room temperature	Fail
8.5	76.5		15.0	Miscible -40 to 60°C	Pass
10.0		90.0		Immiscible at room temperature	Fail
9.9		89.1	1.0	Miscible -40 to 60°C	Pass

Table 9 - Minimum % invention required to solubilize 90/10 (wt/wt) Comparative PAGs D and E / Mineral Oils.

The above data illustrate the following:

[0053] Comparison of Table 3 and Table 7 confirms no disadvantage of products of the invention with respect to inherent properties expected of polyalkylene glycols. Further improvement of the Viscosity Index would be expected simply by increasing the number of propylene oxide units included in the products.

[0054] Comparison of Table 4 and Table 7 confirms the advantage of the products of the invention with respect to improvement of Viscosity Index for mineral oil derived products in admixture with products of the invention.

[0055] Comparison of Table 5 and Table 6 with Table 8 provides confirmation that the mineral oil miscibility properties of the invention are advantageous, with respect to prior art in this field, with a complete absence of any inhomogeneity demonstrated with either naphthenic or paraffinic mineral oils in all ratios and across the full temperature range of test.

[0056] Table 9 demonstrates that utilization of a minimum concentration of the novel polyether of 1.0%wt in a typical oil-immiscible polyalkylene glycol, enables mineral oil compatibility to be imparted to the blend.

[0057] Under normal operating conditions the oil circulation rate (OCR) in refrigeration circuits is around 1% in 99% of refrigerant. Towards end of system lifetime where component tolerances become reduced this may increase to around 2- 5% oil in refrigerant. Miscibility of lubricant with refrigerant is most desirable in the temperature region of 15/20°C - 60°C for effective system operation. Figures 1, 2 and 3 demonstrate that there is an advantageous impact on the miscibility property with R407C under these lubricant concentration and system temperature conditions for the novel polyethers of the invention, therefore demonstrating superior suitability for use in refrigeration systems R407C systems, which are typically those retrofitted from R22, where residual mineral oil may be present and where the oil solubility properties of the novel polyether are similarly advantageous.


[0058] The above results clearly demonstrate that the products of the present invention have advantageous properties making them particularly suitable for use in refrigeration applications where temperature extremes are commonly encountered. Specifically, they are fully miscible with both paraffinic and naphthenic mineral oil. Moreover, they impart miscibility with mineral oils to blends including known PAGs, when those known PAGs are not themselves miscible with mineral oil. Further, they are fully miscible with HFC type refrigerants (typified by R407C), unlike for example the PAGs of WO 01/57164 (comparative

PAG Type C). This can all be achieved in economic fashion without incorporating C4+ alkylene oxide units.

[0059] The foregoing has outlined the features and technical advantages of the present invention. It will be appreciated by those skilled in the art that the embodiments disclosed may be readily utilized as a basis for modifying or designing other embodiments for carrying out the same purposes of the present invention. Such equivalent constructions do not depart from the spirit and scope of the invention as set forth in the appended claims.

CLAIMS


1. A polyalkylene glycol having an end-group of the general formula:

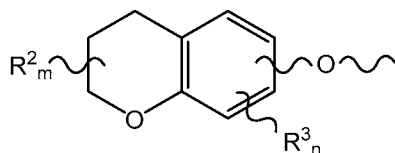

(I)

in which each R^2 independently represents a hydroxyl, alkyl, alkenyl, aryl, heteroaryl, benzyl, or polyalkylene glycol group, and each R^3 independently represents a hydroxyl, alkyl, alkenyl, aryl, heteroaryl, benzyl, or polyalkylene glycol group; m is 0, 1, 2, 3, 4, 5 or 6; and n is 0, 1, 2 or 3.

2. A polyalkylene glycol as claimed in claim 1, which has the general formula:



wherein

R is the group of formula I;

R^1 is a hydrogen atom, a C_{1-20} alkyl group or a C_{1-20} acyl group, or a group of formula I;

x is 2; y is 3; and z is an integer from 4 to 8;

and each of p , q and r independently is a number from 0 to 350, provided that the total of p , q and r is at least 2.

3. A polyalkylene glycol as claimed in either claim 1 or claim 2, in which the number of alkylene oxide monomer units having 4 or more carbon atoms is 0.

4. A polyalkylene glycol as claimed in any one of the preceding claims, in which the number of alkylene oxide monomer units having 2 carbon atoms is 0.

5. A polyalkylene glycol as claimed in any one of the preceding claims, in which the number of alkylene oxide monomer units having 3 carbon atoms is from 2 to 50.

6. A polyalkylene glycol as claimed in any one of the preceding claims, in which one end group of the formula I is present, and the or each other end group is H.

7. A polyalkylene glycol as claimed in any one of the preceding claims, in which m is 2 and one R^2 represents a methyl group and the other R^2 represents a C_{12-20} alkyl group.

8. A polyalkylene glycol as claimed in any one of the preceding claims, in which n is 1, 2 or 3 and each R^3 is a methyl group.

9. A polyethylene glycol as claimed in any one of the preceding claims, in which the end group of formula I is derived from a tocopherol.

10. A polyalkylene glycol as claimed in any one of the preceding claims, which has a molecular weight of from 518 to 20,000.

11. A lubricating oil composition comprising a polyalkylene glycol as claimed in any one of the preceding claims.

12. A composition as claimed in claim 11, which comprises one or more known additives selected from the group consisting of those that provide improved antiwear properties, extreme pressure resistance, oxidation stability, corrosion inhibition, antifoaming, suppression of pourpoint, improvement of viscosity index, and reduction of acid content.

13. A composition as claimed in either claim 11 or claim 12, which also contains another lubricating oil.

14. A composition as claimed in any one of claims 11 to 13, which has a kinematic viscosity in the range of from 10 to 430 cSt at 40°C, a flashpoint of at least 260°C, and/or a pourpoint of at least -10 °C.

15. A refrigerant composition which comprises a refrigerant together with a polyalkylene glycol as claimed in any one of claims 1 to 10, or a composition as claimed in any one of claims 11 to 14.

16. A refrigeration system which comprises a refrigerant composition as claimed in claim 15.

17. A refrigeration system as claimed in claim 16, which includes a compressor in which said refrigerant composition is present.

18. A method of lubricating moving parts of an industrial or automotive system, which comprises applying to said moving parts a polyalkylene glycol as claimed in any one of claims 1 to 10, or a composition as claimed in any one of claims 11 to 14.

19. A method of servicing an industrial or automotive system, which comprises adding a polyalkylene glycol as claimed in any one of claims 1 to 10, or a composition as claimed in any one of claims 11 to 14, to that system.

20. A method as claimed in either claim 18 or claim 19, in which the industrial or automotive system is a refrigeration system.

FIG 1.

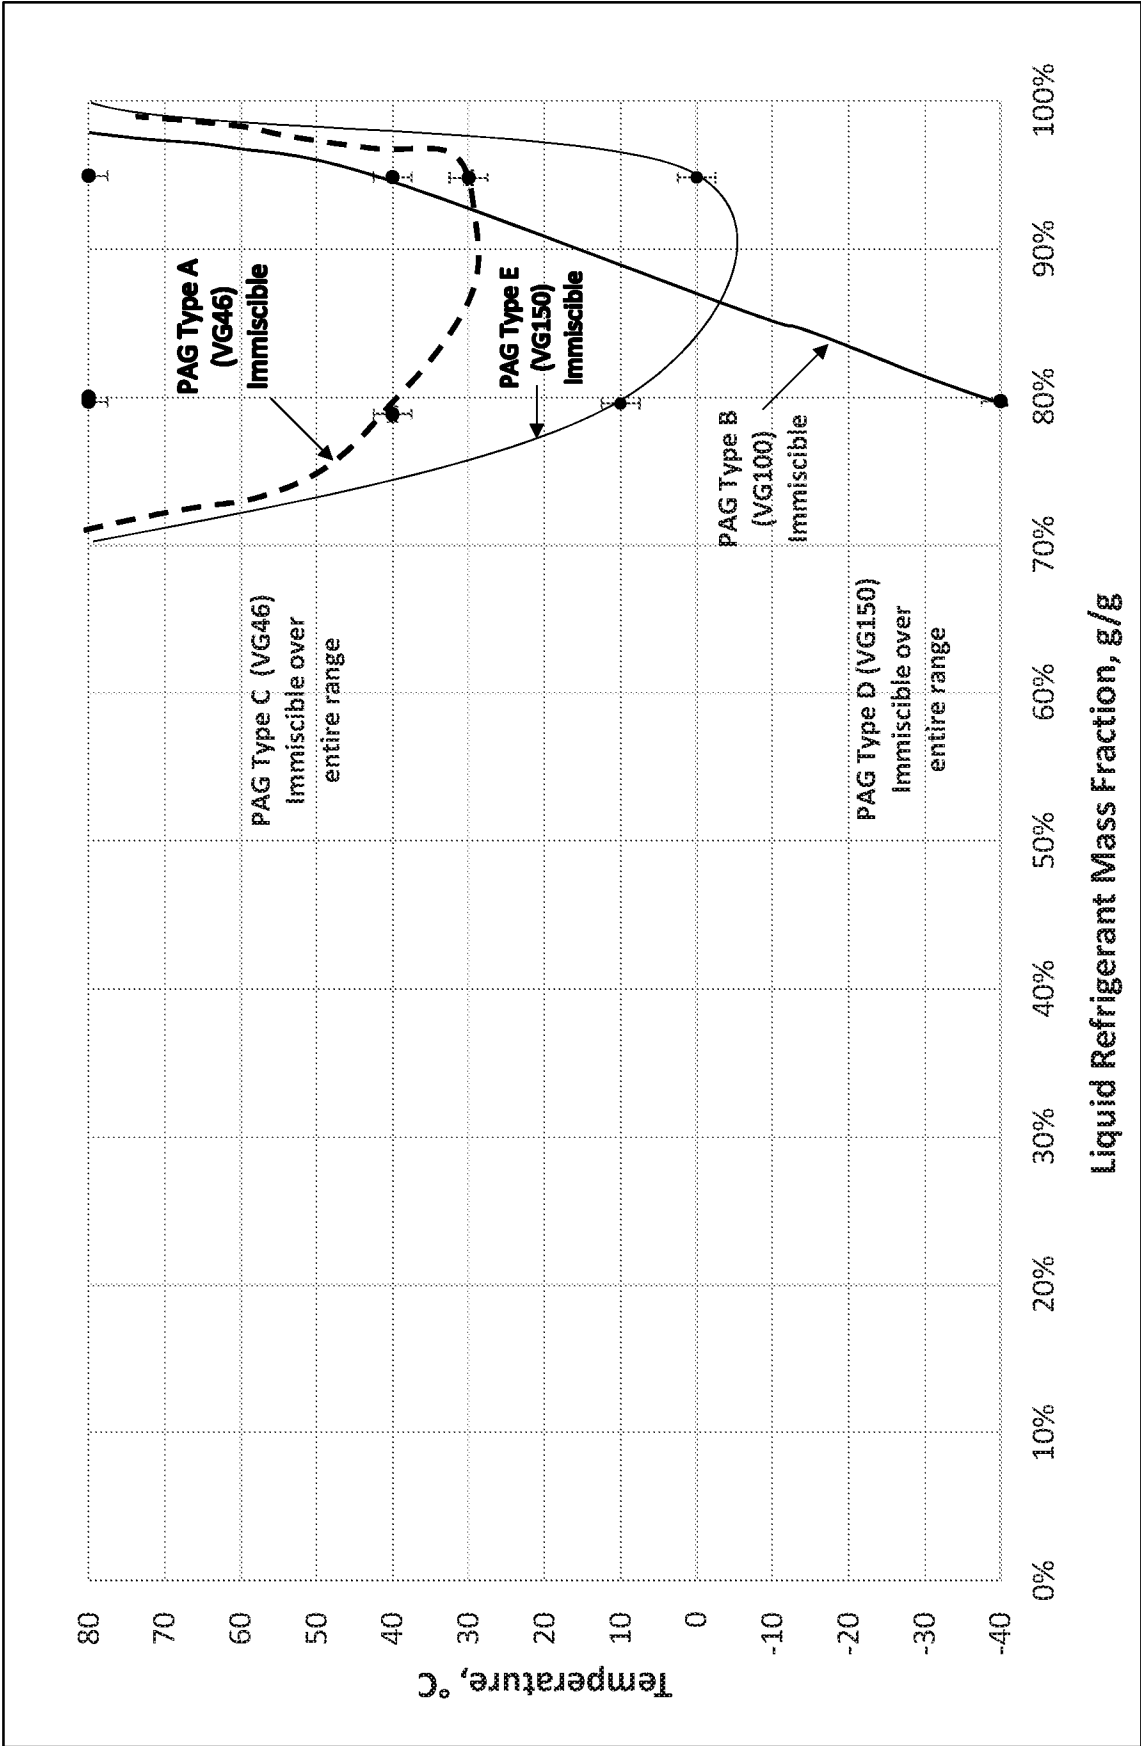


FIG 2


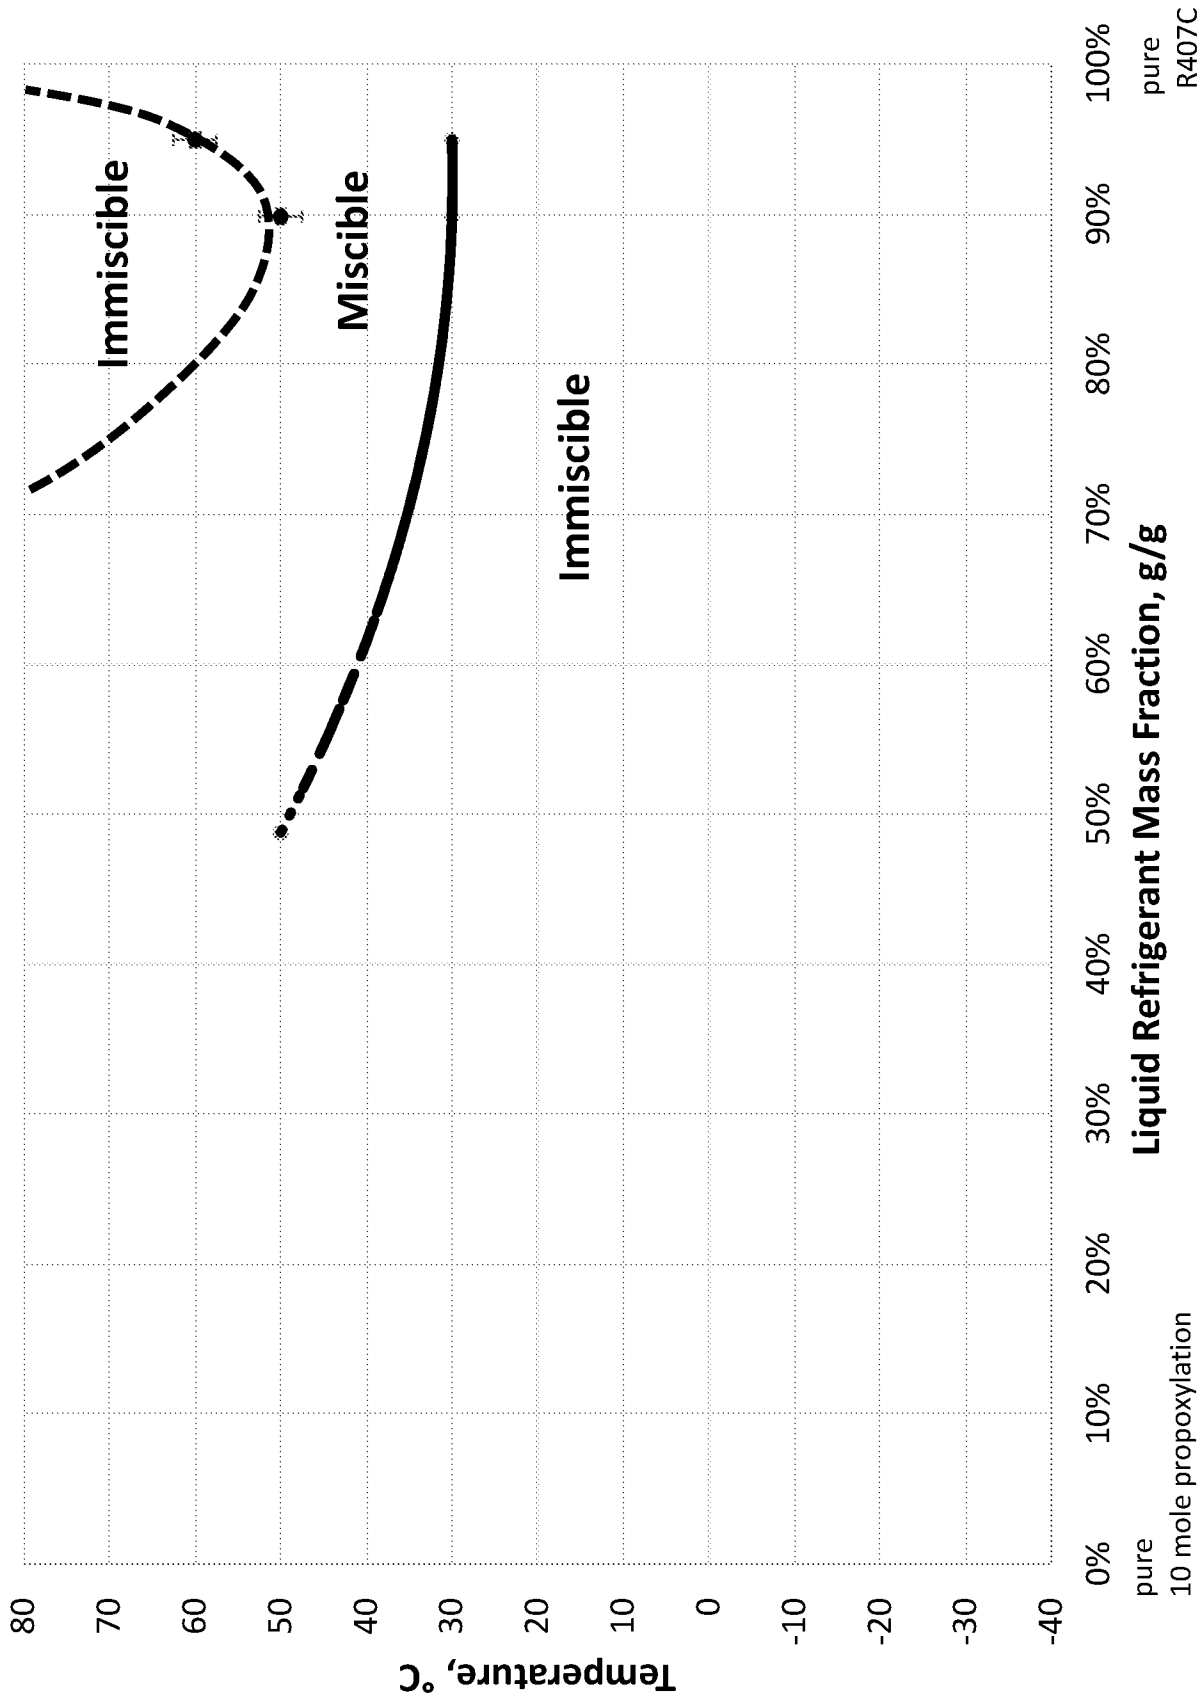


FIG 3

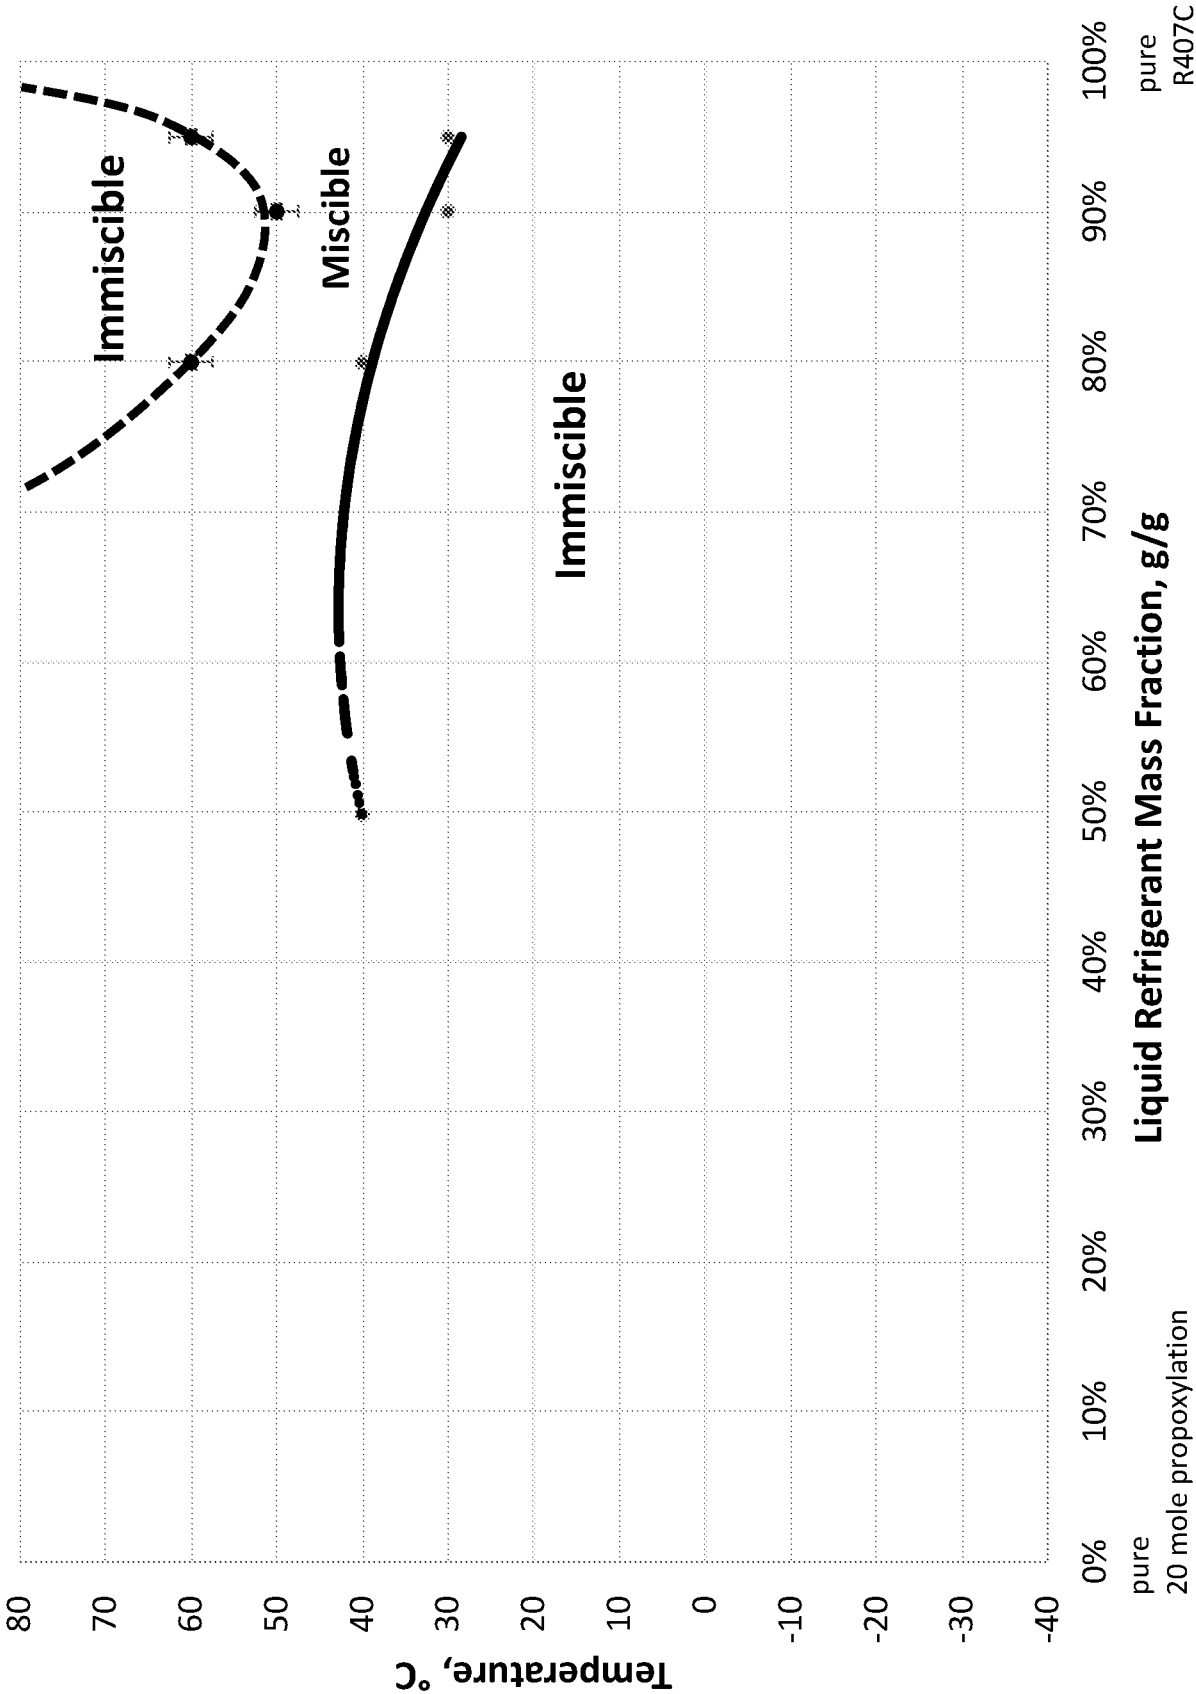

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 16/59979

A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - C10M 145/34, C10M 145/26 (2016.01)

CPC - C10M 145/28, C10M 107/34, C10M 145/26

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC(8) - C10M 145/34, C10M 145/26 (2016.01)

CPC - C10M 145/28, C10M 107/34, C10M 145/26

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

Patbase, Google Patent, Google Web

Search terms used - polyalkylene glycol tocopherol end group lubricating moving parts propylene oxide lubricant

Pubchem substructure search

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	"Pubchem CID 9827981" Create Date: 25 October 2006 (25.10.2006) Date Accessed: 13 December 2016 (13.12.2016); pg. 3, compound listed	1-3
A	US 7,060,199 B2 (Woydt et al.) 13 June 2006 (13.06.2006); entire document	1-3
A	US 2003/0149099 A1 (Zhang et al.) 07 August 2003 (07.08.2003); entire document	1-3
A	US 2,680,749 A (Cawley et al.) 08 June 1954 (08.06.1954); entire document	1-3

☐ Further documents are listed in the continuation of Box C.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 December 2016

Date of mailing of the international search report

24 JAN 2017

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US, Commissioner for Patents
P.O. Box 1450, Alexandria, Virginia 22313-1450

Facsimile No. 571-273-8300

Authorized officer:

Lee W. Young

PCT Helpdesk: 571-272-4300
PCT OSP: 571-272-7774

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 16/59979

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claims Nos.: 4-20
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.