




US 20120243621A1

(19) **United States**(12) **Patent Application Publication**
Hurwitz et al.(10) **Pub. No.: US 2012/0243621 A1**(43) **Pub. Date: Sep. 27, 2012**(54) **MULTI-WIDEBAND COMMUNICATIONS
OVER MULTIPLE MEDIUMS WITHIN A
NETWORK**now Pat. No. 7,808,985, which is a continuation-in-
part of application No. 11/619,167, filed on Jan. 2,
2007.(75) Inventors: **Jonathan Ephraim David
Hurwitz**, Edinburgh (GB); **Juan
Carlos Riveiro**, Barcelona (ES);
David Ruiz, Barcelona (ES)(30) **Foreign Application Priority Data**

Oct. 3, 2005 (EP) 05256179.2

(73) Assignee: **BROADCOM EUROPE
LIMITED**, London (GB)**Publication Classification**(51) **Int. Cl.**
H04B 3/54 (2006.01)(52) **U.S. Cl.** **375/257**(21) Appl. No.: **13/485,133**(57) **ABSTRACT**(22) Filed: **May 31, 2012****Related U.S. Application Data**(63) Continuation of application No. 11/752,865, filed on
May 23, 2007, now Pat. No. 8,213,895, which is a
continuation-in-part of application No. 11/536,539,
filed on Sep. 28, 2006, which is a continuation-in-part
of application No. 11/562,380, filed on Nov. 21, 2006,

A multi-network interface device comprises a powerline communications interface and at least one other non-power line communications interface configured to communicate over a network. The network may comprise mediums including powerlines, telephone lines, and/or coaxial cables. The multi-network interface device may receive a communications signal via a first medium and transmit the message via a second medium based on a quality of service (QoS) metric.

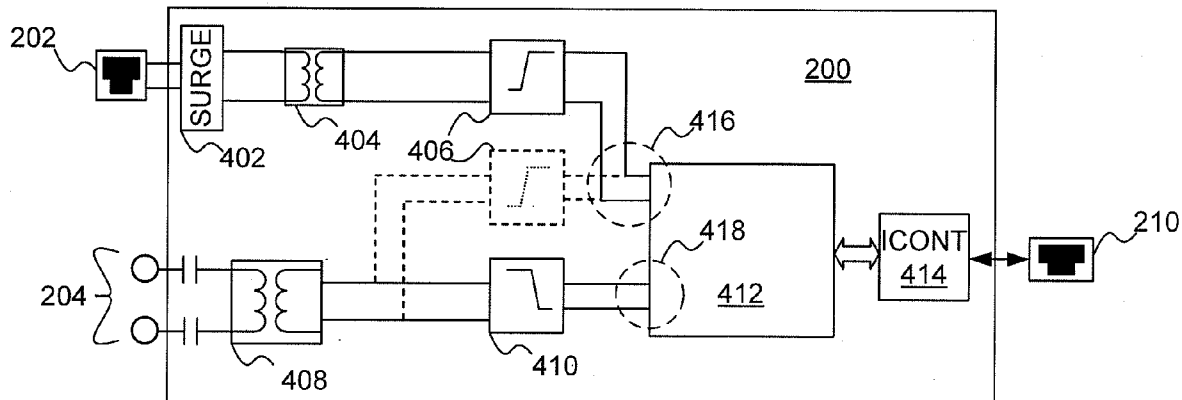

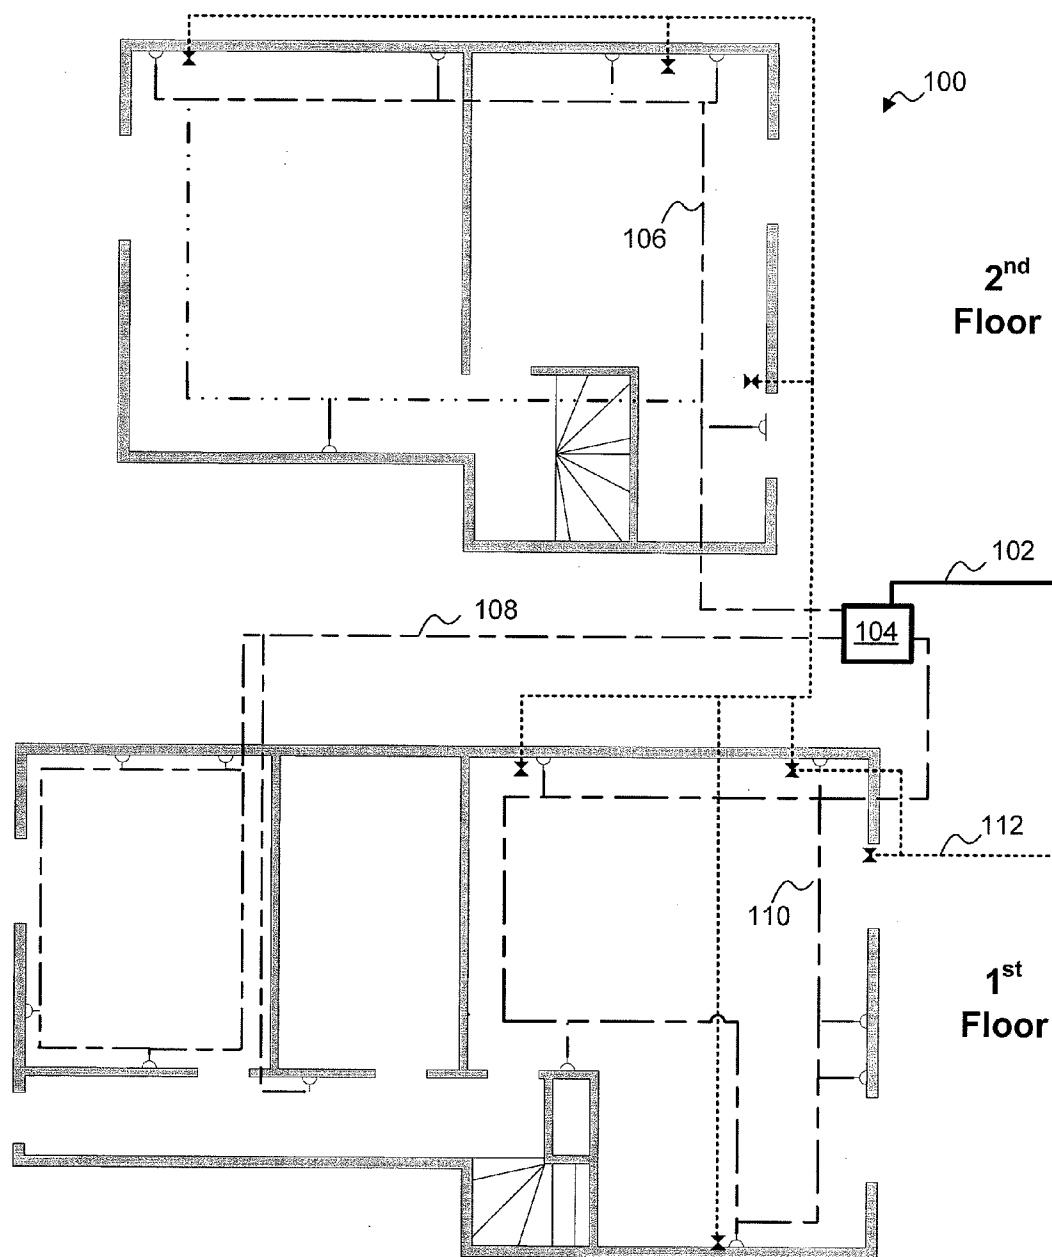


FIG. 1
PRIOR ART

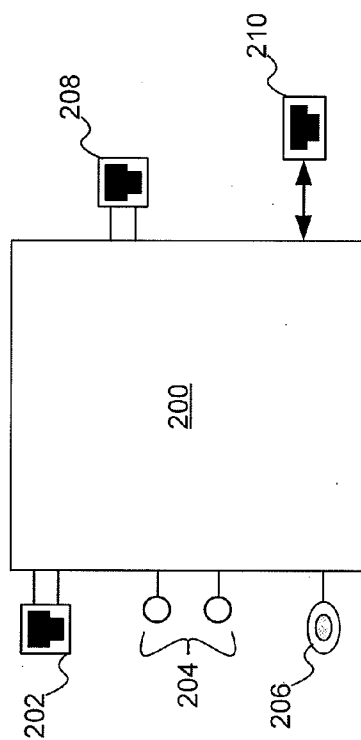


FIG. 2A

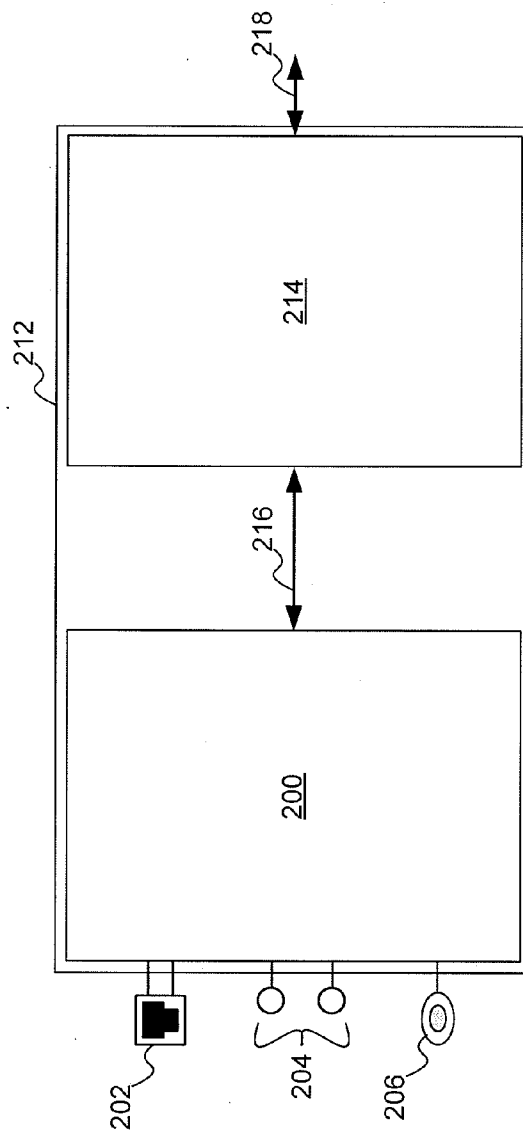


FIG. 2B

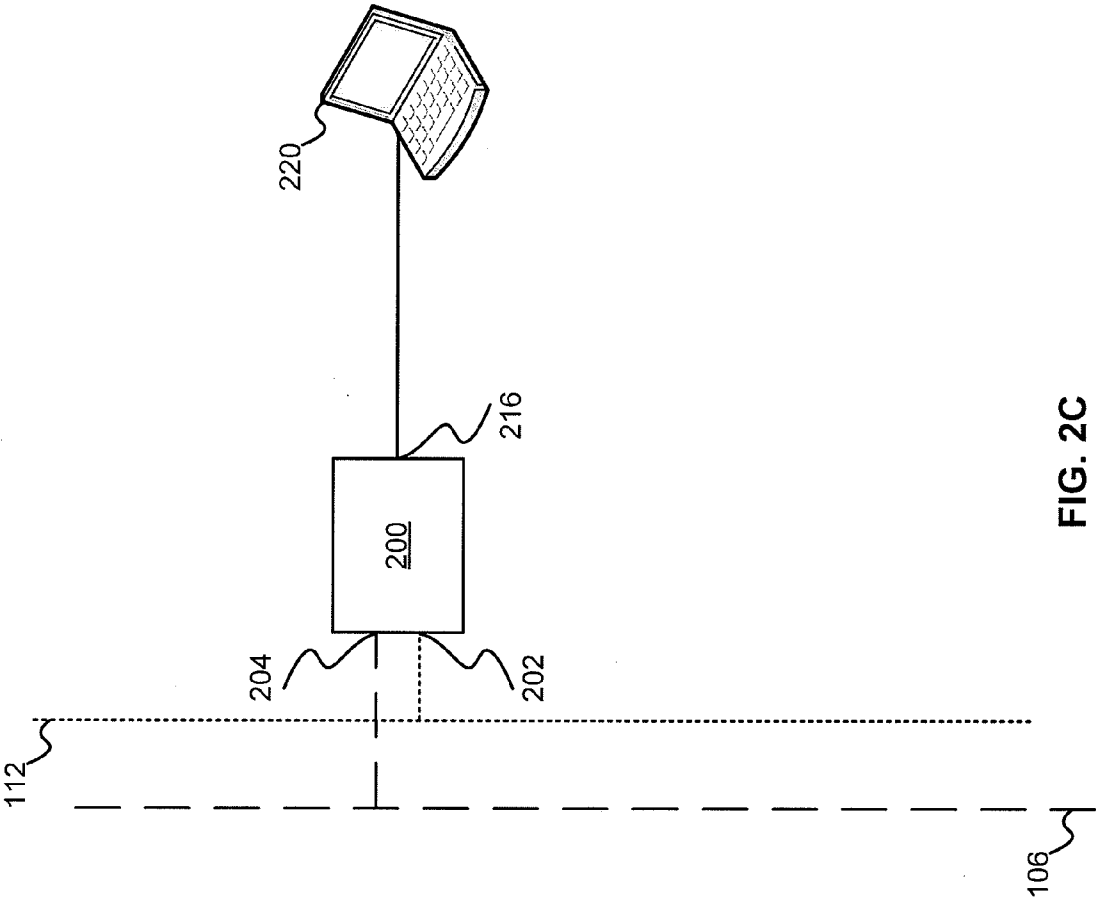
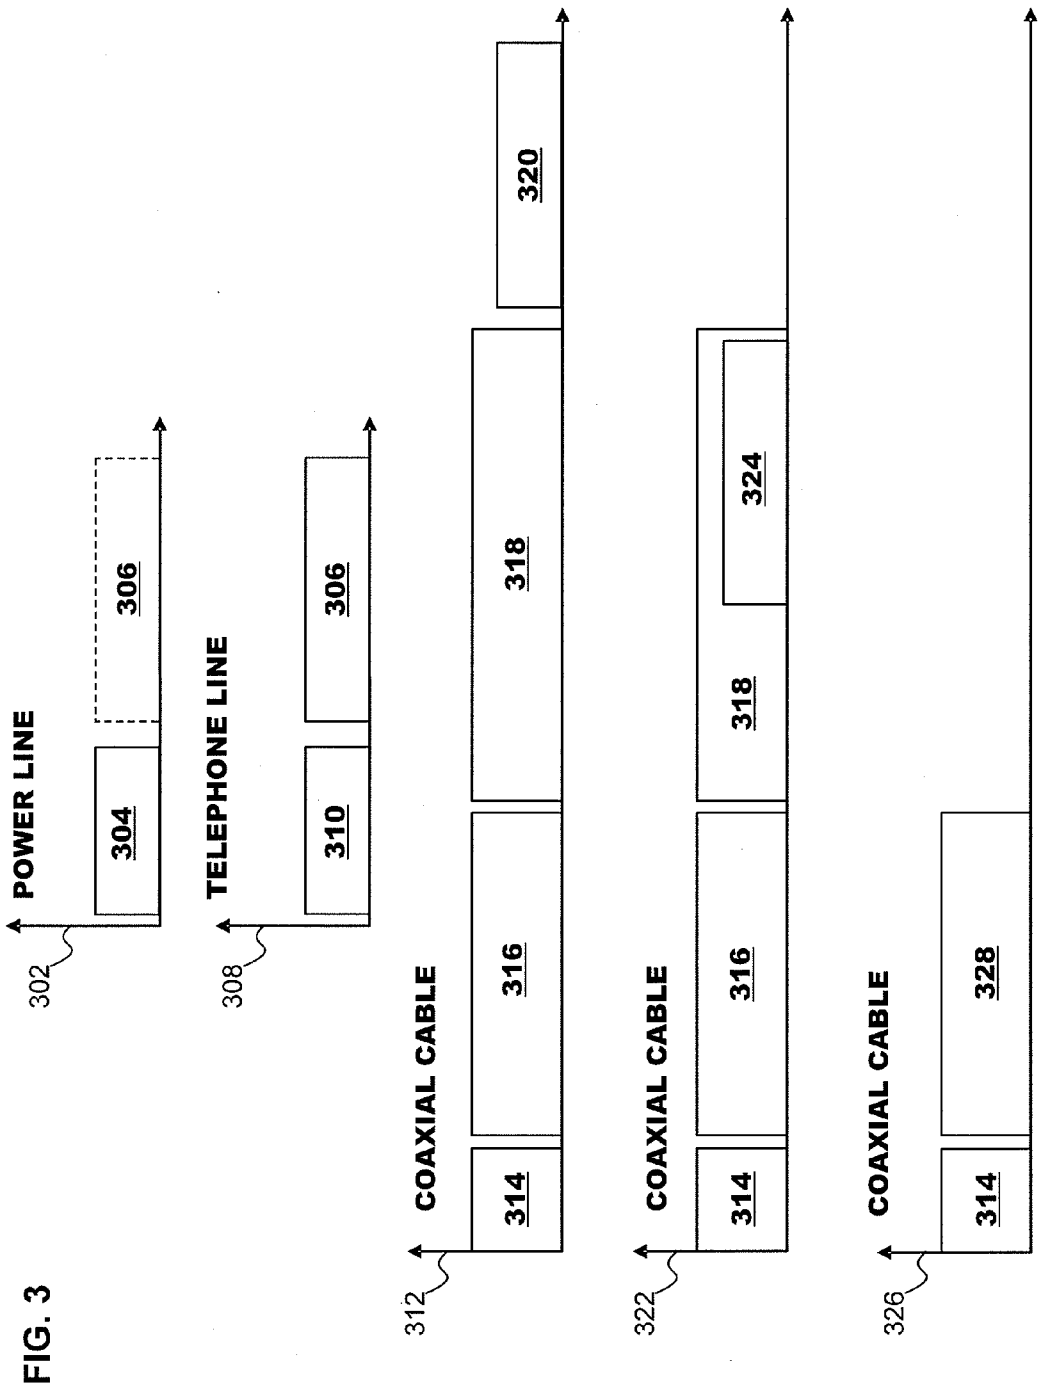


FIG. 2C



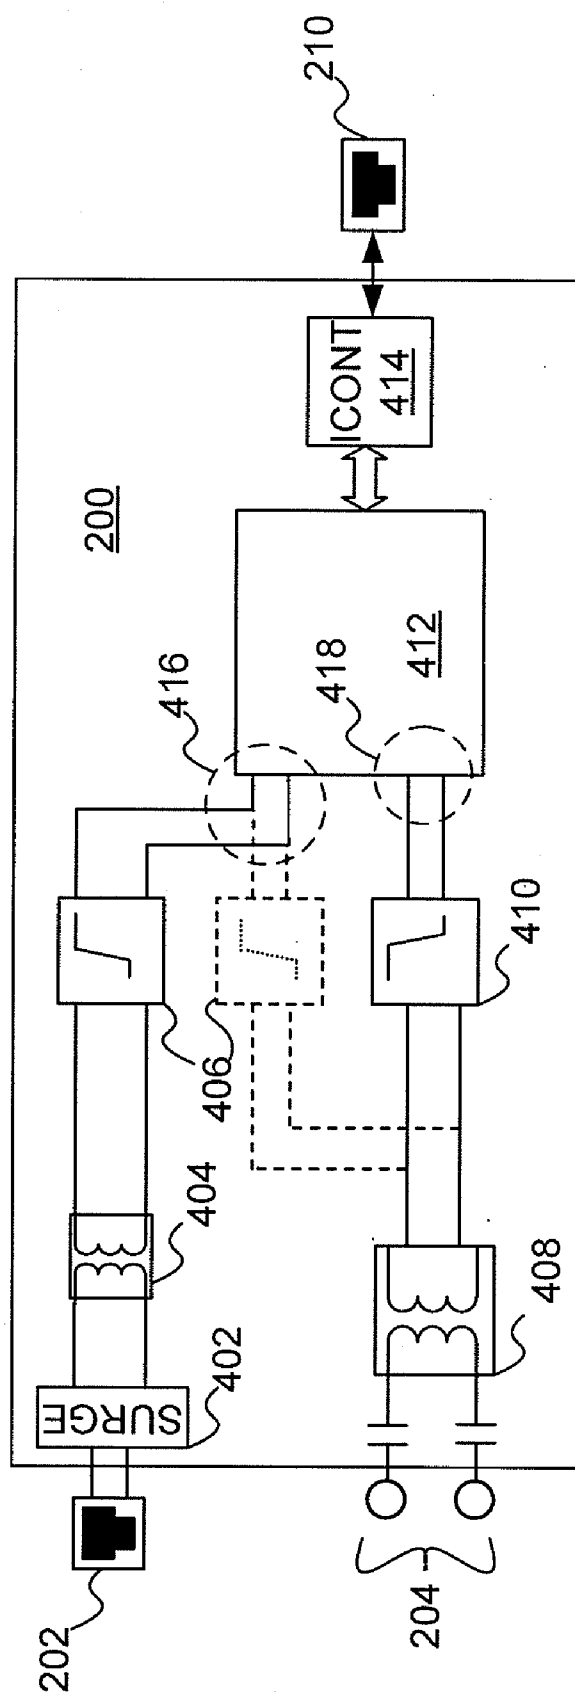


FIG. 4

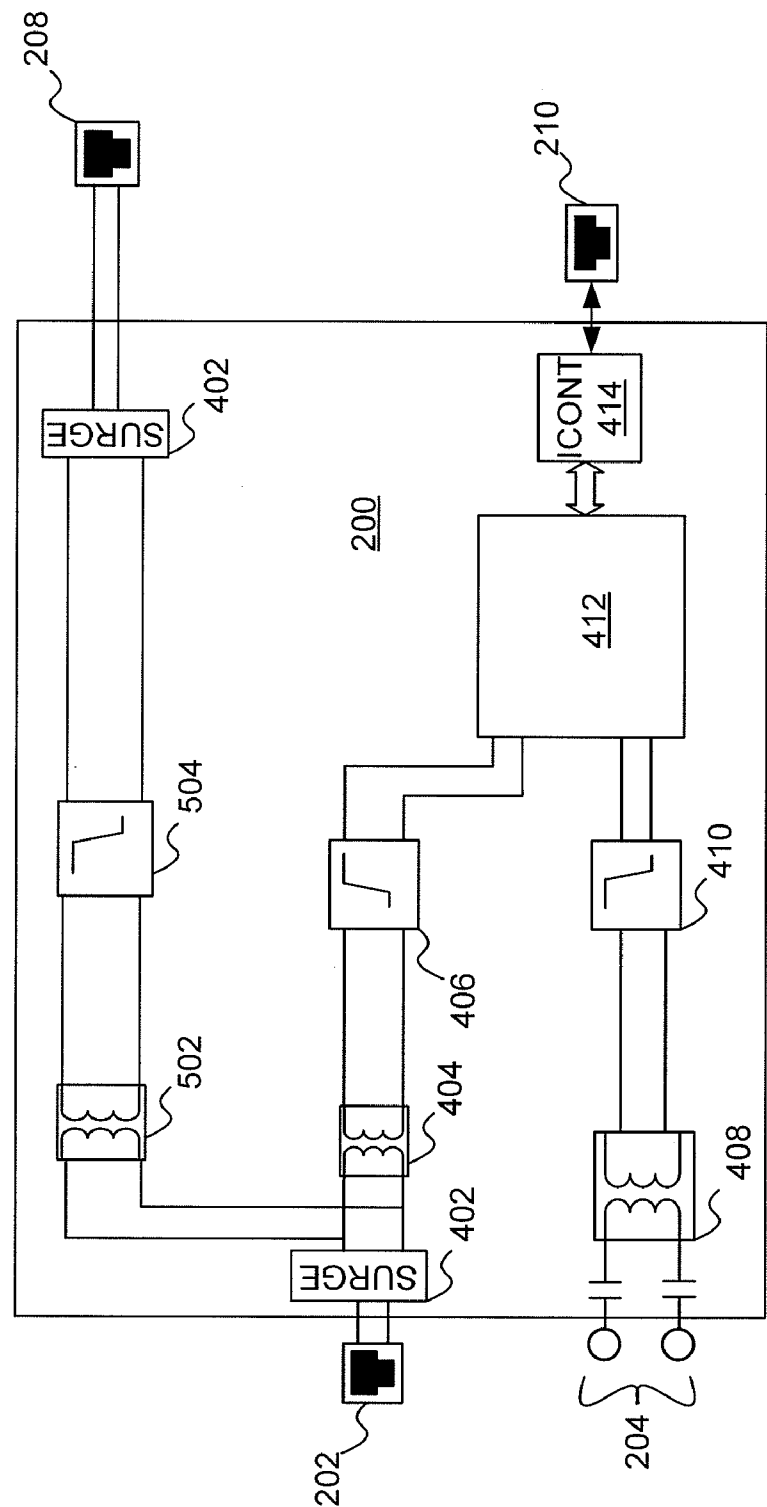


FIG. 5

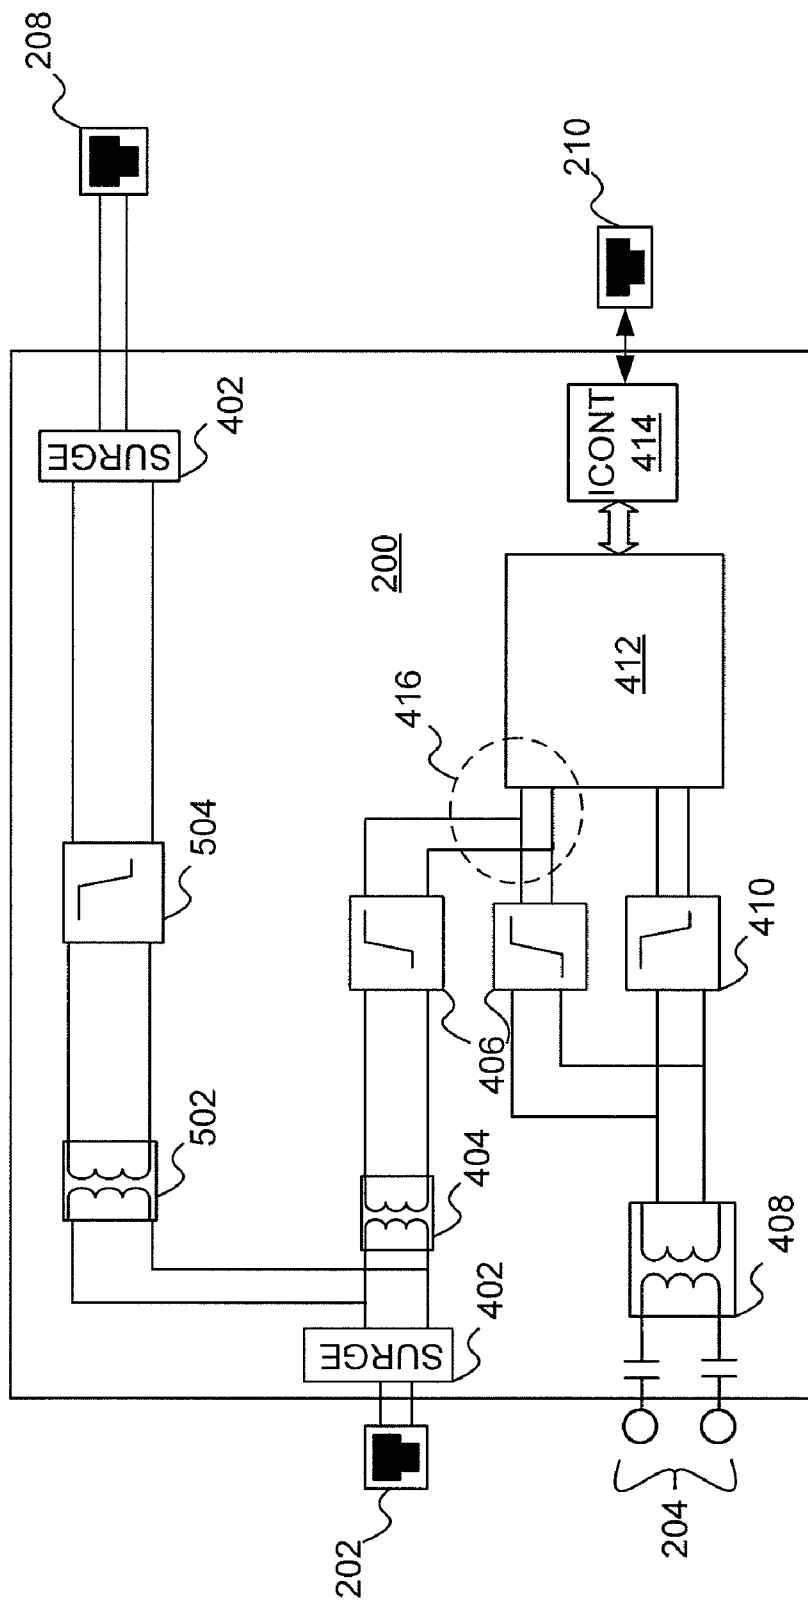


FIG. 6

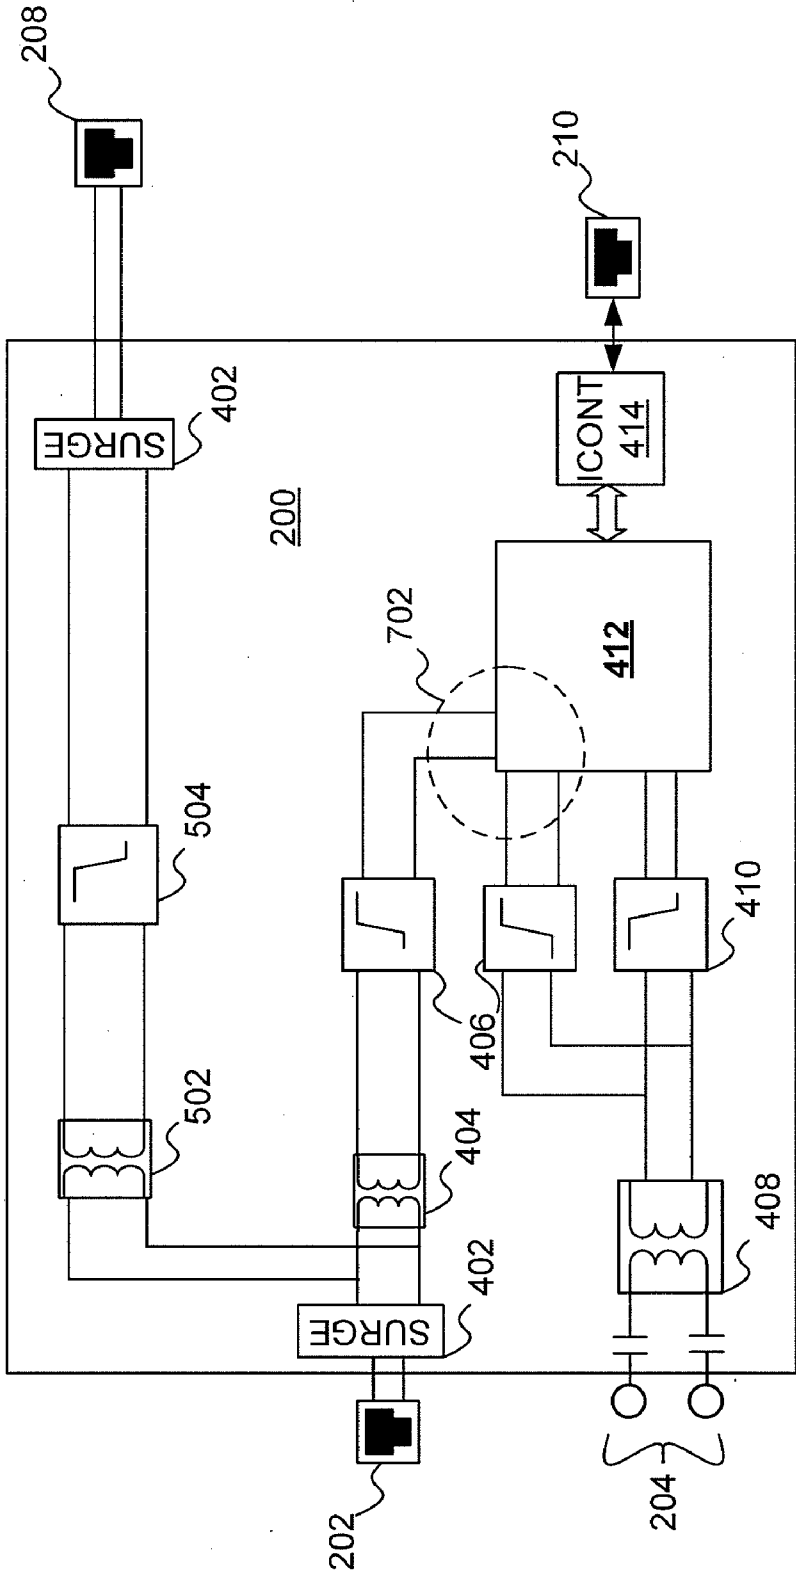


FIG. 7

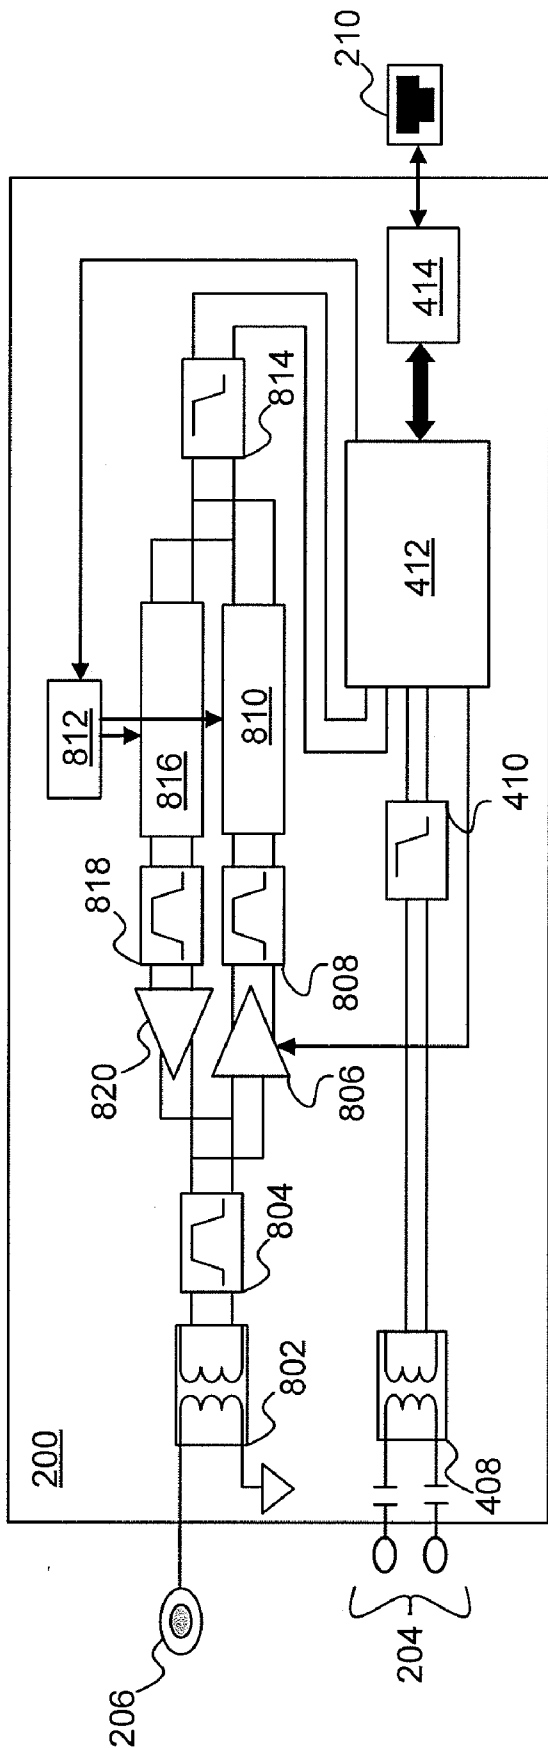


FIG. 8

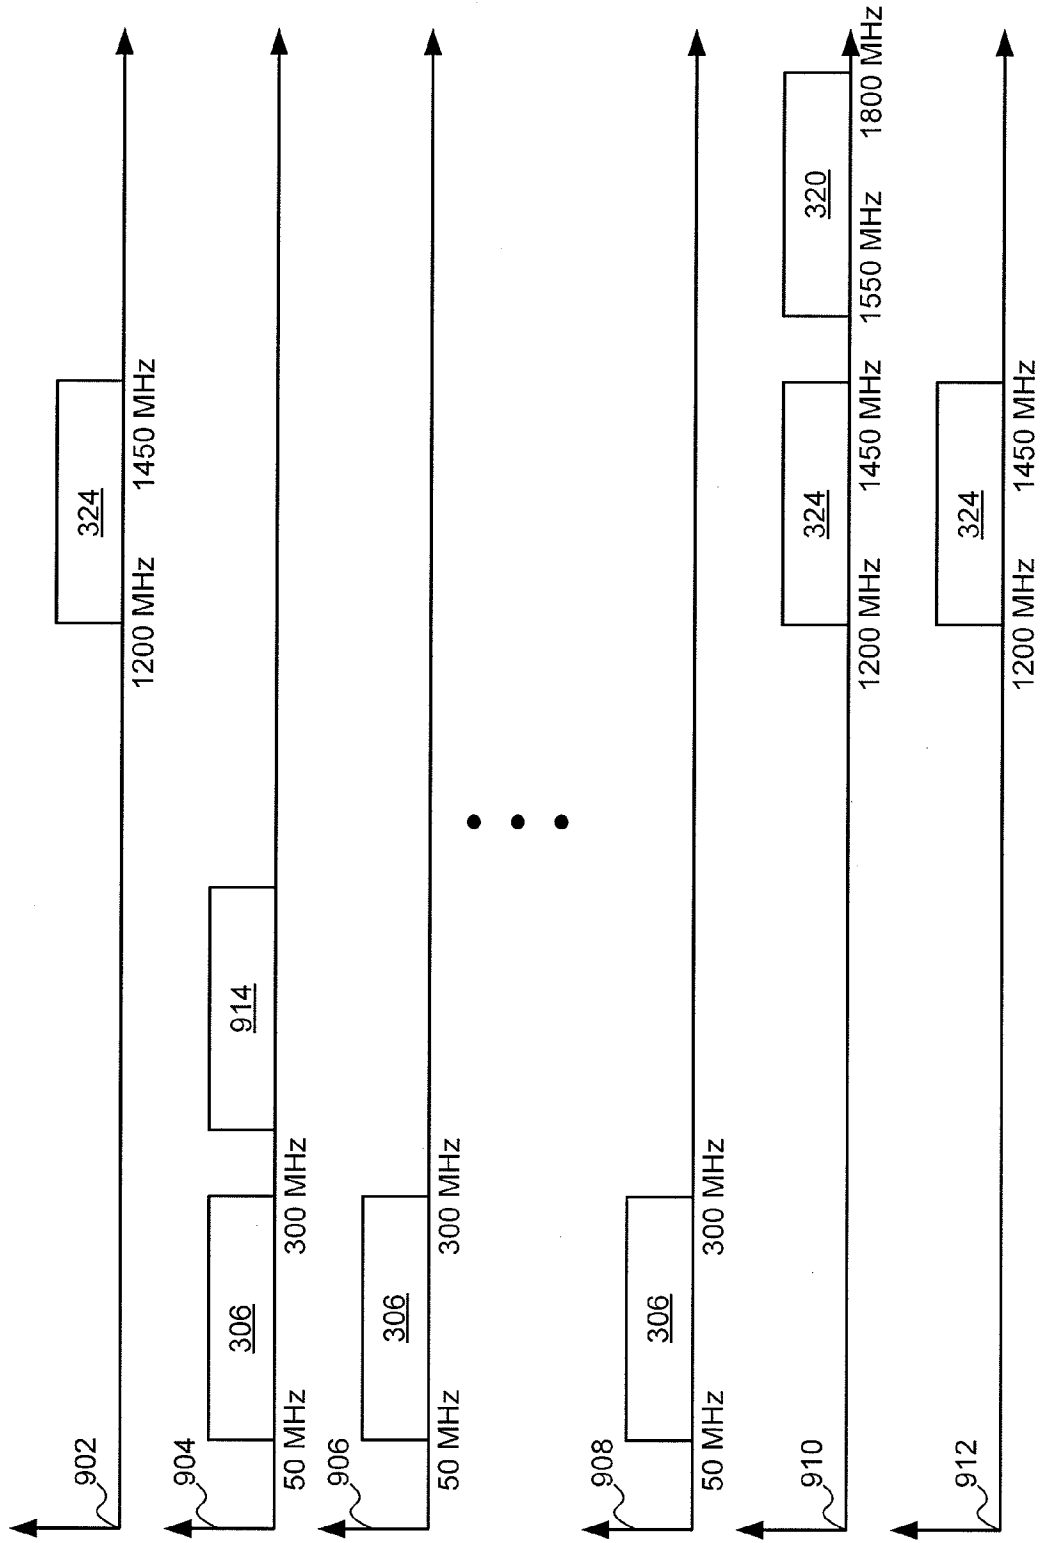


FIG. 9

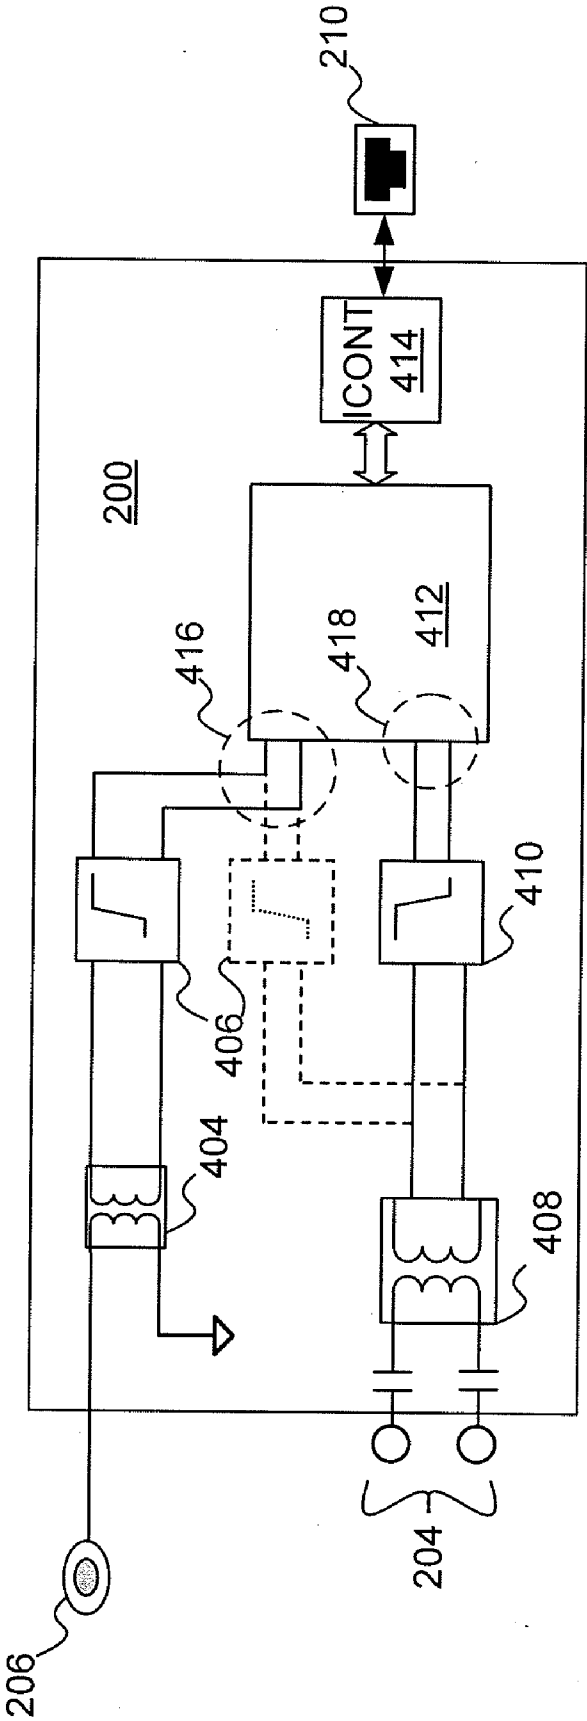


FIG. 10

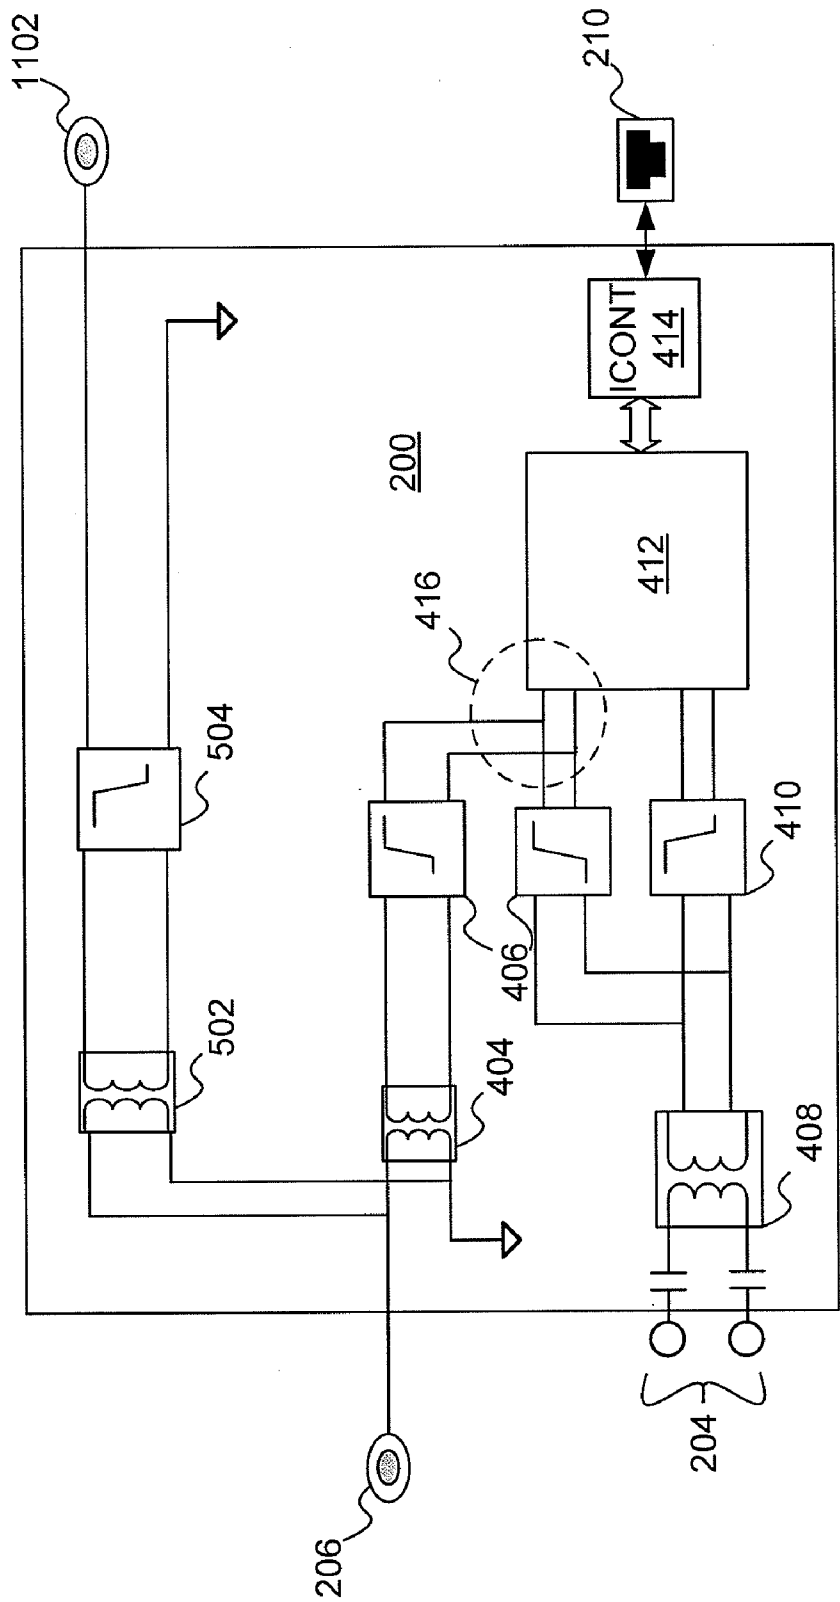
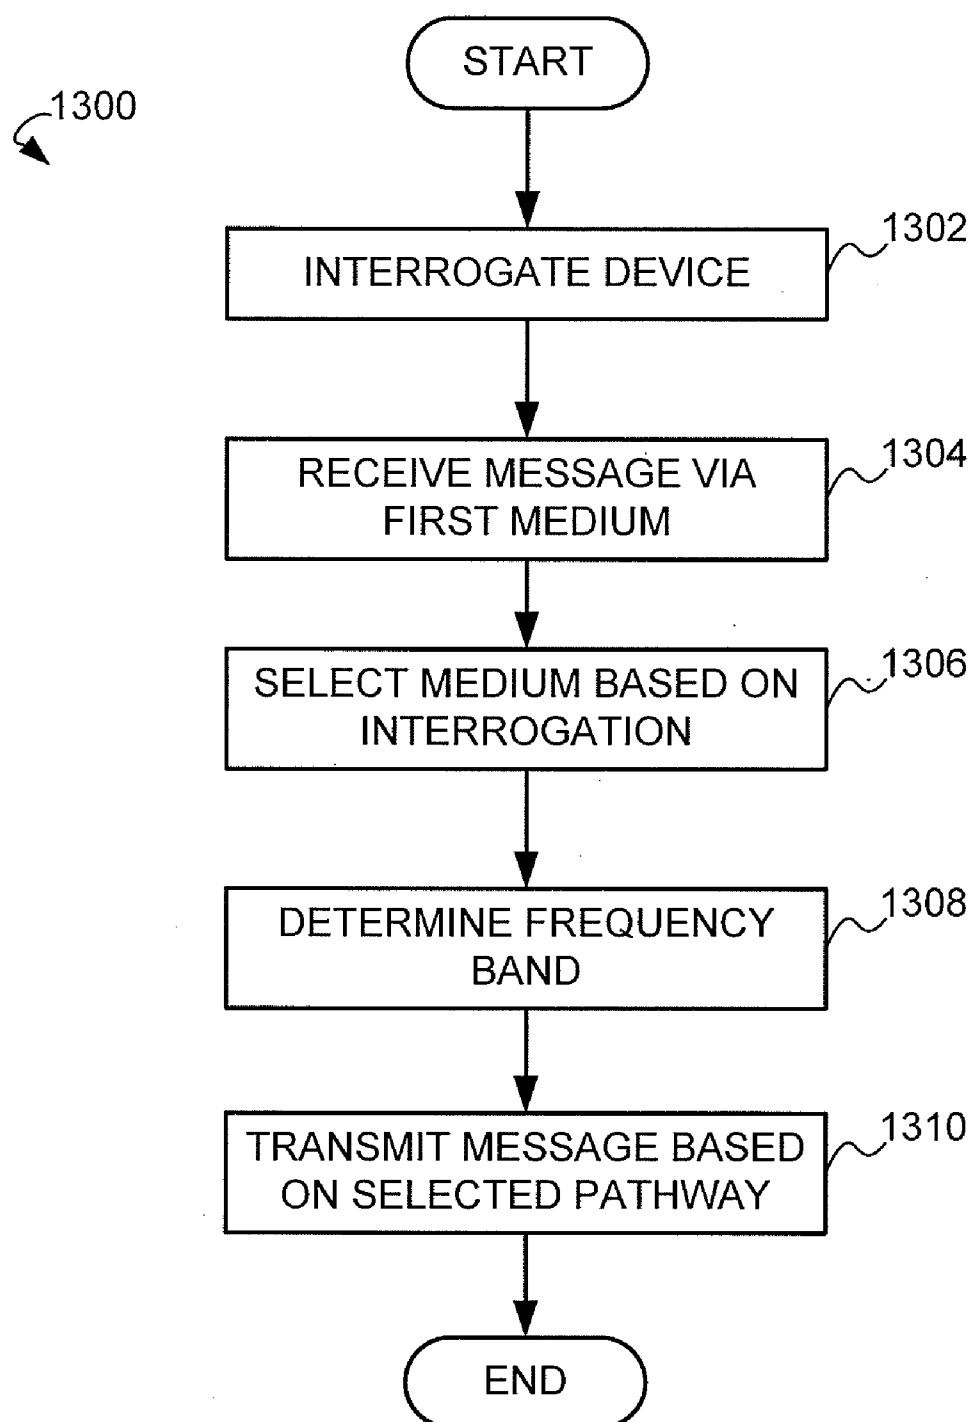


FIG. 12

**FIG. 13**

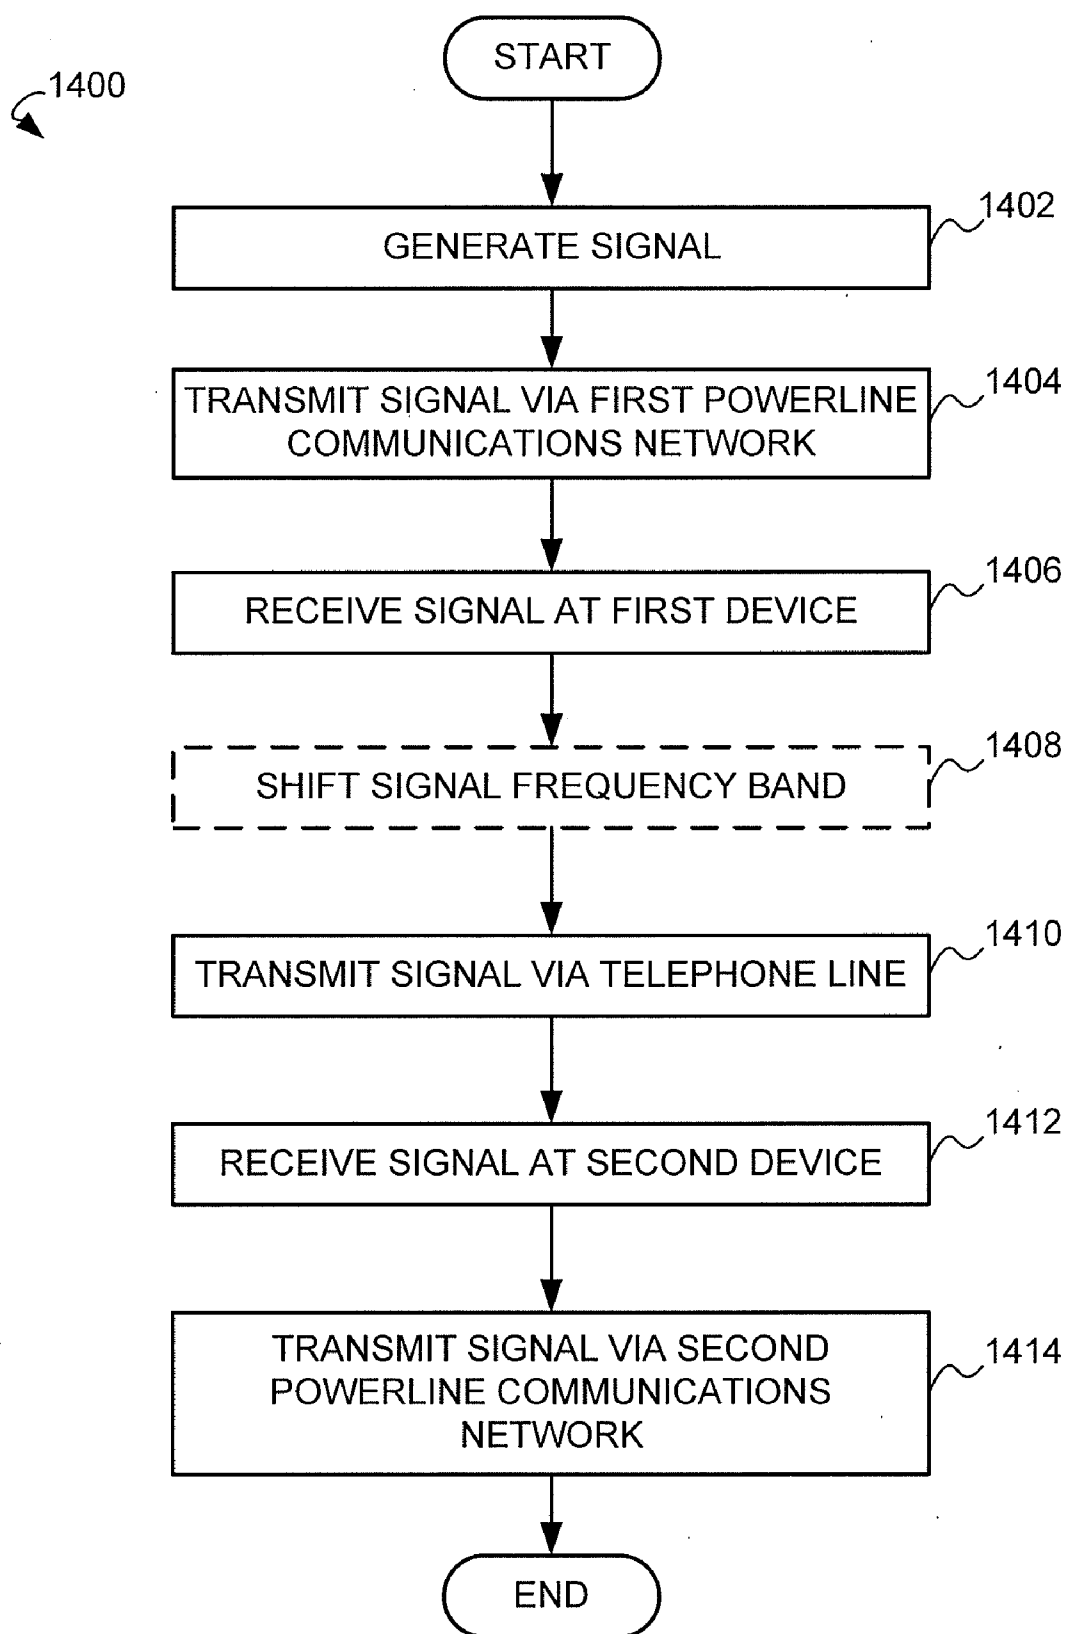


FIG. 14

MULTI-WIDEBAND COMMUNICATIONS OVER MULTIPLE MEDIUMS WITHIN A NETWORK

CROSS-REFERENCES

[0001] This nonprovisional U.S. patent application is a continuation of nonprovisional U.S. patent application Ser. No. 11/752,865 filed May 23, 2007 and entitled “Multi-Wideband Communications over Multiple Mediums within a Network,” which is a continuation-in-part of nonprovisional U.S. patent application Ser. No. 11/536,539 filed Sep. 28, 2006 and entitled “Multi-Wideband Communications over Powerlines,” which claims benefit of and priority to European Patent Application EP 05 256 179.2, entitled “Power line Communication Device and Method,” filed Oct. 3, 2005 under 35 U.S.C. 119; a continuation-in-part of nonprovisional U.S. patent application Ser. No. 11/562,380 filed Nov. 21, 2006 and entitled “Network Repeater;” and a continuation-in-part of nonprovisional U.S. patent application Ser. No. 11/619,167 filed Jan. 2, 2006 and entitled “Unknown Destination Traffic Repetition” all of which are hereby incorporated herein by reference.

BACKGROUND

[0002] 1. Field of Invention

[0003] The present application relates generally to communications and more specifically to multi-wideband communications over multiple mediums.

[0004] 2. Description of the Related Art

[0005] Typically, residences such as houses, apartments, and condominiums have multiple types of wires for power and/or communications. For example, a house may typically have one or more ring mains, or may have multiple spurs configured to supply power to most, if not all, of the rooms in the house. The house may additionally have one or more telephone line connections, including multiple extensions accessible in various rooms. The telephone line may provide telephone communications and/or Internet access using a digital subscriber line (DSL) standard. Many homes additionally have one or more coaxial cable connections to a number of rooms. For example, cable television programming or satellite television programming, or terrestrial analog television may be received via the coaxial cable. In some cases the phone line or coax in the home may be unused by any apparatus. Further, networked apparatuses may communicate via Ethernet cabling.

[0006] Many households include devices that communicate with one another. For example, a television set may communicate with a digital versatile disc (DVD) player to display a movie on the television set. These communications require separate wires and/or cables connecting the DVD player to the television set. These device-to-device wires can become very complex, if, for example, other components such as a stereo system are also connected to the television set. Further, the stereo system may be separately connected via another wire to a personal computer or media player. The use of a dedicated wire between devices additionally limits which devices are able to communicate with one another. For example, many homeowners are reluctant to connect a very long wire from, for example, a television in the kitchen to a DVD player in a bedroom. In addition, with the rise of digital content, such as JPEG digital photographs, MP3 digital music and MPEG digital video, that can arrive from multiple

sources, such as the cable service provider or the internet, and could be stored in different devices in the home, such as the Personal Computer (PC) or a Personal Video Recorder (PVR) or a Set Top Box (STB), there is a need to create a digital in-home network that can distribute the digital content through network connected devices throughout the home with high performance and reliability.

[0007] Powerline communication (PLC) is a technology that encodes digital data in a signal and transmits the signal on existing electricity powerlines in a band of frequencies that are not used for supplying electrical power. Accordingly, PLC leverages the ubiquity of sockets within existing power supply networks to provide an extensive number of possible connection points to form a network.

[0008] Referring to FIG. 1, a powerline network in a household **100** typically has a distributed mains wiring system consisting of one or more ring mains, several stubs or spurs and some distribution back to a junction box **104**. For example, the household **100** is supplied electrical power from an external line **102**. The junction box **104** routes the electrical power among ring mains **106**, **108**, and **110**. The household **100** further comprises a telephone line network **112**. The telephone line network **112**, as shown, does not require a junction box or division among multiple rings. It should be noted that the powerline network is typically more widely distributed to outlets and rooms than the telephone line network **112**.

[0009] As shown in FIG. 1, there are a variety of distances and paths between different power outlets in the household. In particular, the outlets most closely located to each other are those on multi-plug strips, and the outlets furthest away from each other are those on the ends of stubs of different ring mains (e.g. power outlets in the first floor and the second floor). Communications between these furthest outlets typically pass through the junction box **104**. In some PLC systems, it may be difficult to pass communications through the junction box, particularly if they are on different alternating current AC phases.

[0010] There is, therefore, a need for improved communications systems that overcome the above and other problems.

SUMMARY

[0011] The present invention is directed to apparatus and methods of operation that are further described in the following Brief Description of the Drawings, the Detailed Description of the Invention, and the claims. Other features and advantages of the present invention will become apparent from the following detailed description of the invention made with reference to the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] Multiple embodiments of the invention will now be described by way of example only with reference to the accompanying Figures in which:

[0013] FIG. 1 is a diagram of a prior art household;

[0014] FIG. 2A is a diagram of an exemplary multi-network interface device comprising a plurality of interfaces for communicating over various mediums, according to various embodiments;

[0015] FIG. 2B is a diagram of an exemplary embedded multi-network interface device comprising a plurality of interfaces for communicating over various mediums, according to various embodiments;

[0016] FIG. 2C is a diagram of an exemplary multi-network interface device connected to a network apparatus, according to various embodiments;

[0017] FIG. 3 includes exemplary communications transmission spectra of three mediums, according to various embodiments;

[0018] FIG. 4 is a block diagram of a first circuit embodiment of the multi-network interface device, according to various embodiments;

[0019] FIG. 5 is a block diagram of a second circuit embodiment of the multi-network interface device, according to various embodiments;

[0020] FIG. 6 is a block diagram of a third circuit embodiment of the multi-network interface device, according to various embodiments;

[0021] FIG. 7 is a block diagram of a fourth circuit embodiment of the multi-network interface device, according to various embodiments;

[0022] FIG. 8 is a block diagram of a fifth circuit embodiment of the multi-network interface device, according to various embodiments;

[0023] FIG. 9 depicts the frequency characteristics of a frequency band associated with the signal used by the fifth integrated circuit embodiment depicted in FIG. 8, according to various embodiments;

[0024] FIG. 10 is a block diagram of a sixth circuit embodiment of the multi-network interface device, according to various embodiments;

[0025] FIG. 11 is a block diagram of a seventh circuit embodiment of the multi-network interface device, according to various embodiments;

[0026] FIG. 12 is a block diagram of an eighth circuit embodiment of the multi-network interface device, according to various embodiments;

[0027] FIG. 13 is a flowchart depicting an exemplary method for communicating within a network, according to various embodiments; and

[0028] FIG. 14 is a flowchart depicting an exemplary method for bridging between mediums, according to various embodiments.

DETAILED DESCRIPTION

[0029] For the sake of clarity, the term “powerline” will be used herein to refer to low voltage household or commercial mains distribution cabling (typically 100-240 V AC power) or any other distributed electrically conductive AC cabling that is capable of passing power to appliances connected to it. Furthermore, the term “powerline technology” will be used herein to refer to a specification that when implemented as a series of network interface devices connected to a powerline, enables the devices to bi-directionally communicate with each other using signals superimposed on the power distribution AC voltages also present on the powerline.

[0030] The term “multi-network interface device” will be used herein to describe an apparatus that implements either fully or partially, at least two communications technologies, such as a powerline technology, a telephone line technology, or a coaxial cable technology to enable the apparatus to communicate with other devices connected via the same communications technology (such as a powerline, telephone line, or coaxial cable) to a network, regardless of whether or not the apparatus is integrated with other apparatuses or functions within a single enclosure. In some embodiments, the multi-network interface device may be a powerline communica-

tions device having additional communications interfaces for communicating via a phone line and/or a coaxial cable.

[0031] For the sake of clarity, in terms of explanation of operation of the multi-network interface device around current powerline, telephone line, and coaxial cable technologies, a frequency band used in the multi-network interface device comprising a frequency of less than about 30 MHz, will be known herein as a “low band(s)”. Similarly, a frequency band(s) used in the powerline communication devices, telephone line communications devices, and coaxial cable communications devices whose frequency is greater than about 30 MHz will be known herein as “high band(s).”

[0032] For the sake of simplicity, the term “signal path” will be used to refer to the path of a signal transmitted or received from a network apparatus to the powerline, telephone line or coaxial cable.

[0033] The term “separate,” as used herein with respect to frequency bands, is to characterize frequency bands that do not use, except incidentally, the same frequencies for communication data or commands. Frequency bands may be separate but interleaved, e.g., overlapping.

[0034] The term “simultaneously” is used herein with respect to communicating data to indicate that at least part of first data or commands are communicated using a first frequency band and/or medium at the same time as at least part of second data or commands are communicated using a second frequency band and/or medium. For example, simultaneous transmission is contrasted with systems that alternate or interleave the use of frequency ranges, one frequency range after the other or hopping from one frequency range to the other frequency range while not using both frequency ranges at the same moment.

[0035] The term “independent” is used herein with respect to data transmitted to indicate that data transmitted using one frequency band does not depend on data transmitted using another frequency band. Independent data transmission can include, for example, data sent to or received from different locations. Data in which alternative bits are transmitted using different frequencies is not independent because the bits are dependent on each other to form a useful byte. Data transmitted in a first frequency band and including communication setup information, decryption keys, communication commands, or the like is considered independent from data sent in a second frequency band, even when the receipt or processing of the data sent in the second frequency band may use the data in the first frequency band. This is because, transmission of the communication setup information, decryption keys, communication commands, or the like does not depend on the data sent in the second frequency band.

[0036] The term “wideband” is used herein to refer to a frequency band or range used by a powerline, telephone line, or coaxial cable technology signal, characterized by having a bandwidth of greater than, or equal to, about 5 MHz from the first (lowest) frequency to the last (highest) frequency of the band irrespective of the presence of notches. However, in various embodiments, wideband may have bandwidths of at least 5, 7, 10, 12, 15, 20, 100, 250 or 500 MHz. A wideband may include many different carrier channels used to convey data. For example, in various embodiments, widebands include more than 25, 50, 100, 250, 500, or 1000 data carrier frequencies with or without CDMA sequences. Various embodiments of the invention may make use of wide or narrow frequency bands.

[0037] The term “section of mains cable” is used herein to refer to various sections of cabling in a typical AC electrical wiring system in a home or building or dwelling. The various sections may be separated from each other by the electrical distribution means, such as a junction box, fuse box, surge protector, residual current detector, or the like. An individual section of mains cable may be on a different AC phase than other sections of mains cable within the dwelling. There may be one or more sockets, switches and/or appliances associated with a single section of mains cable. The section of mains cable may comprise two or three core class cables with or without shielding. The AC electrical wiring system may transfer electricity having a voltage of approximately 110 Volts, 240 Volts, or other standard voltage levels. The section of mains cable may comprise, at least in part, a ring main or loop. The section of mains cable may comprise, at least in part, a spur that may be part of a branch-based arrangement.

[0038] A communications device for simultaneous multi-wideband communications over multiple mediums is provided. The multiple mediums may include, for example, a powerline, a telephone line, and/or a coaxial cable. In some embodiments, a communication may be transmitted or received via any of the mediums. A communication may be received via a first medium and forwarded in a second medium. In some embodiments, a third medium may also be available for reception and/or transmission of the communication. For example, a multi-network interface device may receive a communication via a powerline and forward the received communication via a telephone line. Further, a communication between two multi-network interface devices may be transmitted, in parallel or sequentially, through two or more mediums within a communications network. For example, a video signal may be transmitted from a DVD player to a television via both the powerline and a coaxial cable. In various embodiments, one medium may be used to bridge two portions of another medium. For example, to bypass a junction box or to reach part of the network on a different AC phase, a telephone line may be used as a bridge between sections of mains cable or sections on different AC phases in a powerline network.

[0039] The various media may be used in conjunction with multi-wideband communications. The multi-widebands include, for example, a lower frequency range below approximately thirty megahertz and a higher frequency range above approximately thirty megahertz. In some embodiments, the lower frequency range is between two megahertz and twenty-eight megahertz while the higher frequency range is between fifty megahertz and three hundred megahertz. The lower frequency band may be conducted via the powerline, and the higher frequency band may be conducted via the powerline and/or another medium such as a telephone wire or coax cabling. A single media may be used for communications using both lower and higher frequency ranges. In some embodiments, higher frequency signals may be moved to another frequency range by mixing, for example to take the signal to above an existing service on the wire, such as in the case of a coaxial cable that already carries analog or digital television information. In these embodiments, the higher frequency band may be moved, for example, between 1.2 gigahertz and 1.45 gigahertz or between 1.55 gigahertz and 1.8 gigahertz. In other embodiments, a portion of the higher frequency band may be above 2 gigahertz. In some embodiments, a signal in the higher frequency bands may comprise an ultra-wideband signal at least 500 megahertz wide.

[0040] Communications over the various media may be supported by a single reference design having a single power source. The single reference design is optionally a single unit that comprises filters and other components configured to enable connection to different mediums and passing the communications over these mediums. For example, the single reference design may comprise multiple interfaces configured to communicate over telephone line, powerline, and/or coaxial cable. The single reference design may further allow the different mediums to share a single media access control (MAC) address. The single reference design may be powered via the powerline communications interface. In some embodiments, communications may be received and/or transmitted using powerlines and either telephone lines or coaxial cables. Further, the single reference design may comprise a single host interface controller configured to communicate with a networked apparatus.

[0041] It will be appreciated that the specific network and other examples described in these sections are used for illustrative purposes only. In particular, the examples described in these sections should in no way be construed as limiting the disclosed communication devices.

[0042] Some embodiments of the communications network comprise a plurality of nodes of which some employ a multi-network interface device that enables simultaneous and/or independent communication over two or more mediums. A first frequency band optionally comprises frequencies of less than 30 MHz and the other frequency band(s) comprise frequencies of greater than 30 MHz. Alternatively, both a first and a second frequency band may comprise frequencies greater than 30 MHz. Because the multiple frequency bands can be in different ranges, communications can be optimized for each of the mediums such that the trade-off between cost, coverage, and throughput will be superior to that achieved by a network comprising a single medium.

[0043] The computing network comprising powerlines, telephone lines, and/or coaxial cable provides inter-operability with prior art powerline technologies by also supporting communication between multi-medium nodes and single medium nodes (that communicate via a single medium (e.g. powerline)).

[0044] The multi-network interface device may be part of an external modem apparatus or embedded within another apparatus (e.g. computer, television, etc.). However, regardless of the manner in which the multi-network interface device is included within a network node, the device remains connected to electrically conductive cabling (that passes AC power) and is capable of transmitting data across the cabling using the low and/or high bands. Further, the multi-network interface device is capable of communicating over more than one medium (e.g. telephone line, coaxial cable, or powerline).

[0045] The multi-network interface device typically employs an analog signal separation device configured to isolate data communication paths from AC power transmission, prior art telephone line communication, and/or prior art coaxial cable communication, to an apparatus. One of the most efficient ways of providing this isolation is by high-pass filtering or band-pass filtering whilst minimizing out-of-band signals in the low band. For example, high band signals may be filtered using high linearity components and low band signals may be filtered using analog low-pass smoothing or anti-aliasing. It may not be necessary to perform the isolation on both receiver and transmitter signal paths (depending on

the specifications of the analog components and the modulation techniques employed therein).

[0046] Signals in the high band and the low band can use the same or different modulation techniques (e.g. Orthogonal Frequency Division Multiplexing (OFDM), and/or Code Division Multiple Access (CDMA)) or time division schemes to facilitate co-existence and/or bi-directional communication. In one embodiment, the low band employs a modulation scheme that is inter-operable with one of the existing powerline modem standards or proposals, whilst the high band on the powerline is used for performance expansion beyond previous standards or in other mediums. Data and/or control commands can be passed through one or both of the mediums simultaneously and via a plurality of multi-network interface devices in the form of a repeater (e.g., relay) network. As such, it is possible for the frequency bands to overlap slightly, and to include different frequency ranges or bandwidths, relative to those cited herein.

[0047] In some embodiments, different types of signals are communicated in different frequency bands. For example, in one embodiment, communication setup information, node discovery signals, path discovery signals, encryption or decryption keys, communication commands, and/or other types of command and control signals are communicated in a first frequency band while other types of data (e.g., non-command and control) are communicated in a second frequency band. The other types of data communicated in the second frequency band may include video, audio, and/or text, etc.

[0048] FIG. 2A is a diagram of an exemplary multi-network interface device **200** comprising a plurality of interfaces for communicating over various mediums. The exemplary multi-network interface device **200** may be a separate device, such as an adapter, or embedded into a network apparatus such as a television, stereo, DVD player, personal computer, or the like. The multi-network interface device **200** may comprise one or more communications interfaces including a phone line interface **202**, a powerline interface **204**, and/or a coaxial cable interface **206**. The communications interfaces are each configured to communicate over their respective mediums. The multi-network interface device **200** may further comprise one or more interfaces for communication with an apparatus connected to the multi-network interface device **200**. For example, as shown, the multi-network interface device **200** comprises a second set of communications interfaces including a second phone line interface **208** and an Ethernet interface **210** configured to connect to telephone and an Ethernet network apparatus, respectively.

[0049] Communications over the various media may be supported by a single reference design having a single power source. The single reference design is optionally a single device that comprises filters and other components configured to enable connection to different mediums and passing the communications over these mediums. For example, the single reference design may comprise multiple interfaces configured to communicate over telephone line, powerline, and/or coaxial cable. The single reference design may further allow the different mediums to share a single media access control (MAC) address. The single reference design may be powered via the powerline communications interface. Further, the single reference design may comprise a single host interface controller configured to be shared by communications using the various mediums.

[0050] The telephone interface **202** is configured to communicate over a telephone line network. The telephone interface may, in addition to communicating high band signal(s), simultaneously communicate voice signals, DSL signals (including ADSL and VDSL signals), Home Phoneline Networking Alliance (HPNA)-compatible signals, and/or the like. Additionally, the telephone line may already carry these types of signals generated by other sources in other locations.

[0051] The powerline interface **204** may comprise an interface configured to receive electrical power via a powerline. The powerline interface **204** may comprise a male and/or female connector.

[0052] The coaxial cable interface **206** is configured to communicate via a coaxial cable network. The coaxial cable interface, may, in addition to communicating high band communication signal(s), also communicate DSL signals, Data Over Cable Service Interface Specification (DOCSIS)-compatible signals, television broadcast signals (including cable television and/or digital television signals), Multimedia over Coax Alliance (MoCA)-compatible signals, Satellite L-Band signals, and/or the like. Additionally, the coaxial cable may already carry these types of signals generated by other sources in other locations.

[0053] The second telephone interface **208** is configured to communicate a signal between the multi-network interface device **200** and a device. For example, the second telephone interface **208** may communicate with a telephone or a DSL modem. In other embodiments, the multi-network interface device **200** may comprise a second coaxial cable interface **206** and/or a second powerline interface **204**. Second telephone interface **208** may be connected to a telephone and be used to communicate a telephone call.

[0054] The Ethernet interface **210** is one example of a host interface and is configured to communicate a signal between the multi-network interface device **200** and a device configured to communicate over an Ethernet connection. The Ethernet interface may, for example, be connected to a personal computer, media player, or WiFi modem. The Ethernet interface **210** may be part of a device compatible with the Universal Plug 'n Play (UPnP) standard, Digital Living Network Alliance (DLNA) standard, or the like.

[0055] In operation, the communications signal may travel on one or more of the mediums to reach the multi-network interface device **200** from another node on the network. The multi-network interface device **200** may be configured to determine the medium on which to transmit the communications signal based on a Quality of Service (QoS) metric associated with each medium. The QoS metric may measure network latency, network throughput, available bandwidth, or the like. The multi-network interface device **200** may vary which medium is used to transmit signals if the QoS metric changes over time.

[0056] Signals are received at one of the interfaces (telephone line interface **202**, the powerline interface **204**, the coaxial cable interface **206**, the second telephone line interface **208**, and/or the Ethernet interface **210**) where they may be filtered, converted, frequency shifted, modulated, mixed, or otherwise modified the signal to generate a desirable output signal. The output signal may be transmitted via any of the interfaces including the telephone line interface **202**, the powerline interface **204**, the coaxial cable interface **206**, the second telephone line interface **208**, and/or the Ethernet interface **210**.

[0057] In some embodiments, the multi-network interface device **200** is associated with a single media access control (MAC) address. That is, communications received via any of the mediums may be addressed to the same MAC address. In some embodiments, the multi-network interface device **200** may be associated with two or more MAC addresses and/or have two or more Ethernet interfaces **210**. In these embodiments, the multi-network interface device **200** may comprise a router and routing table, a switch, or the like.

[0058] In some embodiments having more than one interface, such as those shown, the signal may substantially “pass through” the communication device **200**. To illustrate, the multi-network interface device **200** may be connected to the telephone line via the telephone line communications interface **202**. As telephone line connections typically occur less frequently than other connections in a home, a homeowner may wish to install a telephone in the same telephone line connection. Hence, by including the second telephone line communications interface **208**, the homeowner may install the multi-network interface device **200** while still being able to use the same telephone line connection for a telephone.

[0059] FIG. 2B is a diagram of an exemplary apparatus **212** comprising an embedded multi-network interface device **200** having a plurality of interfaces for communicating over various mediums, according to various embodiments. The apparatus **212** comprises the multi-network interface device **200**, a host subsystem **214**, a host interface **216**, and an apparatus interface **218**.

[0060] The apparatus **212** may comprise a network apparatus such as a set top box, a DSL Home Gateway, a television set, a DVD player, a kitchen appliance (e.g. a refrigerator, microwave, stove, oven, etc.), a wireless access point, a computing device, a data storage device, a stereo, or the like. The host subsystem **214** comprises the prior art hardware and/or software included in the network apparatus, e.g., the television receiver or the DVD reader. The host interface **206** comprises a communications interface between the multi-network interface device **200** and host subsystem **214**. The apparatus interface **218** is an output or input of the host subsystem **214** as known in the prior art.

[0061] FIG. 2C is a diagram of an exemplary multi-network interface device **200** connected to a separate network apparatus **220**. In the shown embodiment, the multi-network interface device **200** is connected to a powerline **106** and a telephone line **112**, via the powerline interface **204** and the telephone line interface **202**, respectively. The multi-network interface device **200** is also connected to the network apparatus **220** via a host interface **216** to the network apparatus **220**. One example of the host interface **216** is the Ethernet interface **210**. As shown in one embodiment, the network apparatus **220** comprises a laptop computer. In other embodiments, the network apparatus **220** may comprise a set top box, a DSL Home Gateway, a television set, a DVD player, a kitchen appliance (e.g. a refrigerator, microwave, stove, oven, etc.), a wireless access point, a computing device, a data storage device, a stereo, or the like.

[0062] Generally, the host interface **216** is configured to communicate directly with a network apparatus and to act as a first interface between the network apparatus and the rest of the network. In comparison with other interfaces of the multi-network interface device **200**, the host interface **216** is optionally connected to just the network apparatus **220** rather than a network including multiple devices and/or mediums. Typically, the host interface **216** is configured to provide commu-

nications between the network apparatus **220** and the multi-network interface device **200** over a single medium. As is illustrated in FIGS. 2B and 2C, the host interface **216** may be embedded within an apparatus **212** or may be an interface between the separate devices (e.g., multi-network interface device **200** and the network apparatus **220**).

[0063] The host interface **216** is one example of a “host interface.” For example, a host interface may be a boundary between two entities that exchange data using Ethernet class II packets and interfaces associated with a direct application endpoint or start point. Examples of Ethernet class II packets include IEEE 802.3 packets with or without IEEE 802.2 (Logical Link Control (LLC)), IEEE 802.1H (Sub Network Access Protocol (SNAP)) extensions and/or Virtual Local Area Network (VLAN) tagging. Further examples of the host interface **216** include: Ethernet 10/100/1000, Media Independent Interface (MII), Gigabit Media Independent Interface (GMII), Peripheral Component Interconnect (PCI), Host Processor Interface, Universal Serial Bus (USB) 2.0, Firewire, Peripheral Component Interconnect Extended (PCI-X), Peripheral Component Interconnect Express (PCIe), Universal Asynchronous Receiver Transmitter (UART), Service Provider Interface (SPI), or the like. Examples of host interface **216** associated with a direct application end point or start point include: Serial Advanced Technology Attachment (SATA) I/II/III, Universal Serial Bus (USB) 2.0, Inter-Integrated Circuit Sound (I2S), Universal Asynchronous Receiver Transmitter (UART), Infrared Data Association (IrDA) protocols, Moving Picture Experts Group (MPEG) Transport Stream (TS), High-Definition Multimedia Interface (HDMI), and Video Graphics Array (VGA).

[0064] FIG. 3 includes exemplary communications transmission spectra of three mediums, according to various embodiments. Any or all of the mediums (powerlines, telephone lines, and/or coaxial cable) may be present in a network. In some embodiments, the various frequency bands depicted in FIG. 3 may comprise widebands and/or narrow bands. Other, different, communications spectra may be used in alternative embodiments. In the spectra depicted, the x-axis represents frequency.

[0065] In a spectrum **302**, a communications transmission spectrum as may be associated with a powerline is shown. The spectrum **302** comprises a low band **304** and a high band **306**. The low band **304** may comprise frequency bands below approximately thirty megahertz. The low band **304** may include base band powerline communications frequencies as described in the HomePlug AV standard (i.e. two megahertz to thirty megahertz). The high band **306** comprises one or more frequency bands above approximately thirty megahertz (e.g. fifty megahertz to three hundred megahertz). In some embodiments, the high band **306** may comprise a frequency band above one gigahertz. In some embodiments, use of the high band **306** is optional. Communications signals may be transmitted on the powerline in both the low band **304** and the high band **306** simultaneously and/or independently.

[0066] In a spectrum **308**, a communications transmission spectrum as may be associated with a telephone line is shown. The spectrum comprises a lower frequency band **310** on which communications of the prior art are transmitted. These communications include voice telephony, ADSL, VDSL, HPNA, and the like. The high band **306**, used in powerline communications, may also be used on the telephone line.

[0067] In spectrums **312**, **322**, and **326**, alternate communication transmission spectra associated with coaxial cable

technologies are shown. These transmission spectra include some frequency bands used for communications in the prior art. A frequency band **314**, for example, is currently associated with DSL standards and DOCSIS. A frequency band **316** is associated with television broadcasts, cable television, and digital television. Frequency band **318** is associated with the MoCA standard and the Satellite L-Band between three hundred ninety megahertz and 1.55 gigahertz.

[0068] In spectrum **312**, the communication signal associated with a home network is transmitted at a higher frequency than the satellite L-band, namely, above 1.55 gigahertz, in a high band **320**. The high band **320** may be associated with a bandwidth of approximately two hundred fifty megahertz. Thus, a service provider can fully exploit the L-band without interference caused by the home network. Further, placing the high band **320** above the other frequencies used by a service provider may reduce the likelihood that content, such as downloaded films or television shows, provided by the service provider may be hacked or otherwise stolen by a homeowner.

[0069] In spectrum **322**, the communication signal associated with the home network is communicated at least partially within the L-band in high band **324**. In some embodiments, the high band **324** ranges from approximately one gigahertz to approximately 1.5 gigahertz. For example, the high band **324** may range from approximately 1.2 gigahertz and 1.45 gigahertz. In various embodiments, the high band **324** may use frequencies not lower than 1.1 gigahertz, 1.2 gigahertz, 1.3 gigahertz, 1.4 gigahertz, 1.5 gigahertz, 1.6 gigahertz, 1.7 gigahertz, 1.8 gigahertz, 1.9 gigahertz and 2.0 gigahertz. Frequency ranges included in some embodiments are described in nonprovisional U.S. patent application Ser. No. 11/536,539 filed Sep. 28, 2006 and entitled "Multi-Wideband Communications over Powerlines." In some embodiments, the signal transmit in frequency band **318** and/or the signal transmit in high band **324** may be encrypted or otherwise protected.

[0070] In spectrum **326**, if frequency band **316** associated with television broadcasts, cable television, and digital television, is not being used, the communication signal associated with the home network is communicated at least partially within frequency band **328**. At least a portion of the frequency band **328** includes frequencies between 50 MHz and 300 MHz.

[0071] The following FIGS. 4-8 and 10-12 depict various embodiments of multi-network interface device **200**. The depicted embodiments support communications via a powerline and a telephone line, and via a powerline and a coaxial cable. It is understood that these embodiments may be modified by those skilled in the art to support communications over any combination of the three mediums. Further, a multi-network interface device **200** may support communications via a telephone line and a coaxial cable, but not a powerline. The embodiments shown may comprise one or more integrated circuit.

[0072] FIG. 4 is a block diagram of a first circuit embodiment of the multi-network interface device **200**. In this embodiment, the multi-network interface device **200** is configured to provide communications interfaces for a powerline and a telephone line. A communication may be received and/or transmitted via the telephone line interface **202** and/or the powerline interface **204**. In some embodiments, the telephone line is passively shared with prior art telephone signals. The multi-network interface device **200** processes a commu-

nications signal received through the telephone line interface **202** and/or powerline interface **204** and provides a resulting output signal via an optional Ethernet interface **210**, and vice-versa. Ethernet interface **210** is optionally coupled to a network apparatus such as a television set, DVD player, media player, personal computer, speaker, stereo, video game console, personal digital assistant, or the like. Alternatively, the multi-network interface device **200** may receive the communications signal from one of the telephone line interface **202** or the powerline interface **204** and transmit the communications signal via the other telephone line interface **202** or the powerline interface **204**. In embodiments configured to communicate on both a powerline and a telephone line, the telephone line may be used to provide redundancy in a mesh or ad-hoc network.

[0073] In one embodiment, a signal is communicated via the telephone line interface **202**. These signals may be communicated in the high band **306**. The signal path from the telephone line interface **202** to the Ethernet interface **210** comprises a surge protector **402**, an inductive coupler **404**, a high pass filter **406**, a network processor **412**, and a host interface controller **414**. The high pass filter **406** may allow only frequencies above approximately thirty megahertz to pass. The surge protector **402**, the inductive coupler **404**, and the high pass filter **406** collectively provide signal communications without significantly impacting services existing on lower frequencies.

[0074] In some embodiments, a signal is communicated via the powerline interface **204**. The signal may be communicated via the low band **304** and/or the high band **306**. The signal path from the powerline interface **204** to the Ethernet interface **210** comprises an inductive coupler **408**, and, depending on the frequency band of the signal, the high pass filter **406** and/or a low pass filter **410**. Like the signal path associated with the telephone line interface **202**, the inductive coupler **408**, the high pass filter **406** and the low pass filter **410** collectively provide signal communications without significantly impacting prior art signals at lower frequencies. In some embodiments, the powerline interface **204** may not be configured to communicate via the high band **306**. In these embodiments, the high pass filter **406** is optional.

[0075] In some embodiments, the network processor **412** and the host interface controller **414** are shared by the signal paths associated with the powerline interface **204** and the telephone line interface **202**. The network processor **412** comprises processing circuitry to remove noise, amplify the signal, and/or convert an analog signal to a digital signal or vice-versa. The network processor **412** may comprise two or more analog front ends (AFE). One of the AFEs is configured to receive and/or transmit a communications signal on the high band **306** and the other of the AFEs is configured to receive and/or transmit a communications signal on the low band **304**. In the embodiment shown, a communication signal received via the high band **306** passes through the high pass filter **406** and a high frequency AFE **416**, and a communication signal received via the low band **304** passes through the low pass filter **410** and a low frequency AFE **418**.

[0076] The network processor **412** may further comprise a line driver, programmable gain amplifier, an analog-to-digital converter, and/or a digital-to-analog converter. Possible configurations of the network processor **412** are described in greater detail in nonprovisional U.S. patent application Ser. No. 11/536,539 filed Sep. 28, 2006 and entitled "Multi-Wideband Communications over Powerlines." Logic within the

network processor may determine whether to transmit a communication signal via a certain communications interface based on a quality of service metric of the communications network or a purpose of the communication signal. The network processor **412** may be compatible with the HomePlug AV standard or other standards associated with powerline communications, telephone line communications, or coaxial cable communications. Network processor **412** is optionally configured to process prior art telephone signals, e.g., if the multi-network interface device **200** is included in a telephone.

[0077] The host interface controller (ICONT) **414** allows for communication of data between the Ethernet interface **210** and the network processor **412**. For example, the ICONT **414** may implement an Ethernet controller as specified by IEEE 802.3. To illustrate, the ICONT **414** includes the Physical and Data Link layers as defined in the seven layer OSI reference model for standardizing computer-to-computer communications. Additionally, ICONT **414** may implement a TCP/IP stack that includes the Network, Transport and Application layers of the OSI reference model. The multi-network interface device **200** may receive power via the powerline interface **204**. ICONT **414** is optionally included within network processor **412**, host interface PCI driver, or the like.

[0078] FIG. 5 is a block diagram of a second embodiment of the multi-network interface device **200**. In this embodiment, the multi-network interface device **200** is configured to communicate a first signal via the low band **304** over a powerline and to communicate a second signal via the high band **306** over a telephone line. The multi-network interface device **200** additionally comprises a second telephone line interface **208**. The second telephone line interface **208** may be used to communicate voice, ADSL, VDSL, or HPNA signals within band **310**.

[0079] To allow communication between the telephone line interface **202** and the second telephone line interface **208**, an optional second inductive coupler **502** may be placed between the surge protector **402** and the inductive coupler **404**. The second inductive coupler **502** is coupled to an optional low pass filter **504** to isolate the signal within the band **310** from other communications signals communicated within the high band **306**. The low pass filter **504** may pass frequencies below approximately thirty megahertz. Another surge protector **402** may be placed between the low pass filter **504** and the second telephone line interface **208**. A user may connect a non-network apparatus such as a telephone, DSL modem, or the like to the second telephone line interface **208**. In alternative embodiments, the first telephone line interface **202** and the second telephone line interface **208** are connected by a direct pass-through connection.

[0080] FIG. 6 is a block diagram of a third embodiment of a multi-network interface device **200**. In this embodiment, the multi-network interface device **200** is configured to communicate a first signal via the low band **304** over a powerline, to communicate a second signal via the high band **306** over the powerline, and optionally to communicate the second signal or a third signal via the high band **306** over a telephone line. The multi-network interface device **200** comprises a second telephone interface **208** from which a fourth signal, in band **310**, may be communicated as discussed in connection with FIG. 5.

[0081] The multi-network interface device **200** comprises a network processor **412** having a single high frequency AFE **416** configured to receive or transmit signals communicated via the high band **306** over both the powerline and the tele-

phone line. The single high frequency AFE **416** optionally includes passive sharing of the powerline and the phone line. As such, the single high frequency AFE **416** can only receive or only transmit one signal at any one time.

[0082] FIG. 7 is a block diagram of a fourth embodiment of the multi-network interface device **200**. The embodiment of multi-network interface device **200** illustrated in FIG. 7 is substantially similar to the multi-network interface device **200** illustrated in FIG. 6 except for a dual high frequency AFE **702**. The dual high frequency AFE **702** includes two separate inputs configured to independently and simultaneously communicate signals in the high band **306** and through both the telephone line interface **202** and the powerline interface **204**.

[0083] FIG. 8 is a block diagram of a fifth embodiment of the multi-network interface device **200**. In this embodiment, the multi-network interface device **200** is configured to communicate between an optional Ethernet interface **210**, a powerline interface **204**, and a coaxial cable interface **206**. The communication may pass between any two or all three of these interfaces. For example, the multi-network interface device **200**, as shown, may communicate over a powerline using the low band **304** and over coaxial cable using either band **320** or band **324**. In other embodiments, the powerline signal path may be configured to support communications over the high band **306**. The multi-network interface device **200** may support communications between the power line interface **204** and the coaxial cable interface **206**. The signal path from the powerline interface to the Ethernet interface **210** is further discussed herein, for example, in connection with FIG. 4.

[0084] The signal path from the coaxial cable interface **206** comprises an inductive coupler **802**, a band pass filter **804**, a receiving signal path, and transmitting signal path, a local oscillator **812**, a low pass filter **814**, the network processor **412**, and the ICONT **414**. From the ICONT **414**, the signal may be communicated to the Ethernet interface **210** and/or the powerline interface **204**. The receiving signal path comprises a low noise amplifier **806**, a band pass filter **808**, and an optional down converter mixer **810**. The transmitting signal path comprises an optional up converter mixer **816**, a band pass filter **818**, and a programmable amplifier **820**. The network processor **412** and the ICONT **414** may be shared with the powerline signal path.

[0085] The coaxial cable may carry signals at frequencies above one gigahertz, as described herein, for example, in connection with FIG. 3. The network processor **412** may be configured to process signals having frequencies within low band **304** and high band **306**. Therefore, these signals may be shifted between the high band **306** and the high band **320** or the high band **324** along the coaxial cable signal path using the up converter mixer **816** or the down converter mixer **810**, respectively. In some embodiments, clock error on the coaxial cable may be communicated over the powerline using the powerline interface **204**. The inductive coupler **802** and the band pass filter **804** collectively enable signal communications without impacting prior art services on lower frequencies.

[0086] The low-noise amplifier **806** may amplify a signal received via the coaxial cable interface **206** based on a control signal received from the network processor **412**. The signal may then pass through an optional second band pass filter **808** before entering the down converter mixer **810**. The down converter mixer **810** is controlled by the local oscillator **812**, which is, in turn, controlled by the network processor **412**.

The down converter mixer **810** is configured, based on the received signal, to generate two lower frequency sidebands. The low pass filter **814** passes one of the two lower frequency sidebands. The passed lower frequency sideband is then processed by the network processor **412**.

[0087] An output signal from the network processor **412** via the coaxial cable interface **206** optionally passes through the low pass filter **814**, the up converter mixer **816**, a band pass filter **818**, and a programmable gain amplifier **820**. The up converter mixer **816** is controlled by the local oscillator **812** and generates two sidebands. The band pass filter **818** isolates one of the sidebands for transmission via the coaxial cable. The isolated sideband may be selected based on the presence or absence of satellite L-band signals on the coaxial cable. The isolated sideband is then amplified by programmable amplifier **820**. The signal passes through the band pass filter **804** and the inductive coupler **802** upon leaving the transmission path.

[0088] FIG. 9 depicts frequency bands associated with the signal used by the fifth integrated circuit embodiment **200** depicted in FIG. 8, according to various embodiments when the signal is communicated via the coaxial cable. Spectra **902**, **904**, and **906** depict frequency characteristics of a signal received by the multi-network interface device **200** along the receiving signal path. Spectra **908**, **910**, and **912** depict frequency characteristics of the signal transmitted by the multi-network interface device **800** along the transmitting signal path. In the embodiment shown, the signals are communicated via the coaxial cable using high band **324**. In other embodiments, the signals may be received and/or transmitted over high band **320**.

[0089] In spectra **902**, a signal within the high band **324** is received by the coaxial cable interface **206**. In the receiving signal path, the down converter mixer **810** generates two sidebands, in the high band **306** and in another band **914**, based on the received signal as depicted in spectra **904**. At least one of these sidebands may be within high band **306** or low band **304**. In spectra **904**, the lower frequency sideband is shown to be within high band **306**. The low pass filter **814** isolates the sideband in high band **306** shown in spectrum **906**, which can be processed by network processor **412**.

[0090] To transmit a signal via the coaxial cable interface **206**, the network processor **412** generates the signal in the high band **306**, as shown in spectrum **908**. The up converter mixer **816** generates two sidebands from the generated signal as shown in spectrum **910**. In the embodiment shown, at least one of these sidebands is within high bands **320** and **324** as described herein, at least, in connection with FIG. 3. Other embodiments may generate sidebands in other frequencies. The sideband, e.g. in band **324**, to be transmitted via the coaxial cable interface **206** is isolated, as shown in spectrum **912**, using the band pass filter **818**. In alternative embodiments, network processor **412** is configured to directly process and/or generate signals in the high band **324** and/or the high band **320**.

[0091] In further embodiments, the multi-network interface device **200** may comprise a communications interface associated with a second media access control address. In these embodiments, the multi-network interface device **200** may comprise a router or switch. The router may access a router table to route communications and/or messages to an appropriate MAC address.

[0092] FIG. 10 is a block diagram of a sixth circuit embodiment of the multi-network interface device **200**, according to

various embodiments. In this embodiment, the multi-network interface device **200** is configured to communicate between an optional host interface **216**, a powerline interface **204**, and a coaxial cable interface **206**. The multi-network interface device may communicate via the powerline and/or the host interface **216** as described herein, at least, in connection with FIG. 4. Further, the coaxial cable interface **206** may communicate signals within the frequency band **328** described herein, at least, in connection with FIG. 3. According to these embodiments, the high pass filter **406** may isolate the signals in frequency band **328** from those present on the coaxial cable in band **314**.

[0093] FIG. 11 is a block diagram of a seventh circuit embodiment of the multi-network interface device **200**, according to various embodiments. In this embodiment, the multi-network interface device **200** is configured to communicate between an optional host interface **216**, a powerline interface **204**, and a coaxial cable interface **206**. The multi-network interface device may communicate via the powerline and/or the host interface **216** as described herein, at least, in connection with FIG. 5. Further, the coaxial cable interface **206** may communicate signals within the frequency band **328** described herein, at least, in connection with FIG. 3. The multi-network interface device **200** additionally comprises a second coaxial cable interface **1102**. The second coaxial line interface **208** may be used to communicate voice, ADSL, VDSL, or HPNA signals within band **314**.

[0094] FIG. 12 is a block diagram of an eighth circuit embodiment of the multi-network interface device **200**, according to various embodiments. In this embodiment, the multi-network interface device **200** is configured to communicate a first signal via the low band **304** over a powerline, to communicate a second signal via the high band **306** over the powerline, and optionally to communicate the second signal or a third signal via the frequency band **328** over a coaxial cable. The multi-network interface device may communicate via the powerline and/or the host interface **216** as described herein, at least, in connection with FIG. 6. Further, the coaxial cable interface **206** may communicate signals within the frequency band **328** described herein, at least, in connection with FIG. 3. The multi-network interface device **200** additionally comprises a second coaxial cable interface **1102**. The second coaxial line interface **208** may be used to communicate voice, ADSL, VDSL, or HPNA signals within band **314**.

[0095] FIG. 13 is a flowchart depicting an exemplary method **1300** for communicating within a network, according to various embodiments. In this method, a multi-network interface device **200** may become known to, and communicate with, other network devices within a communications network. These other network devices may be further instances of multi-network interface device **200** or other network devices known in the art. In some embodiments, the multi-network interface device **200** may act as a repeater in the network and/or otherwise forward messages to the other network devices via the method **1300**.

[0096] In a step **1302**, the multi-network interface device **200** interrogates the communications network by sending and receiving data packets. The powerline interface **204**, telephone line interface **202**, and/or the coaxial cable interface **206** may be used to send and receive these data packets. The interrogation may, in some embodiments, be initiated by network service provider such as a cable provider. The interrogation may be configured to determine, for example, types of network devices connected to the communications network,

MAC addresses associated with these network devices, which mediums and frequency bands may be used to communicate with each of these network devices, possible bandwidths, and/or the like.

[0097] The interrogation may include obtaining one or more quality of service (QoS) metric. These QoS metrics may be associated with specific media and/or specific frequency bands. For example, in some instances multi-network interface device **200** may be able to communicate with another network device through more than one media and/or using more than one frequency band. The QoS metric may be used to determine which media and/or which frequency bands are preferred for communicating with specific network devices.

[0098] In step **1304**, a message is received by the multi-network interface device **200** from another network device or from the Ethernet interface **210**. The message may be received via an Ethernet cable, the powerline, the telephone line, or the coaxial cable. For example, the message may comprise a request for communications, or a video data signal sent from a DVD player to a television.

[0099] In step **1306**, a pathway and associated medium for forwarding the message received in step **1304** to another network device is selected. This selection may be based on a QoS requirement, the type of network device to which the message is to be forwarded to, a communication interface associated with the network device, and/or a bandwidth requirement of the message to be sent. This selection may further use information gathered in step **1302**. For example, bandwidths and QoS metrics determined in step **1302** may be compared with bandwidth and QoS requirements.

[0100] More than one medium is optionally selected in step **1306**. For example, it may be determined that data can be sent via both telephone interface **202** and powerline interface **204** in parallel to achieve a required bandwidth. Alternatively, it may be determined that command and control signals may be sent via powerline interface **204** while high bandwidth video data can be sent via telephone interface **202** and/or a different frequency band of the powerline interface **204**.

[0101] In step **1306**, the multi-network interface device **200** may select a pathway to a destination. This selection may be made, for example, to avoid passage through a junction box or other pathway associated with a low QoS metric. As such, the selected pathway may include transmitting the received message via the telephone line interface **202** or coaxial cable interface **206**, rather than the power line interface **204**.

[0102] In step **1308**, specific frequency bands associated with the media selected in step **1306** are selected for transmitting the message. For example, if the selected media includes a power line coupled to power line interface **204**, then the low band **304** and/or the high band **306** may be selected in step **1308**. If the selected media includes a coaxial cable coupled to the coaxial cable interface **206**, then the frequency bands **320** and/or **324** may be selected. The selection of frequency bands is typically made based on criteria similar to the criteria used to select media in step **1306**. For example, the selection may be made based on comparisons of bandwidth and QoS requirements with metrics determined in step **1302**. More than one frequency band may be selected in step **1308**. In some embodiments, steps **1306** and **1308** are combined into a single step.

[0103] In step **1310**, the message is transmitted via the selected media selected in step **1306** and the frequency bands selected in step **1308**. The transmission may include using an

alternative medium (e.g., the telephone line) and/or shifting the message into another frequency band (e.g., from low band **304** to high band **306**).

[0104] FIG. **14** is a flowchart depicting an exemplary method **1400** for bridging between mediums, according to various embodiments. In some embodiments, bridging between mediums may be performed when there is a section of the network having a low QoS. To bridge mediums, two or more devices communicate the signal across multiple mediums. For example, in some communications networks using a powerline communications network, passing a signal through a junction box to traverse between sections of mains cable is difficult. Therefore, another medium may be used as a bridge between multiple sections of mains cable.

[0105] In step **1402**, a signal is generated. The signal is associated with one or more destinations. In a step **1404**, the signal is transmitted via a first powerline communications network to a first multi-network interface device **200**. The first multi-network interface device **200** may be connected to a first section of mains cable. In step **1406**, the signal is received at the first multi-network interface device **200**.

[0106] In an optional step **1408**, the signal is shifted into another frequency band for transmission via the telephone line or coaxial cable. In a step **1410**, the signal is transmitted from the first multi-network interface device **200** via the telephone line or coaxial cable to a second multi-network interface device **200**. In a step **1412**, the signal is received at the second multi-network interface device **200** via the telephone line or coaxial cable. The second device may be connected to, for example, a second section of mains cable separated from the first section of mains cable by a junction box. In a step **1414**, the signal is transmitted via the second powerline communications network. The signal may be modified in frequency or content by the first or second multi-network interface device **200**.

[0107] Several embodiments are specially illustrated and/or described herein. However, it will be appreciated that modification and variations are covered by the above teachings and within the scope of the appended claims without departing from the spirit and intended scope thereof. For example, the techniques described herein may be used in household, commercial, civic, industrial and/or vehicle power systems. Further, various embodiments may be embodied in firmware, hardware, and/or software (stored on a computer readable media), executable by a processor. These element forms are generally referred to as "logic."

[0108] In some embodiments, one of the communications interfaces included in multi-network interface device **200** may be configured to communicate over a wireless network, such as a WiFi network, and comprise a wireless network antenna. According to various embodiments, the multi-network interface device **200** may include a transformer configured to transform AC power received via the powerline to DC power (e.g., 5V, 12V, or 24V) to power a network apparatus. In these embodiments, the multi-network interface device **200** includes an AC/DC converter. In various embodiments, Ethernet interface **210** may be replaced by another computer interface such as a universal serial bus interface, a parallel port interface, a Peripheral Component Interconnect (PCI) interface, an Accelerated Graphics Port (AGP), a wireless interface, and/or other industry standard data interface.

[0109] Some embodiments of the multi-network interface device **200** include external devices that comprise two interfaces configured to communicate via two types of mediums.

These devices may or may not include a bypass as described herein, at least, in connection with FIG. 5.

[0110] One embodiment comprises interfaces configured to communicate via the powerline on a low band and via a telephone line on a high band to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band and via a telephone line on a high band to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like.

[0111] One embodiment comprises interfaces configured to communicate via the powerline on a low band and via a coaxial cable on a high band to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, and via a coaxial cable on a high band to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like.

[0112] One embodiment comprises interfaces configured to communicate via the powerline on a low band and via a coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, and via coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like.

[0113] Some embodiments of the multi-network interface device 200 include external devices that comprise three interfaces configured to communicate via three types of mediums. These devices may or may not include a bypass as described herein, at least, in connection with FIG. 5.

[0114] One embodiment comprises interfaces configured to communicate via the powerline on a low band, via a telephone line on a high band, and via a coaxial cable on a high band to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, via a telephone line on a high band, and via a coaxial cable on a high band to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, via a telephone line on a high band, and via a coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to one or more host interfaces configured to communicate using Ethernet 10/100/1000, WiFi, UWB, Wireless USB, USB2.0, Firewire, or the like.

[0115] Some embodiments of the multi-network interface device 200 include embedded devices that comprise two interfaces configured to communicate via two types of medi-

ums. These devices may or may not communicate over mediums that also have signals for other services in other frequency bands. Examples of these services include DOCSIS, Cable TV, or the like in a coaxial cable modem and/or DSL, Voice, or the like in a DSL Home Gateway device.

[0116] One embodiment comprises interfaces configured to communicate via the powerline on a low band and via a telephone line on a high band to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, and via a telephone line on a high band to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like.

[0117] One embodiment comprises interfaces configured to communicate via the powerline on a low band and via a coaxial cable on a high band to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, and via a coaxial cable on a high band to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like.

[0118] One embodiment comprises interfaces configured to communicate via the powerline on a low band and via a coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, and via a coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like.

[0119] Some embodiments of the multi-network interface device 200 include embedded devices that comprise three interfaces configured to communicate via three types of mediums. These devices may or may not communicate over mediums that also have signals for other services in other frequency bands. Examples of these services include DOCSIS, Cable TV, or the like in a coaxial cable modem and/or DSL, Voice, or the like in a DSL Home Gateway device.

[0120] One embodiment comprises interfaces configured to communicate via the powerline on a low band, via a telephone line on a high band, and via a coaxial cable on a high band to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, via a telephone line on a high band, and via a coaxial cable on a high band to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like.

[0121] One embodiment comprises interfaces configured to communicate via the powerline on a low band, via a telephone line on a high band, and via a coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like. One embodiment comprises interfaces

configured to communicate via the powerline on a low band, via the powerline on a high band, via a telephone line on a high band, and via a coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to one or more host interfaces such as MII, GMII, PCI, MiniPCI, PCI-X, PCIe, Host Processor Interface, SPI, UART, or the like.

[0122] Some embodiments of the multi-network interface device 200 include external repeater devices that comprise two or three interfaces configured to communicate via two or three types of mediums. These devices may or may not include a bypass as described herein, at least, in connection with FIG. 5.

[0123] One embodiment is configured to repeat signals between the powerline on a low band and the telephone line on a high band. One embodiment is configured to repeat signals between the powerline on a low band, the power line on a high band, and the telephone line on a high band. One embodiment is configured to repeat signals between the powerline on a low band and the coaxial cable on a high band. One embodiment is configured to repeat signals between the powerline on a low band, the power line on a high band, and the coaxial cable on a high band.

[0124] One embodiment is configured to repeat signals between the powerline on a low band and the coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8. One embodiment is configured to repeat signals between the powerline on a low band, the power line on a high band, and the coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8.

[0125] One embodiment is configured to repeat signals between the powerline on a low band, the telephone line on a high band, and the coaxial cable on the high band. One embodiment is configured to repeat signals between the powerline on a low band, the power line on a high band, the telephone line on a high band, and the coaxial cable on the high band.

[0126] One embodiment is configured to repeat signals between the powerline on a low band, the telephone line on a high band, and the coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8. One embodiment is configured to repeat signals between the powerline on a low band, the power line on a high band, the telephone line on a high band, and the coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8.

[0127] Some embodiments of the multi-network interface device 200 comprise two or three network interfaces and a host interface comprising an I2S or Sony/Philips Digital Interconnect Format (SPDIF) compliant interface for transfer of an audio stream.

[0128] One embodiment comprises interfaces configured to communicate via the powerline on a low band and the telephone line on a high band to the host interface. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, and the telephone line on a high band to the host interface. One embodiment comprises interfaces configured to communicate via the powerline on a low band and the coaxial cable on a high band to the host interface. One embodiment comprises interfaces configured to communi-

cate via the powerline on a low band, via the powerline on a high band, and the coaxial cable on a high band to the host interface.

[0129] One embodiment comprises interfaces configured to communicate via the powerline on a low band, and via the coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to the host interface. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, and via the coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to the host interface.

[0130] One embodiment comprises interfaces configured to communicate via the powerline on a low band, the telephone line on a high band to the host interface, and the coaxial cable on the high band. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, via the telephone line on a high band to the host interface, and via the coaxial cable on a high band.

[0131] One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the telephone line on the high band, and via the coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to the host interface. One embodiment comprises interfaces configured to communicate via the powerline on a low band, via the powerline on a high band, via the telephone line on the high band, and via the coaxial cable on a high band using a mixer as described herein, at least, in connection with FIG. 8 to the host interface.

[0132] The embodiments discussed herein are illustrative of the present invention. As these embodiments of the present invention are described with reference to illustrations, various modifications or adaptations of the methods or specific structures described may become apparent to those skilled in the art. All such modifications, adaptations, or variations that rely upon the teachings of the present invention, and through which these teachings have advanced the art, are considered to be within the spirit and scope of the present invention. Hence, these descriptions and drawings should not be considered in a limiting sense, as it is understood that the present invention is in no way limited to only the embodiments illustrated.

What is claimed is:

1. A multi-network interface device, comprising:

communications interfaces coupled to respective communication mediums, the communications interfaces including at least a power line communications interface coupled to a power line communication medium and a non-power line communications interface coupled to a non-power line communication medium; and

a network processor for receiving a communications signal via a first one of the communications interfaces and selecting a second one of the communications interfaces for transmission of the communications signal based on a respective quality of service metric associated with each of the communication mediums.

2. The multi-network interface device of claim 1, wherein the network processor further measures the respective quality of service metric for each of the communication mediums.

3. The multi-network interface device of claim 1, wherein the first one of the communications interfaces is coupled to a first communication medium and the second one of the com-

munications interfaces is coupled to a second communication medium that is different from the first communication medium.

4. The multi-network interface device of claim 1, wherein the network processor further selects a third one of the communications interfaces for transmission of the communications signal such that communications signal is substantially simultaneously transmitted on both the second one of the communications interfaces and the third one of the communications interfaces.

5. The multi-network interface device of claim 4, wherein the second one of the communications interfaces is coupled to a first one of the communication mediums and the third one of the communications interfaces is coupled to a second one of the communication mediums that is the same as the first one of the communication mediums.

6. The multi-network interface device of claim 4, wherein the second one of the communications interfaces is coupled to a first one of the communication mediums and the third one of the medium interfaces is coupled to a second one of the communication mediums that is different from the first one of the communication mediums.

7. The multi-network interface device of claim 1, wherein the non-power line communications interface is configured to communicate via a telephone line or a coaxial cable.

8. The multi-network interface device of claim 1, wherein both the powerline communications interface and the non-power line communications interface are identified by a same media access control address.

9. The multi-network interface device of claim 1, further comprising:

- a host interface coupled to a host communication medium and configured to provide communications between a network apparatus and the multi-network interface device; and

- a host interface controller coupled to the host interface and the network processor and configured to be shared by communications received through the powerline communications interface and the non-power line communications interface.

10. The multi-network interface device of claim 1, wherein the first communications interface comprises one of the power line communications interface and the non-power line communications interface and the second communications interface comprises the other of the power line communications interface and the non-power line communications interface.

11. The multi-network interface device of claim 1, wherein the network processor selects the second communications interface to avoid transmission of the communications signal through a junction box.

12. The multi-network interface device of claim 1, wherein the network processor further selects at least one frequency band associated with the communication medium coupled to the second communications interface for transmission of the communications signal based on the quality of service metric associated therewith.

13. The multi-network interface device of claim 1, further comprising:

- an analog signal separation device coupled to the communication interfaces for isolating communication paths from the communication mediums to an apparatus coupled to the multi-network interface device.

14. The multi-network interface device of claim 1, wherein the network processor further switches to a third one of the communication interfaces during transmission of the communications signal based on the respective quality of service metric associated with each of the communication mediums.

15. The multi-network interface device of claim 1, wherein the quality of service metric associated with each of the communication mediums measures one or more of network latency, network throughput and available bandwidth.

16. A network apparatus comprising:

- a multi-network interface device including communications interfaces coupled to respective communication mediums, the communications interfaces including at least a power line communications interface coupled to a power line communication medium and a non-power line communications interface coupled to a non-power line communication medium;

- a host subsystem including circuitry for operating the network apparatus; and

- a host interface coupling the multi-network interface device and the host subsystem;

wherein the multi-network interface device is further configured to receive a communications signal via a first one of the communications interfaces and select a second one of the communications interfaces for transmission of the communications signal based on a respective quality of service metric associated with each of the communication mediums.

17. The network apparatus of claim 16, wherein the multi-network interface device is further configured to provide the communications signal to the host subsystem via the host interface.

18. The network apparatus of claim 16, wherein the multi-network interface device further measures the respective quality of service metric for each of the communication mediums.

19. The network apparatus of claim 16, wherein the first one of the communications interfaces is coupled to a first communication medium and the second one of the communications interfaces is coupled to a second communication medium that is different from the first communication medium.

20. The network apparatus of claim 16, wherein the multi-network interface device further selects at least one frequency band associated with the communication medium coupled to the second communications interface for transmission of the communications signal based on the quality of service metric associated therewith.

* * * * *