



- (51) International Patent Classification:
D21F 7/00 (2006.01)
- (21) International Application Number:
PCT/US2017/014693
- (22) International Filing Date:
24 January 2017 (24.01.2017)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/288,108 28 January 2016 (28.01.2016) US
- (71) Applicant: **KIMBERLY-CLARK WORLDWIDE, INC.**
[US/US]; 2300 Winchester Road, Neenah, Wisconsin 54956 (US).
- (72) Inventors: **SEYMOUR, Robert, James**; Kimberly-Clark Worldwide, Inc., 2300 Winchester Road, Neenah, Wisconsin 54956 (US). **HASSMAN, Mark, John**; Kimberly-Clark Worldwide, Inc., 2300 Winchester Road, Neenah, Wisconsin 54956 (US). **BESAW, Craig, Steven**;

Kimberly-Clark Worldwide, Inc., 2300 Winchester Road, Neenah, Wisconsin 54956 (US). **RAMAZANI-REND, Reza**; Kimberly-Clark Worldwide, Inc., 2300 Winchester Road, Neenah, Wisconsin 54956 (US). **RUDOLPH, Jason, Michael**; Kimberly-Clark Worldwide, Inc., 2300 Winchester Road, Neenah, Wisconsin 54956 (US). **JENN, Thomas, McLachlan**; Kimberly-Clark Worldwide, Inc., 2300 Winchester Road, Neenah, Wisconsin 54956 (US). **CHAI, Lucia, Yiyi**; 520 Burning Tree Lane, Apt. 312, Naperville, Illinois 60563 (US). **NELSON, Samuel, August**; 1676 Lakeshore Drive, Menasha, Wisconsin 54952 (US).

(74) Agents: **SULLIVAN, Michael J.** et al.; KIMBERLY-CLARK WORLDWIDE, INC., 2300 Winchester Road, Neenah, Wisconsin 54956 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN,

[Continued on next page]

(54) Title: FIBROUS WEB DEWATERING APPARATUS AND METHOD

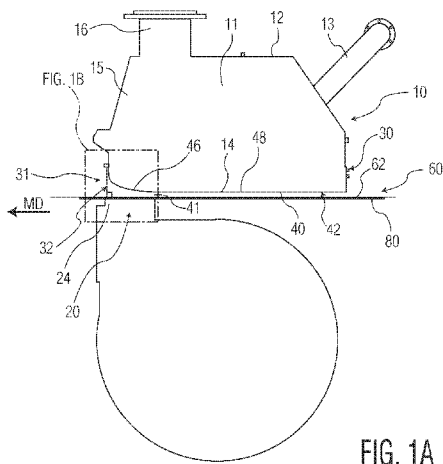


FIG. 1A

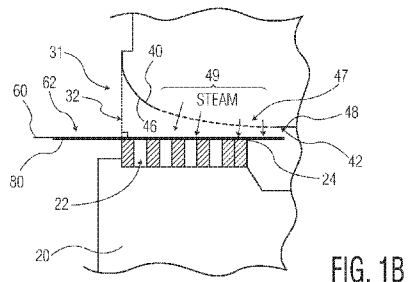


FIG. 1B

(57) Abstract: The present disclosure relates to a vacuum dewatering apparatus comprising a vacuum box disposed opposite of a steam box where the steam box comprises a bottom plate having a substantially linear portion and a curvilinear portion. A plurality of apertures are disposed along at least a portion of the curvilinear portion to permit the transmission of steam. In a preferred embodiment, the curvilinear portion is adjacent to the trailing edge and the linear portion is adjacent to the leading edge of the apertured bottom plate. Further, at least a portion of the apertures are aligned opposite the vacuum box which acts to remove the steam. The vacuum dewatering apparatus of the present invention enables the use of high levels of steam improving vacuum dewatering and improving drying efficiency.

KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

Published:
— *with international search report (Art. 21(3))*

FIBROUS WEB DEWATERING APPARATUS AND METHOD

BACKGROUND OF THE DISCLOSURE

Steam boxes are commonly used in the manufacture of paper products to improve dewatering of fibrous webs at various locations on the paper machine. Steam boxes may be used to improve
5 dewatering by impinging steam onto the fibrous web as it is conveyed through the papermaking process while simultaneously subjecting the web to a vacuum. The increase in temperature caused by the steam reduces the viscosity and surface tension of the water within the web, resulting in more efficient removal by the vacuum.

To facilitate removal of water from the fibrous web the steam box may be installed in the wire
10 section of the paper machine after formation of the fibrous web, in which case the steam box may be used to increase the temperature of the fibrous web to drain the warmed water more easily and thus increase the dry content and improve the drying capacity of the dryer section. By means of steam boxes it is, for instance, possible to increase the capacity of the paper machine.

The use of a conventional steam box with a vacuum dewatering system to improve paper
15 machine capacity however, has its limitations. For example, when the steam flow to individual compartments of a compartmental steam box is reduced below the fixed local volumetric rate of the vacuum system the system will make up flow from adjacent compartments or air outside the hood. The result is reduced moisture uniformity across the fibrous web and a reduced control of dewatering. Another disadvantage of conventional steam boxes is that the amount of steam condensed in the web
20 is largely dependent upon the porosity of the sheet and the capacity of vacuum available. If the steam flow is increased to a point where either of these limitations is exceeded, excess steam will blow out into the machine room. This problem becomes evident when the known compartmented hoods attempt to cope with wet streaks.

Thus there remains a need in the art for an improved steam box design which provides for
25 increased condensation of steam in the web and improved dewatering.

SUMMARY OF THE DISCLOSURE

To overcome the limitations of the prior art the present invention provides a steam box having a curved bottom plate which may be paired with a vacuum dewatering apparatus to partially dewater a fibrous web. More particularly a steam box is provided with a bottom plate facing the web to be
30 dewatered, the plate having a curvilinear portion that provides for improved flow of steam and machine room air. The curvilinear shape provides several advantages, including, decreasing the velocity of the

ambient machine room air along the trailing edge boundary, such air velocity is equal to or less than the steam velocity, reducing turbulence inducing dead zones in the steam addition zone and increasing the amount of steam that is delivered to a web along the steam addition zone. These improvements enable the addition of high amounts of steam per pound of fiber and increase vacuum dewatering efficiency
5 without disrupting the web or the overall web manufacturing process. For example, in certain embodiments the steam box is capable of delivering in excess of 0.5 pounds of steam per pound of fiber and in particularly preferred embodiments in excess of 1.0 pounds of steam per pound of fiber, such as from about 1.0 to about 1.5 pounds of steam per pound of fiber.

Accordingly, one advantage of the present invention is that it enables the addition of steam to
10 the fibrous web at velocities that equal or exceed the velocity of machine room air, as measured along the steam box's trailing edge. For example, in certain embodiments steam velocity may be equal to or greater than the velocity of air along the trailing edge, such as about 1.5 times greater, such as from about 1.5 to about 5.0 times and more preferably from about 2.0 to about 3.0 times greater, than the velocity of machine room air. Without being bound by any particular theory, it is believed that by
15 increasing the velocity of steam relative to machine room air the steam may more uniformly be applied to the web and therefore transfer energy to the water within the web more uniformly as it cools and condenses on the web surface.

Another advantage of the present invention is that the curved bottom plate reduces machine room air turbulence as it is drawn along the plate towards the vacuum dewatering surface in the vacuum
20 zone. Reducing machine room air turbulence in the vacuum zone further improves the uniformity with which steam contacts the web and enables the steam to transfer more energy to the web to facilitate dewatering.

Yet another benefit of the instant invention is that it permits the vacuum apparatus to pull air from the machine room with less turbulence and at lower velocity with fewer eddies which minimizes the
25 amount of air pulled from beneath the web and prevents damage to the web.

Still another benefit of increasing steam velocity relative to air velocity is that it may improve the amount of steam that is captured by the vacuum dewatering apparatus and reduces the amount of steam that is expelled to the machine room.

Thus, in one aspect the present invention provides a vacuum dewatering apparatus comprising
30 a vacuum box having an apertured cover disposed opposite of a steam box, the steam box comprising a bottom plate having a substantially flat portion and a curvilinear portion, at least a portion of the curvilinear portion comprising a plurality of apertures, wherein at least a portion of the apertures are

disposed on the bottom plate opposite at least a portion of the apertures disposed on the vacuum dewatering apparatus cover.

In another aspect the present invention provides a steam box comprising a steam housing in sealed communication with a steam inlet, the steam housing having an apertured bottom plate, the cross-sectional shape of the apertured bottom plate having a curvilinear portion and a linear portion.

In still another aspect the present invention provides a vacuum dewatering apparatus comprising a steam box comprising a steam housing in sealed communication with a steam inlet; the steam housing having an apertured bottom plate, the cross-sectional shape of the apertured bottom plate having a curvilinear portion and a linear portion; a vacuum box having an apertured cover in facing arrangement with the apertured bottom plate; a belt for continuously conveying a fibrous web between the apertured bottom plate and the plurality of vacuum slots.

In yet another aspect the present invention provides a vacuum dewatering apparatus comprising a steam box comprising a steam housing in sealed communication with a steam inlet; the steam housing having an apertured bottom plate, the cross-sectional shape of the apertured bottom plate having a linear portion with plurality of apertures disposed thereon to define a first steam addition zone and a curvilinear portion with a plurality of apertures disposed thereon to define a second steam addition zone; a vacuum box having an apertured cover in facing arrangement with the second steam addition zone; a belt for continuously conveying a fibrous web between the apertured bottom plate and the plurality of vacuum slots.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1A is a schematic view of a dewatering apparatus according to one embodiment of the present invention;

FIG. 1B is a detailed cross-sectional view of a portion of FIG. 1A;

FIG. 2 is a schematic view of steam addition zone according to one embodiment of the present invention; and

FIG. 3 is a perspective view of an apertured bottom plate for a steam box according to one embodiment of the present invention.

DETAILED DESCRIPTION OF THE DISCLOSURE

As is common in the art, the instant vacuum dewatering apparatus comprises a steam box which impinges steam onto a fibrous web, and more particularly a wet fibrous web comprising wood pulp fibers and water, supported on a travelling papermaking belt. The steam heats the water in the web causing

its viscosity and surface tension to be reduced. The heated water, with its reduced viscosity and surface tension, may be removed from the web by a vacuum dewatering apparatus. In this manner, in one particular embodiment, the steam box of the present invention may be paired with a vacuum box to partially dewater a fibrous web being conveyed on a papermaking belt.

5 Generally the steam box of the present invention is useful in the manufacture of fibrous products, and particularly tissue products having basis weights less than about 100 grams per square meter (gsm) and more preferably less than about 70 gsm, such as from about 10 to about 100 gsm and more preferably from about 15 to about 70 gsm. Typically tissue products are manufactured by wet forming a fibrous web and then partially dewatering the web using the modified steam box of the present invention.

10 The modified steam box of the invention is generally used where it is advantageous to apply steam to a fibrous web traveling continuously through a process involving dewatering such as, for example, in forming, pressing, or otherwise treating a fibrous web.

 The steam box is generally arranged such that the apertured bottom plate faces the moving fibrous web, which is supported by a belt and conveyed over a vacuum dewatering apparatus opposite

15 the bottom plate of the steam box. In this manner steam generated by the steam box is transported through the apertures disposed along the bottom plate and onto the web where it heats water in the web which is subsequently removed by the vacuum dewatering apparatus. Thus the apertures may be said to define a steam addition zone, i.e., a region of the bottom plate in which steam is added to the fibrous web by the steam box.

20 The steam box of the present invention has a curvilinear apertured bottom plate extending across a portion of the web's width for delivering steam adjacent to the web. The bottom plate's curvilinear shape reduces the turbulence in the dewatering zone and surprisingly enables delivery of higher volumes of steam to the wet fibrous web, improving vacuum dewatering efficiency without disrupting the web or the overall web manufacturing process. For example, in certain embodiments the

25 steam box is capable of delivering in excess of 0.5 pounds of steam per pound of fiber and in particularly preferred embodiments in excess of 1.0 pounds of steam per pound of fiber, such as from about 1.0 to about 1.5 pounds of steam per pound of fiber.

 The bottom plate's curvilinear shape also reduces the turbulence of machine room air being pulled into the vacuum dewatering zone by the vacuum apparatus enabling the use of higher degrees

30 of vacuum, such as greater than about 18 inches Hg and in particularly preferred embodiments greater than about 20 inches Hg, such as from about 20 to about 25 inches Hg. As a result, the consistency of the fibrous web after the vacuum dewatering zone may be greater than about 25 percent, and more preferably greater than about 30 percent and still more preferably greater than about 35 percent, such

as from about 25 to about 38 percent. For dryer limited operations the improved dewatering increases productivity. Further, product quality, in terms of the uniformity, may also be improved and energy consumption reduced.

5 With reference to FIG. 1, the steam box 10 comprises a hood 15, which is shown as being a box-like structure having enclosing sidewalls 11 and a top 12, a steam inlet 16 and optionally a steam control 13. The steam box 10 may be suspended just above the upper surface 62 of a fibrous web 60 such that the plate 40 faces the upper surface 62 of the web 60. The web 60 is supported by a belt 80 moving the web 60 in the machine direction (MD). The belt 80 slides across an apertured cover 24 of the vacuum box 20 which opposes a portion of the bottom plate 40 and pulls water from web 60 as it is
10 transported across its upper surface. The apertured vacuum cover 24 extends substantially perpendicular to and across the width of the web 60.

The steam housing is preferably separated into a plurality of steam discharge chambers or compartments along its length. By regulating the amount of steam that passes through each compartment, it is possible to control the level of condensate that is applied along the cross-machine
15 direction of the moving web. For example, the amount of steam that enters into the individual chambers can be controlled in response to variations in measured properties of the web along its cross-machine direction (CD). Furthermore, the perimeter(s) of one or more of the compartments that define that steam profiling zone for the steam application can also be modified. This permits control of the steam profile along the cross-machine direction as well. The invention is illustrated in an apparatus with multiple steam
20 discharge chambers or compartments. The partitions or baffle panels that are laterally spaced apart create corresponding profiling zones that are covered by an apertured bottom plate through which steam passes. It is understood however that the invention can be implemented with a steam housing having a single discharge chamber.

For a steam box having an apertured bottom plate of a fixed width, the steam flow rate passing
25 through the steam distributor is determined by several properties of the aperture plate as well as the steam pressure in the steam housing. Thus, in one embodiment, the steam box may comprise a steam distributor capable of delivering controllable steam flow to the web by manipulating the steam pressure in the steam housing. An actuator valve located between the inlet and the steam housing can be used to provide the required steam pressure in the steam housing. The inlet is in sealed communication with
30 a pressurized steam source (not shown) that is generally remote from the paper machine. Increasing the steam pressure inside the housing increases the steam flow passing through the apertured plate and consequently increases the amount of steam received by the moving web.

With further reference to FIG. 1, the bottom surface of the steam box 10 comprises an apertured plate 40 having a bottom surface 42 in facing arrangement with the web's top surface 62. The plate is generally mounted in facing arrangement with a fibrous web traveling along substantially horizontal path that is generally parallel to at least a portion of the plate. Ideally the plate's bottom surface 42 is located as close as practical to the fibrous web 60, supported on travelling belt 80. A clearance of at least about 5 mm, such as from about 5 to about 25 mm and more preferably from about 10 to about 20 mm is typical, as measured between the plate's bottom surface 42 and the web's upper surface 62 along the linear portion 48 of the plate. The hood 15 extends sufficiently in the cross-machine direction of the web 60 to effectively apply steam to the web 60 and in a particularly preferred embodiment across the entire width of the web 60.

While a portion of the plate is parallel to the substantially horizontal path of the web, the plate is not flat, but rather has a curvilinear portion 46 and a linear portion 48. Generally the linear portion 48 is adjacent to the leading edge 30 of the steam box 15, i.e., the portion of the steam box first encountered by the fibrous web as it is transported in the MD, and the curvilinear portion 46 is adjacent to the trailing edge 31 of the steam box 15, i.e., the last portion of the steam box encountered by the fibrous web as it is transported in the MD. Generally the trailing edge 31 of the steam box 15 lies along a tangent line 32 which is substantially perpendicular to the belt 80.

A portion of the apertured bottom plate 40 is generally opposed by a vacuum apparatus, such as a vacuum box 20, which are well known in the art. In certain embodiments the vacuum box is co-extensive with the steam box in the cross-machine direction (CD). The steam box and vacuum box may be positioned anywhere throughout the papermaking process where the web is supported by a belt and preferably after forming and before the web enters the drying section. In a particularly preferred embodiment the steam box and vacuum box are positioned along the forming section of the papermaking machine just after web formation has been stabilized and the moisture content of the web is about 90 percent by weight.

The vacuum box generally refers to a box-like construction creating a vacuum of approximately greater than about 18 inches Hg and in particularly preferred embodiments greater than about 20 inches Hg, such as from about 20 to about 25 inches Hg, between the vacuum box and the belt/web. The purpose of the vacuum is to remove water from the web after it has been heated by the steam emitted from the steam box. The amount of vacuum imparted to the web is controlled to prevent the belt /web from flapping, for example, due to excessive machine room air being drawn in from below the belt, and thus coming into contact with the steam hood. The aim is to guide the web in a controlled manner through the slot formed between the boxes.

The vacuum dewatering box is preferably provided with a cover, such as a ceramic cover, to resist the abrasive wear caused by the passage of the fabric and product over its surface. The cover comprises a plurality of apertures. In one embodiment the apertures comprise a slot extending in the CD across the width of the cover and across the width of the fabric and has been effective in providing even drainage. The slot sizes may range in linear MD width from 1.0 to about 2.0 cm and preferably the cover comprises a plurality of slots, such as from about 2 to about 6 slots where the total MD width of the slots is from about 2.0 to about 12.0 cm. In other embodiments the slots may have a herringbone, zigzag or intermittent pattern. In still other embodiments the apertures may comprise holes and more preferably linear rows of rectilinear holes that extends the CD.

The steam box bottom plate 40 comprises a plurality of apertures 47 which generally define a steam addition zone 49 for providing steam (illustrated using arrows in the detail view of FIG. 1B) across at least a portion of the web 60 width. Preferably at least a portion of the steam addition zone 49 is disposed along the curvilinear section 46. Without wishing to be bound by any particularly theory, it is believed that by positioning the steam addition zone at least partially along the curvilinear portion the velocity of steam in the area beneath the steam addition zone may equal or exceed that of ambient machine room air. For example, in a particularly preferred embodiment, the steam addition zone is disposed entirely along the curvilinear portion and extends along at least about 80 percent of the curvilinear zone and the steam velocity is equal to or greater than the machine room air velocity as measured along the trailing edge boundary (defined by the tangent line 32). In a particularly preferred embodiment the steam velocity is from about 1.5 to about 5 times greater than the ambient machine room air along the trailing edge boundary, such as from about 2 to about 4 time times greater. By maintaining steam velocities equal to or greater than machine room air velocities, the rate of discharge of steam from the bottom of the hood may be increased to greater than about 1.0 pound of steam per pound of fiber and more preferably greater than about 1.5 pounds of steam per pound of fiber.

In addition to the curvilinear portion 46 the bottom plate also has a linear portion 48. Generally the linear portion 48 is adjacent to the steam box's leading edge 30, which may generally be defined as the edge of the bottom plate 40 under which the web 60 first traverses as it is conveyed in the machine direction. Conversely the curvilinear portion 46 is generally adjacent to the steam box's trailing edge 31, may generally be defined as the edge of the bottom plate 40 opposite of the leading edge 30 and is the final edge of the steam box the web 60 passes as it is conveyed in the machine direction. Like the curvilinear portion, the linear portion may also include apertures. In this manner the linear portion may comprise a plurality of apertures defining a first steam addition zone and the curvilinear portion may comprise a plurality of apertures defining a second steam addition zone. Preferably the first and the

second steam addition zones are spaced apart from one another some distance such as at least about 20 cm, and more preferably at least about 25 cm. In a particularly preferred embodiment the first steam addition zone is not opposed by a vacuum apparatus while the second steam addition zone is at least partially opposed by a vacuum apparatus. In this manner the first steam addition zone merely impinges steam onto the surface of the web as it is conveyed below it and the second steam addition zone impinges steam onto the web which is subsequently drawn through the web by the vacuum apparatus.

With reference now to FIG. 3, the bottom plate 40 has a curvilinear portion 46 comprising a plurality of apertures 47. The plurality of apertures may consist of multiple holes, slots, or slits. Additionally, the holes, slots, and/or slits, can be continuous, discontinuous, collinear, and/or collectively elongate in the MD, CD, and/or any angle relative to the CD. The total open area of the aperture(s) is preferably selected to provide the required steam flow without disrupting the sheet. The size of the apertures should be sufficiently small to minimize disruption of the web. For example, while the cross-sectional area of the apertures is illustrated as being circular the area can be rectangular or other polygonal shape. In the case where the cross-sectional area is circular, its diameter typically ranges from 1.0 to about 8.0 mm and preferably from 2.0 to about 6.0 mm and still more preferably from about 3.0 to about 5.0 mm. Regardless of the geometry, the cross-sectional area of each aperture typically ranges from about 0.8 to about 50 mm² and more preferably from 7.0 to about 20 mm².

The apertures may be arranged along the bottom plate in both the machine and cross-machine directions. In a particularly preferred embodiment the apertures extend along the entire width of the bottom plate in the cross-machine direction and across at least a portion of the bottom plate in the machine direction along the curvilinear portion. In other embodiments the apertures maybe be disposed along the entire length of the curvilinear portion in the MD, such as from the leading edge 44 to its trailing edge 45. In other embodiments the apertures maybe be disposed along only a portion of the curvilinear portion's length in the MD, such as illustrated in FIG. 3. Regardless of whether the apertures extend across the curvilinear portion in its MD or CD, at least about 50 percent of the curvilinear portion's surface area is apertured and more preferably at least about 60 percent, such as from about 50 to about 90 percent and more preferably from about 60 to about 85 percent. In a particularly preferred embodiment the apertures are disposed in a regular, continuous pattern across the curvilinear portion with the apertures being equally spaced from one another.

In another embodiment the linear portion of the bottom plate may also comprise apertures. Generally the linear steam zone is disposed entirely along the linear portion of the bottom plate and does not extend along the curvilinear portion. In this manner the steam addition zone disposed along the curvilinear portion and the steam addition zone disposed along the linear portion are spaced apart from

one another some distance. The apertures disposed along the linear portion may be the same as or may be different than those disposed along the curvilinear portion. For example, in one embodiment the apertures disposed along the linear portion are circular and have a diameter from about 4.0 to about 6.0 mm and the apertures disposed along the curvilinear portion are circular and have a diameter from about 3.0 to about 5.0 mm. In this manner two steam addition zones may be provided, the first provided along the linear portion and the second provided along the curvilinear portion, and the relative amount of steam and its velocity may be varied between the two zones. Further, as noted previously, in a particularly preferred embodiment the steam addition zone disposed along the linear portion is generally not opposed to a vacuum apparatus in operation, while the steam addition zone disposed along the curvilinear portion is at least partially opposed to a vacuum apparatus.

The relative orientation of the steam addition zone of the curvilinear portion and the vacuum apparatus will now be discussed further with reference to FIG. 2. As illustrated in FIG. 2, the steam box comprises at least one steam addition zone 49 disposed at least partially along the curvilinear portion 46 of the bottom plate 40 (hereinafter referred to as the curved steam addition zone). The curved steam addition zone 49 has a leading edge 41 where steam from the steam hood first contacts the fibrous web 60 as it is conveyed in the machine direction and a trailing edge 43, generally defined by the tangent line 32 lying substantially perpendicular to the belt 80, where steam is finally added to the fibrous web 60 as it departs the curved steam addition zone 49. Similarly the vacuum dewatering apertures 22 are arranged so as to define a leading vacuum edge 51 and a trailing vacuum edge 53.

In certain embodiments the leading vacuum edge 51 may proceed the leading edge 41 of the curved steam addition zone 49 and the trailing edge of the vacuum 53 may be after the trailing edge 43 of the curved steam addition zone 49. While the curved steam addition zone is illustrated as lying entirely within the vacuum dewatering zone, the invention is not so limited. For example, in one embodiment the dewatering slots and steam addition zone may be coextensive with one another. In another embodiment the leading or trailing edge of the steam addition zone may extend beyond the dewatering slots. Additionally, in a particularly preferred embodiment the trailing edge 43 of the steam addition zone 49 is spaced from about 5.0 to about 10 cm, and more preferably from about 7.0 to about 9.0 cm from the trailing edge 53 of the vacuum dewatering zone.

With further reference to FIG. 2, the curvilinear portion 46 is shaped such that the distance (H1) between the fibrous web's upper surface 62 and the plate's bottom surface 42 at the leading edge 51 of the steam addition zone 49 is less than the distance (H2) between the fibrous web's upper surface 62 and the plate's bottom surface 42 at the trailing edge 53 of the steam addition zone 49. Generally H2 is measured along the tangent line 32 between the point 34 and where the line intersects the plate's bottom

surface 42 and the fibrous web's upper surface 62. In one embodiment the distance H2 is at least about three times greater than H1, such as from about three to about five times greater. Although the actual height between the bottom surface of the plate and the upper surface of the web may vary depending on manufacturing conditions such as web consistency, web speed and steam addition amounts, in one
5 embodiment H1 is from about 10 to about 30 mm, and more preferably from about 10 to about 15 mm and H2 is from about 30 to about 100 mm, and more preferably from about 50 to about 80 mm.

As noted previously, it is generally preferred that the web travels a substantially horizontal path as it traverses below the steam box and that the variation in height between the web's top surface and the bottom plate is a result of the curved cross-sectional shape of the bottom plate rather than the web
10 traveling along a curved path. The curvilinear portion 46 generally has a cross-sectional shape with a continuously increasing angular relation to the linear portion 48, from its leading edge 44 to its trailing edge 45. A variety of cross-sectional shapes having continuously increasing angles are contemplated. For example the curvilinear portion may be circular, elliptical or parabolic. One skilled in the art will appreciate that the curvilinear portion may comprise a plurality of discrete linear segments arranged so
15 as to have an overall curvilinear shape. Where the curvilinear portion comprises a plurality of discrete linear segments the relative angle of any given segment generally is greater than the preceding segment.

In a particularly preferred embodiment the cross-sectional shape of the curvilinear portion is elliptical and more preferably an ellipse having a major axis that is at least about two times the minor axis, such as from about two to about six times and more preferably from about two to about four times.
20 For example, in one embodiment the elliptically shaped bottom plate may have a major axis from about 100 to about 300 mm, more preferably from about 125 to about 200 mm and still more preferably from about 150 to about 175 mm and a minor axis from about 50 to about 150 mm.

By providing the bottom plate of the steam box with a curvilinear portion and disposing at least a portion of the steam addition zone along the curvilinear portion the present invention increases the
25 uniformity of steam addition to the fibrous web and water removal therefrom. The basic approach requires providing high velocity steam, relative to the velocity of the machine room air, in contact with the travelling fibrous web as it passes over a vacuum dewatering apparatus, such as a vacuum dewatering box. The vacuum box opposite the hood draws the steam into the sheet and extracts a portion of its water load. As the steam contacts the web it condenses giving up its heat of condensation
30 which increases the temperature of the water content of the web, thereby improving the dewatering rate.

Further, while not wishing to be bound by any particular theory, in certain embodiments by providing the bottom plate with a curvilinear portion the velocity of the steam, at a point along the trailing edge of the steam box, may be equal to or greater than the velocity of air being drawn in by the vacuum

along the same boundary. In this manner, dead zones in the area between the steam box and vacuum dewatering apertures, referred to herein as the dewatering zone, may be reduced or eliminated. Another benefit of the steam velocity equaling or exceeding the velocity of the ambient machine room air along the trailing edge is that there may be a more even distribution of steam on the web along the dewatering zone.

While various steam boxes and web dewatering apparatuses have been described in detail with respect to the specific embodiments thereof, it will be appreciated that those skilled in the art, upon attaining an understanding of the foregoing, may readily conceive of alterations to, variations of, and equivalents to these embodiments. Accordingly, the scope of the present invention should be assessed as that of the appended claims and any equivalents thereto and the foregoing embodiments.

In a first embodiment the present invention provides a steam box comprising a steam housing in sealed communication with a steam inlet the steam housing having an apertured bottom plate, the cross-sectional shape of the apertured bottom plate having a curvilinear portion and a linear portion.

In a second embodiment the present invention provides the steam box of the first embodiment wherein the apertured bottom plate has a leading edge and a trailing edge and wherein the curvilinear portion is adjacent to the trailing edge and the linear portion is adjacent to the leading edge.

In a third embodiment the present invention provides the steam box of the first or the second embodiments wherein the curvilinear portion has an elliptical cross-sectional shape with a major axis and a minor axis where the major axis is at least about two times greater than the minor axis.

In a fourth embodiment the present invention provides the steam box of any one of the first through the third embodiments wherein the bottom plate apertures are disposed at least partially along the curvilinear portion.

In a fifth embodiment the present invention provides the steam box of any one of the first through the fourth embodiments wherein the bottom plate apertures are disposed entirely along the curvilinear portion.

In a sixth embodiment the present invention provides the steam box of any one of the first through the fifth embodiments wherein a first plurality of apertures are disposed along the curvilinear portion to define a first steam addition zone and a second plurality of apertures are disposed along the linear portion to define a second steam addition zone and wherein the first and the second steam addition zones are spaced apart from one another.

In a seventh embodiment the present invention provides the steam box of any one of the first through the sixth embodiments wherein apertures have a circular cross-section.

In an eighth embodiment the present invention provides the steam box of any one of the first through the seventh embodiments wherein at least about 60 percent of the surface area of the curvilinear portion is apertured.

WHAT IS CLAIMED IS:

1. A steam box comprising a steam housing in sealed communication with a steam inlet, the steam housing having an apertured bottom plate, the cross-sectional shape of the apertured bottom plate having a curvilinear portion and a linear portion.
- 5 2. The steam box of claim 1 wherein the apertured bottom plate has a leading edge and a trailing edge and wherein the curvilinear portion is adjacent to the trailing edge and the linear portion is adjacent to the leading edge.
3. The steam box of claim 1 wherein the curvilinear portion has an elliptical cross-sectional shape with a major axis and a minor axis where the major axis is at least about two times greater than
10 the minor axis.
4. The steam box of claim 1 wherein the bottom plate apertures are disposed at least partially along the curvilinear portion.
5. The steam box of claim 1 wherein the bottom plate apertures are disposed entirely along the curvilinear portion.
- 15 6. A steam box comprising a steam housing in sealed communication with a steam inlet the steam housing having a bottom plate with a linear portion comprising a plurality of apertures defining a first steam addition zone and a curvilinear portion comprising a plurality of apertures defining a second steam addition zone, wherein the first and second steam addition zones are spaced apart from one another.
- 20 7. The steam box of claim 6 wherein the bottom plate has a leading edge and a trailing edge and wherein the curvilinear portion is adjacent to the trailing edge and the linear portion is adjacent to the leading edge.
8. The steam box of claim 6 wherein the curvilinear portion has an elliptical cross-sectional shape with a major axis and a minor axis where the major axis is at least about two times greater than
25 the minor axis.
9. The steam box of claim 6 wherein the bottom plate apertures have a circular cross-section.
10. The steam box of claim 6 wherein the apertures defining the first steam addition zone are circular and have a diameter from about 3 to about 5 mm and the apertures defining the second steam addition zone are circular and have a diameter from about 4 to about 6 mm.

11. The steam box of claim 6 wherein at least about 60 percent of the surface area of the curvilinear portion is apertured.
12. A dewatering apparatus comprising:
- a. a steam box comprising a steam housing in sealed communication with a steam inlet, the steam housing a having an apertured bottom plate, the cross-sectional shape of the apertured bottom plate having a curvilinear portion and a linear portion;
 - b. a vacuum box comprising a cover having a plurality of apertures in facing arrangement with the apertured bottom plate;
 - c. a belt for continuously conveying a fibrous web between the apertured bottom plate and the plurality of vacuum slots.
13. The dewatering apparatus of claim 12 wherein the bottom plate comprises a plurality of apertures defining a steam addition zone having a leading edge and a trailing edge, and the plurality of vacuum cover apertures define a vacuum dewatering zone having a leading edge and a trailing edge, and wherein the leading edge of the vacuum dewatering zone precedes the leading edge of the steam addition zone.
14. The vacuum dewatering apparatus of claim 12 wherein the bottom plate comprises a plurality of apertures defining a steam addition zone having a leading edge and a trailing edge, the plurality of vacuum cover apertures define a vacuum dewatering zone having a leading edge and a trailing edge, and wherein the steam addition zone and the vacuum dewatering zones are coextensive with one another.
15. The vacuum dewatering apparatus of claim 12 wherein the bottom plate comprises a plurality of apertures defining a steam addition zone having a leading edge and a trailing edge, the plurality of vacuum cover apertures define a vacuum dewatering zone having a leading edge and a trailing edge, and wherein the trailing edge of the vacuum dewatering zone precedes the trailing edge of the steam addition zone.
16. The steam box of claim 12 wherein the curvilinear portion has an elliptical cross-sectional shape with a major axis and a minor axis where the major axis is at least about two times greater than the minor axis.
17. The vacuum dewatering apparatus of claim 12 wherein the curvilinear portion is convex and the bottom plate apertures are disposed at least partially along the curvilinear portion.

18. The vacuum dewatering apparatus of claim 12 wherein a first plurality of apertures are disposed along the linear portion to define a first steam addition zone and a second plurality of apertures are disposed along the curvilinear portion to define a second steam addition zone.
19. The vacuum dewatering apparatus of claim 18 wherein the vacuum box opposes the second
5 steam addition zone.
20. The vacuum dewatering apparatus of claim 18 wherein the first steam addition zone is not opposed by a vacuum box.

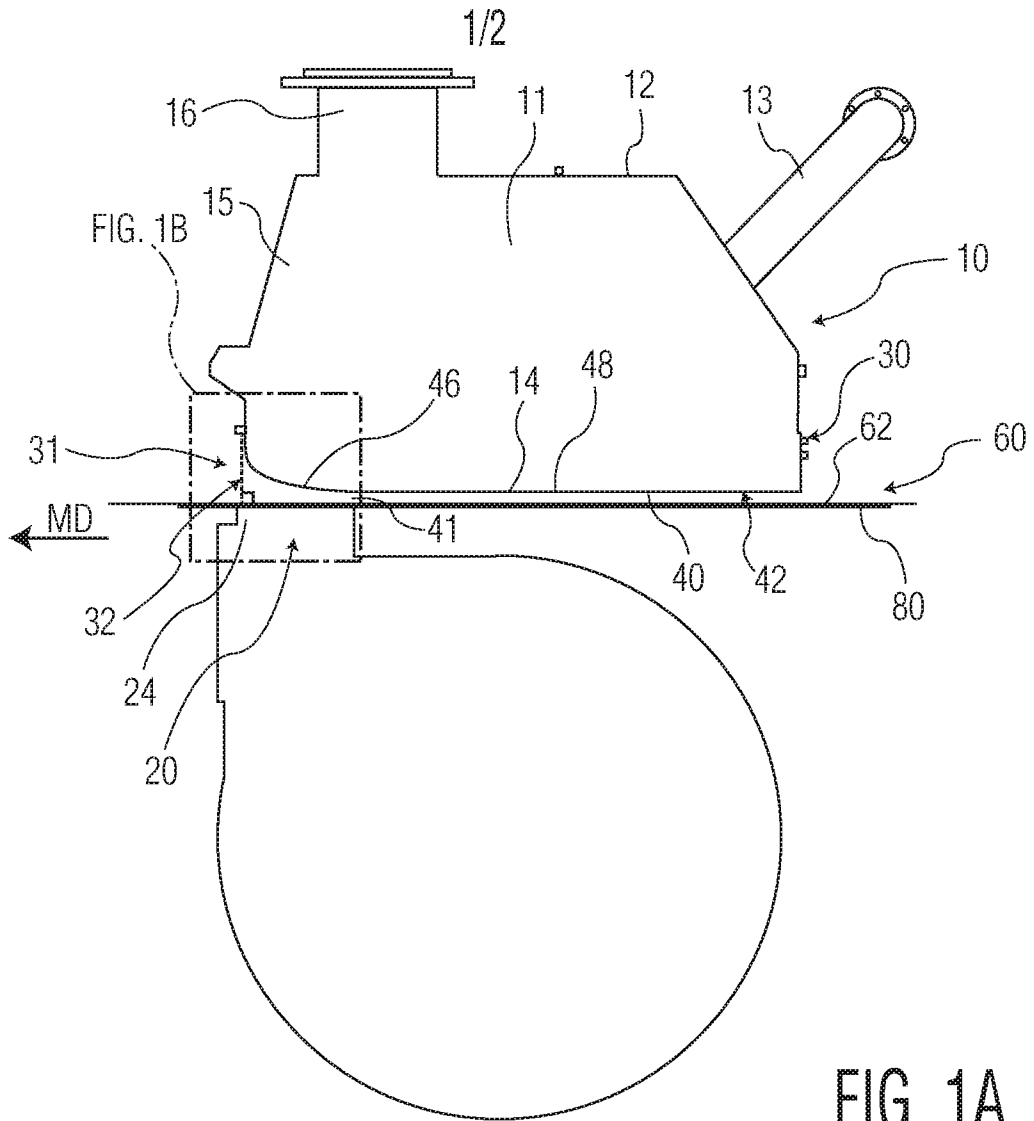


FIG. 1A

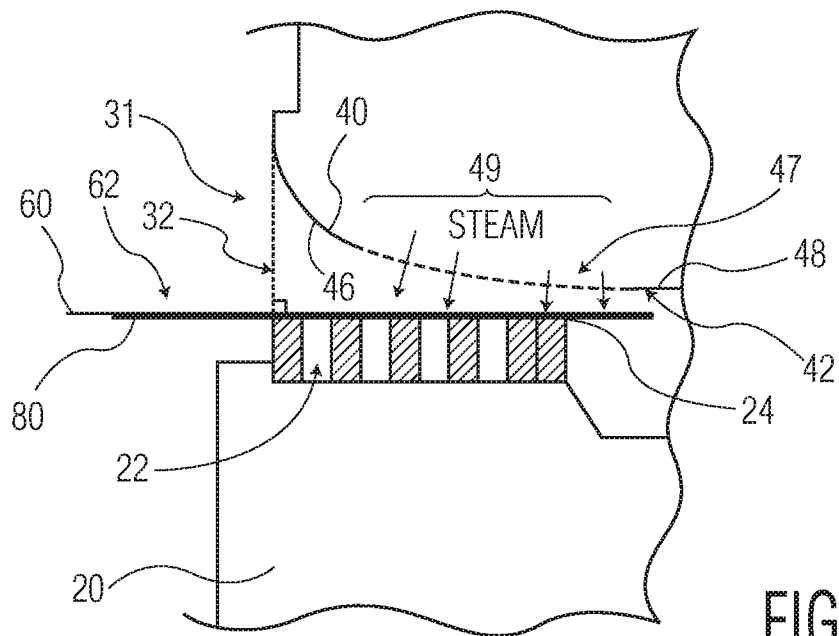


FIG. 1B

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2017/014693

A. CLASSIFICATION OF SUBJECT MATTER

D21F 7/00 (2006.01)

According to International Patent Classification (IPC)

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

D21F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC/WPI/TXTE: dewater, dry, steam, curvilinear, linear, vacuum, aperture and like terms

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2013/072560 A1 (METSO PAPER, INC.) 23 May 2013 figures 2a-2c, 4a-4b; page 10, line 6 – page 12, line 1	1-20
X	US 3945570 A (DOVE N. F.) 23 March 1976 figures 1-2; column 1, lines 8-20; column 2, line 62 – column 3, line 57	1, 3-6, 8-20
X	WO 2006/132977 A2 (THE PROCTER & GAMBLE COMPANY) 14 December 2006 figure 2; page 6, line 15 – page 7, line 17; page 10, lines 28-30	1, 3-6, 8-20
X	US 4268976 A (DOVE N. F.) 26 May 1981 figures 3-5; column 2, lines 40 – column 3, line 35	1-11
X	US 6264795 B1 (HAMEL R. G.) 24 July 2001 figure 2; column 3, lines 36-57	1, 3-6, 8-11
X	US 6408534 B1 (ALEN J-P ET AL.) 25 June 2002 figures 1-2; column 2, lines 37-58	1, 3-6, 8-11

Further documents are listed in the continuation of Box C.

See patent family annex.

*Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

05/04/2017

(day/month/year)

Date of mailing of the international search report

18/04/2017

(day/month/year)

Name and mailing address of the ISA/SG

IPOS Intellectual Property Office of Singapore
51 Bras Basah Road
#01-01 Manulife Centre
Singapore 189554

Email: pct@ipos.gov.sg

Authorized officer

Du Ning (Dr)

IPOS Customer Service Tel. No.: (+65) 6339 8616

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2017/014693

Note: This Annex lists known patent family members relating to the patent documents cited in this International Search Report. This Authority is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2013/072560 (A1)	23/05/2013	AT 14236 (U1) CN 204023293 (U) DE 212012000210 (U1) FI 20116150 (A)	15/6/2015 17/12/2014 26/06/2014 18/05/2013
US 3945570 (A)	23/03/1976	NONE	
WO 2006/132977 (A2)	14/12/2006	BRPI 0611637 (A2) CA 2611617 (A1) EP 1899531 (A2) MX 2007015491 (A) US 2006/0283038 (A1)	28/09/2010 14/12/2006 19/03/2008 22/02/2008 21/12/2006
US 4268976 (A)	26/05/1981	NONE	
US 6264795 (B1)	24/07/2001	NONE	
US 6408534 (B1)	25/06/2002	CA 2317277 (A1) EP 1081278 (A2) FI 4283 (U1)	06/03/2001 07/03/2001 31/12/1999