



(51) International Patent Classification:
H04N 19/105 (2014.01)

(21) International Application Number:
PCT/CN2020/070115

(22) International Filing Date:
02 January 2020 (02.01.2020)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/CN2019/070058
02 January 2019 (02.01.2019) CN
PCT/CN2019/071507
13 January 2019 (13.01.2019) CN
PCT/CN2019/071576
14 January 2019 (14.01.2019) CN

(71) Applicants: **BEIJING BYTEDANCE NETWORK TECHNOLOGY CO., LTD.** [CN/CN]; Room B-0035, 2/F, No. 3 Building, No. 30, Shixing Road, Shijingshan District, Beijing 100041 (CN). **BYTEDANCE INC.** [US/US];

12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US).

(72) Inventors: **ZHANG, Kai**; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US). **ZHANG, Li**; 12655 West Jefferson Boulevard, Sixth Floor, Suite No. 137, Los Angeles, California 90066 (US). **LIU, Hongbin**; Jinritoutiao Post Office, China Satellite Communications Tower, No. 63, Zhichun Road, Haidian District, Beijing 100080 (CN). **WANG, Yue**; Jinritoutiao Post Office, China Satellite Communications Tower, No. 63, Zhichun Road, Haidian District, Beijing 100080 (CN).

(74) Agent: **LIU, SHEN & ASSOCIATES**; 10th Floor, Building 1, 10 Caihefang Road, Haidian District, Beijing 100080 (CN).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,

(54) Title: USAGE OF INTERWEAVED PREDICTION

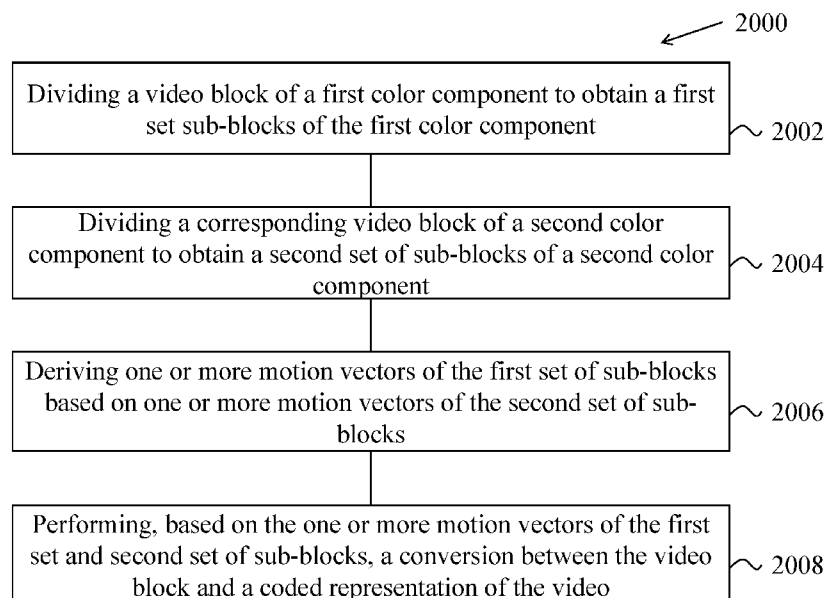


FIG. 20

(57) Abstract: A method for video processing is provided to comprise: dividing, for a conversion between a current video block of a video and a bitstream representation of the video, the current video block into partitions according to multiple dividing patterns according to a height (H) or a width (W) of the current video block; and performing the conversion using an interweaved prediction of the multiple partitions.

MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

USAGE OF INTERWEAVED PREDICTION

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] Under the applicable patent law and/or rules pursuant to the Paris Convention, this application is made to timely claim the priority to and benefits of International Patent Application No. PCT/CN2019/070058, filed on January 2, 2019, International Patent Application No. PCT/CN2019/071507, filed on January 13, 2019 and International Patent Application No. PCT/CN2019/071576, filed on January 14, 2019. For all purposes under the U.S. law, the entire disclosures of the aforementioned applications are incorporated by reference as part of the disclosure of this application.

TECHNICAL FIELD

[0002] This patent document relates to video coding techniques, devices and systems.

BACKGROUND

[0003] Motion compensation (MC) is a technique in video processing to predict a frame in a video, given the previous and/or future frames by accounting for motion of the camera and/or objects in the video. Motion compensation can be used in the encoding of video data for video compression.

SUMMARY

[0004] This document discloses methods, systems, and devices related to sub-block based motion prediction in video motion compensation.

[0005] In one representative aspect, a method for video processing is disclosed. The method includes deriving one or more motion vectors for a first set of sub-blocks belonging to a first dividing pattern of a current video block of a video; and performing, based on the one or more motion vectors, a conversion between the current video block and a coded representation of the video.

[0006] In another representative aspect, a method for video processing is disclosed. The method includes dividing a video block of a first color component to obtain a first set sub-blocks of the first color component; dividing a corresponding video block of a second color component to obtain a second set of sub-blocks of a second color component; deriving one or more motion vectors of the first set of sub-blocks based on one or more motion vectors of the second set of sub-

blocks; and performing, based on the one or more motion vectors of the first set and second set of sub-blocks, a conversion between the video block and a coded representation of the video.

[0007] In another representative aspect, a method for video processing is disclosed. The method includes dividing, for a conversion between a current video block of a video and a bitstream representation of the video, the current video block into partitions according to multiple dividing patterns according to a height (H) or a width (W) of the current video block; and performing the conversion using an interweaved prediction of the multiple partitions.

[0008] In another representative aspect, a method for video processing is disclosed. The method includes determining to apply a prediction for a current video block of a video, the prediction including dividing the current video block into sub-blocks according to a dividing pattern; determining to apply a bit-shifting to generate a prediction block on the sub-blocks of the current video block; and performing a conversion between the current video block and a coded representation of the video.

[0009] In another representative aspect, a method for video processing is disclosed. The method includes determining, based on a characteristic of a current video block of a video, whether to use an interweaved prediction tool for a conversion between the current block and a coded representation of the video; and performing the conversion according to the determining, wherein, upon the determining that the characteristic of the current video block fails to meet a condition, the conversion is performed by disabling a use of an affine prediction tool and/or the interweaved prediction tool.

[0010] In another representative aspect, a method for video processing is disclosed. The method includes determining, based on a characteristic of a current video block of a video, whether to use an interweaved prediction tool for a conversion between the current block and a coded representation of the video; and performing the conversion according to the determining, and wherein, upon the determining that the characteristic of the current video block meets a condition, the conversion is performed by using an affine prediction tool and/or the interweaved prediction tool.

[0011] In another representative aspect, a method for video processing is disclosed. The method includes determining that interweaved prediction is to be applied for a current video block of a video; disabling bi-prediction for the current video block based on the determination that

interweaved prediction is to be applied; and performing a conversion between the current video block and a coded representation of the video.

[0012] In another representative aspect, a method for video processing is disclosed. The method includes: determining, for a conversion between a current video block of a video and a coded representation of the video, a refined motion information for the current video block; and performing the conversion using the refined motion information, wherein the refined motion information is generated based on an interweaved prediction tool in which motion information of partitions of the current video block that are generated using multiple patterns, and wherein the refined motion information of the current video block is used for a subsequent processing or selectively stored based on whether a condition is satisfied.

[0013] In another representative aspect, a method for video processing is disclosed. The method includes: determining whether an interweaved prediction is applied to a current video block of a video; determining to use a filter process to the current video block based on a determination whether the interweaved prediction is applied to the current video block; and performing a conversion between the current video block and a coded representation of the video based on the determining on a use of the filter process.

[0014] In another representative aspect, a method for video processing is disclosed. The method includes: determining whether an interweaved prediction is applied to a current video block of a video; determining whether to use a local illumination compensation or a weighted prediction to the current video block based on a determination of a use of the interweaved prediction; and performing a conversion between the current video block and a coded representation of the video based on the determining on a use of the local illumination compensation or the weighted prediction.

[0015] In another representative aspect, a method for video processing is disclosed. The method includes: determining that weighted prediction is applied to a current video block of a video or a sub-block of the current video block; and performing a conversion between the current video block and a coded representation of the video by disabling a bi-directional optical flow (BDOF) technique.

[0016] In another representative aspect, an apparatus comprising a processor and a non-transitory memory with instructions thereon is disclosed. The instructions, upon execution by

the processor, cause the processor to select a set of pixels from a video frame to form a block, partition the block into a first set of sub-blocks according to a first pattern, generate a first intermediate prediction block based on the first set of sub-blocks, partition the block into a second set of sub-blocks according to a second pattern, wherein at least one sub-block in the second set has a different size than a sub-block in the first set, generate a second intermediate prediction block based on the second set of sub-blocks, and determine a prediction block based on the first intermediate prediction block and the second intermediate prediction block.

[0017] In yet another representative aspect, a method for video processing includes deriving one or more motion vectors for a first set of sub-blocks of a current video block, wherein each of the first set of sub-blocks has a first dividing pattern, and reconstructing, based on the one or more motion vectors, the current video block.

[0018] In yet another representative aspect, the various techniques described herein may be embodied as a computer program product stored on a non-transitory computer readable media. The computer program product includes program code for carrying out the methods described herein.

[0019] In yet another representative aspect, a video decoder apparatus may implement a method as described herein.

[0020] The details of one or more implementations are set forth in the accompanying attachments, the drawings, and the description below. Other features will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] FIG. 1 is a schematic diagram showing an example of sub-block based prediction.

[0022] FIG. 2 shows an example of an affine motion field of a block described by two control point motion vectors.

[0023] FIG. 3 shows an example of affine motion vector field per sub-block for a block.

[0024] FIG. 4 shows an example of motion vector prediction for a block 400 in the AF_INTER mode.

[0025] FIG. 5A shows an example of the selection order of candidate blocks for a current Coding Unit (CU).

- [0026] FIG. 5B shows another example of candidate blocks for a current CU in the AF_MERGE mode.
- [0027] FIG. 6 shows an example of Alternative Temporal Motion Vector Prediction (ATMVP) motion prediction process for a CU.
- [0028] FIG. 7 shows an example of one CU with four sub-blocks and neighboring blocks.
- [0029] FIG. 8 shows an example optical flow trajectory in the Bi-directional Optical flow (BIO) method.
- [0030] FIG. 9A shows an example of access positions outside of a block.
- [0031] FIG. 9B shows that a padding area can be used to avoid extra memory access and calculation.
- [0032] FIG. 10 shows an example of bilateral matching used in the Frame-Rate Up Conversion (FRUC) method.
- [0033] FIG. 11 shows an example of template matching used in the FRUC method.
- [0034] FIG. 12 shows an example of unilateral Motion Estimation (ME) in the FRUC method.
- [0035] FIG. 13 shows an example of interweaved prediction with two dividing patterns in accordance with the disclosed technology.
- [0036] FIG. 14A shows an example dividing pattern in which a block is divided into 4×4 sub-blocks in accordance with the disclosed technology.
- [0037] FIG. 14B shows an example dividing pattern in which a block is divided into 8×8 sub-blocks in accordance with the disclosed technology.
- [0038] FIG. 14C shows an example dividing pattern in which a block is divided into 4×8 sub-blocks in accordance with the disclosed technology.
- [0039] FIG. 14D shows an example dividing pattern in which a block is divided into 8×4 sub-blocks in accordance with the disclosed technology.
- [0040] FIG. 14E shows an example dividing pattern in which a block is divided into non-uniform sub-blocks in accordance with the disclosed technology.
- [0041] FIG. 14F shows another example dividing pattern in which a block is divided into non-uniform sub-blocks in accordance with the disclosed technology.
- [0042] FIG. 14G shows yet another example dividing pattern in which a block is divided into

non-uniform sub-blocks in accordance with the disclosed technology.

[0043] FIGS. 15A–15D show example embodiments of a partial interleaved prediction.

[0044] FIGS. 16A–16C show example embodiments of deriving MVs for one dividing pattern from another dividing pattern.

[0045] FIGS. 17A–17C show example embodiments of choosing dividing patterns based on dimensions of a current video block.

[0046] FIGS. 18A and 18B show example embodiments of deriving MVs of sub-blocks in one component within a dividing pattern from MVs of sub-block in another component within another dividing pattern.

[0047] FIG. 19 is an example flowchart of a method for video processing based on some implementations of the disclosed technology.

[0048] FIG. 20 is an example flowchart of a method for video processing based on some other implementations of the disclosed technology.

[0049] FIGS. 21A to 21D are example flowcharts of methods for video processing based on some other implementations of the disclosed technology.

[0050] FIGS. 22A to 22D are example flowcharts of methods for video processing based on some other implementations of the disclosed technology.

[0051] FIGS. 23 and 24 are block diagrams of examples of hardware platforms for implementing video processing methods described in the disclosed technology.

DETAILED DESCRIPTION

[0052] Global motion compensation is one of variations of motion compensation techniques and can be used for predicting camera's motion. However, moving objects within a frame are not sufficiently represented by various implementations of the global motion compensation. Local motion estimation, such as block motion compensation, in which the frames are partitioned in blocks of pixels for performing the motion prediction, can be used to account for the objects moving within the frames.

[0053] Sub-block based prediction, which was developed based on the block motion compensation, was first introduced into the video coding standard by High Efficiency Video Coding (HEVC) Annex I (3D-HEVC). FIG. 1 is a schematic diagram showing an example of

sub-block based prediction. With sub-block based prediction, a block 100, such as a Coding Unit (CU) or a Prediction Unit (PU), is divided into several non-overlapped sub-blocks 101. Different sub-blocks may be assigned different motion information, such as reference index or Motion Vector (MV). Motion compensation is then performed individually for each sub-block.

[0054] To explore the future video coding technologies beyond HEVC, Joint Video Exploration Team (JVET) was founded jointly by the Video Coding Expert Group (VCEG) and the Moving Picture Expert Group (MPEG) in 2015. Many methods have been adopted by JVET and added into the reference software named Joint Exploration Model (JEM). In JEM, sub-block based prediction is adopted in several coding techniques, such as affine prediction, Alternative temporal motion vector prediction (ATMVP), spatial-temporal motion vector prediction (STMVP), Bi-directional Optical flow (BIO), and Frame-Rate Up Conversion (FRUC), which are discussed in detail below.

[0055] Affine Prediction

[0056] In HEVC, only translation motion model is applied for motion compensation prediction (MCP). However, the camera and objects may have many kinds of motion, e.g. zoom in/out, rotation, perspective motions, and/or other irregular motions. JEM, on the other hand, applies a simplified affine transform motion compensation prediction. FIG. 2 shows an example of an affine motion field of a block 200 described by two control point motion vectors V_0 and V_1 . The motion vector field (MVF) of the block 200 can be described by the following equation:

$$\begin{cases} v_x = \frac{(v_{1x} - v_{0x})}{w}x - \frac{(v_{1y} - v_{0y})}{w}y + v_{0x} \\ v_y = \frac{(v_{1y} - v_{0y})}{w}x + \frac{(v_{1x} - v_{0x})}{w}y + v_{0y} \end{cases} \quad \text{Eq. (1)}$$

[0058] As shown in FIG. 2, (v_{0x}, v_{0y}) is motion vector of the top-left corner control point, and (v_{1x}, v_{1y}) is motion vector of the top-right corner control point. To simplify the motion compensation prediction, sub-block based affine transform prediction can be applied. The sub-block size $M \times N$ is derived as follows:

$$\begin{cases} M = \text{clip3}(4, w, \frac{w \times MvPre}{\max(\text{abs}(v_{1x} - v_{0x}), \text{abs}(v_{1y} - v_{0y}))}) \\ N = \text{clip3}(4, h, \frac{h \times MvPre}{\max(\text{abs}(v_{2x} - v_{0x}), \text{abs}(v_{2y} - v_{0y}))}) \end{cases} \quad \text{Eq. (2)}$$

[0060] Here, $MvPre$ is the motion vector fraction accuracy (e.g., 1/16 in JEM). (v_{2x}, v_{2y}) is

motion vector of the bottom-left control point, calculated according to Eq. (1). M and N can be adjusted downward if necessary to make it a divisor of w and h, respectively.

[0061] FIG. 3 shows an example of affine MVF per sub-block for a block 300. To derive motion vector of each M×N sub-block, the motion vector of the center sample of each sub-block can be calculated according to Eq. (1), and rounded to the motion vector fraction accuracy (e.g., 1/16 in JEM). Then the motion compensation interpolation filters can be applied to generate the prediction of each sub-block with derived motion vector. After the MCP, the high accuracy motion vector of each sub-block is rounded and saved as the same accuracy as the normal motion vector.

[0062] In the JEM, there are two affine motion modes: AF_INTER mode and AF_MERGE mode. For CUs with both width and height larger than 8, AF_INTER mode can be applied. An affine flag in CU level is signaled in the bitstream to indicate whether AF_INTER mode is used. In the AF_INTER mode, a candidate list with motion vector pair $\{(v_0, v_1) | v_0 = \{v_A, v_B, v_C\}, v_1 = \{v_D, v_E\}\}$ is constructed using the neighboring blocks. FIG. 4 shows an example of motion vector prediction (MVP) for a block 400 in the AF_INTER mode. As shown in FIG. 4, v_0 is selected from the motion vectors of the sub-block A, B, or C. The motion vectors from the neighboring blocks can be scaled according to the reference list. The motion vectors can also be scaled according to the relationship among the Picture Order Count (POC) of the reference for the neighboring block, the POC of the reference for the current CU, and the POC of the current CU. The approach to select v_1 from the neighboring sub-block D and E is similar. If the number of candidate list is smaller than 2, the list is padded by the motion vector pair composed by duplicating each of the AMVP candidates. When the candidate list is larger than 2, the candidates can be firstly sorted according to the neighboring motion vectors (e.g., based on the similarity of the two motion vectors in a pair candidate). In some implementations, the first two candidates are kept. In some embodiments, a Rate Distortion (RD) cost check is used to determine which motion vector pair candidate is selected as the control point motion vector prediction (CPMVP) of the current CU. An index indicating the position of the CPMVP in the candidate list can be signaled in the bitstream. After the CPMVP of the current affine CU is determined, affine motion estimation is applied and the control point motion vector (CPMV) is

found. Then the difference of the CPMV and the CPMVP is signaled in the bitstream.

[0063] When a CU is applied in AF_MERGE mode, it gets the first block coded with an affine mode from the valid neighboring reconstructed blocks. FIG. 5A shows an example of the selection order of candidate blocks for a current CU 500. As shown in FIG. 5A, the selection order can be from left (501), above (502), above right (503), left bottom (504) to above left (505) of the current CU 500. FIG. 5B shows another example of candidate blocks for a current CU 500 in the AF_MERGE mode. If the neighboring left bottom block 501 is coded in affine mode, as shown in FIG. 5B, the motion vectors v_2 , v_3 and v_4 of the top left corner, above right corner, and left bottom corner of the CU containing the sub-block 501 are derived. The motion vector v_0 of the top left corner on the current CU 500 is calculated based on v_2 , v_3 and v_4 . The motion vector v_1 of the above right of the current CU can be calculated accordingly.

[0064] After the CPMV of the current CU v_0 and v_1 are computed according to the affine motion model in Eq. (1), the MVF of the current CU can be generated. In order to identify whether the current CU is coded with AF_MERGE mode, an affine flag can be signaled in the bitstream when there is at least one neighboring block is coded in affine mode.

[0065] Alternative Temporal Motion Vector Prediction (ATMVP)

[0066] In the ATMVP method, the temporal motion vector prediction (TMVP) method is modified by fetching multiple sets of motion information (including motion vectors and reference indices) from blocks smaller than the current CU.

[0067] FIG. 6 shows an example of ATMVP motion prediction process for a CU 600. The ATMVP method predicts the motion vectors of the sub-CUs 601 within a CU 600 in two steps. The first step is to identify the corresponding block 651 in a reference picture 650 with a temporal vector. The reference picture 650 is also referred to as the motion source picture. The second step is to split the current CU 600 into sub-CUs 601 and obtain the motion vectors as well as the reference indices of each sub-CU from the block corresponding to each sub-CU.

[0068] In the first step, a reference picture 650 and the corresponding block is determined by the motion information of the spatial neighboring blocks of the current CU 600. To avoid the repetitive scanning process of neighboring blocks, the first merge candidate in the merge candidate list of the current CU 600 is used. The first available motion vector as well as its associated reference index are set to be the temporal vector and the index to the motion source

picture. This way, the corresponding block may be more accurately identified, compared with TMVP, wherein the corresponding block (sometimes called collocated block) is always in a bottom-right or center position relative to the current CU.

[0069] In the second step, a corresponding block of the sub-CU 651 is identified by the temporal vector in the motion source picture 650, by adding to the coordinate of the current CU the temporal vector. For each sub-CU, the motion information of its corresponding block (e.g., the smallest motion grid that covers the center sample) is used to derive the motion information for the sub-CU. After the motion information of a corresponding $N \times N$ block is identified, it is converted to the motion vectors and reference indices of the current sub-CU, in the same way as TMVP of HEVC, wherein motion scaling and other procedures apply. For example, the decoder checks whether the low-delay condition (e.g. the POCs of all reference pictures of the current picture are smaller than the POC of the current picture) is fulfilled and possibly uses motion vector MV_x (e.g., the motion vector corresponding to reference picture list X) to predict motion vector MV_y (e.g., with X being equal to 0 or 1 and Y being equal to $1-X$) for each sub-CU.

[0070] Spatial Temporal Motion Vector Prediction (STMVP)

[0071] In the STMVP method, the motion vectors of the sub-CUs are derived recursively, following raster scan order. FIG. 7 shows an example of one CU with four sub-blocks and neighboring blocks. Consider an 8×8 CU 700 that includes four 4×4 sub-CUs A (701), B (702), C (703), and D (704). The neighboring 4×4 blocks in the current frame are labelled as a (711), b (712), c (713), and d (714).

[0072] The motion derivation for sub-CU A starts by identifying its two spatial neighbors. The first neighbor is the $N \times N$ block above sub-CU A 701 (block c 713). If this block c (713) is not available or is intra coded the other $N \times N$ blocks above sub-CU A (701) are checked (from left to right, starting at block c 713). The second neighbor is a block to the left of the sub-CU A 701 (block b 712). If block b (712) is not available or is intra coded other blocks to the left of sub-CU A 701 are checked (from top to bottom, starting at block b 712). The motion information obtained from the neighboring blocks for each list is scaled to the first reference frame for a given list. Next, temporal motion vector predictor (TMVP) of sub-block A 701 is derived by following the same procedure of TMVP derivation as specified in HEVC. The motion information of the collocated block at block D 704 is fetched and scaled accordingly. Finally,

after retrieving and scaling the motion information, all available motion vectors are averaged separately for each reference list. The averaged motion vector is assigned as the motion vector of the current sub-CU.

[0073] Bi-directional Optical flow (BIO)

[0074] The Bi-directional Optical flow (BIO) method is sample-wise motion refinement performed on top of block-wise motion compensation for bi-prediction. In some implementations, the sample-level motion refinement does not use signaling.

[0075] Let $I^{(k)}$ be the luma value from reference k ($k=0, 1$) after block motion compensation, and $\partial I^{(k)}/\partial x$, $\partial I^{(k)}/\partial y$ are horizontal and vertical components of the $I^{(k)}$ gradient, respectively. Assuming the optical flow is valid, the motion vector field (v_x, v_y) is given by:

$$\text{[0076]} \quad \partial I^{(k)}/\partial t + v_x \partial I^{(k)}/\partial x + v_y \partial I^{(k)}/\partial y = 0. \quad \text{Eq. (3)}$$

[0077] Combining this optical flow equation with Hermite interpolation for the motion trajectory of each sample results in a unique third-order polynomial that matches both the function values $I^{(k)}$ and derivatives $\partial I^{(k)}/\partial x$, $\partial I^{(k)}/\partial y$ at the ends. The value of this polynomial at $t=0$ is the BIO prediction:

$$\text{[0078]} \quad pred_{BIO} = 1/2 \cdot (I^{(0)} + I^{(1)} + v_x/2 \cdot (\tau_1 \partial I^{(1)}/\partial x - \tau_0 \partial I^{(0)}/\partial x) + v_y/2 \cdot (\tau_1 \partial I^{(1)}/\partial y - \tau_0 \partial I^{(0)}/\partial y)). \quad \text{Eq. (4)}$$

[0079] FIG. 8 shows an example optical flow trajectory in the Bi-directional Optical flow (BIO) method. Here, τ_0 and τ_1 denote the distances to the reference frames. Distances τ_0 and τ_1 are calculated based on POC for Ref₀ and Ref₁: $\tau_0 = \text{POC}(\text{current}) - \text{POC}(\text{Ref}_0)$, $\tau_1 = \text{POC}(\text{Ref}_1) - \text{POC}(\text{current})$. If both predictions come from the same time direction (either both from the past or both from the future) then the signs are different (e.g., $\tau_0 \cdot \tau_1 < 0$). In this case, BIO is applied if the prediction is not from the same time moment (e.g., $\tau_0 \neq \tau_1$). Both referenced regions have non-zero motion (e.g., $MVx_0, MVy_0, MVx_1, MVy_1 \neq 0$) and the block motion vectors are proportional to the time distance (e.g., $MVx_0/MVx_1 = MVy_0/MVy_1 = -\tau_0/\tau_1$).

[0080] The motion vector field (v_x, v_y) is determined by minimizing the difference Δ between values in points A and B. FIGS. 9A-9B show an example of intersection of motion trajectory and reference frame planes. Model uses only first linear term of a local Taylor

expansion for Δ :

$$[0081] \quad \Delta = (I^{(0)} - I^{(1)})_0 + v_x (\tau_1 \partial I^{(1)} / \partial x + \tau_0 \partial I^{(0)} / \partial x) + v_y (\tau_1 \partial I^{(1)} / \partial y + \tau_0 \partial I^{(0)} / \partial y) \quad \text{Eq. (5)}$$

[0082] All values in the above equation depend on the sample location, denoted as (i', j') .

Assuming the motion is consistent in the local surrounding area, Δ can be minimized inside the $(2M+1) \times (2M+1)$ square window Ω centered on the currently predicted point (i, j) , where M is equal to 2:

$$[0083] \quad (v_x, v_y) = \underset{v_x, v_y}{\operatorname{argmin}} \sum_{[i', j'] \in \Omega} \Delta^2[i', j'] \quad \text{Eq. (6)}$$

[0084] For this optimization problem, the JEM uses a simplified approach making first a minimization in the vertical direction and then in the horizontal direction. This results in the following:

$$[0085] \quad v_x = (s_1 + r) > m? \operatorname{clip3} \left(-thBIO, thBIO, -\frac{s_3}{(s_1 + r)} \right) : 0 \quad \text{Eq. (7)}$$

$$[0086] \quad v_y = (s_5 + r) > m? \operatorname{clip3} \left(-thBIO, thBIO, -\frac{s_6 - v_x s_2 / 2}{(s_5 + r)} \right) : 0 \quad \text{Eq. (8)}$$

[0087] where,

$$[0088] \quad \begin{aligned} s_1 &= \sum_{[i', j'] \in \Omega} (\tau_1 \partial I^{(1)} / \partial x + \tau_0 \partial I^{(0)} / \partial x)^2; s_3 = \sum_{[i', j'] \in \Omega} (I^{(1)} - I^{(0)}) (\tau_1 \partial I^{(1)} / \partial x + \tau_0 \partial I^{(0)} / \partial x); \\ s_2 &= \sum_{[i', j'] \in \Omega} (\tau_1 \partial I^{(1)} / \partial x + \tau_0 \partial I^{(0)} / \partial x) (\tau_1 \partial I^{(1)} / \partial y + \tau_0 \partial I^{(0)} / \partial y); \\ s_5 &= \sum_{[i', j'] \in \Omega} (\tau_1 \partial I^{(1)} / \partial y + \tau_0 \partial I^{(0)} / \partial y)^2; s_6 = \sum_{[i', j'] \in \Omega} (I^{(1)} - I^{(0)}) (\tau_1 \partial I^{(1)} / \partial y + \tau_0 \partial I^{(0)} / \partial y) \end{aligned} \quad \text{Eq. (9)}$$

[0089] In order to avoid division by zero or a very small value, regularization parameters r and m can be introduced in Eq. (7) and Eq. (8).

$$[0090] \quad r = 500 \cdot 4^{d-8} \quad \text{Eq. (10)}$$

$$[0091] \quad m = 700 \cdot 4^{d-8} \quad \text{Eq. (11)}$$

[0092] Here, d is bit depth of the video samples.

[0093] In order to keep the memory access for BIO the same as for regular bi-predictive motion compensation, all prediction and gradients values, $I^{(k)}$, $\partial I^{(k)} / \partial x$, $\partial I^{(k)} / \partial y$, are calculated for positions inside the current block. FIG. 9A shows an example of access positions outside of a block 900. As shown in FIG. 9A, in Eq. (9), $(2M+1) \times (2M+1)$ square window Ω centered in currently predicted point on a boundary of predicted block needs to accesses

positions outside of the block. In the JEM, values of $I^{(k)}$, $\partial I^{(k)}/\partial x$, $\partial I^{(k)}/\partial y$ outside of the block are set to be equal to the nearest available value inside the block. For example, this can be implemented as a padding area 901, as shown in FIG. 9B.

[0094] With BIO, it is possible that the motion field can be refined for each sample. To reduce the computational complexity, a block-based design of BIO is used in the JEM. The motion refinement can be calculated based on a 4x4 block. In the block-based BIO, the values of s_n in Eq. (9) of all samples in a 4x4 block can be aggregated, and then the aggregated values of s_n are used to derived BIO motion vectors offset for the 4x4 block. More specifically, the following formula can used for block-based BIO derivation:

$$\begin{aligned}
 s_{1,b_k} &= \sum_{(x,y) \in b_k} \sum_{[i',j'] \in \Omega(x,y)} (\tau_1 \partial I^{(1)}/\partial x + \tau_0 \partial I^{(0)}/\partial x)^2; s_{3,b_k} = \sum_{(x,y) \in b_k} \sum_{[i',j'] \in \Omega} (I^{(1)} - I^{(0)}) (\tau_1 \partial I^{(1)}/\partial x + \tau_0 \partial I^{(0)}/\partial x), \\
 s_{2,b_k} &= \sum_{(x,y) \in b_k} \sum_{[i',j'] \in \Omega} (\tau_1 \partial I^{(1)}/\partial x + \tau_0 \partial I^{(0)}/\partial x) (\tau_1 \partial I^{(1)}/\partial y + \tau_0 \partial I^{(0)}/\partial y), \\
 s_{5,b_k} &= \sum_{(x,y) \in b_k} \sum_{[i',j'] \in \Omega} (\tau_1 \partial I^{(1)}/\partial y + \tau_0 \partial I^{(0)}/\partial y)^2; s_{6,b_k} = \sum_{(x,y) \in b_k} \sum_{[i',j'] \in \Omega} (I^{(1)} - I^{(0)}) (\tau_1 \partial I^{(1)}/\partial y + \tau_0 \partial I^{(0)}/\partial y)
 \end{aligned}
 \tag{12}$$

[0096] Here, b_k denotes the set of samples belonging to the k-th 4x4 block of the predicted block. s_n in Eq (7) and Eq (8) are replaced by $((s_{n,b_k}) \gg 4)$ to derive the associated motion vector offsets.

[0097] In some scenarios, MV regiment of BIO may be unreliable due to noise or irregular motion. Therefore, in BIO, the magnitude of MV regiment is clipped to a threshold value. The threshold value is determined based on whether the reference pictures of the current picture are all from one direction. For example, if all the reference pictures of the current picture are from one direction, the value of the threshold is set to $12 \times 2^{14-d}$; otherwise, it is set to $12 \times 2^{13-d}$.

[0098] Gradients for BIO can be calculated at the same time with motion compensation interpolation using operations consistent with HEVC motion compensation process (e.g., 2D separable Finite Impulse Response (FIR)). In some embodiments, the input for the 2D separable FIR is the same reference frame sample as for motion compensation process and fractional position $(fracX, fracY)$ according to the fractional part of block motion vector. For horizontal gradient $\partial I/\partial x$, a signal is first interpolated vertically using *BIOfilterS* corresponding to the fractional position $fracY$ with de-scaling shift $d-8$. Gradient filter *BIOfilterG* is then applied in horizontal direction corresponding to the fractional position $fracX$ with de-scaling shift by $18-d$. For vertical gradient $\partial I/\partial y$, a gradient filter is applied vertically using *BIOfilterG* corresponding

to the fractional position $fracY$ with de-scaling shift $d-8$. The signal displacement is then performed using $BIOfilterS$ in horizontal direction corresponding to the fractional position $fracX$ with de-scaling shift by $18-d$. The length of interpolation filter for gradients calculation $BIOfilterG$ and signal displacement $BIOfilterF$ can be shorter (e.g., 6-tap) in order to maintain reasonable complexity. Table 1 shows example filters that can be used for gradients calculation of different fractional positions of block motion vector in BIO. Table 2 shows example interpolation filters that can be used for prediction signal generation in BIO.

Table 1: Example filters for gradient calculation in BIO

Fractional pel position	Interpolation filter for gradient($BIOfilterG$)
0	{ 8, -39, -3, 46, -17, 5 }
1/16	{ 8, -32, -13, 50, -18, 5 }
1/8	{ 7, -27, -20, 54, -19, 5 }
3/16	{ 6, -21, -29, 57, -18, 5 }
1/4	{ 4, -17, -36, 60, -15, 4 }
5/16	{ 3, -9, -44, 61, -15, 4 }
3/8	{ 1, -4, -48, 61, -13, 3 }
7/16	{ 0, 1, -54, 60, -9, 2 }
1/2	{ -1, 4, -57, 57, -4, 1 }

Table 2: Example interpolation filters for prediction signal generation in BIO

Fractional pel position	Interpolation filter for prediction signal($BIOfilterS$)
0	{ 0, 0, 64, 0, 0, 0 }
1/16	{ 1, -3, 64, 4, -2, 0 }
1/8	{ 1, -6, 62, 9, -3, 1 }
3/16	{ 2, -8, 60, 14, -5, 1 }
1/4	{ 2, -9, 57, 19, -7, 2 }
5/16	{ 3, -10, 53, 24, -8, 2 }
3/8	{ 3, -11, 50, 29, -9, 2 }
7/16	{ 3, -11, 44, 35, -10, 3 }
1/2	{ 3, -10, 35, 44, -11, 3 }

[0099] In the JEM, BIO can be applied to all bi-predicted blocks when the two predictions

are from different reference pictures. When Local Illumination Compensation (LIC) is enabled for a CU, BIO can be disabled.

[00100] In some embodiments, OBMC is applied for a block after normal MC process. To reduce the computational complexity, BIO may not be applied during the OBMC process. This means that BIO is applied in the MC process for a block when using its own MV and is not applied in the MC process when the MV of a neighboring block is used during the OBMC process.

[00101] Frame-Rate Up Conversion (FRUC)

[00102] A FRUC flag can be signaled for a CU when its merge flag is true. When the FRUC flag is false, a merge index can be signaled and the regular merge mode is used. When the FRUC flag is true, an additional FRUC mode flag can be signaled to indicate which method (e.g., bilateral matching or template matching) is to be used to derive motion information for the block.

[00103] At encoder side, the decision on whether using FRUC merge mode for a CU is based on RD cost selection as done for normal merge candidate. For example, multiple matching modes (e.g., bilateral matching and template matching) are checked for a CU by using RD cost selection. The one leading to the minimal cost is further compared to other CU modes. If a FRUC matching mode is the most efficient one, FRUC flag is set to true for the CU and the related matching mode is used.

[00104] Typically, motion derivation process in FRUC merge mode has two steps: a CU-level motion search is first performed, then followed by a Sub-CU level motion refinement. At CU level, an initial motion vector is derived for the whole CU based on bilateral matching or template matching. First, a list of MV candidates is generated and the candidate that leads to the minimum matching cost is selected as the starting point for further CU level refinement. Then a local search based on bilateral matching or template matching around the starting point is performed. The MV results in the minimum matching cost is taken as the MV for the whole CU. Subsequently, the motion information is further refined at sub-CU level with the derived CU motion vectors as the starting points.

[00105] For example, the following derivation process is performed for a $W \times H$ CU motion information derivation. At the first stage, MV for the whole $W \times H$ CU is derived. At the

second stage, the CU is further split into $M \times M$ sub-CUs. The value of M is calculated as in (16), D is a predefined splitting depth which is set to 3 by default in the JEM. Then the MV for each sub-CU is derived.

$$[00106] \quad M = \max\{4, \min\left\{\frac{M}{2^D}, \frac{N}{2^D}\right\}\} \quad \text{Eq. (13)}$$

[00107] FIG. 10 shows an example of bilateral matching used in the Frame-Rate Up Conversion (FRUC) method. The bilateral matching is used to derive motion information of the current CU by finding the closest match between two blocks along the motion trajectory of the current CU (1000) in two different reference pictures (1010, 1011). Under the assumption of continuous motion trajectory, the motion vectors MV0 (1001) and MV1 (1002) pointing to the two reference blocks are proportional to the temporal distances, e.g., TD0 (1003) and TD1 (1004), between the current picture and the two reference pictures. In some embodiments, when the current picture 1000 is temporally between the two reference pictures (1010, 1011) and the temporal distance from the current picture to the two reference pictures is the same, the bilateral matching becomes mirror based bi-directional MV.

[00108] FIG. 11 shows an example of template matching used in the FRUC method. Template matching can be used to derive motion information of the current CU 1100 by finding the closest match between a template (e.g., top and/or left neighboring blocks of the current CU) in the current picture and a block (e.g., same size to the template) in a reference picture 1110. Except the aforementioned FRUC merge mode, the template matching can also be applied to AMVP mode. In both JEM and HEVC, AMVP has two candidates. With the template matching method, a new candidate can be derived. If the newly derived candidate by template matching is different to the first existing AMVP candidate, it is inserted at the very beginning of the AMVP candidate list and then the list size is set to two (e.g., by removing the second existing AMVP candidate). When applied to AMVP mode, only CU level search is applied.

[00109] The MV candidate set at CU level can include the following: (1) original AMVP candidates if the current CU is in AMVP mode, (2) all merge candidates, (3) several MVs in the interpolated MV field (described later), and top and left neighboring motion vectors.

[00110] When using bilateral matching, each valid MV of a merge candidate can be used as an input to generate a MV pair with the assumption of bilateral matching. For example, one valid MV of a merge candidate is (MV_a, ref_a) at reference list A. Then the reference picture ref_b

of its paired bilateral MV is found in the other reference list B so that ref_a and ref_b are temporally at different sides of the current picture. If such a ref_b is not available in reference list B, ref_b is determined as a reference which is different from ref_a and its temporal distance to the current picture is the minimal one in list B. After ref_b is determined, MV_b is derived by scaling MV_a based on the temporal distance between the current picture and ref_a , ref_b .

[00111] In some implementations, four MVs from the interpolated MV field can also be added to the CU level candidate list. More specifically, the interpolated MVs at the position $(0, 0)$, $(W/2, 0)$, $(0, H/2)$ and $(W/2, H/2)$ of the current CU are added. When FRUC is applied in AMVP mode, the original AMVP candidates are also added to CU level MV candidate set. In some implementations, at the CU level, 15 MVs for AMVP CUs and 13 MVs for merge CUs can be added to the candidate list.

[00112] The MV candidate set at sub-CU level includes an MV determined from a CU-level search, (2) top, left, top-left and top-right neighboring MVs, (3) scaled versions of collocated MVs from reference pictures, (4) one or more ATMVP candidates (e.g., up to four), and (5) one or more STMVP candidates (e.g., up to four). The scaled MVs from reference pictures are derived as follows. The reference pictures in both lists are traversed. The MVs at a collocated position of the sub-CU in a reference picture are scaled to the reference of the starting CU-level MV. ATMVP and STMVP candidates can be the four first ones. At the sub-CU level, one or more MVs (e.g., up to 17) are added to the candidate list.

[00113] *Generation of interpolated MV field*

[00114] Before coding a frame, interpolated motion field is generated for the whole picture based on unilateral ME. Then the motion field may be used later as CU level or sub-CU level MV candidates.

[00115] In some embodiments, the motion field of each reference pictures in both reference lists is traversed at 4×4 block level. FIG. 12 shows an example of unilateral Motion Estimation (ME) 1200 in the FRUC method. For each 4×4 block, if the motion associated to the block passing through a 4×4 block in the current picture and the block has not been assigned any interpolated motion, the motion of the reference block is scaled to the current picture according to the temporal distance TD0 and TD1 (the same way as that of MV scaling of TMVP in HEVC) and the scaled motion is assigned to the block in the current frame. If no scaled MV is assigned

to a 4×4 block, the block's motion is marked as unavailable in the interpolated motion field.

[00116] *Interpolation and matching cost*

[00117] When a motion vector points to a fractional sample position, motion compensated interpolation is needed. To reduce complexity, bi-linear interpolation instead of regular 8-tap HEVC interpolation can be used for both bilateral matching and template matching.

[00118] The calculation of matching cost is a bit different at different steps. When selecting the candidate from the candidate set at the CU level, the matching cost can be the absolute sum difference (SAD) of bilateral matching or template matching. After the starting MV is determined, the matching cost C of bilateral matching at sub-CU level search is calculated as follows:

$$\text{[00119]} \quad C = SAD + w \cdot (|MV_x - MV_x^s| + |MV_y - MV_y^s|) \quad \text{Eq. (14)}$$

[00120] Here, w is a weighting factor. In some embodiments, w can be empirically set to 4. MV and MV^s indicate the current MV and the starting MV, respectively. SAD may still be used as the matching cost of template matching at sub-CU level search.

[00121] In FRUC mode, MV is derived by using luma samples only. The derived motion will be used for both luma and chroma for MC inter prediction. After MV is decided, final MC is performed using 8-taps interpolation filter for luma and 4-taps interpolation filter for chroma.

[00122] MV refinement is a pattern based MV search with the criterion of bilateral matching cost or template matching cost. In the JEM, two search patterns are supported – an unrestricted center-biased diamond search (UCBDS) and an adaptive cross search for MV refinement at the CU level and sub-CU level, respectively. For both CU and sub-CU level MV refinement, the MV is directly searched at quarter luma sample MV accuracy, and this is followed by one-eighth luma sample MV refinement. The search range of MV refinement for the CU and sub-CU step are set equal to 8 luma samples.

[00123] In the bilateral matching merge mode, bi-prediction is applied because the motion information of a CU is derived based on the closest match between two blocks along the motion trajectory of the current CU in two different reference pictures. In the template matching merge mode, the encoder can choose among uni-prediction from list0, uni-prediction from list1, or bi-prediction for a CU. The selection can be based on a template matching cost as follows:

[00124] If $\text{costBi} \leq \text{factor} * \min(\text{cost0}, \text{cost1})$

[00125] bi-prediction is used;

[00126] Otherwise, if $\text{cost0} \leq \text{cost1}$

[00127] uni-prediction from list0 is used;

[00128] Otherwise,

[00129] uni-prediction from list1 is used;

[00130] Here, cost0 is the SAD of list0 template matching, cost1 is the SAD of list1 template matching and costBi is the SAD of bi-prediction template matching. For example, when the value of factor is equal to 1.25, it means that the selection process is biased toward bi-prediction. The inter prediction direction selection can be applied to the CU-level template matching process.

[00131] Deblocking process in VVC

[00132] 8.6.2 Deblocking filter process

[00133] 8.6.2.1 General

[00134] Inputs to this process are the reconstructed picture prior to deblocking, i.e., the array recPictureL and, when ChromaArrayType is not equal to 0, the arrays recPictureCb and recPictureCr .

[00135] Outputs of this process are the modified reconstructed picture after deblocking, i.e., the array recPictureL and, when ChromaArrayType is not equal to 0, the arrays recPictureCb and recPictureCr .

[00136] The vertical edges in a picture are filtered first. Then the horizontal edges in a picture are filtered with samples modified by the vertical edge filtering process as input. The vertical and horizontal edges in the CTBs of each CTU are processed separately on a coding unit basis. The vertical edges of the coding blocks in a coding unit are filtered starting with the edge on the left-hand side of the coding blocks proceeding through the edges towards the right-hand side of the coding blocks in their geometrical order. The horizontal edges of the coding blocks in a coding unit are filtered starting with the edge on the top of the coding blocks proceeding through the edges towards the bottom of the coding blocks in their geometrical order.

[00137] NOTE – Although the filtering process is specified on a picture basis in this Specification, the filtering process can be implemented on a coding unit basis with an equivalent result, provided the decoder properly accounts for the processing dependency order so as to

produce the same output values.

[00138] The deblocking filter process is applied to all coding subblock edges and transform block edges of a picture, except the following types of edges:

[00139] – Edges that are at the boundary of the picture,

[00140] – Edges that coincide with tile boundaries when
loop_filter_across_tiles_enabled_flag is equal to 0,

[00141] – Edges that coincide with upper or left boundaries of tile groups with
tile_group_loop_filter_across_tile_groups_enabled_flag equal to 0 or
tile_group_deblocking_filter_disabled_flag equal to 1,

[00142] – Edges within tile groups with tile_group_deblocking_filter_disabled_flag equal to 1,

[00143] – Edges that do not correspond to 8x8 sample grid boundaries of the considered component,

[00144] – Edges within chroma components for which both sides of the edge use inter prediction,

[00145] – Edges of chroma transform blocks that are not edges of the associated transform unit.

[00146] [Ed. (BB): Adapt syntax once tiles are integrated.]

[00147] The edge type, vertical or horizontal, is represented by the variable edgeType as specified in Table 8 17.

[00148] Table 8 17 – Name of association to edgeType

[00149]	edgeType	Name of edgeType
[00150]	0 (vertical edge)	EDGE_VER
[00151]	1 (horizontal edge)	EDGE_HOR

[00152] When tile_group_deblocking_filter_disabled_flag of the current tile group is equal to 0, the following applies:

[00153] – The variable treeType is derived as follows:

[00154] – If tile_group_type is equal to I and qtbt_dual_tree_intra_flag is equal to 1, treeType is set equal to DUAL_TREE_LUMA.

[00155] – Otherwise, treeType is set equal to SINGLE_TREE.

[00156] – The vertical edges are filtered by invoking the deblocking filter process for one direction as specified in clause 8.6.2.2 with the variable `treeType`, the reconstructed picture prior to deblocking, i.e., the array `recPictureL` and, when `ChromaArrayType` is not equal to 0 or `treeType` is equal to `SINGLE_TREE`, the arrays `recPictureCb` and `recPictureCr`, and the variable `edgeType` set equal to `EDGE_VER` as inputs, and the modified reconstructed picture after deblocking, i.e., the array `recPictureL` and, when `ChromaArrayType` is not equal to 0 or `treeType` is equal to `SINGLE_TREE`, the arrays `recPictureCb` and `recPictureCr` as outputs.

[00157] – The horizontal edge are filtered by invoking the deblocking filter process for one direction as specified in clause 8.6.2.2 with the variable `treeType`, the modified reconstructed picture after deblocking, i.e., the array `recPictureL` and, when `ChromaArrayType` is not equal to 0 or `treeType` is equal to `SINGLE_TREE`, the arrays `recPictureCb` and `recPictureCr`, and the variable `edgeType` set equal to `EDGE_HOR` as inputs, and the modified reconstructed picture after deblocking, i.e., the array `recPictureL` and, when `ChromaArrayType` is not equal to 0 or `treeType` is equal to `SINGLE_TREE`, the arrays `recPictureCb` and `recPictureCr` as outputs.

[00158] – When `tile_group_type` is equal to I and `qtbtt_dual_tree_intra_flag` is equal to 1, the following applies:

[00159] – The variable `treeType` is set equal to `DUAL_TREE_CHROMA`

[00160] – The vertical edges are filtered by invoking the deblocking filter process for one direction as specified in clause 8.6.2.2 with the variable `treeType`, the reconstructed picture prior to deblocking, i.e., the arrays `recPictureCb` and `recPictureCr`, and the variable `edgeType` set equal to `EDGE_VER` as inputs, and the modified reconstructed picture after deblocking, i.e., the arrays `recPictureCb` and `recPictureCr` as outputs.

[00161] – The horizontal edge are filtered by invoking the deblocking filter process for one direction as specified in clause 8.6.2.2 with the variable `treeType`, the modified reconstructed picture after deblocking, i.e., the arrays `recPictureCb` and `recPictureCr`, and the variable `edgeType` set equal to `EDGE_HOR` as inputs, and the modified reconstructed picture after deblocking, i.e., the arrays `recPictureCb` and `recPictureCr` as outputs.

[00162] 8.6.2.2 Deblocking filter process for one direction

[00163] Inputs to this process are:

[00164] – the variable `treeType` specifying whether a single tree (`SINGLE_TREE`) or a dual

tree is used to partition the CTUs and, when a dual tree is used, whether the luma (DUAL_TREE_LUMA) or chroma components (DUAL_TREE_CHROMA) are currently processed,

[00165] – when treeType is equal to SINGLE_TREE or DUAL_TREE_LUMA, the reconstructed picture prior to deblocking, i.e., the array recPictureL,

[00166] – when ChromaArrayType is not equal to 0 and treeType is equal to SINGLE_TREE or DUAL_TREE_CHROMA, the arrays recPictureCb and recPictureCr,

[00167] – a variable edgeType specifying whether a vertical (EDGE_VER) or a horizontal (EDGE_HOR) edge is filtered.

[00168] Outputs of this process are the modified reconstructed picture after deblocking, i.e:

[00169] – when treeType is equal to SINGLE_TREE or DUAL_TREE_LUMA, the array recPictureL,

[00170] – when ChromaArrayType is not equal to 0 and treeType is equal to SINGLE_TREE or DUAL_TREE_CHROMA, the arrays recPictureCb and recPictureCr.

[00171] For each coding unit with coding block width log2CbW, coding block height log2CbH and location of top-left sample of the coding block (xCb, yCb), when edgeType is equal to EDGE_VER and xCb % 8 is equal 0 or when edgeType is equal to EDGE_HOR and yCb % 8 is equal to 0, the edges are filtered by the following ordered steps:

[00172] 1. The coding block width nCbW is set equal to $1 \ll \log_2 \text{CbW}$ and the coding block height nCbH is set equal to $1 \ll \log_2 \text{CbH}$

[00173] 2. The variable filterEdgeFlag is derived as follows:

[00174] – If edgeType is equal to EDGE_VER and one or more of the following conditions are true, filterEdgeFlag is set equal to 0:

[00175] – The left boundary of the current coding block is the left boundary of the picture.

[00176] – The left boundary of the current coding block is the left boundary of the tile and loop_filter_across_tiles_enabled_flag is equal to 0.

[00177] – The left boundary of the current coding block is the left boundary of the tile group and tile_group_loop_filter_across_tile_groups_enabled_flag is equal to 0.

[00178] – Otherwise if edgeType is equal to EDGE_HOR and one or more of the following conditions are true, the variable filterEdgeFlag is set equal to 0:

- [00179] – The top boundary of the current luma coding block is the top boundary of the picture.
- [00180] – The top boundary of the current coding block is the top boundary of the tile and `loop_filter_across_tiles_enabled_flag` is equal to 0.
- [00181] – The top boundary of the current coding block is the top boundary of the tile group and `tile_group_loop_filter_across_tile_groups_enabled_flag` is equal to 0.
- [00182] – Otherwise, `filterEdgeFlag` is set equal to 1.
- [00183] [Ed. (BB): Adapt syntax once tiles are integrated.]
- [00184] 3. All elements of the two-dimensional $(nCbW) \times (nCbH)$ array `edgeFlags` are initialized to be equal to zero.
- [00185] 4. The derivation process of transform block boundary specified in clause 8.6.2.3 is invoked with the location $(xB0, yB0)$ set equal to $(0, 0)$, the block width `nTbW` set equal to `nCbW`, the block height `nTbH` set equal to `nCbH`, the variable `treeType`, the variable `filterEdgeFlag`, the array `edgeFlags`, and the variable `edgeType` as inputs, and the modified array `edgeFlags` as output.
- [00186] 5. The derivation process of coding subblock boundary specified in clause 8.6.2.4 is invoked with the location (xCb, yCb) , the coding block width `nCbW`, the coding block height `nCbH`, the array `edgeFlags`, and the variable `edgeType` as inputs, and the modified array `edgeFlags` as output.
- [00187] 6. The picture sample array `recPicture` is derived as follows:
- [00188] – If `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_LUMA`, `recPicture` is set equal to the reconstructed luma picture sample array prior to deblocking `recPictureL`.
- [00189] – Otherwise (`treeType` is equal to `DUAL_TREE_CHROMA`), `recPicture` is set equal to the reconstructed chroma picture sample array prior to deblocking `recPictureCb`.
- [00190] 7. The derivation process of the boundary filtering strength specified in clause 8.6.2.5 is invoked with the picture sample array `recPicture`, the luma location (xCb, yCb) , the coding block width `nCbW`, the coding block height `nCbH`, the variable `edgeType`, and the array `edgeFlags` as inputs, and an $(nCbW) \times (nCbH)$ array `verBs` as output.
- [00191] 8. The edge filtering process is invoked as follows:
- [00192] – If `edgeType` is equal to `EDGE_VER`, the vertical edge filtering process for a

coding unit as specified in clause 8.6.2.6.1 is invoked with the variable `treeType`, the reconstructed picture prior to deblocking, i.e., when `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_LUMA`, the array `recPictureL` and, when `ChromaArrayType` is not equal to 0 and `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_CHROMA`, the arrays `recPictureCb` and `recPictureCr`, the location (`xCb`, `yCb`), the coding block width `nCbW`, the coding block height `nCbH`, and the array `verBs` as inputs, and the modified reconstructed picture, i.e., when `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_LUMA`, the array `recPictureL` and, when `ChromaArrayType` is not equal to 0 and `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_CHROMA`, the arrays `recPictureCb` and `recPictureCr`, as output.

[00193] – Otherwise if `edgeType` is equal to `EDGE_HOR`, the horizontal edge filtering process for a coding unit as specified in clause 8.6.2.6.2 is invoked with the variable `treeType`, the modified reconstructed picture prior to deblocking, i.e., when `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_LUMA`, the array `recPictureL` and, when `ChromaArrayType` is not equal to 0 and `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_CHROMA`, the arrays `recPictureCb` and `recPictureCr`, the location (`xCb`, `yCb`), the coding block width `nCbW`, the coding block height `nCbH`, and the array `horBs` as inputs and the modified reconstructed picture, i.e., when `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_LUMA`, the array `recPictureL` and, when `ChromaArrayType` is not equal to 0 and `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_CHROMA`, the arrays `recPictureCb` and `recPictureCr`, as output.

[00194] 8.6.2.3 Derivation process of transform block boundary

[00195] Inputs to this process are:

[00196] – a location (`xB0`, `yB0`) specifying the top-left sample of the current block relative to the top left sample of the current coding block,

[00197] – a variable `nTbW` specifying the width of the current block,

[00198] – a variable `nTbH` specifying the height of the current block,

[00199] – a variable `treeType` specifying whether a single tree (`SINGLE_TREE`) or a dual tree is used to partition the CTUs and, when a dual tree is used, whether the luma (`DUAL_TREE_LUMA`) or chroma components (`DUAL_TREE_CHROMA`) are currently processed,

- [00200] – a variable filterEdgeFlag,
- [00201] – a two-dimensional (nCbW)x(nCbH) array edgeFlags,
- [00202] – a variable edgeType specifying whether a vertical (EDGE_VER) or a horizontal (EDGE_HOR) edge is filtered.
- [00203] Output of this process is the modified two-dimensional (nCbW)x(nCbH) array edgeFlags.
- [00204] The maximum transform block size maxTbSize is derived as follows:
- [00205] $\text{maxTbSize} = (\text{treeType} == \text{DUAL_TREE_CHROMA}) ? \text{MaxTbSizeY} / 2 : \text{MaxTbSizeY}$ (8 862)
- [00206] Depending on maxTbSize, the following applies:
- [00207] – If nTbW is greater than maxTbSize or nTbH is greater than maxTbSize, the following ordered steps apply.
- [00208] 1. The variables newTbW and newTbH are derived as follows:
- [00209] $\text{newTbW} = (\text{nTbW} > \text{maxTbSize}) ? (\text{nTbW} / 2) : \text{nTbW}$ (8 863)
- [00210] $\text{newTbH} = (\text{nTbH} > \text{maxTbSize}) ? (\text{nTbH} / 2) : \text{nTbH}$ (8 864)
- [00211] 2. The derivation process of transform block boundary as specified in this clause is invoked with the location (xB0, yB0), the variables nTbW set equal to newTbW and nTbH set equal to newTbH, the variable filterEdgeFlag, the array edgeFlags, and the variable edgeType as inputs, and the output is the modified version of array edgeFlags.
- [00212] 3. If nTbW is greater than maxTbSize, the derivation process of transform block boundary as specified in this clause is invoked with the luma location (xTb0, yTb0) set equal to (xTb0 + newTbW, yTb0), the variables nTbW set equal to newTbW and nTbH set equal to newTbH, the variable filterEdgeFlag, the array edgeFlags and the variable edgeType as inputs, and the output is the modified version of array edgeFlags.
- [00213] 4. If nTbH is greater than maxTbSize, the derivation process of transform block boundary as specified in this clause is invoked with the luma location (xTb0, yTb0) set equal to (xTb0, yTb0 + newTbH), the variables nTbW set equal to newTbW and nTbH set equal to newTbH, the variable filterEdgeFlag, the array edgeFlags and the variable edgeType as inputs, and the output is the modified version of array edgeFlags.
- [00214] 5. If nTbW is greater than maxTbSize and nTbH is greater than maxTbSize, the

derivation process of transform block boundary as specified in this clause is invoked with the luma location (x_{Tb0} , y_{Tb0}) set equal to ($x_{Tb0} + newTbW$, $y_{Tb0} + newTbH$), the variables $nTbW$ set equal to $newTbW$ and $nTbH$ set equal to $newTbH$, the variable $filterEdgeFlag$, the array $edgeFlags$ and the variable $edgeType$ as inputs, and the output is the modified version of array $edgeFlags$.

[00215] – Otherwise, the following applies:

[00216] – If $edgeType$ is equal to $EDGE_VER$, the value of $edgeFlags[xB0][yB0 + k]$ for $k = 0..nTbH - 1$ is derived as follows:

[00217] – If $xB0$ is equal to 0, $edgeFlags[xB0][yB0 + k]$ is set equal to $filterEdgeFlag$.

[00218] – Otherwise, $edgeFlags[xB0][yB0 + k]$ is set equal to 1.

[00219] – Otherwise ($edgeType$ is equal to $EDGE_HOR$), the value of $edgeFlags[xB0 + k][yB0]$ for $k = 0..nTbW - 1$ is derived as follows:

[00220] – If $yB0$ is equal to 0, $edgeFlags[xB0 + k][yB0]$ is set equal to $filterEdgeFlag$.

[00221] – Otherwise, $edgeFlags[xB0 + k][yB0]$ is set equal to 1.

[00222] 8.6.2.4 Derivation process of coding subblock boundary

[00223] Inputs to this process are:

[00224] – a location (xCb , yCb) specifying the top-left sample of the current coding block relative to the top-left sample of the current picture,

[00225] – a variable $nCbW$ specifying the width of the current coding block,

[00226] – a variable $nCbH$ specifying the height of the current coding block,

[00227] – a two-dimensional ($nCbW$)x($nCbH$) array $edgeFlags$,

[00228] – a variable $edgeType$ specifying whether a vertical ($EDGE_VER$) or a horizontal ($EDGE_HOR$) edge is filtered.

[00229] Output of this process is the modified two-dimensional ($nCbW$)x($nCbH$) array $edgeFlags$.

[00230] The number of coding subblock in horizontal direction $numSbX$ and in vertical direction $numSbY$ are derived as follows:

[00231] – If $CuPredMode[xCb][yCb] == MODE_INTRA$, $numSbX$ and $numSbY$ are both set equal to 1.

[00232] – Otherwise, $numSbX$ and $numSbY$ are set equal to $NumSbX[xCb][yCb]$ and

NumSbY[xCb][yCb], respectively.

[00233] Depending on the value of edgeType the following applies:

[00234] – If edgeType is equal to EDGE_VER and numSbX is greater than 1, the following applies for $i = 1..min((nCbW / 8) - 1, numSbX - 1)$, $k = 0..nCbH - 1$:

[00235] $edgeFlags[i * Max(8, nCbW / numSbX)][k] = 1$ (8 865)

[00236] – Otherwise if edgeType is equal to EDGE_HOR and numSbY is greater than 1, the following applies for $j = 1..min((nCbH / 8) - 1, numSbY - 1)$, $k = 0..nCbW - 1$:

[00237] $edgeFlags[k][j * Max(8, nCbH / numSbY)] = 1$ (8 866)

[00238] 8.6.2.5 Derivation process of boundary filtering strength

[00239] Inputs to this process are:

[00240] – a picture sample array recPicture,

[00241] – a location (xCb, yCb) specifying the top-left sample of the current coding block relative to the top-left sample of the current picture,

[00242] – a variable nCbW specifying the width of the current coding block,

[00243] – a variable nCbH specifying the height of the current coding block,

[00244] – a variable edgeType specifying whether a vertical (EDGE_VER) or a horizontal (EDGE_HOR) edge is filtered,

[00245] – a two-dimensional (nCbW)x(nCbH) array edgeFlags.

[00246] Output of this process is a two-dimensional (nCbW)x(nCbH) array bS specifying the boundary filtering strength.

[00247] The variables xDi, yDj, xN and yN are derived as follows:

[00248] – If edgeType is equal to EDGE_VER, xDi is set equal to $(i << 3)$, yDj is set equal to $(j << 2)$, xN is set equal to $Max(0, (nCbW / 8) - 1)$ and yN is set equal to $(nCbH / 4) - 1$.

[00249] – Otherwise (edgeType is equal to EDGE_HOR), xDi is set equal to $(i << 2)$, yDj is set equal to $(j << 3)$, xN is set equal to $(nCbW / 4) - 1$ and yN is set equal to $Max(0, (nCbH / 8) - 1)$.

[00250] For xDi with $i = 0..xN$ and yDj with $j = 0..yN$, the following applies:

[00251] – If $edgeFlags[xDi][yDj]$ is equal to 0, the variable $bS[xDi][yDj]$ is set equal to 0.

- [00252] – Otherwise, the following applies:
- [00253] – The sample values p_0 and q_0 are derived as follows:
- [00254] – If $edgeType$ is equal to $EDGE_VER$, p_0 is set equal to $recPicture [xCb + xDi - 1][yCb + yDj]$ and q_0 is set equal to $recPicture [xCb + xDi][yCb + yDj]$.
- [00255] – Otherwise ($edgeType$ is equal to $EDGE_HOR$), p_0 is set equal to $recPicture [xCb + xDi][yCb + yDj - 1]$ and q_0 is set equal to $recPicture [xCb + xDi][yCb + yDj]$.
- [00256] – The variable $bS[xDi][yDj]$ is derived as follows:
- [00257] – If the sample p_0 or q_0 is in the coding block of a coding unit coded with intra prediction mode, $bS[xDi][yDj]$ is set equal to 2.
- [00258] – Otherwise, if the block edge is also a transform block edge and the sample p_0 or q_0 is in a transform block which contains one or more non-zero transform coefficient levels, $bS[xDi][yDj]$ is set equal to 1.
- [00259] – Otherwise, if one or more of the following conditions are true, $bS[xDi][yDj]$ is set equal to 1:
- [00260] – For the prediction of the coding subblock containing the sample p_0 different reference pictures or a different number of motion vectors are used than for the prediction of the coding subblock containing the sample q_0 .
- [00261] NOTE 1 – The determination of whether the reference pictures used for the two coding subblocks are the same or different is based only on which pictures are referenced, without regard to whether a prediction is formed using an index into reference picture list 0 or an index into reference picture list 1, and also without regard to whether the index position within a reference picture list is different.
- [00262] NOTE 2 – The number of motion vectors that are used for the prediction of a coding subblock with top-left sample covering (xSb, ySb) , is equal to $PredFlagL0[xSb][ySb] + PredFlagL1[xSb][ySb]$.
- [00263] – One motion vector is used to predict the coding subblock containing the sample p_0 and one motion vector is used to predict the coding subblock containing the sample q_0 , and the absolute difference between the horizontal or vertical component of the motion vectors used is greater than or equal to 4 in units of quarter luma samples.
- [00264] – Two motion vectors and two different reference pictures are used to predict the

coding subblock containing the sample p0, two motion vectors for the same two reference pictures are used to predict the coding subblock containing the sample q0 and the absolute difference between the horizontal or vertical component of the two motion vectors used in the prediction of the two coding subblocks for the same reference picture is greater than or equal to 4 in units of quarter luma samples.

[00265] – Two motion vectors for the same reference picture are used to predict the coding subblock containing the sample p0, two motion vectors for the same reference picture are used to predict the coding subblock containing the sample q0 and both of the following conditions are true:

[00266] – The absolute difference between the horizontal or vertical component of list 0 motion vectors used in the prediction of the two coding subblocks is greater than or equal to 4 in quarter luma samples, or the absolute difference between the horizontal or vertical component of the list 1 motion vectors used in the prediction of the two coding subblocks is greater than or equal to 4 in units of quarter luma samples.

[00267] – The absolute difference between the horizontal or vertical component of list 0 motion vector used in the prediction of the coding subblock containing the sample p0 and the list 1 motion vector used in the prediction of the coding subblock containing the sample q0 is greater than or equal to 4 in units of quarter luma samples, or the absolute difference between the horizontal or vertical component of the list 1 motion vector used in the prediction of the coding subblock containing the sample p0 and list 0 motion vector used in the prediction of the coding subblock containing the sample q0 is greater than or equal to 4 in units of quarter luma samples.

[00268] – Otherwise, the variable $bs[xDi][yDj]$ is set equal to 0.

[00269] 8.6.2.6 Edge filtering process

[00270] 8.6.2.6.1 Vertical edge filtering process

[00271] Inputs to this process are:

[00272] – a variable treeType specifying whether a single tree (SINGLE_TREE) or a dual tree is used to partition the CTUs and, when a dual tree is used, whether the luma (DUAL_TREE_LUMA) or chroma components (DUAL_TREE_CHROMA) are currently processed,

[00273] – when treeType is equal to SINGLE_TREE or DUAL_TREE_LUMA, the

reconstructed picture prior to deblocking, i.e., the array `recPictureL`,

[00274] – when `ChromaArrayType` is not equal to 0 and `treeType` is equal to

`SINGLE_TREE` or `DUAL_TREE_CHROMA`, the arrays `recPictureCb` and `recPictureCr`,

[00275] – a location (`xCb`, `yCb`) specifying the top-left sample of the current coding block relative to the top-left sample of the current picture,

[00276] – a variable `nCbW` specifying the width of the current coding block,

[00277] – a variable `nCbH` specifying the height of the current coding block.

[00278] Outputs of this process are the modified reconstructed picture after deblocking, i.e:

[00279] – when `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_LUMA`, the array `recPictureL`,

[00280] – when `ChromaArrayType` is not equal to 0 and `treeType` is equal to

`SINGLE_TREE` or `DUAL_TREE_CHROMA`, the arrays `recPictureCb` and `recPictureCr`.

[00281] When `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_LUMA`, the filtering process for edges in the luma coding block of the current coding unit consists of the following ordered steps:

[00282] 1. The variable `xN` is set equal to $\text{Max}(0, (\text{nCbW} / 8) - 1)$ and `yN` is set equal to $(\text{nCbH} / 4) - 1$.

[00283] 2. For `xDk` equal to $k \ll 3$ with $k = 0..\text{nN}$ and `yDm` equal to $m \ll 2$ with $m = 0..\text{yN}$, the following applies:

[00284] – When `bS[ xDk ][ yDm ]` is greater than 0, the following ordered steps apply:

[00285] a. The decision process for block edges as specified in clause 8.6.2.6.3 is invoked with `treeType`, the picture sample array `recPicture` set equal to the luma picture sample array `recPictureL`, the location of the luma coding block (`xCb`, `yCb`), the luma location of the block (`xDk`, `yDm`), a variable `edgeType` set equal to `EDGE_VER`, the boundary filtering strength `bS[ xDk ][ yDm ]`, and the bit depth `bD` set equal to `BitDepthY` as inputs, and the decisions `dE`, `dEp` and `dEq`, and the variable `tC` as outputs.

[00286] b. The filtering process for block edges as specified in clause 8.6.2.6.4 is invoked with the picture sample array `recPicture` set equal to the luma picture sample array `recPictureL`, the location of the luma coding block (`xCb`, `yCb`), the luma location of the block (`xDk`, `yDm`), a variable `edgeType` set equal to `EDGE_VER`, the decisions `dE`, `dEp` and `dEq`, and the variable

tC as inputs, and the modified luma picture sample array recPictureL as output.

[00287] When ChromaArrayType is not equal to 0 and treeType is equal to SINGLE_TREE the filtering process for edges in the chroma coding blocks of current coding unit consists of the following ordered steps:

[00288] 1. The variable xN is set equal to $\text{Max}(0, (\text{nCbW} / 8) - 1)$ and yN is set equal to $\text{Max}(0, (\text{nCbH} / 8) - 1)$.

[00289] 2. The variable edgeSpacing is set equal to $8 / \text{SubWidthC}$.

[00290] 3. The variable edgeSections is set equal to $yN * (2 / \text{SubHeightC})$.

[00291] 4. For xDk equal to $k * \text{edgeSpacing}$ with $k = 0..xN$ and yDm equal to $m \ll 2$ with $m = 0..edgeSections$, the following applies:

[00292] – When $\text{bs}[\text{xDk} * \text{SubWidthC}][\text{yDm} * \text{SubHeightC}]$ is equal to 2 and $((\text{xCb} / \text{SubWidthC} + \text{xDk}) \gg 3) \ll 3$ is equal to $\text{xCb} / \text{SubWidthC} + \text{xDk}$, the following ordered steps apply:

[00293] a. The filtering process for chroma block edges as specified in clause 8.6.2.6.5 is invoked with the chroma picture sample array recPictureCb, the location of the chroma coding block $(\text{xCb} / \text{SubWidthC}, \text{yCb} / \text{SubHeightC})$, the chroma location of the block (xDk, yDm) , a variable edgeType set equal to EDGE_VER and a variable cQpPicOffset set equal to pps_cb_qp_offset as inputs, and the modified chroma picture sample array recPictureCb as output.

[00294] b. The filtering process for chroma block edges as specified in clause 8.6.2.6.5 is invoked with the chroma picture sample array recPictureCr, the location of the chroma coding block $(\text{xCb} / \text{SubWidthC}, \text{yCb} / \text{SubHeightC})$, the chroma location of the block (xDk, yDm) , a variable edgeType set equal to EDGE_VER and a variable cQpPicOffset set equal to pps_cr_qp_offset as inputs, and the modified chroma picture sample array recPictureCr as output.

[00295] When treeType is equal to DUAL_TREE_CHROMA, the filtering process for edges in the two chroma coding blocks of the current coding unit consists of the following ordered steps:

[00296] 1. The variable xN is set equal to $\text{Max}(0, (\text{nCbW} / 8) - 1)$ and yN is set equal to $(\text{nCbH} / 4) - 1$.

[00297] 2. For x_{Dk} equal to $k \ll 3$ with $k = 0..x_N$ and y_{Dm} equal to $m \ll 2$ with $m = 0..y_N$, the following applies:

[00298] – When $bS[x_{Dk}][y_{Dm}]$ is greater than 0, the following ordered steps apply:

[00299] a. The decision process for block edges as specified in clause 8.6.2.6.3 is invoked with $treeType$, the picture sample array $recPicture$ set equal to the chroma picture sample array $recPictureCb$, the location of the chroma coding block (x_{Cb}, y_{Cb}), the location of the chroma block (x_{Dk}, y_{Dm}), a variable $edgeType$ set equal to $EDGE_VER$, the boundary filtering strength $bS[x_{Dk}][y_{Dm}]$, and the bit depth bD set equal to $BitDepthC$ as inputs, and the decisions dE , dEp and dEq , and the variable tC as outputs.

[00300] b. The filtering process for block edges as specified in clause 8.6.2.6.4 is invoked with the picture sample array $recPicture$ set equal to the chroma picture sample array $recPictureCb$, the location of the chroma coding block (x_{Cb}, y_{Cb}), the chroma location of the block (x_{Dk}, y_{Dm}), a variable $edgeType$ set equal to $EDGE_VER$, the decisions dE , dEp and dEq , and the variable tC as inputs, and the modified chroma picture sample array $recPictureCb$ as output.

[00301] c. The filtering process for block edges as specified in clause 8.6.2.6.4 is invoked with the picture sample array $recPicture$ set equal to the chroma picture sample array $recPictureCr$, the location of the chroma coding block (x_{Cb}, y_{Cb}), the chroma location of the block (x_{Dk}, y_{Dm}), a variable $edgeType$ set equal to $EDGE_VER$, the decisions dE , dEp and dEq , and the variable tC as inputs, and the modified chroma picture sample array $recPictureCr$ as output.

[00302] 8.6.2.6.2 Horizontal edge filtering process

[00303] Inputs to this process are:

[00304] – a variable $treeType$ specifying whether a single tree ($SINGLE_TREE$) or a dual tree is used to partition the CTUs and, when a dual tree is used, whether the luma ($DUAL_TREE_LUMA$) or chroma components ($DUAL_TREE_CHROMA$) are currently processed,

[00305] – when $treeType$ is equal to $SINGLE_TREE$ or $DUAL_TREE_LUMA$, the reconstructed picture prior to deblocking, i.e., the array $recPictureL$,

[00306] – when $ChromaArrayType$ is not equal to 0 and $treeType$ is equal to

SINGLE_TREE or DUAL_TREE_CHROMA, the arrays recPictureCb and recPictureCr,

[00307] – a location (xCb, yCb) specifying the top-left sample of the current coding block relative to the top-left sample of the current picture,

[00308] – a variable nCbW specifying the width of the current coding block,

[00309] – a variable nCbH specifying the height of the current coding block.

[00310] Outputs of this process are the modified reconstructed picture after deblocking, i.e:

[00311] – when treeType is equal to SINGLE_TREE or DUAL_TREE_LUMA, the array recPictureL,

[00312] – when ChromaArrayType is not equal to 0 and treeType is equal to SINGLE_TREE or DUAL_TREE_CHROMA, the arrays recPictureCb and recPictureCr.

[00313] When treeType is equal to SINGLE_TREE or DUAL_TREE_LUMA, the filtering process for edges in the luma coding block of the current coding unit consists of the following ordered steps:

[00314] 1. The variable yN is set equal to $\text{Max}(0, (nCbH / 8) - 1)$ and xN is set equal to $(nCbW / 4) - 1$.

[00315] 2. For yDm equal to $m \ll 3$ with $m = 0..yN$ and xDk equal to $k \ll 2$ with $k = 0..xN$, the following applies:

[00316] – When $bS[xDk][yDm]$ is greater than 0, the following ordered steps apply:

[00317] a. The decision process for block edges as specified in clause 8.6.2.6.3 is invoked with treeType, the picture sample array recPicture set equal to the luma picture sample array recPictureL, the location of the luma coding block (xCb, yCb), the luma location of the block (xDk, yDm), a variable edgeType set equal to EDGE_HOR, the boundary filtering strength $bS[xDk][yDm]$, and the bit depth bD set equal to BitDepthY as inputs, and the decisions dE, dEp and dEq, and the variable tC as outputs.

[00318] b. The filtering process for block edges as specified in clause 8.6.2.6.4 is invoked with the picture sample array recPicture set equal to the luma picture sample array recPictureL, the location of the luma coding block (xCb, yCb), the luma location of the block (xDk, yDm), a variable edgeType set equal to EDGE_HOR, the decisions dEp, dEp and dEq, and the variable tC as inputs, and the modified luma picture sample array recPictureL as output.

[00319] When ChromaArrayType is not equal to 0 and treeType is equal to SINGLE_TREE

the filtering process for edges in the chroma coding blocks of current coding unit consists of the following ordered steps:

[00320] 1. The variable xN is set equal to $\text{Max}(0, (nC_bW / 8) - 1)$ and yN is set equal to $\text{Max}(0, (nC_bH / 8) - 1)$.

[00321] 2. The variable edgeSpacing is set equal to $8 / \text{SubHeightC}$.

[00322] 3. The variable edgeSections is set equal to $xN * (2 / \text{SubWidthC})$.

[00323] 4. For yDm equal to $m * \text{edgeSpacing}$ with $m = 0..yN$ and xDk equal to $k \ll 2$ with $k = 0..\text{edgeSections}$, the following applies:

[00324] – When $bS[xDk * \text{SubWidthC}][yDm * \text{SubHeightC}]$ is equal to 2 and $((yCb / \text{SubHeightC} + yDm) \gg 3) \ll 3$ is equal to $yCb / \text{SubHeightC} + yDm$, the following ordered steps apply:

[00325] a. The filtering process for chroma block edges as specified in clause 8.6.2.6.5 is invoked with the chroma picture sample array recPictureCb , the location of the chroma coding block $(xCb / \text{SubWidthC}, yCb / \text{SubHeightC})$, the chroma location of the block (xDk, yDm) , a variable edgeType set equal to EDGE_HOR and a variable cQpPicOffset set equal to pps_cb_qp_offset as inputs, and the modified chroma picture sample array recPictureCb as output.

[00326] b. The filtering process for chroma block edges as specified in clause 8.6.2.6.5 is invoked with the chroma picture sample array recPictureCr , the location of the chroma coding block $(xCb / \text{SubWidthC}, yCb / \text{SubHeightC})$, the chroma location of the block (xDk, yDm) , a variable edgeType set equal to EDGE_HOR and a variable cQpPicOffset set equal to pps_cr_qp_offset as inputs, and the modified chroma picture sample array recPictureCr as output.

[00327] When treeType is equal to DUAL_TREE_CHROMA , the filtering process for edges in the two chroma coding blocks of the current coding unit consists of the following ordered steps:

[00328] 1. The variable yN is set equal to $\text{Max}(0, (nC_bH / 8) - 1)$ and xN is set equal to $(nC_bW / 4) - 1$.

[00329] 2. For yDm equal to $m \ll 3$ with $m = 0..yN$ and xDk equal to $k \ll 2$ with $k = 0..xN$, the following applies:

[00330] – When $bS[xDk][yDm]$ is greater than 0, the following ordered steps apply:

[00331] a. The decision process for block edges as specified in clause 8.6.2.6.3 is invoked with $treeType$, the picture sample array $recPicture$ set equal to the chroma picture sample array $recPictureCb$, the location of the chroma coding block (xCb, yCb), the location of the chroma block (xDk, yDm), a variable $edgeType$ set equal to $EDGE_HOR$, the boundary filtering strength $bS[xDk][yDm]$, and the bit depth bD set equal to $BitDepthC$ as inputs, and the decisions dE, dEp and dEq , and the variable tC as outputs.

[00332] b. The filtering process for block edges as specified in clause 8.6.2.6.4 is invoked with the picture sample array $recPicture$ set equal to the chroma picture sample array $recPictureCb$, the location of the chroma coding block (xCb, yCb), the chroma location of the block (xDk, yDm), a variable $edgeType$ set equal to $EDGE_HOR$, the decisions dE, dEp and dEq , and the variable tC as inputs, and the modified chroma picture sample array $recPictureCb$ as output.

[00333] c. The filtering process for block edges as specified in clause 8.6.2.6.4 is invoked with the picture sample array $recPicture$ set equal to the chroma picture sample array $recPictureCr$, the location of the chroma coding block (xCb, yCb), the chroma location of the block (xDk, yDm), a variable $edgeType$ set equal to $EDGE_HOR$, the decisions dE, dEp and dEq , and the variable tC as inputs, and the modified chroma picture sample array $recPictureCr$ as output.

[00334] 8.6.2.6.3 Decision process for block edges

[00335] Inputs to this process are:

[00336] – a variable $treeType$ specifying whether a single tree ($SINGLE_TREE$) or a dual tree is used to partition the CTUs and, when a dual tree is used, whether the luma ($DUAL_TREE_LUMA$) or chroma components ($DUAL_TREE_CHROMA$) are currently processed,

[00337] – a picture sample array $recPicture$,

[00338] – a location (xCb, yCb) specifying the top-left sample of the current coding block relative to the top-left sample of the current picture,

[00339] – a location (xBl, yBl) specifying the top-left sample of the current block relative to the top-left sample of the current coding block,

- [00340] – a variable `edgeType` specifying whether a vertical (`EDGE_VER`) or a horizontal (`EDGE_HOR`) edge is filtered,
- [00341] – a variable `bS` specifying the boundary filtering strength,
- [00342] – a variable `bD` specifying the bit depth of the current component.
- [00343] Outputs of this process are:
- [00344] – the variables `dE`, `dEp` and `dEq` containing decisions,
- [00345] – the variable `tC`.
- [00346] If `edgeType` is equal to `EDGE_VER`, the sample values $p_{i,k}$ and $q_{i,k}$ with $i = 0..3$ and $k = 0$ and 3 are derived as follows:
- [00347] $q_{i,k} = \text{recPictureL}[x_{Cb} + x_{Bl} + i][y_{Cb} + y_{Bl} + k]$ (8 867)
- [00348] $p_{i,k} = \text{recPictureL}[x_{Cb} + x_{Bl} - i - 1][y_{Cb} + y_{Bl} + k]$ (8 868)
- [00349] Otherwise (`edgeType` is equal to `EDGE_HOR`), the sample values $p_{i,k}$ and $q_{i,k}$ with $i = 0..3$ and $k = 0$ and 3 are derived as follows:
- [00350] $q_{i,k} = \text{recPicture}[x_{Cb} + x_{Bl} + k][y_{Cb} + y_{Bl} + i]$ (8 869)
- [00351] $p_{i,k} = \text{recPicture}[x_{Cb} + x_{Bl} + k][y_{Cb} + y_{Bl} - i - 1]$ (8 870)
- [00352] The variable `qpOffset` is derived as follows:
- [00353] – If `sps_ladf_enabled_flag` is equal to `1` and `treeType` is equal to `SINGLE_TREE` or `DUAL_TREE_LUMA`, the following applies:
- [00354] – The variable `lumaLevel` of the reconstructed luma level is derived as follow:
- [00355] $\text{lumaLevel} = ((p_{0,0} + p_{0,3} + q_{0,0} + q_{0,3}) \gg 2),$ (8 871)
- [00356] – The variable `qpOffset` is set equal to `sps_ladf_lowest_interval_qp_offset` and modified as follows:
- [00357] `for( i = 0; i < sps_num_ladf_intervals_minus2 + 1; i++ ) {`
- [00358] `if( lumaLevel > SpsLadfIntervalLowerBound[ i + 1 ] )`
- [00359] $\text{qpOffset} = \text{sps_ladf_qp_offset}[i]$ (8 872)
- [00360] `else`
- [00361] `break`
- [00362] `}`
- [00363] – Otherwise (`treeType` is equal to `DUAL_TREE_CHROMA`), `qpOffset` is set equal to `0`.

[00364] The variables QpQ and QpP are derived as follows:

[00365] – If treeType is equal to SINGLE_TREE or DUAL_TREE_LUMA, QpQ and QpP are set equal to the QpY values of the coding units which include the coding blocks containing the sample q0,0 and p0,0, respectively.

[00366] – Otherwise (treeType is equal to DUAL_TREE_CHROMA), QpQ and QpP are set equal to the QpC values of the coding units which include the coding blocks containing the sample q0,0 and p0,0, respectively.

[00367] The variable qP is derived as follows:

$$[00368] \quad qP = ((QpQ + QpP + 1) \gg 1) + qpOffset \quad (8\ 873)$$

[00369] The value of the variable β' is determined as specified in Table 8 18 based on the quantization parameter Q derived as follows:

$$[00370] \quad Q = \text{Clip3}(0, 63, qP + (\text{tile_group_beta_offset_div2} \ll 1)) \quad (8\ 874)$$

[00371] where tile_group_beta_offset_div2 is the value of the syntax element tile_group_beta_offset_div2 for the tile group that contains sample q0,0.

[00372] The variable β is derived as follows:

$$[00373] \quad \beta = \beta' * (1 \ll (bD - 8)) \quad (8\ 875)$$

[00374] The value of the variable tC' is determined as specified in Table 8 18 based on the quantization parameter Q derived as follows:

$$[00375] \quad Q = \text{Clip3}(0, 65, qP + 2 * (bS - 1) + (\text{tile_group_tc_offset_div2} \ll 1)) \quad (8\ 876)$$

[00376] where tile_group_tc_offset_div2 is the value of the syntax element tile_group_tc_offset_div2 for the tile group that contains sample q0,0.

[00377] The variable tC is derived as follows:

$$[00378] \quad tC = tC' * (1 \ll (bD - 8)) \quad (8\ 877)$$

[00379] Depending on the value of edgeType, the following applies:

[00380] – If edgeType is equal to EDGE_VER, the following ordered steps apply:

[00381] 1. The variables dpq0, dpq3, dp, dq and d are derived as follows:

$$[00382] \quad dp0 = \text{Abs}(p2,0 - 2 * p1,0 + p0,0) \quad (8\ 878)$$

$$[00383] \quad dp3 = \text{Abs}(p2,3 - 2 * p1,3 + p0,3) \quad (8\ 879)$$

$$[00384] \quad dq0 = \text{Abs}(q2,0 - 2 * q1,0 + q0,0) \quad (8\ 880)$$

$$[00385] \quad dq3 = \text{Abs}(q2,3 - 2 * q1,3 + q0,3) \quad (8\ 881)$$

- [00386] $dpq0 = dp0 + dq0$ (8 882)
- [00387] $dpq3 = dp3 + dq3$ (8 883)
- [00388] $dp = dp0 + dp3$ (8 884)
- [00389] $dq = dq0 + dq3$ (8 885)
- [00390] $d = dpq0 + dpq3$ (8 886)
- [00391] 2. The variables dE, dEp and dEq are set equal to 0.
- [00392] 3. When d is less than β , the following ordered steps apply:
- [00393] a. The variable dpq is set equal to $2 * dpq0$.
- [00394] b. For the sample location (xCb + xBl, yCb + yBl), the decision process for a sample as specified in clause 8.6.2.6.6 is invoked with sample values p0,0, p3,0, q0,0, and q3,0, the variables dpq, β and tC as inputs, and the output is assigned to the decision dSam0.
- [00395] c. The variable dpq is set equal to $2 * dpq3$.
- [00396] d. For the sample location (xCb + xBl, yCb + yBl + 3), the decision process for a sample as specified in clause 8.6.2.6.6 is invoked with sample values p0,3, p3,3, q0,3, and q3,3, the variables dpq, β and tC as inputs, and the output is assigned to the decision dSam3.
- [00397] e. The variable dE is set equal to 1.
- [00398] f. When dSam0 is equal to 1 and dSam3 is equal to 1, the variable dE is set equal to 2.
- [00399] g. When dp is less than $(\beta + (\beta \gg 1)) \gg 3$, the variable dEp is set equal to 1.
- [00400] h. When dq is less than $(\beta + (\beta \gg 1)) \gg 3$, the variable dEq is set equal to 1.
- [00401] – Otherwise (edgeType is equal to EDGE_HOR), the following ordered steps apply:
- [00402] 1. The variables dpq0, dpq3, dp, dq and d are derived as follows:
- [00403] $dp0 = \text{Abs}(p2,0 - 2 * p1,0 + p0,0)$ (8 887)
- [00404] $dp3 = \text{Abs}(p2,3 - 2 * p1,3 + p0,3)$ (8 888)
- [00405] $dq0 = \text{Abs}(q2,0 - 2 * q1,0 + q0,0)$ (8 889)
- [00406] $dq3 = \text{Abs}(q2,3 - 2 * q1,3 + q0,3)$ (8 890)
- [00407] $dpq0 = dp0 + dq0$ (8 891)
- [00408] $dpq3 = dp3 + dq3$ (8 892)
- [00409] $dp = dp0 + dp3$ (8 893)

- [00410] $dq = dq0 + dq3$ (8 894)
- [00411] $d = dpq0 + dpq3$ (8 895)
- [00412] 2. The variables dE, dEp and dEq are set equal to 0.
- [00413] 3. When d is less than β , the following ordered steps apply:
- [00414] a. The variable dpq is set equal to $2 * dpq0$.
- [00415] b. For the sample location (xCb + xBl, yCb + yBl), the decision process for a sample as specified in clause 8.6.2.6.6 is invoked with sample values p0,0, p3,0, q0,0 and q3,0, the variables dpq, β and tC as inputs, and the output is assigned to the decision dSam0.
- [00416] c. The variable dpq is set equal to $2 * dpq3$.
- [00417] d. For the sample location (xCb + xBl + 3, yCb + yBl), the decision process for a sample as specified in clause 8.6.2.6.6 is invoked with sample values p0,3, p3,3, q0,3 and q3,3, the variables dpq, β and tC as inputs, and the output is assigned to the decision dSam3.
- [00418] e. The variable dE is set equal to 1.
- [00419] f. When dSam0 is equal to 1 and dSam3 is equal to 1, the variable dE is set equal to 2.
- [00420] g. When dp is less than $(\beta + (\beta \gg 1)) \gg 3$, the variable dEp is set equal to 1.
- [00421] h. When dq is less than $(\beta + (\beta \gg 1)) \gg 3$, the variable dEq is set equal to 1.
- [00422] Table 8 18 – Derivation of threshold variables β' and tC' from input Q
- [00423]
- | | | | | | | | | | | | | |
|---------|----------|----|----|----|----|----|----|----|----|----|----|----|
| [00424] | Q | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| | 11 | 12 | 13 | 14 | 15 | 16 | | | | | | |
| [00425] | β' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | 0 | 0 | 0 | 0 | 0 | 6 | | | | | | |
| [00426] | tC' | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | |
| [00427] | Q | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 |
| | 28 | 29 | 30 | 31 | 32 | 33 | | | | | | |
| [00428] | β' | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 |
| | 18 | 20 | 22 | 24 | 26 | 28 | | | | | | |
| [00429] | tC' | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 2 |

	2	2	2	3	3	3						
[00430]	Q	34	35	36	37	38	39	40	41	42	43	44
		45	46	47	48	49	50					
[00431]	β'	30	32	34	36	38	40	42	44	46	48	50
		52	54	56	58	60	62					
[00432]	tC'	3	4	4	4	5	5	6	6	7	8	9
		10	11	13	14	16	18					
[00433]	Q	51	52	53	54	55	56	57	58	59	60	61
		62	63	64	65							
[00434]	β'	64	66	68	70	72	74	76	78	80	82	84
		86	88	-	-							
[00435]	tC'	20	22	25	28	31	35	39	44	50	56	63
		70	79	88	99							

[00436] 8.6.2.6.4 Filtering process for block edges

[00437] Inputs to this process are:

[00438] – a picture sample array recPicture,

[00439] – a location (xCb, yCb) specifying the top-left sample of the current coding block relative to the top-left sample of the current picture,

[00440] – a location (xBl, yBl) specifying the top-left sample of the current block relative to the top-left sample of the current coding block,

[00441] – a variable edgeType specifying whether a vertical (EDGE_VER) or a horizontal (EDGE_HOR) edge is filtered,

[00442] – the variables dE, dEp and dEq containing decisions,

[00443] – the variable tC.

[00444] Output of this process is the modified picture sample array recPicture.

[00445] Depending on the value of edgeType, the following applies:

[00446] – If edgeType is equal to EDGE_VER, the following ordered steps apply:

[00447] 1. The sample values $p_{i,k}$ and $q_{i,k}$ with $i = 0..3$ and $k = 0..3$ are derived as follows:

[00448] $q_{i,k} = \text{recPictureL}[\text{xCb} + \text{xBl} + i][\text{yCb} + \text{yBl} + k]$ (8 896)

[00449] $p_{i,k} = \text{recPictureL}[\text{xCb} + \text{xBl} - i - 1][\text{yCb} + \text{yBl} + k]$ (8 897)

[00450] 2. When dE is not equal to 0, for each sample location $(x_{Cb} + x_{Bl}, y_{Cb} + y_{Bl} + k)$, $k = 0..3$, the following ordered steps apply:

[00451] a. The filtering process for a sample as specified in clause 8.6.2.6.7 is invoked with the sample values $p_{i,k}$, $q_{i,k}$ with $i = 0..3$, the locations (x_{Pi}, y_{Pi}) set equal to $(x_{Cb} + x_{Bl} - i - 1, y_{Cb} + y_{Bl} + k)$ and (x_{Qi}, y_{Qi}) set equal to $(x_{Cb} + x_{Bl} + i, y_{Cb} + y_{Bl} + k)$ with $i = 0..2$, the decision dE , the variables dEp and dEq and the variable tC as inputs, and the number of filtered samples nDp and nDq from each side of the block boundary and the filtered sample values p_i' and q_j' as outputs.

[00452] b. When nDp is greater than 0, the filtered sample values p_i' with $i = 0..nDp - 1$ replace the corresponding samples inside the sample array $recPicture$ as follows:

[00453] $recPicture[x_{Cb} + x_{Bl} - i - 1][y_{Cb} + y_{Bl} + k] = p_i'$ (8 898)

[00454] c. When nDq is greater than 0, the filtered sample values q_j' with $j = 0..nDq - 1$ replace the corresponding samples inside the sample array $recPicture$ as follows:

[00455] $recPicture[x_{Cb} + x_{Bl} + j][y_{Cb} + y_{Bl} + k] = q_j'$ (8 899)

[00456] – Otherwise ($edgeType$ is equal to $EDGE_HOR$), the following ordered steps apply:

[00457] 1. The sample values $p_{i,k}$ and $q_{i,k}$ with $i = 0..3$ and $k = 0..3$ are derived as follows:

[00458] $q_{i,k} = recPictureL[x_{Cb} + x_{Bl} + k][y_{Cb} + y_{Bl} + i]$ (8 900)

[00459] $p_{i,k} = recPictureL[x_{Cb} + x_{Bl} + k][y_{Cb} + y_{Bl} - i - 1]$ (8 901)

[00460] 2. When dE is not equal to 0, for each sample location $(x_{Cb} + x_{Bl} + k, y_{Cb} + y_{Bl})$, $k = 0..3$, the following ordered steps apply:

[00461] a. The filtering process for a sample as specified in clause 8.6.2.6.7 is invoked with the sample values $p_{i,k}$, $q_{i,k}$ with $i = 0..3$, the locations (x_{Pi}, y_{Pi}) set equal to $(x_{Cb} + x_{Bl} + k, y_{Cb} + y_{Bl} - i - 1)$ and (x_{Qi}, y_{Qi}) set equal to $(x_{Cb} + x_{Bl} + k, y_{Cb} + y_{Bl} + i)$ with $i = 0..2$, the decision dE , the variables dEp and dEq , and the variable tC as inputs, and the number of filtered samples nDp and nDq from each side of the block boundary and the filtered sample values p_i' and q_j' as outputs.

[00462] b. When nDp is greater than 0, the filtered sample values p_i' with $i = 0..nDp - 1$ replace the corresponding samples inside the sample array $recPicture$ as follows:

[00463] $recPicture[x_{Cb} + x_{Bl} + k][y_{Cb} + y_{Bl} - i - 1] = p_i'$ (8 902)

[00464] c. When nDq is greater than 0, the filtered sample values qj' with $j = 0..nDq - 1$ replace the corresponding samples inside the sample array `recPicture` as follows:

[00465] $\text{recPicture}[x_{Cb} + x_{Bl} + k][y_{Cb} + y_{Bl} + j] = qj'$ (8 903)

[00466] 8.6.2.6.5 Filtering process for chroma block edges

[00467] This process is only invoked when `ChromaArrayType` is not equal to 0.

[00468] Inputs to this process are:

[00469] – a chroma picture sample array s' ,

[00470] – a chroma location (x_{Cb}, y_{Cb}) specifying the top-left sample of the current chroma coding block relative to the top-left chroma sample of the current picture,

[00471] – a chroma location (x_{Bl}, y_{Bl}) specifying the top-left sample of the current chroma block relative to the top-left sample of the current chroma coding block,

[00472] – a variable `edgeType` specifying whether a vertical (`EDGE_VER`) or a horizontal (`EDGE_HOR`) edge is filtered,

[00473] – a variable `cQpPicOffset` specifying the picture-level chroma quantization parameter offset.

[00474] Output of this process is the modified chroma picture sample array s' .

[00475] If `edgeType` is equal to `EDGE_VER`, the values pi and qi with $i = 0..1$ and $k = 0..3$ are derived as follows:

[00476] $qi,k = s'[x_{Cb} + x_{Bl} + i][y_{Cb} + y_{Bl} + k]$ (8 904)

[00477] $pi,k = s'[x_{Cb} + x_{Bl} - i - 1][y_{Cb} + y_{Bl} + k]$ (8 905)

[00478] Otherwise (`edgeType` is equal to `EDGE_HOR`), the sample values pi and qi with $i = 0..1$ and $k = 0..3$ are derived as follows:

[00479] $qi,k = s'[x_{Cb} + x_{Bl} + k][y_{Cb} + y_{Bl} + i]$ (8 906)

[00480] $pi,k = s'[x_{Cb} + x_{Bl} + k][y_{Cb} + y_{Bl} - i - 1]$ (8 907)

[00481] The variables `QpQ` and `QpP` are set equal to the `QpY` values of the coding units which include the coding blocks containing the sample $q_{0,0}$ and $p_{0,0}$, respectively.

[00482] If `ChromaArrayType` is equal to 1, the variable `QpC` is determined as specified in Table 8 15 based on the index qPi derived as follows:

[00483] $qPi = ((QpQ + QpP + 1) \gg 1) + cQpPicOffset$ (8 908)

[00484] Otherwise (`ChromaArrayType` is greater than 1), the variable `QpC` is set equal to

$\text{Min}(q_{Pi}, 63)$.

[00485] NOTE – The variable $c_{QpPicOffset}$ provides an adjustment for the value of $pps_cb_qp_offset$ or $pps_cr_qp_offset$, according to whether the filtered chroma component is the Cb or Cr component. However, to avoid the need to vary the amount of the adjustment within the picture, the filtering process does not include an adjustment for the value of $tile_group_cb_qp_offset$ or $tile_group_cr_qp_offset$.

[00486] The value of the variable tC' is determined as specified in Table 8 18 based on the chroma quantization parameter Q derived as follows:

[00487] $Q = \text{Clip3}(0, 65, Q_{pC} + 2 + (tile_group_tc_offset_div2 \ll 1))$ (8 909)

[00488] where $tile_group_tc_offset_div2$ is the value of the syntax element $tile_group_tc_offset_div2$ for the tile group that contains sample $q_{0,0}$.

[00489] The variable tC is derived as follows:

[00490] $tC = tC' * (1 \ll (\text{BitDepthC} - 8))$ (8 910)

[00491] Depending on the value of $edgeType$, the following applies:

[00492] – If $edgeType$ is equal to $EDGE_VER$, for each sample location $(x_{Cb} + x_{Bl}, y_{Cb} + y_{Bl} + k)$, $k = 0..3$, the following ordered steps apply:

[00493] 1. The filtering process for a chroma sample as specified in clause 8.6.2.6.8 is invoked with the sample values $p_{i,k}$, $q_{i,k}$, with $i = 0..1$, the locations $(x_{Cb} + x_{Bl} - 1, y_{Cb} + y_{Bl} + k)$ and $(x_{Cb} + x_{Bl}, y_{Cb} + y_{Bl} + k)$ and the variable tC as inputs, and the filtered sample values $p_{0'}$ and $q_{0'}$ as outputs.

[00494] 2. The filtered sample values $p_{0'}$ and $q_{0'}$ replace the corresponding samples inside the sample array s' as follows:

[00495] $s'[x_{Cb} + x_{Bl}][y_{Cb} + y_{Bl} + k] = q_{0'}$ (8 911)

[00496] $s'[x_{Cb} + x_{Bl} - 1][y_{Cb} + y_{Bl} + k] = p_{0'}$ (8 912)

[00497] – Otherwise ($edgeType$ is equal to $EDGE_HOR$), for each sample location $(x_{Cb} + x_{Bl} + k, y_{Cb} + y_{Bl})$, $k = 0..3$, the following ordered steps apply:

[00498] 1. The filtering process for a chroma sample as specified in clause 8.6.2.6.8 is invoked with the sample values $p_{i,k}$, $q_{i,k}$, with $i = 0..1$, the locations $(x_{Cb} + x_{Bl} + k, y_{Cb} + y_{Bl} - 1)$ and $(x_{Cb} + x_{Bl} + k, y_{Cb} + y_{Bl})$, and the variable tC as inputs, and the filtered sample values $p_{0'}$ and $q_{0'}$ as outputs.

[00499] 2. The filtered sample values $p0'$ and $q0'$ replace the corresponding samples inside the sample array s' as follows:

[00500] $s'[xCb + xBl + k][yCb + yBl] = q0'$ (8 913)

[00501] $s'[xCb + xBl + k][yCb + yBl - 1] = p0'$ (8 914)

[00502] 8.6.2.6.6 Decision process for a sample

[00503] Inputs to this process are:

[00504] – the sample values $p0$, $p3$, $q0$ and $q3$,

[00505] – the variables dpq , β and tC .

[00506] Output of this process is the variable $dSam$ containing a decision.

[00507] The variable $dSam$ is specified as follows:

[00508] – If dpq is less than $(\beta \gg 2)$, $Abs(p3 - p0) + Abs(q0 - q3)$ is less than $(\beta \gg 3)$ and $Abs(p0 - q0)$ is less than $(5 * tC + 1) \gg 1$, $dSam$ is set equal to 1.

[00509] – Otherwise, $dSam$ is set equal to 0.

[00510] 8.6.2.6.7 Filtering process for a sample

[00511] Inputs to this process are:

[00512] – the sample values pi and qi with $i = 0..3$,

[00513] – the locations of pi and qi , (xPi, yPi) and (xQi, yQi) with $i = 0..2$,

[00514] – a variable dE ,

[00515] – the variables dEp and dEq containing decisions to filter samples $p1$ and $q1$, respectively,

[00516] – a variable tC .

[00517] Outputs of this process are:

[00518] – the number of filtered samples nDp and nDq ,

[00519] – the filtered sample values pi' and qi' with $i = 0..nDp - 1, j = 0..nDq - 1$.

[00520] Depending on the value of dE , the following applies:

[00521] – If the variable dE is equal to 2, nDp and nDq are both set equal to 3 and the following strong filtering applies:

[00522] $p0' = Clip3(p0 - 2 * tC, p0 + 2 * tC, (p2 + 2 * p1 + 2 * p0 + 2 * q0 + q1 + 4) \gg 3)$ (8 915)

[00523] $p1' = Clip3(p1 - 2 * tC, p1 + 2 * tC, (p2 + p1 + p0 + q0 + 2) \gg 2)$ (8 916)

- [00524] $p2' = \text{Clip3}(p2 - 2 * tC, p2 + 2 * tC, (2 * p3 + 3 * p2 + p1 + p0 + q0 + 4) \gg 3)$
(8 917)
- [00525] $q0' = \text{Clip3}(q0 - 2 * tC, q0 + 2 * tC, (p1 + 2 * p0 + 2 * q0 + 2 * q1 + q2 + 4) \gg 3)$
(8 918)
- [00526] $q1' = \text{Clip3}(q1 - 2 * tC, q1 + 2 * tC, (p0 + q0 + q1 + q2 + 2) \gg 2)$ (8 919)
- [00527] $q2' = \text{Clip3}(q2 - 2 * tC, q2 + 2 * tC, (p0 + q0 + q1 + 3 * q2 + 2 * q3 + 4) \gg 3)$
(8 920)
- [00528] – Otherwise, nDp and nDq are set both equal to 0 and the following weak filtering applies:
- [00529] – The following applies:
- [00530] $\square = (9 * (q0 - p0) - 3 * (q1 - p1) + 8) \gg 4$ (8 921)
- [00531] – When Abs($\square$) is less than $tC * 10$, the following ordered steps apply:
- [00532] – The filtered sample values $p0'$ and $q0'$ are specified as follows:
- [00533] $\square = \text{Clip3}(-tC, tC, \square)$ (8 922)
- [00534] $p0' = \text{Clip1Y}(p0 + \square)$ (8 923)
- [00535] $q0' = \text{Clip1Y}(q0 - \square)$ (8 924)
- [00536] – When dEp is equal to 1, the filtered sample value $p1'$ is specified as follows:
- [00537] $\square p = \text{Clip3}(-(tC \gg 1), tC \gg 1, (((p2 + p0 + 1) \gg 1) - p1 + \square) \gg 1)$
(8 925)
- [00538] $p1' = \text{Clip1Y}(p1 + \square p)$ (8 926)
- [00539] – When dEq is equal to 1, the filtered sample value $q1'$ is specified as follows:
- [00540] $\square q = \text{Clip3}(-(tC \gg 1), tC \gg 1, (((q2 + q0 + 1) \gg 1) - q1 - \square) \gg 1)$
(8 927)
- [00541] $q1' = \text{Clip1Y}(q1 + \square q)$ (8 928)
- [00542] – nDp is set equal to dEp + 1 and nDq is set equal to dEq + 1.
- [00543] When nDp is greater than 0 and one or more of the following conditions are true, nDp is set equal to 0:
- [00544] – pcm_loop_filter_disabled_flag is equal to 1 and pcm_flag[xP0][yP0] is equal to 1.
- [00545] – cu_transquant_bypass_flag of the coding unit that includes the coding block

containing the sample p_0 is equal to 1.

[00546] When nDq is greater than 0 and one or more of the following conditions are true, nDq is set equal to 0:

[00547] – $pcm_loop_filter_disabled_flag$ is equal to 1 and $pcm_flag[xQ_0][yQ_0]$ is equal to 1.

[00548] – $cu_transquant_bypass_flag$ of the coding unit that includes the coding block containing the sample q_0 is equal to 1.

[00549] 8.6.2.6.8 Filtering process for a chroma sample

[00550] This process is only invoked when $ChromaArrayType$ is not equal to 0.

[00551] Inputs to this process are:

[00552] – the chroma sample values p_i and q_i with $i = 0..1$,

[00553] – the chroma locations of p_0 and q_0 , (xP_0, yP_0) and (xQ_0, yQ_0) ,

[00554] – a variable tC .

[00555] Outputs of this process are the filtered sample values p_0' and q_0' .

[00556] The filtered sample values p_0' and q_0' are derived as follows:

[00557] $\square = \text{Clip3}(-tC, tC, (((q_0 - p_0) \ll 2) + p_1 - q_1 + 4) \gg 3)$ (8 929)

[00558] $p_0' = \text{Clip1C}(p_0 + \square)$ (8 930)

[00559] $q_0' = \text{Clip1C}(q_0 - \square)$ (8 931)

[00560] When one or more of the following conditions are true, the filtered sample value, p_0' is substituted by the corresponding input sample value p_0 :

[00561] – $pcm_loop_filter_disabled_flag$ is equal to 1 and $pcm_flag[xP_0 * SubWidthC][yP_0 * SubHeightC]$ is equal to 1.

[00562] – $cu_transquant_bypass_flag$ of the coding unit that includes the coding block containing the sample p_0 is equal to 1.

[00563] When one or more of the following conditions are true, the filtered sample value, q_0' is substituted by the corresponding input sample value q_0 :

[00564] – $pcm_loop_filter_disabled_flag$ is equal to 1 and $pcm_flag[xQ_0 * SubWidthC][yQ_0 * SubHeightC]$ is equal to 1.

[00565] – $cu_transquant_bypass_flag$ of the coding unit that includes the coding block containing the sample q_0 is equal to 1.

[00566]

[00567] 8.6.3 Sample adaptive offset process

[00568] 8.6.3.1 General

[00569] Inputs to this process are the reconstructed picture sample array prior to sample adaptive offset `recPictureL` and, when `ChromaArrayType` is not equal to 0, the arrays `recPictureCb` and `recPictureCr`.

[00570] Outputs of this process are the modified reconstructed picture sample array after sample adaptive offset `saoPictureL` and, when `ChromaArrayType` is not equal to 0, the arrays `saoPictureCb` and `saoPictureCr`.

[00571] This process is performed on a CTB basis after the completion of the deblocking filter process for the decoded picture.

[00572] The sample values in the modified reconstructed picture sample array `saoPictureL` and, when `ChromaArrayType` is not equal to 0, the arrays `saoPictureCb` and `saoPictureCr` are initially set equal to the sample values in the reconstructed picture sample array `recPictureL` and, when `ChromaArrayType` is not equal to 0, the arrays `recPictureCb` and `recPictureCr`, respectively.

[00573] For every CTU with CTB location (rx, ry) , where $rx = 0..PicWidthInCtbsY - 1$ and $ry = 0..PicHeightInCtbsY - 1$, the following applies:

[00574] – When `tile_group_sao_luma_flag` of the current tile group is equal to 1, the CTB modification process as specified in clause 8.6.3.2 is invoked with `recPicture` set equal to `recPictureL`, `cIdx` set equal to 0, (rx, ry) , and both `nCtbSw` and `nCtbSh` set equal to `CtbSizeY` as inputs, and the modified luma picture sample array `saoPictureL` as output.

[00575] – When `ChromaArrayType` is not equal to 0 and `tile_group_sao_chroma_flag` of the current tile group is equal to 1, the CTB modification process as specified in clause 8.6.3.2 is invoked with `recPicture` set equal to `recPictureCb`, `cIdx` set equal to 1, (rx, ry) , `nCtbSw` set equal to $(1 \ll CtbLog2SizeY) / SubWidthC$ and `nCtbSh` set equal to $(1 \ll CtbLog2SizeY) / SubHeightC$ as inputs, and the modified chroma picture sample array `saoPictureCb` as output.

[00576] – When `ChromaArrayType` is not equal to 0 and `tile_group_sao_chroma_flag` of the current tile group is equal to 1, the CTB modification process as specified in clause 8.6.3.2 is invoked with `recPicture` set equal to `recPictureCr`, `cIdx` set equal to 2, (rx, ry) , `nCtbSw` set equal

to $(1 \ll \text{CtbLog2SizeY}) / \text{SubWidthC}$ and nCtbSh set equal to $(1 \ll \text{CtbLog2SizeY}) / \text{SubHeightC}$ as inputs, and the modified chroma picture sample array saoPictureCr as output.

[00577] 8.6.3.2 CTB modification process

[00578] Inputs to this process are:

[00579] – the picture sample array recPicture for the colour component cIdx ,

[00580] – a variable cIdx specifying the colour component index,

[00581] – a pair of variables (rx, ry) specifying the CTB location,

[00582] – the CTB width nCtbSw and height nCtbSh .

[00583] Output of this process is a modified picture sample array saoPicture for the colour component cIdx .

[00584] The variable bitDepth is derived as follows:

[00585] – If cIdx is equal to 0, bitDepth is set equal to BitDepthY .

[00586] – Otherwise, bitDepth is set equal to BitDepthC .

[00587] The location $(\text{xCtb}, \text{yCtb})$, specifying the top-left sample of the current CTB for the colour component cIdx relative to the top-left sample of the current picture component cIdx , is derived as follows:

[00588] $(\text{xCtb}, \text{yCtb}) = (\text{rx} * \text{nCtbSw}, \text{ry} * \text{nCtbSh})$ (8 932)

[00589] The sample locations inside the current CTB are derived as follows:

[00590] $(\text{xSi}, \text{ySj}) = (\text{xCtb} + i, \text{yCtb} + j)$ (8 933)

[00591] $(\text{xYi}, \text{yYj}) = (\text{cIdx} == 0) ? (\text{xSi}, \text{ySj}) : (\text{xSi} * \text{SubWidthC}, \text{ySj} * \text{SubHeightC})$
(8 934)

[00592] For all sample locations (xSi, ySj) and (xYi, yYj) with $i = 0.. \text{nCtbSw} - 1$ and $j = 0.. \text{nCtbSh} - 1$, depending on the values of $\text{pcm_loop_filter_disabled_flag}$, $\text{pcm_flag}[\text{xYi}][\text{yYj}]$ and $\text{cu_transquant_bypass_flag}$ of the coding unit which includes the coding block covering $\text{recPicture}[\text{xSi}][\text{ySj}]$, the following applies:

[00593] – If one or more of the following conditions are true, $\text{saoPicture}[\text{xSi}][\text{ySj}]$ is not modified:

[00594] – $\text{pcm_loop_filter_disabled_flag}$ and $\text{pcm_flag}[\text{xYi}][\text{yYj}]$ are both equal to 1.

[00595] – $\text{cu_transquant_bypass_flag}$ is equal to 1.

[00596] – $\text{SaoTypeIdx}[\text{cIdx}][\text{rx}][\text{ry}]$ is equal to 0.

[00597] [Ed. (BB): Modify highlighted sections preending on future decision transform/quantizaion bypass.]

[00598] – Otherwise, if $\text{SaoTypeIdx}[\text{cIdx}][\text{rx}][\text{ry}]$ is equal to 2, the following ordered steps apply:

[00599] 1. The values of $\text{hPos}[k]$ and $\text{vPos}[k]$ for $k = 0..1$ are specified in Table 8 19 based on $\text{SaoEoClass}[\text{cIdx}][\text{rx}][\text{ry}]$.

[00600] 2. The variable edgeIdx is derived as follows:

[00601] – The modified sample locations $(\text{xSik}', \text{ySjk}')$ and $(\text{xYik}', \text{yYjk}')$ are derived as follows:

[00602] $(\text{xSik}', \text{ySjk}') = (\text{xSi} + \text{hPos}[k], \text{ySj} + \text{vPos}[k])$ (8 935)

[00603] $(\text{xYik}', \text{yYjk}') = (\text{cIdx} == 0) ? (\text{xSik}', \text{ySjk}') : (\text{xSik}' * \text{SubWidthC}, \text{ySjk}' * \text{SubHeightC})$ (8 936)

[00604] – If one or more of the following conditions for all sample locations $(\text{xSik}', \text{ySjk}')$ and $(\text{xYik}', \text{yYjk}')$ with $k = 0..1$ are true, edgeIdx is set equal to 0:

[00605] – The sample at location $(\text{xSik}', \text{ySjk}')$ is outside the picture boundaries.

[00606] – The sample at location $(\text{xSik}', \text{ySjk}')$ belongs to a different tile group and one of the following two conditions is true:

[00607] – $\text{MinTbAddrZs}[\text{xYik}' \gg \text{MinTbLog2SizeY}][\text{yYjk}' \gg \text{MinTbLog2SizeY}]$ is less than $\text{MinTbAddrZs}[\text{xYi} \gg \text{MinTbLog2SizeY}][\text{yYj} \gg \text{MinTbLog2SizeY}]$ and $\text{tile_group_loop_filter_across_tile_groups_enabled_flag}$ in the tile group which the sample $\text{recPicture}[\text{xSi}][\text{ySj}]$ belongs to is equal to 0.

[00608] – $\text{MinTbAddrZs}[\text{xYi} \gg \text{MinTbLog2SizeY}][\text{yYj} \gg \text{MinTbLog2SizeY}]$ is less than $\text{MinTbAddrZs}[\text{xYik}' \gg \text{MinTbLog2SizeY}][\text{yYjk}' \gg \text{MinTbLog2SizeY}]$ and $\text{tile_group_loop_filter_across_tile_groups_enabled_flag}$ in the tile group which the sample $\text{recPicture}[\text{xSik}'][\text{ySjk}']$ belongs to is equal to 0.

[00609] – $\text{loop_filter_across_tiles_enabled_flag}$ is equal to 0 and the sample at location $(\text{xSik}', \text{ySjk}')$ belongs to a different tile.

[00610] [Ed. (BB): Modify highlighted sections when tiles without tile groups are incorporated]

[00611] – Otherwise, edgeIdx is derived as follows:

[00612] – The following applies:

[00613] $\text{edgeIdx} = 2 + \text{Sign}(\text{recPicture}[\text{xSi}][\text{ySj}] - \text{recPicture}[\text{xSi} + \text{hPos}[0]][\text{ySj} + \text{vPos}[0]]) +$

[00614] $\text{Sign}(\text{recPicture}[\text{xSi}][\text{ySj}] - \text{recPicture}[\text{xSi} + \text{hPos}[1]][\text{ySj} + \text{vPos}[1]])$ (8 937)

[00615] – When edgeIdx is equal to 0, 1, or 2, edgeIdx is modified as follows:

[00616] $\text{edgeIdx} = (\text{edgeIdx} == 2) ? 0 : (\text{edgeIdx} + 1)$ (8 938)

[00617] 3. The modified picture sample array $\text{saoPicture}[\text{xSi}][\text{ySj}]$ is derived as follows:

[00618] $\text{saoPicture}[\text{xSi}][\text{ySj}] = \text{Clip3}(0, (1 \ll \text{bitDepth}) - 1, \text{recPicture}[\text{xSi}][\text{ySj}] +$

[00619] $\text{SaoOffsetVal}[\text{cIdx}][\text{rx}][\text{ry}][\text{edgeIdx}])$ (8 939)

[00620] – Otherwise ($\text{SaoTypeIdx}[\text{cIdx}][\text{rx}][\text{ry}]$ is equal to 1), the following ordered steps apply:

[00621] 1. The variable bandShift is set equal to $\text{bitDepth} - 5$.

[00622] 2. The variable saoLeftClass is set equal to $\text{sao_band_position}[\text{cIdx}][\text{rx}][\text{ry}]$.

[00623] 3. The list bandTable is defined with 32 elements and all elements are initially set equal to 0. Then, four of its elements (indicating the starting position of bands for explicit offsets) are modified as follows:

[00624] for($k = 0; k < 4; k++$)

[00625] $\text{bandTable}[(k + \text{saoLeftClass}) \& 31] = k + 1$ (8 940)

[00626] 4. The variable bandIdx is set equal to $\text{bandTable}[\text{recPicture}[\text{xSi}][\text{ySj}]] \gg \text{bandShift}$.

[00627] 5. The modified picture sample array $\text{saoPicture}[\text{xSi}][\text{ySj}]$ is derived as follows:

[00628] $\text{saoPicture}[\text{xSi}][\text{ySj}] = \text{Clip3}(0, (1 \ll \text{bitDepth}) - 1, \text{recPicture}[\text{xSi}][\text{ySj}] +$

[00629] $\text{SaoOffsetVal}[\text{cIdx}][\text{rx}][\text{ry}][\text{bandIdx}])$ (8 941)

[00630] Table 8 19 – Specification of hPos and vPos according to the sample adaptive offset class

[00631] $\text{SaoEoClass}[\text{cIdx}][\text{rx}][\text{ry}]$ 0 1 2 3

[00632] $\text{hPos}[0]$ -1 0 -1 1

[00633] $\text{hPos}[1]$ 1 0 1 -1

[00634] $\text{vPos}[0]$ 0 -1 -1 -1

[00635] $vPos[1] = 0 \quad 1 \quad 1 \quad 1$

[00636] The sub-block based prediction techniques discussed above can be used to obtain more accurate motion information of each sub-block when the size of sub-blocks is smaller. However, smaller sub-blocks impose a higher bandwidth requirement in motion compensation. On the other hand, motion information derived for smaller sub-block may not be accurate, especially when there are some noises in a block. Therefore, having a fixed sub-block size within one block may be suboptimal.

[00637] This document describes techniques that can be used in various embodiments to use non-uniform and/or variable sub-block sizes to address the bandwidth and accuracy problems that a fixed sub-block size introduces. The techniques, also referred to as interleaved prediction, use different ways of dividing a block so that motion information can be obtained more robustly without increasing bandwidth consumption.

[00638] Using the interleaved prediction techniques, a block is divided into sub-blocks with one or more dividing patterns. A dividing pattern represents the way to divide a block into sub-blocks, including the size of sub-blocks and the position of sub-blocks. For each dividing pattern, a corresponding prediction block may be generated by deriving motion information of each sub-block based on the dividing pattern. Therefore, in some embodiments, multiple prediction blocks may be generated by multiple dividing patterns even for one prediction direction. In some embodiments, for each prediction direction, only one dividing pattern may be applied.

[00639] FIG. 13 shows an example of interleaved prediction with two dividing patterns in accordance with the disclosed technology. A current block 1300 can be divided into multiple patterns. For example, as shown in FIG. 13, the current block is divided into both Pattern 0 (1301) and Pattern 1 (1302). Two prediction blocks, P_0 (1303) and P_1 (1304), are generated. A final prediction block P (1305) of the current block 1300 can be generated by computing a weighted sum of P_0 (1303) and P_1 (1304).

[00640] More generally, given X dividing patterns, X prediction blocks of the current block, denoted as $P_0, P_1, \dots, P_{X-1}$, can be generated by sub-block based prediction with the X dividing patterns. The final prediction of the current block, denoted as P , can be generated as

[00641]
$$P(x, y) = \frac{\sum_{i=0}^{X-1} w_i(x, y) \times P_i(x, y)}{\sum_{i=0}^{X-1} w_i(x, y)} \quad \text{Eq. (15)}$$

[00642] Here, (x, y) is the coordinate of a pixel in the block and $w_i(x, y)$ is the weighting value of P_i . By the way of example, and not by limitation, the weights can be expressed as:

[00643]
$$\sum_{i=0}^{X-1} w_i(x, y) = (1 \ll N) \quad \text{Eq. (16)}$$

[00644] N is a non-negative value. Alternatively, the bit-shifting operation in Eq. (16) can also be expressed as:

[00645]
$$\sum_{i=0}^{X-1} w_i(x, y) = 2^N \quad \text{Eq. (17)}$$

[00646] The sum of the weights being a power of two allows a more efficient computation of the weighted sum P by performing a bit-shifting operation instead of a floating-point division.

[00647] In the below, various implementations are presented as separate sections and items. The different sections and items are used in the present document only to facilitate ease of understanding and scope of the embodiments and techniques described in each section/item are not only limited to that section/item.

[00648] **Usage of interweaved prediction for different coding tools**

[00649] **Item 1:** It is noted that the interweaved prediction techniques disclosed herein can be applied in one, some, or all coding techniques of sub-block based prediction. For example, the interweaved prediction techniques can be applied to affine prediction, while other coding techniques of sub-block based prediction (e.g., ATMVP, STMVP, FRUC or BIO) do not use the interweaved prediction. As another example, all of affine, ATMVP, and STMVP apply the interweaved prediction techniques disclosed herein.

[00650] **Definitions of dividing patterns**

[00651] **Item 2:** Dividing patterns can have different shapes, or sizes, or positions of sub-blocks. In some embodiments, a dividing pattern may include irregular sub-block sizes. FIGS. 14A-G show several examples of dividing patterns for a 16×16 block. In FIG. 14A, a block is divided into 4×4 sub-blocks in accordance with the disclosed technology. This pattern is also used in JEM. FIG. 14B shows an example of a block being divided into 8×8 sub-blocks in accordance with the disclosed technology. FIG. 14C shows an example of the block being divided into 8×4 sub-blocks in accordance with the disclosed technology. FIG. 14D shows an example of the block being divided into 4×8 sub-blocks in accordance with the disclosed

technology. In FIG. 14E, a portion of the block is divided into 4×4 sub-blocks in accordance with the disclosed technology. The pixels at block boundaries are divided in smaller sub-blocks with sizes like 2×4 , 4×2 or 2×2 . Some sub-blocks may be merged to form larger sub-blocks. FIG. 14F shows an example of adjacent sub-blocks, such as 4×4 sub-blocks and 2×4 sub-blocks, that are merged to form larger sub-blocks with sizes like 6×4 , 4×6 or 6×6 . In FIG. 14G, a portion of the block is divided into 8×8 sub-blocks. The pixels at block boundaries are divided in smaller sub-blocks with sizes like 8×4 , 4×8 or 4×4 instead.

[00652] Item 3: The shapes and sizes of sub-blocks in sub-block based prediction can be determined based on the shape and/or size of the coding block and/or coded block information. For example, in some embodiments, the sub-blocks have a size of $4 \times N$ (or $8 \times N$, etc.) when the current block has a size of $M \times N$. That is, the sub-blocks have the same height as the current block. In some embodiments, the sub-blocks have a size of $M \times 4$ (or $M \times 8$, etc.) when the current block has a size of $M \times N$. That is, the sub-blocks have the same width as the current block. In some embodiments, the sub-blocks have a size of $A \times B$ with $A > B$ (e.g., 8×4) when the current block has a size of $M \times N$, where $M > N$. Alternatively, the sub-blocks can have the size of $B \times A$ (e.g., 4×8). In some embodiments, the current block has a size of $M \times N$. The sub-blocks have a size of $A \times B$ when $M \times N \leq T$ (or $\text{Min}(M, N) \leq T$, or $\text{Max}(M, N) \leq T$, etc.), and the sub-blocks have a size of $C \times D$ when $M \times N > T$ (or $\text{Min}(M, N) > T$, or $\text{Max}(M, N) > T$, etc.), where $A \leq C$ and $B \leq D$. For example, if $M \times N \leq 256$, sub-blocks can be in a size of 4×4 . In some implementations, the sub-blocks have a size of 8×8 .

[00653] Enabling/disabling interweaved prediction and coding process of interweaved prediction

[00654] Item 4: In some embodiments, whether to apply interweaved prediction can be determined based on the inter-prediction direction. For example, in some embodiments, the interweaved prediction may be applied for bi-prediction but not for uni-prediction. As another example, when multiple-hypothesis is applied, the interweaved prediction may be applied for one prediction direction when there are more than one reference blocks.

[00655] Item 5: In some embodiments, how to apply interweaved prediction may also be determined based on the inter-prediction direction. In some embodiments, a bi-predicted block with sub-block based prediction is divided into sub-blocks with two different dividing patterns

for two different reference lists. For example, a bi-predicted block is divided into 4×8 sub-blocks as shown in FIG. 14D when predicted from reference list 0 (L0). The same block is divided into 8×4 sub-blocks as shown in FIG. 14C when predicted from reference list 1 (L1). The final prediction P is calculated as

$$[00656] \quad P(x, y) = \frac{w^0(x, y) \times P^0(x, y) + w^1(x, y) \times P^1(x, y)}{w^0(x, y) + w^1(x, y)} \quad \text{Eq. (18)}$$

[00657] Here, P^0 and P^1 are predictions from L0 and L1, respectively. w^0 and w^1 are weighting values for L0 and L1, respectively. As shown in Eq. (16), the weighting values can be determined as: $w^0(x, y) + w^1(x, y) = 1 \ll N$ (wherein N is non-negative integer value). Because fewer sub-blocks are used for prediction in each direction (e.g., 4×8 sub-blocks as opposed to 8×8 sub-blocks), the computation requires less bandwidth as compared to the existing sub-block based methods. By using larger sub-blocks, the prediction results are also less susceptible to noise interference.

[00658] In some embodiments, a uni-predicted block with sub-block based prediction is divided into sub-blocks with two or more different dividing patterns for the same reference list. For example, the prediction for list L ($L = 0$ or 1) P^L is calculated as

$$[00659] \quad P^L(x, y) = \frac{\sum_{i=0}^{XL-1} w_i^L(x, y) \times P_i^L(x, y)}{\sum_{i=0}^{XL-1} w_i^L(x, y)} \quad \text{Eq. (19)}$$

[00660] Here XL is the number of dividing patterns for list L . $P_i^L(x, y)$ is the prediction generated with the i^{th} dividing pattern and $w_i^L(x, y)$ is the weighting value of $P_i^L(x, y)$. For example, when XL is 2, two dividing patterns are applied for list L . In the first dividing pattern, the block is divided into 4×8 sub-blocks as shown in FIG. 14D. In the second dividing pattern, the block is divided into 8×4 sub-blocks as shown in FIG. 14D.

[00661] In some embodiments, a bi-predicted block with sub-block based prediction is considered as a combination of two uni-predicted block from L0 and L1 respectively. The prediction from each list can be derived as described in the above example. The final prediction P can be calculated as

$$[00662] \quad P(x, y) = \frac{a * \frac{\sum_{i=0}^{XL0-1} w_i^0(x, y) \times P_i^0(x, y)}{\sum_{i=0}^{XL0-1} w_i^0(x, y)} + b * \frac{\sum_{i=0}^{XL1-1} w_i^1(x, y) \times P_i^1(x, y)}{\sum_{i=0}^{XL1-1} w_i^1(x, y)}}{a + b} \quad \text{Eq. (20)}$$

[00663] Here parameters a and b are two additional weights applied to the two internal prediction blocks. In this specific example, both a and b can be set to 1. Similar to the example

above, because fewer sub-blocks are used for prediction in each direction (e.g., 4×8 sub-blocks as opposed to 8×8 sub-blocks), the bandwidth usage is better than or on par with the existing sub-block based methods. At the same time, the prediction results can be improved by using larger sub-blocks.

[00664] In some embodiments, a single non-uniform pattern can be used in each uni-predicted block. For example, for each list L (e.g., L0 or L1), the block is divided into a different pattern (e.g., as shown in FIG. 14E or FIG. 14F). The use of a smaller number of sub-blocks reduces the demand on bandwidth. The non-uniformity of the sub-blocks also increases robustness of the prediction results.

[00665] In some embodiments, for a multiple-hypothesis coded block, there can be more than one prediction blocks generated by different dividing patterns for each prediction direction (or reference picture list). Multiple prediction blocks can be used to generate the final prediction with additional weights applied. For example, the additional weights may be set to $1/M$ wherein M is the total number of generated prediction blocks.

[00666] **Item 6:** In some embodiments, the encoder can determine whether and how to apply the interweaved prediction. The encoder then can transmit information corresponding to the determination to the decoder at a sequence level, a picture level, a view level, a slice level, a Coding Tree Unit (CTU) (also known as a Largest Coding Unit (LCU)) level, a CU level, a PU level, a Tree Unit (TU) level, tile level, tile group level, or a region level (which may include multiple CUs/PUs/TUs/LCUs). The information can be signaled in a Sequence Parameter Set (SPS), a view parameter set (VPS), a Picture Parameter Set (PPS), a Slice Header (SH), a picture header, a sequence header, or tile level or tile group level, a CTU/LCU, a CU, a PU, a TU, or a first block of a region.

[00667] In some implementations, the interweaved prediction applies to existing sub-block methods like the affine prediction, ATMVP, STMVP, FRUC, or BIO. In such cases, no additional signaling cost is needed. In some implementations, new sub-block merge candidates generated by the interweaved prediction can be inserted into a merge list, e.g., interweaved prediction + ATMVP, interweaved prediction + STMVP, interweaved prediction + FRUC etc. In some implementations, a flag may be signaled to indicate whether interweaved prediction is used or not. In one example, a flag signaled to indicate whether interweaved prediction is used or not,

if the current block is affine inter-coded. In some implementations, a flag may be signaled to indicate whether interweaved prediction is used or not, if the current block is affine merge-coded and applies uni-prediction. In some implementations, a flag may be signaled to indicate whether interweaved prediction is used or not, if the current block is affine merge-coded. In some implementations, interweaved prediction may be always used if the current block is affine merge-coded and applies uni-prediction. In some implementations, interweaved prediction may be always used if the current block is affine merge-coded.

[00668] In some implementations, the flag to indicate whether interweaved prediction is used or not may be inherited without being signaled. Some examples include:

[00669] (i) In one example, the inheritance may be used if the current block is affine merge-coded.

[00670] (ii) In one example, the flag may be inherited from the flag of the neighboring block where the affine model is inherited from.

[00671] (iii) In one example, the flag is inherited from a predefined neighboring block such as the left or above neighboring block.

[00672] (iv) In one example, the flag may be inherited from the first encountered affine-coded neighboring block.

[00673] (v) In one example, the flag may be inferred to be zero if no neighbouring block is affine-coded.

[00674] (vi) In one example, the flag may be only inherited when the current block applies uni-prediction.

[00675] (vii) In one example, the flag may be only inherited when the current block and the neighboring block to be inherited from are in the same CTU.

[00676] (viii) In one example, the flag may be only inherited when the current block and the neighboring block to be inherited from are in the same CTU row.

[00677] (ix) In one example, the flag may not be inherited from the flag of the neighboring block when the affine model is derived from a temporal neighboring block.

[00678] (x) In one example, the flag may not be inherited from the flag of a neighboring block which is not located in the same LCU or LCU row or video data processing unit (such as 64x64, or 128x128).

[00679] (xi) In one example, how to signal and/or derive the flag may depend on the block dimension of the current block and/or coded information.

[00680] In some implementations, interweaved prediction is not applied if the reference picture is the current picture. For example, the flag to indicate whether interweaved prediction is used or not is not signaled if the reference picture is the current picture.

[00681] In some embodiments, the dividing patterns to be used by the current block can be derived based on information from spatial and/or temporal neighboring blocks. For example, instead of relying on the encoder to signal the relevant information, both encoder and decoder can adopt a set of predetermined rules to obtain dividing patterns based on temporal adjacency (e.g., previously used dividing patterns of the same block) or spatial adjacency (e.g., dividing patterns used by neighboring blocks).

[00682] **Weighting values**

[00683] **Item 7:** In some embodiments, the weighting values w can be fixed. For example, all dividing patterns can be weighted equally: $w_i(x, y) = 1$.

[00684] **Item 8:** In some embodiments, the weighting values can be determined based on positions of blocks as well as the dividing patterns used. For example, $w_i(x, y)$ may be different for different (x, y) . In some embodiments, the weighting values may further depend on the sub-block prediction based coding techniques (e.g., affine, or ATMVP) and/or other coded information (e.g., skip or non-skip modes, and/or MV information).

[00685] **Item 9:** In some embodiments, the encoder can determine the weighting values, and transmit the values to the decoder at sequence level, picture level, slice level, CTU/LCU level, CU level, PU level, or region level (which may include multiple CUs/PUs/Tus/LCUs). The weighting values can be signaled in a Sequence Parameter Set (SPS), a Picture Parameter Set (PPS), a Slice Header (SH), a CTU/LCU, a CU, a PU, or a first block of a region. In some embodiments, the weighting values can be derived from the weighting values of a spatial and/or temporal neighboring block.

[00686] **Partial interweaved prediction**

[00687] **Item 10:** In some embodiments, partial interweaved prediction may be achieved as follow.

[00688] In some embodiments, interweaved prediction is applied to a part of the current

block. Prediction samples at some positions are calculated as the weighted sum of two or more sub-block based predictions. Prediction samples at other positions are not used for the weighted sum. For example, these prediction samples are copied from the sub-block based prediction with a certain dividing pattern.

[00689] In some embodiments, the current block is predicted by sub-block based prediction P1 and P2 with dividing pattern D0 and dividing pattern D1, respectively. The final prediction is calculated as $P = w_0 \times P_0 + w_1 \times P_1$. At some positions, $w_0 \neq 0$ and $w_1 \neq 0$. But at some other positions, $w_0 = 1$ and $w_1 = 0$, that is, interweaved prediction is not applied at those positions.

[00690] In some embodiments, interweaved prediction is not applied on four corner sub-blocks as shown in FIG. 15A.

[00691] In some embodiments, interweaved prediction is not applied on the left-most column of sub-blocks and right-most column of sub-blocks as shown in FIG. 15B.

[00692] In some embodiments, interweaved prediction is not applied on the top-most row of sub-blocks and bottom-most row of sub-blocks as shown in FIG. 15C.

[00693] In some embodiments, interweaved prediction is not applied on the top-most row of row of sub-blocks, bottom-most row of sub-blocks the left-most column of sub-blocks and right-most column of sub-blocks as shown in FIG. 15D.

[00694] In some embodiments, whether to and how to apply partial interweaved prediction may depend on the size/shape of the current block.

[00695] For example, in some embodiments, interweaved prediction is applied to the whole block if the size of the current block satisfies certain conditions; otherwise, interweaved prediction is applied to a part (or some parts) of the block. The conditions include but not limited to: (suppose the width and height of the current block is W and H respectively and T, T1, T2 are integer values):

[00696] $W \geq T_1$ and $H \geq T_2$;

[00697] $W \leq T_1$ and $H \leq T_2$;

[00698] $W \geq T_1$ or $H \geq T_2$;

[00699] $W \leq T_1$ or $H \leq T_2$;

[00700] $W + H \geq T$

[00701] $W + H \leq T$

[00702] $W \times H \geq T$

[00703] $W \times H \leq T$

[00704] In some embodiments, the partial interweaved prediction is applied to a portion of the current block that is smaller than the current block. For example, in some embodiments, the portion of the block excludes sub-blocks as follows. In some embodiments, interweaved prediction is not applied on the left-most column of sub-blocks and right-most column of sub-blocks as shown in FIG. 15B if $W \geq H$; Otherwise, interweaved prediction is not applied on the top-most row of sub-blocks and bottom-most row of sub-blocks as shown in FIG. 15C.

[00705] For example, in some embodiments, interweaved prediction is not applied on the left-most column of sub-blocks and right-most column of sub-blocks as shown in FIG. 15B if $W > H$; Otherwise, interweaved prediction is not applied on the top-most row of sub-blocks and bottom-most row of sub-blocks as shown in FIG. 15C.

[00706] In some embodiments, whether and how to apply interweaved prediction may be different for different regions in a block. For example, suppose the current block is predicted by sub-block based prediction P1 and P2 with dividing pattern D0 and dividing pattern D1, respectively. The final prediction is calculated as $P(x, y) = w_0 \times P_0(x, y) + w_1 \times P_1(x, y)$. If the position (x, y) belongs to a sub-block with dimensions $S_0 \times H_0$ with the dividing pattern D0; and belongs to a sub-block $S_1 \times H_1$ with the dividing pattern D1. If one or several following conditions are satisfied, set $w_0 = 1$ and $w_1 = 0$ (e.g., interweaved prediction is not applied at this position):

[00707] $S_1 < T_1$;

[00708] $H_1 < T_2$;

[00709] $S_1 < T_1$ and $H_1 < T_2$; or

[00710] $S_1 < T_1$ or $H_1 < T_2$,

[00711] Herein, T_1 and T_2 are integers. For example, $T_1 = T_2 = 4$.

[00712] **Examples of Techniques incorporated within Encoder Embodiments**

[00713] **Item 11:** In some embodiments, interweaved prediction is not applied in the motion estimation (ME) process.

[00714] For example, interweaved prediction is not applied in the ME process for the 6-parameter affine prediction.

[00715] For example, interweaved prediction is not applied in the ME process if the size of the current block satisfies certain conditions such as follows. Here, it is assumed that the width and height of the current block is W and H respectively and T, T1, T2 are integer values:

[00716] $W \geq T1$ and $H \geq T2$;

[00717] $W \leq T1$ and $H \leq T2$;

[00718] $W \geq T1$ or $H \geq T2$;

[00719] $W \leq T1$ or $H \leq T2$;

[00720] $W+H \geq T$

[00721] $W+H \leq T$

[00722] $W \times H \geq T$

[00723] $W \times H \leq T$

[00724] For example, interweaved prediction is omitted in the ME process if the current block is split from a parent block, and the parent block does not choose affine mode at encoder.

[00725] Alternatively, affine mode is not checked at encoder if the current block is split from a parent block, and the parent block does not choose affine mode at encoder.

[00726] **Exemplary embodiments for MV derivation**

[00727] In the following examples, $SatShift(x, n)$ is defined as

$$[00728] \quad SatShift(x, n) = \begin{cases} (x + offset0) \gg n & \text{if } x \geq 0 \\ -((-x + offset1) \gg n) & \text{if } x < 0 \end{cases}$$

[00729] $Shift(x, n)$ is defined as $Shift(x, n) = (x + offset0) \gg n$. In one example, $offset0$ and/or $offset1$ are set to $(1 \ll n) \gg 1$ or $(1 \ll (n-1))$. In another example, $offset0$ and/or $offset1$ are set to 0.

[00730] **Item 12:** In some embodiments, the MV of each sub-block within one dividing pattern may be derived from the affine model (such as with Eq.(1)) directly, or it may be derived from MVs of sub-blocks within another dividing pattern.

[00731] (a) In one example, the MV of a sub-block B with dividing pattern 0, may be derived from MVs of all or some of the sub-blocks within dividing pattern 1, that overlap with sub-block B.

[00732] (b) FIGS. 16A–16C show some examples. In FIG. 16A, $MV1(x,y)$ of a specific sub-block within dividing pattern 1 is to be derived. FIG. 16B shows dividing pattern 0 (solid) and dividing pattern 1 (dashed) in the block, indicating that there are four sub-blocks with in

dividing pattern 0 overlapping with the specific sub-block within dividing pattern 1. FIG. 16C shows the four MVs: $MV^0_{(x-2,y-2)}$, $MV^0_{(x+2,y-2)}$, $MV^0_{(x-2,y+2)}$ and $MV^0_{(x+2,y+2)}$ of the four sub-blocks within dividing pattern 0 overlapping with the specific sub-block within dividing pattern 1. Then $MV^1_{(x,y)}$ will be derived from $MV^0_{(x-2,y-2)}$, $MV^0_{(x+2,y-2)}$, $MV^0_{(x-2,y+2)}$ and $MV^0_{(x+2,y+2)}$.

[00733] (c) Suppose MV' of one sub-block within dividing pattern 1 is derived from $MV_0, MV_1, MV_2, \dots, MV_k$ of $k-1$ sub-blocks within dividing pattern 0. MV' may be derived as:

[00734] (i) $MV' = MV_n$, n is any of $0 \dots k$.

[00735] (ii) $MV' = f(MV_0, MV_1, MV_2, \dots, MV_k)$. f is a linear function.

[00736] (iii) $MV' = f(MV_0, MV_1, MV_2, \dots, MV_k)$. f is a non-linear function.

[00737] (iv) $MV' = \text{Average}(MV_0, MV_1, MV_2, \dots, MV_k)$. Average is an averaging operation.

[00738] (v) $MV' = \text{Median}(MV_0, MV_1, MV_2, \dots, MV_k)$. Median is an operation to get the median value.

[00739] (vi) $MV' = \text{Max}(MV_0, MV_1, MV_2, \dots, MV_k)$. Max is an operation to get the maximum value.

[00740] (vii) $MV' = \text{Min}(MV_0, MV_1, MV_2, \dots, MV_k)$. Min is an operation to get the minimum value.

[00741] (viii) $MV' = \text{MaxAbs}(MV_0, MV_1, MV_2, \dots, MV_k)$. MaxAbs is an operation to get the value with the maximum absolute value.

[00742] (ix) $MV' = \text{MinAbs}(MV_0, MV_1, MV_2, \dots, MV_k)$. MinAbs is an operation to get the value with the minimum absolute value.

[00743] (x) Take FIG. 16A as an example, $MV^1_{(x,y)}$ may be derived as:

[00744] 1. $MV^1_{(x,y)} = \text{SatShift}(MV_0(x-2,y-2) + MV_0(x+2,y-2) + MV_0(x-2,y+2) + MV_0(x+2,y+2), 2);$

[00745] 2. $MV^1_{(x,y)} = \text{Shift}(MV_0(x-2,y-2) + MV_0(x+2,y-2) + MV_0(x-2,y+2) + MV_0(x+2,y+2), 2);$

[00746] 3. $MV^1_{(x,y)} = \text{SatShift}(MV_0(x-2,y-2) + MV_0(x+2,y-2), 1);$

[00747] 4. $MV^1_{(x,y)} = \text{Shift}(MV_0(x-2,y-2) + MV_0(x+2,y-2), 1);$

[00748] 5. $MV^1_{(x,y)} = \text{SatShift}(MV_0(x-2,y+2) + MV_0(x+2,y+2), 1);$

[00749] 6. $MV^1_{(x,y)} = \text{Shift}(MV_0(x-2,y+2) + MV_0(x+2,y+2), 1);$

- [00750] 7. $MV^1_{(x,y)} = \text{SatShift}(MV^0_{(x-2,y-2)} + MV^0_{(x+2,y+2)}, 1);$
- [00751] 8. $MV^1_{(x,y)} = \text{Shift}(MV^0_{(x-2,y-2)} + MV^0_{(x+2,y+2)}, 1);$
- [00752] 9. $MV^1_{(x,y)} = \text{SatShift}(MV^0_{(x-2,y-2)} + MV^0_{(x-2,y+2)}, 1);$
- [00753] 10. $MV^1_{(x,y)} = \text{Shift}(MV^0_{(x-2,y-2)} + MV^0_{(x-2,y+2)}, 1);$
- [00754] 11. $MV^1_{(x,y)} = \text{SatShift}(MV^0_{(x+2,y-2)} + MV^0_{(x+2,y+2)}, 1);$
- [00755] 12. $MV^1_{(x,y)} = \text{Shift}(MV^0_{(x+2,y-2)} + MV^0_{(x+2,y+2)}, 1);$
- [00756] 13. $MV^1_{(x,y)} = \text{SatShift}(MV^0_{(x+2,y-2)} + MV^0_{(x-2,y+2)}, 1);$
- [00757] 14. $MV^1_{(x,y)} = \text{Shift}(MV^0_{(x+2,y-2)} + MV^0_{(x-2,y+2)}, 1);$
- [00758] 15. $MV^1_{(x,y)} = MV^0_{(x-2,y-2)};$
- [00759] 16. $MV^1_{(x,y)} = MV^0_{(x+2,y-2)};$
- [00760] 17. $MV^1_{(x,y)} = MV^0_{(x-2,y+2)};$ or
- [00761] 18. $MV^1_{(x,y)} = MV^0_{(x+2,y+2)}.$

[00762] **Item 13:** In some embodiments, how to select the dividing pattern may depend on the width and height of the current block.

[00763] (a) For example, if width > T1 and height > T2 (e.g. T1=T2=4), two dividing patterns are selected. FIG. 17A shows an example of two dividing patterns.

[00764] (b) For example, if height ≤ T2 (e.g. T2=4), another two dividing patterns are selected. FIG. 17B shows an example of two dividing patterns.

[00765] (c) For example, if width ≤ T1 (e.g. T1=4), yet another two dividing patterns are selected. FIG. 17C shows an example of two dividing patterns.

[00766] **Item 14:** In some embodiments, the MV of each sub-block within one dividing pattern of one color component C1 may be derived from MVs of sub-blocks within another dividing pattern of another color component C0.

[00767] (a) For example, C1 refers to color component coded/decoded after another color component, such as Cb or Cr or U or V or R or B.

[00768] (b) For example, C0 refers to color component coded/decoded before another color component, such as Y or G.

[00769] (c) In one example, how to derive MV of a sub-block within one dividing pattern of one color component from MVs of sub-blocks within another dividing pattern of another color component may depend on the color format, such as 4:2:0, or 4:2:2, or 4:4:4.

[00770] (d) In one example, the MV of a sub-block B in color component C1 with dividing pattern C1Pt ($t=0$ or 1), may be derived from MVs of all or some of the sub-blocks in color component C0 within dividing pattern C0Pr ($r=0$ or 1), that overlap with sub-block B, after down-scaling or up-scaling the coordinates according to the color format.

[00771] (i) In one example, C0Pr is always equal to C0P0.

[00772] (e) FIGS. 18A and 18B show two examples. The color format is 4:2:0. MVs of sub-blocks in Cb component are derived from MVs of sub-blocks in Y component.

[00773] (i) In FIG. 18A left, $MV^{Cb0}_{(x',y')}$ of a specific Cb sub-block B within dividing pattern 0 is to be derived. FIG. 18A right shows four Y sub-blocks with in dividing pattern 0, which are overlapped with Cb sub-block B when down-scaled by 2:1. Suppose $x = 2*x'$ and $y=2*y'$, four MVs: $MV^0_{(x-2,y-2)}$, $MV^0_{(x+2,y-2)}$, $MV^0_{(x-2,y+2)}$ and $MV^0_{(x+2,y+2)}$ of the four Y sub-blocks with in dividing pattern 0 are used to derive the $MV^{Cb0}_{(x',y')}$.

[00774] (ii) In FIG. 18B left, $MV^{Cb0}_{(x',y')}$ of a specific Cb sub-block B within dividing pattern 1 is to be derived. FIG. 18B right shows four Y sub-blocks with in dividing pattern 0, which are overlapped with Cb sub-block B when down-scaled by 2:1. Suppose $x = 2*x'$ and $y=2*y'$, four MVs: $MV^0_{(x-2,y-2)}$, $MV^0_{(x+2,y-2)}$, $MV^0_{(x-2,y+2)}$ and $MV^0_{(x+2,y+2)}$ of the four Y sub-blocks with in dividing pattern 0 are used to derive the $MV^{Cb0}_{(x',y')}$.

[00775] (f) Suppose MV' of one sub-block of color component C1 is derived from $MV0$, $MV1$, $MV2$, ... MV_k of $k-1$ sub-blocks of color component C0. MV' may be derived as:

[00776] (i) $MV' = MV_n$, n is any of $0 \dots k$.

[00777] (ii) $MV' = f(MV0, MV1, MV2, \dots, MV_k)$. f is a linear function.

[00778] (iii) $MV' = f(MV0, MV1, MV2, \dots, MV_k)$. f is a non-linear function.

[00779] (iv) $MV' = \text{Average}(MV0, MV1, MV2, \dots, MV_k)$. Average is an averaging operation.

[00780] (v) $MV' = \text{Median}(MV0, MV1, MV2, \dots, MV_k)$. Median is an operation to get the median value.

[00781] (vi) $MV' = \text{Max}(MV0, MV1, MV2, \dots, MV_k)$. Max is an operation to get the maximum value.

[00782] (vii) $MV' = \text{Min}(MV0, MV1, MV2, \dots, MV_k)$. Min is an operation to get the minimum value.

[00783] (viii) $MV' = \text{MaxAbs}(MV_0, MV_1, MV_2, \dots, MV_k)$. MaxAbs is an operation to get the value with the maximum absolute value.

[00784] (ix) $MV' = \text{MinAbs}(MV_0, MV_1, MV_2, \dots, MV_k)$. MinAbs is an operation to get the value with the minimum absolute value.

[00785] (x) Take FIGS. 18A and 18B as examples, $MV^{\text{Cbt}}_{(x',y')}$ with $t=0$ or 1 , may be derived as:

[00786] 1. $MV^{\text{Cbt}}_{(x',y')} = \text{SatShift}(MV_0(x-2,y-2)+MV_0(x+2,y-2)+MV_0(x-2,y+2)+MV_0(x+2,y+2), 2);$

[00787] 2. $MV^{\text{Cbt}}_{(x',y')} = \text{Shift}(MV_0(x-2,y-2)+MV_0(x+2,y-2)+MV_0(x-2,y+2)+MV_0(x+2,y+2), 2);$

[00788] 3. $MV^{\text{Cbt}}_{(x',y')} = \text{SatShift}(MV_0(x-2,y-2)+MV_0(x+2,y-2), 1);$

[00789] 4. $MV^{\text{Cbt}}_{(x',y')} = \text{Shift}(MV_0(x-2,y-2)+MV_0(x+2,y-2), 1);$

[00790] 5. $MV^{\text{Cbt}}_{(x',y')} = \text{SatShift}(MV_0(x-2,y+2)+MV_0(x+2,y+2), 1);$

[00791] 6. $MV^{\text{Cbt}}_{(x',y')} = \text{Shift}(MV_0(x-2,y+2)+MV_0(x+2,y+2), 1);$

[00792] 7. $MV^{\text{Cbt}}_{(x',y')} = \text{SatShift}(MV_0(x-2,y-2)+MV_0(x+2,y+2), 1);$

[00793] 8. $MV^{\text{Cbt}}_{(x',y')} = \text{Shift}(MV_0(x-2,y-2)+MV_0(x+2,y+2), 1);$

[00794] 9. $MV^{\text{Cbt}}_{(x',y')} = \text{SatShift}(MV_0(x-2,y-2)+MV_0(x-2,y+2), 1);$

[00795] 10. $MV^{\text{Cbt}}_{(x',y')} = \text{Shift}(MV_0(x-2,y-2)+MV_0(x-2,y+2), 1);$

[00796] 11. $MV^{\text{Cbt}}_{(x',y')} = \text{SatShift}(MV_0(x+2,y-2)+MV_0(x+2,y+2), 1);$

[00797] 12. $MV^{\text{Cbt}}_{(x',y')} = \text{Shift}(MV_0(x+2,y-2)+MV_0(x+2,y+2), 1);$

[00798] 13. $MV^{\text{Cbt}}_{(x',y')} = \text{SatShift}(MV_0(x+2,y-2)+MV_0(x-2,y+2), 1);$

[00799] 14. $MV^{\text{Cbt}}_{(x',y')} = \text{Shift}(MV_0(x+2,y-2)+MV_0(x-2,y+2), 1);$

[00800] 15. $MV^{\text{Cbt}}_{(x',y')} = MV^0_{(x-2,y-2)};$

[00801] 16. $MV^{\text{Cbt}}_{(x',y')} = MV^0_{(x+2,y-2)};$

[00802] 17. $MV^{\text{Cbt}}_{(x',y')} = MV^0_{(x-2,y+2)};$

[00803] 18. $MV^{\text{Cbt}}_{(x',y')} = MV^0_{(x+2,y+2)};$

[00804] **Example Embodiments for Interweaved Prediction for Bi-prediction**

[00805] **Item 15:** In some embodiments, when interweaved prediction is applied on bi-prediction, the following methods may be applied to save the internal bit-depth increased due to different weights:

[00806] (a) For list X (X= 0 or 1) , $P^X(x, y) = \text{Shift}(W0(x,y)*P^X_0(x,y) + W1(x,y)*P^X_1(x,y), SW)$, where $P^X(x, y)$ is the prediction for list X, $P^X_0(x,y)$ and $P^X_1(x,y)$ are the prediction for list X with dividing pattern 0 and dividing pattern 1, respectively. W0 and W1 are integers representing the interweaved prediction weighting values and SW represents the precision of the weighting values.

[00807] (b) The final prediction value is derived as $P(x,y) = \text{Shift}(Wb0(x,y)*P^0(x,y) + Wb1(x,y)*P^1(x,y), SWB)$, where Wb0 and Wb1 are integers used in weighted bi-prediction and SWB is the precision. When there is no weighted bi-prediction, $Wb0=Wb1=SWB=1$.

[00808] (c) In some embodiments, $P^X_0(x,y)$ and $P^X_1(x,y)$ may be kept the precision of interpolation filtering. For example, they may be unsigned integers with 16 bits. The final prediction value is derived as $P(x,y) = \text{Shift}(Wb0(x,y)*P^0(x,y) + Wb1(x,y)*P^1(x,y), SWB+PB)$, where PB is the additional precision from interpolation filtering, e.g., $PB = 6$. In this case, $W0(x,y)*P^X_0(x,y)$ or $W1(x,y)*P^X_1(x,y)$ may exceed 16 bits. It is proposed that $P^X_0(x,y)$ and $P^X_1(x,y)$ are right-shift to a lower precision first, to avoid exceeding 16 bits.

[00809] (i) For example, For list X (X= 0 or 1) , $P^X(x, y) = \text{Shift}(W0(x,y)*PL^X_0(x,y) + W1(x,y)*PL^X_1(x,y), SW)$, where $PL^X_0(x,y) = \text{Shift}(P^X_0(x,y), M)$, $PL^X_1(x,y) = \text{Shift}(P^X_1(x,y), M)$. And the final prediction is derived as $P(x,y) = \text{Shift}(Wb0(x,y)*P^0(x,y) + Wb1(x,y)*P^1(x,y), SWB+PB-M)$. For example, M is set to be 2 or 3.

[00810] (d) The above mentioned methods may be also applicable to other bi-prediction methods with different weighting factors for two reference prediction blocks, such as Generalized Bi-Prediction (GBi, wherein weights could be e.g., 3/8, 5/8), weighted prediction (wherein weights could be a very large value).

[00811] (e) The above mentioned methods may be also applicable to other multiple hypothesis uni-prediction or bi-prediction methods with different weighting factors for different reference prediction blocks.

[00812] **Example Embodiments for Block size dependency**

[00813] **Item 16:** Whether and/or how to apply interweaved prediction may depend on block width W and height H.

- a. In one example, whether and/or how to apply interweaved prediction may depend on the size of VPDU (Video Processing Data Unit which typically represent the maximumly allowed block size for processing in hardware design).
- b. In one example, when interweaved prediction is disabled for a certain block dimension (or a block with certain coded information), the original prediction method may be utilized.
 - i. Alternatively, affine mode may be directly disabled for such kind of blocks.
- c. In one example, interweaved prediction cannot be used when $W > T1$ and $H > T2$. For example, $T1 = T2 = 64$;
- d. In one example, interweaved prediction cannot be used when $W > T1$ or $H > T2$. For example, $T1 = T2 = 64$;
- e. In one example, interweaved prediction cannot be used when $W * H > T$. For example, $T = 64 * 64$;
- f. In one example, interweaved prediction cannot be used when $W < T1$ and $H < T2$. For example, $T1 = T2 = 16$;
- g. In one example, interweaved prediction cannot be used when $W < T1$ or $H > T2$. For example, $T1 = T2 = 16$;
- h. In one example, interweaved prediction cannot be used when $W * H < T$. For example, $T = 16 * 16$;
- i. In one example, for a sub-block which is not located at block boundary (e.g., coding unit), interweaved affine may be disabled for this sub-block. Alternatively, furthermore, the prediction results with original affine prediction method may be directly used as the final prediction for this sub-block.
- j. In one example, interweaved prediction is used in a different way when $W > T1$ and $H > T2$. For example, $T1 = T2 = 64$;
- k. In one example, interweaved prediction is used in a different way when $W > T1$ or $H > T2$. For example, $T1 = T2 = 64$;
- l. In one example, interweaved prediction is used in a different way when $W * H > T$. For example, $T = 64 * 64$;

- m. In one example, interweaved prediction is used in a different way when $W < T1$ and $H < T2$. For example, $T1 = T2 = 16$;
- n. In one example, interweaved prediction is used in a different way when $W < T1$ or $H > T2$. For example, $T1 = T2 = 16$;
- o. In one example, interweaved prediction is used in a different way when $W * H < T$. For example, $T = 16 * 16$;
- p. In one example, when $H > X$ (e.g. H is equal to 128, $X = 64$), the interweaved prediction is not applied on samples belonging to a sub-blocks crossing the upper $W * (H/2)$ partition and the lower $W * (H/2)$ partition of the current block;
- q. In one example, when $W > X$ (e.g. W is equal to 128, $X = 64$), the interweaved prediction is not applied on samples belonging to a sub-blocks crossing the left $(W/2) * H$ partition and the right $(W/2) * H$ partition of the current block;
- r. In one example, when $W > X$ and $H > Y$ (e.g. $W = H = 128$, $X=Y=64$),
 - i. the interweaved prediction is not applied on samples belonging to a sub-blocks crossing the left $(W/2) * H$ partition and the right $(W/2) * H$ partition of the current block;
 - ii. the interweaved prediction is not applied on samples belonging to a sub-blocks crossing the upper $W * (H/2)$ partition and the lower $W * (H/2)$ partition of the current block;
- s. In one example, interweaved prediction is only enabled for blocks with specific sets of width and/or height.
- t. In one example, interweaved prediction is only disabled for blocks with specific sets of width and/or height.
- u. In one example, interweaved prediction is only used for specific types of picture/slice/tile group/tile/or other kinds of video data units.
 - i. For example, interweaved prediction is only used for P picture or B picture;
 - ii. For example, a flag is signaled to indicate whether interweaved prediction can be used or not in the header of picture/slice/tile group/tile.
 - 1. For example, this flag is signaled only if affine prediction is allowed.

[00814] Item 17: It is proposed that a message is signaled to indicate whether to apply the

dependency between whether /how to apply interweaved prediction and the width and height. The message may be signaled in SPS/VPS/PPS/Slice header/picture header/tile/tile group header/CTUs/CTU rows/multiple CTUs/or other kinds of video processing units.

[00815] Item 18: In one example, when interweaved prediction is used, bi-prediction is disallowed.

- a. For example, when interweaved prediction is used, the index to indicate whether bi-prediction is used is not signaled.
- b. Alternatively, indications of whether bi-prediction is disallowed may be signaled in SPS/VPS/PPS/Slice header/picture header/tile/tile group header/CTUs/CTU rows/multiple CTUs.

[00816] Item 19: It is proposed to further refine sub-blocks' motion information based on motion information derived from two or multiple patterns.

- a. In one example, the refined motion information may be utilized for predicting following blocks to be coded.
- b. In one example, the refined motion information may be utilized in the filtering process, such as Deblock, SAO, ALF.
- c. Whether to store the refined information may be based on the position of sub-block relative to the whole block/CTU/CTU row/tile/slice/tile groups/picture.
- d. Whether to store the refined information may be based on the coded mode of current block and/or neighboring blocks.
- e. Whether to store the refined information may be based on the dimension of current block.
- f. Whether to store the refined information may be based on picture/slice types/reference picture lists etc. al.

[00817] Item 20: It is proposed that whether to and/or how to apply deblocking process or other kinds of filtering process (such as SAO, Adaptive loop filter) may depend on whether interweaved prediction is applied or not.

[00818] a. In one example, deblocking is not conducted on an edge between two sub-blocks in one division pattern for a block if the edge is inside a sub-block in another division pattern for a block.

[00819] b. In one example, deblocking is made weaker on an edge between two sub-blocks in one division pattern for a block if the edge is inside a sub-block in another division pattern for a block.

[00820] i. In one example, $bS[xDi][yDj]$ described in the VVC deblocking process is decreased for such a edge.

[00821] ii. In one example, β described in the VVC deblocking process is decreased for such a edge.

[00822] iii. In one example, α described in the VVC deblocking process is decreased for such a edge.

[00823] iv. In one example, tC described in the VVC deblocking process is decreased for such a edge.

[00824] c. In one example, deblocking is made stronger on an edge between two sub-blocks in one division pattern for a block if the edge is inside a sub-block in another division pattern for a block.

[00825] i. In one example, $bS[xDi][yDj]$ described in the VVC deblocking process is increased for such a edge.

[00826] ii. In one example, β described in the VVC deblocking process is increased for such a edge.

[00827] iii. In one example, α described in the VVC deblocking process is increased for such a edge.

[00828] iv. In one example, tC described in the VVC deblocking process is increased for such a edge.

[00829] **Item 21:** It is proposed that whether to and/or how to apply local illumination compensation or weighted prediction to a block/sub-block may depend on whether interweaved prediction is applied or not.

[00830] a. In one example, when one block is coded with interweaved prediction mode, it is disallowed to apply local illumination compensation or weighted prediction.

[00831] b. Alternatively, furthermore, there is no need to signal indications of enabling local illumination compensation if interweaved prediction is applied to a block/sub-block.

[00832] Item 22: It is proposed that when weighted prediction is applied to one block or sub-block, bi-directional optical flow (BIO) may be skipped.

[00833] a. In one example, BIO may be applied to blocks with weighted prediction.

[00834] b. In one example, BIO may be applied to blocks with weighted prediction, however, certain conditions shall be satisfied.

[00835] i. In one example, it is required that at least one parameter shall be within one range, or equal to certain values.

[00836] ii. In one example, certain reference pictures restrictions may be applied.

[00837] The embodiments and examples described above may be implemented in the context of methods as shown FIGS. 19 to [], described next.

[00838] FIG. 19 shows an example flowchart of a method 1900 for video processing based on some implementations of the disclosed technology. The method 1900 includes, at 1902, deriving one or more motion vectors for a first set of sub-blocks belonging to a first dividing pattern of a current video block of a video . The method 1900 includes, at 1904, performing, based on the one or more motion vectors, a conversion between the current video block and a coded representation of the video

[00839] FIG. 20 shows an example flowchart of a method 2000 for video processing based on some implementations of the disclosed technology. The method 2000 includes, at 2902, dividing a video block of a first color component to obtain a first set sub-blocks of the first color component. The method 2000 further includes, at 2004, dividing a corresponding video block of a second color component to obtain a second set of sub-blocks of a second color component. The method 2000 further includes, at 2006, deriving one or more motion vectors of the first set of sub-blocks based on one or more motion vectors of the second set of sub-blocks. The method 2000 further includes, at 2008, performing, based on the one or more motion vectors of the first set and second set of sub-blocks, a conversion between the video block and a coded representation of the video.

[00840] FIG. 21A shows an example flowchart of a method 2110 for video processing based on some implementations of the disclosed technology. The method 2110 includes, at 2112, dividing, for a conversion between a current video block of a video and a bitstream representation

of the video, the current video block into partitions according to multiple dividing patterns according to a height (H) or a width (W) of the current video block. The method 2110 further includes, at 2114, performing the conversion using an interweaved prediction of the multiple partitions.

[00841] FIG. 21B shows an example flowchart of a method 2120 for video processing based on some implementations of the disclosed technology. The method 2120 includes, at 2122, determining to apply a prediction for a current video block of a video, the prediction including dividing the current video block into sub-blocks according to a dividing pattern. The method 2120 further includes, at 2124, determining to apply a bit-shifting to generate a prediction block on the sub-blocks of the current video block. The method 2120 further includes, at 2126, performing a conversion between the current video block and a coded representation of the video.

[00842] FIG. 21C shows an example flowchart of a method 2130 for video processing based on some implementations of the disclosed technology. The method 2130 includes, at 2132, determining, based on a characteristic of a current video block of a video, whether to use an interweaved prediction tool for a conversion between the current block and a coded representation of the video. The method 2130 further includes, at 2134, performing the conversion according to the determining. In some implementations, upon the determining that the characteristic of the current video block fails to meet a condition, the conversion is performed by disabling a use of an affine prediction tool and/or the interweaved prediction tool. In some implementations, upon the determining that the characteristic of the current video block meets a condition, the conversion is performed by using an affine prediction tool and/or the interweaved prediction tool.

[00843] FIG. 21D shows an example flowchart of a method 2140 for video processing based on some implementations of the disclosed technology. The method 2140 includes, at 2142, determining that interweaved prediction is to be applied for a current video block of a video. The method 2140 further includes, at 2144, disabling bi-prediction for the current video block based on the determination that interweaved prediction is to be applied. The method 2140 further includes, at 2146, performing a conversion between the current video block and a coded representation of the video.

[00844] FIG. 22A shows an example flowchart of a method 2210 for video processing based

on some implementations of the disclosed technology. The method 2210 includes, at 2212, determining, for a conversion between a current video block of a video and a coded representation of the video, a refined motion information for the current video block. The method 2210 further includes, at 2214, performing the conversion using the refined motion information. In some implementations, the refined motion information is generated based on an interweaved prediction tool in which motion information of partitions of the current video block that are generated using multiple patterns, and the refined motion information of the current video block is used for a subsequent processing or selectively stored based on whether a condition is satisfied.

[00845] FIG. 22B shows an example flowchart of a method 2220 for video processing based on some implementations of the disclosed technology. The method 2220 includes, at 2222, determining whether an interweaved prediction is applied to a current video block of a video. The method 2220 further includes, at 2224, determining to use a filter process to the current video block based on a determination whether the interweaved prediction is applied to the current video block. The method 2220 further includes, at 2226, performing a conversion between the current video block and a coded representation of the video based on the determining on a use of the filter process.

[00846] FIG. 22C shows an example flowchart of a method 2230 for video processing based on some implementations of the disclosed technology. The method 2230 includes, at 2232, determining whether an interweaved prediction is applied to a current video block of a video. The method 2230 further includes, at 2234, determining whether to use a local illumination compensation or a weighted prediction to the current video block based on a determination of a use of the interweaved prediction. The method 2230 further includes, at 2236, performing a conversion between the current video block and a coded representation of the video based on the determining on a use of the local illumination compensation or the weighted prediction.

[00847] FIG. 22D shows an example flowchart of a method 2240 for video processing based on some implementations of the disclosed technology. The method 2240 includes, at 2242, determining that weighted prediction is applied to a current video block of a video or a sub-block of the current video block. The method 2240 further includes, at 2244, performing a conversion between the current video block and a coded representation of the video by disabling a bi-

directional optical flow (BDOF) technique.

[00848] In the methods as discussed above, partial interweaving may be implemented. Using this scheme, samples in a first subset of prediction samples are calculated as a weighted combination of the first intermediate prediction block and samples a second subset of the prediction samples are copied from sub-blocked based prediction wherein the first subset and the second subset are based on a dividing pattern. The first subset and the second subset may together make up the entire prediction block, e.g., the block that is currently being processed. As depicted in FIGS. 15A–15D, in various examples, the second subset that is excluded from interweaving could be made up of (a) corner sub-blocks or (b) uppermost and lowermost row of sub-blocks or (c) left-most or right-most columns of sub-blocks. The size of the block being currently processed may be used as a condition for deciding whether to exclude certain sub-blocks from interweaved prediction.

[00849] As further described in the present document, the encoding process may refrain from checking affine mode for blocks that are split from a parent block, where the parent block itself is encoded with a mode different from affine mode.

[00850] In some embodiments, a video decoder apparatus may implement a method of video decoding in which the improved block-based motion prediction as described herein is used for video decoding. The method may include forming a block of video using a set of pixels from a video frame. The block may be partitioned into a first set of sub-blocks according to a first pattern. A first intermediate prediction block may correspond to the first set of sub-blocks. The block may include a second set of sub-blocks according to a second pattern. At least one sub-block in the second set has a different size than a sub-block in the first set. The method may further determine a prediction block based on the first intermediate prediction block and a second intermediate prediction block that is generated from the second set of sub-blocks. Other features of this method may be similar to the above-described method 1900.

[00851] In some embodiments, a decoder-side method of video decoding may use block-based motion prediction for improving video quality by using blocks of a video frame for prediction, where a block corresponds to a set of pixel blocks. The block may be divided into multiple sub-blocks based on a size of the block or information from another block that is spatially or temporally adjacent to the block, wherein at least one sub-block of the multiple sub-blocks has a

different size than other sub-blocks. The decoder may use motion vector predictions that are generated by applying a coding algorithm to the multiple sub-blocks. Other features of this method are described with respect to FIG. 2000 and the corresponding description.

[00852] Yet another method for video processing includes deriving one or more motion vectors for a first set of sub-blocks of a current video block, wherein each of the first set of sub-blocks has a first dividing pattern, and reconstructing, based on the one or more motion vectors, the current video block.

[00853] In some embodiments, the deriving the one or more motion vectors is based on an affine model.

[00854] In some embodiments, the deriving the one or more motion vectors is based on motion vectors of one or more of a second set of sub-blocks, each of the second set of sub-blocks has a second dividing pattern different from the first dividing pattern, and the one or more of the second set of sub-blocks overlap with at least one of the first set of sub-blocks. For example, the one or more motion vectors for the first set of sub-blocks comprises MV^1 , the motion vectors of the one or more of the second set of sub-blocks comprise MV^{01} , MV^{02} , MV^{03} , ..., and MV^{0K} , and K is a positive integer. In an example, $MV^1 = f(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$. In another example, $f(\cdot)$ is a linear function. In yet another example, $f(\cdot)$ is a non-linear function. In yet another example, $MV^1 = \text{average}(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, and $\text{average}(\cdot)$ is an averaging operation. In yet another example, $MV^1 = \text{median}(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, and $\text{median}(\cdot)$ is an operation that computes a median value. In yet another example, $MV^1 = \min(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, and $\min(\cdot)$ is an operation that selects a minimum value from a plurality of input values. In yet another example, $MV^1 = \text{MaxAbs}(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, and $\text{MaxAbs}(\cdot)$ is an operation that selects a maximum absolute value from a plurality of input values.

[00855] In some embodiments, the first set of sub-blocks corresponds to a first color component, the deriving the one or more motion vectors is based on motion vectors of one or more of a second set of sub-blocks, each of the second set of sub-blocks has a second dividing pattern different from the first dividing pattern, and the second set of sub-blocks corresponds to a second color component different from the first color component. In an example, the first color component is coded or decoded after a third color component, and wherein the third color

component is one or Cr, Cb, U, V, R or B. In another example, the second color component is coded or decoded before a third color component, and wherein the third color component is Y or G. In yet another example, the deriving the one or more motion vectors is further based on a color format of at least one of the second set of sub-blocks. In yet another example, the color format is 4:2:0, 4:2:2 or 4:4:4.

[00856] In some embodiments, the first dividing pattern is based on a height or a width of the current video block.

[00857] FIG. 23 is a block diagram of a video processing apparatus 2300. The apparatus 2300 may be used to implement one or more of the methods described herein. The apparatus 2300 may be embodied in a smartphone, tablet, computer, Internet of Things (IoT) receiver, and so on. The apparatus 2300 may include one or more processors 2302, one or more memories 2304 and video processing hardware 2306. The processor(s) 2302 may be configured to implement one or more methods (including, but not limited to, methods as shown in FIGS. 19 to 22D) described in the present document. The memory (memories) 2104 may be used for storing data and code used for implementing the methods and techniques described herein. The video processing hardware 2306 may be used to implement, in hardware circuitry, some techniques described in the present document.

[00858] FIG. 24 is another example of a block diagram of a video processing system in which disclosed techniques may be implemented. FIG. 24 is a block diagram showing an example video processing system 3100 in which various techniques disclosed herein may be implemented. Various implementations may include some or all of the components of the system 3100. The system 3100 may include input 3102 for receiving video content. The video content may be received in a raw or uncompressed format, e.g., 8 or 10 bit multi-component pixel values, or may be in a compressed or encoded format. The input 3102 may represent a network interface, a peripheral bus interface, or a storage interface. Examples of network interface include wired interfaces such as Ethernet, passive optical network (PON), etc. and wireless interfaces such as Wi-Fi or cellular interfaces.

[00859] The system 3100 may include a coding component 3104 that may implement the various coding or encoding methods described in the present document. The coding component 3104 may reduce the average bitrate of video from the input 3102 to the output of the coding

component 3104 to produce a coded representation of the video. The coding techniques are therefore sometimes called video compression or video transcoding techniques. The output of the coding component 3104 may be either stored, or transmitted via a communication connected, as represented by the component 3106. The stored or communicated bitstream (or coded) representation of the video received at the input 3102 may be used by the component 3108 for generating pixel values or displayable video that is sent to a display interface 3110. The process of generating user-viewable video from the bitstream representation is sometimes called video decompression. Furthermore, while certain video processing operations are referred to as “coding” operations or tools, it will be appreciated that the coding tools or operations are used at an encoder and corresponding decoding tools or operations that reverse the results of the coding will be performed by a decoder.

[00860] Examples of a peripheral bus interface or a display interface may include universal serial bus (USB) or high definition multimedia interface (HDMI) or Displayport, and so on. Examples of storage interfaces include SATA (serial advanced technology attachment), PCI, IDE interface, and the like. The techniques described in the present document may be embodied in various electronic devices such as mobile phones, laptops, smartphones or other devices that are capable of performing digital data processing and/or video display.

[00861] In some embodiments, the video coding methods may be implemented using an apparatus that is implemented on a hardware platform as described with respect to FIG. 23 or 24.

[00862] Various techniques and embodiments may be described using the following clause-based format.

[00863] The first set of clauses describe certain features and aspects of the disclosed techniques listed in the previous section, including, for example, Item 1.

[00864] 1. A method for video processing, comprising: deriving one or more motion vectors for a first set of sub-blocks belonging to a first dividing pattern of a current video block of a video; and performing, based on the one or more motion vectors, a conversion between the current video block and a coded representation of the video.

[00865] 2. The method of clause 1, wherein the deriving the one or more motion vectors is based on an affine model.

[00866] 3. The method of clause 1, wherein the deriving the one or more motion vectors is

based on motion vectors of a second set of sub-blocks, wherein the second set of sub-blocks has a second dividing pattern different from the first dividing pattern.

[00867] 4. The method of clause 3, wherein the second set of sub-blocks overlaps with the first set of sub-blocks.

[00868] 5. The method of clause 3, wherein the one or more motion vectors for the first set of sub-blocks comprises MV^1 and the motion vectors of the second set of sub-blocks comprise MV^{01} , MV^{02} , MV^{03} , ... and MV^{0K} , and wherein K is a positive integer.

[00869] 6. The method of clause 5, wherein $MV^1 = f(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$.

[00870] 7. The method of clause 6, wherein $f(\cdot)$ is a linear function.

[00871] 8. The method of clause 6, wherein $f(\cdot)$ is a non-linear function.

[00872] 9. The method of clause 5, wherein $MV^1 = \text{average}(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, wherein $\text{average}(\cdot)$ is an averaging operation.

[00873] 10. The method of clause 5, wherein $MV^1 = \text{median}(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, wherein $\text{median}(\cdot)$ is an operation that computes a median value.

[00874] 11. The method of clause 5, wherein $MV^1 = \max(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, wherein $\max(\cdot)$ is an operation that selects a maximum value from a plurality of input values.

[00875] 12. The method of clause 5, wherein $MV^1 = \min(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, wherein $\min(\cdot)$ is an operation that selects a minimum value from a plurality of input values.

[00876] 13. The method of clause 5, wherein $MV^1 = \text{MaxAbs}(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, wherein $\text{MaxAbs}(\cdot)$ is an operation that selects a maximum absolute value from a plurality of input values.

[00877] 14. The method of clause 5, wherein $MV^1 = \text{MinAbs}(MV^{01}, MV^{02}, MV^{03}, \dots, MV^{0K})$, wherein $\text{MinAbs}(\cdot)$ is an operation that selects a minimum absolute value from a plurality of input values.

[00878] 15. The method of any of clauses 1 to 14, wherein the performing of the conversion includes generating the coded representation from the current video block.

[00879] 16. The method of any of clauses 1 to 14, wherein the performing of the conversion includes generating the current video block from the coded representation.

[00880] 17. An apparatus in a video system comprising a processor and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause

the processor to implement the method recited in one or more of clauses 1 to 16.

[00881] 18. A computer program product stored on a non-transitory computer readable media, the computer program product including program code for carrying out the method recited in one or more of clauses 1 to 16.

[00882] The second set of clauses describe certain features and aspects of the disclosed techniques listed in the previous section, including, for example, Item 14.

[00883] The third set of clauses describe certain features and aspects of the disclosed techniques listed in the previous section, including, for example, Items 13, 15, 16, 17 and 18.

[00884] 1. A method of video processing, comprising: dividing, for a conversion between a current video block of a video and a bitstream representation of the video, the current video block into partitions according to multiple dividing patterns according to a height (H) or a width (W) of the current video block; and performing the conversion using an interweaved prediction of the multiple partitions.

[00885] 2. The method of clause 1, wherein the current video block is divided according to two dividing patterns in a case that $W > T1$ and $H > T2$, T1, T2 being integer values.

[00886] 3. The method of clause 2, wherein $T1 = T2 = 4$.

[00887] 4. The method of clause 1, wherein the current video block is divided according to two dividing patterns in a case that $H \leq T2$, T2 being an integer.

[00888] 5. The method of clause 4, wherein $T2 = 4$.

[00889] 6. The method of clause 1, wherein the current video block is divided according to two dividing patterns in a case that $W \leq T1$, T1 being an integer.

[00890] 7. The method of clause 6, wherein $T1 = 4$.

[00891] 8. A method for video processing, comprising: determining to apply a prediction for a current video block of a video, the prediction including dividing the current video block into sub-blocks according to a dividing pattern; determining to apply a bit-shifting to generate a prediction block on the sub-blocks of the current video block; and performing a conversion between the current video block and a coded representation of the video.

[00892] 9. The method of clause 8, wherein a bi-prediction or a uni-prediction is applied to the current video block.

[00893] 10. The method of clause 8, wherein one or more motion vectors related to the current

video block has an internal bit depth depending on weighting values of the prediction.

[00894] 11. The method of clause 8, wherein, for a reference picture list X of the current video block, $P^X(x, y) = \text{Shift}(W0(x, y) * P^{X_0}(x, y) + W1(x, y) * P^{X_1}(x, y), SW)$, where $P^X(x, y)$ is the prediction for the list X that is 0 or 1, $P^{X_0}(x, y)$ and $P^{X_1}(x, y)$ are the prediction for list X with dividing pattern 0 and dividing pattern 1, respectively, W0 and W1 are integers representing weighting values of the interweaved prediction, SW represents the precision of interweaved weighting values, and $\text{Shift}(x, n)$ is defined as $\text{Shift}(x, n) = (x + \text{offset0}) \gg n$.

[00895] 12. The method of clause 8, wherein a final prediction value is derived as $P(x, y) = \text{Shift}(Wb0(x, y) * P^0(x, y) + Wb1(x, y) * P^1(x, y), SWB)$, where Wb0 and Wb1 are integers representing weighting values of the bi-prediction, $P^0(x, y)$ and $P^1(x, y)$ represent the prediction for list 0 and list 1, respectively, SWB is the precision of an weighted bi-prediction, and $\text{Shift}(x, n)$ is defined as $\text{Shift}(x, n) = (x + \text{offset0}) \gg n$.

[00896] 13. The method of clause 12, wherein, $Wb0=Wb1=SWB=1$.

[00897] 14. The method of clause 8, wherein an interpolation filtering is applied to generate a prediction block and a final prediction value is derived as $P(x, y) = \text{Shift}(Wb0(x, y) * P^0(x, y) + Wb1(x, y) * P^1(x, y), SWB+PB)$, where Wb0 and Wb1 are integers representing weighting values of the interweaved prediction, SWB is the precision of an weighted bi-prediction, PB is an additional precision from the interpolation filtering, and $\text{Shift}(x, n)$ is defined as $\text{Shift}(x, n) = (x + \text{offset0}) \gg n$.

[00898] 15. The method of clause 14, wherein $P^{X_0}(x, y)$ and $P^{X_1}(x, y)$ are predictions for a reference picture list X with dividing pattern 0 and dividing pattern 1 and wherein $P^{X_0}(x, y)$ and $P^{X_1}(x, y)$ are right-shifted.

[00899] 16. The method of clause 8, wherein the bi-prediction uses different weighting factors for two reference prediction blocks.

[00900] 17. The method of clause 11 or 14, wherein $P^{X_0}(x, y)$ is modified as $P^{X_0}(x, y) = \text{Shift}(P^{X_0}(x, y), M)$ and/or $P^{X_1}(x, y)$ is modified as $P^{X_1}(x, y) = \text{Shift}(P^{X_1}(x, y), M)$, wherein M is an integer, and $P(x, y) = \text{Shift}(Wb0(x, y) * P^0(x, y) + Wb1(x, y) * P^1(x, y), SWB+PB-M)$.

[00901] 18. A method for video processing, comprising: determining, based on a characteristic of a current video block of a video, whether to use an interweaved prediction tool for a conversion between the current block and a coded representation of the video; and performing the conversion

according to the determining, wherein, upon the determining that the characteristic of the current video block fails to meet a condition, the conversion is performed by disabling a use of an affine prediction tool and/or the interweaved prediction tool.

[00902] 19. A method for video processing, comprising: determining, based on a characteristic of a current video block of a video, whether to use an interweaved prediction tool for a conversion between the current block and a coded representation of the video; and performing the conversion according to the determining, wherein, upon the determining that the characteristic of the current video block meets a condition, the conversion is performed by using an affine prediction tool and/or the interweaved prediction tool.

[00903] 20. The method of clause 18 or 19, wherein the characteristic of the current video block includes at least one of a width or a height of the current video block.

[00904] 21. The method of clause 18 or 19, further comprising: determining a size of a video processing data unit (VPDU), and wherein the determining whether to use the interweaved prediction tool is based on the size of the VPDU.

[00905] 22. The method of clause 18, wherein a prediction method that is different than the interweaved prediction is applied for the current video block.

[00906] 23. The method of clause 18, wherein a width and a height of the current video block are W and H, respectively, and T, T1, T2 are integer values, and wherein the interweaved prediction is disabled for a certain condition including one of:

[00907] i. $W > T1$ and $H > T2$,

[00908] ii. $W > T1$ or $H > T2$,

[00909] iii. $W \times H > T$,

[00910] iv. $W < T1$ and $H < T2$, or

[00911] v. $W < T1$ or $H < T2$.

[00912] vi. $W * H < T$.

[00913] 24. The method of clause 18 or 19, further comprising: determining that a first sub-block of the current video block is not located at a block boundary; and disabling, upon a determination that the first sub-block is not located at the block boundary, an interweaved affine technique for the first sub-block.

[00914] 25. The method of clause 24, wherein prediction results from an original affine

prediction technique is used for a final prediction for the first sub-block.

[00915] 26. The method of clause 18, wherein a width and a height of the current video block are W and H , respectively, and T , T_1 , T_2 are integer values, and wherein the interweaved prediction is used for a certain condition including one of:

[00916] i. $W > T_1$ and $H > T_2$,

[00917] ii. $W > T_1$ or $H > T_2$,

[00918] iii. $W \times H > T$,

[00919] iv. $W < T_1$ and $H < T_2$, or

[00920] v. $W < T_1$ or $H < T_2$.

[00921] vi. $W * H < T$.

[00922] 27. The method of clause 18, wherein the interweaved prediction is not applied to samples belonging to a sub-block crossing an upper $W * (H/2)$ partition and a lower $W * (H/2)$ partition of the current video block in a case that a height (H) of the current video block is greater than X , X being an integer.

[00923] 28. The method of clause 18, wherein the interweaved prediction is not applied to samples belonging to a sub-block crossing both a left $(W/2) * H$ partition and a right $(W/2) * H$ partition of the current video block in a case that a width (W) of the current video block is greater than X , X being an integer.

[00924] 29. The method of clause 27 or 28, wherein $X=64$.

[00925] 30. The method of clause 19, wherein the interweaved prediction is allowed for specific types of a video data unit including the current video block, the video data unit including a picture, a slice, a tile group, or a tile.

[00926] 31. The method of clause 19, wherein the interweaved prediction is used for P pictures or B pictures.

[00927] 32. The method of clause 18 or 19, wherein a flag indicating whether the interweaved prediction tool is used or disabled is signaled in a header of a picture, a slice, a tile group, or a tile.

[00928] 33. The method of clause 32, wherein the flag is signaled based on whether an affine prediction is allowed for the current video block.

[00929] 34. The method of clause 18 or 19, wherein a message is signaled to indicate whether to use the characteristics of the current video block in a video processing unit including a video

parameter set (VPS), a sequence parameter set (SPS), a picture parameter set (PPS), a slice header, a picture header, a tile group header, a tile, a coding tree unit (CTU), or a CTU row.

[00930] 35. A method for video processing, comprising: determining that interweaved prediction is to be applied for a current video block of a video; disabling bi-prediction for the current video block based on the determination that interweaved prediction is to be applied; and performing a conversion between the current video block and a coded representation of the video.

[00931] 36. The method of clause 35, wherein an index to indicate that bi-prediction is used is not signaled.

[00932] 37. The method of clause 36, wherein bi-prediction is disabled based on an indication signaled in video parameter set (VPS), a sequence parameter set (SPS), a picture parameter set (PPS), a slice header, a picture header, a tile group header, a tile, a coding tree unit (CTU), a CTU row, or multiple CTUs.

[00933] 38. The method of any of clauses 1 to 37, wherein the conversion comprises generating pixel values of the current video block from the bitstream representation.

[00934] 39. The method of any of clauses 1 to 37, wherein the conversion comprises generating the bitstream representation from pixel values of the current video block.

[00935] 40. An apparatus in a video system comprising a processor and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause the processor to implement the method in any one of clauses 1 to 39.

[00936] 41. A computer program product stored on a non-transitory computer readable media, the computer program product including program code for carrying out the method in any one of clauses 1 to 39.

[00937] The fourth set of clauses describe certain features and aspects of the disclosed techniques listed in the previous section, including, for example, Item 19, 20, 21, and 22.

[00938] 1. A method of video processing, comprising: determining, for a conversion between a current video block of a video and a coded representation of the video, a refined motion information for the current video block; and performing the conversion using the refined motion information, wherein the refined motion information is generated based on an interweaved prediction tool in which motion information of partitions of the current video block that are generated using multiple patterns; wherein the refined motion information of the current video

block is used for a subsequent processing or selectively stored based on whether a condition is satisfied.

[00939] 2. The method of clause 1, wherein the subsequent processing is a conversion of a subsequent block to be conversed after the current video block.

[00940] 3. The method of clause 1, wherein the subsequent processing is a filtering process for the current video block.

[00941] 4. The method of clause 1, wherein whether the condition is satisfied is determined based on a position of a sub-block, the position being in relation to a block, a CTU, a CTU row, a tile, a slice, a tile group, or a picture in the video.

[00942] 5. The method of clause 1, wherein whether the condition is satisfied is determined based on a coded mode of at least one of the current video block or neighboring video blocks of the current video block.

[00943] 6. The method of clause 1, wherein whether the condition is satisfied is determined based on a dimension of the current video block.

[00944] 7. The method of clause 1, wherein whether the condition is satisfied is determined based on at least one of a picture, a slice type, or a reference picture list that is related to the current video block.

[00945] 8. A method for video processing, comprising: determining whether an interweaved prediction is applied to a current video block of a video; determining to use a filter process to the current video block based on a determination whether the interweaved prediction is applied to the current video block; and performing a conversion between the current video block and a coded representation of the video based on the determining on a use of the filter process.

[00946] 9. The method of clause 8, wherein the filter process includes a deblocking process, a sample adaptive offset (SAO) filtering, or an adaptive loop filtering.

[00947] 10. The method of clause 8, further comprising: determining parameters related to how the filter process is to be applied, and wherein the conversion is performed based on the parameters of the filter process.

[00948] 11. The method of clause 8, wherein the filter process is not applied on an edge between two sub-blocks in a division pattern for the current video block in a case that the edge is inside a sub-block in another division pattern for the current video block.

[00949] 12. The method of clause 8, wherein the filter process is in a weaker level for an edge between two sub-blocks in a division pattern for the current video block in a case that the edge is inside a sub-block in another division pattern for the current video block.

[00950] 13. The method of clause 9, wherein at least one of $bS[xDi][yDj]$, β , Δ , or t_C that is a variable used in the deblocking process has a less value for the edge.

[00951] 14. The method of clause 8, wherein the filter process is in a stronger level on an edge between two sub-blocks in a division pattern for the current video block in a case that the edge is inside a sub-block in another division pattern for the current video block.

[00952] 15. The method of clause 13, wherein at least one of $bS[xDi][yDj]$, β , Δ , or t_C that is a variable used in the deblocking process has a greater value for the edge.

[00953] 16. A method for video processing, comprising: determining whether an interweaved prediction is applied to a current video block of a video; determining whether to use a local illumination compensation or a weighted prediction to the current video block based on a determination of a use of the interweaved prediction; and performing a conversion between the current video block and a coded representation of the video based on the determining on a use of the local illumination compensation or the weighted prediction.

[00954] 17. The method of clause 16, further comprising: determining parameters related to how the local illumination compensation or the weighted prediction is to be applied, and wherein the conversion is performed based on the parameters of the local illumination compensation or the weighted prediction.

[00955] 18. The method of clause 16, wherein the local illumination compensation or a weighted prediction is disabled upon a determination that the interweave prediction is applied to the current video block.

[00956] 19. The method of clause 16, wherein an indication indicating that the local illumination compensation or the weighted prediction is enabled is not signaled for the current video block or a sub-block of the current video block to which the interweaved prediction is applied.

[00957] 20. A method for video processing, comprising: determining that weighted prediction is applied to a current video block of a video or a sub-block of the current video block; and performing a conversion between the current video block and a coded representation of the video

by disabling a bi-directional optical flow (BDOF) technique.

[00958] 21. The method of clause 20, wherein the BDOF technique is applied to blocks with weighted prediction.

[00959] 22. The method of clause 21, wherein a parameter of the BDOF technique is within a threshold range or equal to a certain value.

[00960] 23. The method of clause 20, wherein certain reference picture restrictions are applied to the current video block.

[00961] 24. The method of any of clauses 1 to 23, wherein the conversion comprises generating pixel values of the current video block from the bitstream representation.

[00962] 25. The method of any of clauses 1 to 23, wherein the conversion comprises generating the bitstream representation from pixel values of the current video block.

[00963] 26. An apparatus in a video system comprising a processor and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause the processor to implement the method in any one of clauses 1 to 26.

[00964] 27. A computer program product stored on a non-transitory computer readable media, the computer program product including program code for carrying out the method in any one of clauses 1 to 26.

[00965] From the foregoing, it will be appreciated that specific embodiments of the presently disclosed technology have been described herein for purposes of illustration, but that various modifications may be made without deviating from the scope of the invention. Accordingly, the presently disclosed technology is not limited except as by the appended claims.

[00966] The disclosed and other embodiments, modules and the functional operations described in this document can be implemented in digital electronic circuitry, or in computer software, firmware, or hardware, including the structures disclosed in this document and their structural equivalents, or in combinations of one or more of them. The disclosed and other embodiments can be implemented as one or more computer program products, i.e., one or more modules of computer program instructions encoded on a computer readable medium for execution by, or to control the operation of, data processing apparatus. The computer readable medium can be a machine-readable storage device, a machine-readable storage substrate, a memory device, a composition of matter effecting a machine-readable propagated signal, or a

combination of one or more them. The term “data processing apparatus” encompasses all apparatus, devices, and machines for processing data, including by way of example a programmable processor, a computer, or multiple processors or computers. The apparatus can include, in addition to hardware, code that creates an execution environment for the computer program in question, e.g., code that constitutes processor firmware, a protocol stack, a database management system, an operating system, or a combination of one or more of them. A propagated signal is an artificially generated signal, e.g., a machine-generated electrical, optical, or electromagnetic signal, that is generated to encode information for transmission to suitable receiver apparatus.

[00967] A computer program (also known as a program, software, software application, script, or code) can be written in any form of programming language, including compiled or interpreted languages, and it can be deployed in any form, including as a stand-alone program or as a module, component, subroutine, or other unit suitable for use in a computing environment. A computer program does not necessarily correspond to a file in a file system. A program can be stored in a portion of a file that holds other programs or data (e.g., one or more scripts stored in a markup language document), in a single file dedicated to the program in question, or in multiple coordinated files (e.g., files that store one or more modules, sub programs, or portions of code). A computer program can be deployed to be executed on one computer or on multiple computers that are located at one site or distributed across multiple sites and interconnected by a communication network.

[00968] The processes and logic flows described in this document can be performed by one or more programmable processors executing one or more computer programs to perform functions by operating on input data and generating output. The processes and logic flows can also be performed by, and apparatus can also be implemented as, special purpose logic circuitry, e.g., an FPGA (field programmable gate array) or an ASIC (application specific integrated circuit).

[00969] Processors suitable for the execution of a computer program include, by way of example, both general and special purpose microprocessors, and any one or more processors of any kind of digital computer. Generally, a processor will receive instructions and data from a read only memory or a random-access memory or both. The essential elements of a computer are a processor for performing instructions and one or more memory devices for storing

instructions and data. Generally, a computer will also include, or be operatively coupled to receive data from or transfer data to, or both, one or more mass storage devices for storing data, e.g., magnetic, magneto optical disks, or optical disks. However, a computer need not have such devices. Computer readable media suitable for storing computer program instructions and data include all forms of non-volatile memory, media and memory devices, including by way of example semiconductor memory devices, e.g., EPROM, EEPROM, and flash memory devices; magnetic disks, e.g., internal hard disks or removable disks; magneto optical disks; and CD ROM and DVD-ROM disks. The processor and the memory can be supplemented by, or incorporated in, special purpose logic circuitry.

[00970] While this patent document contains many specifics, these should not be construed as limitations on the scope of any invention or of what may be claimed, but rather as descriptions of features that may be specific to particular embodiments of particular inventions. Certain features that are described in this patent document in the context of separate embodiments can also be implemented in combination in a single embodiment. Conversely, various features that are described in the context of a single embodiment can also be implemented in multiple embodiments separately or in any suitable subcombination. Moreover, although features may be described above as acting in certain combinations and even initially claimed as such, one or more features from a claimed combination can in some cases be excised from the combination, and the claimed combination may be directed to a subcombination or variation of a subcombination.

[00971] Similarly, while operations are depicted in the drawings in a particular order, this should not be understood as requiring that such operations be performed in the particular order shown or in sequential order, or that all illustrated operations be performed, to achieve desirable results. Moreover, the separation of various system components in the embodiments described in this patent document should not be understood as requiring such separation in all embodiments.

[00972] Only a few implementations and examples are described and other implementations, enhancements and variations can be made based on what is described and illustrated in this patent document.

CLAIMS

What is claimed is:

1. A method of video processing, comprising:
dividing, for a conversion between a current video block of a video and a bitstream representation of the video, the current video block into partitions according to multiple dividing patterns according to a height (H) or a width (W) of the current video block; and
performing the conversion using an interleaved prediction of the multiple partitions.
2. The method of claim 1, wherein the current video block is divided according to two dividing patterns in a case that $W > T_1$ and $H > T_2$, T_1 , T_2 being integer values.
3. The method of claim 2, wherein $T_1 = T_2 = 4$.
4. The method of claim 1, wherein the current video block is divided according to two dividing patterns in a case that $H \leq T_2$, T_2 being an integer.
5. The method of claim 4, wherein $T_2 = 4$.
6. The method of claim 1, wherein the current video block is divided according to two dividing patterns in a case that $W \leq T_1$, T_1 being an integer.
7. The method of claim 6, wherein $T_1 = 4$.
8. A method for video processing, comprising:
determining to apply a prediction for a current video block of a video, the prediction including dividing the current video block into sub-blocks according to a dividing pattern;
determining to apply a bit-shifting to generate a prediction block on the sub-blocks of the current video block; and

performing a conversion between the current video block and a coded representation of the video.

9. The method of claim 8, wherein a bi-prediction or a uni-prediction is applied to the current video block.

10. The method of claim 8, wherein one or more motion vectors related to the current video block has an internal bit depth depending on weighting values of the prediction.

11. The method of claim 8, wherein, for a reference picture list X of the current video block, $P^X(x, y) = \text{Shift}(W0(x, y) * P^{X_0}(x, y) + W1(x, y) * P^{X_1}(x, y), SW)$, where $P^X(x, y)$ is the prediction for the list X that is 0 or 1, $P^{X_0}(x, y)$ and $P^{X_1}(x, y)$ are the prediction for list X with dividing pattern 0 and dividing pattern 1, respectively, W0 and W1 are integers representing weighting values of the interweaved prediction, SW represents the precision of interweaved weighting values, and $\text{Shift}(x, n)$ is defined as $\text{Shift}(x, n) = (x + \text{offset0}) \gg n$.

12. The method of claim 8, wherein a final prediction value is derived as $P(x, y) = \text{Shift}(Wb0(x, y) * P^0(x, y) + Wb1(x, y) * P^1(x, y), SWB)$, where Wb0 and Wb1 are integers representing weighting values of the bi-prediction, $P^0(x, y)$ and $P^1(x, y)$ represent the prediction for list 0 and list 1, respectively, SWB is the precision of an weighted bi-prediction, and $\text{Shift}(x, n)$ is defined as $\text{Shift}(x, n) = (x + \text{offset0}) \gg n$.

13. The method of claim 12, wherein, $Wb0=Wb1=SWB=1$.

14. The method of claim 8, wherein an interpolation filtering is applied to generate a prediction block and a final prediction value is derived as $P(x, y) = \text{Shift}(Wb0(x, y) * P^0(x, y) + Wb1(x, y) * P^1(x, y), SWB+PB)$, where Wb0 and Wb1 are integers representing weighting values of the interweaved prediction, SWB is the precision of an weighted bi-prediction, PB is an additional precision from the interpolation filtering, and $\text{Shift}(x, n)$ is defined as $\text{Shift}(x, n) = (x + \text{offset0}) \gg n$.

15. The method of claim 14, wherein $P^X_0(x,y)$ and $P^X_1(x,y)$ are predictions for a reference picture list X with dividing pattern 0 and dividing pattern 1 and wherein $P^X_0(x,y)$ and $P^X_1(x,y)$ are right-shifted.
16. The method of claim 8, wherein the bi-prediction uses different weighting factors for two reference prediction blocks.
17. The method of claim 11 or 14, wherein $P^X_0(x,y)$ is modified as $P^X_0(x,y) = \text{Shift}(P^X_0(x,y), M)$ and/or $P^X_1(x,y)$ is modified as $P^X_1(x,y) = \text{Shift}(P^X_1(x,y), M)$, wherein M is an integer, and $P(x,y) = \text{Shift}(Wb0(x,y)*P0(x,y) + Wb1(x,y)*P1(x,y), SWB+PB-M)$.
18. A method for video processing, comprising:
determining, based on a characteristic of a current video block of a video, whether to use an interweaved prediction tool for a conversion between the current block and a coded representation of the video; and
performing the conversion according to the determining,
wherein, upon the determining that the characteristic of the current video block fails to meet a condition, the conversion is performed by disabling a use of an affine prediction tool and/or the interweaved prediction tool.
19. A method for video processing, comprising:
determining, based on a characteristic of a current video block of a video, whether to use an interweaved prediction tool for a conversion between the current block and a coded representation of the video; and
performing the conversion according to the determining, and
wherein, upon the determining that the characteristic of the current video block meets a condition, the conversion is performed by using an affine prediction tool and/or the interweaved prediction tool.

20. The method of claim 18 or 19, wherein the characteristic of the current video block includes at least one of a width or a height of the current video block.
21. The method of claim 18 or 19, further comprising:
determining a size of a video processing data unit (VPDU), and wherein the determining whether to use the interweaved prediction tool is based on the size of the VPDU.
22. The method of claim 18, wherein a prediction method that is different than the interweaved prediction is applied for the current video block.
23. The method of claim 18, wherein a width and a height of the current video block are W and H , respectively, and T , T_1 , T_2 are integer values, and wherein the interweaved prediction is disabled for a certain condition including one of:
- i. $W > T_1$ and $H > T_2$,
 - ii. $W > T_1$ or $H > T_2$,
 - iii. $W \times H > T$,
 - iv. $W < T_1$ and $H < T_2$, or
 - v. $W < T_1$ or $H < T_2$.
 - vi. $W * H < T$.
24. The method of claim 18 or 19, further comprising:
determining that a first sub-block of the current video block is not located at a block boundary; and
disabling, upon a determination that the first sub-block is not located at the block boundary, an interweaved affine technique for the first sub-block.
25. The method of claim 24, wherein prediction results from an original affine prediction technique is used for a final prediction for the first sub-block.

26. The method of claim 18, wherein a width and a height of the current video block are W and H , respectively, and T , T_1 , T_2 are integer values, and wherein the interweaved prediction is used for a certain condition including one of:

- i. $W > T_1$ and $H > T_2$,
- ii. $W > T_1$ or $H > T_2$,
- iii. $W \times H > T$,
- iv. $W < T_1$ and $H < T_2$, or
- v. $W < T_1$ or $H < T_2$.
- vi. $W \times H < T$.

27. The method of claim 18, wherein the interweaved prediction is not applied to samples belonging to a sub-block crossing an upper $W \times (H/2)$ partition and a lower $W \times (H/2)$ partition of the current video block in a case that a height (H) of the current video block is greater than X , X being an integer.

28. The method of claim 18, wherein the interweaved prediction is not applied to samples belonging to a sub-block crossing both a left $(W/2) \times H$ partition and a right $(W/2) \times H$ partition of the current video block in a case that a width (W) of the current video block is greater than X , X being an integer.

29. The method of claim 27 or 28, wherein $X=64$.

30. The method of claim 19, wherein the interweaved prediction is allowed for specific types of a video data unit including the current video block, the video data unit including a picture, a slice, a tile group, or a tile.

31. The method of claim 19, wherein the interweaved prediction is used for P pictures or B pictures.

32. The method of claim 18 or 19, wherein a flag indicating whether the interweaved prediction tool is used or disabled is signaled in a header of a picture, a slice, a tile group, or a tile.
33. The method of claim 32, wherein the flag is signaled based on whether an affine prediction is allowed for the current video block.
34. The method of claim 18 or 19, wherein a message is signaled to indicate whether to use the characteristics of the current video block in a video processing unit including a video parameter set (VPS), a sequence parameter set (SPS), a picture parameter set (PPS), a slice header, a picture header, a tile group header, a tile, a coding tree unit (CTU), or a CTU row.
35. A method for video processing, comprising:
determining that interweaved prediction is to be applied for a current video block of a video;
disabling bi-prediction for the current video block based on the determination that interweaved prediction is to be applied; and
performing a conversion between the current video block and a coded representation of the video.
36. The method of claim 35, wherein an index to indicate that bi-prediction is used is not signaled.
37. The method of claim 36, wherein bi-prediction is disabled based on an indication signaled in video parameter set (VPS), a sequence parameter set (SPS), a picture parameter set (PPS), a slice header, a picture header, a tile group header, a tile, a coding tree unit (CTU), a CTU row, or multiple CTUs.
38. The method of any of claims 1 to 37, wherein the conversion comprises generating pixel values of the current video block from the bitstream representation.

39. The method of any of claims 1 to 37, wherein the conversion comprises generating the bitstream representation from pixel values of the current video block.

40. An apparatus in a video system comprising a processor and a non-transitory memory with instructions thereon, wherein the instructions upon execution by the processor, cause the processor to implement the method recited in one or more of claims 1 to 39.

41. A computer program product stored on a non-transitory computer readable media, the computer program product including program code for carrying out the method recited in one or more of claims 1 to 39.

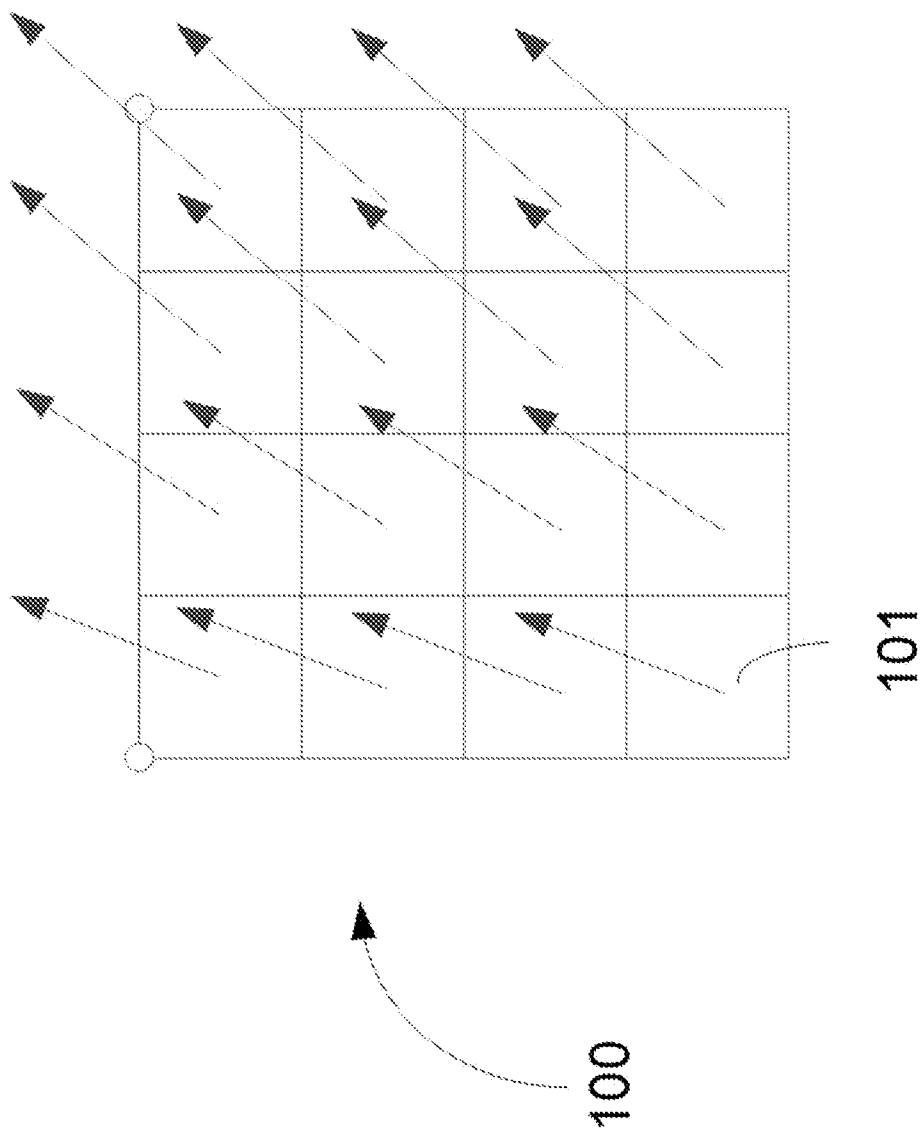


FIG. 1

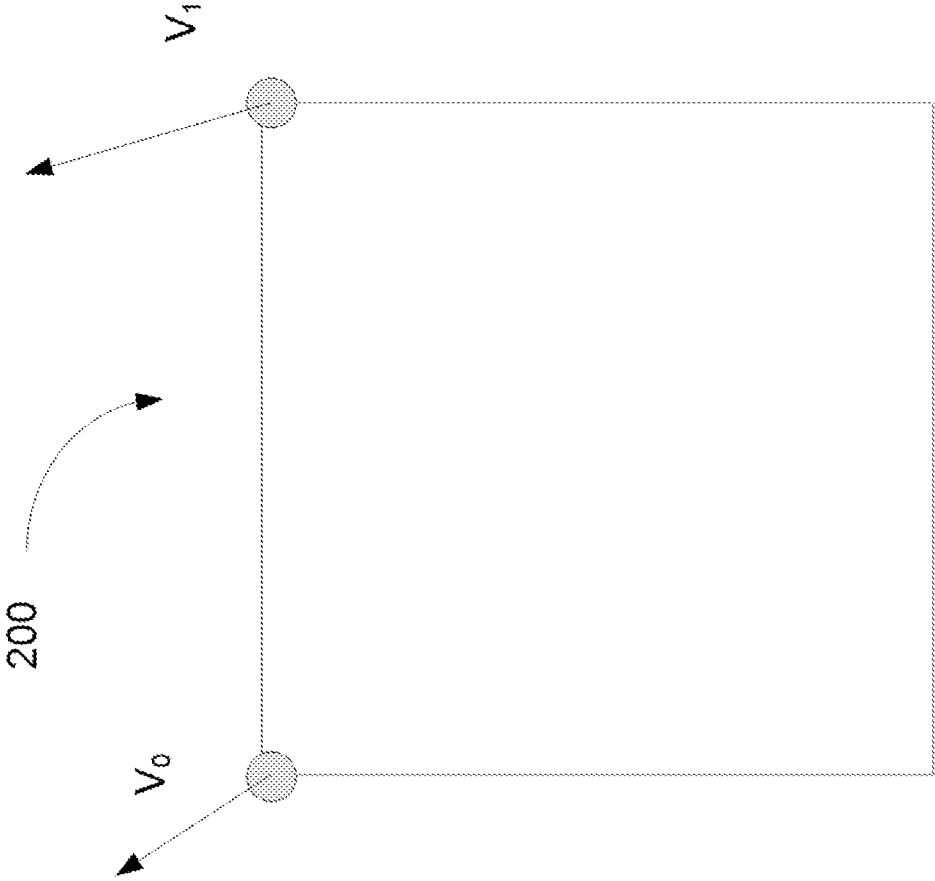


FIG. 2

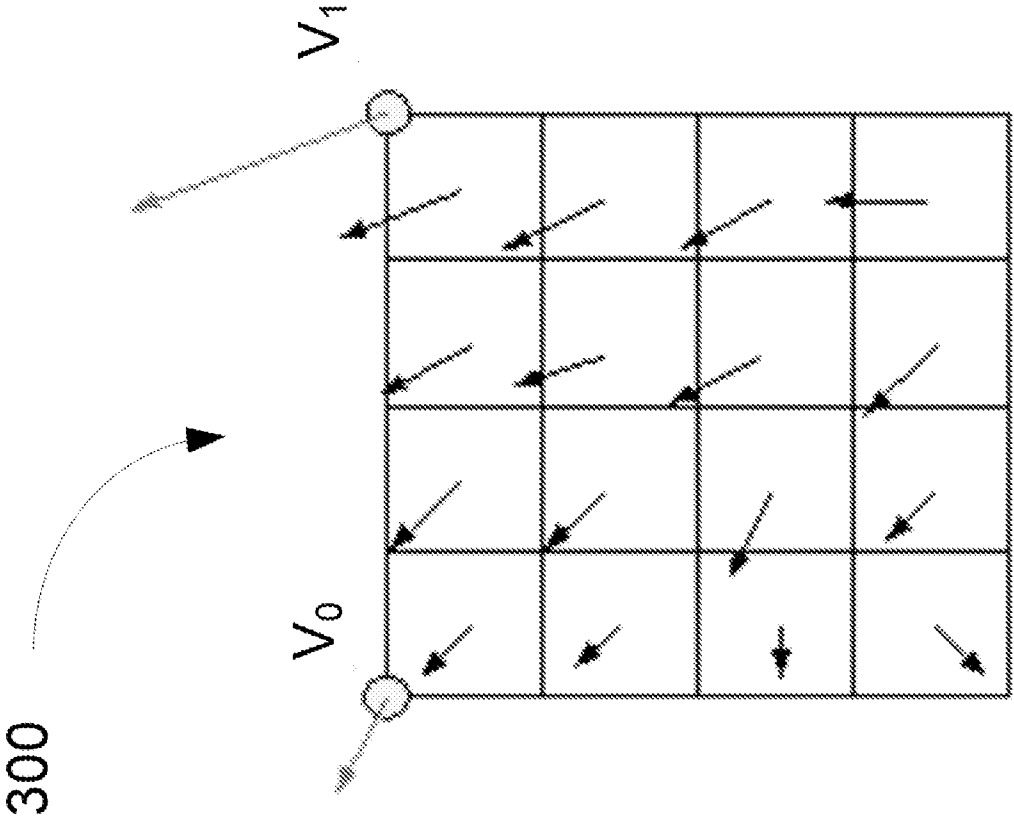


FIG. 3

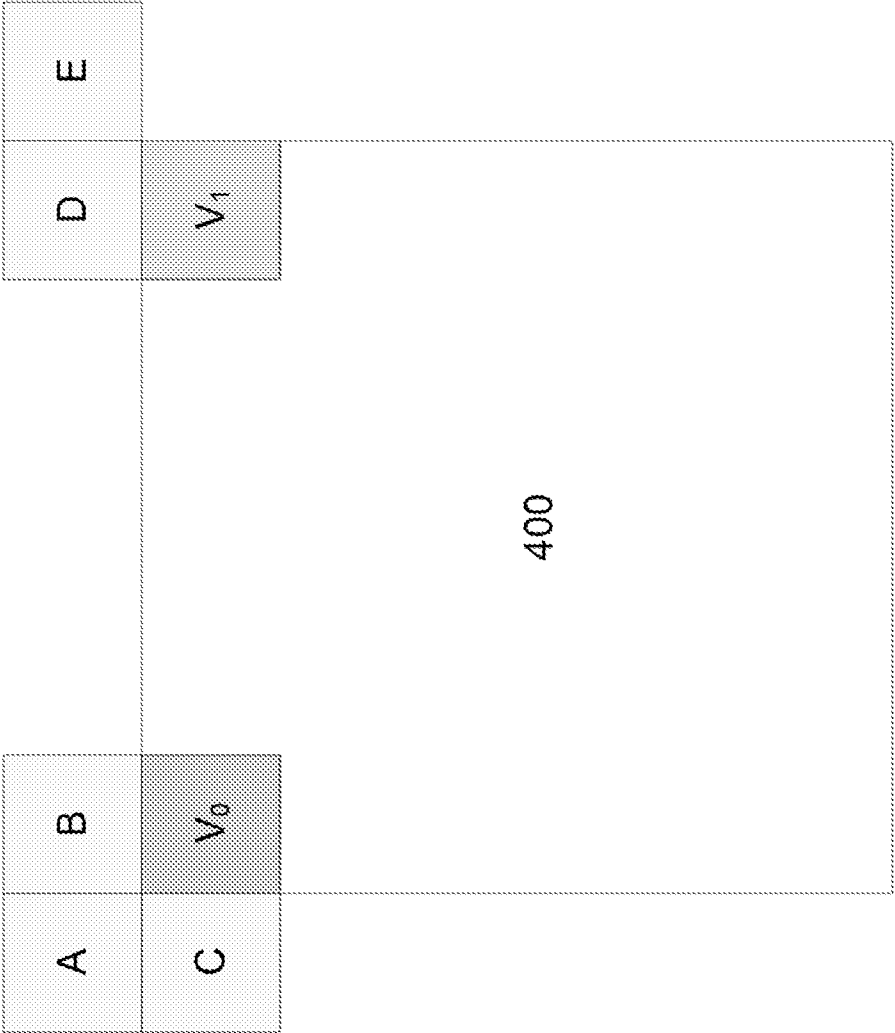


FIG. 4

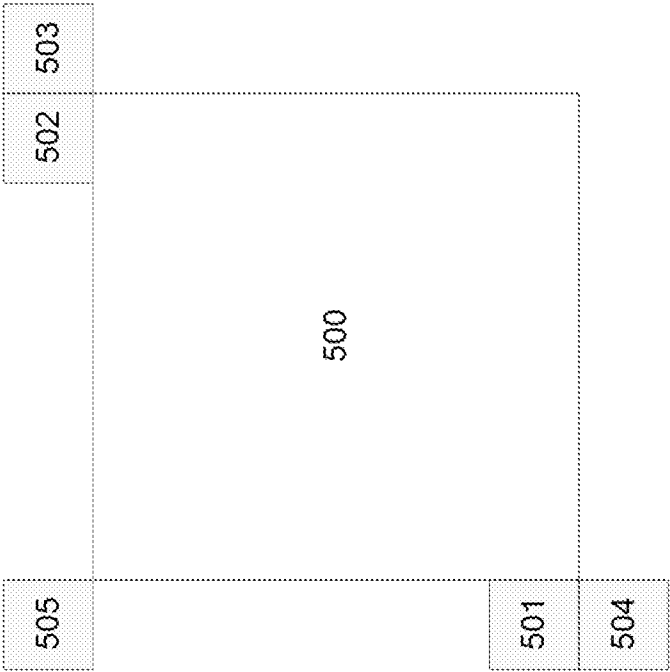


FIG. 5A

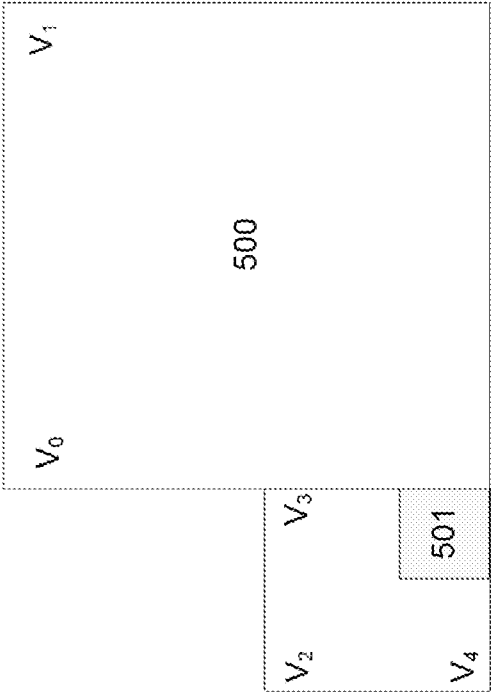


FIG. 5B

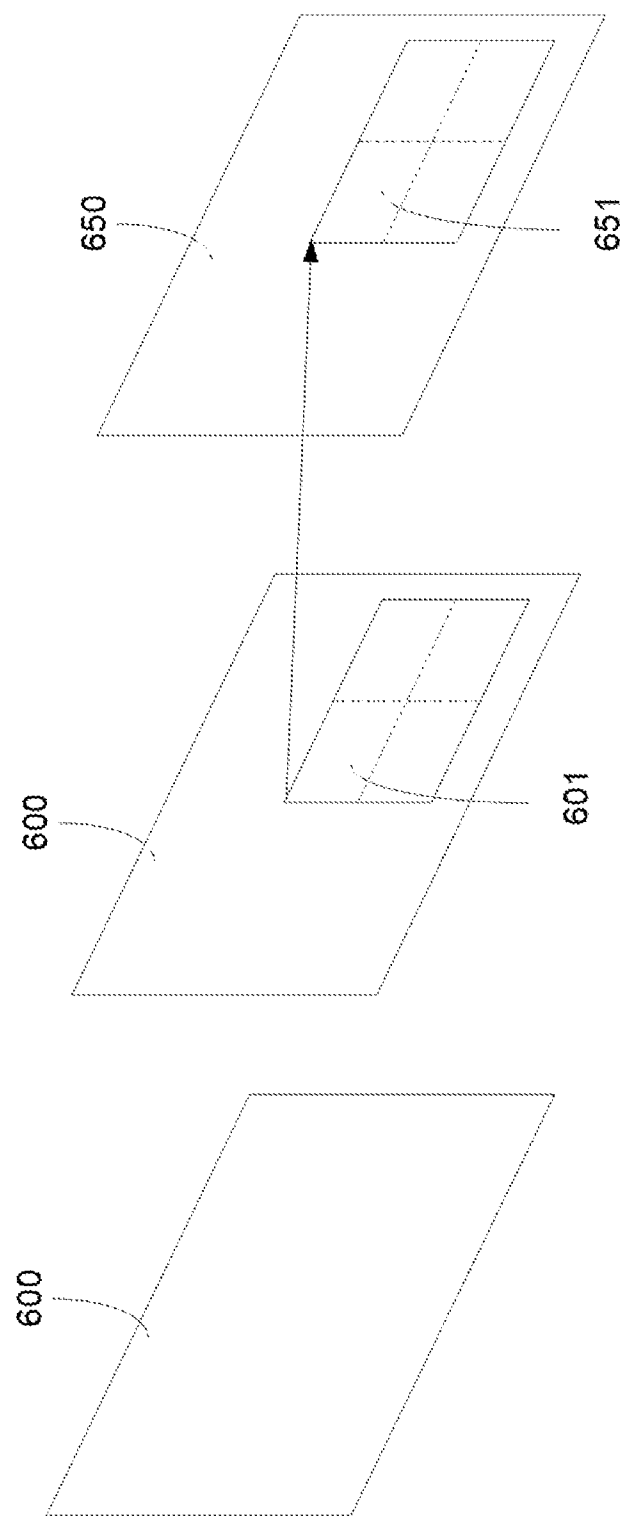


FIG. 6



FIG. 7

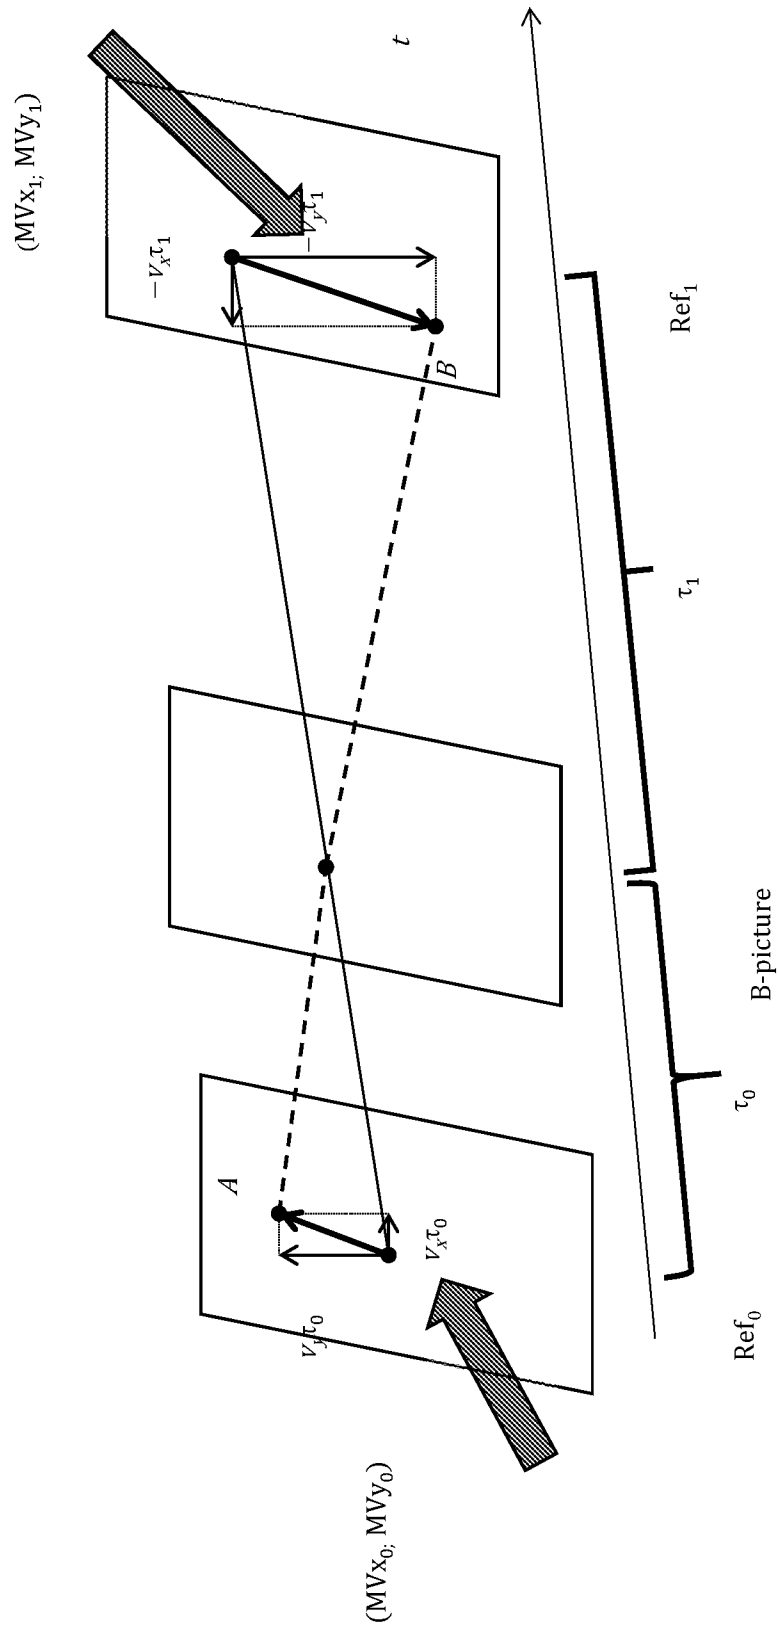


FIG. 8

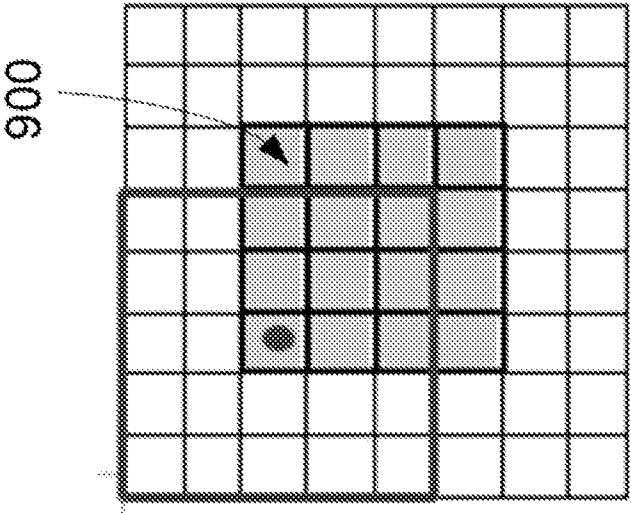


FIG. 9A

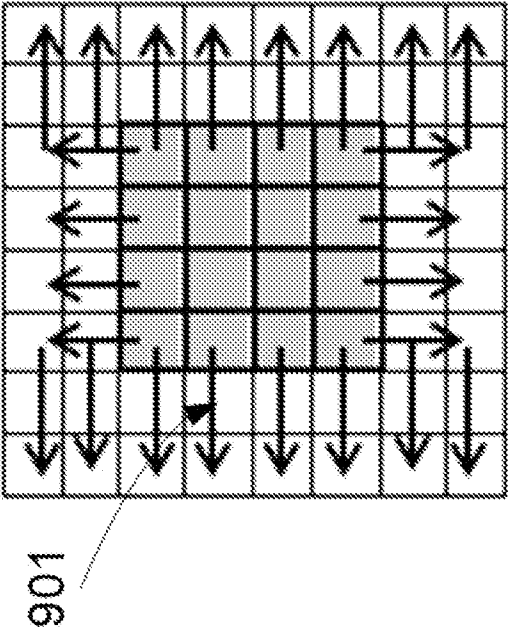


FIG. 9B

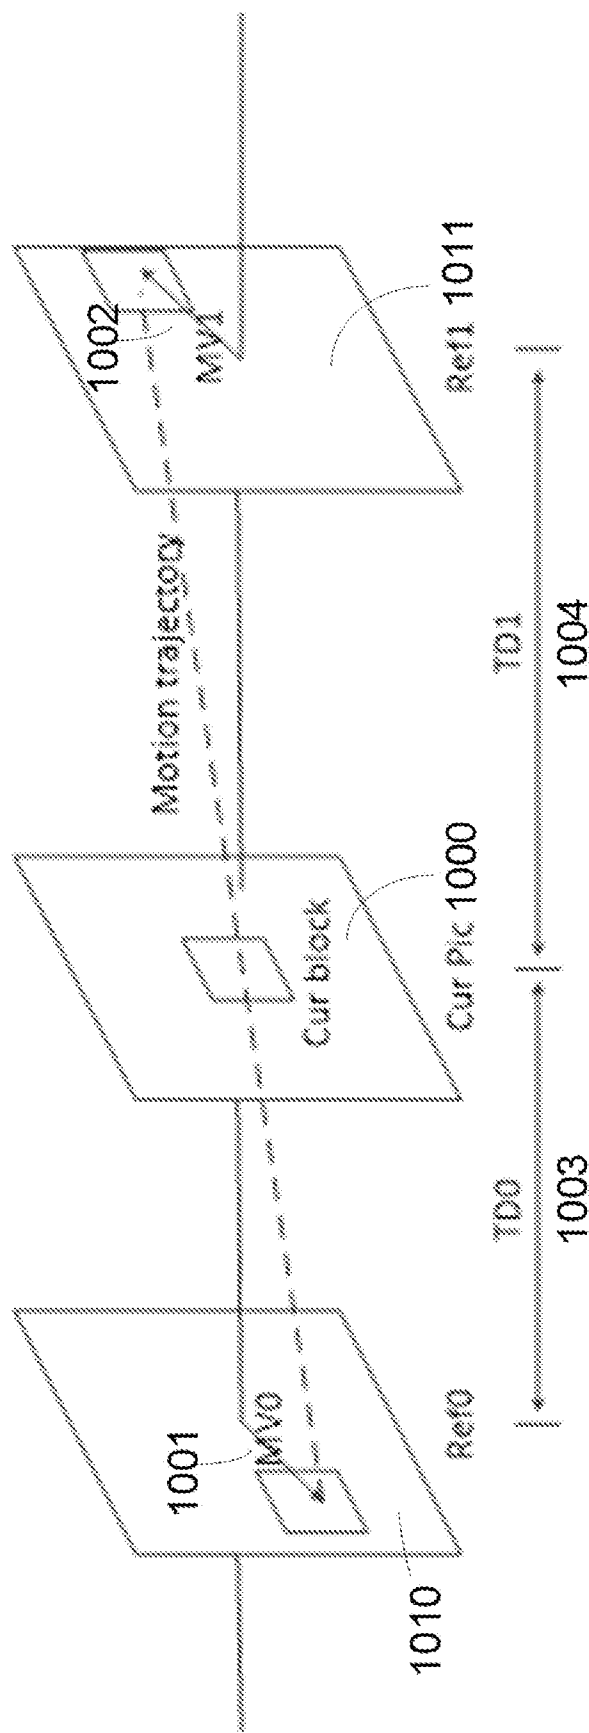


FIG. 10

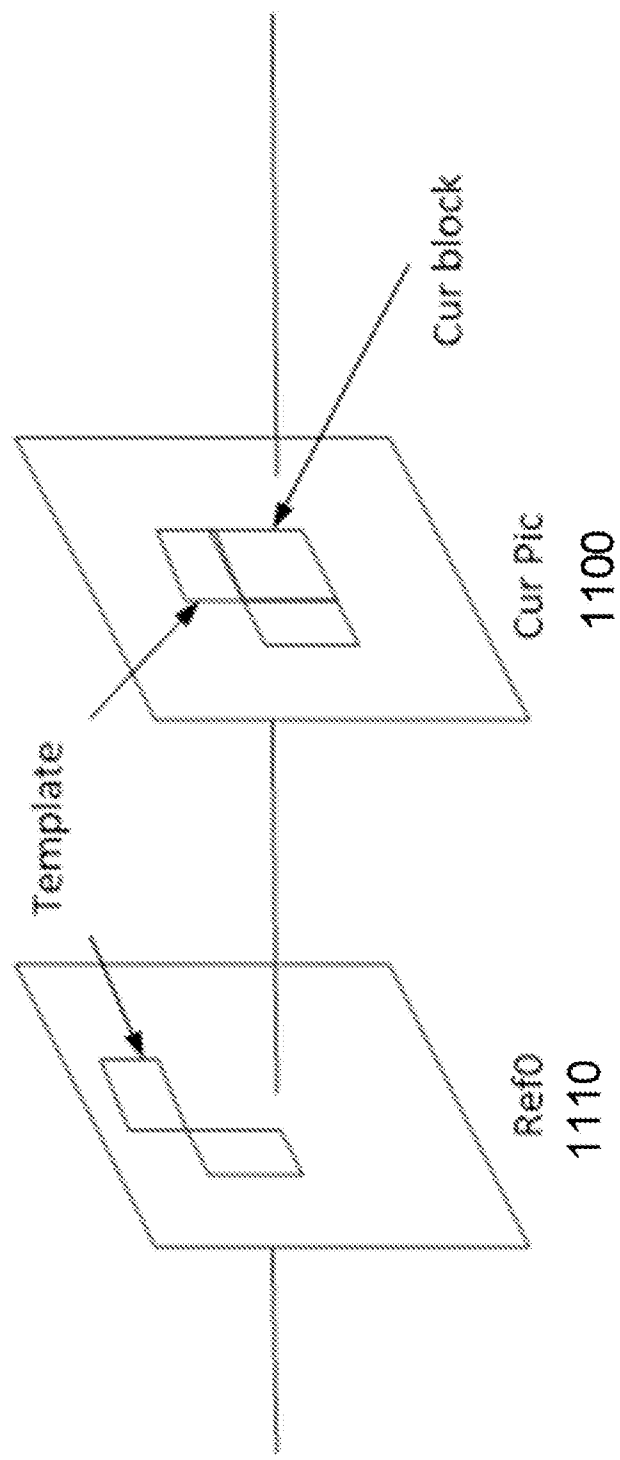


FIG. 11

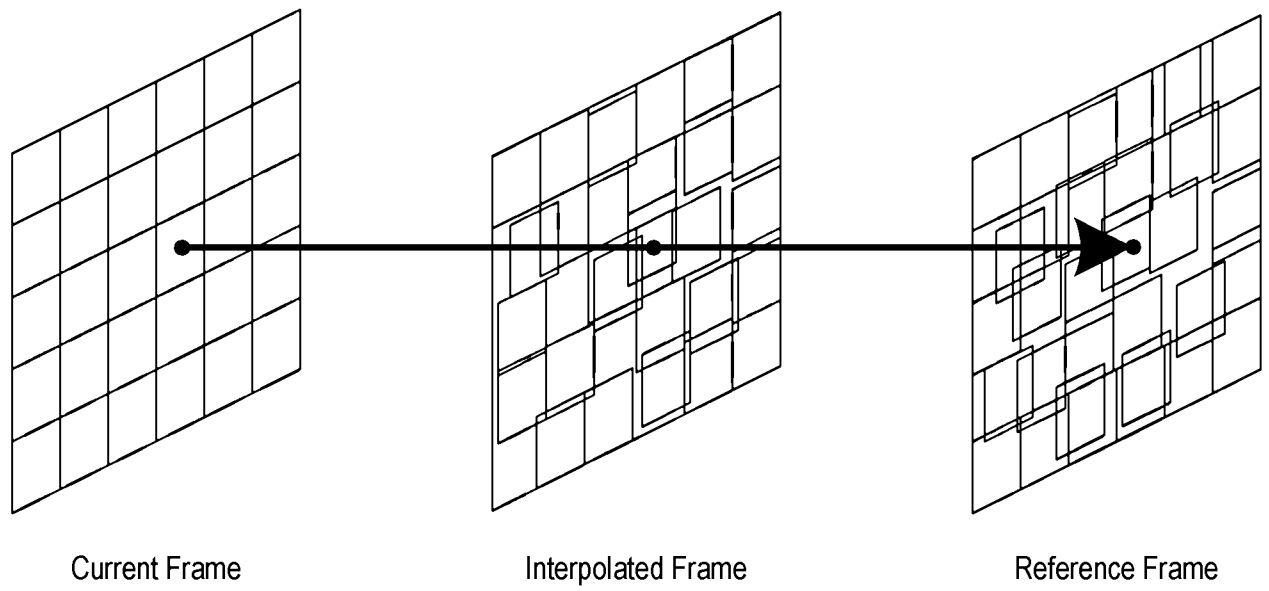
1200

FIG. 12

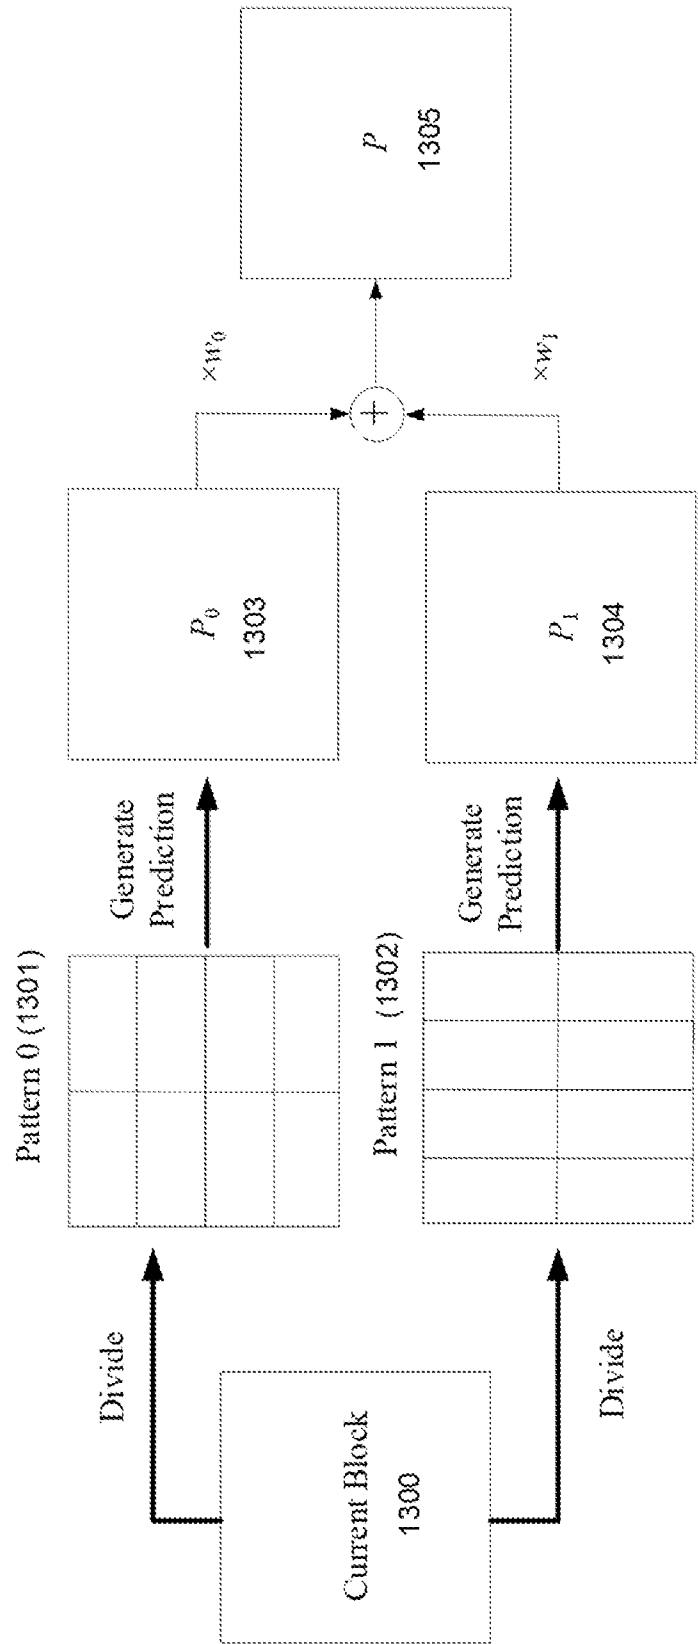


FIG. 13

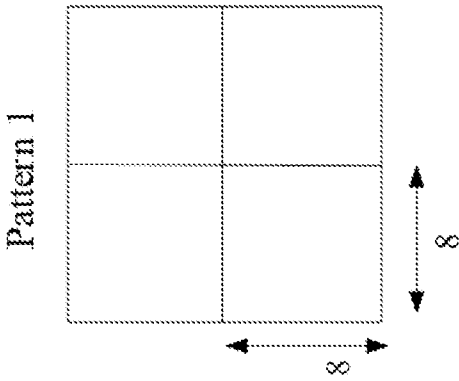


FIG. 14B

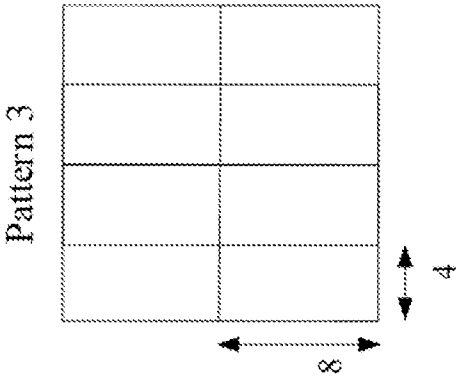


FIG. 14D

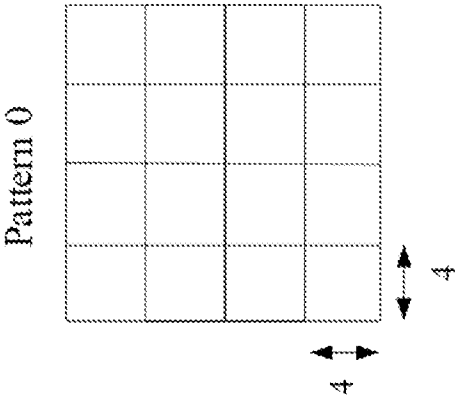


FIG. 14A

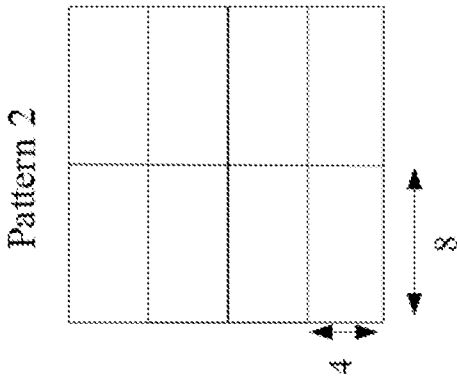


FIG. 14C

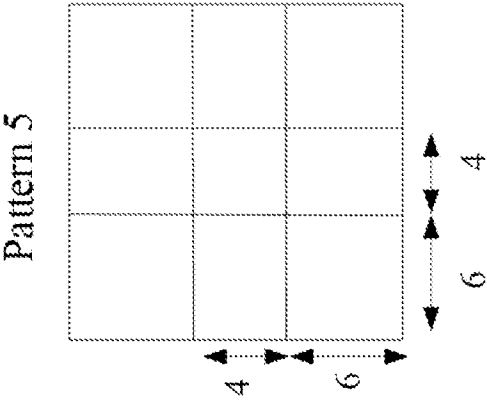


FIG. 14F

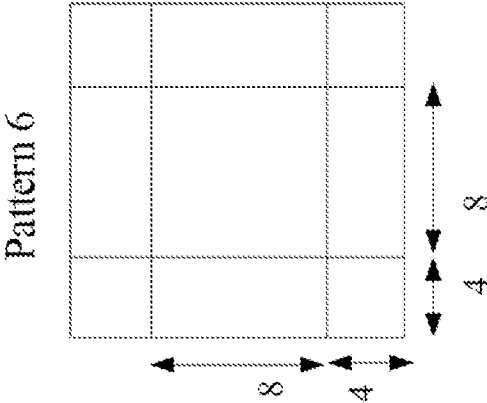


FIG. 14G

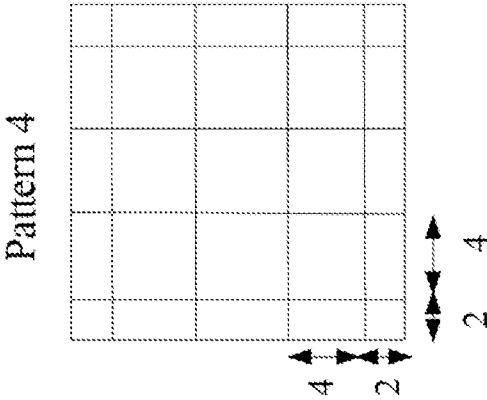


FIG. 14E

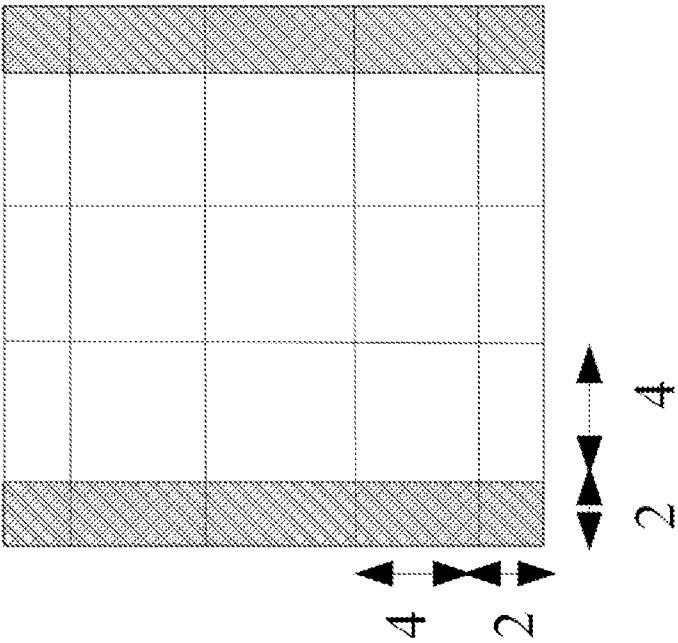


FIG. 15A

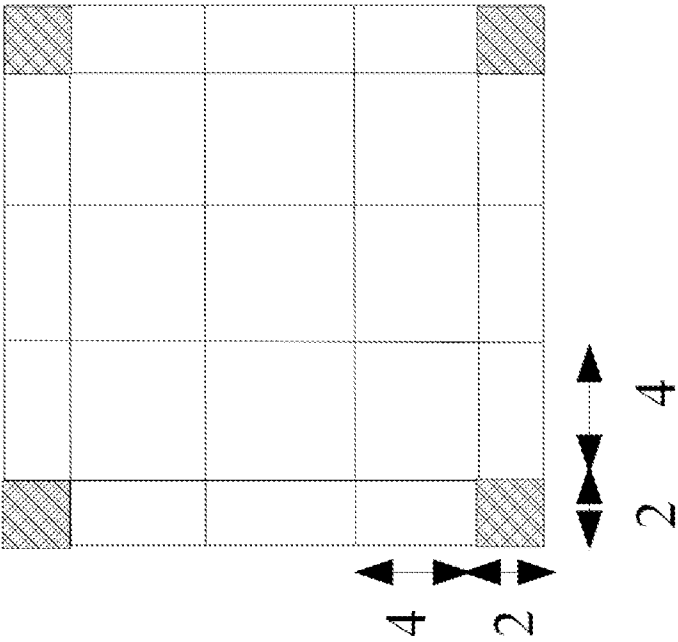


FIG. 15B

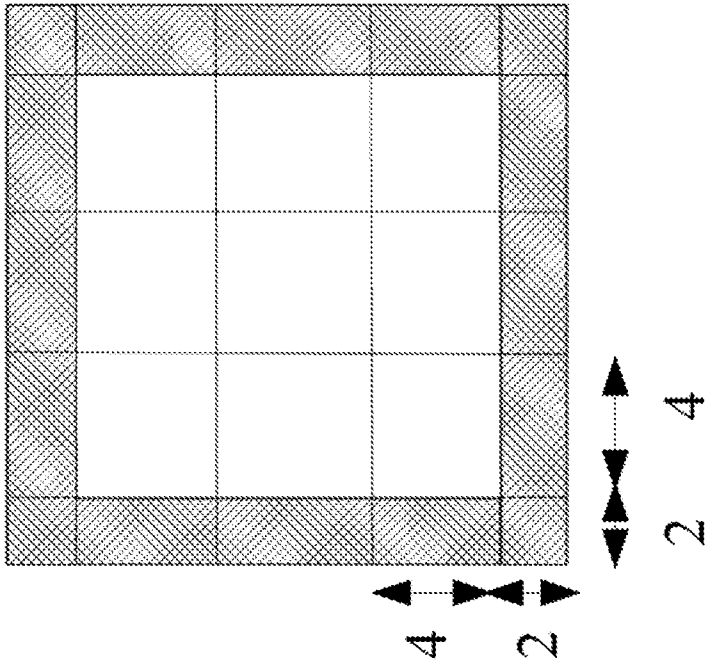


FIG. 15D

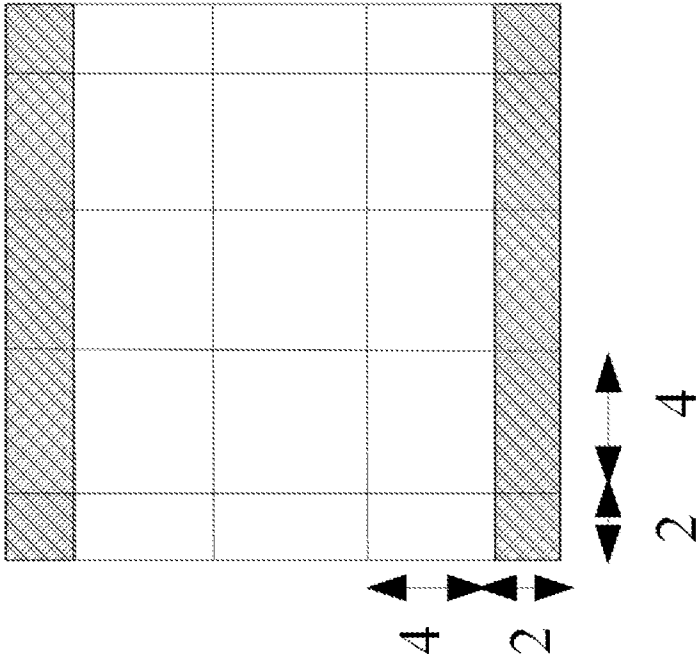


FIG. 15C


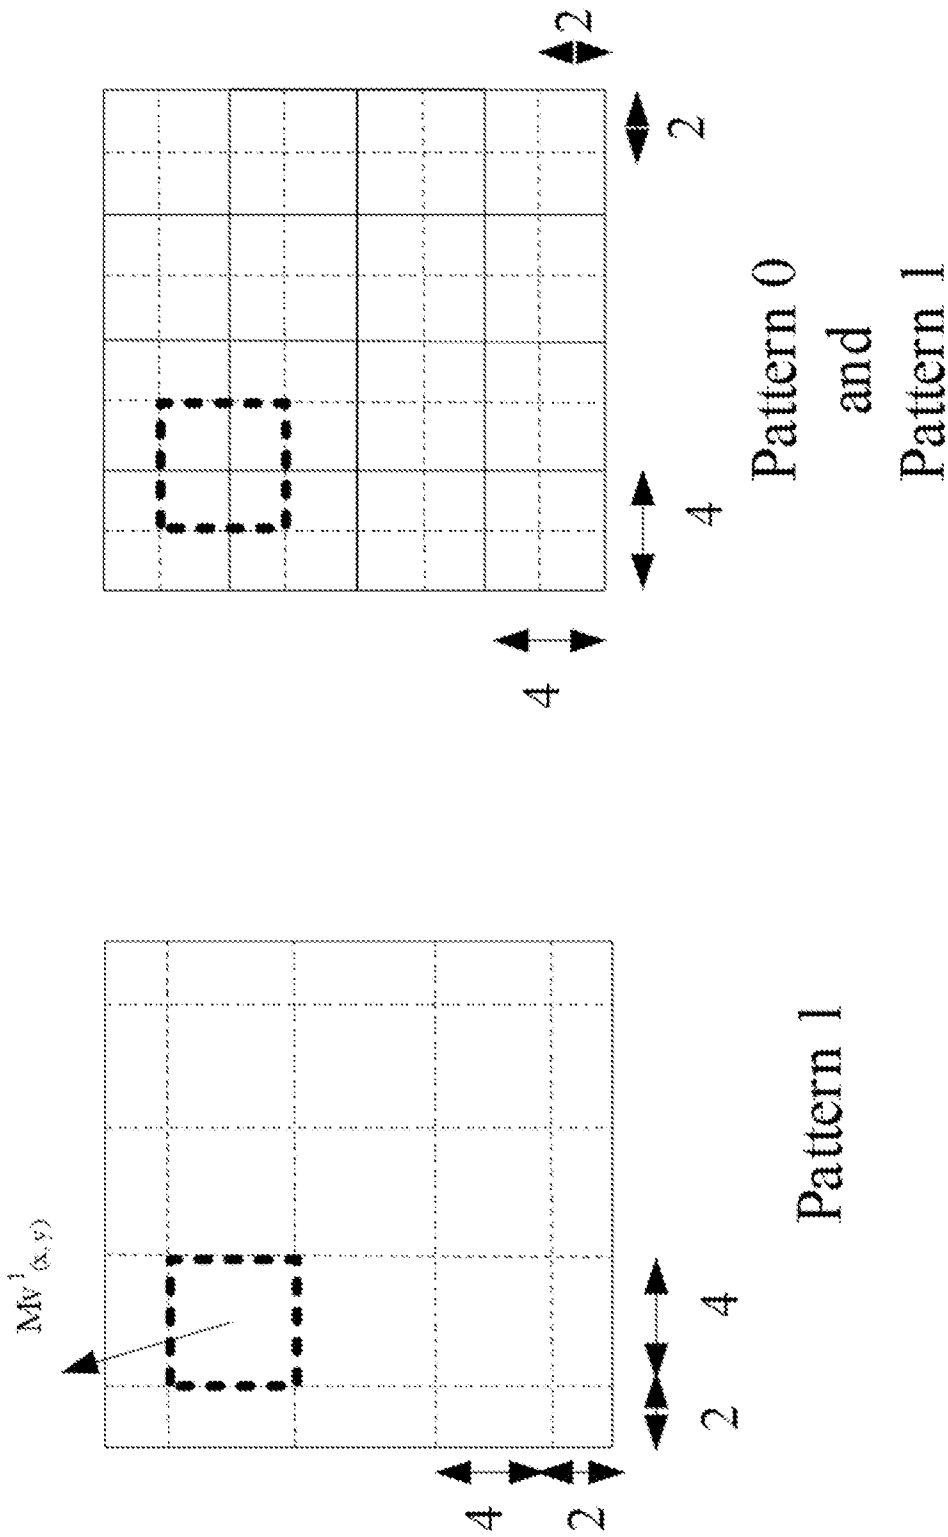


FIG. 16B

FIG. 16A

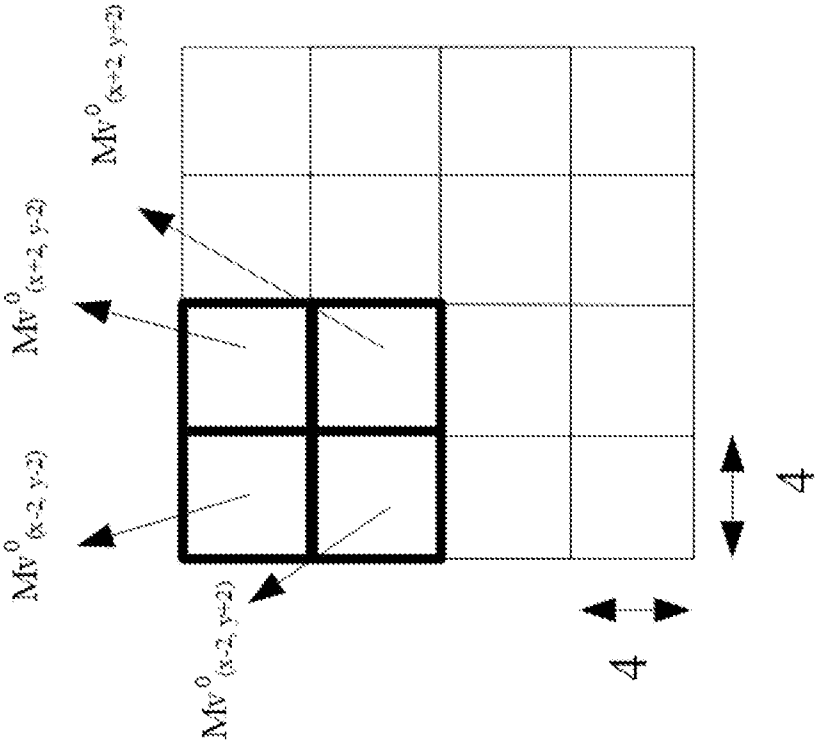

Pattern 0

FIG. 16C

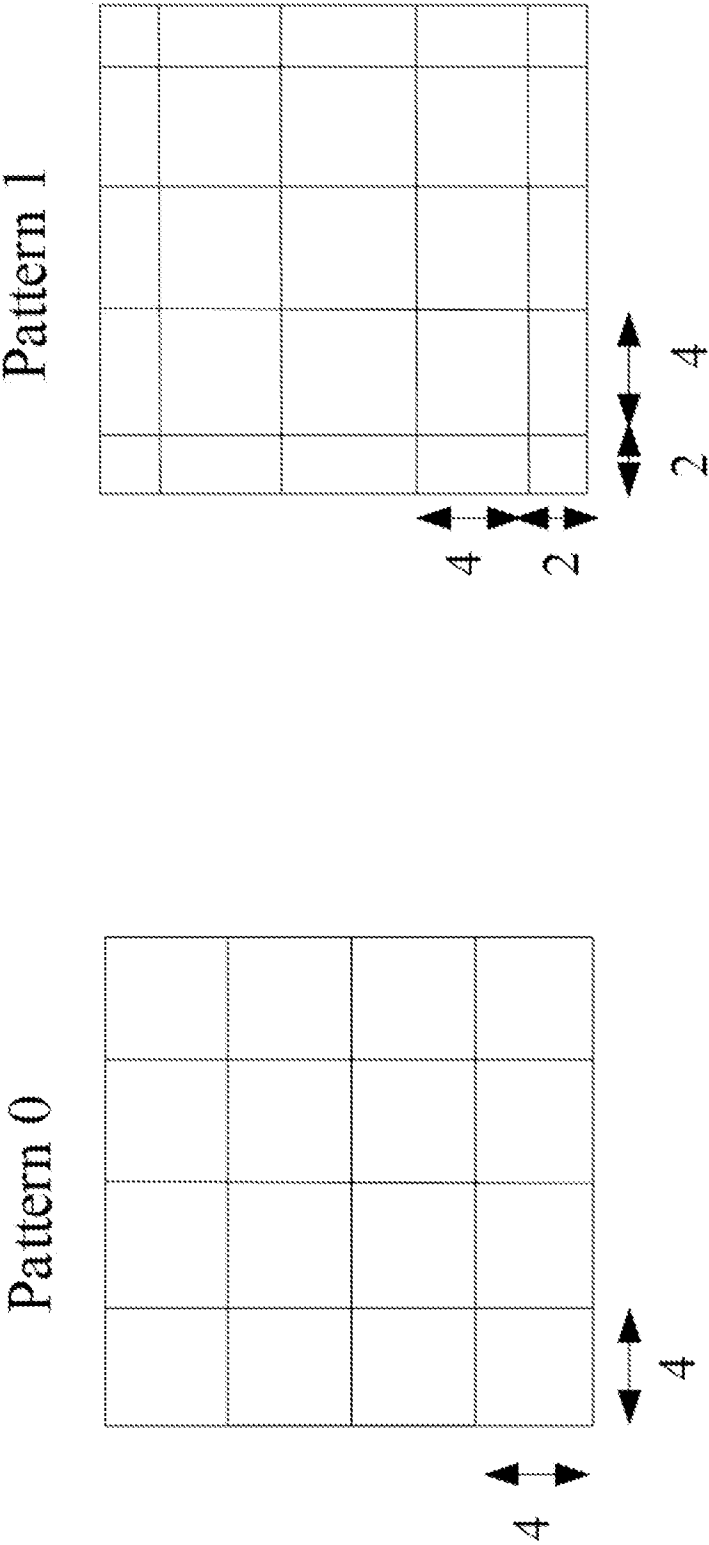


FIG. 17A

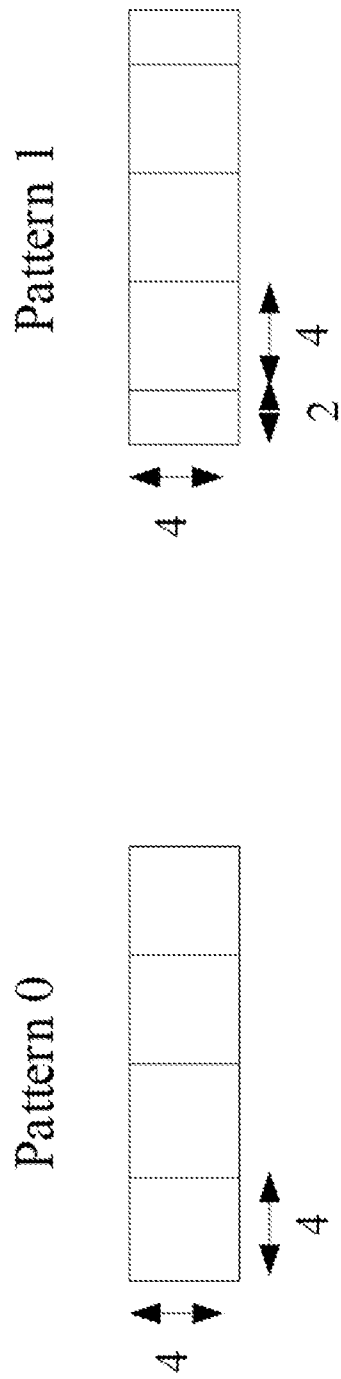


FIG. 17B

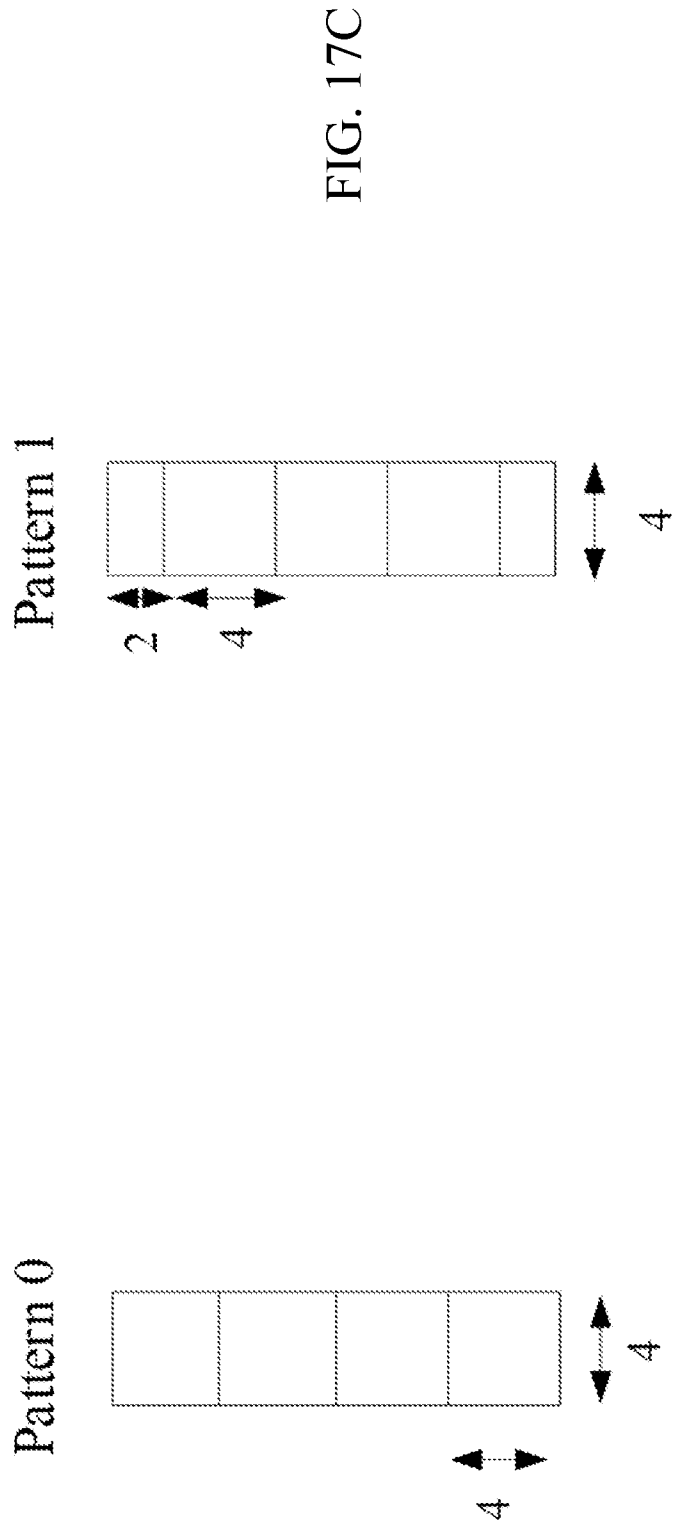


FIG. 17C

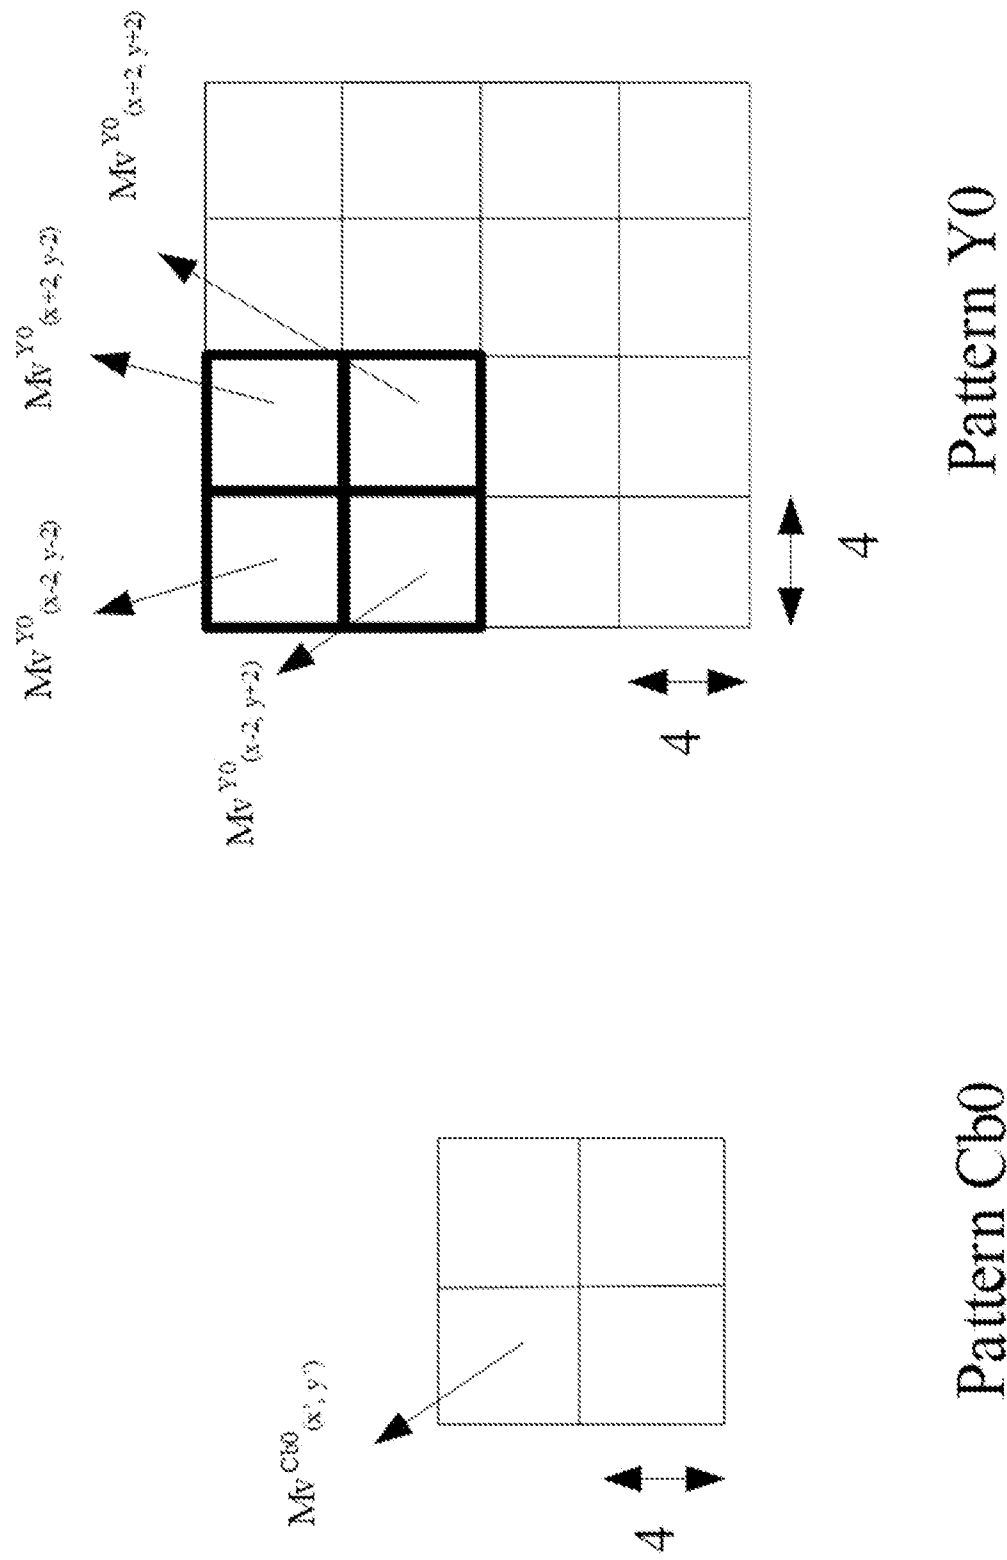


FIG. 18A

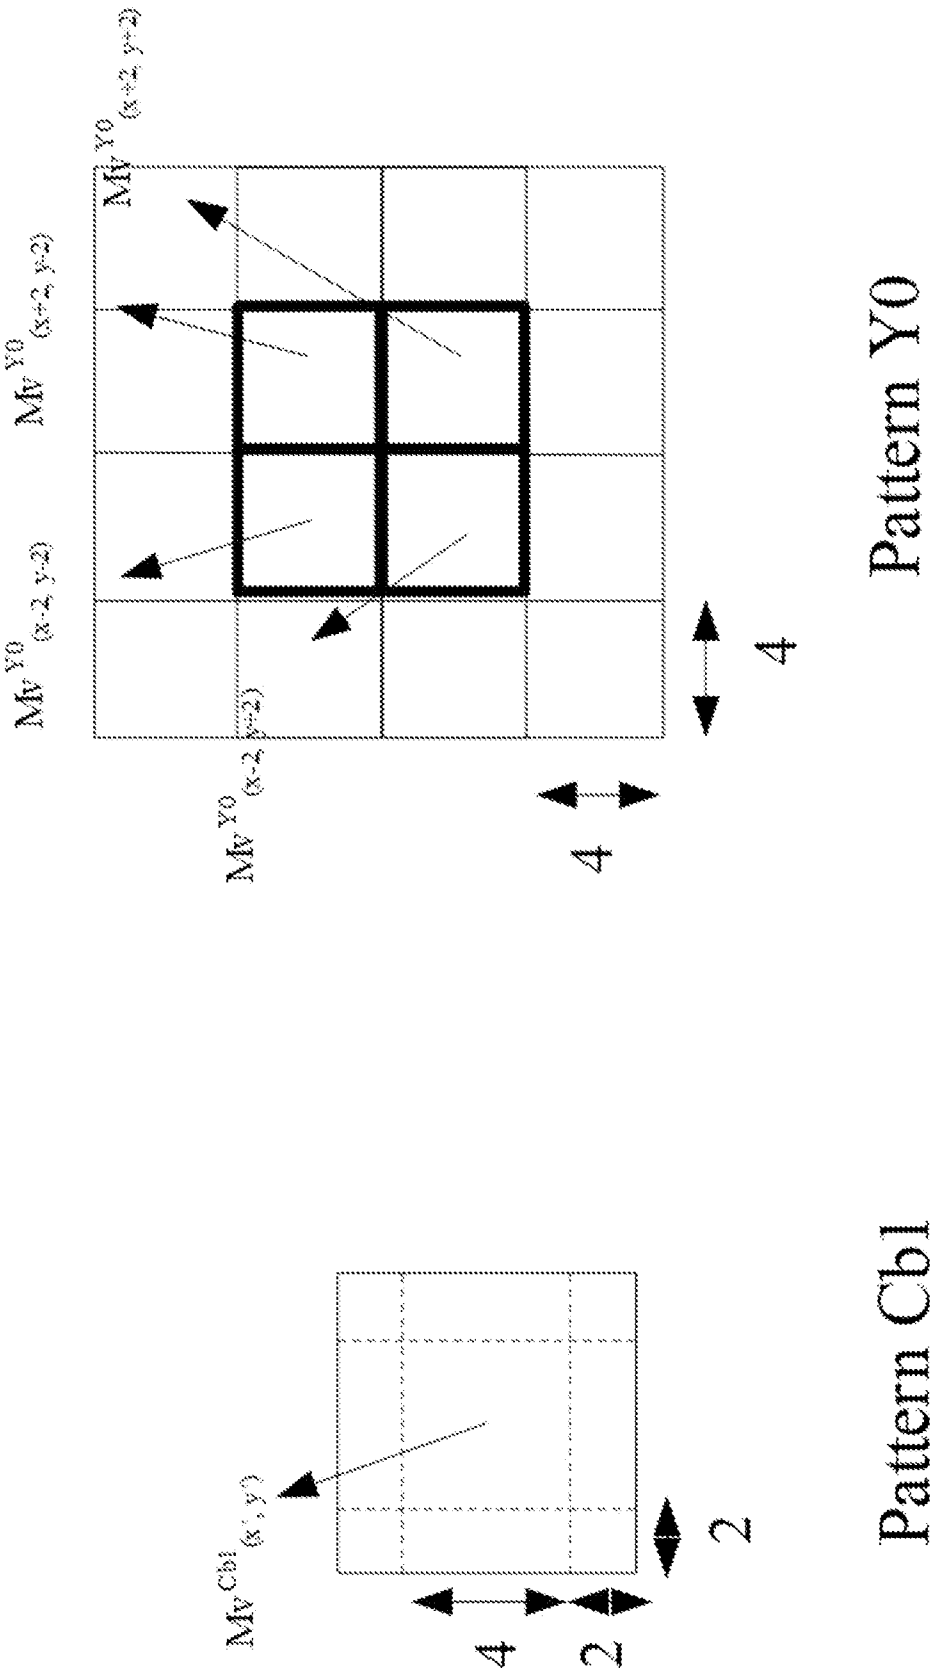


FIG. 18B

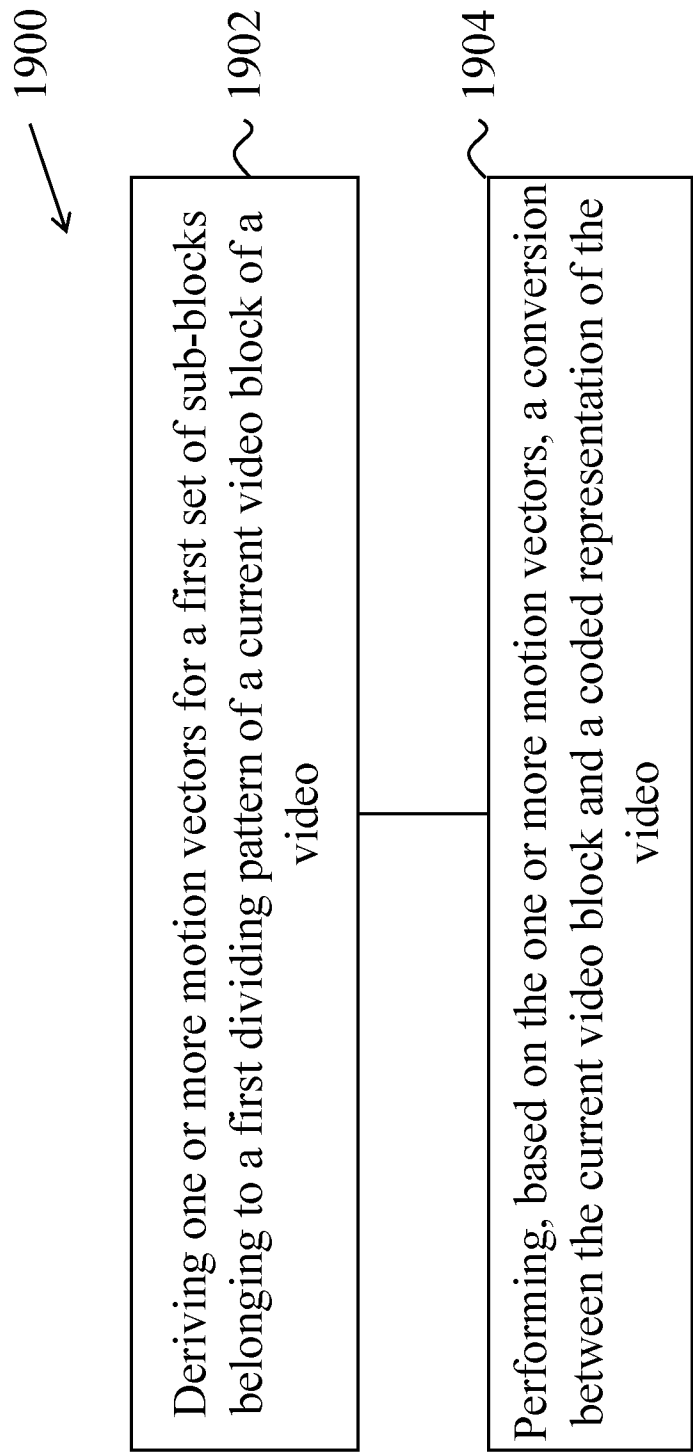


FIG. 19

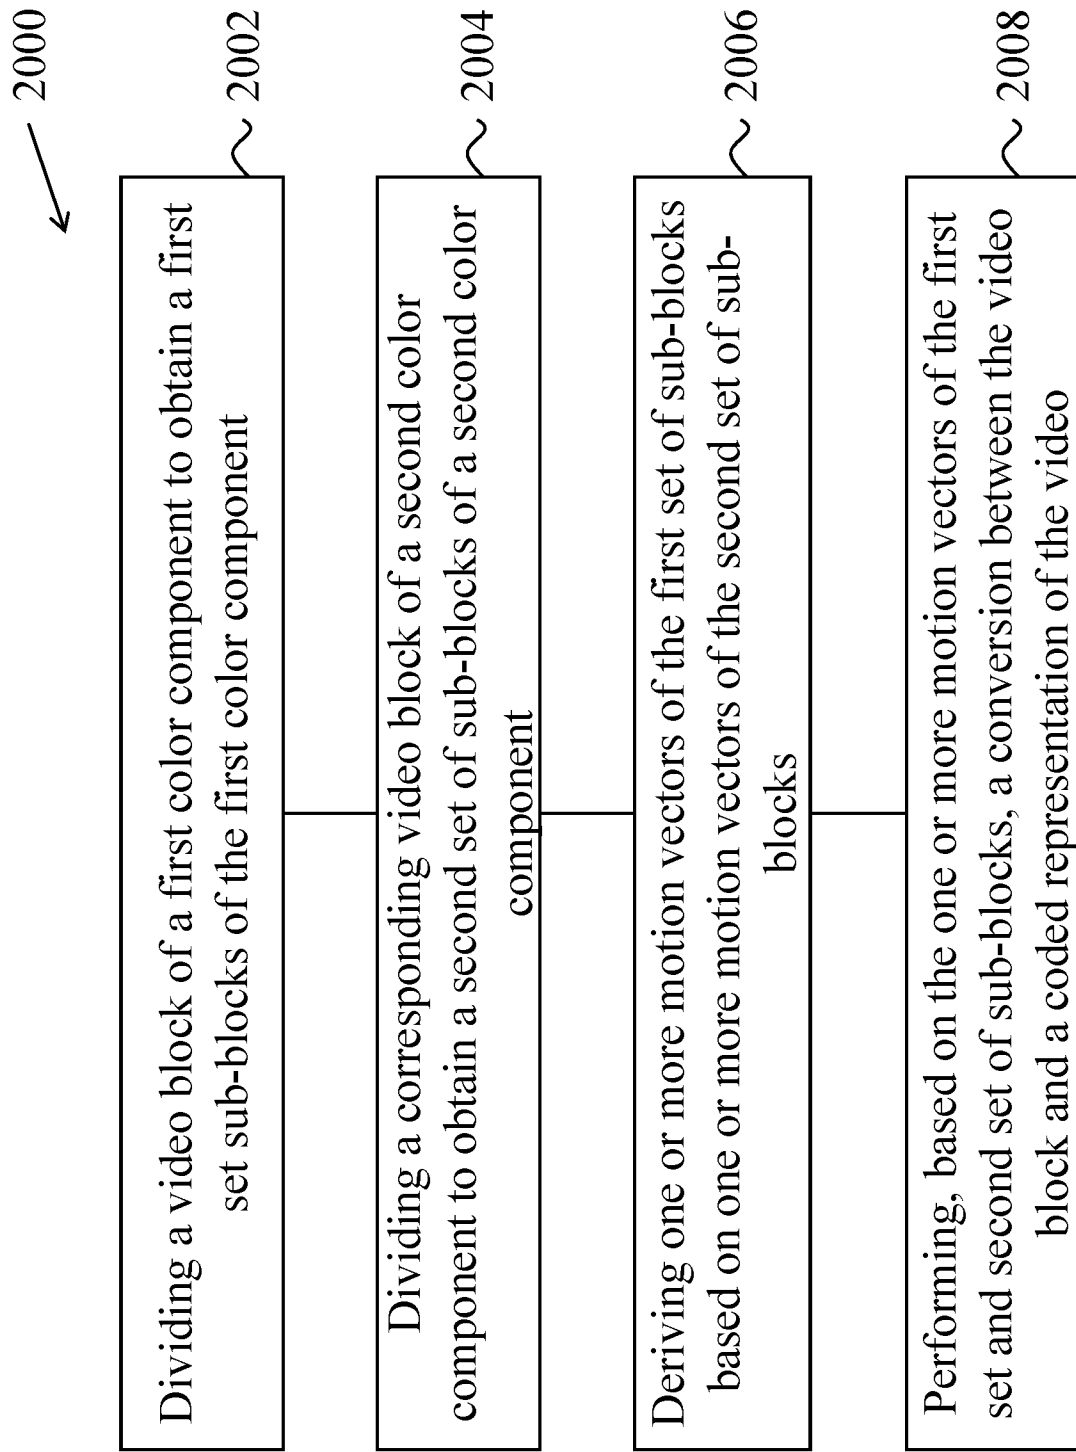


FIG. 20

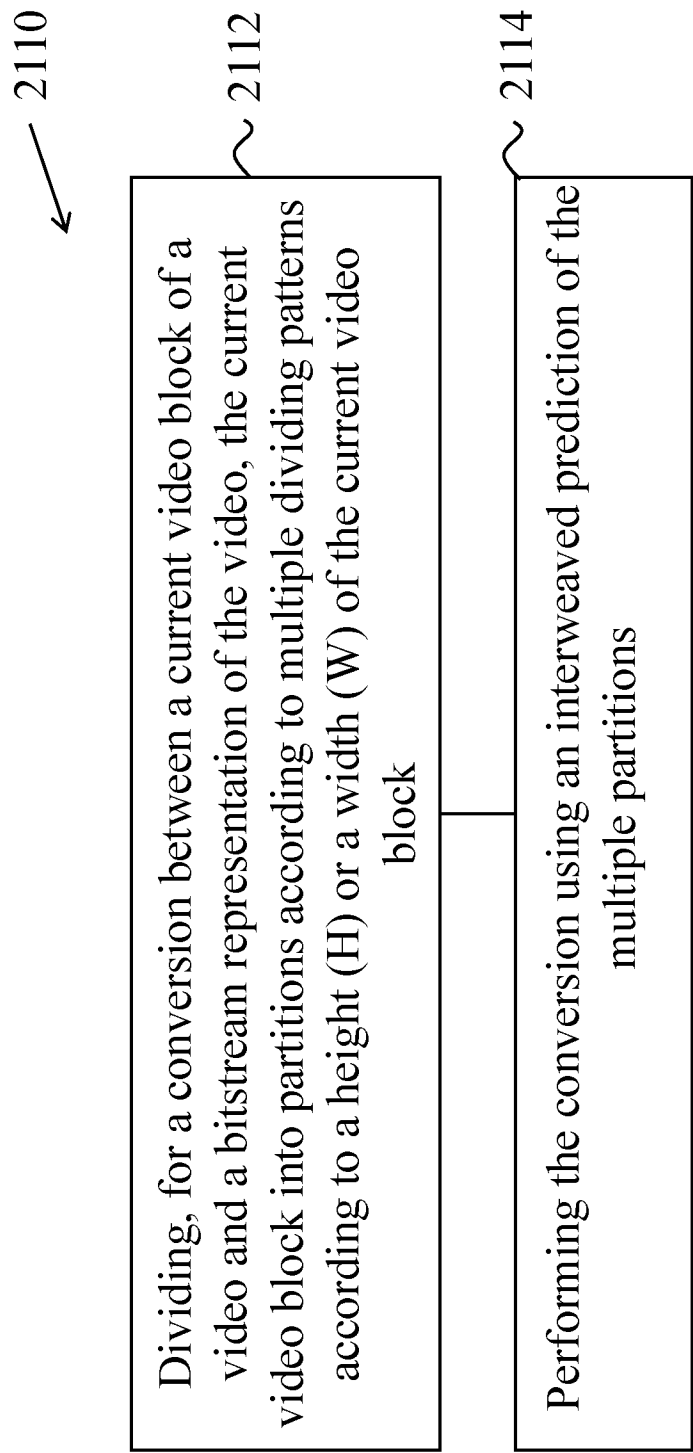


FIG. 21A

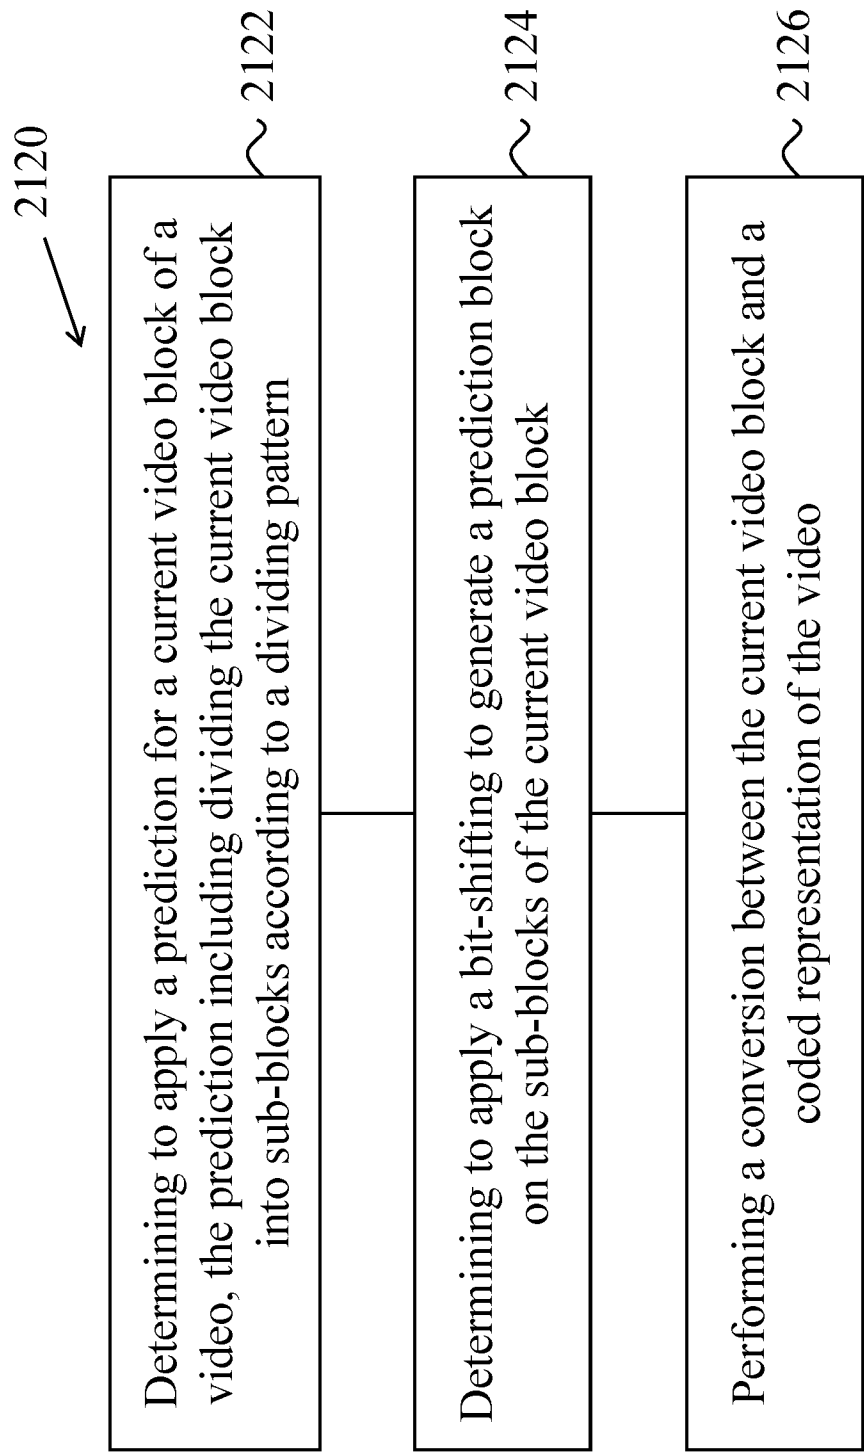


FIG. 21B

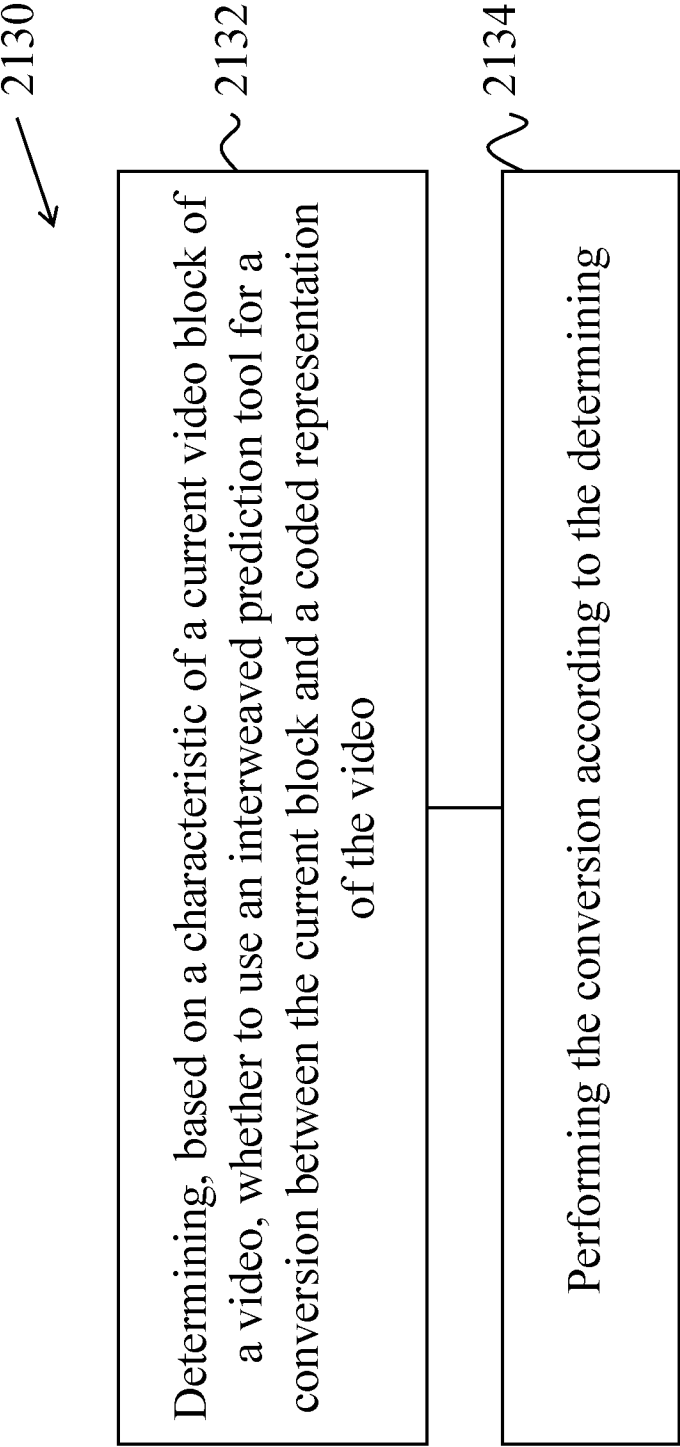


FIG. 21C

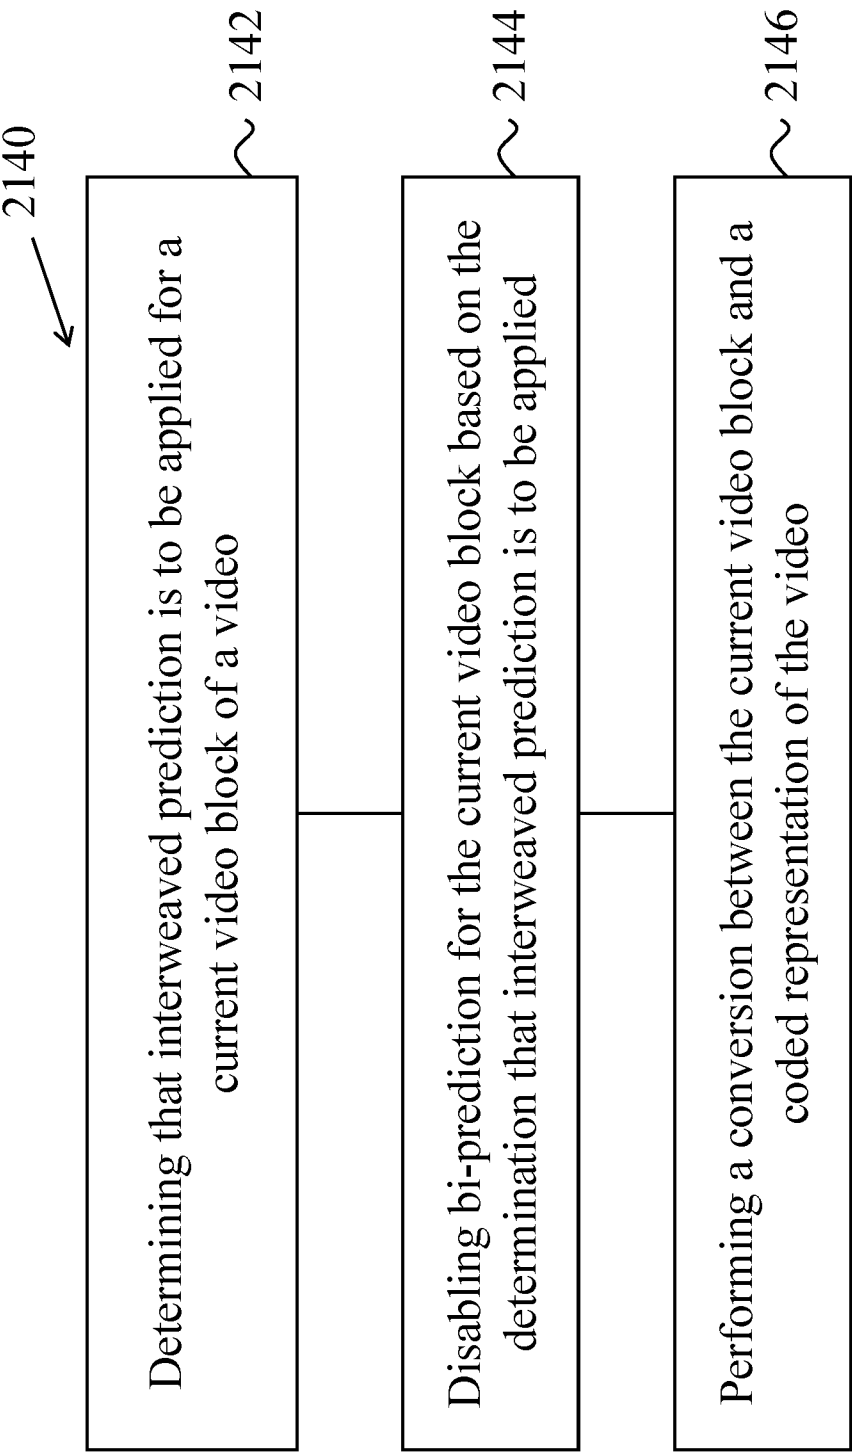


FIG. 21D

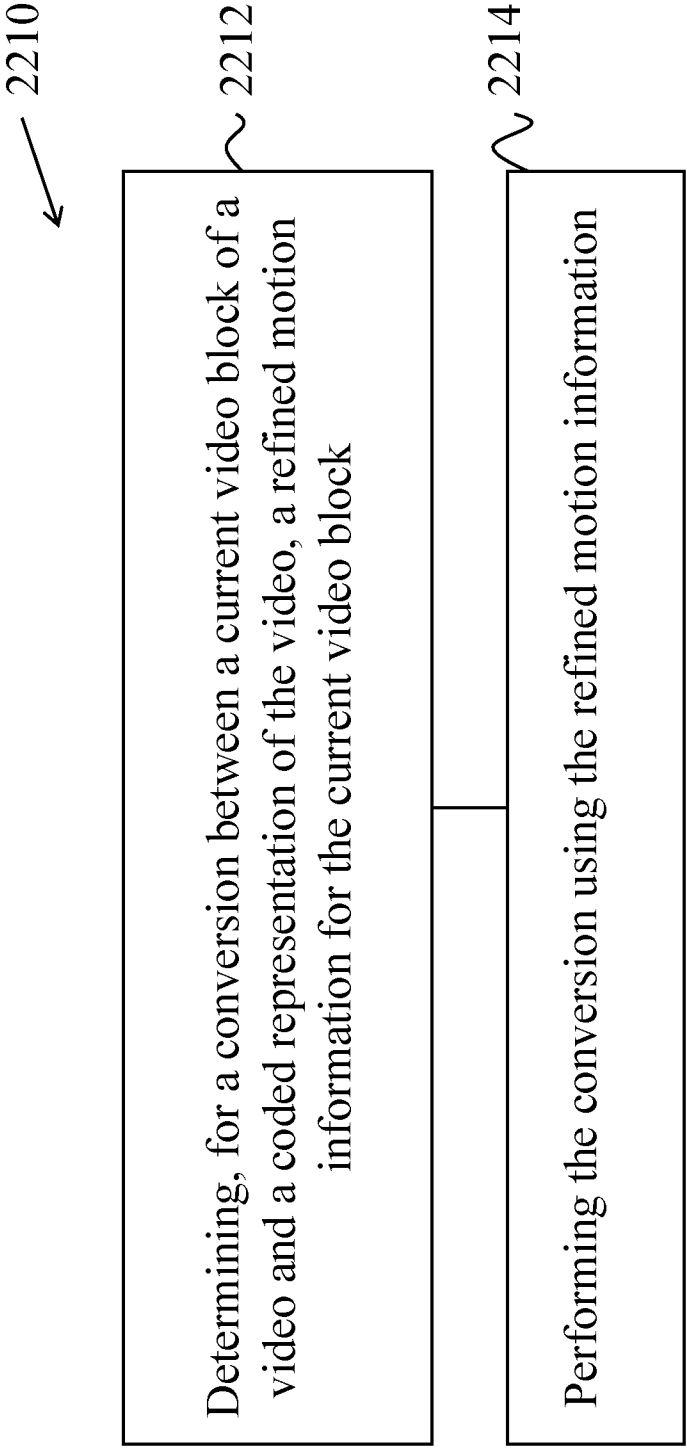


FIG. 22A

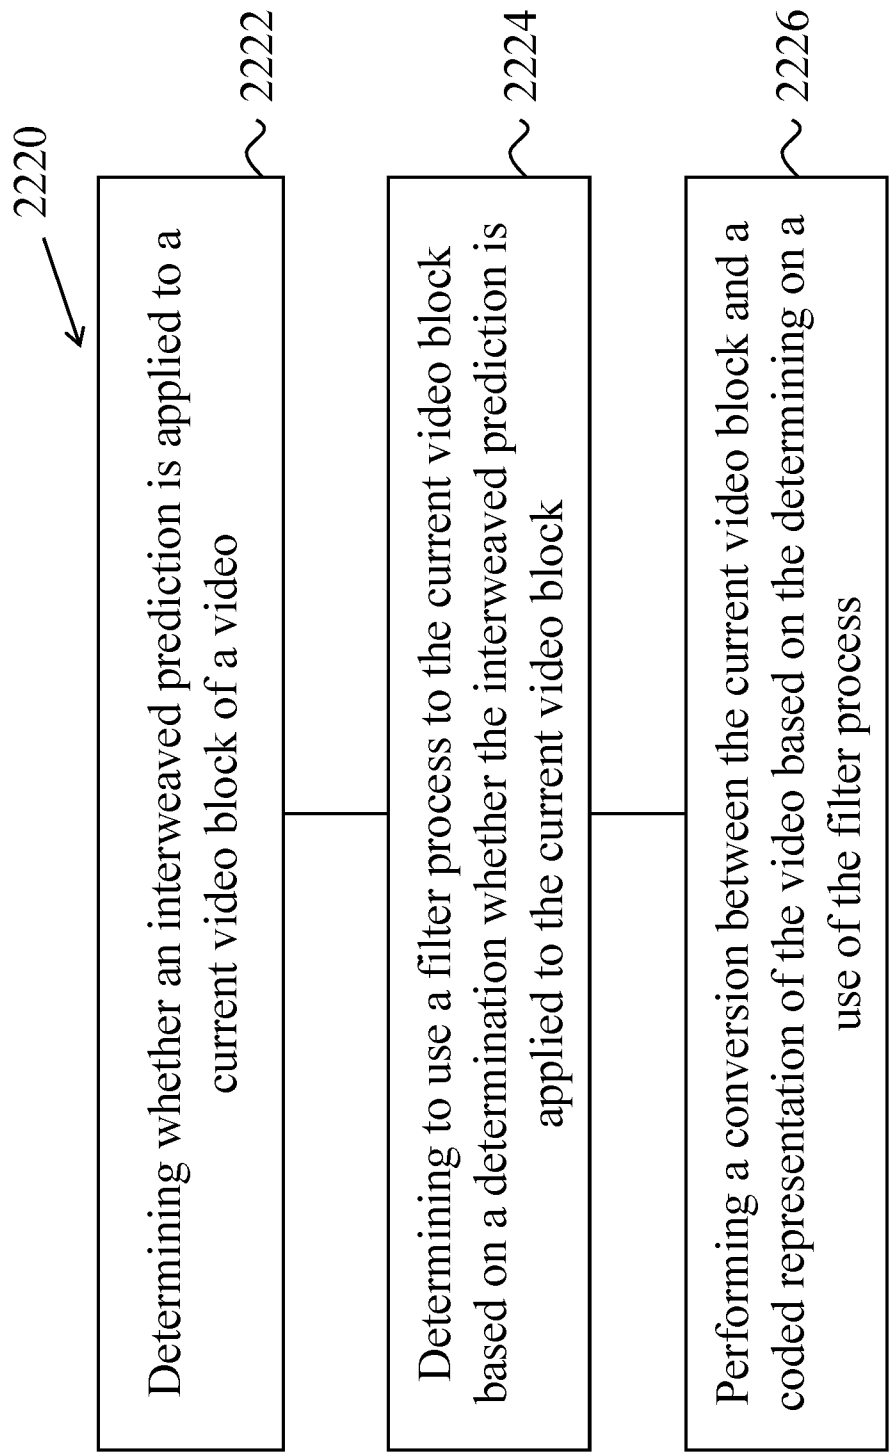


FIG. 22B

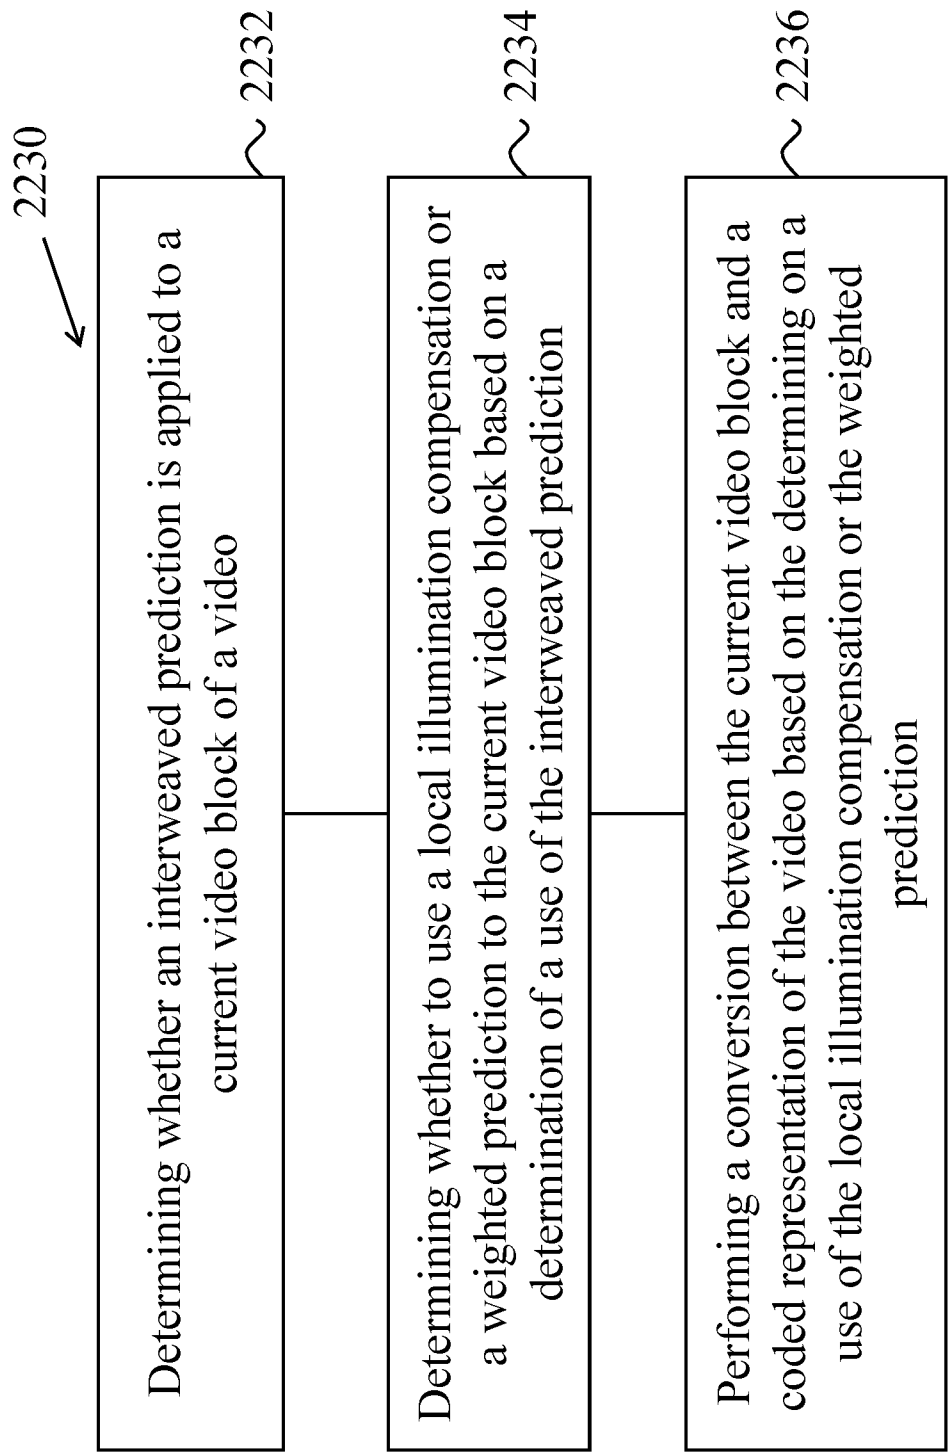


FIG. 22C

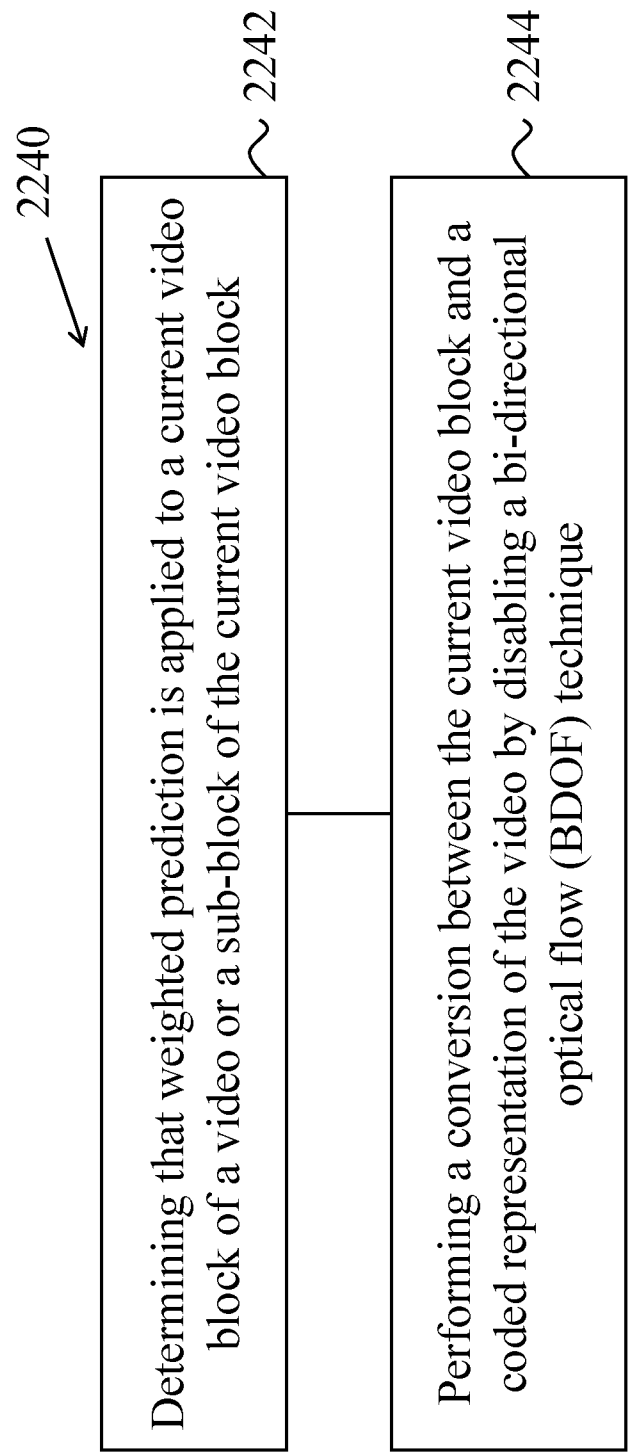


FIG. 22D

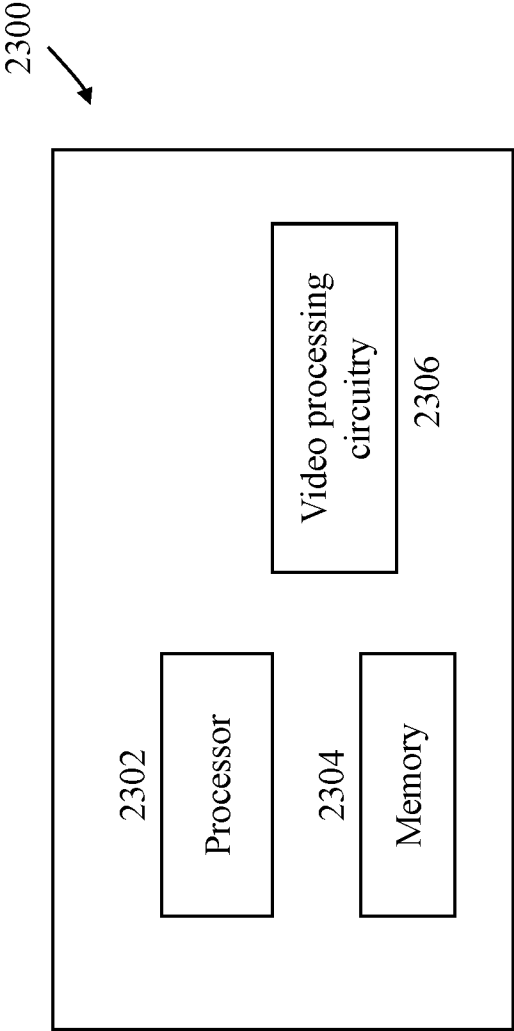


FIG. 23

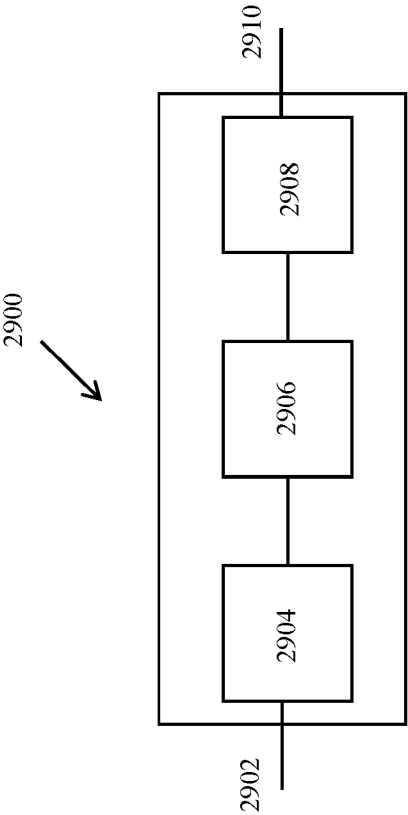


FIG. 24

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2020/070115

A. CLASSIFICATION OF SUBJECT MATTER

H04N 19/105(2014.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNKI, CNABS, CNTXT, VEN, WOTXT, IEEE, JVET: interweaved prediction, partition, block, region, pattern, height, width, shift, affine, bi-prediction

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ZHANG, Kai et al. "CE10: Interweaved Prediction for Affine Motion Compensation (Test 10.5.1 and Test 10.5.2)" <i>JVET 12th Meeting: Macao, CN, 3-12 Oct. 2018, 12 October 2018 (2018-10-12),</i> the abstract and sections 1 and 2	1-41
X	ZHANG, Kai et al. "CE4-related: Interweaved Prediction for Affine Motion Compensation" <i>JVET 11th Meeting: Ljubljana, SI, 10-18 July 2018, 18 July 2018 (2018-07-18),</i> the abstract and sections 1 and 2	1-41
A	CN 101252686 A (UNIV SHANGHAI JIAOTONG) 27 August 2008 (2008-08-27) the whole document	1-41
A	US 6807231 B1 (8X8 INC) 19 October 2004 (2004-10-19) the whole document	1-41



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

14 March 2020

Date of mailing of the international search report

24 March 2020

Name and mailing address of the ISA/CN

National Intellectual Property Administration, PRC
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Facsimile No. (86-10)62019451

Authorized officer

SUN, Yifan

Telephone No. 86-010-62089961

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2020/070115

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
CN	101252686	A	27 August 2008	CN	101252686	B	14 April 2010
US	6807231	B1	19 October 2004	None			