



(51) International Patent Classification:

H04W 52/14 (2009.01) H04W 52/34 (2009.01)

(21) International Application Number:

PCT/CN2020/082003

(22) International Filing Date:

30 March 2020 (30.03.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/826,113	29 March 2019 (29.03.2019)	US
62/888,119	16 August 2019 (16.08.2019)	US
16/832,935	27 March 2020 (27.03.2020)	US

(71) Applicant: **MEDIATEK INC.** [CN/CN]; No. 1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City, Taiwan 30078 (CN).


(72) Inventors: **HSIEH, Chi-Hsuan**; No. 1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City, Taiwan 30078 (CN).
WU, Wei-De; No. 1, Dusing 1st Rd., Hsinchu Science Park, Hsinchu City, Taiwan 30078 (CN).

(74) Agent: **BEIJING SANYOU INTELLECTUAL PROPERTY AGENCY LTD.**; 16th Fl., Block A, Corporate Square, No. 35 Jinrong Street, Beijing 100033 (CN).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: DESIGN OF UL POWER CONTROL AND TDM PATTERNS FOR DAPS-BASED HANDOVER

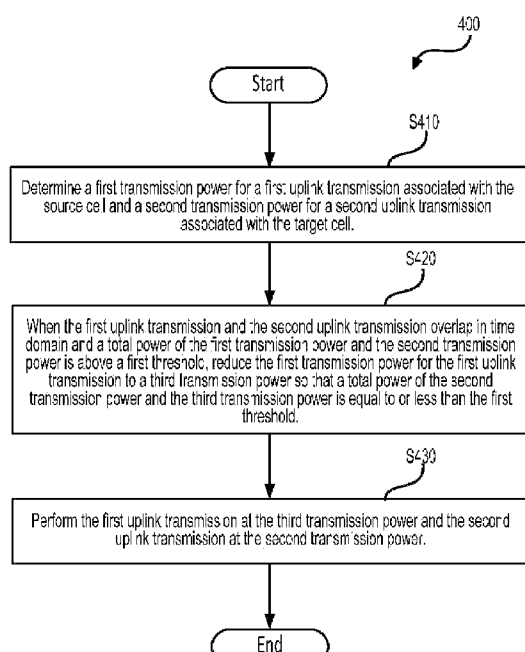**FIG. 4**

(57) Abstract: Aspects of the disclosure further provide various apparatuses and methods for wireless communications. One apparatus includes processing circuitry that can determine a first transmission power for a first uplink transmission associated with the source cell and a second transmission power for a second uplink transmission associated with the target cell. When the first uplink transmission and the second uplink transmission overlap in time domain and a total power of the first transmission power and the second transmission power is above a first threshold, the processing circuitry reduces the first transmission power for the first uplink transmission to a third transmission power so that a total power of the second transmission power and the third transmission power is equal to or less than the first threshold. The processing circuitry performs the first uplink transmission at the third transmission power and the second uplink transmission at the second transmission power.

Published:

— *with international search report (Art. 21(3))*

DESIGN OF UL POWER CONTROL AND TDM PATTERNS FOR DAPS-BASED HANDOVER

INCORPORATION BY REFERENCE

[0001] This present application claims the benefits of U.S. Provisional Application No. 62/826,113, "DESIGN OF UL POWER CONTROL AND TDM PATTERNS FOR DC UE CAPABLE OF DYNAMIC POWER-SHARING FOR SIMULTANEOUS TX DURING DC-BASED HANDOVER" filed on March 29, 2019, and U.S. Provisional Application No. 62/888,119, "UL POWER CONTROL AND SINGLE UPLINK OPERATION CONTROL DURING DC-BASED HO" filed on August 16, 2019. The entire disclosures of the prior applications are hereby incorporated by reference in their entirety.

TECHNICAL FIELD

[0002] The present disclosure relates to wireless communications, and specifically relates to dual active protocol stack (DAPS) based handover (HO).

BACKGROUND

[0003] The background description provided herein is for the purpose of generally presenting the context of the disclosure. Work of the presently named inventors, to the extent the work is described in this background section, as well as aspects of the description that may not otherwise qualify as prior art at the time of filing, are neither expressly nor impliedly admitted as prior art against the present disclosure.

[0004] In wireless system, a user equipment (UE), such as a cellular phone, may need to switch from one network (e.g., a source cell) to another network (e.g., a target cell). This procedure can be referred to as handover (HO). In 3GPP Release 16, it is agreed to adopt the dual active protocol stack (DAPS) based handover (HO) to achieve as close as possible to 0 ms interruption time.

[0005] In addition, in 3GPP Release 12, dual connectivity (DC) architecture is introduced to increase throughput for the UE. This architecture allows the UE to utilize radio resources of two nodes: master node (MN) and secondary node (SN). During the DAPS based HO procedure, the UE can apply DC to the source cell that may serve as the MN and the target cell that may serve as the SN. In some cases, the UE may not release the source cell connection until the target cell connection is constructed. That is, the UE may need to maintain connection with both the source and target cells. Therefore, it is possible that the UE needs to perform uplink (UL) transmission towards both the source and target cells at the same time with the same radio resource. However, in common DC scenario, the source cell can be in a master cell group (MCG) and the target cell can be in a secondary cell group (SCG), and transmission power at which the UE performs communications with the MCG is prioritized over transmission power at which the UE performs communications with the SCG.

SUMMARY

[0006]Aspects of the disclosure provide an apparatus for wireless communications. The apparatus includes processing circuitry that can determine a first transmission power for a first uplink transmission associated with the source cell and a second transmission power for a second uplink transmission associated with the target cell. When the first uplink transmission and the second uplink transmission overlap in time domain and a total power of the first transmission power and the second transmission power is above a first threshold, the processing circuitry reduces the first transmission power for the first uplink transmission to a third transmission power so that a total power of the second transmission power and the third transmission power is equal to or less than the first threshold. The processing circuitry performs the first uplink transmission at the third transmission power and the second uplink transmission at the second transmission power.

[0007]In an embodiment, the processing circuitry can drop the first uplink transmission associated with the source cell when a difference between the second transmission power and the third transmission power is above a second threshold.

[0008]Further, the processing circuitry can drop the first uplink transmission associated with the source cell when the first uplink transmission and the second uplink transmission overlap in the time domain and frequency domain.

[0009]In an embodiment, the processing circuitry performs the first uplink transmission at the first transmission power and the second uplink transmission at the second uplink transmission power through different time resources so that the first uplink transmission and the second uplink transmission do not overlap in the time domain.

[0010]In an embodiment, the source cell is in a source master cell group (MCG) and the target cell is in a target MCG.

[0011]In an embodiment, the processing circuitry performs dual active protocol stack (DAPS) based handover (HO). Further, the processing circuitry drops the first uplink transmission associated with the source cell when the UE indicates that simultaneous uplink transmission to the source cell and the target cell is not supported.

[0012]Aspects of the disclosure provide a method for wireless communications. Under the method, a first transmission power for a first uplink transmission associated with the source cell and a second transmission power for a second uplink transmission associated with the target cell are determined. When the first uplink transmission and the second uplink transmission overlap in time domain and a total power of the first transmission power and the second transmission power is above a first threshold, the first transmission power for the first uplink transmission to a third transmission power is reduced so that a total power of the second transmission power and the third transmission power is equal to or less than the first threshold. The first uplink transmission is performed at the third transmission power and the second uplink transmission is performed at the second transmission power.

[0013]Aspects of the disclosure further provide a non-transitory computer-readable medium which stores instructions implementing any one or a combination of the above methods for wireless communication.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] Various embodiments of this disclosure that are proposed as examples will be described in detail with reference to the following figures, wherein like numerals reference like elements, and wherein:

[0015] FIG. 1 shows an exemplary wireless communication system 100 performing dual connectivity operations according to an embodiment of the disclosure;

5 [0016] FIG. 2A shows an exemplary HO procedure 200 according to an embodiment of the disclosure;

[0017] FIG. 2B shows detailed interruption time components in the HO procedure 200 according to an embodiment of the disclosure;

[0018] FIG. 3 shows an exemplary message flow 300 of dual connectivity (DC) based HO procedure according to an embodiment of the disclosure;

10 [0019] FIG. 4 shows a flowchart outlining an exemplary process 400 according to embodiments of the disclosure; and

[0020] FIG. 5 shows an exemplary apparatus 500 according to embodiments of the disclosure.

DETAILED DESCRIPTION OF EMBODIMENTS

15 [0021] FIG. 1 shows an exemplary wireless communication system 100 performing handover (HO) operations according to an embodiment of the disclosure. During HO, a UE 103 moves across the network coverage area from a source cell 101 to a target cell 102. During break-before-make (BBM) HO procedure, the UE 103 first breaks communications with the source cell 101 and then makes communications with the target cell 102. However, due to communication 110 between the source cell 101 and the target cell 102, the UE 103 may
20 experience a significant interruption time during the BBM HO procedure. To minimize the interruption time, the UE 103 can first make the communications with the target cell 102 and then break the communications with the source cell 101. This procedure is referred to as make-before-break (MBB) HO. In 3GPP Release 16, dual active protocol stack (DAPS) based handover (HO) is adopted to achieve as close as possible to 0 ms interruption time.

[0022] During the DAPS based HO procedure, the UE 103 can be configured with dual connectivity (DC).
25 With the DC configuration, the UE 103 can utilize radio resources of both a master node (MN) and a secondary node (SN). For example, the source cell 101 can serve as the MN and the target cell 102 can serve as the SN, so that the UE 103 can perform the DC operations with both the source cell 101 and the target cell 102. Under the DC operations, the source cell 101 and the target cell 102 can perform the communication 110 with each other, and the UE 103 can simultaneously perform communications 120 and 130 with the source cell 101 and the target cell
30 102, respectively.

[0023] It is noted that the MN (e.g., the source cell 101) and/or the SN (e.g., the target cell 102) can be implemented by an eNodeB (eNB) as specified in 3GPP LTE standards and/or a gNodeB (gNB) as specified in 3GPP NR standards. In one example, both the MN and the SN are implemented by the eNBs. In another example, both the MN and the SN are implemented by the gNBs. In another example, the MN and the SN are implemented
35 by the eNB and the gNB, respectively. In another example, the MN and the SN are implemented by the gNB and the eNB, respectively. Accordingly, to perform DC operations, the UE 103 can use radio resources provided by either same or different radio access technologies (RATs).

[0024]FIG. 2A shows an exemplary HO procedure 200 according to an embodiment of the disclosure. The detailed description of the HO procedure 200 is present below.

[0025]At step S201, the UE 103 receives, from the source cell 101, *RRCReconfiguration (HO command)* message that request the UE 103 to perform the HO.

[0026]At step S202, the source cell 101 sends *SN STATUS TRANSFER* message to the target cell 102 to convey, for example, the uplink packet data convergence protocol (PDCP) sequence number (SN) receiver status and the downlink PDCP SN transmitter.

[0027]At step S203, the UE 103 performs synchronization to the target cell 102. In an example, the UE 103 can access the target cell 102 via random access channel (RACH).

[0028]At step S204, the target cell 102 responds to the UE 103 with uplink (UL) allocation and timing advance (TA).

[0029]At step S205, the UE 103 sends the *RRCConnectionReconfigurationComplete* message to the target cell 102 to indicate that the HO procedure is completed for the UE. Then the target cell 102 can begin sending data to the UE 103.

[0030]In the FIG. 2A example, the service interruption time during the HO procedure is defined as the interruption from reception of *RRCReconfiguration (HO command)* to transmission of *RRCReconfigurationComplete*.

[0031]FIG. 2B shows detailed interruption time components in the HO procedure 200 according to an embodiment of the disclosure. It can be seen that the minimum total delay is 55ms during the HO procedure 200. In addition, it is noted that contention free RACH is assumed for the HO procedure 200.

[0032]To reduce the service interruption time, RACH-less HO and 2-step RACH based HO have been proposed in some related examples. For RACH-less HO, the steps S203.3/S203.4/S204 are not necessary so that 14 out of 55 ms can be saved. For 2-step RACH based HO, the step S205 is not necessary so that 6 out of 55 ms can be saved. If 2-step RACH based HO is used as a baseline, RACH-less HO can save 8 out of 49 ms.

[0033]To further reduce the service interruption time and enhance the mobility, the present application presents a DC-based HO procedure.

[0034]FIG. 3 shows an exemplary message flow 300 of DC-based HO procedure according to an embodiment of the disclosure. The detailed description of the message flow 300 is present below.

[0035]At step S301, the source cell 101 (i.e., the MN) receives from the UE 103 a first *measurement report*.

[0036]At step S302, the source cell 101 transmits to the target cell 102 an *SN addition request* message. In an example, the *SN addition request* message requests the target cell 102 to provide radio resource configuration.

[0037]At step S303, the source cell 101 receives from the target cell 102 an *SN addition request acknowledgement (ACK)* message. In an example, the *SN addition request ACK* message indicates to the source cell 101 that the *SN addition request* message has been received by the target cell 102.

[0038]At step S304, the source cell 101 transmits to the UE 103 a first *radio resource control (RRC) reconfiguration* message. In an example, the first *RRC reconfiguration* message indicates to the UE 103 the radio resource configuration of the target cell 102.

[0039]At step S305, the source cell 101 receives from the UE 103 a first *RRC reconfiguration complete* message. In an example, the first *RRC reconfiguration complete* message indicates to the source cell 101 that the radio resource configuration of the target cell 102 has been configured with the UE 103.

[0040]At step S306, the source cell 101 transmits to the target cell 102 an *SN reconfiguration complete* message. In an example, the *SN reconfiguration complete* message indicates to the target cell 102 that the radio resource configuration of the target cell 102 has been configured with the UE 103.

[0041]At step S307, the UE 103 synchronizes with the target cell 102 by performing *random access procedure*.

[0042]At step S308, the UE 103 transmits to the source cell 101 a second *measurement report*. Then a role change procedure can be initiated. The role change procedure is to exchange the roles of the source cell 101 and the target cell 102.

[0043]At step S309, the source cell 101 transmits to the target cell 102 a *role change request* message. In an example, the *role change request* message can trigger signaling radio bearers (SRBs) establishment in the target cell 102. The SRBs in the target cell 102 will be used instead of those in the source cell 101.

[0044]At step S310, the source cell 101 receives from the target cell 102 a *role change request ACK* message. In an example, the *role change request ACK* message indicates to the source cell 101 that the *role change request* message has been received by the target cell 102. The *role change request ACK* message can trigger SRB suspension or release in the source cell 101.

[0045]At step S311, the source cell 101 transmits to the UE 103 a second *RRC reconfiguration* message. The second *RRC reconfiguration* message indicates to the UE 103 a notification of the role change procedure and let the UE 103 perform the role change procedure.

[0046]At step S312, the target cell 102 receives from the UE 103 a second *RRC reconfiguration complete* message. In an example, the second *RRC reconfiguration complete* message indicates to the target cell 102 that the notification of the role change procedure is received by the UE 103.

[0047]At step S313, the source cell 101 receives from the target cell 102 an *SN release request* message. In an example, the *SN release request* message requests the source cell 101 to release radio resources.

[0048]At step S314, the target cell 102 transmits to the UE 103 a third *RRC reconfiguration* message. In an example, the third *RRC reconfiguration* message triggers the UE 103 to apply new configuration.

[0049]At step S315, the target cell 102 transmits to the source cell 101 a *UE context release* message. In an example, on reception of the *UE context release* message, the source cell 101 can release radio resource related to the UE context.

[0050]FIG. 4 shows a flowchart outlining an exemplary process 400 according to embodiments of the disclosure. In various embodiments, the process 400 is executed by processing circuitry, such as the processing circuitry in the UE 103. In some embodiments, the process 400 is implemented in software instructions, thus when the processing circuitry executes the software instructions, the processing circuitry performs the process 400.

[0051]The process 400 may generally start at step S410, where the process 400 determines a first transmission power for a first uplink transmission associated with the source cell and a second transmission power

for a second uplink transmission associated with the target cell. When the first uplink transmission and the second uplink transmission overlap in time domain and a total power of the first transmission power and the second transmission power is above a first threshold, the process 400 proceeds to step S420.

[0052] At step S420, the process 400 reduces the first transmission power for the first uplink transmission to a third transmission power so that a total power of the second transmission power and the third transmission power is equal to or less than the first threshold. Then the process 400 proceeds to step S430.

[0053] At step S430, the process 400 performs the first uplink transmission at the third transmission power and the second uplink transmission at the second transmission power. Then the process 400 terminates.

[0054] In an embodiment, the process 400 drops the first uplink transmission associated with the source cell when a difference between the second transmission power and the third transmission power is above a second threshold.

[0055] In an embodiment, the process 400 drops the first uplink transmission associated with the source cell when the first uplink transmission and the second uplink transmission overlap in the time domain and frequency domain.

[0056] In an embodiment, the process 400 performs the first uplink transmission at the first transmission power and the second uplink transmission at the second uplink transmission power through different time resources so that the first uplink transmission and the second uplink transmission do not overlap in the time domain.

[0057] In an embodiment, the source cell is in a source master cell group (MCG) and the target cell is in a target MCG.

[0058] In an embodiment, the UE 103 supports dual active protocol stack (DAPS) based handover (HO), and the process 400 drops the first uplink transmission associated with the source cell when the UE 103 indicates that simultaneous uplink transmission to the source cell and the target cell is not supported.

[0059] FIG. 5 shows an exemplary apparatus 500 according to embodiments of the disclosure. The apparatus 500 can be configured to perform various functions in accordance with one or more embodiments or examples described herein. Thus, the apparatus 500 can provide means for implementation of techniques, processes, functions, components, and systems described herein. For example, the apparatus 500 can be used to implement functions of the BS 103 in various embodiments and examples described herein. The apparatus 500 can include a general purpose processor or specially designed circuits to implement various functions, components, or processes described herein in various embodiments. The apparatus 500 can include processing circuitry 510, a memory 520, a radio frequency (RF) module 530, and an antenna array 540.

[0060] In various examples, the processing circuitry 510 can include circuitry configured to perform the functions and processes described herein in combination with software or without software. In various examples, the processing circuitry 510 can be a digital signal processor (DSP), an application specific integrated circuit (ASIC), programmable logic devices (PLDs), field programmable gate arrays (FPGAs), digitally enhanced circuits, or comparable device or a combination thereof.

[0061] In some other examples, the processing circuitry 510 can be a central processing unit (CPU) configured to execute program instructions to perform various functions and processes described herein. Accordingly, the memory 520 can be configured to store program instructions. The processing circuitry 510, when executing the program instructions, can perform the functions and processes. The memory 520 can further store other programs or data, such as operating systems, application programs, and the like. The memory 520 can include a read only memory (ROM), a random access memory (RAM), a flash memory, a solid state memory, a hard disk drive, an optical disk drive, and the like.

[0062] The RF module 530 receives a processed data signal from the processing circuitry 510 and converts the data signal to a wireless signal that is then transmitted via the antenna array 540, or vice versa. The RF module 530 can include a digital to analog convertor (DAC), an analog to digital converter (ADC), a frequency up convertor, a frequency down converter, filters and amplifiers for reception and transmission operations. The RF module 530 can include multi-antenna circuitry for beamforming operations. For example, the multi-antenna circuitry can include an uplink spatial filter circuit, and a downlink spatial filter circuit for shifting analog signal phases or scaling analog signal amplitudes.

[0063] The apparatus 500 can optionally include other components, such as input and output devices, additional or signal processing circuitry, and the like. Accordingly, the apparatus 500 may be capable of performing other additional functions, such as executing application programs, and processing alternative communication protocols.

[0064] The processes and functions described herein can be implemented as a computer program which, when executed by one or more processors, can cause the one or more processors to perform the respective processes and functions. The computer program may be stored or distributed on a suitable medium, such as an optical storage medium or a solid-state medium supplied together with, or as part of, other hardware. The computer program may also be distributed in other forms, such as via the Internet or other wired or wireless telecommunication systems. For example, the computer program can be obtained and loaded into an apparatus, including obtaining the computer program through physical medium or distributed system, including, for example, from a server connected to the Internet.

[0065] The computer program may be accessible from a computer-readable medium providing program instructions for use by or in connection with a computer or any instruction execution system. The computer readable medium may include any apparatus that stores, communicates, propagates, or transports the computer program for use by or in connection with an instruction execution system, apparatus, or device. The computer-readable medium can be magnetic, optical, electronic, electromagnetic, infrared, or semiconductor system (or apparatus or device) or a propagation medium. The computer-readable medium may include a computer-readable non-transitory storage medium such as a semiconductor or solid state memory, magnetic tape, a removable computer diskette, a random access memory (RAM), a read-only memory (ROM), a magnetic disk and an optical disk, and the like. The computer-readable non-transitory storage medium can include all types of computer readable medium, including magnetic storage medium, optical storage medium, flash medium, and solid state storage medium.

[0066] While aspects of the present disclosure have been described in conjunction with the specific embodiments thereof that are proposed as examples, alternatives, modifications, and variations to the examples may be made. Accordingly, embodiments as set forth herein are intended to be illustrative and not limiting. There are changes that may be made without departing from the scope of the claims set forth below.

CLAIMS

1. A method of wireless communication at a user equipment (UE) that connects to both a source cell and a target cell, the method comprising:

determining a first transmission power for a first uplink transmission associated with the source cell and a second transmission power for a second uplink transmission associated with the target cell;

when the first uplink transmission and the second uplink transmission overlap in time domain and a total power of the first transmission power and the second transmission power is above a first threshold,

reducing the first transmission power for the first uplink transmission to a third transmission power so that a total power of the second transmission power and the third transmission power is equal to or less than the first threshold; and

performing the first uplink transmission at the third transmission power and the second uplink transmission at the second transmission power.

2. The method of claim 1, wherein performing the first uplink transmission at the third transmission power and the second uplink transmission at the second transmission power further comprises:

dropping the first uplink transmission associated with the source cell when a difference between the second transmission power and the third transmission power is above a second threshold.

3. The method of claim 1, wherein performing the first uplink transmission at the third transmission power and the second uplink transmission at the second transmission power further comprises:

dropping the first uplink transmission associated with the source cell when the first uplink transmission and the second uplink transmission overlap in the time domain and frequency domain.

4. The method of claim 1, further comprising:

performing the first uplink transmission at the first transmission power and the second uplink transmission at the second uplink transmission power through different time resources so that the first uplink transmission and the second uplink transmission do not overlap in the time domain.

5. The method of claim 1, wherein the source cell is in a source master cell group (MCG) and the target cell is in a target MCG.

6. The method of claim 1, wherein the UE supports dual active protocol stack (DAPS) based handover (HO).

7. The method of claim 6, further comprising:

dropping the first uplink transmission associated with the source cell when the UE indicates that simultaneous uplink transmission to the source cell and the target cell is not supported.

8. An apparatus that wireless connects to both a source cell and a target cell, the apparatus comprising processing circuitry configured to:

determine a first transmission power for a first uplink transmission associated with the source cell and a second transmission power for a second uplink transmission associated with the target cell;

when the first uplink transmission and the second uplink transmission overlap in time domain and a total power of the first transmission power and the second transmission power is above a first threshold,

reduce the first transmission power for the first uplink transmission to a third transmission power so that a total power of the second transmission power and the third transmission power is equal to or less than the first threshold; and

5 perform the first uplink transmission at the third transmission power and the second uplink transmission at the second transmission power.

9.The apparatus of claim 8, wherein the processing circuitry is further configured to:

drop the first uplink transmission associated with the source cell when a difference between the second transmission power and the third transmission power is above a second threshold.

10.The apparatus of claim 8, wherein the processing circuitry is further configured to:

10 drop the first uplink transmission associated with the source cell when the first uplink transmission and the second uplink transmission overlap in the time domain and frequency domain.

11.The apparatus of claim 8, wherein the processing circuitry is further configured to:

15 perform the first uplink transmission at the first transmission power and the second uplink transmission at the second uplink transmission power through different time resources so that the first uplink transmission and the second uplink transmission do not overlap in the time domain.

12.The apparatus of claim 8, wherein the source cell is in a source master cell group (MCG) and the target cell is in a target MCG.

13.The apparatus of claim 8, wherein the processing circuitry is further configured to:

perform dual active protocol stack (DAPS) based handover (HO).

20 14.The apparatus of claim 8, wherein the processing circuitry is further configured to: drop the first uplink transmission associated with the source cell when the UE indicates that simultaneous uplink transmission to the source cell and the target cell is not supported.

15.A non-transitory computer-readable storage medium storing a program executable by at least one processor to perform:

25 determining a first transmission power for a first uplink transmission associated with a source cell and a second transmission power for a second uplink transmission associated with a target cell;

when the first uplink transmission and the second uplink transmission overlap in time domain and a total power of the first transmission power and the second transmission power is above a first threshold,

30 reducing the first transmission power for the first uplink transmission to a third transmission power so that a total power of the second transmission power and the third transmission power is equal to or less than the first threshold; and

performing the first uplink transmission at the third transmission power and the second uplink transmission at the second transmission power.

35 16.The non-transitory computer-readable storage medium of claim 15, wherein the stored program executable by the at least one processor is further to perform:

dropping the first uplink transmission associated with the source cell when a difference between the second transmission power and the third transmission power is above a second threshold.

11

17.The non-transitory computer-readable storage medium of claim 15, wherein the stored program executable by the at least one processor is further to perform:

dropping the first uplink transmission associated with the source cell when the first uplink transmission and the second uplink transmission overlap in the time domain and frequency domain.

5 18.The non-transitory computer-readable storage medium of claim 15, wherein the stored program executable by the at least one processor is further to perform:


executing the first uplink transmission at the first transmission power and the second uplink transmission at the second uplink transmission power through different time resources so that the first uplink transmission and the second uplink transmission do not overlap in the time domain.

10 19.The non-transitory computer-readable storage medium of claim 15, wherein the source cell is in a source master cell group (MCG) and the target cell is in a target MCG.

20.The non-transitory computer-readable storage medium of claim 15, wherein the stored program executable by the at least one processor is further to perform:

executing a dual active protocol stack (DAPS) based handover (HO).

15

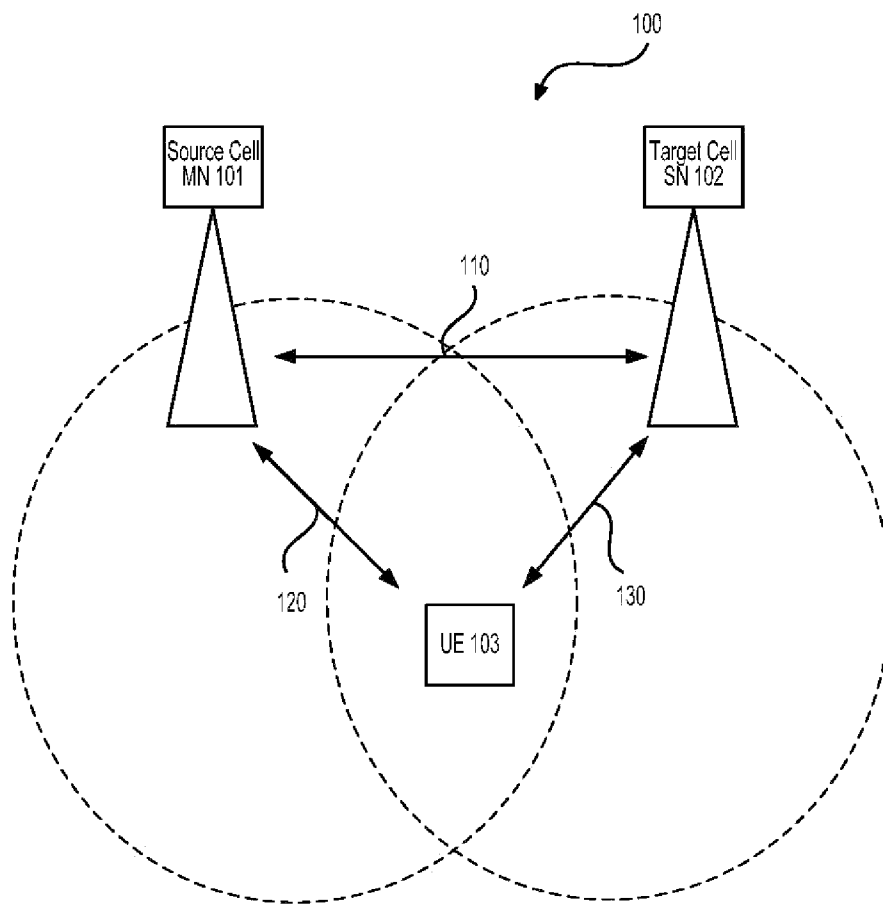**FIG. 1**

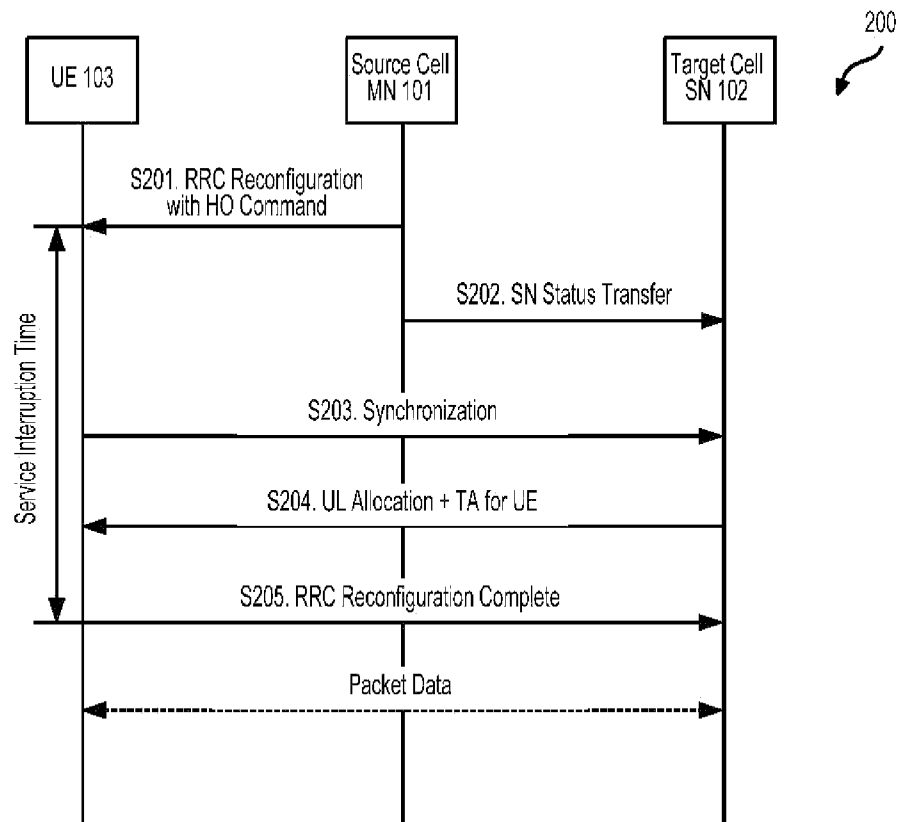
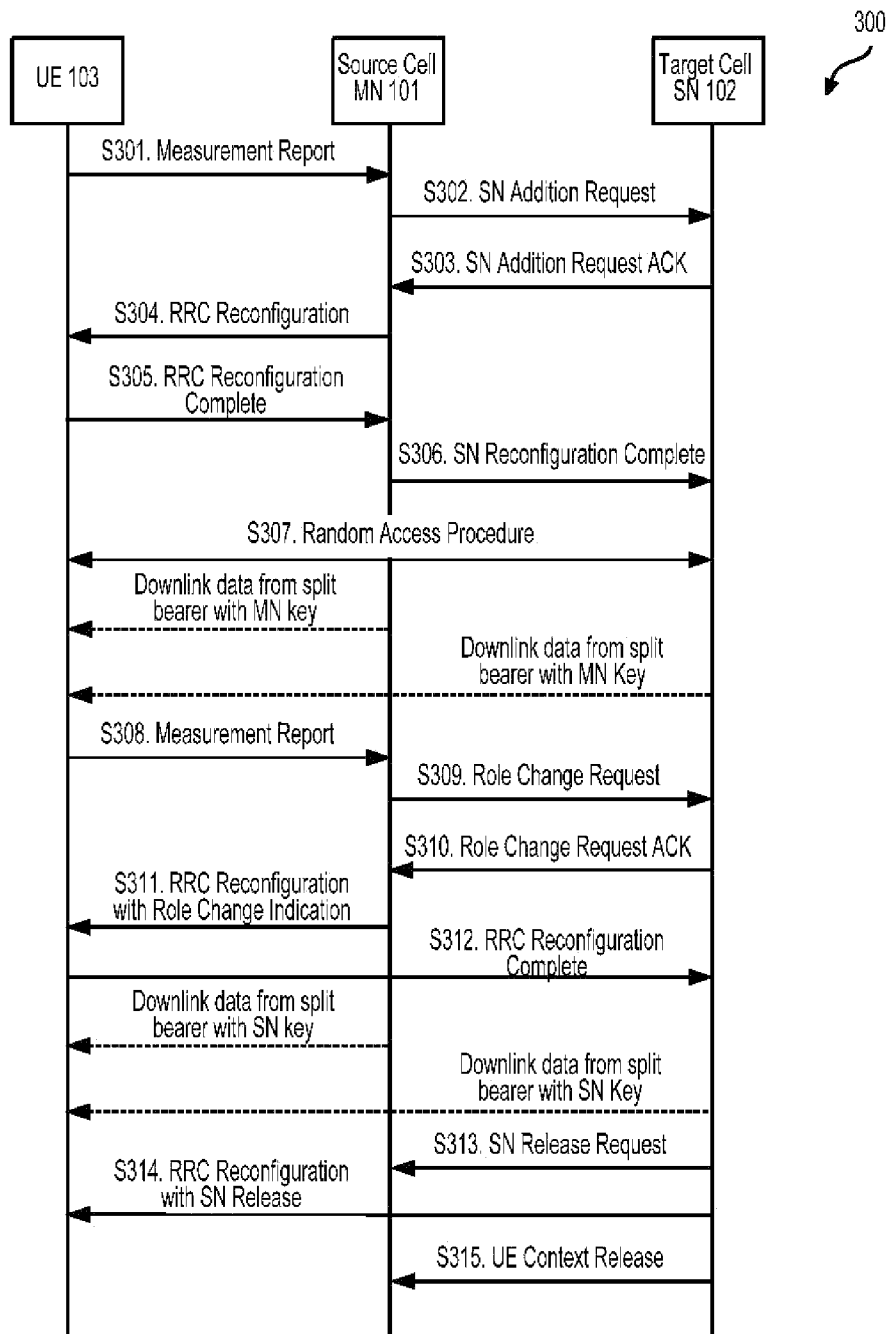
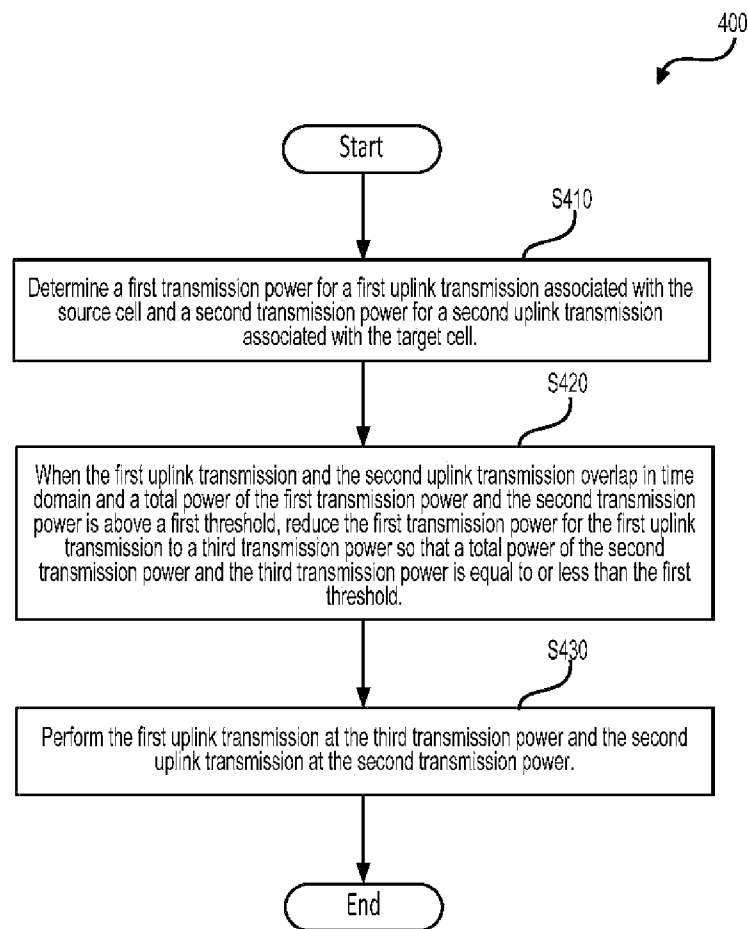


FIG. 2A

Step	Description	Time (ms)
S201	RRC Reconfiguration	10
S202	SN Status Transfer	0
S203.1	Target Cell Search	0
S203.2	UE processing time for RF/basedband re-tuning, security update	20/40
S203.3	Delay to acquire first available PRACH in target cell	10 (10+10*x)
S203.4	PRACH preamble transmission	1
S203.5	Fine time tracking and acquiring full timing information	5/10 (SMTC periodicity)
S204	UL Allocation + TA for UE	3/5
S205	UE sends RRC Connection Reconfiguration Complete	6
	Minimum / Typical Total Delay	55ms/82ms

FIG. 2B

**FIG. 3**

**FIG. 4**

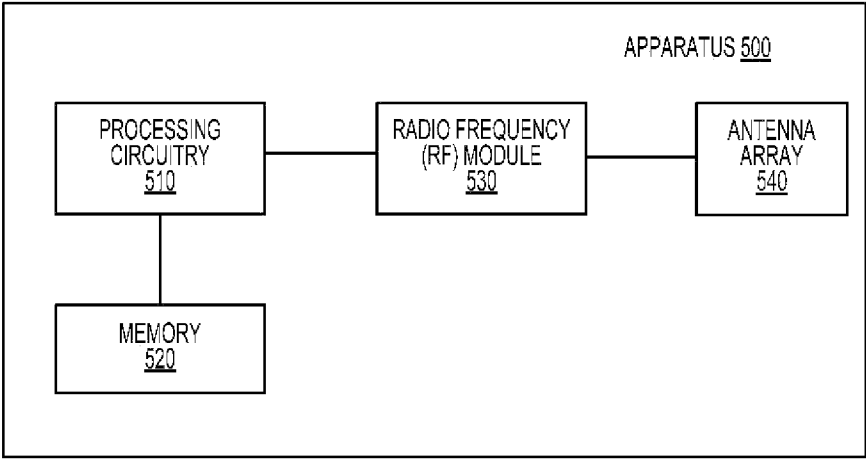


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.

PCT/CN2020/082003

A. CLASSIFICATION OF SUBJECT MATTER

H04W 52/14(2009.01)i; H04W 52/34(2009.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W; H04B; H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

CNPAT;WPI;EPODOC;CNKI;3GPP:power, base station, second, reduc+, minish+, cut+, exceed, threshold, uplink, drop+, time domain, overlap

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2016212712 A1 (ZTE CORPORATION) 21 July 2016 (2016-07-21) description, paragraphs [0016]-[0043], [0218]	1-20
X	US 2010246463 A1 (SAMSUNG ELECTRONICS CO., LTD.) 30 September 2010 (2010-09-30) description, paragraphs [0038]-[0050]	1-20
A	US 2015230189 A1 (ZTE CORPORATION) 13 August 2015 (2015-08-13) the whole document	1-20
A	CN 1728585 A (SIEMENS CHINA CO., LTD.) 01 February 2006 (2006-02-01) the whole document	1-20

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

“A” document defining the general state of the art which is not considered to be of particular relevance

“E” earlier application or patent but published on or after the international filing date

“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

“O” document referring to an oral disclosure, use, exhibition or other means

“P” document published prior to the international filing date but later than the priority date claimed

“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

“&” document member of the same patent family

Date of the actual completion of the international search

18 June 2020

Date of mailing of the international search report

30 June 2020

Name and mailing address of the ISA/CN

National Intellectual Property Administration, PRC
6, Xitucheng Rd., Jimen Bridge, Haidian District, Beijing
100088
China

Facsimile No. (86-10)62019451

Authorized officer

XING, Yunfeng

Telephone No. 86-10-53961570

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/CN2020/082003

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2016212712	A1	21 July 2016	WO	2015043246	A1	02 April 2015
				CN	104519561	A	15 April 2015
				EP	3051889	A1	03 August 2016
US	2010246463	A1	30 September 2010	CA	2755825	A1	23 September 2010
				CN	106230567	A	14 December 2016
				PL	2409532	T3	30 April 2019
				AU	2010226635	A1	10 November 2011
				US	2016014702	A1	14 January 2016
				WO	2010107907	A2	23 September 2010
				KR	20120003890	A	11 January 2012
				US	2015117384	A1	30 April 2015
				EP	2409532	A2	25 January 2012
				CN	102428731	A	25 April 2012
US	2015230189	A1	13 August 2015	WO	2014036905	A1	13 March 2014
				CN	102858004	A	02 January 2013
				IN	2482DEN2015	A	11 September 2015
				HK	1206906	A1	15 January 2016
				CN	108282802	A	13 July 2018
				EP	2894898	A1	15 July 2015
CN	1728585	A	01 February 2006	None			