



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
09.07.2008 Bulletin 2008/28

(51) Int Cl.:
G06K 19/077 (2006.01)

(21) Application number: **08006372.0**

(22) Date of filing: **29.10.2002**

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
 IE IT LI LU MC NL PT SE SK TR**

- **Horrell, Peter, Robert, George
 Essex CM2 9BU (GB)**
- **King, Patrick, F.
 Glen Ellyn
 IL 60137 (US)**
- **Pfeiffer, Michael, J.
 Lisle
 IL 60532 (US)**

(30) Priority: **29.10.2001 US 12206
 26.08.2002 US 228180**

(62) Document number(s) of the earlier application(s) in
 accordance with Art. 76 EPC:
02785803.4 / 1 446 766

(74) Representative: **Weber-Bruls, Dorothee et al
 Forrester & Boehmert,
 Pettenkoferstrasse 20-22
 80336 München (DE)**

(71) Applicant: **Mineral Lassen LLC
 Las Vegas,
 NV 89119 (US)**

(72) Inventors:
 • **Forster, Ian James
 Essex CM1 5LA (GB)**

Remarks:

This application was filed on 31-03-2008 as a
 divisional application to the application mentioned
 under INID code 62.

(54) **Wave antenna wireless communication device**

(57) A wireless communication device coupled to a wave antenna that provides greater increased durability and impedance matching. The wave antenna is a conductor that is bent, relatively sharply or in a curved fashion, in alternating sections to form peaks and valleys. The wireless communication device is coupled to the wave antenna to provide wireless communication with other communication devices, such as an interrogation reader. The wireless communication device and wave antenna may be placed on objects, goods, or other arti-

cles of manufacture that are subject to forces such that the wave antenna may be stretched or compressed during the manufacture and/or use of such object, good or article of manufacture. The wave antenna, because of its bent structure, is capable of stretching and compressing more easily than other structures, reducing the wireless communication device's susceptibility to damage or breaks that might render the wireless communication device coupled to the wave antenna unable to properly communicate information wirelessly.

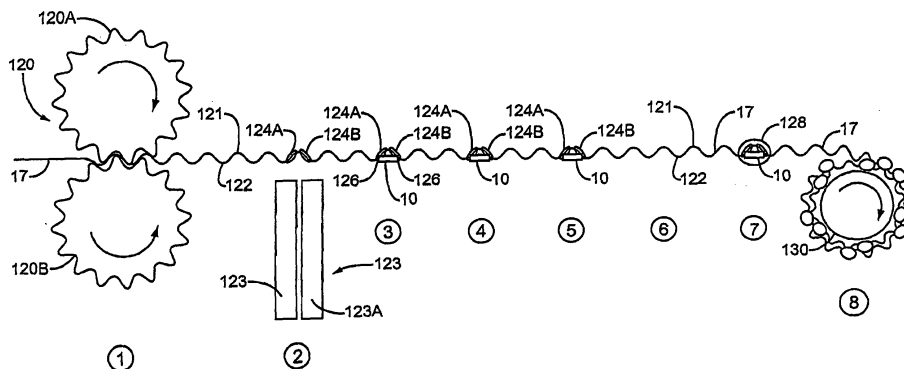


FIG. 15

Description

[0001] The present invention relates to a wave antenna coupled to a wireless communication device so that the wireless communication device can wirelessly communicate information.

[0002] Wireless communication devices are commonly used today to wirelessly communicate information about goods. For example, transponders may be attached to goods during their manufacture, transport and/or distribution to provide information, such as the good's identification number, expiration date, date of manufacture or "born on" date, lot number, and the like. The transponder allows this information to be obtained unobtrusively using wireless communication without slowing down the manufacturing, transportation, and/or distribution process.

[0003] Some goods involve environmental factors that are critical to their manufacture and/or intended operation. An example of such a good is a vehicle tyre. It may be desirable to place a wireless communication device in a tyre so that information regarding the tyre, such as a tyre's identification, pressure; temperature, and other environmental information, can be wirelessly communicated to an interrogation reader during the tyre's manufacture and/or use.

[0004] Tyre pressure monitoring may be particularly important since the pressure in a tyre governs its proper operation and safety in use. For example, too little pressure in a tyre during its use can cause a tyre to be damaged by the weight of a vehicle supported by the tyre. Too much pressure can cause a tyre to rupture. Tyre pressure must be tested during the manufacturing process to ensure that the tyre meets intended design specifications. The tyre pressure should also be within a certain pressure limits during use in order to avoid dangerous conditions. Knowledge of the tyre pressure during the operation of a vehicle can be used to inform an operator and/or vehicle system that a tyre has a dangerous pressure condition. The vehicle may indicate a pressure condition by generating an alarm or warning signal to the operator of the vehicle.

[0005] During the manufacturing process of a tyre, the rubber material comprising the vehicle tyre is violently stretched during its manufacture before taking final shape. Wireless communication devices placed inside tyres during their manufacture would have to be able to withstand this stretching and compression and still be able to operate properly after the completion of the tyre's manufacture. Since wireless communication devices are typically radio-frequency communication devices, an antenna must be coupled to the wireless communication device for communication. This antenna and wireless communication device combination could be placed in the inside of the tyre along its inner wall or inside the rubber of tyre for example. This would result in stretching and compression of the wireless communication device and antenna whenever the tyre is stretched and com-

pressed. Such an antenna could be stretched and subsequently damaged or broken thereby either disconnecting the wireless communication device from an antenna or changing the length of the antenna, which changes the operating frequency of the antenna. In either case, the wireless communication device could be unable to communicate properly when the antenna is damaged or broken.

[0006] The present invention relates to a wave antenna that is coupled to a wireless communication device, such as a transponder, to wirelessly communicate information. The wave antenna is formed through a series of alternating bends in a substantially straight conductor, such as a wire, to form at least two different sections wherein at least one section of the conductor is bent at an angle of less than 180 degrees with respect to the other. The wave antenna may be shaped in the form of a sinusoid to form a sinusoidal-shaped wave antenna or a semi-circle to form a semi-circle-shaped wave antenna. The wave antenna is formed by a curve placed in a substantially straight conductor to form at least two different sections wherein at least one section of the conductor is curved at an angle of less than 180 degrees with respect to the other.

[0007] The invention provides a wave antenna which is bent to form at least one peak or valley, preferably a series of peaks and valleys. The sections defining the peaks or valleys may be curved or straight. The wave antenna may be sinusoidal, or may have semi-circular peaks and valleys, or may be of sawtooth form. A configuration with straight limbs, which may be substantially parallel to each other, joined at alternate ends by substantially semi-circular portions, to form the peaks and valleys, is particularly advantageous.

[0008] A wave antenna is capable of stretching when subjected to a force without being damaged. A wave antenna can also provide improved impedance matching capability between the antenna and a wireless communication device because of the reactive interaction between different sections of the antenna conductor. In general, varying the characteristics of the conductor wire of the wave antenna, such as diameter, the angle of the bends, the lengths of the sections formed by the bends, and the type of conductor wire, will modify the cross coupling and, hence, the impedance of the wave antenna.

[0009] The invention provides an antenna for a wireless communication device that can withstand a force, such as stretching or compression, and not be susceptible to damage or a break. In this manner, a high level of operability can be achieved with wireless communication devices coupled to antennas for applications where a force is placed on the antenna. The wave antenna can also provide improved impedance matching capability between the antenna and a wireless communication device because of the reactive interaction between different sections of the antenna conductor. In general, varying the characteristics of the conductor wire of the wave antenna, such as diameter, the angle of the curves, the

lengths of the sections formed by the curves, the period, phase, and/or amplitude of the sinusoid, and the type of conductor wire, will modify the cross coupling and, hence, the impedance of the wave antenna.

[0010] In a first wave antenna embodiment, a wireless communication device is coupled to a single conductor wave antenna to form a monopole wave antenna.

[0011] In a second wave antenna embodiment, a wireless communication device is coupled to two conductor wave antennas to form a dipole wave antenna.

[0012] In a third wave antenna embodiment, a dipole wave antenna is comprised out of conductors having different sections having different lengths. The first section is coupled to the wireless communication device and forms a first antenna having a first operating frequency. The second section is coupled to the first section and forms a second antenna having a second operating frequency. The wireless communication device is capable of communicating at each of these two frequencies formed by the first antenna and the second antenna.

[0013] In a fourth wave antenna embodiment, a dipole wave antenna is comprised out of conductive sections having different amplitudes. A first section, having a first amplitude, is coupled to the wireless communication device and forms a first antenna having a first operating frequency. The second section, having a second amplitude different from the amplitude of the first section, is coupled to the first section to form a second antenna having a second operating frequency. The wireless communication device is capable of communicating at each of these two frequencies formed by the first antenna and the second antenna. Each pole of the wave antenna is symmetrical.

[0014] In a fifth wave antenna embodiment, an asymmetrical dipole wave antenna is comprised out of conductive sections having different amplitudes. A first conductor, having a first amplitude, is coupled to the wireless communication device to form one pole of the dipole wave antenna. The second conductor, having a second amplitude different from the amplitude of the first pole, is coupled to the wireless communication device to form the second pole of the dipole wave antenna.

[0015] In a sixth wave antenna embodiment, an asymmetrical dipole wave antenna is comprised out of conductive sections having different lengths. A first conductor, having a first length, is coupled to the wireless communication device to form one pole of the dipole wave antenna. The second conductor, having a second length different from the length of the first pole, is coupled to the wireless communication device to form the second pole of the dipole wave antenna.

[0016] In a seventh wave antenna embodiment, a resonating conductor is additionally coupled to the wireless communication device to provide a second antenna operating at a second operating frequency. The resonating ring may also act as a stress relief for force placed on the wave antenna so that such force is not placed on the wireless communication device.

[0017] In another embodiment, the wireless communication device is coupled to a wave antenna and is placed inside a tyre so that information can be wirelessly communicated from the tyre to an interrogation reader.

5 The wave antenna is capable of stretching and compressing, without being damaged, as the tyre is stretched and compressed during its manufacture and pressurization during use on a vehicle.

[0018] In another embodiment, the interrogation reader determines the pressure inside a tyre by the response from a wireless communication device coupled to a wave antenna placed inside the tyre. When the tyre and, therefore, the wave antenna stretch to a certain length indicative that the tyre is at a certain threshold pressure, the length of the antenna will be at the operating frequency of the interrogation reader so that the wireless communication device is capable of responding to the interrogation reader.

[0019] In another embodiment, a method of manufacture is disclosed on one method of manufacturing the wave antenna out of a straight conductor and attaching wireless communication devices to the wave antenna. The uncut string of wireless communication devices and wave antennas form one continuous strip that can be wound on a reel and later unwound, cut and applied to a good, object, or article of manufacture.

[0020] Ways of carrying out the invention will now be described in detail, by way of example, with reference to the accompanying drawings, in which:

30 Figure 1 is a schematic diagram of an interrogation reader and wireless communication device system that may be used with the present invention;

35 Figure 2A is a schematic diagram of a monopole wave antenna coupled to a wireless communication device for wireless communications;

40 Figure 2B is a schematic diagram of a dipole wave antenna coupled to a wireless communication device for wireless communications;

45 Figure 3 is a schematic diagram of a dipole wave antenna coupled to a wireless communication device wherein a first portion of the wave antenna operates at a first frequency and a second portion of the wave antenna coupled to the first portion operates at a second frequency;

50 Figure 4A is a schematic diagram of a wave antenna and a ring resonator both coupled to a wireless communication device wherein the wave antenna operates at a first frequency and the ring resonator operates at a second frequency;

55 Figure 4B is a schematic diagram of the wave antenna and a ring resonator as illustrated in Figure 4A, except that the ring resonator is additionally me-

chanically coupled to the wave antenna as a mechanical stress relief;

Figure 4C is a schematic diagram of an alternative embodiment to Figure 4B;

Figure 5A is a schematic diagram of another embodiment of a wave antenna and wireless communication device;

Figure 5B is a schematic diagram of a compressed version of the wave antenna illustrated in Figure 5A;

Figure 6A is a schematic diagram of a monopole sinusoidal-shaped wave antenna coupled to a wireless communication device for wireless communications;

Figure 6B is a schematic diagram of a dipole sinusoidal-shaped wave antenna coupled to a wireless communication device for wireless communications;

Figure 6C is a schematic diagram of a monopole semi-circle-shaped wave antenna coupled to a wireless communication device for wireless communications;

Figure 6D is a schematic diagram of a dipole semi-circle-shaped wave antenna coupled to a wireless communication device for wireless communications;

Figure 7 is a schematic diagram of a dipole sinusoidal-shaped wave antenna coupled to a wireless communication device wherein a first portion of the sinusoidal-shaped wave antenna operates at a first frequency and a second portion of the sinusoidal-shaped wave antenna coupled to the first portion operates at a second frequency;

Figure 8A is a schematic diagram of a dipole sinusoidal-shaped wave antenna coupled to a wireless communication device for wireless communications wherein each sinusoidal-shaped pole conductor comprises two sections each having different amplitudes;

Figure 8B is a schematic diagram of a dipole sinusoidal-shaped wave antenna coupled to a wireless communication device for wireless communications wherein one sinusoidal-shaped pole conductor has an amplitude larger than the other sinusoidal-shaped pole conductor;

Figure 8C is a schematic diagram of a dipole sinusoidal-shaped wave antenna coupled to a wireless communication device for wireless communications wherein one sinusoidal-shaped pole conductor is longer than the other sinusoidal-shaped pole con-

ductor,

Figure 8D is a schematic diagram of a dipole semi-circle-shaped wave antenna coupled to a wireless communication device for wireless communications wherein each semi-circle-shaped pole conductor comprises two sections each having different amplitudes;

Figure 8E is a schematic diagram of a dipole semi-circle-shaped wave antenna coupled to a wireless communication device for wireless communications wherein one semi-circle-shaped pole conductor has an amplitude larger than the other semi-circle-shaped pole conductor,

Figure 8F is a schematic diagram of a dipole semi-circle-shaped wave antenna coupled to a wireless communication device for wireless communications wherein one semi-circle-shaped pole conductor is longer than the other semi-circle-shaped pole conductor;

Figure 9A is a schematic diagram of a sinusoidal-shaped wave antenna and a ring resonator both coupled to a wireless communication device wherein the sinusoidal-shaped wave antenna operates at a first frequency and the ring resonator operates at a second frequency;

Figure 9B is a schematic diagram of the sinusoidal-shaped wave antenna and a ring resonator as illustrated in Figure 9A, except that the ring resonator is additionally mechanically coupled to the sinusoidal-shaped wave antenna as a mechanical stress relief;

Figure 9C is a schematic diagram of an alternative embodiment to Figure 9B;

Figure 9D is a schematic diagram of a semi-circle-shaped wave antenna and a ring resonator both coupled to a wireless communication device wherein the semi-circle-shaped wave antenna operates at a first frequency and the ring resonator operates at a second frequency;

Figure 9E is a schematic diagram of the semi-circle-shaped wave antenna and a ring resonator as illustrated in Figure 9A, except that the ring resonator is additionally mechanically coupled to the semi-circle-shaped wave antenna as a mechanical stress relief;

Figure 9F is a schematic diagram of an alternative embodiment to Figure 9E;

Figure 10A is a schematic diagram of another embodiment of a sinusoidal-shaped wave antenna and wireless communication device;

Figure 10B is a schematic diagram of a compressed version of the sinusoidal-shaped wave antenna illustrated in Figure 10A;

Figure 10C is a schematic diagram of another embodiment of a semi-circle-shaped wave antenna and wireless communication device;

Figure 10D is a schematic diagram of a compressed version of the semi-circle-shaped wave antenna illustrated in Figure 10A;

Figure 11 is a schematic diagram of with modifications to the section of the wave antenna to spread the bend angle of the conductive section over a larger linear length of the bend;

Figure 12A is a schematic diagram of a wireless communication device and sinusoidal-shaped wave antenna attached to the inside of a tyre for wireless communication of information about the tyre;

Figure 12B is a schematic diagram of the wireless communication device and sinusoidal-shaped wave antenna of Figure 12A, except that the tyre is under pressure and is stretching the sinusoidal-shaped wave antenna;

Figure 13 is a flowchart diagram of a tyre pressure detection system executed by an interrogation reader by communicating with a wireless communication device coupled to a sinusoidal-shaped wave antenna inside a tyre like that illustrated in Figures 12A and 12B;

Figure 14 is a schematic diagram of a reporting system for information wirelessly communicated from a tyre to an interrogation reader;

Figure 15 is a schematic diagram of a process of manufacturing a sinusoidal-shaped wave antenna and coupling the sinusoidal-shaped wave antenna to a wireless communication device;

Figure 16A is a schematic diagram of an inductance tuning short provided by the manufacturing process illustrated in Figure 15; and

Figure 16B is a schematic diagram of an alternative embodiment of inductance tuning short provided by the manufacturing process of Figure 15.

[0021] The present invention relates to a wave antenna that is coupled to a wireless communication device, such as a transponder, to wirelessly communicate information. The wave antenna is formed through a series of alternating bends in a substantially straight conductor, such as a wire, to form at least two different sections wherein at

least one section of the conductor is bent at an angle of less than 180 degrees with respect to each other. The wave antenna may be a conductor shaped in the form of a sinusoid to form a sinusoidal-shaped wave antenna, or a semi-circle to form a semi-circle-shaped wave antenna. The wave antenna is formed by a curve placed in a substantially straight conductor to form at least two different sections wherein at least one section of the conductor is curved at an angle of less than 180 degrees with respect to the other.

[0022] A wave antenna has curves that allow stretching or compressing of the conductor comprising the antenna without being damaged when subjected to a force. A sharp bend in a conductor wire, as opposed to a curved design of the present invention, may introduce the potential for a failure point at the position of the sharp bend.

[0023] A wave antenna is capable of stretching without being damaged when subjected to a force. A wave antenna can also provide improved impedance matching capability between the antenna and a wireless communication device because of the reactive interaction between different sections of the antenna conductor. In general, varying the characteristics of the conductor wire of the wave antenna, such as diameter, the angle of the bends, the lengths of the sections formed by the bends, and the type of conductor wire, will modify the cross coupling and, hence, the impedance of the wave antenna.

[0024] Before discussing the particular aspects and applications of the wave antenna as illustrated in Figures 2-16 of this application, a wireless communication system that may be used with the present invention is discussed below.

[0025] Figure 1 illustrates a wireless communication device and communication system that may be used with the present invention. The wireless communication device 10 is capable of communicating information wirelessly and may include a control system 12, communication electronics 14, and memory 16. The wireless communication device 10 may also be known as a radio-frequency identification device (RFID). The communication electronics 14 is coupled to an antenna 17 for wirelessly communicating information in radio-frequency signals. The communication electronics 14 is capable of receiving modulated radio-frequency signals through the antenna 17 and demodulating these signals into information passed to the control system 12. The antenna 17 may be any type of antenna, including but not limited to a pole or slot antenna. The antenna 17 may be internal or external to the wireless communication device 10.

[0026] The control system 12 may be any type of circuitry or processor that receives and processes information received by the communication electronics 14, including a micro-controller or microprocessor. The wireless communication device 10 may also contain a memory 16 for storage of information. Such information may be any type of information about goods, objects, or articles of manufacture, including but not limited to identification, tracking, environmental information, such as

pressure and temperature, and other pertinent information. The memory 16 may be electronic memory, such as random access memory (RAM), read-only memory (ROM), flash memory, diode, etc., or the memory 16 may be mechanical memory, such as a switch, dipswitch, etc.

[0027] The control system 12 may also be coupled to sensors that sense environmental information concerning the wireless communication device 10. For instance, the control system 12 may be coupled to a pressure sensor 18 to sense the pressure on the wireless communication device 10 and/or its surroundings. The control system 12 may also be coupled to a temperature sensor 19 to sense the temperature of the wireless communication device 10 or the ambient temperature around the wireless communication device 10. More information on different types of pressure sensors 18 that can be used to couple to the control system are disclosed in U.S. Patent Nos. 6,299,349 and 6,272,936, entitled "Pressure and temperature sensor" and "Pressure sensor," respectively, both of which are incorporated herein by reference in their entirety.

[0028] The temperature sensor 19 may be contained within the wireless communication device 10, or external to the wireless communication device 10. The temperature sensor 19 may be any variety of temperature sensing elements, such as a thermistor or chemical device. One such temperature sensor 19 is described in U.S. Patent No. 5,959,524, entitled "Temperature sensor," incorporated herein by reference in its entirety. The temperature sensor 19 may also be incorporated into the wireless communication device 10 or its control system 12, like that described in U.S. Patent No. 5,961,215, entitled "Temperature sensor integral with microprocessor and methods of using same," incorporated herein by reference in its entirety. However, note that the present invention is not limited to any particular type of temperature sensor 19.

[0029] Some wireless communication devices 10 are termed "active" devices in that they receive and transmit data using their own energy source coupled to the wireless communication device 10. A wireless communication device 10 may use a battery for power as described in U.S. Patent No. 6,130,602 entitled "Radio frequency data communications device," or may use other forms of energy, such as a capacitor as described in U.S. Patent No. 5,833,603, entitled "Implantable biosensing transponder." Both of the preceding patents are incorporated herein by reference in their entirety.

[0030] Other wireless communication devices 10 are termed "passive" devices meaning that they do not actively transmit and therefore may not include their own energy source for power. One type of passive wireless communication device 10 is known as a "transponder." A transponder effectively transmits information by reflecting back a received signal from an external communication device, such as an interrogation reader. An example of a transponder is disclosed in U.S. Patent No. 5,347,280, entitled "Frequency diversity transponder ar-

angement," incorporated herein by reference in its entirety. Another example of a transponder is described in co-pending International Patent Application No. WO 02/07085, entitled "Wireless communication device and method," incorporated herein by reference in its entirety.

[0031] Figure 1 depicts communication between a wireless communication device 10 and an interrogation reader 20. The interrogation reader 20 may include a control system 22, an interrogation communication electronics 24, memory 26, and an interrogation antenna 28. The interrogation antenna 28 may be any type of antenna, including a pole antenna or a slot antenna. The interrogation reader 20 may also contain its own internal energy source 30, or the interrogation reader 20 may be powered through an external power source. The energy source 30 may include batteries, a capacitor, solar cell or other medium that contains energy. The energy source 30 may also be rechargeable. A timer 23 may also be coupled to the control system 22 for performing tasks that require timing operations.

[0032] The interrogation reader 20 communicates with the wireless communication device 10 by emitting an electronic signal 32 modulated by the interrogation communication electronics 24 through the interrogation antenna 28. The interrogation antenna 28 may be any type of antenna that can radiate a signal 32 through a field 34 so that a reception device, such as a wireless communication device 10, can receive such signal 32 through its own antenna 17. The field 34 may be electro-magnetic, magnetic, or electric. The signal 32 may be a message containing information and/or a specific request for the wireless communication device 10 to perform a task or communicate back information. When the antenna 17 is in the presence of the field 34 emitted by the interrogation reader 20, the communication electronics 14 are energized by the energy in the signal 32, thereby energizing the wireless communication device 10. The wireless communication device 10 remains energized so long as its antenna 17 is in the field 34 of the interrogation reader 20. The communication electronics 14 demodulates the signal 32 and sends the message containing information and/or request to the control system 12 for appropriate actions.

[0033] It is readily understood to one of ordinary skill in the art that there are many other types of wireless communications devices and communication techniques than those described herein, and the present invention is not limited to a particular type of wireless communication device, technique or method.

[0034] Figure 2A illustrates a first embodiment of a wave antenna 17 coupled to a wireless communication device 10 for wireless communication. This embodiment illustrates a monopole wave antenna 17. The wave antenna 17 is formed by a conducting material, such as a wire or foil for example, that is bent in alternating sections to form a series of peaks and valleys. Any type of material can be used to form the wave antenna 17 so long as the material can conduct electrical energy.

[0035] A wave antenna 17 in its broadest form is a conductor that is bent (either a relatively sharp bend as in the embodiments of Figures 2A, 2B, 3, 4A, 4B, 4C, 5A, 5B, or a relatively curved bend as in the embodiments of Figures 6A, 6B, 6C, 6D, 7, 8A, 8B, 8C, 8D, 8E, 8F, 9A, 9B, 9C, 9D, 9E, 9F, 10A, 10B, 10C, 10D and 11) in at least one position at (through) an angle less than 180 degrees to form at least two different sections 21.

[0036] The monopole wave antenna 17 in this embodiment contains seven alternating bends to form a sawtooth wave shape. The monopole wave antenna 17 is coupled, by either a direct or reactive coupling, to an input port (not shown) on the wireless communication device 10 to provide an antenna 17 for wireless communications. Since the wireless communication device 10 contains another input port that is coupled to the monopole wave antenna 17, this additional input port is grounded.

[0037] A wave antenna 17 may be particularly advantageous to use with a wireless communication device 10 in lieu of a straight antenna. One advantage of a wave antenna 17 is that it is tolerant to stretching without substantial risk of damage or breakage to the conductor. Certain types of goods, objects, or articles of manufacture may encounter a force, such as stretching or compression, during their manufacture and/or normal use. If a wireless communication device 10 uses a straight conductor as antenna 17 and is attached to goods, objects, or articles of manufacture that are subjected to a force during their manufacture or use, the antenna 17 may be damaged or broken when the good, object or article of manufacture is subjected to such force. If the antenna 17 is damaged or broken, this may cause the wireless communication device 10 to be incapable of wireless communication since a change in the length or shape of the conductor in the antenna 17 may change the operating frequency of the antenna 17.

[0038] A wave antenna 17, because of its bent (including curved) sections 21, also causes the field emitted by the conductors in sections 21 to capacitively couple to other sections 21 of the wave antenna 17. This results in improved impedance matching with the wireless communication device 10 to provide greater and more efficient energy transfer between the wireless communication device 10 and the wave antenna 17. As is well known to one of ordinary skill in the art, the most efficient energy transfer occurs between a wireless communication device 10 and an antenna 17 when the impedance of the antenna 17 is the complex conjugate of the impedance of the wireless communication device 10.

[0039] The impedance of a straight conductor antenna 17 is dependant on the type, size, and shape of the conductor. The length of the antenna 17 is the primary variable that determines the operating frequency of the antenna 17. Unlike a straight conductor antenna 17, a wave antenna 17 can also be varied in other ways not possible in a straight conductor antenna 17. In a wave antenna 17, other variables exist in the design of the antenna in addition to the type, size, shape and length of the con-

ductor. The impedance of a wave antenna 17 can also be varied by varying the length of the individual sections 21 of the conductor making up the wave antenna 17, the angle between these individual sections 21 and the phase, period and amplitude of the sections 21, in addition to the traditional variables available in straight conductor antennas 17. These additional variables available in wave antennas 17 can be varied while maintaining the overall length of the conductor so that the operating frequency of the wave antenna 17 is maintained. In this embodiment, the lengths of the individual sections 21 and the angles between the individual sections 21 are the same; however, they do not have to be.

[0040] It may be beneficial to heat selectively parts of the conductive wire that forms the wave antenna 17 to reduce the stress in the wave antenna 17 to prevent breakage. This could be done in a number of ways including, but not limited to, gas jets, clamps, or conductive clamps passing a high current through areas of the wave antenna 17.

[0041] In summary, a wave antenna 17 provides the ability to alter and select additional variables not possible in straight conductor antennas 17 that affect the impedance of the antenna 17, thereby creating a greater likelihood that a wave antenna's 17 impedance can be designed to more closely match the impedance of the wireless communication device 10. Of course, as is well known by one of ordinary skill in the art, the type of materials attached to the wave antenna 17 and the material's dielectric properties also vary the impedance and operating frequency of the wave antenna 17. These additional variables should also be taken into account in the final design of the wave antenna 17. The reactive cross-coupling that occurs between different sections 21 of the wave antenna 17 also contribute to greater impedance matching capability of the wave antenna 17 to a wireless communication device 10. More information on impedance matching between a wireless communication device 10 and an antenna 17 for efficient transfer of energy is disclosed in International Patent Application No. WO 01/73675, entitled "Remote communication using slot antenna," incorporated herein by reference in its entirety.

[0042] Figure 2B illustrates a wave antenna 17 similar to that illustrated in Figure 2A; however, the wave antenna in Figure 2B is a dipole wave antenna 17. Two conductors 17A, 17B are coupled to the wireless communication device 10 to provide wireless communications. In this embodiment, the length of the conductors 17A, 17B that form the dipole wave antenna 17 are each 84 millimeters in length. The dipole wave antenna 17 operates at a frequency of 915 MHz. In this embodiment, the lengths of the individual sections 21 and the angles between the individual sections 21 that make up the dipole wave antenna 17 are the same; however, they do not have to be.

[0043] Figure 3 illustrates another embodiment of a wave antenna 17 where the lengths of the individual sections 21 and the angle between the individual sections

21 are not the same. Two conductors are coupled to the wireless communication device 10 to create a dipole wave antenna 17. The first conductor is comprised out of two sections 21A, 21C, each having a different number of sections 21 and lengths. The two sections 21A, 21C are also symmetrically contained in the second conductor 21B, 21D. This causes the wave antenna 17 to act as a dipole antenna that resonates and receives signals at two different operating frequencies so that the wireless communication device 10 is capable of communicating at two different frequencies.

[0044] The first symmetrical sections 21A, 21B are 30.6 millimeters or $\lambda/4$ in length and are coupled to the wireless communication device 10 so that the wave antenna 17 is capable of receiving 2.45GHz signals. The second symmetrical sections 21C, 21D are coupled to the first sections 21A, 21B, respectively, to form a second dipole antenna for receiving signals at a second frequency. In this embodiment, the second sections 21C, 21D are 70 millimeters in length and are coupled to the first sections 21A, 21B, respectively, to form lengths that are designed to receive 915 MHz signals. Also note that bends in the conductor in the wave antenna 17 are not constant. The bends in the wave antenna 17 that are made upward are made at an angle of less than 180 degrees. The bends in the wave antenna 17 that are made downward are made at an angle of 180 degrees.

[0045] Note that it is permissible for bends in sections 21 of the conductor to be 180 degrees so long as all of the sections 21 in the conductor are not bent at 180 degrees with respect to adjacent sections 21. If all of the sections 21 in the conductor are bent at 180 degrees, then the conductor will effectively be a straight conductor antenna 17 and not a wave antenna 17.

[0046] Figure 4A illustrates another embodiment of the wave antenna 17 coupled to the wireless communication device 10 wherein the wireless communication device 10 is configured to receive signals at two different frequencies. A wave antenna 17 similar the wave antenna 17 illustrated in Figure 2B is coupled to the wireless communication device 10 to form a dipole wave antenna 17. A resonating ring 40 is also capacitively coupled to the wireless communication device 10 to provide a second antenna 17 that operates at a second and different frequency from the operating frequency of the dipole wave antenna 17. The resonating ring 40 may be constructed out of any type of material so long as the material is conductive.

[0047] This embodiment may be particularly advantageous if it is necessary for the wireless communication device 10 to be capable of wirelessly communicating regardless of the force, such as stretching or compression, exerted on the wave antenna 17. The resonating ring 40 is designed to remain in its original shape regardless of the application of any force that may be placed on the wireless communication device 10 or a good, object, or article of manufacture that contains the wireless communication device 10. Depending on the force exerted on

the wave antenna 17 or a good, object or article of manufacture that contains the wave antenna 17 and wireless communication device 10, the length of the wave antenna 17 may change, thereby changing the operating frequency of the wave antenna 17. The new operating frequency of the wave antenna 17 may be sufficiently different from the normal operating frequency such that wave antenna 17 and the wireless communication device 10 could not receive and/or demodulate signals sent by the interrogation reader 20. The resonating ring 40 is capable of receiving signals 32 regardless of the state of the wave antenna 17.

[0048] Figure 4B also illustrates an embodiment of the present invention employing a dipole wave antenna 17 that operates at 915 MHz and a resonating ring 40 that operates at 2.45GHz. The dipole wave antenna 17 and the resonating ring 40 are both coupled to the wireless communication device 10 to allow the wireless communication device 10 to operate at two different frequencies. However, in this embodiment, the conductors of the dipole wave antenna 17 are looped around the resonating ring 40 at a first inductive turn 42A and a second inductive turn 42B. In this manner, any force placed on the dipole wave antenna 17 will place such force on the resonating ring 40 instead of the wireless communication device 10.

[0049] This embodiment may be advantageous in cases where a force, placed on the dipole wave antenna 17 without providing a relief mechanism other than the wireless communication device 10 itself would possibly cause the dipole wave antenna 17 to disconnect from the wireless communication device 10, thus causing the wireless communication device 10 to be unable to wirelessly communicate. The resonating ring 40 may be constructed out of a stronger material than the connecting point between the dipole wave antenna 17 and the wireless communication device 10, thereby providing the ability to absorb any force placed on the dipole wave antenna 17 without damaging the resonating ring 40. This embodiment may also be particularly advantageous if the wireless communication device 10 is placed on a good, object or article of manufacture that undergoes force during its manufacture or use, such as a rubber tyre, for example.

[0050] Figure 4C illustrates another embodiment similar to those illustrated in Figures 4A and 4B. However, the resonating ring 40 is directly coupled to the wireless communication device 10, and the dipole wave antenna 17 is directly coupled to the resonating ring 10. A first and second conducting attachments 44A, 44B are used to couple the resonating ring 40 to the wireless communication device 10. A force exerted on the dipole wave antenna 17 is exerted on and absorbed by the resonating ring 40 rather than wireless communication device 10 so that the wireless communication device 10 is not damaged.

[0051] Figure 5A illustrates another embodiment of the wave antenna 17 that is stretched wherein the bending are at angles close to 180 degrees, but slightly less, to form sections 21 close to each other. The coupling be-

tween the individual elements in the wave antenna 17 will be strong due to the proximity. Therefore, a small change in stretching of the wave antenna 17 will have a large effect on the operating frequency of the wave antenna 17. Since the change in the operating frequency will be great, it will be easier for a small stretching of the wave antenna 17 to change the operating frequency of the wave antenna 17.

[0052] Figure 5B illustrates the same wave antenna 17 and wireless communication device 10 illustrated in Figure 5A; however, the wave antenna 17 is not being stretched. When this wave antenna 17 is not being stretched, the bent sections in the wave antenna 17 touch each other to effectively act as a regular dipole antenna without angled sections 21. In this embodiment, each pole 17A, 17B of the wave antenna 17 in its normal form is 30.6 millimeters long and has an operating frequency of 2.45 GHz such that the wireless communication device 10 is capable of responding to a frequency of 2.45 GHz.

[0053] Figure 6A illustrates a further embodiment of a wave antenna 17 coupled to a wireless communication device 10 for wireless communication. This embodiment illustrates a monopole sinusoidal-shaped wave antenna 17. The sinusoidal-shaped wave antenna 17 is formed by a conducting material, such as a wire or foil for example, that is curved in alternating sections to form a sinusoidal shape that resembles a sine or cosine waveform. The sinusoidal-shaped sections form a series of peaks and valleys in the conductor. Any type of material can be used to form the sinusoidal-shaped wave antenna 17 so long as the material can conduct electrical energy, including but not limited to copper, brass, steel, zinc-plated steel, spring brass, and brass coated spring steel.

[0054] The monopole sinusoidal-shaped wave antenna 17 in this embodiment contains seven alternating curves to form a sinusoidal-shaped wave. The monopole sinusoidal-shaped wave antenna 17 is coupled, by either a direct or reactive coupling, to an input port (not shown) on the wireless communication device 10 to provide an antenna 17 for wireless communications. Since the wireless communication device 10 contains another input port that is coupled to the monopole sinusoidal-shaped wave antenna 17, this additional input port is grounded.

[0055] Figure 6B illustrates a sinusoidal-shaped wave antenna 17 similar to that illustrated in Figure 6A; however, the sinusoidal-shaped wave antenna in Figure 6B is a dipole sinusoidal-shaped wave antenna 17. Two conductors 17A, 17B are coupled to the wireless communication device 10 to provide wireless communications. In this embodiment, the length of the conductors 17A, 17B that form the dipole sinusoidal-shaped wave antenna 17 are each 84 millimeters in length. The dipole sinusoidal-shaped wave antenna 17 operates at a frequency of 915 MHz. In this embodiment, the lengths of the individual sections 21 and the angles between the individual sections 21 that make up the dipole sinusoidal-shaped wave antenna 17 are the same; however, they do not have to be.

[0056] Figure 6C illustrates an alternative embodiment of Figure 6A, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 6A is equally applicable for this embodiment.

[0057] Figure 6D illustrates an alternative embodiment of Figure 6B, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 6B is equally applicable for this embodiment.

[0058] Figure 7 illustrates another embodiment of a sinusoidal-shaped wave antenna 17 where the lengths of the individual sections 21 and the angle between the individual sections 21 are not the same. Two conductors are coupled to the wireless communication device 10 to create a dipole sinusoidal-shaped wave antenna 17. The first conductor is comprised out of two sections 21A, 21C, each having a different number of sections 21 and lengths. The two sections 21A, 21C are also symmetrically contained in the second conductor 21B, 21D. This causes the sinusoidal-shaped wave antenna 17 to act as a dipole antenna that resonates and receives signals at two different operating frequencies so that the wireless communication device 10 is capable of communicating at two different frequencies.

[0059] The first symmetrical sections 21A, 21B are 30.6 millimeters or $\lambda/4$ in length and are coupled to the wireless communication device 10 so that the sinusoidal-shaped wave antenna 17 is capable of receiving 2.45GHz signals. The second symmetrical sections 21C, 21D are coupled to the first sections 21A, 21B, respectively, to form a second dipole antenna for receiving signals at a second frequency. In this embodiment, the second sections 21C, 21D are 70 millimeters in length and are coupled to the first sections 21A, 21B, respectively, to form lengths that are designed to receive 915 MHz signals. Also note that curves in the conductor in the sinusoidal-shaped wave antenna 17 are not constant. The curves in the sinusoidal-shaped wave antenna 17 that are made upward are made at an angle of less than 180 degrees. The curves in the sinusoidal-shaped wave antenna 17 that are made downward are made at an angle of 180 degrees.

[0060] Note that it is permissible for the curves in sections 21 of the conductor to be 180 degrees so long as all of the sections 21 in the conductor are not curved at 180 degrees with respect to adjacent sections 21. If all of the sections 21 in the conductor are curved at 180 degrees, then the conductor will effectively be a straight conductor antenna 17 and not a sinusoidal-shaped wave antenna 17.

[0061] Note that the wave antenna 17 illustrated in Figure 7 could also be implemented using semi-circle-shaped sections 21.

[0062] Figure 8A illustrates another embodiment of a sinusoidal-shaped wave antenna 17 where the ampli-

tudes of the individual sections 21 that form the sinusoidal-shaped wave antenna 17 are not the same. Two conductors are coupled to the wireless communication device 10 to create a dipole sinusoidal-shaped wave antenna 17. The first conductor is comprised out of two sections 21A, 21C, each having a different number of sections 21 and different amplitudes. The two sections 21A, 21C are also symmetrically contained in the second conductor 21B, 21D. This causes the sinusoidal-shaped wave antenna 17 to act as a dipole antenna that resonates and receives signals at two different operating frequencies so that the wireless communication device 10 is capable of communicating at two different frequencies.

[0063] Figure 8B illustrates another embodiment of an asymmetrical sinusoidal-shaped wave antenna 17 where the amplitude of a first pole antenna 17A of the sinusoidal-shaped wave antenna 17 has a different amplitude than the second pole antenna 17B of the sinusoidal-shaped wave antenna 17. More information on asymmetrical pole antennas is disclosed on co-pending International Patent Application No. WO 02/07085, entitled "Wireless Communication Device and Method," assigned to the same assignee as the present invention, and incorporated herein by reference in its entirety.

[0064] Figure 8C illustrates another embodiment of an asymmetrical sinusoidal-shaped wave antenna 17 where the length of a first pole antenna 17A of the sinusoidal-shaped wave antenna 17 is of a different length than the second pole antenna 17B of the sinusoidal-shaped wave antenna 17. Note that the embodiments of Figures 8A, 8B, and 8C may be combined to create an asymmetrical dipole wave antenna 17 wherein the pole antennas 17A, 17B contain different lengths, different amplitudes, including different amplitudes within different sections 21, of a pole antenna 17A, 17B.

[0065] Figure 8D illustrates an alternative embodiment of Figure 8A, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 8A is equally applicable for this embodiment.

[0066] Figure 8E illustrates an alternative embodiment of Figure 8B, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 8B is equally applicable for this embodiment.

[0067] Figure 8F illustrates an alternative embodiment of Figure 8C, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 8C is equally applicable for this embodiment.

[0068] Note that the embodiments of Figures 8D, 8E, and 8F may be combined to create an asymmetrical dipole wave antenna 17 wherein the pole antennas 17A, 17B contain different lengths, different amplitudes, including different amplitudes within different sections 21,

of a pole antenna 17A, 17B.

[0069] Figure 9A illustrates another embodiment of the sinusoidal-shaped wave antenna 17 coupled to the wireless communication device 10 wherein the wireless communication device 10 is configured to receive signals at two different frequencies. A sinusoidal-shaped wave antenna 17 similar the sinusoidal-shaped wave antenna 17 illustrated in Figure 6B is coupled to the wireless communication device 10 to form a dipole sinusoidal-shaped wave antenna 17. As in the Figure 4A, 4B, 4C embodiments, a resonating ring 40 is also capacitively coupled to the wireless communication device 10 to provide a second antenna 17 that operates at a second and different frequency from the operating frequency of the dipole sinusoidal-shaped wave antenna 17. The resonating ring 40 may be constructed out of any type of material so long as the material is conductive.

[0070] Figure 9B also illustrates an embodiment of the present invention employing a dipole sinusoidal-shaped wave antenna 17 that operates at 915 MHz and a resonating ring 40 that operates at 2.45GHz. The dipole sinusoidal-shaped wave antenna 17 and the resonating ring 40 are both coupled to the wireless communication device 10 to allow the wireless communication device 10 to operate at two different frequencies. However, in this embodiment, the conductors of the dipole sinusoidal-shaped wave antenna 17 are looped around the resonating ring 40 at a first inductive turn 42A and a second inductive turn 42B. In this manner, any force placed on the dipole sinusoidal-shaped wave antenna 17 will place such force on the resonating ring 40 instead of the wireless communication device 10.

[0071] Figure 9C illustrates another embodiment similar to those illustrated in Figures 9A and 9B. However, the resonating ring 40 is directly coupled to the wireless communication device 10, and the dipole sinusoidal-shaped wave antenna 17 is directly coupled to the resonating ring 10. A first and second conducting attachments 44A, 44B are used to couple the resonating ring 40 to the wireless communication device 10. A force exerted on the dipole sinusoidal-shaped wave antenna 17 is exerted on and absorbed by the resonating ring 40 rather than wireless communication device 10 so that the wireless communication device 10 is not damaged.

[0072] Figure 9D illustrates an alternative embodiment of Figure 9A, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 9A is equally applicable for this embodiment.

[0073] Figure 9E illustrates an alternative embodiment of Figure 9B, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 9B is equally applicable for this embodiment.

[0074] Figure 9F illustrates an alternative embodiment of Figure 9C, except that the wave antenna 17 is com-

prised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 9C is equally applicable for this embodiment.

[0075] Figure 10A illustrates another embodiment of the sinusoidal-shaped wave antenna 17 that is stretched wherein the curves in the conductor are at angles close to 180 degrees, but slightly less, to form sections 21 close to each other. The embodiment is similar to that of Figure 5A. The coupling between the individual elements in the sinusoidal-shaped wave antenna 17 will be strong due to the proximity. Therefore, a small change in stretching of the sinusoidal-shaped wave antenna 17 will have a large effect on the operating frequency of the sinusoidal-shaped wave antenna 17. Since the change in the operating frequency will be great, it will be easier for a small stretching of the sinusoidal-shaped wave antenna 17 to change the operating frequency of the sinusoidal-shaped wave antenna 17.

[0076] Figure 10B illustrates the same sinusoidal-shaped wave antenna 17 and wireless communication device 10 illustrated in Figure 10A; however, the sinusoidal-shaped wave antenna 17 is not being stretched. When this sinusoidal-shaped wave antenna 17 is not being stretched, the curved sections in the sinusoidal-shaped wave antenna 17 touch each other to effectively act as a regular dipole antenna without angled sections 21. In this embodiment, each pole 17A, 17B of the sinusoidal-shaped wave antenna 17 in its normal form is 30.6 millimeters long and has an operating frequency of 2.45 GHz such that the wireless communication device 10 is capable of responding to a frequency of 2.45 GHz.

[0077] Figure 10C illustrates an alternative embodiment of Figure 10A, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 10A is equally applicable for this embodiment.

[0078] Figure 10D illustrates an alternative embodiment of Figure 10B, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 10B is equally applicable for this embodiment

[0079] Figure 11 illustrates an alternative embodiment of the conductive section 21 of the wave antenna 17 wherein the width of the section 21 is dynamically altered along the length of the shape of the section 21. The conductive section 21 could be modified from a constant diameter by squeezing in a die. This embodiment spreads the bending effect along the conductive section 21 so that the wave antenna 17 is less susceptible to breaking. For example, the majority of the angular bend in the conductive section 21 occurs at the peak 33 of the conductive section 21 making the peak 31 the most likely place for the wave antenna 17 to break. However, if the peak 33 section of the conductive section 21 is made thicker, and a series of areas on either side of the peak are made

thinner, the bend angle is spread over the bend more thereby reducing the probability of breakage.

[0080] Figure 12A illustrates one type of article of manufacture that undergoes force during its manufacture and use and that may include a wireless communication device 10 and wave antenna 17 like that illustrated in Figures 5A, 5B, 10A, 10B, 10C, and 10D. This embodiment includes a rubber tyre 50 well known in the prior art that is used on transportation vehicles. The tyre 50 is designed to be pressurized with air when placed inside a tyre 50 mounted on a vehicle wheel forming a seal between the wheel and the tyre 50. The tyre 50 is comprised of a tread surface 52 that has a certain defined thickness 53. The tread surface 52 has a left outer side 54, a right outer side 56 and an orifice 58 in the center where the tyre 50 is designed to fit on a wheel. The left outer side 54 and right outer side 56 are curved downward at angles substantially perpendicular to the plane of the tread surface 52 to form a left outer wall 60 and a right outer wall 62. When the left outer wall 60 and right outer wall 62 are formed, a left inner wall 64 and a right inner wall (not shown) on the inside of right outer wall 62 are also formed as well. Additionally, depending on the type of tyre 50, a steel belt 68 may also be included inside the rubber of the tyre 50 under the surface of the tread surface 52 for increased performance and life. More information on the construction and design of a typical tyre 50 is disclosed in U.S. Patent No. 5,554,242, entitled "Method for making a multi-component tyre," incorporated herein by reference in its entirety.

[0081] In this embodiment, a wireless communication device 10 and dipole wave antenna 17 are attached on the inner surface of the tyre 50 on the inner side of the tread surface 52. During the manufacturing of a tyre 50, the rubber in the tyre 50 undergoes a lamination process whereby the tyre 50 may be stretched up to approximately 1.6 times its normal size and then shrunk back down to the normal dimensions of a wheel. If a wireless communication device 10 is placed inside the tyre 50 during the manufacturing process, the wireless communication device 10 and antenna 17 must be able to withstand the stretching and shrinking that a tyre 50 undergoes without being damaged. The wave antenna 17 of the present invention is particularly suited for this application since the wave antenna 17 can stretch and compress without damaging the conductor of the sinusoidal-shaped wave antenna 17.

[0082] Also, a tyre 50 is inflated with a gas, such as air, to a pressure during its normal operation. If the wireless communication device 10 and antenna 17 are placed inside the tread surface 52 or inside the tyre 50, the wireless communication device 10 and antenna 17 will stretch and compress depending on the pressure level in the tyre 50. The more pressure contained in the tyre 50, the more the tyre 50 will stretch.

[0083] Therefore, any wireless communication device 10 and antenna 17 that is contained inside the tyre 50 or inside the rubber of the tyre 50 must be able to withstand

this stretching without being damaged and/or affecting the proper operation of the wireless communication device 10.

[0084] Figure 12B illustrates the same tyre illustrated in Figure 12A. However, in this embodiment, the tyre 50 is under a pressure and has stretched the dipole wave antenna 17. Because the dipole wave antenna 17 is capable of stretching without being damaged or broken, the dipole wave antenna 17 is not damaged and does not break when the tyre 50 is stretched when subjected to a pressure. Note that the wave antenna 17 placed inside the tyre 50 could also be a monopole wave antenna 17, as illustrated in Figures 2A, 6A or 6C, or any other variation of the wave antenna 17, including the wave antennas 17 illustrated in Figures 2B, 3, 4A-4C, 5A, 5B, 6B, 6D, 7, 8A-8F, 9A-9F, 10A-10D, and 11. Also, note that the wireless communication device 10 and wave antenna 17 could be provided anywhere on the inside of the tyre 50, including inside the thickness 53 of the tread surface 52, the left inner wall 64 or the right inner wall (not shown) on the inside of right outer wall 62.

[0085] At a given frequency, the length of the wave antenna 17 for optimum coupling is affected by the electrical properties of the material surrounding, and in contact with, the conductive portions of the antenna 17. Since the rubber of the tyre 50 may contain large amounts of "carbon black", a relatively conductive material, an insulating material having the necessary electrical properties, may be required to encapsulate the metal of the antenna 17 with a non-conductive coating (not shown) to insulate it from the rubber of the tyre 50. In other cases the length of the antenna 17 elements must be tuned in length to match the electrical properties of the surrounding material, as is well known issue with antennas.

[0086] Note that the wave antenna 17 discussed above and illustrated in Figure 11 may be sinusoidal-shaped and semi-circle shaped.

[0087] Figure 13 illustrates a flowchart process wherein the interrogation reader 20 is designed to communicate with the wireless communication device 10 and wave antenna 17 to determine when the pressure of the tyre 50 has reached a certain designed threshold pressure. Because a wave antenna 17 changes length based on the force exerted on its conductors, a wave antenna 17 will stretch if placed inside a tyre 50 as the pressure inside the tyre 50 rises. The wave antenna 17 can be designed so that the length of the wave antenna 17 only reaches a certain designated length to be capable of receiving signals at the operating frequency of the interrogation reader 20 when the tyre 50 reaches a certain threshold pressure.

[0088] The process starts (block 70), and the interrogation reader 20 emits a signal 32 through the field 34 as discussed previously for operation of the interrogation reader 20 and wireless communication device 10 illustrated in Figure 1. The interrogation reader 20 checks to see if a response communication has been received from the wireless communication device 10 (decision 74). If

no response signal is received by the interrogation reader 20 from the wireless communication device 10, the interrogation reader 20 continues to emit the signal 32 through field 34 in a looping fashion (block 72) until a response is received. Once a response is received by the interrogation reader 20 from the wireless communication device 10 (decision 74), this is indicative of the fact that the wave antenna 17 coupled to the wireless communication device 10 has stretched to a certain length so that the wave antenna's 17 operating frequency is compatible with the operating frequency of the interrogation reader 20 (block 76). The interrogation reader 20 can report that the tyre 50 containing the wireless communication device 10 and wave antenna 17 has reached a certain threshold pressure. Note that the wave antennas 17 may be any of the wave antennas 17 illustrated in Figures 2B, 3, 4A-4C, 5A, 5B, 6A-6D, 7, 8A-8F, 9A-9F, 10A-10D and 11.

[0089] Figure 14 illustrates one embodiment of a reporting system 77 that may be provided for the interrogation reader 20. The interrogation reader 20 may be coupled to a reporting system 77. This reporting system 77 may be located in close proximity to the interrogation reader 20, and may be coupled to the interrogation reader 20 by either a wired or wireless connection. The reporting system 77 may be a user interface or other computer system that is capable of receiving and/or storing data communications received from an interrogation reader 20. This information may be any type of information received from a wireless communication device 10, including but not limited to identification information, tracking information, and/or environmental information concerning the wireless communication device 10 and/or its surroundings, such as pressure and temperature. The information may be used for any purpose. For example, identification, tracking, temperature, force and/or pressure information concerning a tyre 50 during its manufacture may be communicated to the reporting system 77 which may then be used for tracking, quality control, and supply-chain management. If the information received by the reporting system is not normal or proper, the reporting system 77 may control the manufacturing operations to stop and/or change processes during manufacture and/or alert personnel in charge of the manufacturing process.

[0090] The reporting system 77 may also communicate information received from the wireless communication device 10, via the interrogation reader 20, to a remote system 78 located remotely from the reporting system 77 and/or the interrogation reader 20. The communication between the reporting system 77 and the remote system 78 may be through wired communication, wireless communication, modem communication or other networking communication, such as the Internet. Alternatively, the interrogation reader 20 may communicate the information received from the wireless communication device 10 directly to the remote system 78 rather than first reporting the information through the reporting system 77 using the same or similar communication me-

diums as may be used between the reporting system 77 and the remote system 78.

[0091] Figure 15 illustrates a method of manufacturing a wave antenna 17 and assembling of the wave antenna 17 to wireless communication devices 10. The process involves eight total steps. Each of the steps is labeled in circled numbers illustrated in Figure 15. The first step of the process involves passing an antenna 17 conductor wire or foil through cogs 120 to create the alternating curves in the antenna conductor 17 to form the wave antenna 17. The cogs 120 are comprised of a top cog 120A and a bottom cog 120B. The top cog 120A rotates clockwise, and the bottom cog 120B rotates counter-clockwise. Each cog 120A, 120B has a periphery such that each of the cogs 120A, 120B interlock with each other as they rotate. As the antenna conductor 17 passes through the cogs 120A, 120B, alternating curved bends are placed in the antenna conductor 17 to form peaks 121 and valleys 122 in the antenna conductor 17 to form the wave antenna 17.

[0092] The second step of the process involves placing tin solder on portions of the wave antenna 17 so that a wireless communication device 10 can be soldered and attached to the wave antenna 17 in a later step. A soldering station 123 is provided and is comprised of a first tinning position 123A and a second tinning position 123B. For every predefined portion of the wave antenna 17 that passes by the soldering station 123, the first tinning position 123A and second tinning position 123B raise upward to place tin solder on the left side of the peak 124A and an adjacent right side of the peak 124B so that the wireless communication device 10 can be soldered to the wave antenna 17 in the third step of the process. Please note that the process may also use glue, induction welding, or other suitable adhesive, instead of solder, to attach the wireless communication device 10 to the wave antenna 17.

[0093] The third step of the process involves attaching a wireless communication device 10 to the wave antenna 17. A wireless communication device is attached to the left side of the peak 124A and the right side of the peak 124B at the points of the tin solder. An adhesive 126 is used to attach the leads or pins (not shown) of the wireless communication device 10 to the tin solder, and solder paste is added to the points where the wireless communication device 10 attach to the tin solder on the wave antenna 17 to conductively attach the wireless communication device 10 to the wave antenna 17. Note that when the wireless communication device 10 is attached to the wave antenna 17, the peak remains on the wireless communication device 10 that causes a short 128 between the two input ports (not shown) of the wireless communication device 10 and the two wave antennas 17 coupled to the wireless communication device 10.

[0094] The fourth step in the process involves passing the wireless communication device 10 as connected to the wave antenna 17 through a hot gas re-flow soldering process well known to one of ordinary skill in the art to

securely attach the solder between the leads of the wireless communication device 10 and the wave antenna 17.

[0095] The fifth step in the process involves the well-known process of cleaning away any excess solder that is unused and left over during the previous soldering.

[0096] The sixth step in the process involves removing the short 128 between the two wave antennas 17 left by the peak 124 of the wave antenna 17 from the third step in the process. Depending on the type of wireless communication device 10 and its design, the short 128 may or may not cause the wireless communication device 10 to not properly operate to receive signals and re-modulate response signals. If the wireless communication device 10 operation is not affected by this short 128, this step can be skipped in the process.

[0097] The seventh step in the process involves encapsulating the wireless communication device 10. The wireless communication device 10 is typically in the form of an RF integrated circuit chip that is encapsulated with a hardened, non-conductive material, such as a plastic or epoxy, to protect the inside components of the chip from the environment. An additional encapsulating material, such as epoxy, may also be added over the bonding points of the wireless communication device 10 to the wave antenna 17 to add additional mechanical strain relief.

[0098] The eighth and last step involves winding wireless communication devices 10 as attached on the wave antenna 17 onto a reel 130. The wireless communication devices 10 and wave antenna 17 are contained on a strip since the wave antenna 17 conductor has not been yet cut. When it is desired to apply the wireless communication device 10 and attached wave antenna 17 to a good, object, or article of manufacture, such as a tyre 50, the wireless communication device 10 and attached wave antenna 17 can be unwound from the reel 130 and the wave antenna 17 conductor cut in the middle between two consecutive wireless communication devices 10 to form separate wireless communication device 10 and dipole wave antenna 17 devices.

[0099] Please note that there are other methods of manufacturing the wave antenna 17 including using a computer numerical controller (CNC) machine. The manufacturing process may be like that of used for making springs. Also note that the wave antenna 17 discussed above and illustrated in Figure 15 may be sinusoidal-shaped, semi-circle shaped, or may have relatively sharp bends as in the embodiments of Figures 2A, 2B, 3, 4A-4C, 5A, 5B, the latter requiring sharper teeth on the cogs 120A, 120B instead of the rounded teeth to produce the curved bends.

[0100] Figure 16A illustrates the short 128 left on the wireless communication device 10 and sinusoidal-shaped wave antenna 17 as a tuning inductance. Some UHF wireless communication devices 10 operate best when a direct current (DC) short, in the form of a tuning inductance, is present across the wireless communication device 10 and, therefore, the process of removing

the short 128 can be omitted. Figure 16A illustrates an alternative embodiment of the sinusoidal-shaped wave antenna 17 and wireless communication device 10 where an uneven cog 120 has been used in step 1 of the process illustrated in Figure 15 to produce an extended loop short 128 across the wireless communication device 10. This gives the required amount of inductance for best operation of the wireless communication device 10 as the sinusoidal-shaped wave antenna 17 and the short 128 are in parallel.

[0101] Figure 16B illustrates an alternative embodiment of Figure 16A, except that the wave antenna 17 is comprised of sections 21 that are semi-circle shaped. All aspects for the sinusoidal-shaped wave antenna 17 embodiment discussed above and illustrated in Figure 16A is equally applicable for this embodiment. An embodiment with relatively sharp bends as in the antennas of Figures 2A and 2B is also of course possible.

[0102] The embodiments set forth above represent the necessary information to enable those skilled in the art to practice the invention and illustrate the best mode of practicing the invention. Upon reading the preceding description in light of the accompanying drawing figures, those skilled in the art will understand the concepts of the invention and will recognize applications of these concepts not particularly addressed herein. It should be understood that these concepts and applications fall within the scope of the disclosure and the accompanying claims.

[0103] It should be understood that the present invention is not limited to applications involving a vehicle tyre. It should also be understood that the present invention is not limited to any particular type of component, including but not limited to the wireless communication device 10 and its components, the wave antenna 17, the interrogation reader 20 and its components, the pressure sensor 18, the temperature sensor 19, the resonating ring 40, the tyre 50 and its components, the reporting system 77, the remote system 78, the wheel 100 and its components, the cogs 120, the soldering station 123, and the adhesive 124. For the purposes of this application, couple, coupled, or coupling is defined as either a direct connection or a reactive coupling. Reactive coupling is defined as either capacitive or inductive coupling. The wave antenna 17 discussed in this application may be sinusoidal-shaped or semi-circle shaped.

[0104] Those skilled in the art will recognize improvements and modifications to the preferred embodiments of the present invention. All such improvements and modifications are considered within the scope of the concepts disclosed herein and the claims that follow.

[0105] In the following, further embodiments of the invention are explained with the help of the following examples.

Examples :

[0106]

5 1. A wireless communication device, comprising: a RFID chip; a wave antenna coupled to said RFID chip; said wave antenna comprised of at least one conductor that is shaped to form at least two different sections.

10 2. A wireless communication device, comprising: a RFID chip; a wave antenna coupled to said RFID chip; said wave antenna comprised of at least one conductor that is bent in at least one position at an angle less than 180 degrees to form at least two different sections.

15 3. A device as explained in example 1 or example 2, wherein said wave antenna is comprised from the group consisting of a monopole wave antenna and a dipole wave antenna.

20 4. A device as explained in example 2, wherein said at least one conductor is comprised out of two separate conductors that are each bent in at least one position to form an angle and are each coupled to said RFID chip to form a wave dipole antenna.

25 5. A device as explained in any one of examples 1 to 4, wherein said at least one conductor is constructed out of a material comprised from the group consisting of copper, brass, steel, and zinc-plated steel.

30 6. A device as explained in example 2, wherein said at least one conductor is bent in a plurality of positions to form at least one inflection point and three or more different sections in said at least one conductor.

35 7. A device as explained in example 4, wherein said two separate conductors are bent in a plurality of positions to form three or more different sections wherein said two separate conductors each contain at least one inflection point.

40 8. A device as explained in any one of examples 1 to 7, wherein said at least one conductor is coated with a non-conductive material.

45 9. A device as explained in any one of examples 1 to 8, wherein said antenna is designed to operate at a frequency comprised from the group consisting of around about 915 MHz and around about 2.45 GHz.

50 10. A device as explained in any one of examples 1 to 9, wherein said at least two different sections comprise a first section having a first length to form a first antenna designed to operate at a first operating frequency and a second section having a second length to form a second antenna designed to operate at a second operating frequency.

11. A device as explained in example 10, wherein said first section is coupled to said RFID chip, and said second section is coupled to said first section.
12. A device as explained in example 10 or example 11, wherein said second section is bent into a plurality of subsections each having the same length to form said second antenna. 5
13. A device as explained in any one of examples 10 to 12, wherein said first section is bent into a plurality of subsections each having the same length to form said first antenna. 10
14. A device as explained in any one of examples 10 to 13, wherein said second section is bent into a plurality of subsections each having the same length to form said second antenna. 15
15. A device as explained in any one of examples 1 to 14, further comprising a resonating ring coupled to said wave antenna wherein said wave antenna operates at a first operating frequency and said resonating ring forms a second antenna that operates at a second operating frequency. 20 25
16. A device as explained in example 15, wherein said resonating ring is capacitively coupled to said wave antenna. 30
17. A device as explained in example 15 or example 16, wherein said resonating ring is additionally coupled to said RFID chip so that a force placed on said wave antenna will be placed in whole or in part on said resonating ring to relieve mechanical stress on said RFID chip. 35
18. A device as explained in any one of examples 1 to 17, wherein said different sections are substantially straight. 40
19. A device as explained in any one of examples 1 to 17, wherein said different sections form a sinusoidal shape. 45
20. A device as explained in any one of examples 1 to 17, wherein said different sections form a semi-circular shape. 50
21. A device as explained in example 1, wherein said at least one conductor forms a sinusoidal-shaped wave antenna, said at least one conductor being curved in at least one position at an angle less than 180 degrees to form said at least two different sections. 55
22. A device as explained in example 1, wherein said at least one conductor forms a semi-circle shaped wave antenna, said at least one conductor being curved in at least one position at an angle less than 180 degrees to form said at least two different sections.
23. A device according to example 21 or example 22, wherein the amplitude of said at least one sinusoidal-shaped or semi-circle shaped conductor is the same over the entire length of said conductor.
24. A device according to example 21 or example 22, wherein the amplitude of said at least one sinusoidal-shaped or semi-circle shaped conductor is different in at least two different portions of said conductor.
25. A device as explained in example 21 or example 22, wherein said at least one sinusoidal-shaped or semi-circle shaped conductor is comprised of a first section having a first length to form a first wave antenna designed to operate at a first operating frequency and a second section having a second length to form a second wave antenna designed to operate at a second operating frequency.
26. A device as explained in example 25, wherein said first section is coupled to said RFID chip, and said second section is coupled to said first section.
27. A device as explained in example 25 or example 26, wherein said first section has a first amplitude and said second section has a second amplitude different than said first amplitude.
28. A device as explained in example 21 or example 22, wherein said at least one sinusoidal-shaped or semi-circle shaped conductor is comprised out of a first sinusoidal-shaped or semi-circle shaped conductor and a second sinusoidal-shaped or semi-circle shaped conductor wherein both said first conductor and a second conductor are coupled to said RFID chip to form a dipole sinusoidal-shaped or semi-circle shaped wave antenna.
29. A device as explained in example 21 or example 22, wherein said first sinusoidal shaped or semi-circle shaped conductor has a first amplitude and said second section has a second amplitude different than said first amplitude.
30. A device as explained in example 29, wherein said first sinusoidal-shaped or semicircle shaped conductor has a first length and said second sinusoidal-shaped or semicircle shaped conductor has a second length different than said first length.
31. A device as explained in example 1, example 21 or example 22, wherein said at least one conductor

has a peak that is thicker than the other portions of said at least one conductor to reduce the susceptibility of breakage of said wave antenna.

32. A device as explained in example 1, example 21 or example 22, wherein said at least one conductor is heated to reduce the stress in said at least one conductor to reduce the susceptibility of breakage of said wave antenna.

33. Apparatus, comprising: a wireless communication device coupled to a wave antenna that operates at a first operating frequency comprised of at least one conductor; and a tyre wherein said wireless communication device is mounted to the inside of said tyre to detect environmental information inside said tyre and wirelessly communicates the environmental information.

34. Apparatus as explained in example 33, wherein said environmental information is comprised from the group consisting of pressure inside said tyre or temperature inside said tyre.

35. Apparatus as explained in example 33 or example 34, wherein said tyre comprises: an outer surface, comprising: a circular-shaped tread surface having a left outer side and a right outer side and an orifice; and said left outer side and said right outer side each fold down at an angle substantially perpendicular to said tread surface to form a left outer wall and a right outer wall substantially perpendicular to said tread surface and to form a left inner wall and a right inner wall attached substantially perpendicular to an internal wall on the opposite side of said tread surface; and wherein said wireless communication device is attached to a wall inside said tyre comprised from the group consisting of said left inner wall, said right inner wall, and said internal wall.

36. Apparatus as explained in any one of examples 33 to 35, wherein said wave antenna expands when said tyre is placed under pressure.

37. Apparatus as explained in example 36, wherein said wave antenna operates at a second operating frequency when said wave antenna expands when said tyre is placed under pressure.

38. Apparatus as explained in any one of examples 33 to 37, further comprising a resonating ring coupled to said wave antenna wherein said resonating ring forms a second antenna that operates at a second operating frequency.

39. Apparatus as explained in example 38, wherein said resonating ring is capacitively coupled to said wave antenna.

40. Apparatus as explained in example 38 or example 39, wherein said resonating ring is additionally coupled to said wireless communication device so that the pressure placed on said wave antenna when inside said tyre will be placed in whole or in part on said resonating ring to relieve mechanical stress on said wireless communication device.

41. Apparatus as explained in any one of examples 33 to 40, wherein said tread surface is comprised out of rubber having a thickness wherein said wave antenna is contained inside said rubber.

42. Apparatus as explained in any one of examples 33 to 40, wherein said tread surface is comprised out of rubber having a thickness wherein said wireless communication device is contained inside said rubber.

43. Apparatus as explained in any one of examples 33 to 40, wherein said wave antenna is contained inside said rubber.

44. Apparatus as explained in example 42, wherein said tread surface contains an inner steel belt inside said rubber wherein said wave antenna is coupled to said inner steel belt.

45. Apparatus as explained in example 44, wherein said coupling of said wave antenna to said inner steel belt is comprised from the group consisting of direct coupling, capacitive coupling, and reactive coupling.

46. Apparatus as explained in example 45, wherein said wave antenna is contained inside said tread surface.

47. Apparatus as explained in example 45 or example 46, wherein said wireless communication device is contained inside said tread surface.

48. Apparatus as explained in example 47, wherein said wave antenna is contained inside said tread surface.

49. Apparatus as explained in any one of examples 33 to 48, wherein said wireless communication device is coupled to a pressure sensor contained inside said tyre that measures the pressure inside said tyre so that said wireless communication device can wirelessly communicate the pressure inside said tyre as environmental information.

50. Apparatus as explained in any one of examples 33 to 49, wherein said wireless communication device is coupled to a temperature sensor contained inside said tyre that measures the temperature inside said tyre so that said wireless communication device

can wirelessly communicate the temperature inside said tyre as environmental information.

51. Apparatus as explained in example 50, wherein said wireless communication device is also coupled to a pressure sensor contained inside said tyre that measures the pressure inside said tyre so that said wireless communication device can wirelessly communicate the pressure and the temperature inside said tyre as environmental information.

52. A system for wirelessly communicating information about a tyre, comprising: an interrogation reader; a wireless communication device coupled to a wave antenna that operates at a first frequency and is comprised of at least one conductor; and a tyre wherein said wireless communication device is mounted to the inside of said tyre to detect environmental information inside said tyre and wirelessly communicate the environmental information to said interrogation reader.

53. A system as explained in example 52, wherein said information is environmental information comprised from the group consisting of pressure inside said tyre and temperature inside said tyre.

54. A system as explained in example 52 or example 53, wherein said wave antenna expands when said tyre is placed under pressure.

55. A system as explained in example 54, wherein said wave antenna operates at a operating frequency that is compatible with said interrogation reader when said wave antenna expands when said tyre is placed under a threshold pressure.

56. A system as explained in example 54 or example 55, wherein said wave antenna operates at a second operating frequency when said wave antenna expands when said tyre is placed under pressure.

57. A system as explained in any one of examples 52 to 56, further comprising a resonating ring coupled to said wave antenna wherein said resonating ring forms a second antenna that operates at a second operating frequency.

58. A system as explained in example 57, wherein said resonating ring is capacitively coupled to said wave antenna.

59. A system as explained in example 58, wherein said resonating ring is additionally coupled to said wireless communication device so that pressure placed on said wave antenna when inside said tyre will be placed in whole or in part on said resonating ring to relieve mechanical stress on said wireless

communication device.

60. A system as explained in any one of examples 52 to 59, wherein said wireless communication device is coupled to a pressure sensor contained inside said tyre that measures the pressure inside said tyre so that said wireless communication device can wirelessly communicate the pressure inside said tyre as environmental information to said interrogation reader.

61. A system as explained in any one of examples 52 to 59, wherein said wireless communication device is coupled to a temperature sensor contained inside said tyre that measures the temperature inside said tyre so that said wireless communication device can wirelessly communicate the temperature inside said tyre as environmental information to said interrogation reader.

62. A system as explained in example 61, wherein said wireless communication device is also coupled to a pressure sensor contained inside said tyre that measures the pressure inside said tyre so that said wireless communication device can wirelessly communicate the pressure and the temperature inside said tyre as environmental information to said interrogation reader.

63. Method for wirelessly communicating with a tyre, comprising the steps of: placing a wireless communication device coupled to a wave antenna that operates at a first operating frequency comprised of at least one conductor inside a tyre; placing an interrogation reader proximate to said tyre; and receiving information wirelessly at a first frequency from said wireless communication device inside said tyre.

64. A method as explained in example 63, further comprising the step of sending a wireless communication to said wireless communication device before said step of receiving information.

65. A method as explained in example 63 or example 64, wherein said information is comprised of environmental information about said tyre.

66. A method as explained in example 65, wherein said environmental information is comprised from the group consisting of temperature inside said tyre and pressure inside said tyre.

67. A method as explained in example 65 or example 66, further comprising the step of sensing the pressure inside said tyre and including the pressure inside said tyre in said information.

68. A method as explained in example 65 or example

66, further comprising the step of sensing the temperature inside said tyre and including the temperature inside said tyre in said information.

69. A method as explained in any one of examples 63 to 68, further comprising the step of placing said wave antenna under pressure by placing said tyre under pressure.

70. A method as explained in example 69, further comprising the step of receiving information at a second frequency through wireless communication from said wireless communication device when said tyre is placed under a threshold pressure.

71. A method as explained in any one of examples 63 to 70, further comprising the step of coupling a resonating ring to said wave antenna to form a second antenna that operates at a second frequency.

72. A method as explained in example 71, further comprising the step of coupling said resonating ring to said wireless communication device so that pressure placed on said wave antenna when inside said tyre will be placed in whole or in part on said resonating ring to relieve mechanical stress on said wireless communication device.

73. Method of manufacturing a wave antenna, comprising the steps of: passing a conducting foil through a first cog and a second cog having a plurality of teeth and placed in a vertical plane with respect to each other wherein said plurality of teeth in said first cog and said second cog substantially interlock with each other as said first cog rotates clockwise and said second cog rotates counterclockwise; and placing alternating bends in said conducting foil when said conducting foil is passed through said first cog and said second cog.

74. Method of manufacturing a wireless communication device that is coupled to a wave antenna, comprising the steps of: passing a conducting foil through a first cog and a second cog having a plurality of teeth and placed in a vertical plane with respect to each other wherein said plurality of teeth in said first cog and said second cog substantially interlock with each other as said first cog rotates clockwise and said second cog rotates counterclockwise; placing alternating bends in said conducting foil when said conducting foil passes through said first cog and said second cogs to form a conducting foil having a plurality of bends that form a plurality of peaks separated by valleys; and soldering wireless communication chips individually to each side of one of said plurality of peaks using solder.

75. A method as explained in example 74, further

comprising the step of tinning each side of said plurality of peaks before said step of soldering.

76. A method as explained in example 74 or example 75, further comprising the step of reflow soldering said wireless communication chips with hot gas after said step of soldering.

77. A method as explained in any one of examples 74 to 76, further comprising the step of cleaning away said excess solder away after said step of soldering.

78. A method as explained in any one of examples 74 to 77, further comprising removing a short formed across each side of said plurality of peaks after said step of soldering.

79. A method as explained in any one of examples 74 to 78, further comprising the step of encapsulating said wireless communication chip after said step of soldering.

80. A method as explained in any one of examples 74 to 79, further comprising the step of winding said conductive foil with said wireless communication chips soldered to said conductive foil onto a reel.

81. A method as explained in example 80, further comprising the step of cutting said winding of conductive foil said wireless communication chips soldered to said conductive foil to form individual wireless communication devices.

82. A method as explained in example 81, further comprising the step of attaching said individual wireless communication devices to tyres.

83. A method as explained in any one of examples 74 to 82, further comprising the steps of: re-flow soldering said wireless communication chips with hot gas after said step of soldering; cleaning away said excess solder away after said step of soldering; and removing a short formed across each side of said plurality of peaks after said step of soldering; wherein said steps of reflow-soldering, cleaning away, and removing are performed after said step of soldering.

84. A method of testing a wireless communication device that is attached to a tyre during the manufacture of the tyre, comprising: attaching a wireless communication device that is coupled to a wave antenna that operates at a first frequency and is comprised of at least one conductor to the inside of a tyre; pressurizing said tyre; and communicating with said wireless communication device at the first frequency to determine if said wireless communication device is operating properly.

85. A method as explained in example 84, wherein said step of communicating further comprises communicating with said wireless communication device at the first frequency to obtain the pressure inside the tyre.

86. A method as explained in example 85, further comprising comparing the pressure inside the tyre received from said wireless communication device to a pressure measurement from a pressure measuring device attached to a needle stem on said tyre.

Claims

1. Method of manufacturing a wave antenna, comprising the steps of: passing a conducting foil through a first cog and a second cog having a plurality of teeth and placed in a vertical plane with respect to each other wherein said plurality of teeth in said first cog and said second cog substantially interlock with each other as said first cog rotates clockwise and said second cog rotates counterclockwise; and placing alternating bends in said conducting foil when said conducting foil is passed through said first cog and said second cog.
2. Method of manufacturing a wireless communication device that is coupled to a wave antenna, comprising the steps of: passing a conducting foil through a first cog and a second cog having a plurality of teeth and placed in a vertical plane with respect to each other wherein said plurality of teeth in said first cog and said second cog substantially interlock with each other as said first cog rotates clockwise and said second cog rotates counterclockwise; placing alternating bends in said conducting foil when said conducting foil passes through said first cog and said second cogs to form a conducting foil having a plurality of bends that form a plurality of peaks separated by valleys; and soldering wireless communication chips individually to each side of one of said plurality of peaks using solder.
3. A method as claimed in Claim 2, further comprising the step of tinning each side of said plurality of peaks before said step of soldering.
4. A method as claimed in Claim 2 or Claim 3, further comprising the step of reflow soldering said wireless communication chips with hot gas after said step of soldering.
5. A method as claimed in any one of Claims 2 to 4, further comprising the step of cleaning away said excess solder away after said step of soldering.
6. A method as claimed in any one of Claims 2 to 5,

further comprising removing a short formed across each side of said plurality of peaks after said step of soldering.

7. A method as claimed in any one of Claims 2 to 6, further comprising the step of encapsulating said wireless communication chip after said step of soldering.
8. A method as claimed in any one of Claims 2 to 7, further comprising the step of winding said conductive foil with said wireless communication chips soldered to said conductive foil onto a reel.
9. A method as claimed in Claim 8, further comprising the step of cutting said winding of conductive foil said wireless communication chips soldered to said conductive foil to form individual wireless communication devices.
10. A method as claimed in Claim 9, further comprising the step of attaching said individual wireless communication devices to tyres.
11. A method as claimed in any one of Claims 2 to 10, further comprising the steps of: re-flow soldering said wireless communication chips with hot gas after said step of soldering; cleaning away said excess solder away after said step of soldering; and removing a short formed across each side of said plurality of peaks after said step of soldering; wherein said steps of reflow-soldering, cleaning away, and removing are performed after said step of soldering.
12. A method as claimed in any of the preceding claims, wherein the alternating bends or the plurality of bends in the conducting foil that form the plurality of peaks separated by valleys are such that the wave antenna is capable of being stretched and when the wave antenna is not stretched, the bent sections in the wave antenna touch each other.
13. A method as claimed in claim 12, wherein the bent sections effectively act as a regular dipole antenna or monopole antenna without angled sections when the wave antenna is not stretched.
14. A method as claimed in claims 12 or 13, wherein a small change in stretching of the wave antenna has a large effect on the operating frequency of the wave antenna.

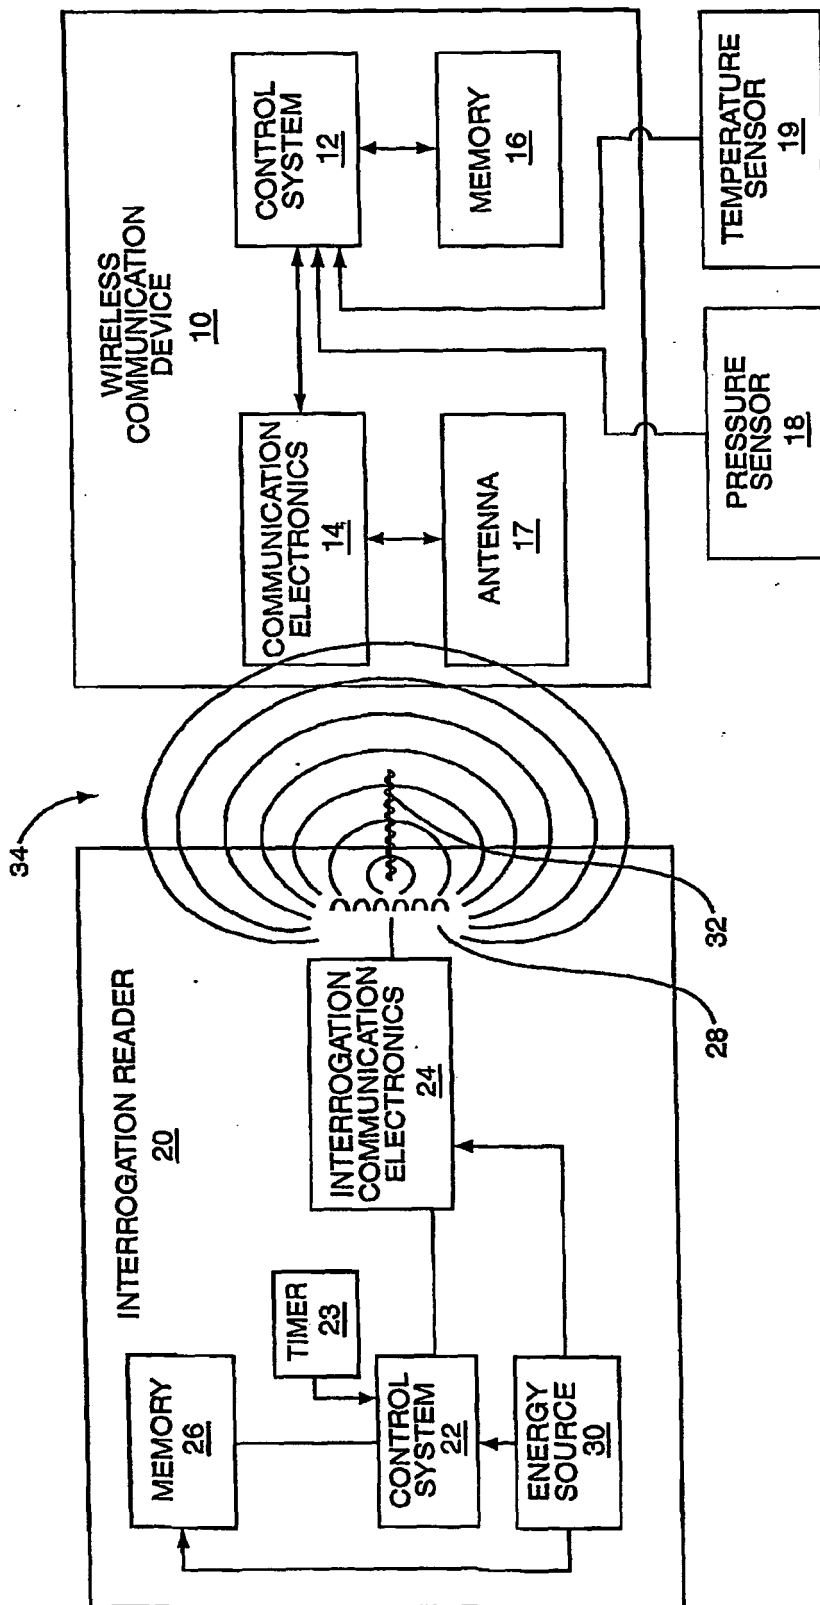


FIG. 1

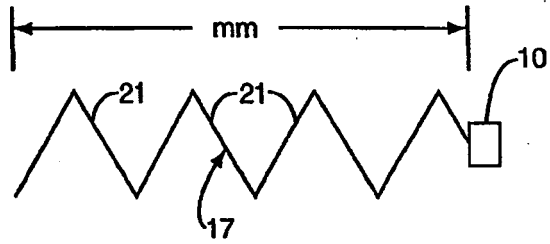


FIG. 2A

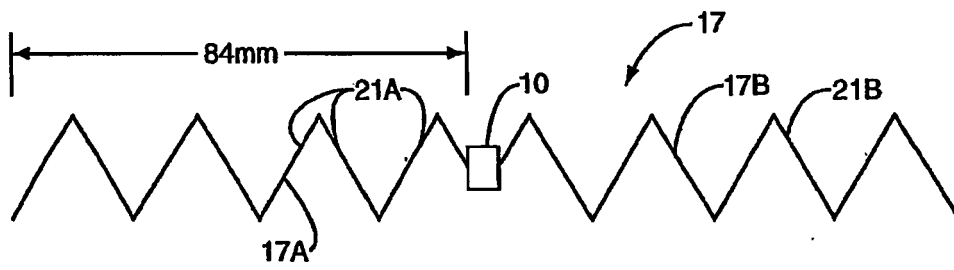


FIG. 2B

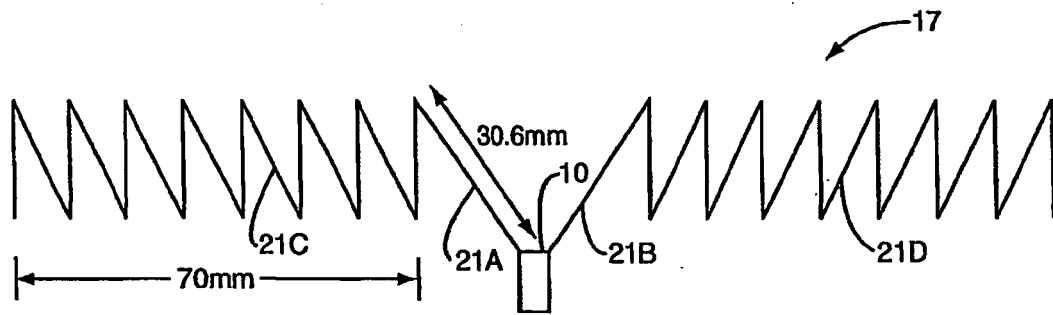


FIG. 3

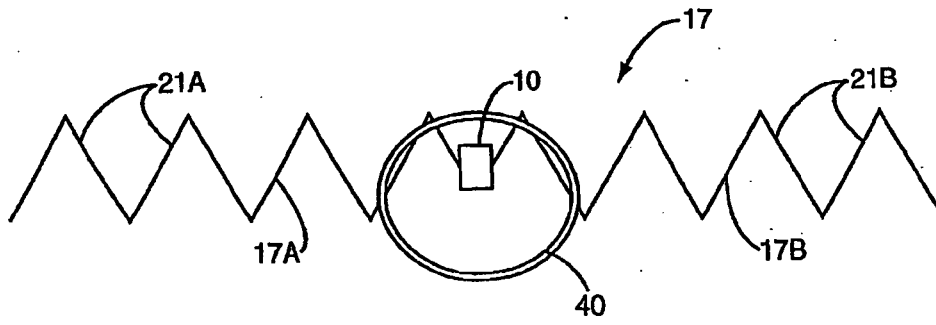


FIG. 4A

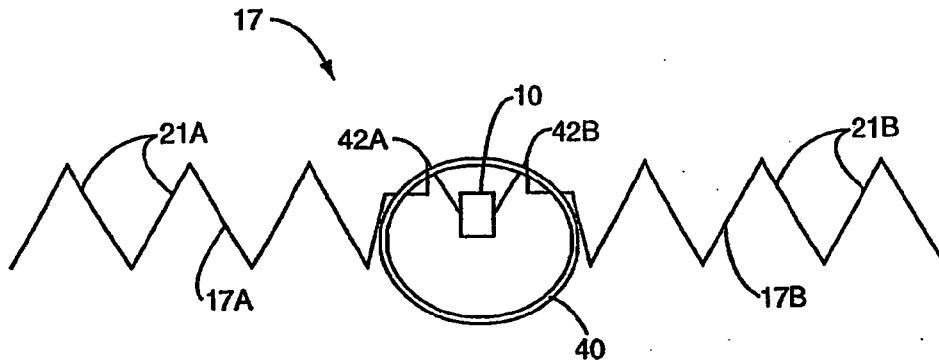


FIG. 4B

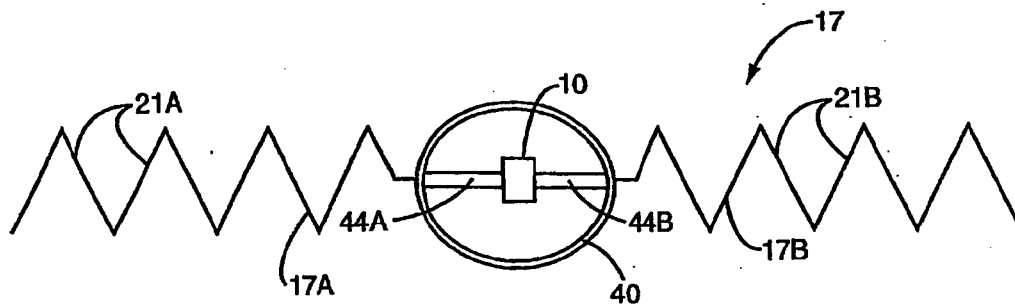


FIG. 4C

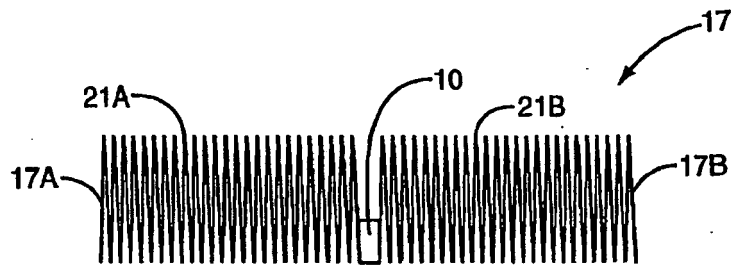


FIG. 5A

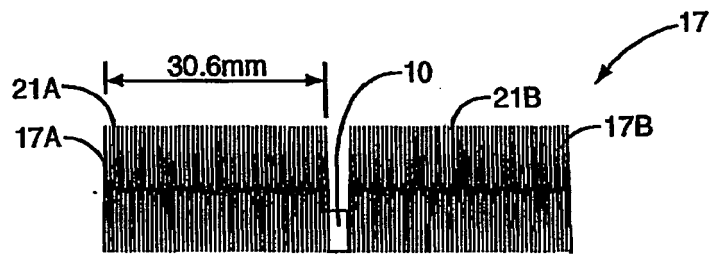


FIG. 5B

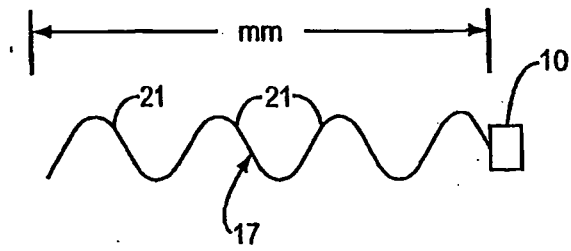


FIG. 6A

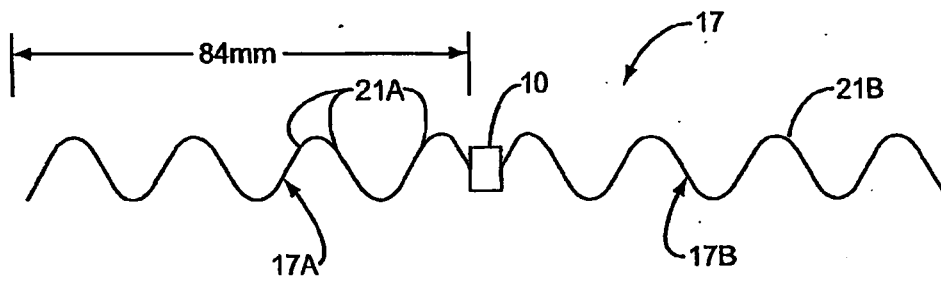


FIG. 6B

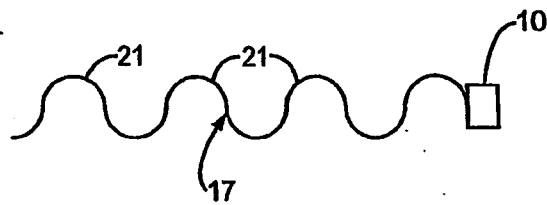


FIG. 6C

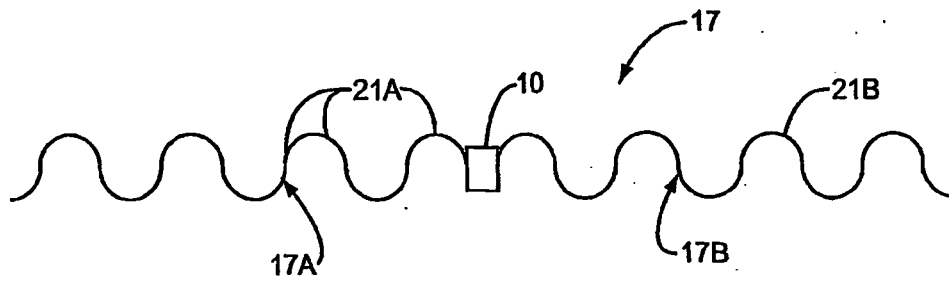


FIG. 6D

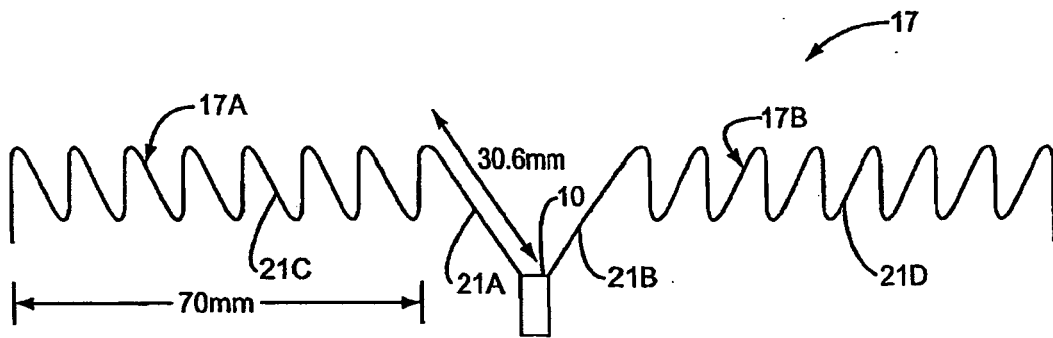


FIG. 7

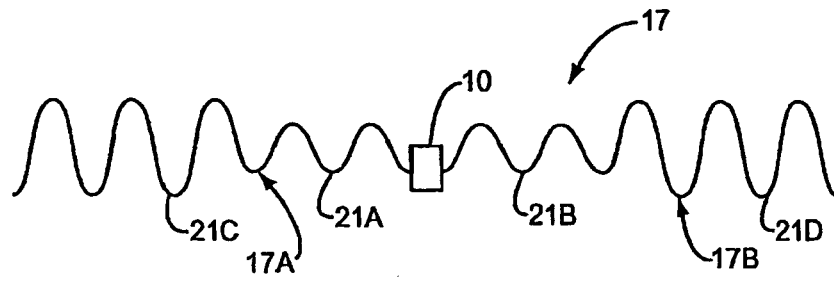


FIG. 8A

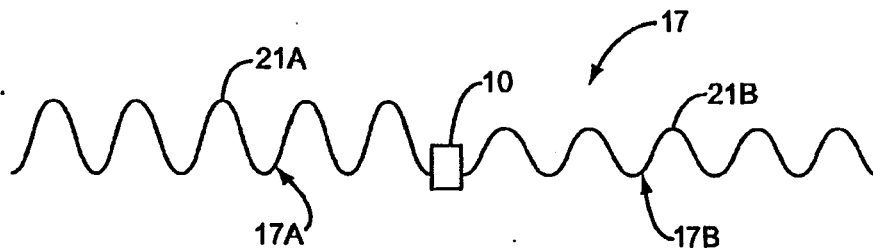


FIG. 8B

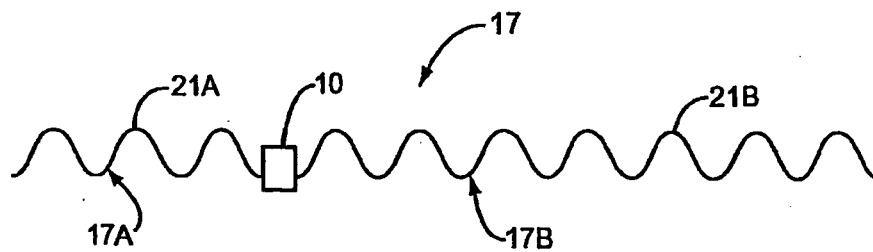


FIG. 8C

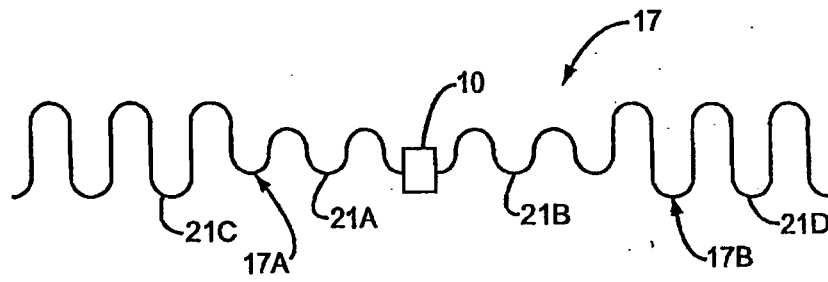


FIG. 8D

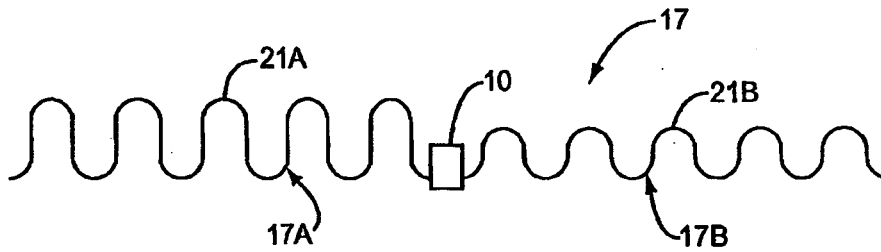


FIG. 8E

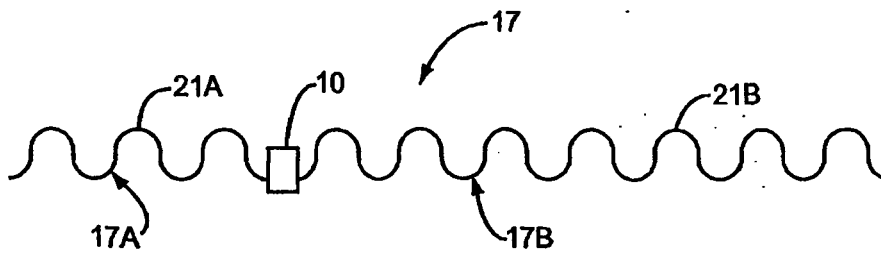


FIG. 8F

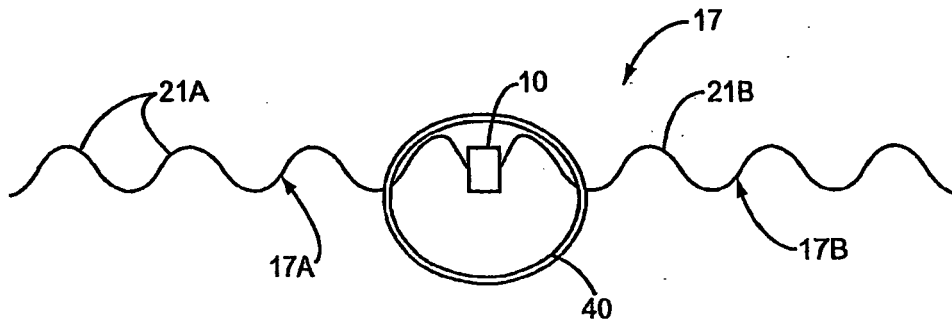


FIG. 9A

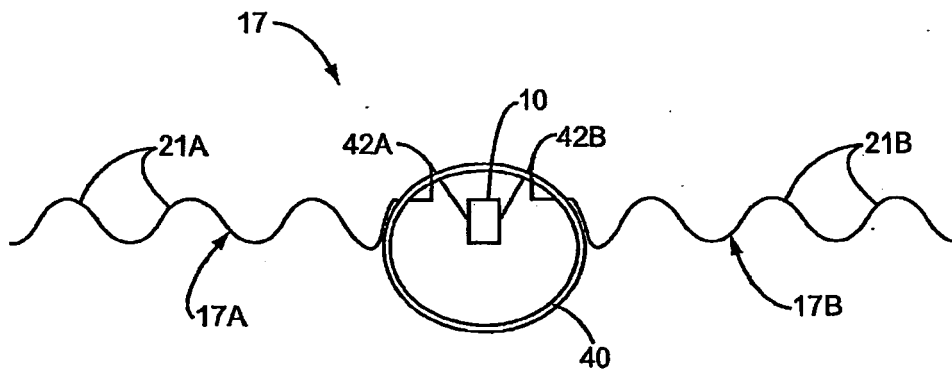


FIG. 9B

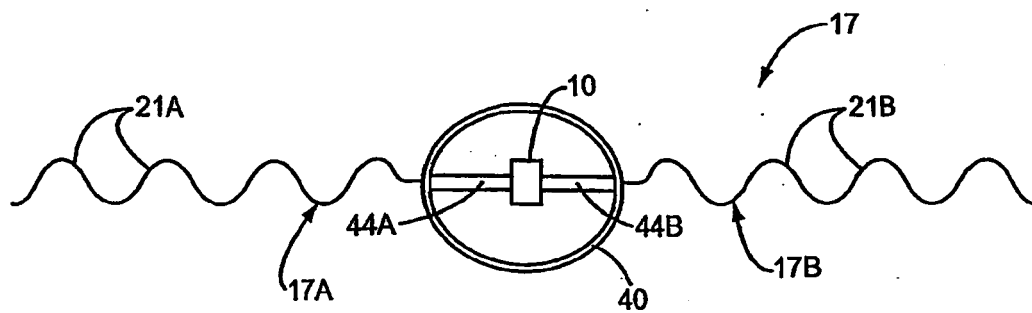


FIG. 9C

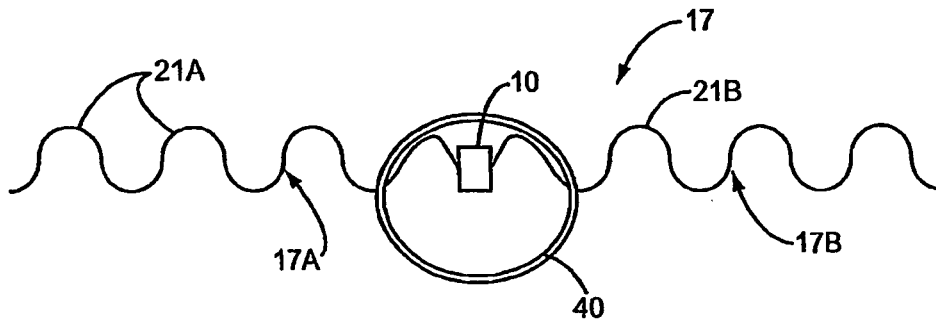


FIG. 9D

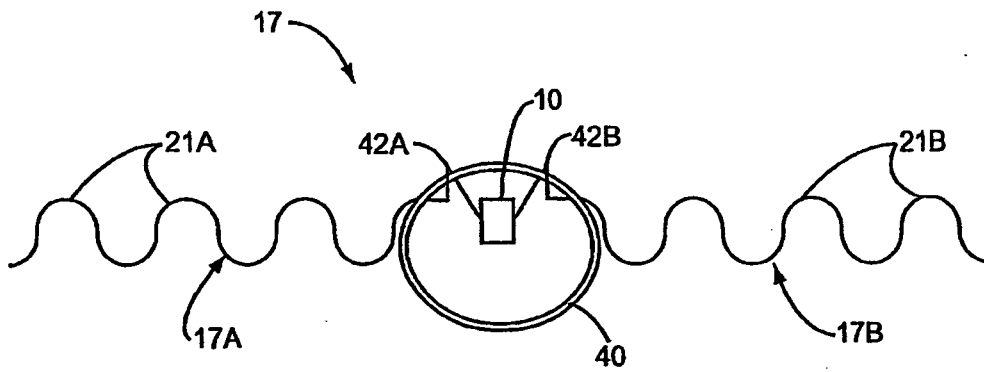


FIG. 9E

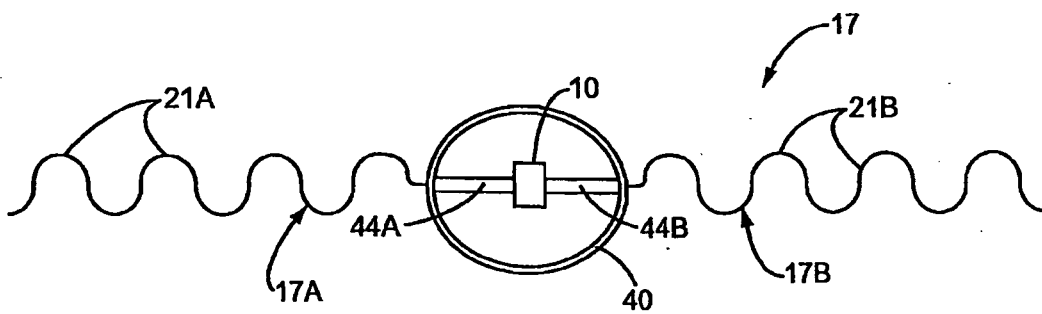


FIG. 9F

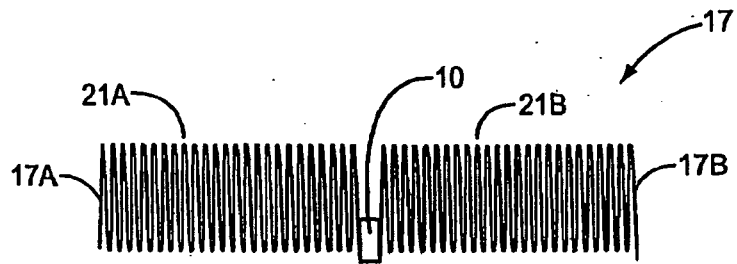


FIG. 10A

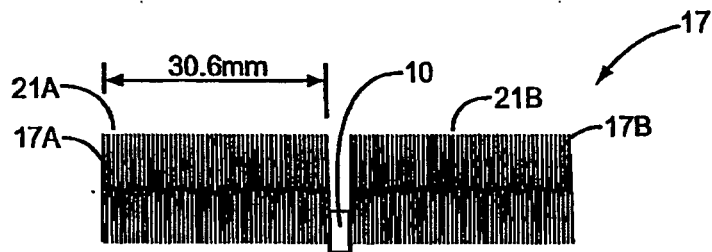


FIG. 10B

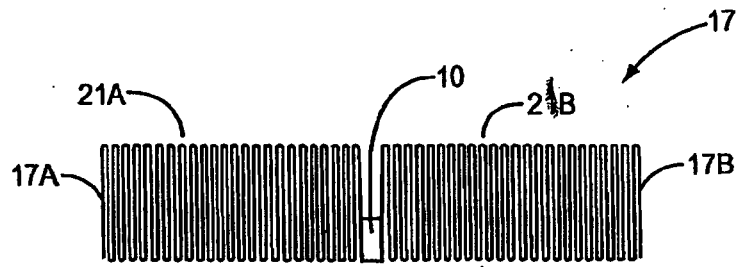


FIG. 10C

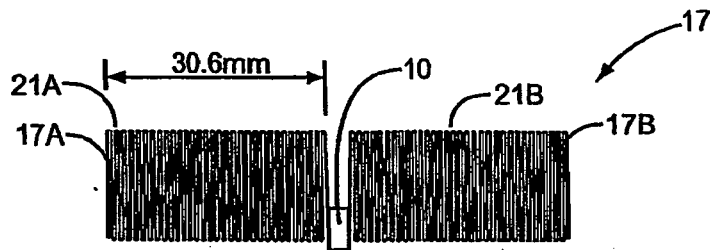


FIG. 10D

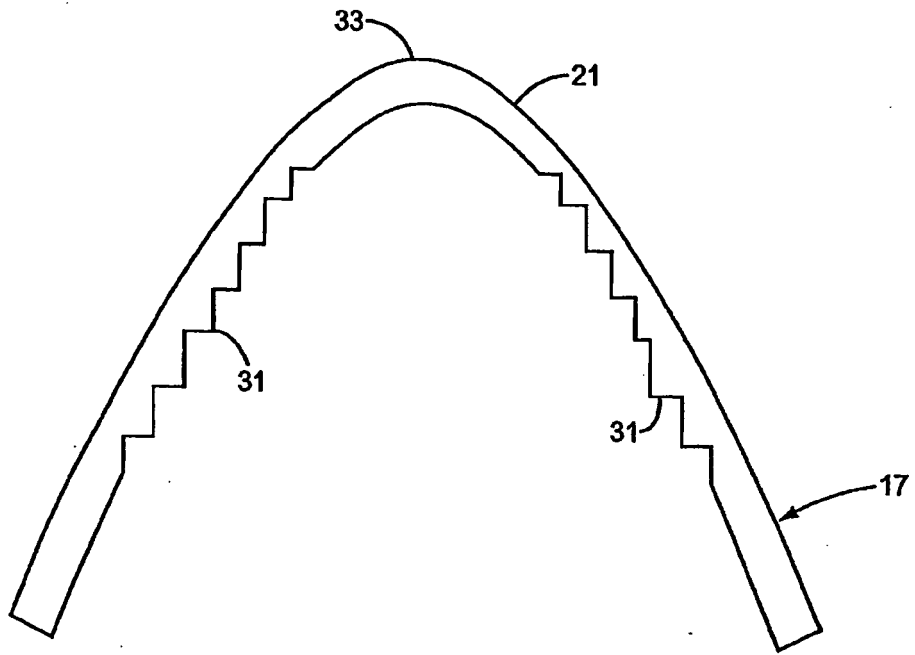


FIG.11

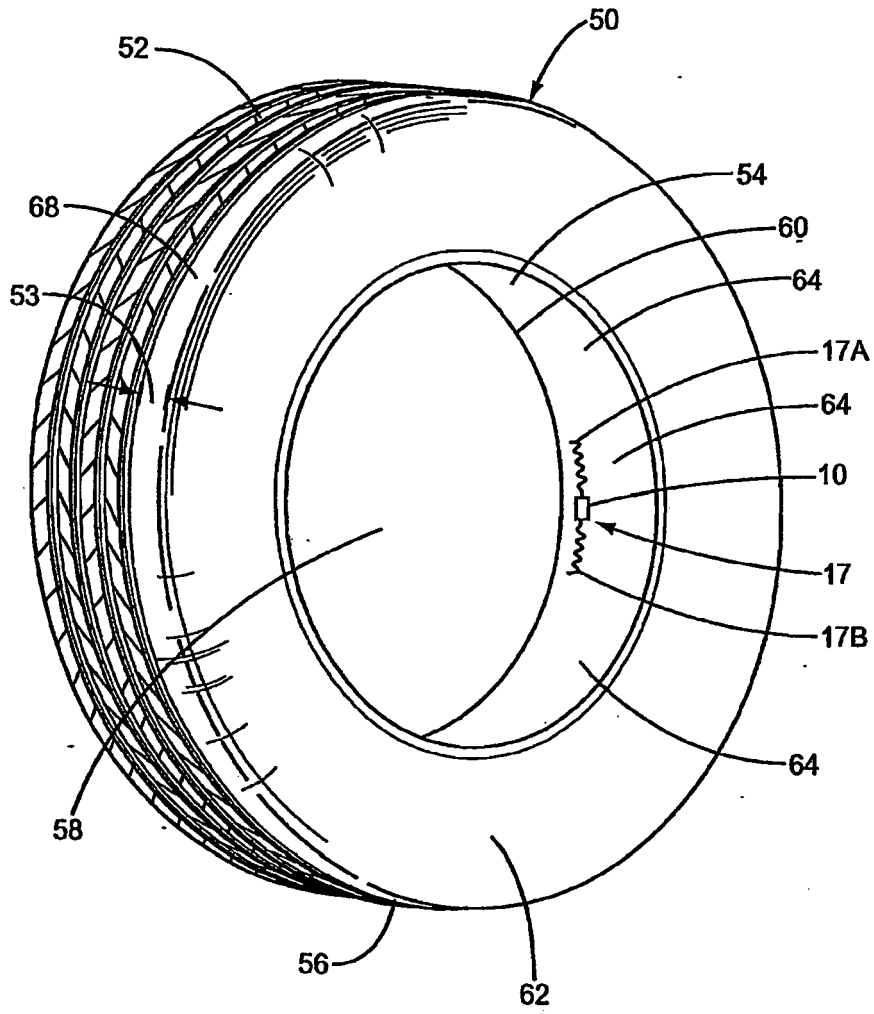


FIG. 12A

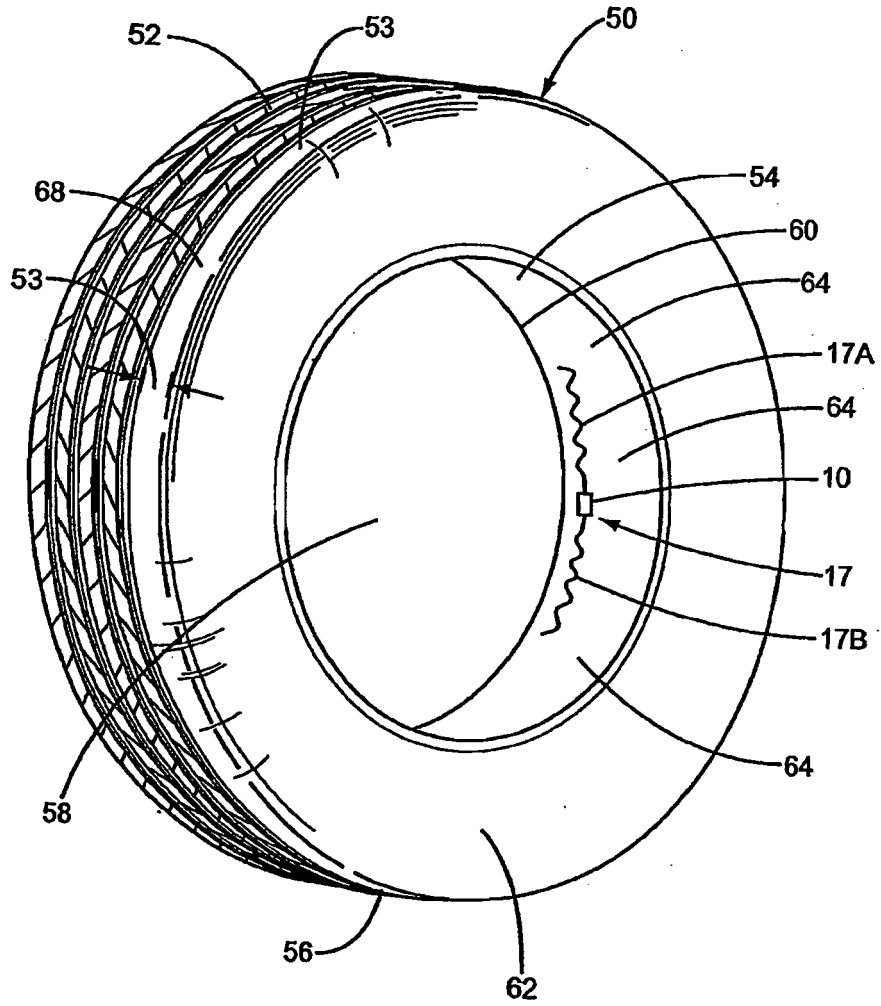


FIG.12B

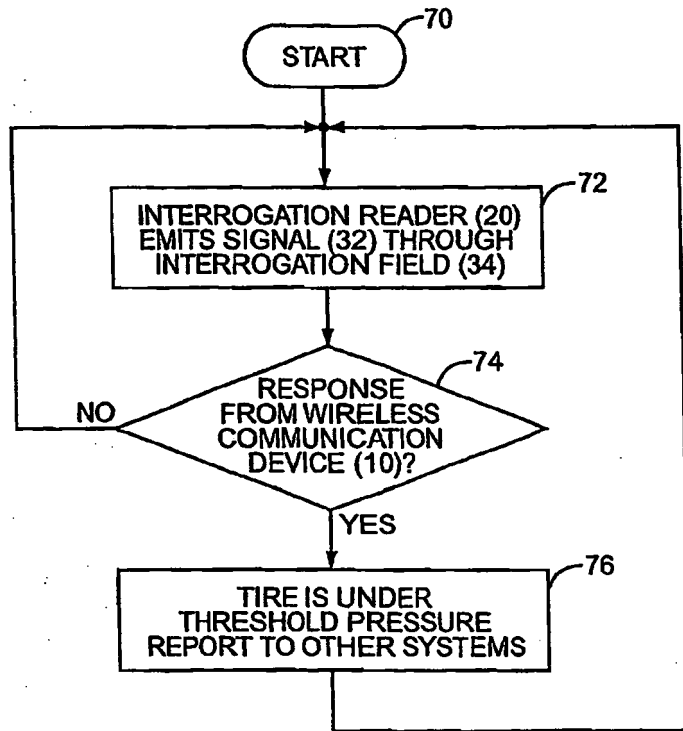


FIG. 13

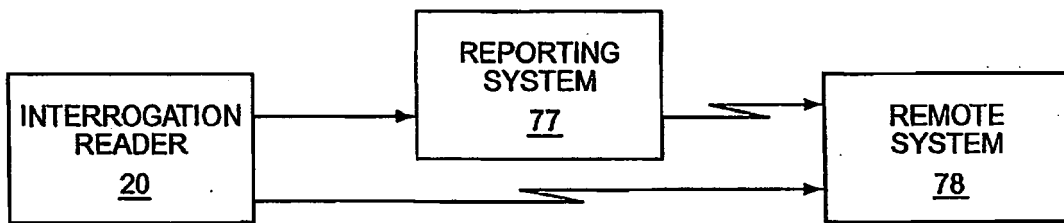


FIG. 14

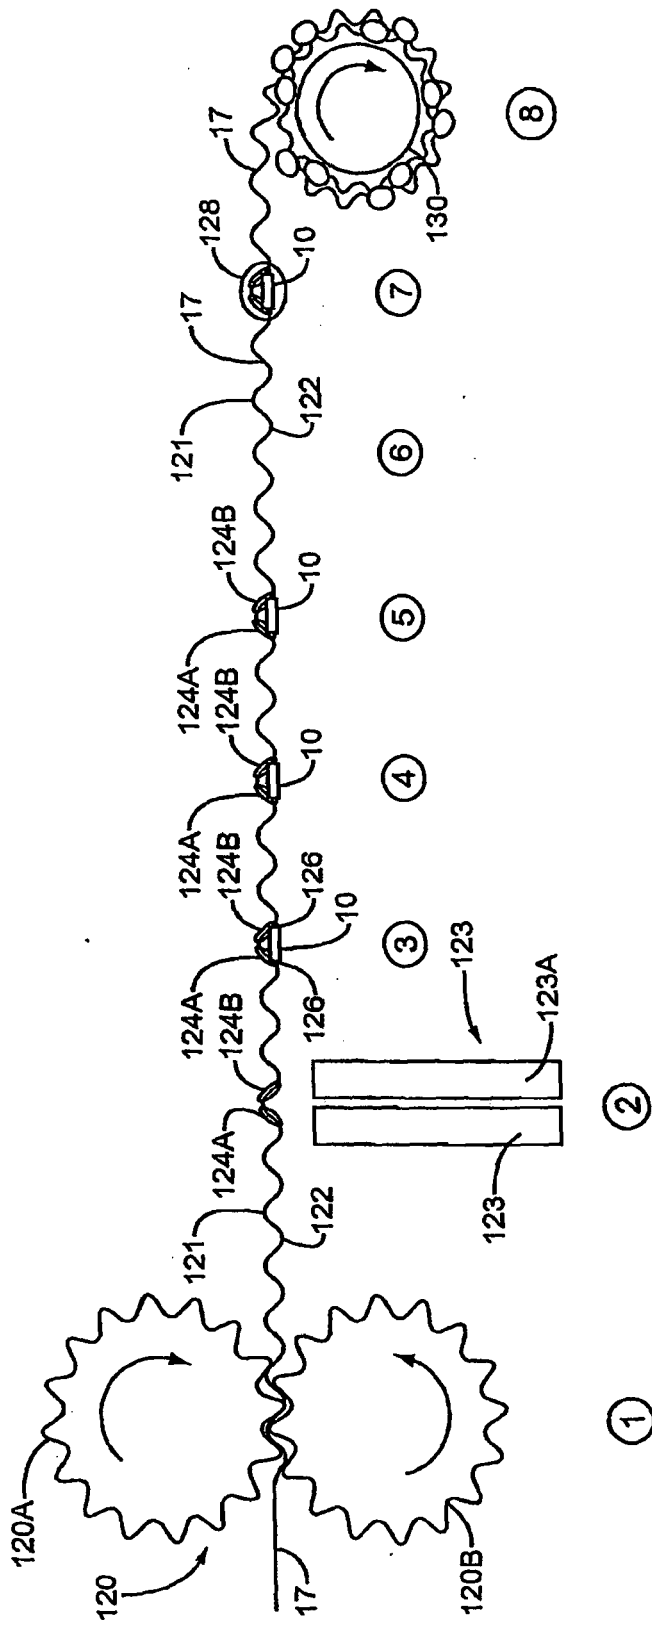


FIG. 15

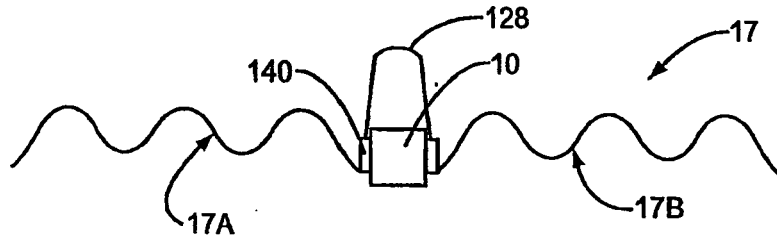


FIG. 16A

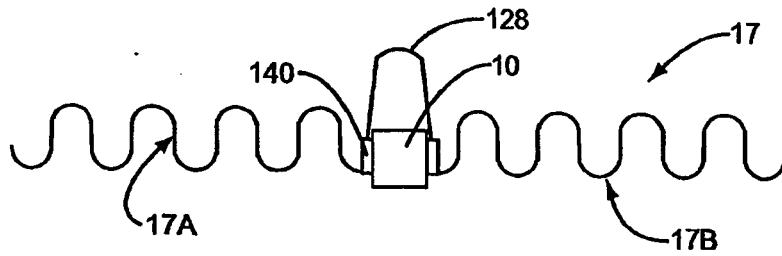


FIG. 16B

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6299349 B [0027]
- US 6272936 B [0027]
- US 5959524 A [0028]
- US 5961215 A [0028]
- US 6130602 A [0029]
- US 5833603 A [0029]
- US 5347280 A [0030]
- WO 0207085 A [0030] [0063]
- WO 0173675 A [0041]
- US 5554242 A [0080]