



(22) Date de dépôt/Filing Date: 2015/08/14

(41) Mise à la disp. pub./Open to Public Insp.: 2016/03/30

(45) Date de délivrance/Issue Date: 2022/11/08

(62) Demande originale/Original Application: 2 900 640

(30) Priorité/Priority: 2014/09/30 (US14/502,350)

(51) Cl.Int./Int.Cl. *H02J 3/00* (2006.01),
H02M 1/44 (2007.01), *H02M 7/44* (2006.01),
H02P 27/08 (2006.01)


(72) Inventeurs/Inventors:
GAO, LIJUN, US;
KARIMI, KAMIAH J., US;
KROLAK, MATTHEW J., US;
LIU, SHENGYI, US;
SOLODOVNIK, EUGENE V., US;
WINSTANLEY, ADAM J., US

(73) Propriétaire/Owner:
THE BOEING COMPANY, US

(74) Agent: SMART & BIGGAR LLP

(54) Titre : ARCHITECTURE DE CONVERTISSEUR MODULAIRE PARALLELE

(54) Title: PARALLEL MODULAR CONVERTER ARCHITECTURE

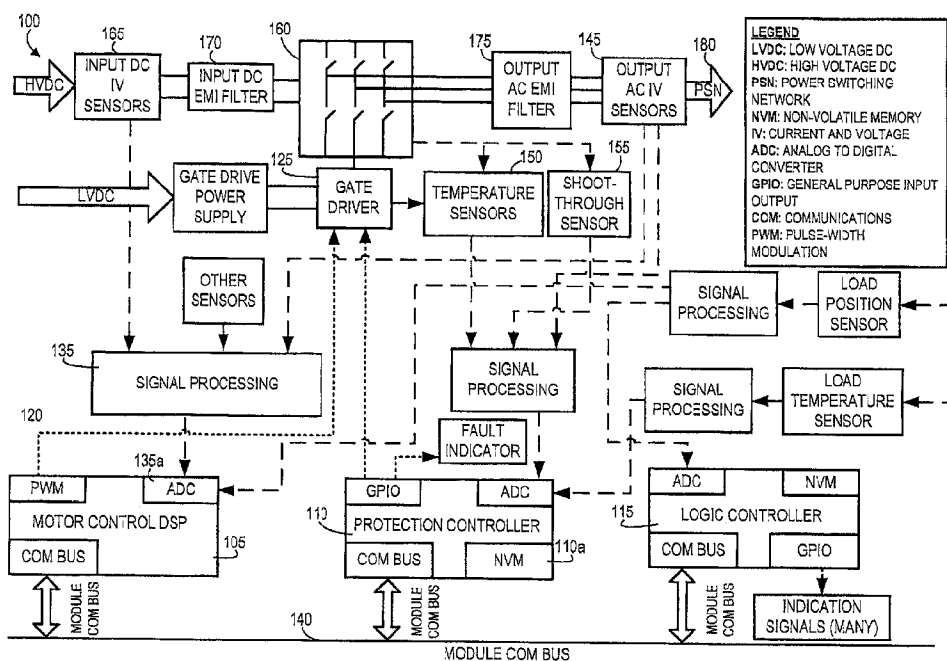

(57) Abrégé/Abstract:

A first parallel module converter module includes a logic processor to determine a first pulse width modulation "PWM" frequency and duration and to generate a corresponding first control signal. A motor control digital signal processor "DSP" generates a PWM signal based on the first control signal. A gate driver activates an inverter to produce an alternating current "AC" output signal based on the PWM signal, and a module communications bus provides for communications between the first parallel module converter module and a second parallel module converter module.



ABSTRACT

A first parallel module converter module includes a logic processor to determine a first pulse width modulation "PWM" frequency and duration and to generate a corresponding first control signal. A motor control digital signal processor "DSP" generates a PWM signal based on the first control signal. A gate driver activates an inverter to produce an alternating current "AC" output signal based on the PWM signal, and a module communications bus provides for communications between the first parallel module converter module and a second parallel module converter module.

PARALLEL MODULAR CONVERTER ARCHITECTURE

BACKGROUND

Embodiments of the present disclosure relate generally to power
5 management and specifically to a system and method for providing improved
modular parallel converter architecture for powering multiple loads with multiple
parallel modular converter modules.

Modern vehicles use a large number of electronics, motors, heaters, and
other electrically driven equipment. Electric motors, in particular, are ubiquitous in
10 modern vehicles, including aircraft, and power everything from hydraulic pumps to
cabin fans. Conventionally, each of these electric motors has been driven by an
independent motor controller. Each motor controller is sized to be able to carry the
maximum amount of current required to power its respective motor at full power for
an extended period of time (and generally, includes some additional capacity for
15 safety) without overheating or malfunctioning.

As a result, each aircraft carries an excessive number of motor controllers,
each of which is oversized and underutilized a majority of the time. In other words,
the motor controller includes enough capacity to run the motor at full power for an
extended period of time plus a safety margin, but motors are rarely, if ever, run at full
20 capacity. This is because the motors themselves have some safety margin built in
and because, a majority of the time, the motors are operating in a lower demand
regime (e.g., the cabin fan is not always on "High"). In addition, some motors are
only used occasionally, or during specific flight segments, and are unused the
remainder of the time. As a result, many of an aircraft's complement of heavy,
25 expensive motor controllers spend a majority of their service life either inactive or
significantly below their rated power outputs.

What is needed, therefore, is a system architecture that enables the use of
multiple, modular, assignable, dynamically reconfigurable motor controllers that can

work alone or in parallel with other parallel motor controllers to meet power control needs. The system should enable one or more parallel controllers to be assigned to each active electrical load in the aircraft, as necessary, to meet existing power demands. The system should enable the capacity of each motor controller to be
5 more fully utilized, reducing system weight, cost, and complexity. It is to such a system that embodiments of the present disclosure are primarily directed.

SUMMARY

It should be appreciated that this Summary is provided to introduce a
10 selection of concepts in a simplified form that are further described below in the Detailed Description. This Summary is not intended to be used to limit the scope of the claimed subject matter.

Embodiments of the present disclosure relate to a modular power distribution and power conversion system for electrical loads. The system can include a plurality
15 of parallel module converter modules ("modules") linked to form a parallel module converter ("converter"). Each module can be used alone, or in conjunction with other modules, to meet a particular power demand. Modules can also be assigned to loads based on the priority of the loads represented.

Embodiments of the present disclosure can comprise a first parallel module
20 converter module comprising a logic processor to determine a first pulse width modulation (PWM) frequency and duration and generate a corresponding first control signal, a motor control digital signal processor (DSP) to generate a PWM signal based on the first control signal, a gate driver to activate an inverter to produce an alternating current (AC) output signal based on the PWM signal, and a
25 module communications bus to communicate between the first parallel module converter module and a second parallel module converter module.

Embodiments of the present disclosure can further comprise a method for providing power comprising receiving a request for a first load from an external

aircraft system at a master logic controller, assigning the first load to a first parallel module converter module with the master logic controller, providing a first motor control algorithm to the first parallel module converter module with a control switching network, and connecting the first parallel module converter module to the first load with a first switch of a power switching network.

Embodiments of the present disclosure can further comprise a method for providing power comprising receiving a request for a first load from a first external aircraft system at a master logic controller, receiving a request for a second load from a second external aircraft system at the master logic controller, placing a first parallel module converter module and a second parallel module converter module in parallel with a power switching network, assigning the first load to the first parallel module converter module and the second parallel module converter module with the master logic controller, assigning the second load to a third parallel module converter module with the master logic controller, detecting an increase in the second load and a decrease in the first load with the master logic controller, placing the second parallel module converter module and the third parallel module converter module in parallel with the power switching network, and reassigning the second parallel module converter module to the second load with the master logic controller.

Embodiments of the present disclosure can also comprise a system comprising a master logic controller to receive a first load request and a second load request from a vehicle controller, a control switching network, comprising a plurality of control algorithms, in communication with the master logic controller, a plurality of inverters in communication with the control switching network for converting one or more direct current (DC) input signals to one or more AC output signals, and a power switching network, comprising a plurality of switches to connect the plurality of inverters to one or more electrical loads. In some embodiments, the controller can activate a first group of the one or more switches in the power switching network to connect a first group of the one or more inverters to a first load in response to the first load request and can activate a second group of the one or more switches in the

power switching network to connect a second group of the one or more inverters a second load in response to the second load request.

Embodiments of the present disclosure can also comprise a method of providing power comprising receiving a request at a master logic controller to power a first load from a first external aircraft system, determining the power to be provided to the first load with the master logic controller, determining a first plurality of parallel module converter module to be activated to power the first load with the master logic controller, determining a plurality of parameters of a first control algorithm for the first plurality of parallel module converter modules with a control switching network, instructing a power switching network to connect the first plurality of parallel module converter modules in parallel with the first load, and activating the first control algorithm to provide the first load to the external aircraft system.

In one embodiment, there is provided a first parallel modular converter module comprising: an inverter configured to produce an alternating current (AC) output signal; and a motor control digital signal processor (DSP) configured to: receive a first control message via a module communications bus, wherein the first control message includes a control algorithm that is selected, from a plurality of predefined control algorithms, by a master controller according to a type of a first load assigned to the inverter, and wherein the master controller is configured to generate a command for a control signal network that routes the first control message to at least the first parallel modular converter module; and generate a pulse width modulation (PWM) signal based at least in part on the first control message. The first parallel modular converter module further comprises a gate driver configured to activate the inverter to produce the AC output signal based on the PWM signal. The master controller is further configured to: receive control messages from a master logic controller, wherein the control messages include the first control message and a second control message routed to a second parallel modular converter module; and duplicate and transmit the control messages using a data logging communications bus distinct from the module communications bus.

In another embodiment, there is provided a method for providing power. The method comprises: receiving a request for the first load from an external aircraft system at the master controller; and connecting the first parallel modular converter module described above or any variant thereof to the first load with a first switch of a power switching network.

In another embodiment, there is provided a method comprising: assigning at least a parallel modular converter module to power a first load specified by a first load request; selecting, according to a type of the first load, a first control algorithm from a plurality of predefined control algorithms to be applied to the parallel modular converter module; receiving, at a master controller, control messages from a master logic controller; generating a command for a control switching network to route a first control message of the control messages to the parallel modular converter module; routing the control messages to respective destinations using a module communications bus, wherein the first control message that includes the first control algorithm is routed to a motor control digital signal processor (DSP) of the parallel modular converter module, and wherein a second control message of the control messages is routed to at least one other parallel modular converter module; generating, using the motor control DSP, a pulse width modulation (PWM) signal based at least in part on the first control message; generating, based on the PWM signal and using a gate driver coupled with the motor control DSP, an alternating current (AC) output signal with an inverter of the parallel modular converter module; and duplicating and transmitting the control messages using a data logging communications bus distinct from the module communications bus.

In another embodiment, there is provided a system comprising a plurality of parallel modular converter modules comprising a first parallel modular converter module and a second parallel modular converter module. The first parallel modular converter module comprises: a module communications bus communicatively coupling a master controller and the plurality of parallel modular converter modules. The master controller is configured to: assign at least the first parallel modular converter module to power a first load specified by a first load request; select, according to a type of the first load, a first control algorithm from a plurality of

predefined control algorithms to be applied to the first parallel modular converter module; generate a command for a control signal network that routes the first control algorithm to at least the first parallel modular converter module; route control messages to respective destinations using the module communications bus, wherein

5 a first control message of the control messages that includes the first control algorithm is routed to the first parallel modular converter module, and wherein a second control message of the control messages is routed to the second parallel modular converter module; and duplicate and transmit the control messages using a data logging communications bus distinct from the module communications bus. The first parallel

10 modular converter module further comprises: a motor control digital signal processor (DSP) operable to generate a pulse width modulation (PWM) signal based at least in part on the first control message; and a gate driver operable to generate, based on the PWM signal, an alternating current (AC) output signal with an inverter of the first parallel modular converter module.

The features, functions, and advantages that have been discussed can be achieved independently in various embodiments of the present disclosure or may be combined in yet other embodiments, further details of which can be seen with
5 reference to the following description and drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is an electrical schematic depicting a parallel modular converter module ("module") for use in a parallel modular converter in a high voltage DC input
10 application, in accordance with some embodiments of the present disclosure.

Fig. 2 is an electrical schematic depicting a module for use in a parallel modular converter in an AC input application, in accordance with some embodiments of the present disclosure.

Figs. 3A-3C are electrical schematics depicting a parallel module converter ("converter") using multiple modules in a high voltage DC current regime, in
15 accordance with some embodiments of the present disclosure.

Fig. 4 is an electrical schematic depicting an output configuration, in accordance with some embodiments of the present disclosure.

Fig. 5 is an electrical schematic depicting an alternative module with shared controllers in a high voltage DC input application, in accordance with some
5 embodiments of the present disclosure.

Figs. 6A-6C are electrical schematics depicting an alternative converter in a high voltage DC input application, in accordance with some embodiments of the present disclosure.

Fig. 7 is an electrical schematic depicting a power switching network, in
10 accordance with some embodiments of the present disclosure.

Fig. 8 is an electrical schematic depicting a power switching network, in accordance with some embodiments of the present disclosure.

Figs. 9A-9C are electrical schematics depicting an alternative converter, in accordance with some embodiments of the present disclosure.

Fig. 10 is an electrical schematic depicting an overall system architecture for
15 the converter, in accordance with some embodiments of the present disclosure.

Fig. 11 is a detailed electrical schematic depicting a control switching network and a power switching network of Fig. 10, in accordance with some embodiments of the present disclosure.

Fig. 12 is a flowchart depicting a method of distributing power, in accordance
20 with some embodiments of the present disclosure.

Fig. 13 is a flowchart depicting a method for reapportioning loads to a plurality of modules, in accordance with some embodiments of the present disclosure.

Each figure shown in this disclosure shows a variation of an aspect of the
25 embodiment presented, and only differences will be discussed in detail.

DETAILED DESCRIPTION

Embodiments of the present disclosure relate generally to power distribution
5 and power conversion systems and more particularly to a parallel modular converter
for distributing electrical loads without the need for individual controllers at each
electrical load. The converter can utilize a plurality of networked parallel modular
converter modules, each rated with a predetermined power capacity. A master
controller, in communication with aircraft systems and the modules, can receive
10 requests from various power loads (e.g., electric motors) and can allocate one or
more modules to meet the requested demand.

To simplify and clarify explanation, the disclosure is described herein as a
system for allocating power on an aircraft. One skilled in the art will recognize,
however, that the disclosure is not so limited. The system can also be used, for
15 example and not limitation, with automobiles, other types of vehicles, and in power
distribution networks. The disclosure can be used to improve control and reduce the
cost and expense of distributing power in numerous situations by reducing the
number of controllers required and eliminating excess controller capacity.

The materials and components described hereinafter as making up the
20 various elements of the present disclosure are intended to be illustrative and not
restrictive. Many suitable materials and components that would perform the same or
a similar function as the materials and components described herein are intended to
be embraced within the scope of the disclosure. Such other materials and
components not described herein can include, but are not limited to, materials and
25 components that are developed after the time of the development of the disclosure.

As mentioned above, a problem with conventional power distribution systems
is that, generally, each electrical load is provided with an individual controller for
power distribution purposes. Unfortunately, this leads to an excess of controller

capacity because each individual controller must be rated for the maximum load that the requisite electrical appliance can draw. In addition, in most cases, the controllers are actually designed to provide some margin of safety even though (1) the electrical load itself (e.g., an electric motor) may have some inherent safety margin and (2) many electrical loads are generally used at less than full power and/or are only used intermittently.

To this end, embodiments of the present disclosure relate to a networked system of modular power controllers that can be used individually or in parallel to meet existing power demands. Because every electrical load in an aircraft will rarely, if ever, be on at the same time, the system can be designed with a capacity more closely related to nominal or average power consumption (plus some safety margin) rather than “worst case scenario.” As a result, the number of components required, component weight, size, and cost can be reduced, system efficiency can be improved, and improved system redundancy can be provided. In the event of a motor controller failure, for example, the system can be reconfigured to assign the load to a functioning motor controller, improving reliability. In addition, if the loads are such that the system is operating at full capacity, all loads can still be powered, albeit at a reduced capacity in some cases.

As shown in Fig. 1, a building block of the system can comprise a plurality of parallel modular converter modules (“modules”) **100** that can be networked together to form a parallel modular converter (“converter”), discussed below. In some embodiments, as shown in Fig. 1, each module **100** can comprise onboard processing. In this configuration, the module **100** can comprise at least three processors: the Motor Control Digital Signal Processor (“DSP”) **105**, the protection processor **110**, and the logic processor **115**. Alternatively, protection processor **110** may be denoted a protection controller, and logic processor **115** may be denoted logic controller.

In some embodiments, therefore, the DSP **105** can generate, for example, a high-frequency gate drive pulse width modulation signal (PWM) **120** to activate the

gate driver **125**. The gate driver **125** acts essentially as the switching side of the power module **100**, much like an electrical relay. In other words, the output **180** of the module **100** is regulated by the PWM signal **120**. To determine the proper PWM signal **120**, the DSP **105** can utilize signals from various sensors via a signal processor **135** and/or signals via a module communications bus **140**, discussed below.

In some embodiments, the DSP **105** can utilize sensors including, for example and not limitation, temperature sensors **150** and shoot-through sensors **155** to detect potentially damaging conditions. In other embodiments, the DSP **105** can utilize sensors including current sensors (to detect overcurrent conditions), voltage sensors (to detect overvoltage conditions), motor speed and position sensors (to detect over-speed conditions). In addition, many of these sensors (e.g., current, voltage, rotor speed and position sensors can also be used to perform motor control). In some embodiments, the signal processor **135** can condition signals from the sensors and can include an Analog to Digital Converter (ADC) **135a**. In other embodiments, the ADC **135** can be a discrete unit that connects via a communications interface to the processors **105**, **110**, **115**. In still other embodiments, the ADC **135** can be integrated into one or more of the processors **105**, **110**, **115**.

Sensor data can comprise, for example and not limitation, module input and output current and voltage, motor position, DC link DM (differential mode) and CM (common mode), voltage and current, motor speed, and power module temperature. In some embodiments, the DSP **105** pulse width modulation method and output power level can be configured by the logic processor **115**. To enable communication between module processors **105**, **110**, **115** and controllers external to the module **100**, a module communications bus **140** can be utilized. In some embodiments, to enhance module **100** debugging and verification, for example, load sensor signals and DSP configurations can comprise datasets to be transmitted to a master data logger **310**, as discussed below.

It is preferable, and sometimes required, to synchronize the reference clocks between the modules **100** and the motor control DSP **105** to generate synchronous output waveforms **180**. Failure to synchronize reference clocks can result in the motor control DSP **105** generating waveforms that are out-of-phase from the waveforms of other modules **100**. This, in turn, can potentially create short circuits, which can damage or destroy the modules **100**. Variances in the high-frequency system clock of the DSP **105** are relatively insignificant; however, as a few nanoseconds will have little, or no, effect on the output waveforms. The reference clocks are preferably at least synchronized between parallel modules **100** (i.e., modules **100** that are currently feeding power to the same load). In some embodiments, for very accurate synchronization, methods known in the art such as, for example, synchronization via fiber optic cables can be used. Fiber optic can be advantageous because it is immune to the EMI noise generated by the power module switching.

In some embodiments, the protection processor **110** can enable safe operation of the module **100**. The protection processor **110** can monitor various sensors for unsafe operating conditions including, but not limited to, output AC current and voltage sensors **145**, gate driver and inverter temperatures **150**, and shoot-through voltage **155**. In some embodiments, the protection processor **110** can also monitor, for example, motor over-speed, over-voltage (DC link), overcurrent at input or output, over-voltage at input and output, CM (common mode) current, excessive voltage ripple, unbalanced input/output current, open phase, and computer failure protection (e.g., if the DSP fails, the protection processor **110** can disable the gate driver **125** independently). In still other embodiments, the protection processor **110** can also compare actual PWM configuration to the commanded PWM configuration. If these signals do not match, the gate driver **125** can also be disabled. In some embodiments, the protection processor **110** can be directly connected to the gate driver **125** enabling nearly instantaneous shutdowns of the inverter **160** should a fault be detected.

Module **100** input fault protection can also be provided by the protection processor **110** in communication with a master protection controller **305** over the module communications bus **140**. Should the protection processor **110** detect a fault, for example, the protection processor **110** can instruct the master protection controller **305** to externally disable the module **100**. In some embodiments, module **100** faults can also be recorded by the protection processor **110**. In some embodiments, the fault can be stored in the memory **110a** (e.g., non-volatile memory) of the protection processor **110** and the module **100** can be disabled until it can be repaired or replaced. To aid in debugging, in some embodiments, the protection processor **110** can also log some or all events with the master data logger **310**. In this manner, information regarding module faults, communications, master logic commands and other pertinent information can comprise datasets for logging by the master data logger **310**.

In some embodiments, the logic processor **115** can regulate the DSP **105** by configuring the modulation method and output power. Coordination between logic processors **115** in parallel modules **100** can enable equal load sharing and clock synchronization. As a result, each logic processor **115** can communicate with the master logic controller **320** for instructions on which load it is assigned to power at present.

As shown, the module **100** can accept a high-voltage DC power (HVDC) that has been rectified by an external rectifier unit. In some embodiments, the input current and voltage can be monitored by current and voltage sensors **165**. The DC waveforms can be filtered by a DC electromagnetic interference (EMI) filter **170**, which can reduce noise on the DC bus and stabilize input current and voltage. The inverter module **160** can then generate AC waveforms, which can be filtered by an output AC EMI filter **175**, for use by the system loads. In some embodiments, additional filters and processors can be used to remove switching transients and smooth the output waveform. In some embodiments, each module **100** can

comprise one small input EMI filter **170**, for example, and a larger output EMI filter **175** for each load (connecting EMI filters in series improves filter attenuation).

Current and voltage waveforms can also be monitored by additional sensors after the output AC EMI Filter **145**. In some embodiments, one or more voltage and/or current sensors at the module **100** and one or more voltage and/or current sensors on the load side. This can enable fault detection in the power switching network **325**, discussed below.

As shown in Fig. **2**, in some embodiments, rather than using an external rectifier, a rectifier **205** can be integrated into the module **200**. In this configuration, the module **200** can utilize an AC power input, such as a 3-Phase AC power input. The rectifier **205** can comprise, for example and not limitation, an active front end (comprising solid state switches) or traditional passive rectifiers (e.g., multi-pulse autotransformer rectifier units, transformer rectifier units, or diode rectifiers). This configuration can provide increased reliability because, for example, a rectifier **205** failure affects only one module **200**. In addition, reliability and safety are improved because there is also a decreased circulating current between modules **200** (i.e., as each module **200** can be isolated from other modules **200**). Of course, this approach incurs a slight increase in cost, weight, volume, and complexity of the modules **200** as the result of the additional components **205**, **210**. In some embodiments, additional current and voltage sensors **210** can be used after the rectifier **205** to sense fault conditions.

Figs. **3A-3C** depict an overall system **300** architecture for a converter. The master controller **302** can comprise, for example and not limitation, a master communications controller **315**, a master logic controller **320**, a master protection controller **305**, a master data logger **310** or master data logging controller, and a power switching network (PSN) **325**. The master communications controller **315** can connect each module, via each module's **100** module communications bus **140**, enabling message exchanges between modules **100**. In addition, messages from the master logic controller **320** can also be routed by the master communications

controller **315** to their respective destinations (e.g., to modules **100**, external aircraft systems **350**, etc.).

In some embodiments, to aid debugging, messages processed by the master communications controller **315** can be duplicated and transmitted to the master data
5 logger **310** where they are recorded for concurrent or future analysis. In some embodiments, the master communications controller **315** can facilitate communications between the modules **100** and external aircraft systems **350** (e.g., aircraft systems **350** external to the system **300** requesting power). In some
10 embodiments, the master logic controller **320** can receive requests for loads at a specified power level (i.e., current and/or voltage) from external airplane systems. The master logic controller **320** can then allocate modules **100** to fulfill power requests by selecting and configuring the modules **100** and power switching network **325** accordingly.

To ensure that any fault conditions occurring in the system **300** are detected
15 and interrupted, the master protection controller **305** can monitor the inputs and outputs to each module **100** including, for example and not limitation, the input current and voltage waveforms of the high-voltage DC Bus and the low-voltage DC Bus. In some embodiments, should a fault occur, the master protection controller **305** can signal the corresponding power switch **330** to disconnect the module **100**,
20 record the failure in the master protection controller memory **305a**, and send a message of the failure to the master data logger **310**. The master protection controller **305** can disable the module **100** until it has been, for example, repaired or replaced.

Logging of control messages and sensor readings, on the other hand, can be
25 handled by the master data logger **310**. The master data logger **310** can record the data it receives to a data storage medium **335** via a data logging bus **345**, which can be in communication via the data storage interface (DSI) **310a**. In some embodiments, such as when high-frequency sensor readings are to be written to the data storage, high-speed high-capacity storage devices can be used. In some

embodiments, the reliability of the system **300** can be enhanced using redundant low-voltage DC connections to the master controllers (e.g., the master protection controller **305**, master data logger **310**, master communications controller **315**, and master logic controller **320**) and the module's **100** processors (e.g., the motor control DSP **105**, protection processor **110**, and logic processor **115**).

In this configuration, the modules **100** can be powered through rectifier units (rectifiers) **340** external to the modules **100**. Each rectifier **340** can power N (any number of) modules **100**. Of course, decreasing the number, N, powered by each rectifier **340** can increase reliability, at the expense of increased weight and complexity. As a result, if there are M rectifiers **340**, for example, this would result in a total of N*M modules **100**. As above, the rectifier **340** can be, for example and not limitation, an AFE, passive diode, or multi-pulse autotransformer unit rectifiers.

In some embodiments, as shown in Fig. **4**, the output system **400** can include the power switching network **325**. The power switching network **325** can switch the array of module **100** outputs (**415-1** to **415-N**) to their assigned loads through the array of load connections (**420-1** to **420-K**). Load fault identification and interruption can be provided by the monitoring of current and voltage waveforms by the power switching network protection controller **405**. Should the power switching network protection controller **405** detect fault conditions, it can open some or all power switching network **325** switches **410** connected to the load. In some embodiments, the power switching network protection controller **405** can also record the fault in NVM to aid with either reclosing the switch **410** (i.e., when the fault has been corrected) or permanently disconnecting a switch **410** (e.g., until it is replaced). The power switching network protection controller **405** can also inform the power switching network **325** of the fault. The power switching network **325** can then open all switches connected to the load, thereby providing redundant system protection. In some embodiments, the output of the system **300** can include a final stage of EMI attenuation, if required. Each load can have one or more dedicated AC Output EMI filters that can filter the combined waveforms from all parallel modules **100**. In some

embodiments, the switches **410** can be, for example and not limitation, solid state switches or electromechanical contactors.

In some embodiments, as shown in Fig. **5**, rather than multiple module controllers (e.g., the motor control DSP **105**, protection processor **110**, and logic processor **115**), the modules **100** can be primarily controlled by the motor control DSP **105**. In this configuration, transferring the logic processor **115** functions to the master logic controller **320** can reduce the number of processors required by the module **100**. In some embodiments, this can also eliminate, for example, the power distribution negotiation process between each module's logic processor **115**. In this configuration, the motor control DSP **105** can be configured by the master logic controller **320**. Load sensor signals can be transmitted by the master logic controller **320** to the motor control DSP **105**, as required. In addition, system **300** reference clock synchronization to generate synchronous waveforms can still be provided by the motor control DSP **105**.

In this configuration, the protection processor **110** functions can be integrated into the reference clock synchronization to generate synchronous waveforms. In most cases, processing the relatively small number of additional signals does not add significant burden to the motor control DSP **105**. Should the motor control DSP **105** identify fault conditions, the motor control DSP **105** can disable the module **100** simply by stopping the PWM signal **120**.

In some embodiments, to reduce the bandwidth requirements of the module communications bus **140**, the modules **100** can also comprise a separate data-logging communications bus **505**. In this manner, the relatively high-bandwidth data-logging communications can be handled by the data-logging communications bus **505**, while the controls communications **510**, which are relatively low-bandwidth, high reliability communications, can remain on the module communications bus **140**. In this manner, the motor control DSP **105** can be connected to both communications buses **505**, **510** enabling both types of communications.

In still other embodiments, as shown in Figs. 6A-6C, the system **600** can comprise a more prominent master logic controllers **320** and master data loggers **310**, enabling the elimination of the master communications controller **315**. In this configuration, the master logic controller **320** can connect to every module's logic communications bus to enable configurations to be transmitted to the modules **100**. Power distribution between parallel modules **100** and communication with external aircraft systems **605** (i.e., aircraft systems external the system **600**, not the aircraft) can be controlled by the master logic controller **320**. The master data logger **310** can connect to each module's data-logging communications bus **505** enabling higher frequency data logging. In some embodiments, additional connections can be made to the master protection controller **305** and/or the master logic controller **320** for data storage, while the master protection controller **305** can operate substantially, as discussed above.

In some embodiments, as shown in Fig. 7, the system **700** can comprise load sensor signal processing that has been relocated from the individual modules **100** to the system **300** output. In this configuration, the power switching network protection controller **405** can monitor load signals ensuring no faults occur (e.g., over-temperature or over-speed conditions). The power switching network protection controller **405** can relay sensor data including, but not limited to, load temperature **705** and load position **710**, to the master logic controller **320** for distribution to the modules **100**.

Fig. 8 depicts an alternative module **800** architecture that eliminates reference synchronization issues (i.e., the synchronization of reference clocks between the modules **100**, discussed above). In some embodiments, this can be achieved by relocating the motor controller DSP **105** to the Master Control **302**. As mentioned above, the motor controller DSP **105** computes PWM states and then transmits them (e.g., via switch state messages over fiber optics) to the module **800**. Fiber optics can be used for intermodule communication, for example, to prevent data corruption

on unshielded electrical wires. In this configuration, a fiber optic transceiver **805** can receive the switch state messages.

A decoder **805a** within the fiber optic transceiver **805** can then generate an analog gate drive signal **810** for the gate driver **815**. The fiber optic transceiver **805** can transmit, receive, encode, and decode signals from electrical domain to optical and vice versa. Fiber optics signals can be advantageous because optical signals are immune to the EMI noise generated by the power switching network. Optical media can be useful, therefore, to transmit information over relatively long distances (e.g., between modules **100**).

The decoder **805a** can be a logic circuit such as, for example and not limitation, a field programmable gate array (FPGA), complex programmable logic device (CPLD), application specific integrated circuit (ASIC), or processor. The protection processor **110** can provide basic protection by monitoring the current and voltage sensors **812,817** for the DC input and the AC output, respectively, the temperature of module devices **820**, and inverter shoot-through **825**, among other things. Should a fault occur, the protection processor **110** can disable the inverter **830** and inform the master protection controller **305** of the fault. In some embodiments, the protection processor **110** can communicate with the master protection controller **305** via the fiber optic transceiver **805**. In other embodiments, the protection processor **110** can communicate with the master protection controller **305** via the module communications bus **140**. In some embodiments, switch state messages and protection messages can be transmitted at different frequencies to enable concurrent communication.

In yet other embodiments, as shown in Figs. **9A-9C**, the motor controller DSPs **105** can be relocated from the module **100** to the master controller **302**. By consolidating motor controller DSPs **105**, clock synchronization is less difficult due to the close proximity of the devices (i.e., most of the time delay element is removed from the synchronization). In some embodiments, the motor controller DSPs **105** can be placed on a modular accessory board to facilitate repairs of the system **900**.

The number of motor controller DSPs **105** can be equal to the maximum number of simultaneous loads, K , to be controlled by the system **900**. In this configuration, each motor controller DSP **105** can calculate the PWM state then transmit a switch state message to the modules **100**, with parallel modules **100** receiving switch state
5 messages from the same motor controller DSPs **105**. In some embodiments, a PWM router **905** can be used to route the switch state messages to parallel modules **100**. Sensor signals such as, for example, load currents and voltages, can be routed to the respective motor controller DSPs **105** by a load sensors router **910**.

In some embodiments, the master logic controller **320** can communicate
10 directly with each motor controller DSPs **105** to configure the necessary control variables (e.g., pulse width and magnitude). In some embodiments, as above, fiber optic transceivers **805** may be used to communicate with the modules **100**. Multiple wavelengths/frequencies may also be used to enable the concurrent transmission and/or reception of switch state messages and module fault messages.

15 The architecture discussed above may provide high reliability because each module's **100** controllers operate nearly independently. In most cases, interaction with other controllers is limited to the allocation of power distribution between the logic processors **115** of various modules **100** and the distribution of load and power by the master logic controller **320**. In this configuration, for example, a module **100**
20 failure will not affect the operation of other modules **100**. In addition, communication is simplified as the module communications bus **140** provides and interface between the various module processors (e.g. the DSP **105**, the protection processor **110**, and the logic processor **115**) and the master controllers. However this architecture can be somewhat less cost effective and more difficult to implement. Utilization of a
25 dedicated logic controller for minimal tasks, for example, may result in unused processing power increasing module costs. Integration of logic controller functions into other controllers such as the master logic controller **320**, on the other hand, would decrease costs and module complexity. Implementation of synchronized reference clocks may add complexity and cost to the module.

The overall system architecture, including the subsystems discussed in Figs. 1-9C, is shown in Figs. 10 and 11, the system 1000 can control a system of parallel modular inverters 1015 to drive multiple and/or different types of AC or DC machines 1010. The system 1000 can comprise a plurality of parallel modular inverters 1015 connected in parallel, each of which is able to be configured to receive any of a plurality control algorithms 1022a, 1022b, 1022c embedded in a control system 1020 via a reconfigurable control switching network 1025. Each of the parallel modular inverters 1015 can be configured to drive one or more of the plurality of AC machines 1010 on the load side via a reconfigurable power switching network 1030.

This configuration enables, for example, the ability to dynamically reconfigure both the control switching network 1025 and power switching network 1030. In addition, any of the inverters from the plurality inverters 1015 in parallel is accessible to drive any motor of the plurality motors 1010 (or other electrical loads) on the load side and any control algorithm of a plurality control algorithms 1022 embedded in the system 1000 is accessible to control any of the plurality inverters 1015. As a result, one or more inverters 1015 can drive one motor 1010, as necessary to meet load requirements, and/or a plurality of motors 1010 on the load side can be driven at the same time, each of which can be driven with one or more inverters 1015. In addition, a plurality of motors 1010 on the load side can be driven at the same time with the same control algorithm (e.g., 1020a) or a different control algorithm (e.g., 1020b).

As shown in Fig. 10, the system can comprise a system controller 1035 configured to communicate with a vehicle controller 1040 to, for example, obtain operation commands from the vehicle controller 1040 and provide system 1000 status signals to the vehicle controller 1040, among other things. In some embodiments, the system controller 1035 can also reconfigure the power switching network 1030 to provide an appropriate number of inverter modules 1015 in parallel to drive a motor 1010 in real time. In other words, when the load from a motor 1010 is increased, the system controller 1035 can signal the power switching network

1030 to place more inverter modules **1015** in parallel. Conversely, of course, when motor load is decreased, the system controller **1035** can signal the power switching network **1030** to disengage one or more inverter modules **1015**. If necessary, the system controller **1035** can then place them in parallel with other inverter modules
5 **1015** to drive other loads **1010**.

In some embodiments, the system controller **1035** can also reconfigure the control switching network **1025** to provide appropriate motor control algorithms **1022** to one or more of inverter modules **1015** driving one or more motor types. The system controller **1035** can provide algorithms related to, for example and not
10 limitation, field oriented control (FOC), direct torque control (DTC), voltage over frequency Control (V/F). This can be useful, for example, to efficiently drive specific motor types (e.g., induction motors, synchronous motors, permanent magnet synchronous motors, brushless DC motors, etc.).

In some embodiments, the system controller **1035** can also send, for example
15 and not limitation, motor speed, torque, or power reference values to corresponding motors **1010** (or motor controllers). In some embodiments, the system controller **1035** can be stored and run on an embedded controller. The system controller **1035** can comprise, for example and not limitation a microcontroller processor, FPGA, or ASIC. In some embodiments, the system controller **1035** can use a real time
20 simulator/emulator or can be run in real-time.

In some embodiments, the number of motor controller algorithms **1022** can be determined by the number of different motor loads. If the system **1000** has three different types of motors **1010** to drive, for example, then three motor controller algorithms **1022** can be developed, with each motor control algorithm **1022** specific
25 to the motor load. Of course, if all three motors **1010** perform the same function with the same motor, it is possible that all three loads can be powered using the same algorithm **1022**.

The control switching network **1025** can dynamically configure one or more inverters **1015** each of which can be driven by a specific control algorithm **1022**, or a common control algorithm **1022**, which is routed through control switching network **1025** per commands from the system controller **1035**. In some embodiments, time
5 delay between signals into and out of control switching network **1025** can be minimized to improve motor drive performance.

The control switching network **1025** can be, for example, in a software or hardware implementation. In some embodiments, a software coded control switching network **1025** can be run on, for example and not limitation, an embedded
10 controller, real-time simulator, or computer. In other embodiments, the control switching network **1025** can be implemented using a hardware device such as, for example and not limitation, CPLDs, ASICs, or FPGAs.

In some embodiments, the power switching network **1030** can dynamically configure one or more inverters to drive one or more motors per one or more specific
15 control algorithms from the system controller **1035**. In some embodiments, the power switching network **1030** can act as a short circuit and/or over current protection device. In this case, the power switches **1030a** associated with the short-circuit or over-current load open when a fault is detected.

The power switching network **1030** can be implemented using, for example
20 and not limitation, solid state relays, mechanical relays, transistors, and other controllable power switches. Of course, the inverters **1015** convert DC power to the requested AC power (e.g., at different voltage levels, frequencies, waveforms, etc.) to drive various AC machines (e.g., AC motors **1010**) per the motor algorithm **1022** and system controller **1035**. The inverters can comprise, for example and not
25 limitation, insulated-gate bipolar transistors (IGBTs), metal-oxide-semiconductor field-effect transistors (MOSFETs), and bipolar junction transistors (BJTs).

In still other embodiments, the system **1000** can assign loads based on a load priority factor. In other words, if, for example, the number of loads requested by

external aircraft systems **1040** (i.e., external to the system **1000**) is larger than can be provided by the module **100**, the system **1000** can assign loads by a load priority factor, with higher priority loads being powered before lower priority loads. If the aircraft **1040** makes a request for a large load, such as to lower the landing gear, for example, the system **1000** can temporarily reassign some or all of the modules **1015** to power the landing gear motors. When the landing gear is down and locked, in turn, the system **1000** can reassign the modules **1015** to their previous loads (or to now existing loads). So, for example, the cabin fan can be temporarily deactivated in favor of the landing gear and then restarted when the gear is down.

In some embodiments, such as when there are an excess of low priority loads that collectively exceed the power rating of the system **1000**, the system **1000** may power some or all of the loads at a reduced setting. In this manner, all loads are powered, but may operate at a lower speed or capacity. So, for example, the aircraft cabin fans, lighting, and entertainment system may request power at the same time in excess of the system **1000** rating. As a result, the system **1000** can, for example, provide full power to the entertainment system, but slightly reduce cabin fan speeds and lighting intensity to reduce overall power demand.

As shown in Fig. **12**, embodiments of the present disclosure can also comprise a method **1200** for distributing power. In some embodiments, the method **1200** can comprise receiving **1205** a load request from the vehicle (e.g., load requests from the vehicle controller **1040**). The controller can then determine **1210** if the load requested is above or below the power rating for a single module. If the load request is below the rating for a single module, the controller can assign **1220a** the load to a single module. If, on the other hand, the load is greater than a single module can power, the controller can parallel **1215** the number of modules ("X") together that are required to power the load and then assign **1220b** the load to the X modules. The controller can then activate **1225** the modules providing the necessary load.

When the vehicle no longer needs the power supply (e.g., the landing gear is down), the vehicle can request **1230** that the load be disconnected and the controller can disconnect **1235** the module, or modules. In some embodiments, the system can also continuously or periodically check **1240** for current system requirements and reassign modules as required.

--- Example 1 ---

In one example, each module **100** can have a **10A** rating. With ten modules **100** in a converter **300**, therefore, the converter can provide **100A**. If the aircraft requests a **25A** load to power the hydraulic motors for the landing gear, for example, the system **300** can determine that the load requires at least three modules **100**, place three modules **100** in parallel, and then assign and activate three modules **100** to the load. If, during the operation of the landing gear, for example, the power requirements change – e.g., the power required to start the motors is greater than the continuous power to run the motors – the system **300** can remove (or add) modules **100** as the load changes.

Similarly, as shown in Fig. **13**, embodiments of the present disclosure can also comprise a method **1300** for distributing power for multiple loads. In some embodiments, the method **1300** can comprise receiving **1305** at least two load requests from the vehicle. The controller can then determine **1310** if the load requests are above or below the power rating for a single module. If the load requests are below the rating for a single module, the controller can assign **1320b** each load to a single module. If, on the other hand, either (or both) load is greater than a single module can power, the controller can parallel **1315a**, **1315c** two or more modules together and then assign **1320a**, **1320c** the loads to the parallel modules, as required. The system can then activate **1325** the modules. In some embodiments, the system can also continuously or periodically check **1340** for current system requirements and reassign **1320** modules as required. When the vehicle no longer needs the power supply for one or both loads, the vehicle can

request **1330** that the load be disconnected and the controller can disconnect **1335** the module, or modules for that load.

--- Example 2 ---

In another example, as above, each module **100** can again have a **10A** rating
5 and ten modules **100** in a converter **300** for a total of **100A** capacity. If the aircraft
requests a first, **15A**, load to power the hydraulic motors for the landing gear, for
example, and a second, **7.5A**, load to turn the cabin fan on low, the system **300** can
determine that the load requires at least three modules **100**. The system **300** can
place a first module **100** and a second module **100** in parallel. The system **300** can
10 then assign the first load to the first module **100** and the second module **100** and the
second load to a third module **100**.

The system **300** can again continuously or intermittently check to see if the
vehicle power requirements have changed **1340**. If, during the operation of the
landing gear, for example, the power requirements change – e.g., the power
15 required to start the motors is greater than the continuous power to run the motors –
and/or the vehicle requests that the cabin fan be placed on high, the system **300** can
decouple **1315c** the first and second modules, pair the second and third modules
and assign **1320c** the first load (the landing gear) to the first module **100** and the
second load (the cabin fan) to the second and third modules **100** as the load
20 changes.

While several possible embodiments are disclosed above, embodiments of
the present disclosure are not so limited. For instance, while several possible
configurations have been disclosed for the parallel module converter components,
other suitable configurations and components could be selected without departing
25 from the disclosure. In addition, the location and configuration used for various
features of embodiments of the present disclosure such as, for example, the number
of modules, the types of electronics used, etc. can be varied according to a
particular aircraft or application that requires a slight variation due to, for example,

the size or construction of the aircraft, or weight or power constraints. Such changes are intended to be embraced within the scope of this disclosure.

5 The specific configurations, choice of materials, and the size and shape of various elements can be varied according to particular design specifications or constraints requiring a device, system, or method constructed according to the principles of this disclosure. Such changes are intended to be embraced within the scope of this disclosure. The presently disclosed embodiments, therefore, are considered in all respects to be illustrative and not restrictive. The scope of the disclosure is indicated by the appended claims, rather than the foregoing
10 description, and all changes that come within the meaning and range of equivalents thereof are intended to be embraced therein.

EMBODIMENTS IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A first parallel modular converter module comprising:

5

an inverter configured to produce an alternating current (AC) output signal;

a motor control digital signal processor (DSP) configured to:

10

receive a first control message via a module communications bus, wherein the first control message includes a control algorithm that is selected, from a plurality of predefined control algorithms, by a master controller according to a type of a first load assigned to the inverter, and wherein the master controller is configured to generate a command for a control signal network that routes the first control message to at least the first parallel modular converter module; and

15

generate a pulse width modulation (PWM) signal based at least in part on the first control message; and

20

a gate driver configured to activate the inverter to produce the AC output signal based on the PWM signal;

25

wherein the master controller is further configured to:

receive control messages from a master logic controller, wherein the control messages include the first control message and a

second control message routed to a second parallel modular converter module; and

duplicate and transmit the control messages using a data logging communications bus distinct from the module communications bus.

2. The module of claim 1, further comprising an AC electromagnetic interference (EMI) filter to remove noise from the AC output signal.

3. The module of claim 1 or 2 further comprising:

a protection processor distinct from the motor control DSP, the protection processor configured to:

monitor one or more first parallel modular converter module inputs and one or more first parallel modular converter module outputs; and

deactivate the first parallel modular converter module when a fault is detected.

4. The module of claim 3, wherein the protection processor is in communication with the gate driver to deactivate the first parallel modular converter module when a fault is detected.

5. The module of claim 3 or 4, wherein the protection processor comprises one or more temperature sensors monitoring one or more of a gate driver temperature, an inverter temperature, and an AC output temperature,

wherein a fault is detected if one or more of the gate driver temperature, the inverter temperature, and the AC output temperature is above a predetermined temperature.

- 5 **6.** The module of claim **3** or **4**, wherein the protection processor comprises one or more shoot-through sensors to detect shoot-through current on the one or more first parallel modular converter module outputs,

10 wherein a fault is detected if the shoot-through current on at least one of the one or more first parallel modular converter module outputs is above a predetermined current.

- 15 **7.** The module of any one of claims **3** to **6**, wherein the protection processor is configured to deactivate the first parallel modular converter module when a fault is detected by being configured to:

20 transmit, upon detecting the fault, an instruction signal to a master protection controller using the module communications bus, wherein the instruction signal configures the master protection controller to externally deactivate the first parallel modular converter module.

- 25 **8.** The module of any one of claims **1** to **7**, wherein a first reference clock of the first parallel modular converter module is synchronized with a second reference clock of the motor control DSP, and wherein the AC output signal is synchronous with a second AC output signal produced by the second parallel modular converter module.

- 30 **9.** The module of any one of claims **1** to **8**, wherein the module communications bus is further configured to:

communicate between the first parallel modular converter module and the second parallel modular converter module.

10. A method for providing power, the method comprising:

5

receiving a request for the first load from an external aircraft system at the master controller; and

10

connecting the first parallel modular converter module of any one of claims 1 to 9 to the first load with a first switch of a power switching network.

11. A method comprising:

15

assigning at least a parallel modular converter module to power a first load specified by a first load request;

20

selecting, according to a type of the first load, a first control algorithm from a plurality of predefined control algorithms to be applied to the parallel modular converter module;

receiving, at a master controller, control messages from a master logic controller;

25

generating a command for a control switching network to route a first control message of the control messages to the parallel modular converter module;

30

routing the control messages to respective destinations using a module communications bus, wherein the first control message that includes the

first control algorithm is routed to a motor control digital signal processor (DSP) of the parallel modular converter module, and wherein a second control message of the control messages is routed to at least one other parallel modular converter module;

5

generating, using the motor control DSP, a pulse width modulation (PWM) signal based at least in part on the first control message;

10

generating, based on the PWM signal and using a gate driver coupled with the motor control DSP, an alternating current (AC) output signal with an inverter of the parallel modular converter module; and

duplicating and transmitting the control messages using a data logging communications bus distinct from the module communications bus.

15

12. The method of claim **11**, further comprising removing noise from the AC output signal using an AC electromagnetic interference (EMI) filter coupled with the inverter.

20

13. The method of claim **11** or **12**, further comprising:

monitoring, using a protection processor of the parallel modular converter module distinct from the motor control DSP, at least one input and at least one output of the parallel modular converter module; and

25

deactivating the parallel modular converter module upon detecting a fault based on the at least one input or the at least one output.

14. The method of claim **13**, further comprising:

30

generating a control signal indicating a first PWM frequency and a first PWM duration;

5 comparing an actual frequency and actual duration of the PWM signal with the first PWM frequency and the first PWM duration indicated by the control signal; and

10 deactivating the gate driver upon determining that the actual frequency does not match the first PWM frequency, or upon determining that the actual duration does not match the first PWM duration.

15. The method of claim 13 or 14,

15 wherein monitoring the at least one input and the at least one output comprises monitoring, using one or more temperature sensors coupled with the protection processor, one or more of a gate driver temperature, an inverter temperature, and an AC output temperature, and

20 wherein detecting a fault based on the at least one input or the at least one output comprises determining at least one of the gate driver temperature, the inverter temperature and the AC output temperature exceeds a predetermined temperature value.

16. The method of claim 13 or 14,

25 wherein the protection processor is coupled with one or more shoot-through sensors operable to detect a shoot-through current on the at least one output,

wherein detecting a fault based on the at least one input or the at least one output comprises determining the shoot-through current on the at least one output exceeds a predetermined current value.

- 5 **17.** The method of any one of claims **13** to **16**, wherein deactivating the parallel modular converter module comprises:

10 transmitting, upon detecting the fault, an instruction signal from the protection processor to a master protection controller using the module communications bus,

wherein the instruction signal configures the master protection controller to externally deactivate the parallel modular converter module.

- 15 **18.** The method of any one of claims **11** to **17**, further comprising synchronizing a first reference clock of the parallel modular converter module with a second reference clock of the motor control DSP.

- 20 **19.** The method of claim **18**, further comprising:

25 synchronizing, using the module communications bus, the synchronized first reference clock and the second reference clock with a third reference clock of the at least one other parallel modular converter module,

wherein the AC output signal is synchronous with a second AC output signal produced by the at least one other parallel modular converter module.

20. A system comprising:

a plurality of parallel modular converter modules comprising a first parallel modular converter module and a second parallel modular converter module,

wherein the first parallel modular converter module comprises:

a module communications bus communicatively coupling a master controller and the first parallel modular converter module;

wherein the master controller is configured to:

assign at least the first parallel modular converter module to power a first load specified by a first load request;

select, according to a type of the first load, a first control algorithm from a plurality of predefined control algorithms to be applied to the first parallel modular converter module;

generate a command for a control signal network that routes the first control algorithm to at least the first parallel modular converter module;

route control messages to respective destinations using the module communications bus, wherein a first control message of the control messages that includes the first control algorithm is routed to the first parallel modular converter module, and wherein a second control message

of the control messages is routed to the second parallel modular converter module; and

5 duplicate and transmit the control messages using a data logging communications bus distinct from the module communications bus,

10 a motor control digital signal processor (DSP) operable to generate a pulse width modulation (PWM) signal based at least in part on the first control message; and

a gate driver operable to generate, based on the PWM signal, an alternating current (AC) output signal with an inverter of the first parallel modular converter module.

15

21. The system of claim **20**, wherein the first parallel modular converter module further comprises a protection processor distinct from the motor control DSP, the protection processor coupled with the module communications bus and operable to:

20

monitor at least one input and at least one output of the first parallel modular converter module; and

25

deactivate the first parallel modular converter module upon detecting a fault based on the at least one input or the at least one output.

22. The system of claim **21**, further comprising:

a master protection controller coupled with the module communications bus and operable to externally deactivate selected ones of the plurality of parallel modular converter modules,

5 wherein the protection processor is operable to deactivate the first parallel modular converter module by transmitting, upon detecting the fault, an instruction signal to the master protection controller using the module communications bus, and

10 wherein the instruction signal configures the master protection controller to externally deactivate the first parallel modular converter module.

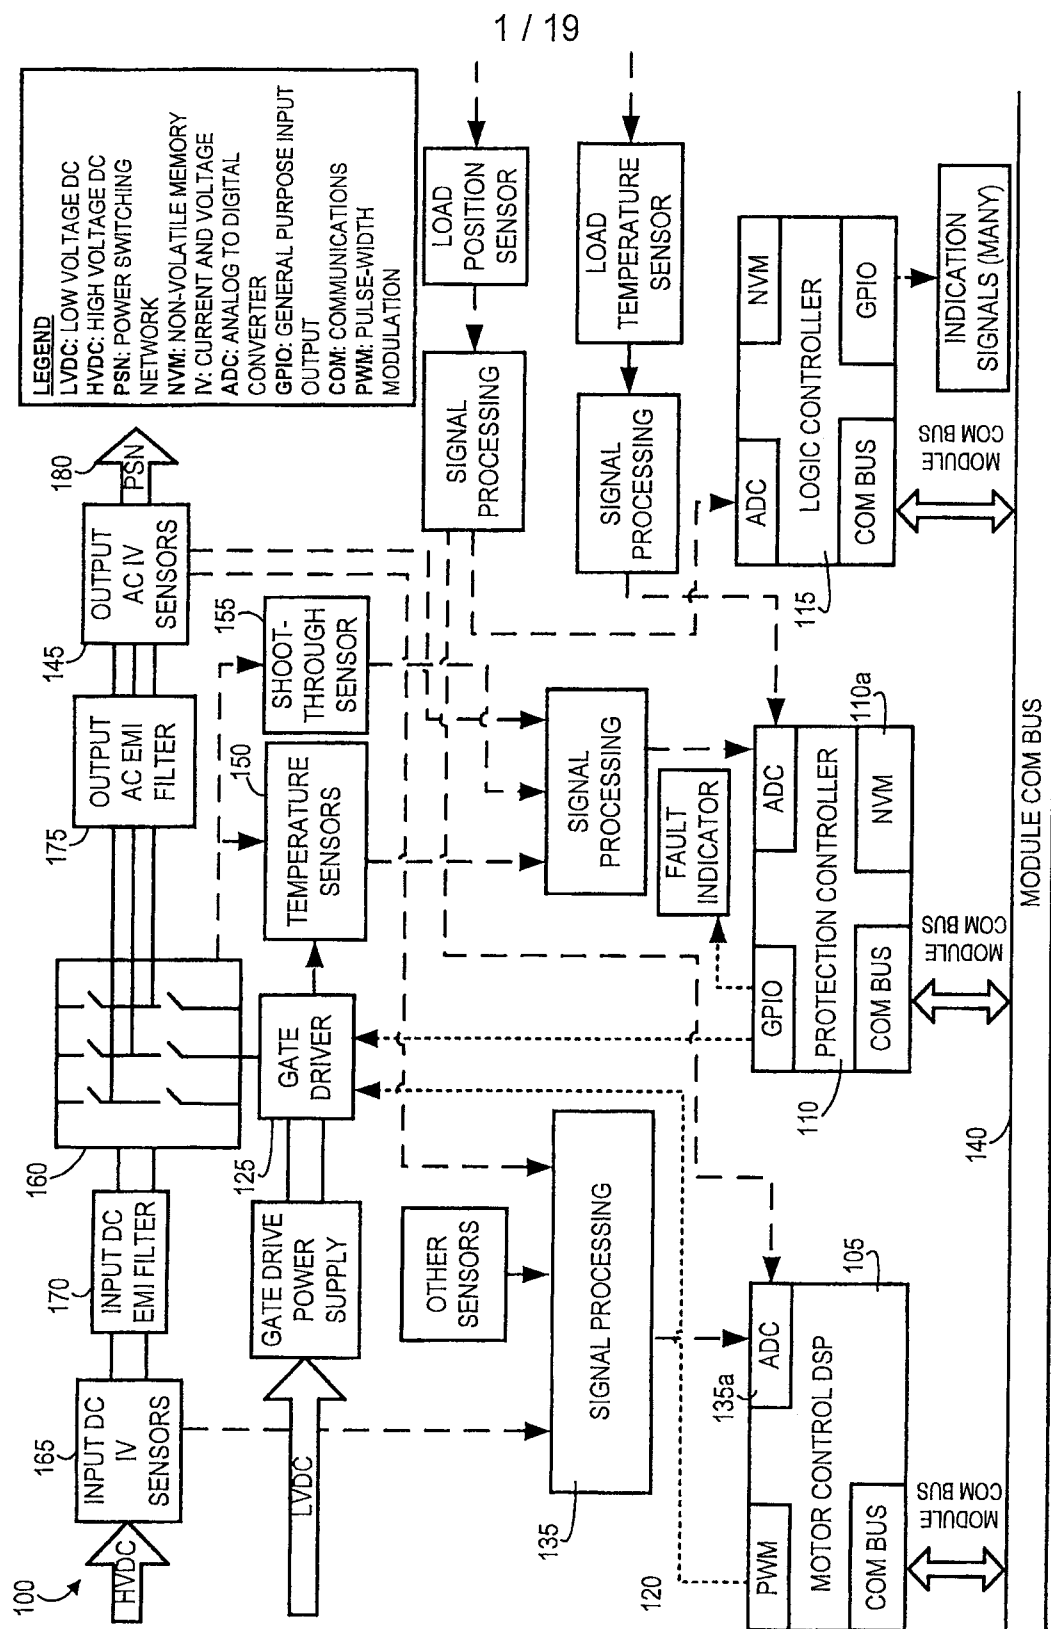


FIG. 1

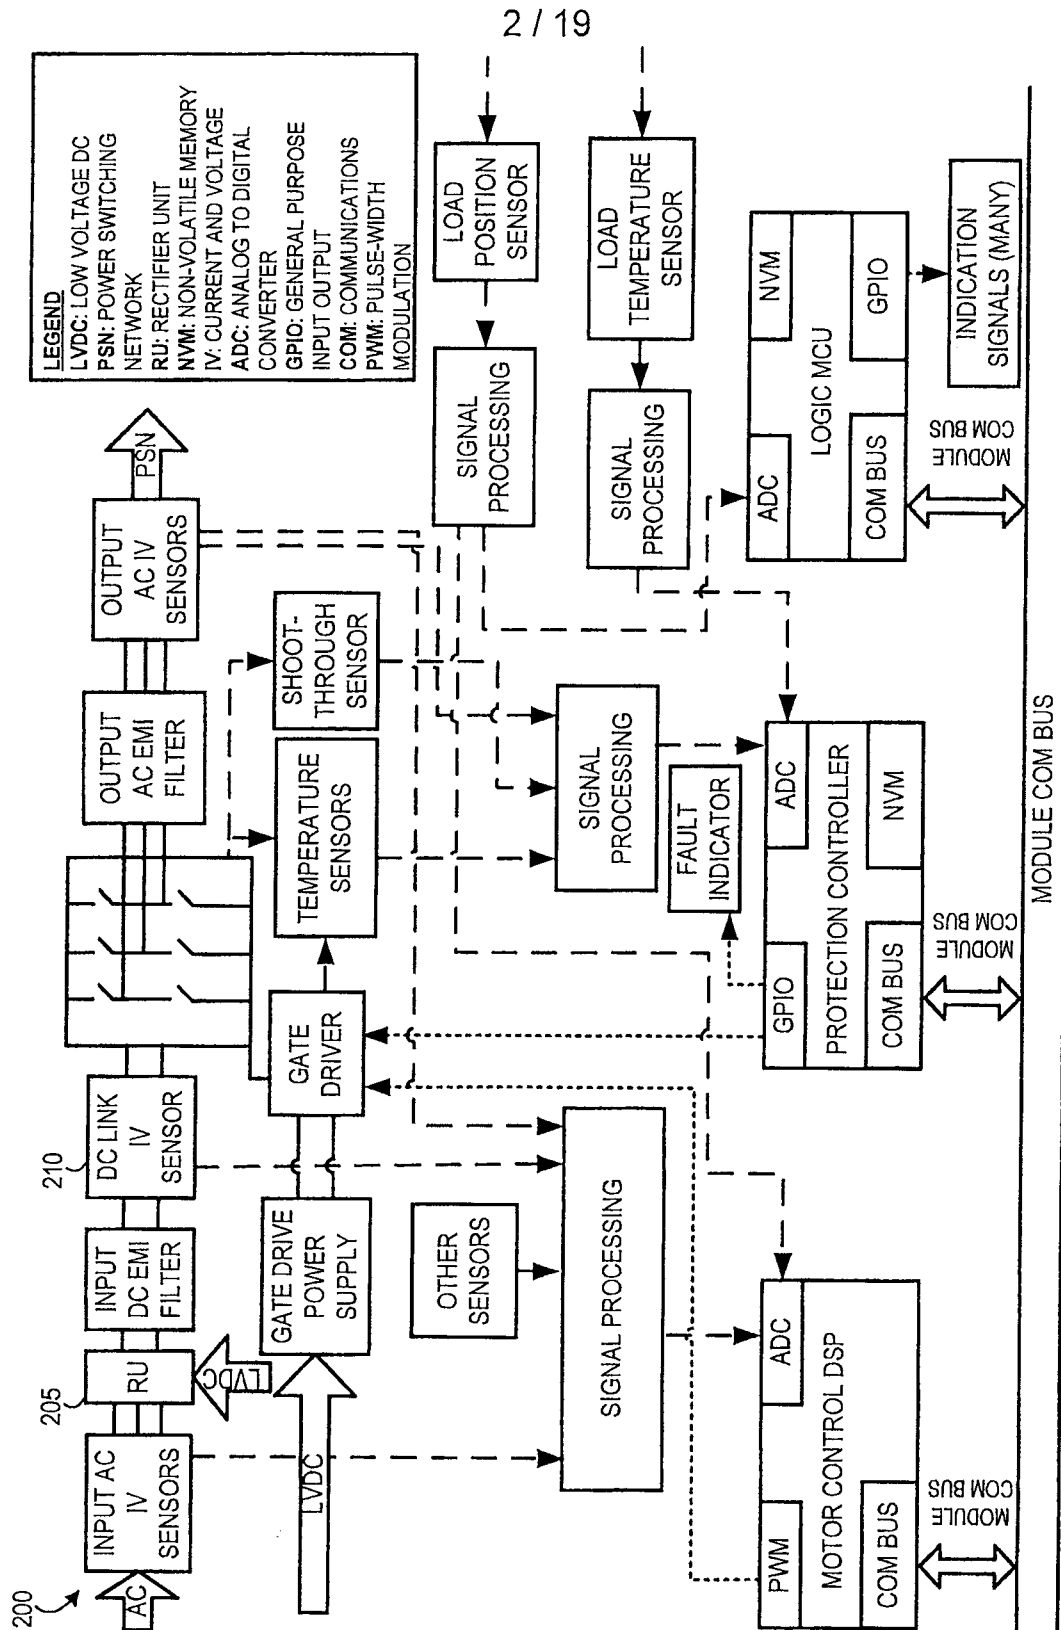


FIG. 2

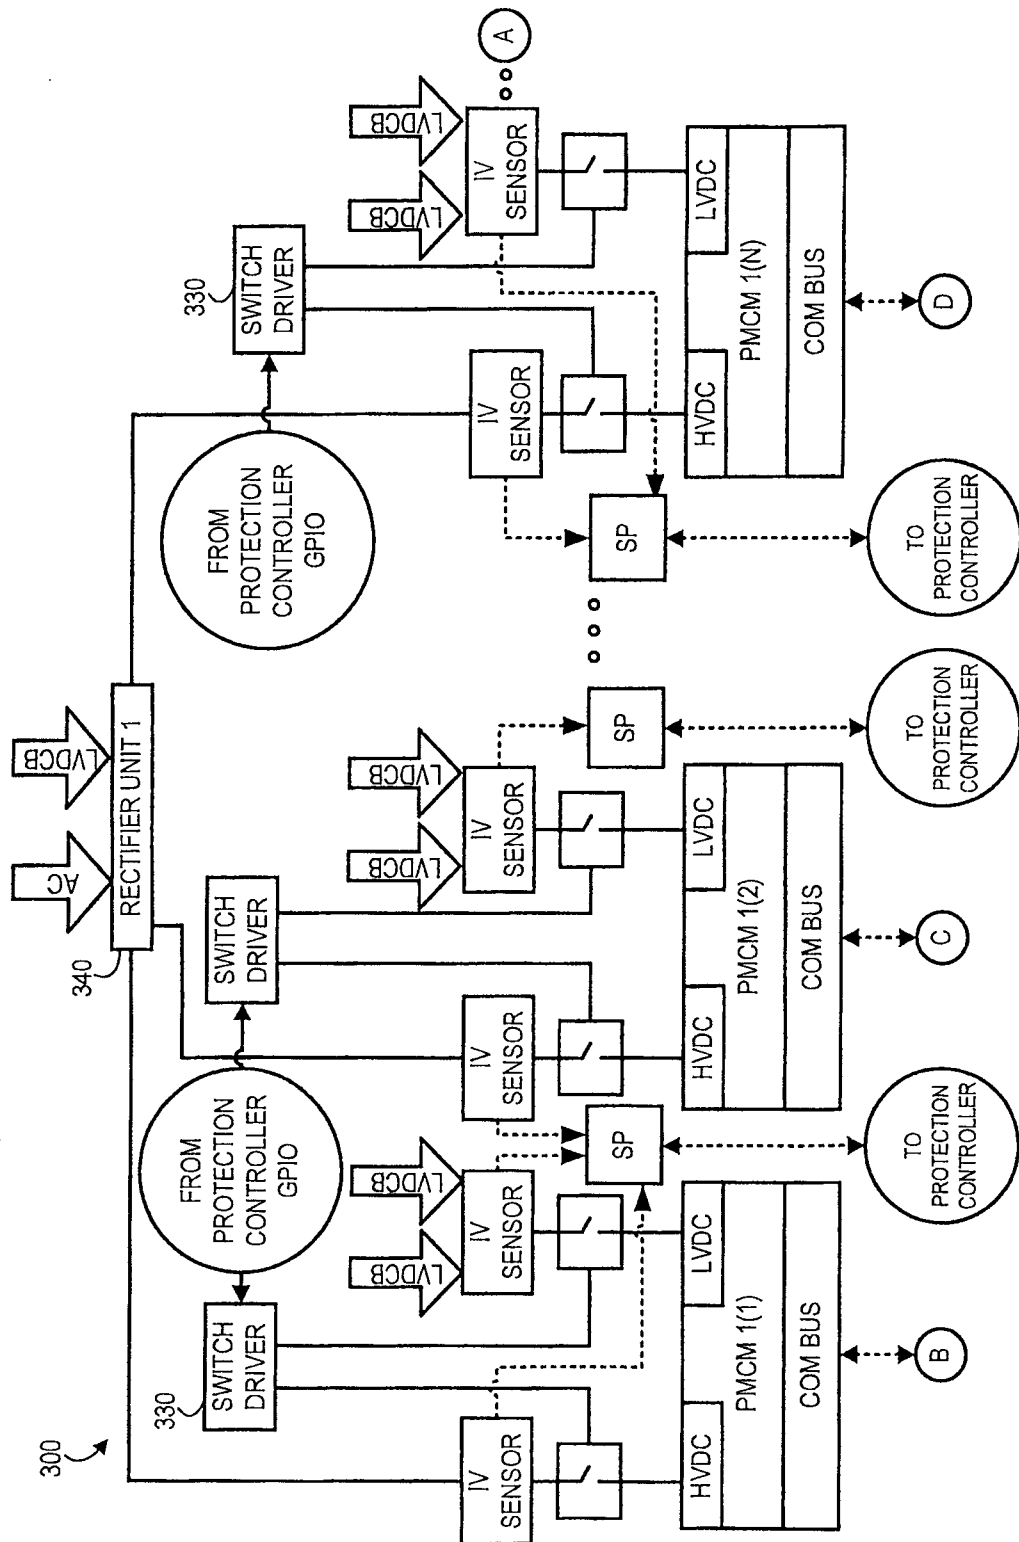


FIG. 3A

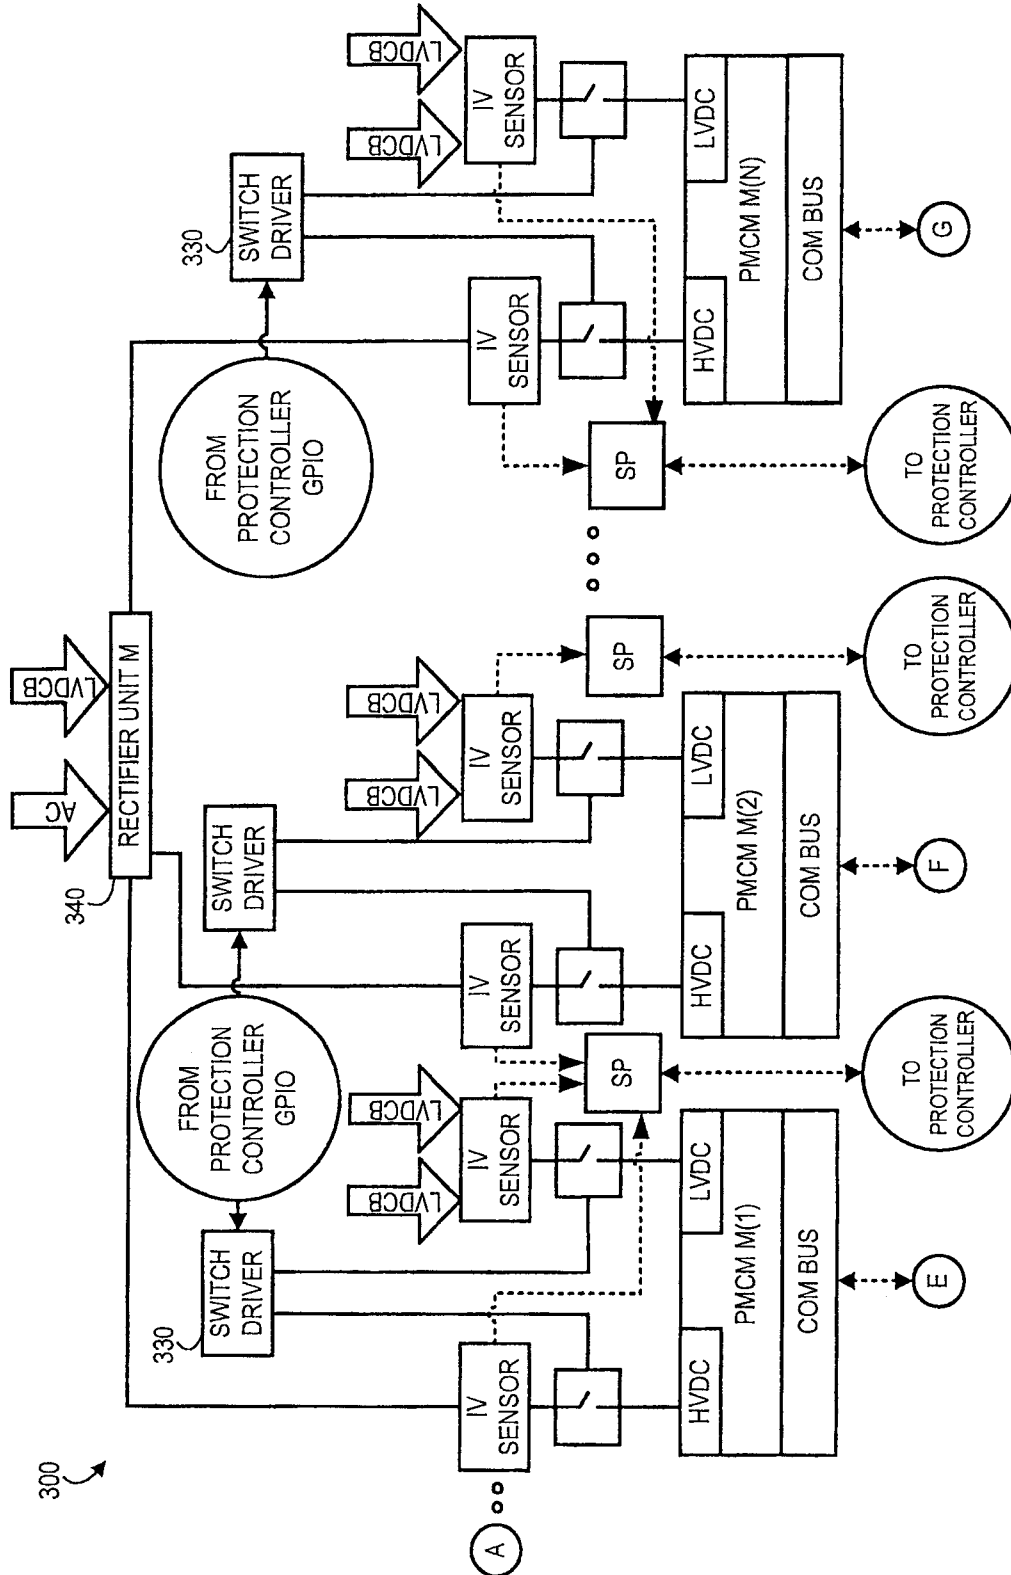


FIG. 3B

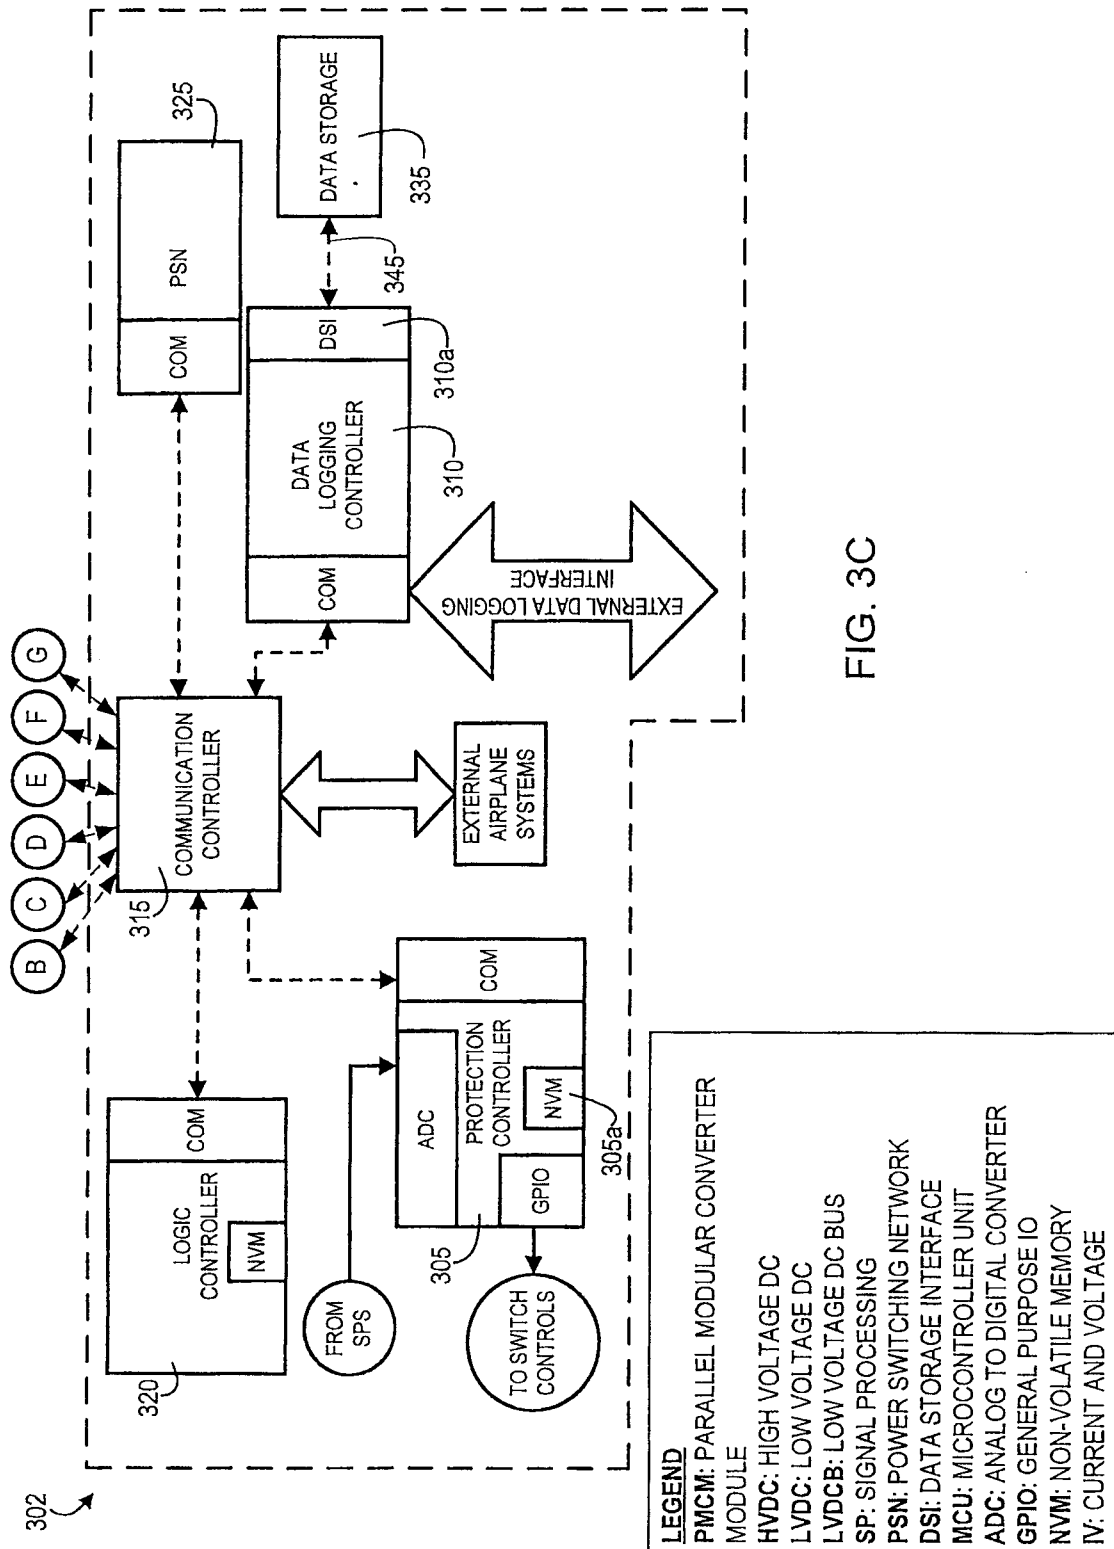


FIG. 3C

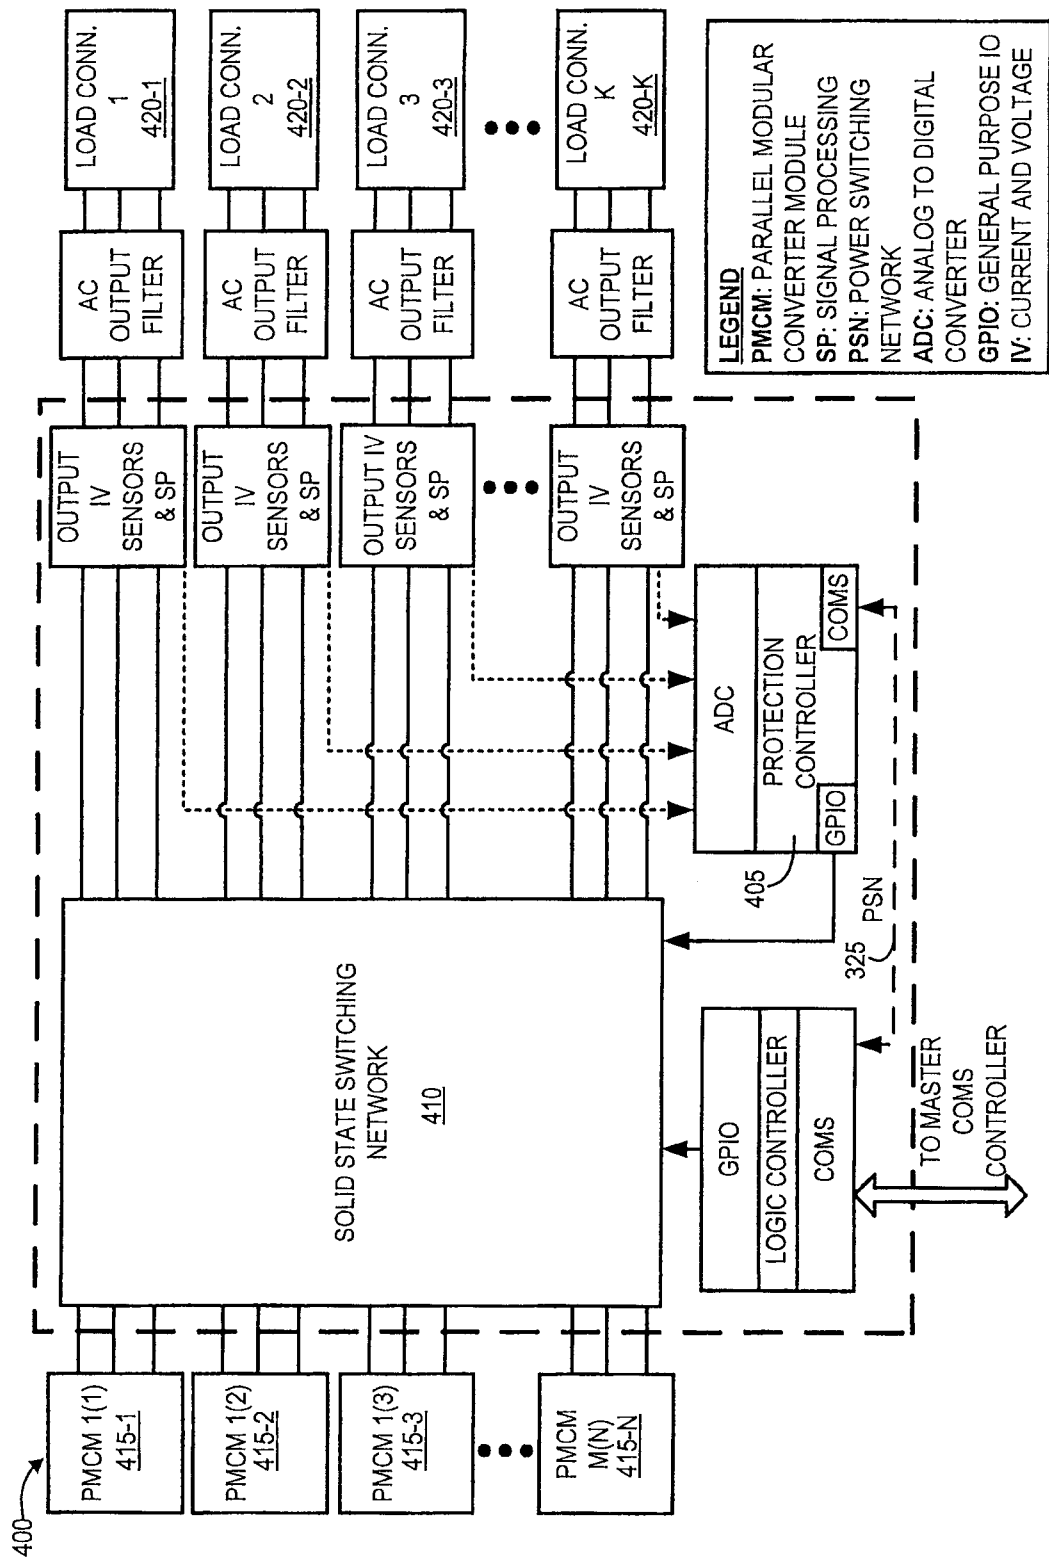


FIG. 4

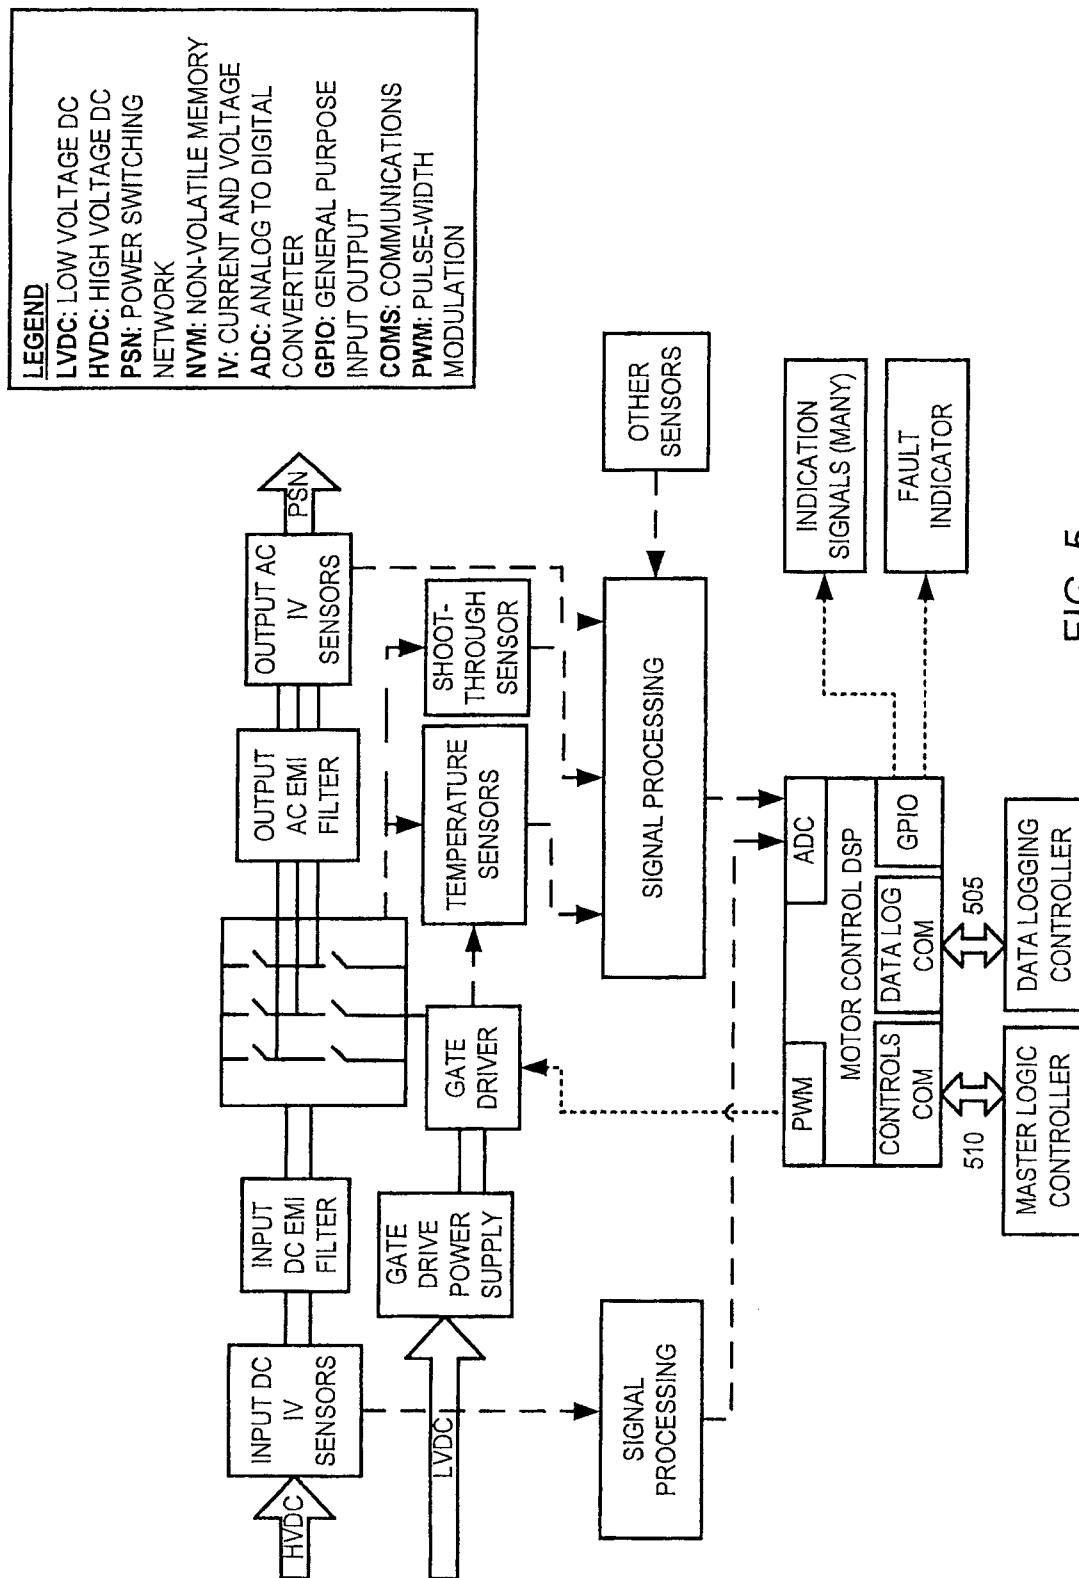


FIG. 5

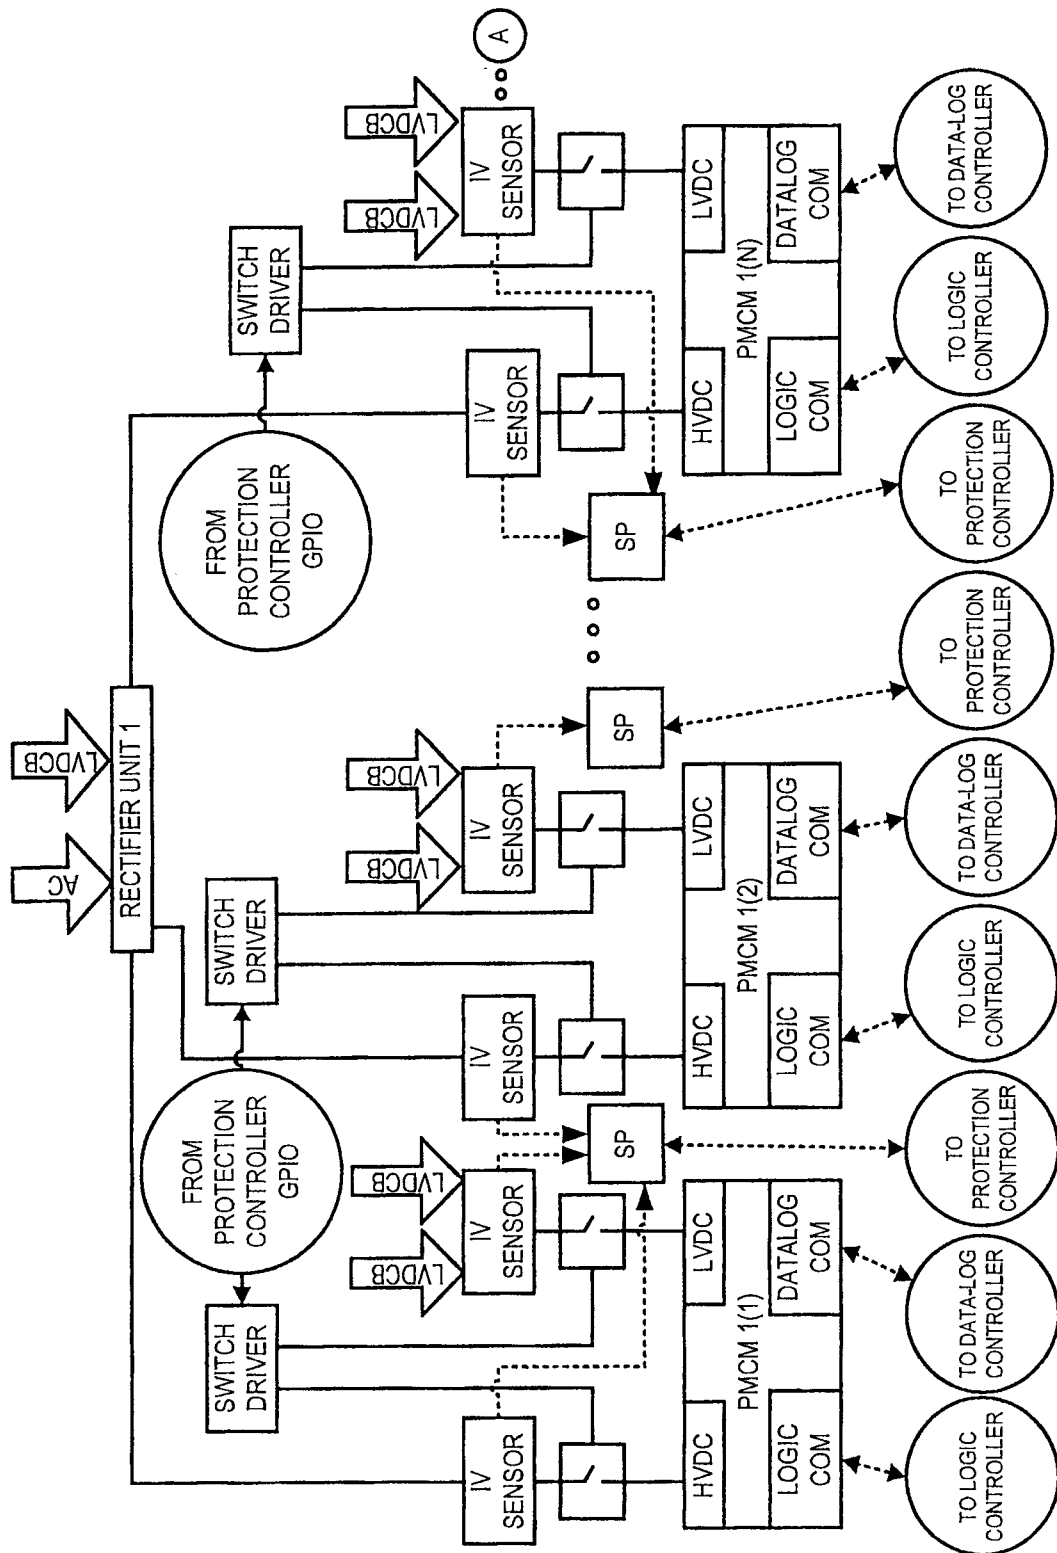


FIG. 6A

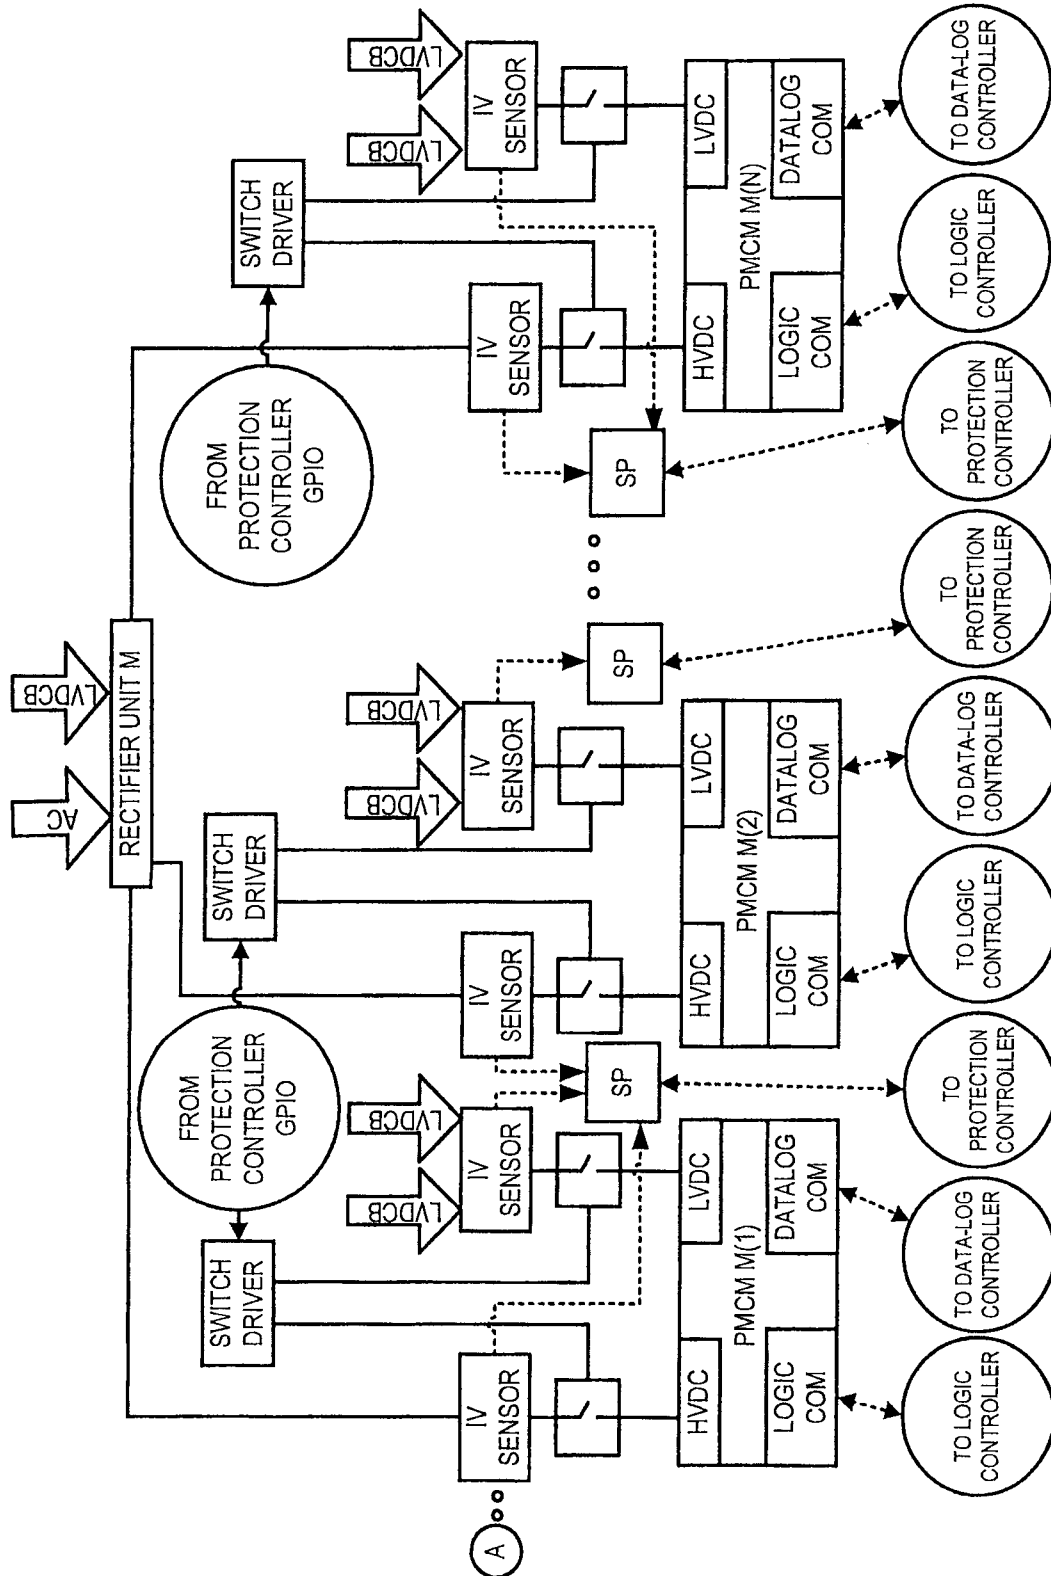


FIG. 6B

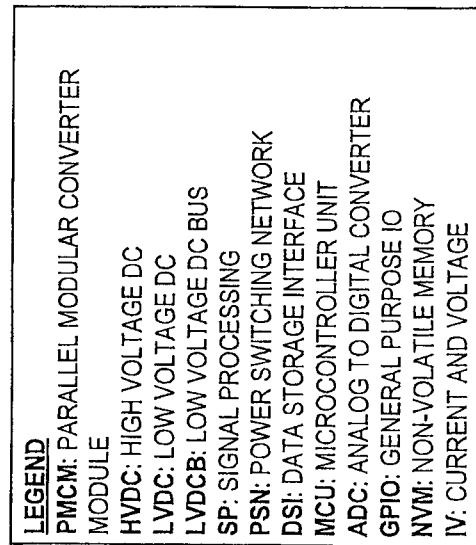
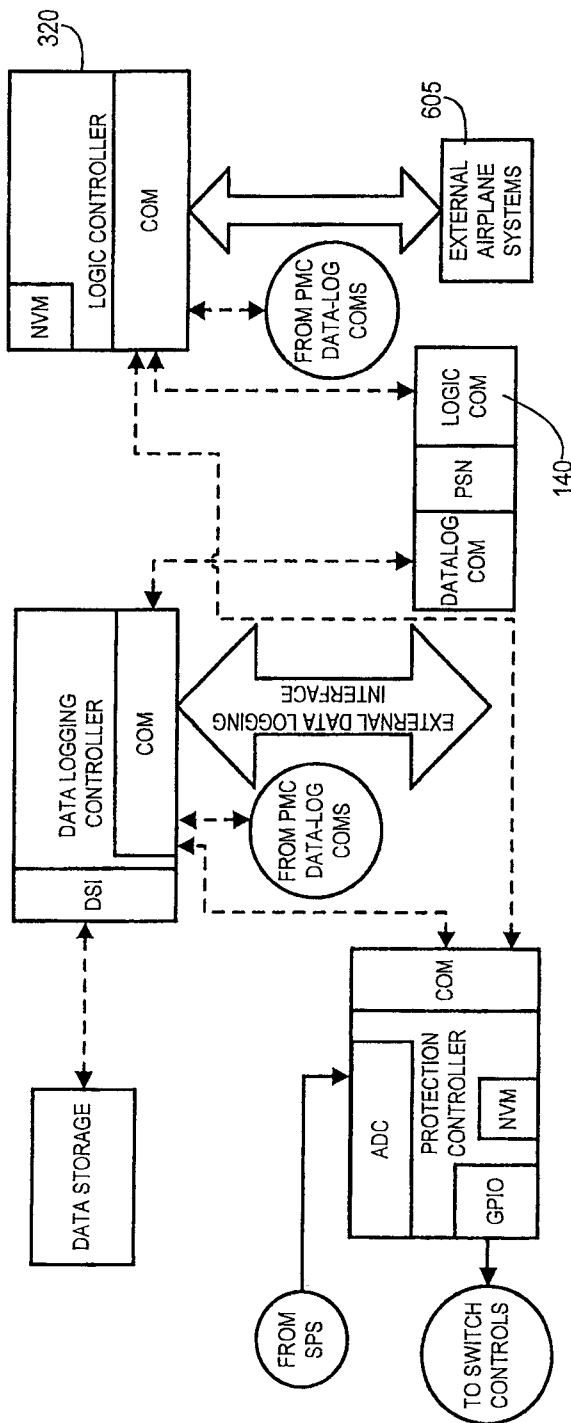


FIG. 6C

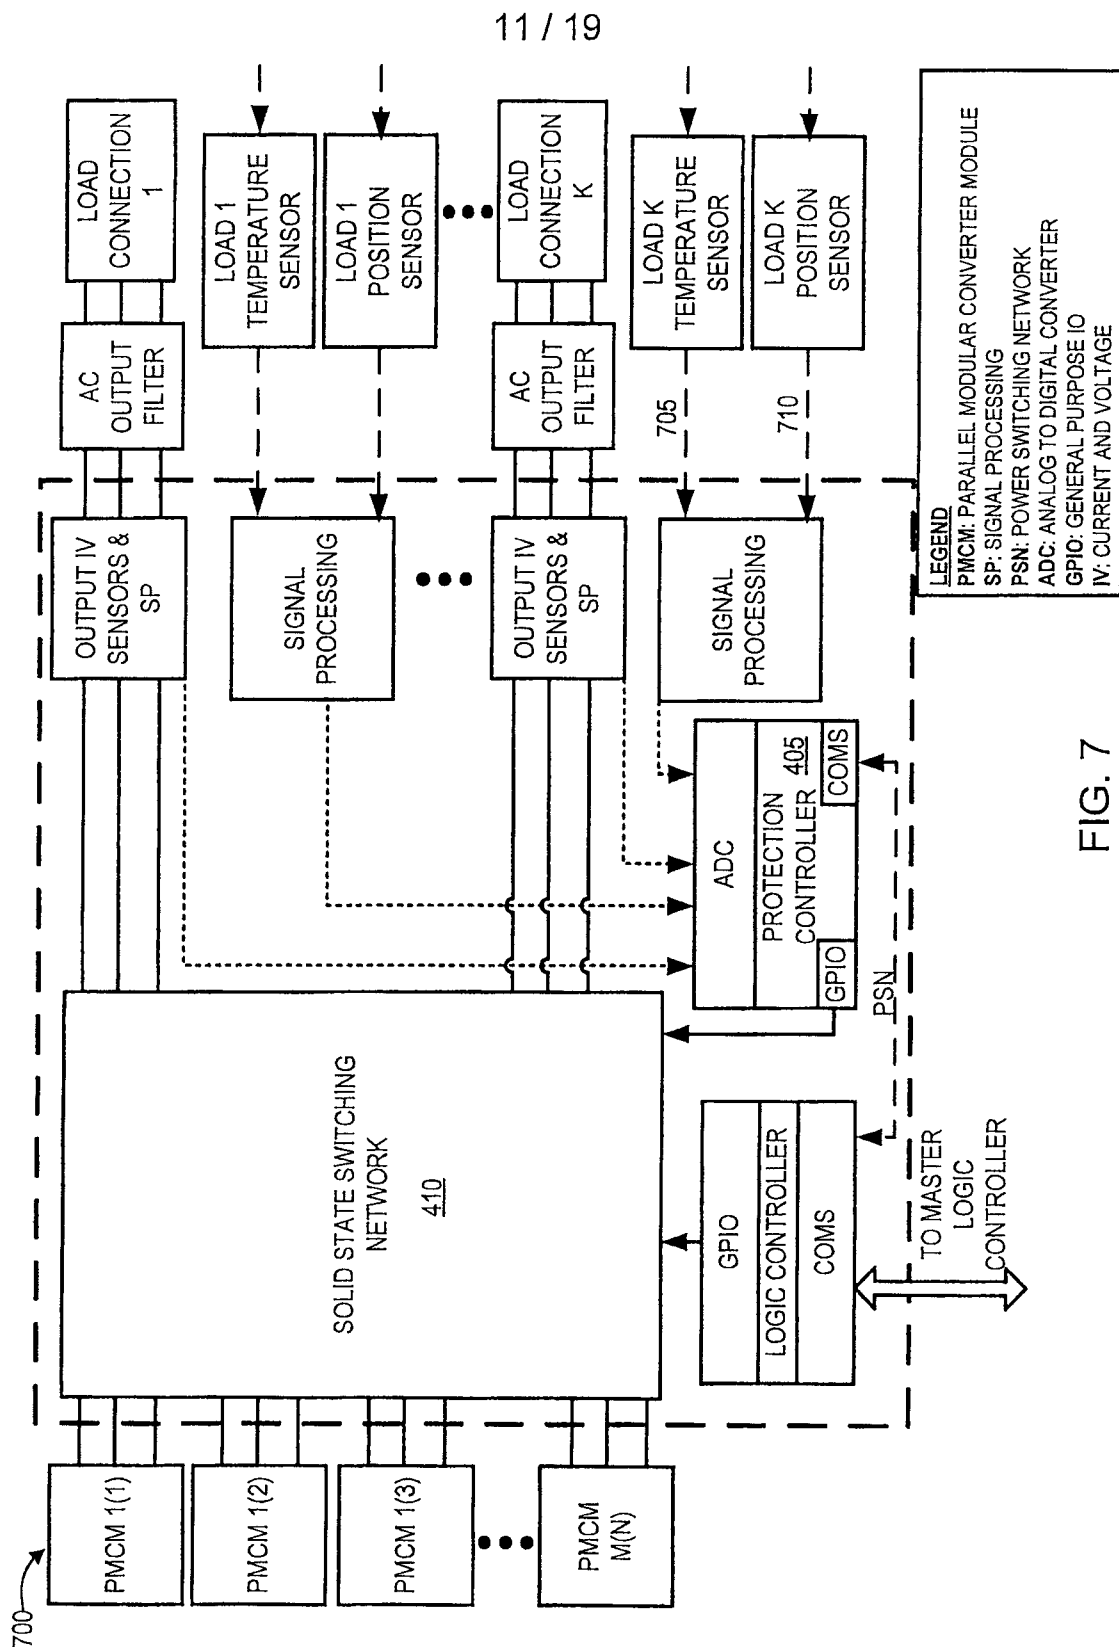


FIG. 7

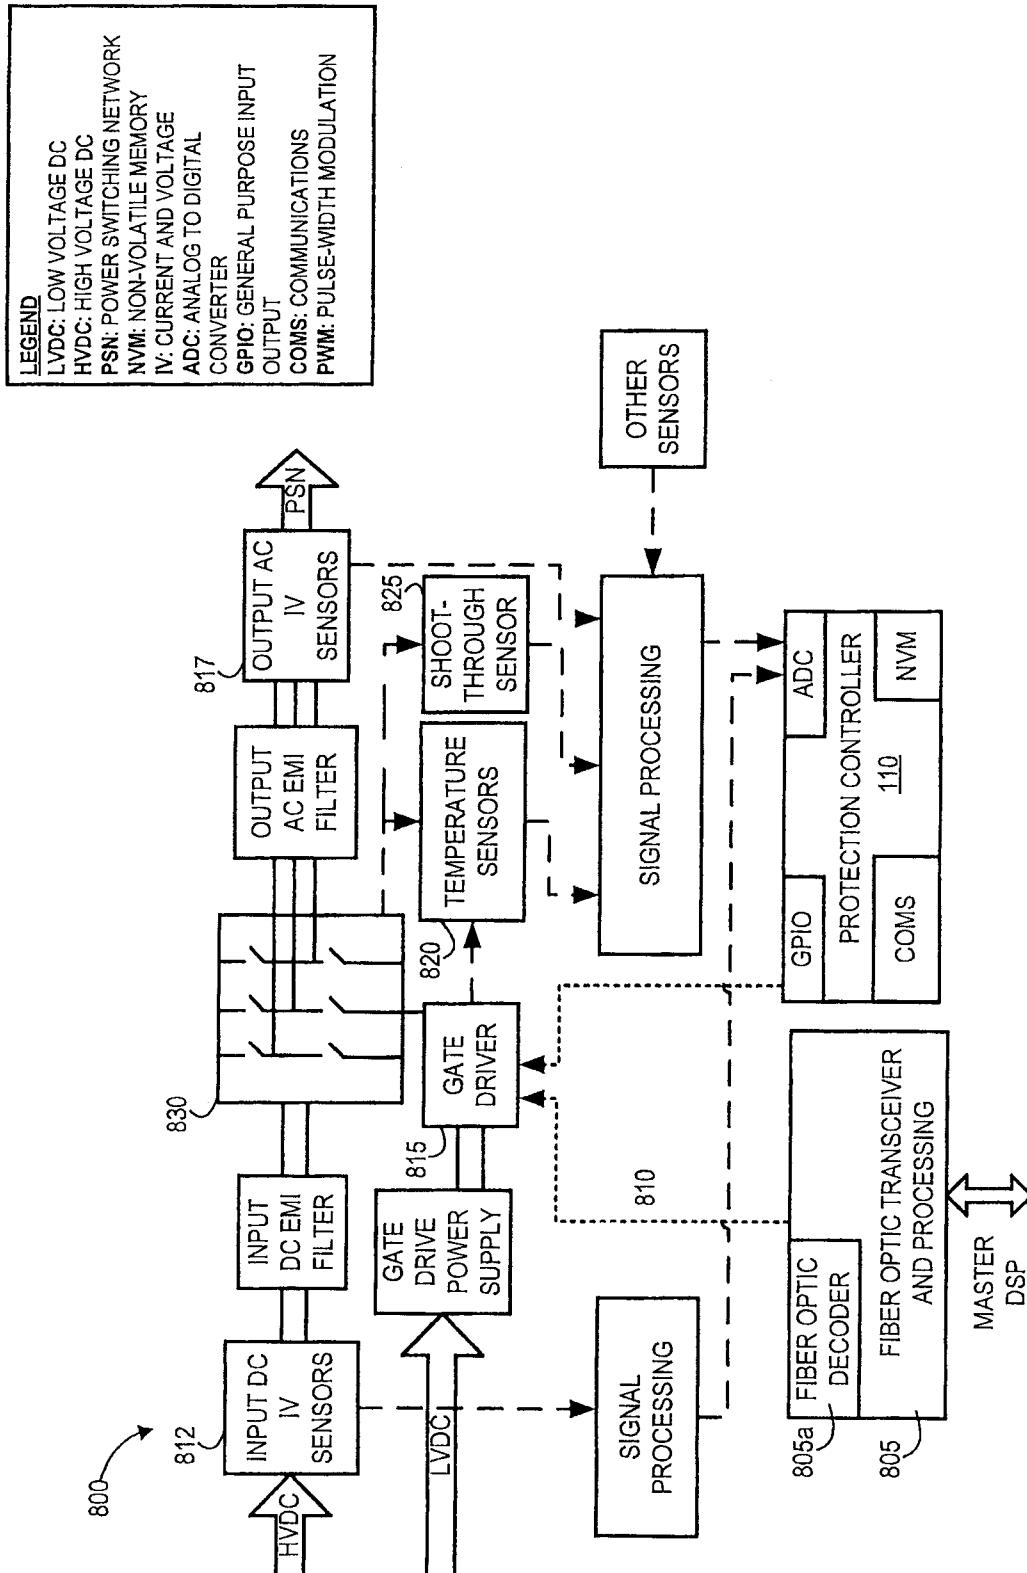


FIG. 8

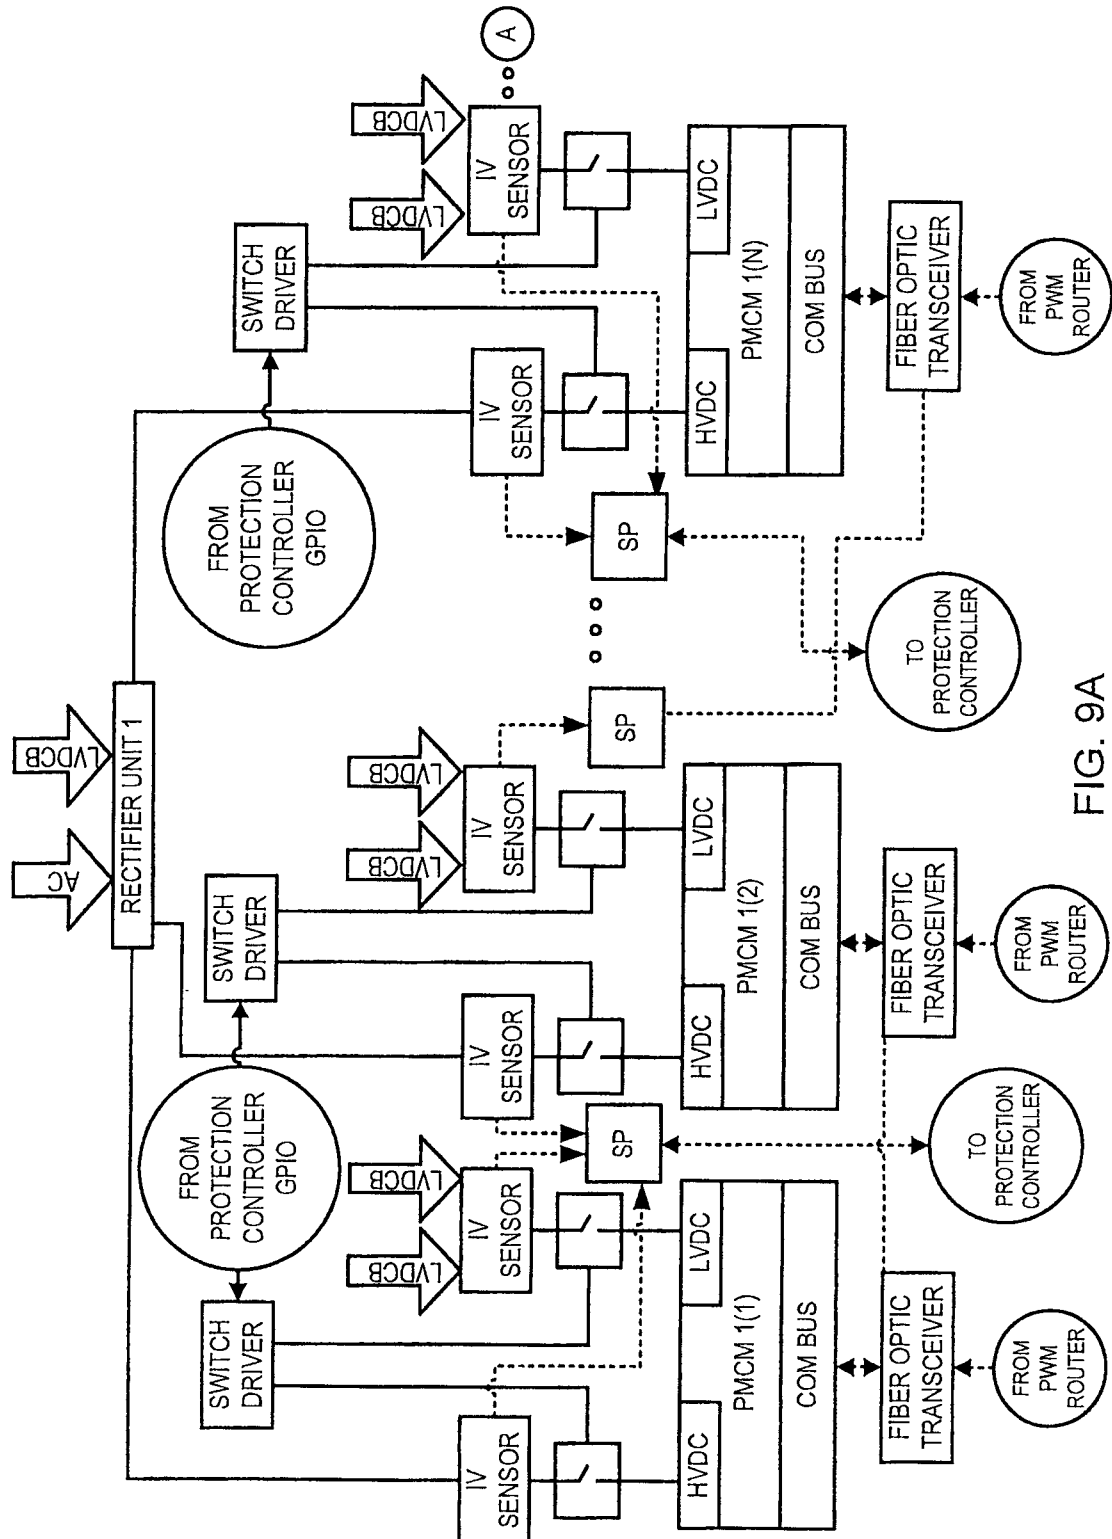



FIG. 9A




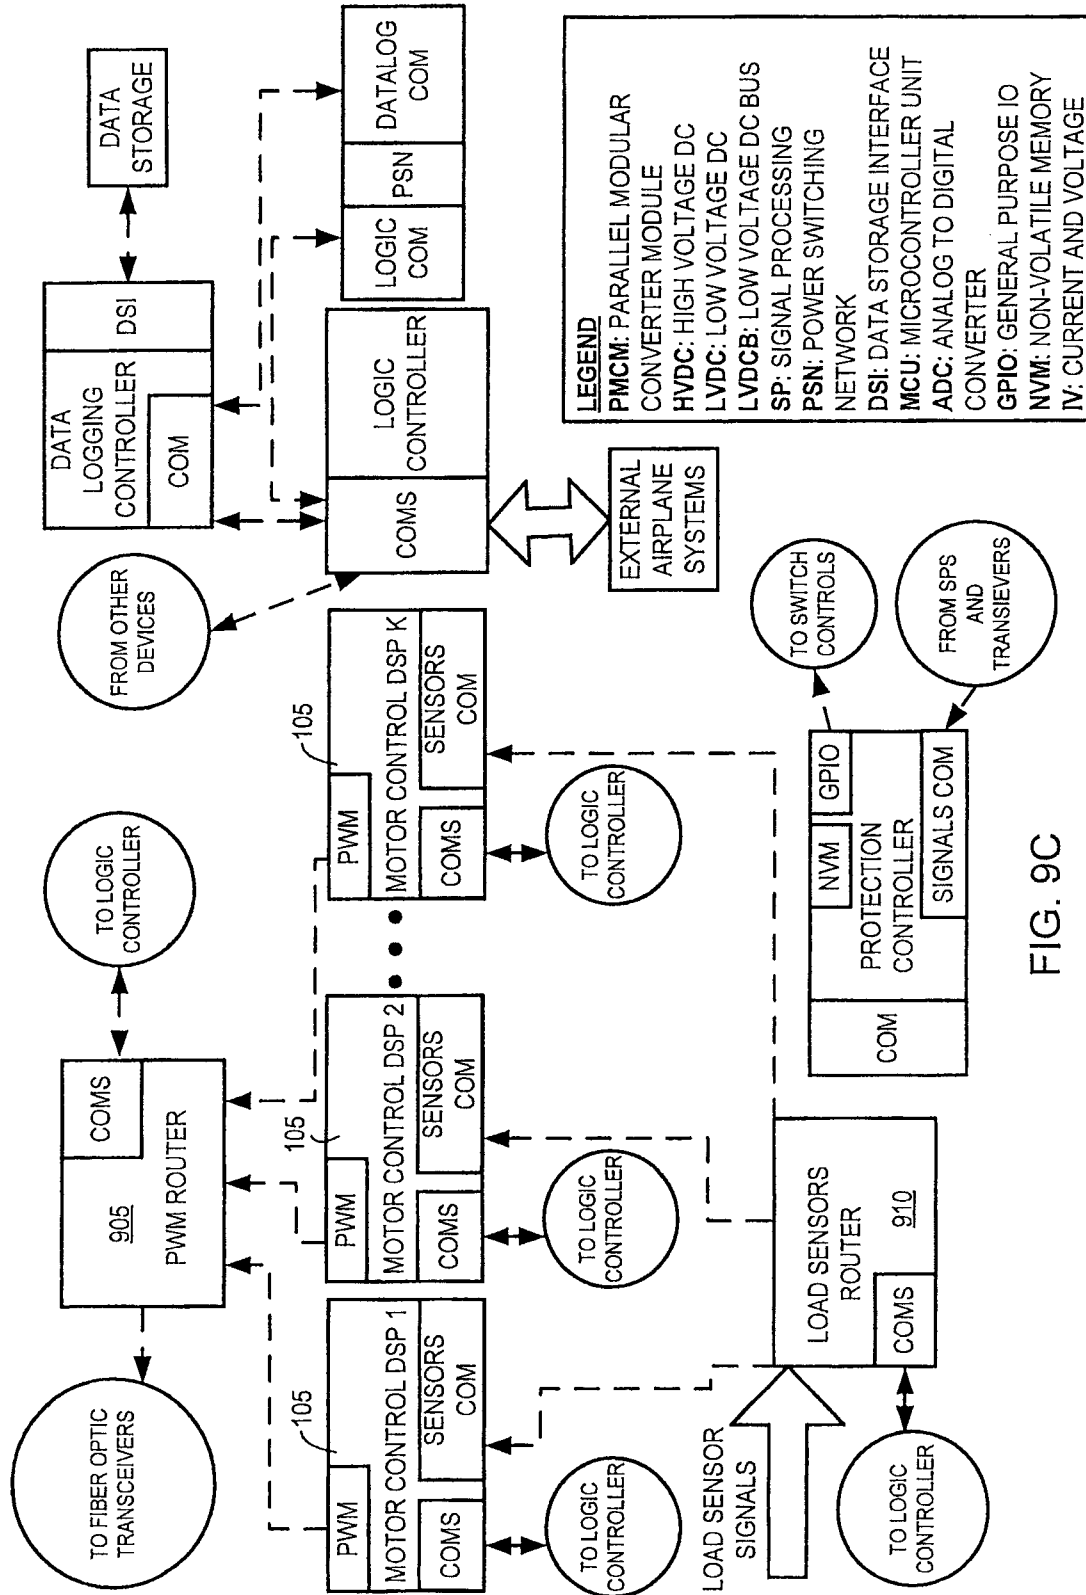


FIG. 9C

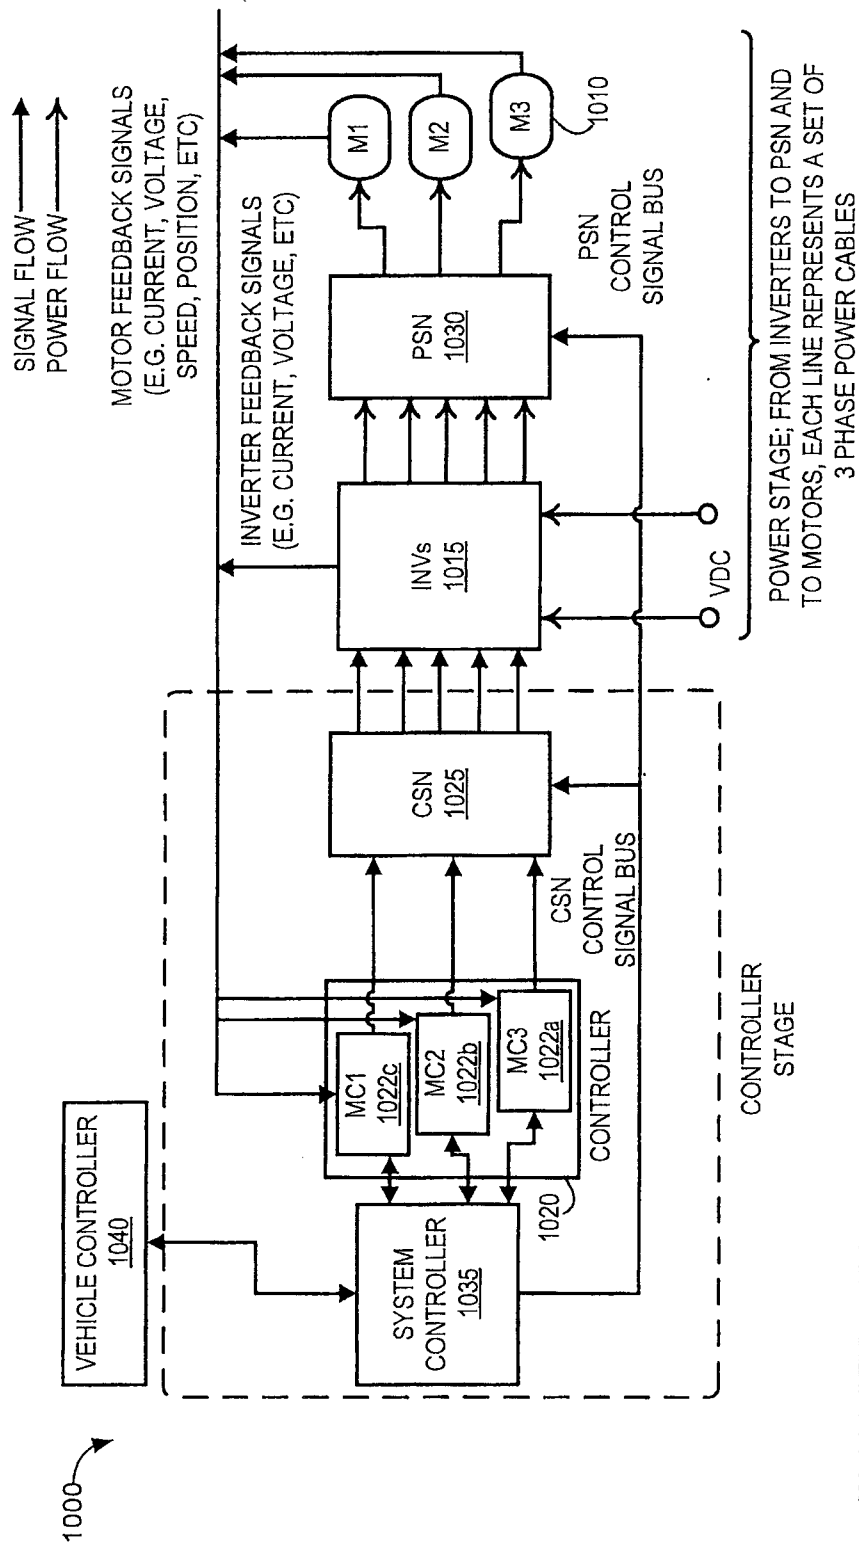

MC 1,2,3: REPRESENTS THREE MOTOR CONTROL ALGORITHMS

CSN: CONTROL SWITCHING NETWORK

INVS: INVERTER MODULES

PSN: POWER SWITCHING NETWORK

M1,2,3: REPRESENT THREE MOTORS, CAN BE VARIOUS TYPES

FIG. 10

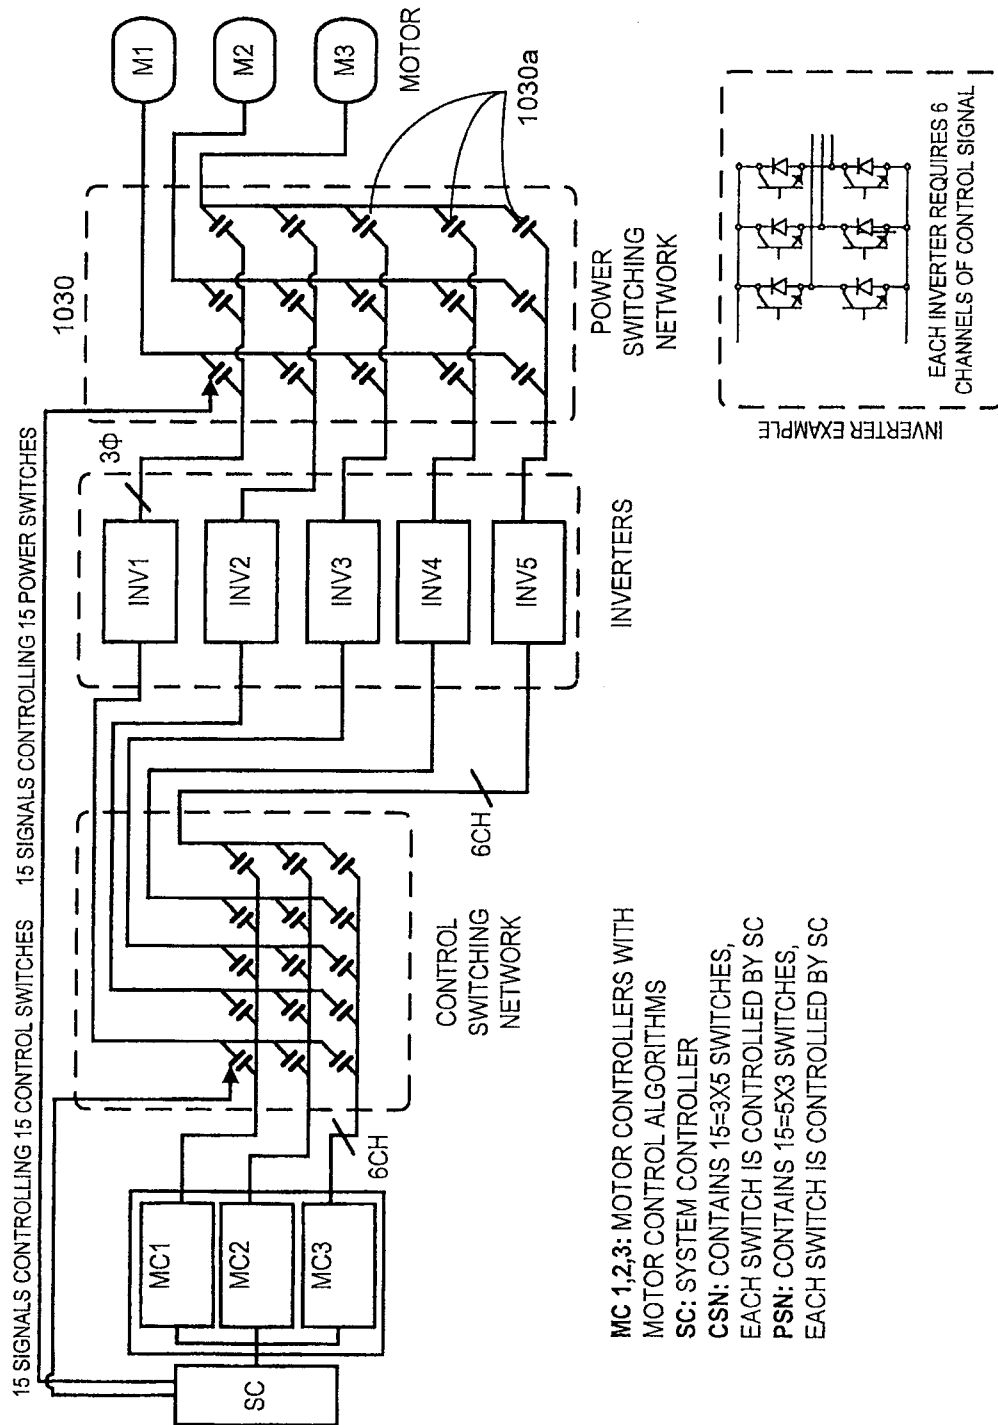


FIG. 11

MC 1,2,3: MOTOR CONTROLLERS WITH
MOTOR CONTROL ALGORITHMS
SC: SYSTEM CONTROLLER
CSN: CONTAINS 15=3X5 SWITCHES,
EACH SWITCH IS CONTROLLED BY SC
PSN: CONTAINS 15=5X3 SWITCHES,
EACH SWITCH IS CONTROLLED BY SC

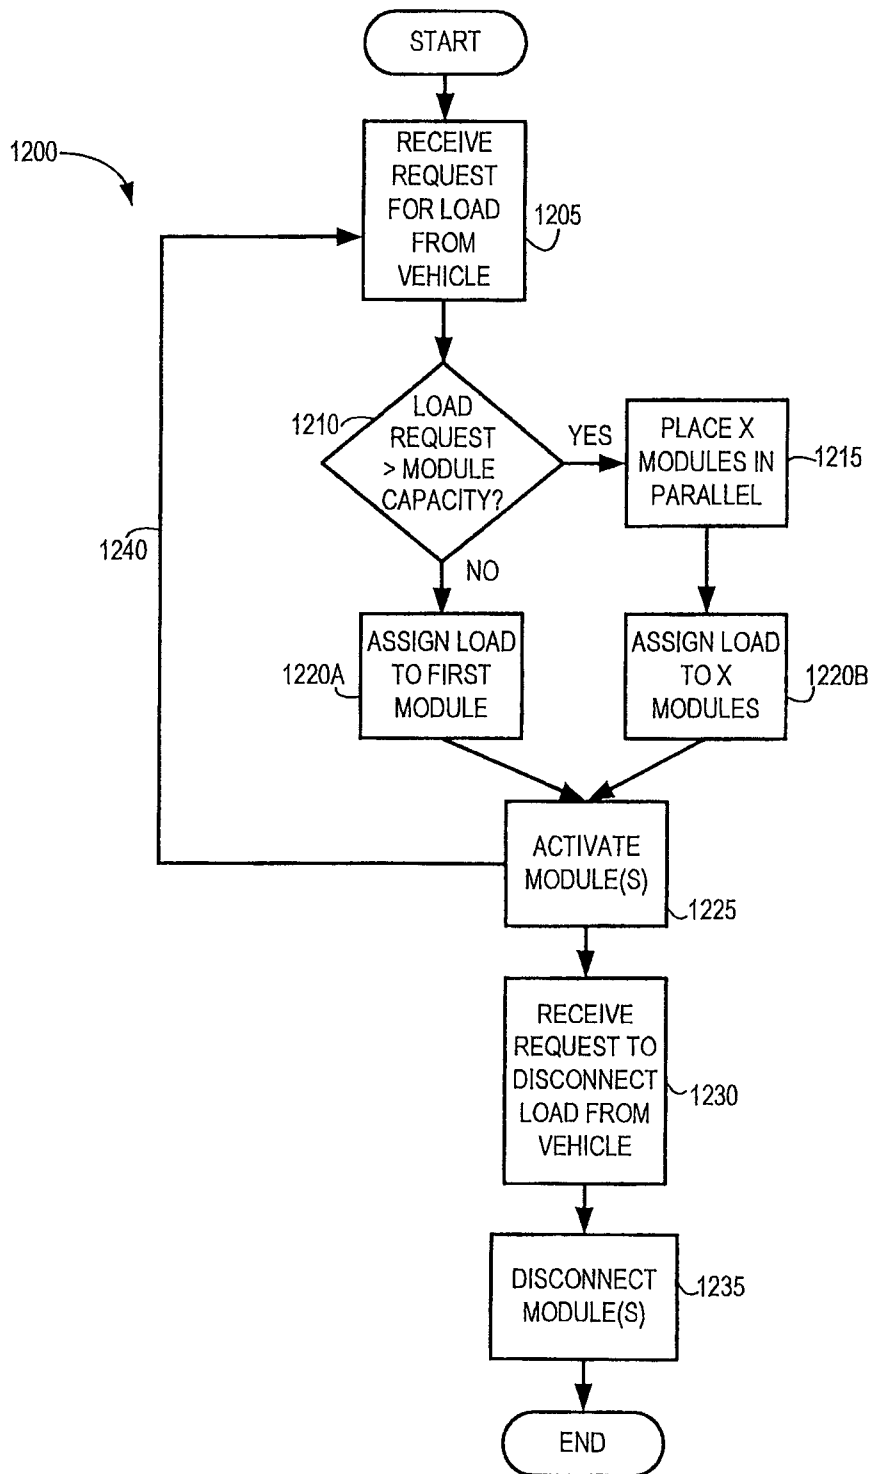


FIG. 12

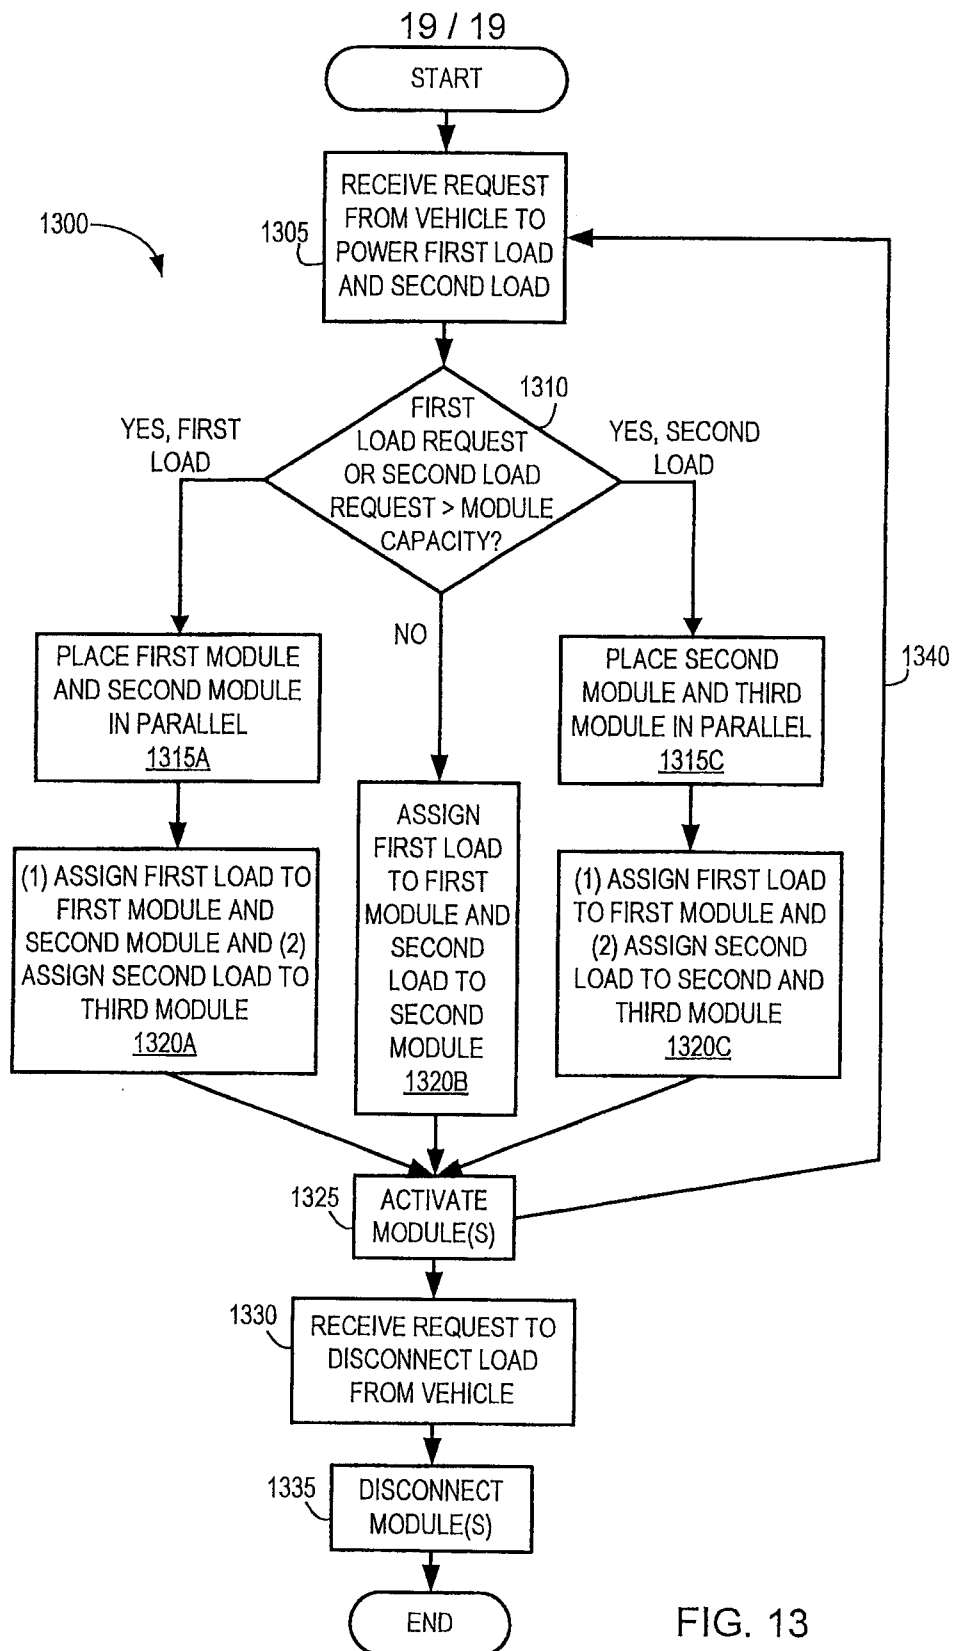


FIG. 13

