

**(12) STANDARD PATENT**  
**(19) AUSTRALIAN PATENT OFFICE**

**(11) Application No. AU 2011201223 B2**

(54) Title  
**Optical cable with controlled fiber positioning**

(51) International Patent Classification(s)  
**G02B 6/02** (2006.01)

(21) Application No: **2011201223** (22) Date of Filing: **2011.03.18**

(30) Priority Data

(31) Number **61/315,492** (32) Date **2010.03.19** (33) Country **US**

(43) Publication Date: **2011.10.06**  
(43) Publication Journal Date: **2011.10.06**  
(44) Accepted Journal Date: **2015.10.01**

(71) Applicant(s)  
**Corning Cable Systems LLC**

(72) Inventor(s)  
**Register III, James A.;Roberts, Reginald**

(74) Agent / Attorney  
**Phillips Ormonde Fitzpatrick, L 16 333 Collins St, Melbourne, VIC, 3000**

(56) Related Art  
**WO 2008/147194**  
**GB 2123164**  
**US 20080118211**  
**US 20040057681**

### **ABSTRACT**

Methods of controlling the position of an optical fiber having a minimum bend radius within an optical fiber channel in a fiber optic cable having a small footprint are disclosed. The position of the optical fibers is controlled so that the fiber is not bent at a radius below its minimum bend radius.

3/5

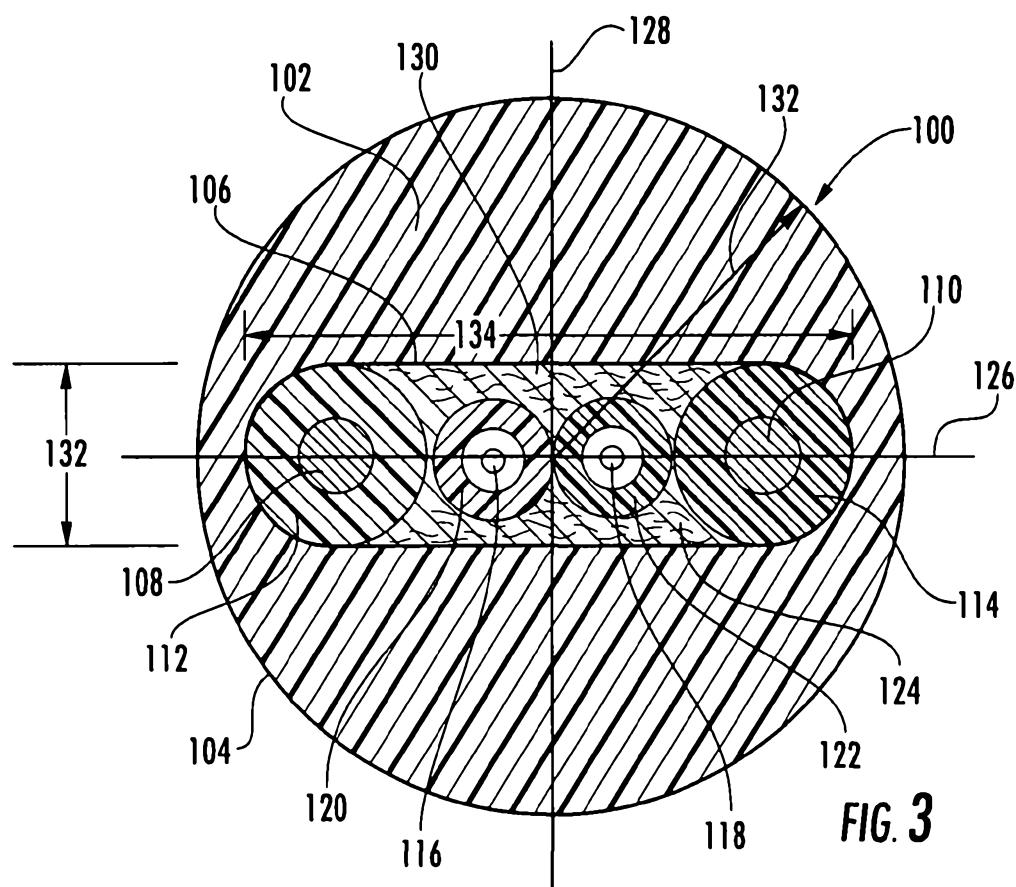


FIG. 3

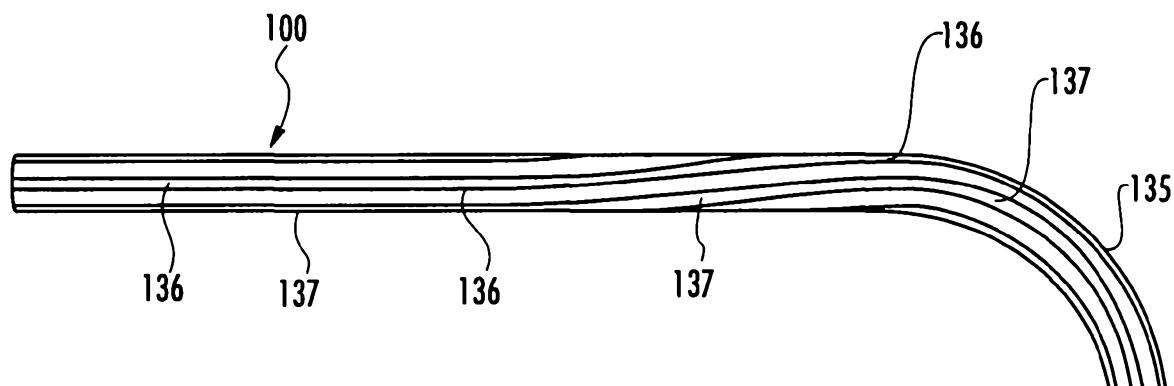


FIG. 4

2011201223 18 Mar 2011

**AUSTRALIA**

**Patents Act**

**COMPLETE SPECIFICATION  
(ORIGINAL)**

Class Int. Class

Application Number:  
Lodged:

Complete Specification Lodged:  
Accepted:  
Published:

Priority

Related Art:

---

Name of Applicant:

Corning Cable Systems LLC

Actual Inventor(s):

James A. Register, III, Reginald Roberts

Address for Service and Correspondence:

PHILLIPS ORMONDE FITZPATRICK  
Patent and Trade Mark Attorneys  
367 Collins Street  
Melbourne 3000 AUSTRALIA

Invention Title:

OPTICAL CABLE WITH CONTROLLED FIBER POSITIONING

Our Ref : 909363

POF Code: 1602/458840

The following statement is a full description of this invention, including the best method of performing it known to applicant(s):

## OPTICAL CABLE WITH CONTROLLED FIBER POSITIONING

**[0001]** This application relates to U.S. Provisional Application 61/315,492, filed March 19, 2010, the entire contents of which are incorporated by reference.

## BACKGROUND

### Technical Field

**[0002]** The present disclosure generally relates to fiber optic cables and methods of controlling a position of an optical fiber within the fiber optic cable.

### Technical Background

**[0003]** As the use of fiber optics migrates into numerous consumer electronics applications, such as connecting computer peripherals, there will be a consumer-driven expectation for cables having improved performance and a broad range of use. For example, it is likely that consumer demand will be for a fiber optic cable having a small footprint (e.g. a cable outer diameter less than 3.0 millimeters (mm)) while at the same being flexible enough to "bend back" upon itself.

**[0004]** However, optical performance and optical fiber integrity are adversely affected by cable "bend back." **FIG. 1** shows a typical fiber optic cable in a bent back configuration. The fiber optic cable **2** is generally circular and has an outer bend periphery **16** and a cable diameter or thickness **6**. Internal to the cable is an optical fiber **10**, which carries data. When the fiber optic cable **2** is bent back as shown, a bend radius **8** is at a minimum and is approximately equal to the cable diameter **6**. The location of the optical fiber **10** within the cable **2** will affect a bend radius **12** of the optical fiber **10**. If the optical fiber **10** is close to the outer bend periphery **16**, the fiber will have a larger bend radius and experience lower attenuation. If the optical fiber **10** is closer to the inner portion of the cable, the bend radius of the fiber will be smaller and cause greater delta attenuation due bending. If the bend radius **12** is small enough, the optical fiber may crack at an outer surface **18** of the optical fiber **10** and cause cracking or fracture of the optical fiber **10**.

**[0004a]** The discussion of the background to the invention included herein including reference to documents, acts, materials, devices, articles and the like is included to explain the context of the present invention. This is not to be taken as an admission or a suggestion that any of the material referred to was published, known or part of the common

general knowledge in Australia or in any other country as at the priority date of any of the claims.

## SUMMARY

**[0005]** According to a first aspect of the present invention, there is provided a fiber optic cable that comprises a polymer jacket having a channel therein, the channel having a first slot, at least one optical fiber in the first slot, a first electrical conductor, and a second electrical conductor, wherein the first slot is arranged on a first axis, and a second axis extends through the first and second electrical conductors, wherein the first electrical conductor is located on a first side of the first slot and the second electrical conductor is located on an opposite side of the first slot, and wherein the cable has a preferential bend axis of minimum bend moment of inertia about the second axis, and the optical fiber is positioned in the first slot and remains within the first slot when the fiber optic cable is bent a maximum amount such that a bend radius of the optical fiber is greater than or equal to a minimum bend radius of the optical fiber.

**[0005a]** The cable may have first and second preferential bend axes such that when the cable is bent back about either axis, the optical fibers are bent at bend radii exceeding their minimum bend radii. The cable can have a round cross-section with a diameter in the range of 2.8-3.2 millimeters, and the geometric center of the first slot can be within 0.2 millimeters of the geometric center of the cable.

**[0006]** Also described is a fiber optic cable that comprises a polymer jacket having a channel therein, at least one optical fiber in the channel, a first electrical conductor on a first side of the channel, and a second electrical conductor on a second side of the channel. The optical fiber is positioned in the channel and remains within the channel when the fiber optic cable is bent a maximum amount such that a bend radius of the optical fiber is greater than or equal to a minimum bend radius of the optical fiber. The cable may have a preferential bend axis aligned with the channel such that when the cable is bent back about the channel, the optical fibers are bent at bend radii exceeding their minimum bend radii. The cable can have a round cross-section with a diameter in the range of 2.8-3.2 millimeters, and the geometric center of the channel can be within 0.2 millimeters of the geometric center of the cable.

**[0007]** Also described is a fiber optic cable that comprises a polymer jacket having a channel therein and a diameter in the range of 2.8-3.2 millimeters, the channel having a width at least twice as large as a height of the channel, at least one optical fiber in the channel,

and a strength material disposed within the channel and contacting the at least one optical fiber. The optical fiber is positioned in the channel and remains within the channel when the fiber optic cable is bent a maximum amount such that a bend radius of the optical fiber is greater than or equal to a minimum bend radius of the optical fiber. The geometric center of the channel can be within 0.2 millimeters of the geometric center of the cable

**[0007a]** Where the terms "comprise", "comprises", "comprised" or "comprising" are used in this specification (including the claims) they are to be interpreted as specifying the presence of the stated features, integers, steps or components, but not precluding the presence of one or more other features, integers, steps or components, or group thereto.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0008]** The components of the following figures are illustrated to emphasize the general principles of the present disclosure and are not necessarily drawn to scale. Reference characters designating corresponding components are repeated as necessary throughout the figures for the sake of consistency and clarity.

**[0009]** **FIG. 1** is a cross-sectional view of a typical prior art fiber optic cable in a bent back configuration, wherein the cross-section is parallel to a length of the cable.

**[0010]** **FIG. 2** is a cross-sectional view of a fiber optic cable according to an embodiment of this disclosure, wherein the cross-section is a transverse cross-section perpendicular to a length of the cable.

**[0011]** **FIG. 3** is a transverse cross-sectional view of a fiber optic cable according to another embodiment of this disclosure.

**[0012]** **FIG. 4** is a side view of the fiber optic cable of **FIG. 3** being bent about an axis having a maximum moment of inertia.

**[0013]** **FIG. 5** is a transverse cross-sectional view of a fiber optic cable according to another embodiment of this disclosure.

**[0014]** **FIG. 6** is a transverse cross-sectional view of a fiber optic cable according to another embodiment of this disclosure.

**[0015]** **FIG. 7** is a transverse cross-sectional view of a fiber optic cable according to another embodiment of this disclosure.

**[0016]** **FIG. 8** is a transverse cross-sectional view of a fiber optic cable according to another embodiment of this disclosure.

### **DETAILED DESCRIPTION**

**[0017]** Some aspects of the present disclosure are directed to fiber optic cables containing an optical fiber, and methods of controlling the position of the optical fiber within the fiber optic cables. According to various embodiments, the fiber optic cables described herein may include a plurality of optical fibers arranged with little or no stranding or twisting around each other.

**[0018]** **FIG. 2** is a cross-sectional view of a fiber optic cable **30** according to a first embodiment of this disclosure. The cable **30** includes a polymer jacket **32**

having an outer periphery 34 and a channel periphery 36 with the channel periphery 36 defining a channel 38. In the illustrated embodiment, the cross-section of the cable 30 is generally circular with a diameter of about 3.0 millimeters (mm). In this specification, it is understood that circular cables may have somewhat irregular cross-sections and varying degrees of ovality. Accordingly, references to diameters and radii of circular cables refer to median or average values. In this specification, the terms "polymer" and "polymeric" indicate materials comprised primarily of polymers, but allow for the inclusion of non-polymer additives and other materials, such as fire-retardant compounds, etc., and the inclusion of multiple polymers in a blend.

[0019] The polymer jacket 32 encloses the channel 38 and the channel 38 may extend the entire length of the cable 30. The cable 30 further includes a pair of metallic electrical conductors 40, 42 that supply power to peripheral electrical equipment. The electrical conductors 40, 42 can in addition or alternatively carry data. The electrical conductors 40, 42 may be surrounded by insulating material 44, 46 respectively. Alternatively, the electrical conductors 40, 42 can be embedded in the jacket 32 so that insulating material can be omitted. Data-carrying optical fibers 48, 50 are also included within the cable 30. The optical fibers 48, 50 may be surrounded by buffer layers 58, 60, respectively. The electrical conductors 40, 42 and the buffered optical fibers 48, 50 are positioned within the channel 38. Additional conductors can be wholly or partially embedded within the jacket 32. The optical fibers 48, 50 are generally allowed to translate within the channel 38 when the cable 30 is bent.

[0020] In FIG. 2, the optical fibers 48, 50 can translate in the channel 38 along a first axis 52 that is perpendicular to a first axis 54 along which the electrical conductors 40, 42 are generally aligned. The channel 38 has a "height" or length dimension 56 along the axis 52 through which the fibers can translate. In the exemplary embodiment, the channel 38 is "cross" or "T" shaped, and the cable 30 has a geometric center 62 generally located at the intersection of the axes 52, 54. The optical fibers 40, 42 are arranged in a first slot 72, which is aligned with the axis 52, and the electrical conductors 40, 42 are arranged in a second slot 74, which is aligned with the axis 54. The slots 72, 74 are defined in part by four projections 76 that

extend radially inward into the channel 38. The projections 76 may have the form of rounded corners.

[0021] The shape of the slots 72, 74 and the location of the electrical conductors 40, 42 provide some degree of a preferential bend characteristic to the cable 30 to bend either about the axis 52 or the axis 54, as well as allowing the optical fibers 48, 50 to translate to locations to increase their bend radius and reduce optical attenuation. Regarding preferential bend, the shape of the channel 38 minimizes the material moments of inertia about the axis 54, and accordingly generally induces the cable 30 to bend about axis 54 when the cable 30 is subjected to bending moments. If the cable 30 is bent back about the axis 54, the optical fibers 48, 50 will undergo a bend radius approximately equal to or greater than the cable radius 64. According to one aspect of the present invention, the optical fibers can be selected so that when the cable is bent back about the axis 54, which is aligned with the slot 72, the optical fibers do not experience undue optical attenuation. For example, in the exemplary embodiment, the optical fibers 48, 50 may have a minimum bend radius of about 1.5 mm that results in an acceptable delta attenuation in the range of about 1.5 dB to 2.0 dB. The exemplary cable radius 64, corresponding to the bend back radius, is about 1.5 mm, so that the optical fibers 48, 50 are not bent at a radius smaller than their minimum bend radius when bending about axis 54.

[0022] If the cable 30 is bent in its preferred mode, about the axis 54, the optical fibers are allowed to translate in the slot 72 so that the fibers 48, 50 do not bend at a radius below their minimum bend radius. For example, if the cable 30 is bent back about axis 54 so that a location 66 on the cable 30 is where the cable is bent back upon itself, the optical fibers will translate “downwardly” in the slot 72, away from the bend back location 66, to the orientation shown in FIG. 2. The optical fiber 48 will move away from location 66, toward the “bottom” of the slot 72, where the fiber 48 is at its lowest strain state. The optical fiber 50 will also move away from the bend back location 66 toward a state of low strain. The height 56 of the slot 72 is selected so that optical fibers in the slot do not bend at a radius below their minimum bend radius. For example, the height 56 of the slot 72 in the exemplary embodiment is about 1.5 mm, so that when the cable 30 is in bend back, the optical fiber closest to the bend back location is bent at a radius of at least 1.5 mm.

[0023] According to the above embodiment, the preferential bend characteristic of the cable 30 prevents the optical fibers 48, 50 in the cable 30 from bending below their minimum bend radii. The electrical conductors 40, 42 are constrained within the slot 74 to prevent crossover with the optical fibers 48, 50, which reduces the likelihood of the fibers from moving out of their slot 72. A geometric center of the slot 72 can correspond to the geometric center 62 of the cable 30, which can have a round cross-section, or the geometric center of the slot 72 can be within 0.2 mm of the center of the cable 30. Although the illustrated optical fibers 48, 50 include buffer layers 58, 60, buffer layers are not required for the optical fibers illustrated in this specification.

#### Example 1

[0024] A cable 30 as shown in FIG. 2 has a diameter in the range of 2.8-3.2 mm, a slot 72 having a dimension 56 in the range of 1.2-1.8 mm, and two electrical conductors in the range of 24 to 28 AWG (American wire gauge). The electrical conductors 40, 42 are located on opposite sides of the slot 72, and their centerlines are spaced from one another a distance in the range of 1.2 to 1.75 mm. The cable jacket 102 is comprised primarily of thermoplastic urethane (TPU), thermoplastic elastomer (TPE), or polyvinylchloride (PVC).

[0025] FIG. 3 is a schematic cross-sectional view of a fiber optic cable 100 according to another embodiment of this disclosure. The cable 100 includes a polymer jacket 102 having an outer periphery 104 and a channel periphery 106 with the channel periphery 106 defining a channel 124. A cross-section of the illustrated cable 100 is generally circular and has a diameter of less than about 3.0 millimeters (mm). The jacket 102 surrounds the channel 124 and the channel 124 may extend the entire length of the cable 100. The cable 100 further includes a plurality of electrical conductors 108, 110 that may supply power to peripheral equipment. The electrical conductors 108, 110 are each surrounded by an insulating material 112, 114 respectively, although the insulating material may be omitted in some embodiments. For example, the conductors 108, 110 can be wholly or partially embedded in the jacket 102 at each end of the channel 124.

[0026] Data-carrying buffered optical fibers 116, 118 are also included within the cable 100, disposed between the electrical conductors 108, 100. The optical fibers 116, 118 are also each surrounded by buffer layers 120, 122,

respectively. The electrical conductors 108, 110 and the buffered optical fibers 116, 118 are positioned within the channel 124. The optical fibers 116, 118 are generally allowed to translate within the channel 124, between the conductors 108, 110, when the cable 100 is bent. The channel 124 has the shape of a slot extending along a first axis 126, which is perpendicular to a second axis 128.

[0027] The cable 100 further includes a strength material 130, such as an aramid yarn. The strength material 130 is arranged within the channel 124. In accordance with the embodiment and as shown in FIG. 3, the strength material 130 surrounds the optical fibers 116, 118 and electrical conductors 108, 110. The strength material 130 may be generally located throughout the channel 124 and dispersed among the electrical conductors 108, 110 and the optical fibers 116, 118. The strength material 130 is loosely packed enough such that it allows the optical fibers 116, 118 to move to a limited extent within the jacket 102.

[0028] The channel or slot 124 can have a maximum height 132 and a maximum width 134. The width 134 can be, for example, at least two, or even three times the height 132. The shape of the channel 124 provides the cable 100 with a preferential bend characteristic that causes the cable 30 to bend about the axis 126 when experiencing bending stresses. The non-preferred direction of bending is about the second axis 128. According to an aspect of the present embodiment, the optical fibers 48, 50 are selected so that as cable 100 bends back on itself about axis 126, the optical fibers do not bend at a radius below their minimum bend radii. For example, the exemplary cable 100 has an outer diameter of about 3.0 mm or less (i.e. the radius 132 being 1.5 mm or less). The optical fibers 116, 118 have a minimum bend radius of about 1.2 mm. Therefore, as the cable 100 is bent back on itself about axis 126 (i.e. the preferred direction about the axis having the minimum moment of inertia), the optical fibers 116, 118 will not have a bend radius below their minimum bend radius.

[0029] If the cable 100 is bent about axis 128 (i.e. the non-preferred direction and the axis having the maximum moment of inertia), it is possible that one of the optical fibers 116, 118 may be bent at a radius below its minimum bend radius. However, referring to FIG. 4, if a length of the cable 100 is bent about the axis having the maximum moment of inertia, the cable 100 tends to rotate about 90 degrees to align the axis having the minimum moment of inertia with the axis about

which the cable 100 is bent. For example, if the length of cable 100 is bent at location 135, stripes 136, 137 on the exterior of the cable 100 are seen to rotate about 90 degrees. This corresponds to a rotation of the cross-section of the cable 100 and the axis having the minimum moment of inertia will become the axis of bending. In order for this rotation to occur, a ratio of the bend energy required to bend the cable 100 about the axis 128 having the maximum moment of inertia to the bend energy required to bend the cable 100 about the axis 126 having the minimum moment of inertia should be at least 1.5:1 and may be as large as 4:1. When the cable 100 is bent back on itself and axis 126 rotates 90 degrees, the cross-section and optical fibers 116, 118 will rotate as well and the optical fibers 116, 118 will be bent at a radius less than the minimum bend radius.

[0030] Bend energy and inertia depend on the cross-sectional geometry of the cable as well as the material properties of the individual cables (for example, the cable jacket, the electrical conductors, and the optical fibers to name but a few) and can be calculated readily. The shape of the channel 124, or optical fiber channel 124, can be determined based on the inertia and bend energy calculations to ensure the optical fibers 116, 118 are not bent at a radius less than their minimum bend radius. A geometric center of the channel 124 can correspond to a geometric center of the cable 100, which can have a round cross-section, or the geometric center of the channel 124 can be within 0.2 mm of the center of the cable 100.

### Example 2

[0031] A cable 100 as shown in FIG. 3 has a diameter in the range of 2.8-3.2 mm, a channel 124 having a height 132 in the range of 0.6-1.4 mm, a width 134 in the range of 1.5-2.8 mm, and two electrical conductors in the range of 24 to 28 AWG. The electrical conductors 40, 42 are located on opposite sides of the optical fibers 116, 118. The cable jacket 102 is comprised primarily of thermoplastic urethane (TPU), thermoplastic elastomer (TPE), or polyvinylchloride (PVC).

[0032] FIG. 5 is a cross-sectional view of a fiber optic cable 140 according to another embodiment of this disclosure. The cable 140 includes a polymer jacket 141 having an outer periphery 142 and a channel periphery 144 that defines a channel or optical channel 145. A cross-section of the cable 140 is generally circular with a diameter of 3.0 millimeters or less, or more generally in the range of 2.8-3.2 mm. The jacket 141 surrounds the channel 145 and the channel 145

may extend the entire length of the cable 140. The cable 140 further includes a plurality of electrical conductors 148, 150 that supply power to peripheral equipment. Data-carrying buffered optical fibers 152, 154 are also included within the cable 140. The electrical conductors 148, 150 and the optical fibers 152, 154 are positioned within the channel 145. In some embodiments, the electrical conductors 152, 154 may be wholly or partially embedded within the jacket 141, between the outer periphery 142 and the channel periphery 144. The cable 140 further includes a strength material 146, such as an aramid yarn. As illustrated, the strength material 146 is arranged within the jacket 141 and adjacent to channel periphery 144. It is not required that the strength material 146 be arranged as such and may be arranged within the jacket in any convenient orientation or arrangement.

[0033] The cable 140 also includes a non-conducting elastomeric material 156 that occupies the channel 145. A conductive elastomeric material may be used if necessary to provide EMI (electromagnetic interference) shielding or for other properties. The elastomeric material 156 functions to maintain the position of the electrical conductors 148, 150 and the optical fibers 152, 154. The elastomeric material 156 may be any material such a polymer or resin that is sufficiently strong to maintain the position of the cable components (i.e. electrical conductors and optical fibers) and that is sufficiently flexible to allow the cable 140 to move through a wide range of motion. It is also desired that the elastomeric material 156 have a low coefficient of thermal expansion to minimize buckling. The elastomeric material 156 can be used to position the optical fibers 152, 154 central to the fiber optic cable 140. By doing so, the bend radius of the optical fibers 152, 154 is fixed and independent of how the cable 140 is bent.

[0034] The elastomeric material 156 can be introduced into the channel 145 by a coextrusion process as the jacket 141 is being extruded. The optical fibers 152, 154, and electrical conductors, if present in the channel 145, can essentially become embedded in the elastomeric material 156. The jacket 141 can have a modulus of elasticity in the range of 1 to 2,500 MPa. The elastomeric material 156 can have a modulus of elasticity in the range of 3,000 to 10,000 MPa.

### Example 3

[0035] A cable 140 as shown in FIG. 5 has a diameter in the range of 2.8-3.2 mm and two electrical conductors in the range of 24-28 AWG. The cable jacket

102 is comprised primarily of thermoplastic urethane (TPU), thermoplastic elastomer (TPE), or polyvinylchloride (PVC) having a modulus of elasticity of less than 2,500 MPa. The elastomeric material 156 is a thermoplastic elastomer having EMI shielding properties, and a modulus of elasticity in the range of 3,000 to 10,000 MPa that is coextruded with the jacket 141. Elastomeric material not having EMI shielding properties has a modulus of elasticity of less than 500 MPa.

[0036] FIGS. 6, 7, and 8 illustrate various embodiments based on the principles of the embodiment of FIG. 5. FIG. 6 illustrates a fiber optic cable 140' having all of the elements of the fiber optic cable 140 of FIG. 5, but includes additional data-carrying components 160, 162 arranged within the jacket 141' of the cable 140'. Such a configuration is known as a backward compatible fiber optic USB cable 140'.

[0037] FIG. 7 illustrates a fiber optic cable 170 similar to the embodiment of FIG. 6 but having a different internal arrangement of the fiber optic cable components. The fiber optic cable 170 comprises a jacket 172 having an outer periphery 173 and a channel periphery 175, the channel periphery 175 defining a channel 190. Electrical conductors 176, 178 and optical fibers 182, 184 are held in position by an elastomeric material 190. Data-carrying conductors 186, 188 may be arranged within the jacket 172. A strength material 174 is arranged adjacent the channel periphery 175. In this embodiment, the optical fibers 182, 184 and the electrical conductors 176, 178 are arranged central to the cable 170 to produce a smaller optical fiber channel 175.

[0038] Similarly, FIG. 8 illustrates a fiber optic cable 200 similar to the embodiment of FIG. 7 but having a different internal arrangement of the fiber optic cable components. The fiber optic cable 200 comprises a jacket 201 having an outer periphery 202 and a channel periphery 204, the channel periphery 204 defining a channel 205. Electrical conductors 206, 208, data-carrying conductors 210, 212, and optical fibers 214, 216 are held in position by an elastomeric material 218. A strength material 220 is arranged adjacent the channel periphery 204. In this embodiment, the optical fibers 214, 216 are arranged proximate a center of the cable 200 and the electrical conductors 206, 208 and the data-carrying conductors 210, 212 surround the optical fibers 214, 216 to produce a larger optical fiber channel 204.

**[0039]** Throughout the foregoing disclosure, the adjective "about" has been used in numerous locations preceding an amount. Other embodiments of this disclosure are like the above-discussed embodiments, except that the adjective "about" is optional and may be omitted. It will be understood to the skilled artisan that the methods disclosed herein to control optical fiber position within a fiber optic cable are not mutually exclusive and may be used in any combination as required to achieve appropriate control of optical fiber position.

**[0040]** It is understood that any acknowledgement of any prior art in this specification is not to be taken as an admission that this acknowledged prior art forms part of the common general knowledge in Australia or elsewhere.

The claims defining the invention are as follows:

1. A fiber optic cable comprising:

a polymer jacket having a channel therein, the channel having a first slot;

at least one optical fiber in the first slot;

a first electrical conductor; and

a second electrical conductor, wherein the first slot is arranged on a first axis, and a second axis extends through the first and second electrical conductors,

wherein the first electrical conductor is located on a first side of the first slot and the second electrical conductor is located on an opposite side of the first slot,

wherein the cable has a preferential bend axis of minimum bend moment of inertia about the second axis, and

wherein the optical fiber is positioned in the first slot and remains within the first slot when the fiber optic cable is bent a maximum amount such that a bend radius of the optical fiber is greater than or equal to a minimum bend radius of the optical fiber.

2. The fiber optic cable of claim 1, wherein the cable has a diameter in the range of 2.8 to 3.2 millimeters.

3. The fiber optic cable of claims 1 or 2, wherein the first slot has a height in the range of 1.2 to 1.8 millimeters.

4. The fiber optic cable of any one of the preceding claims, wherein the first and second electrical conductors are located in a second slot aligned with the second axis and intersecting the first slot, the first and second slots being defined in part by four projections of the cable jacket extending inwardly toward a geometric center of the cable.

5. The fiber optic cable of any one of the preceding claims, wherein the first and second electrical conductors are embedded in the polymer jacket.

6. The fiber optic cable of any one of the preceding claims, wherein the first electrical conductor has a first centerline and the second electrical conductor has a second centerline, a spacing between the first and second centerlines being in the range of 1.2 to 1.75 millimeters.

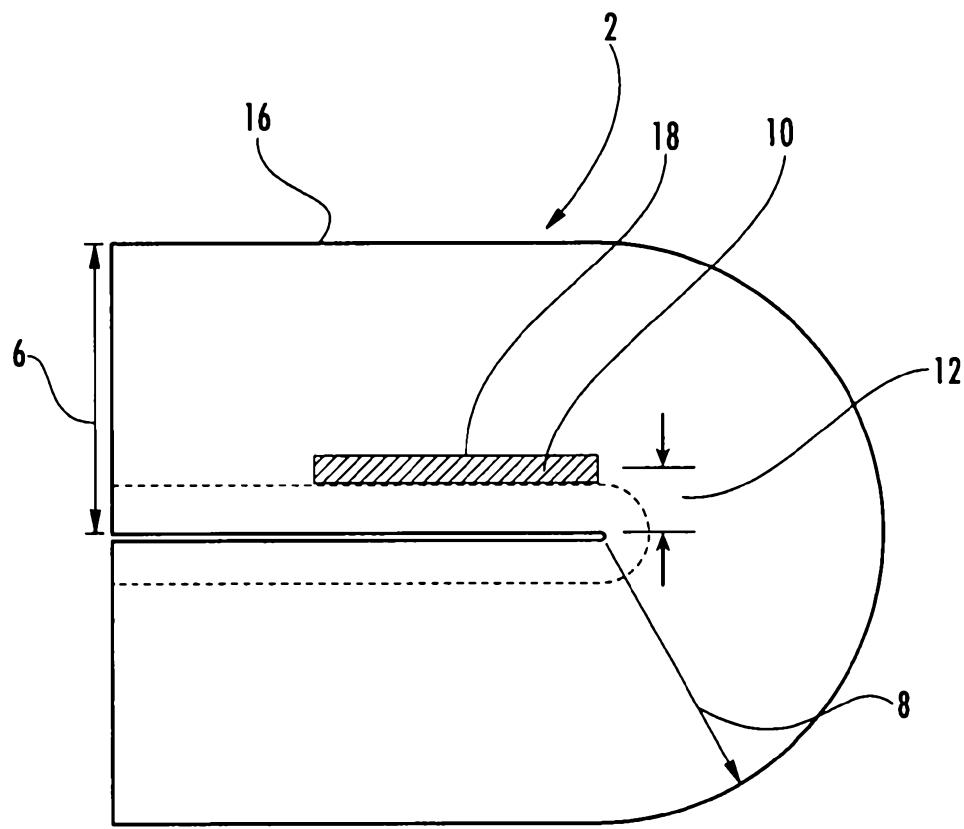


FIG. 1  
(PRIOR ART)

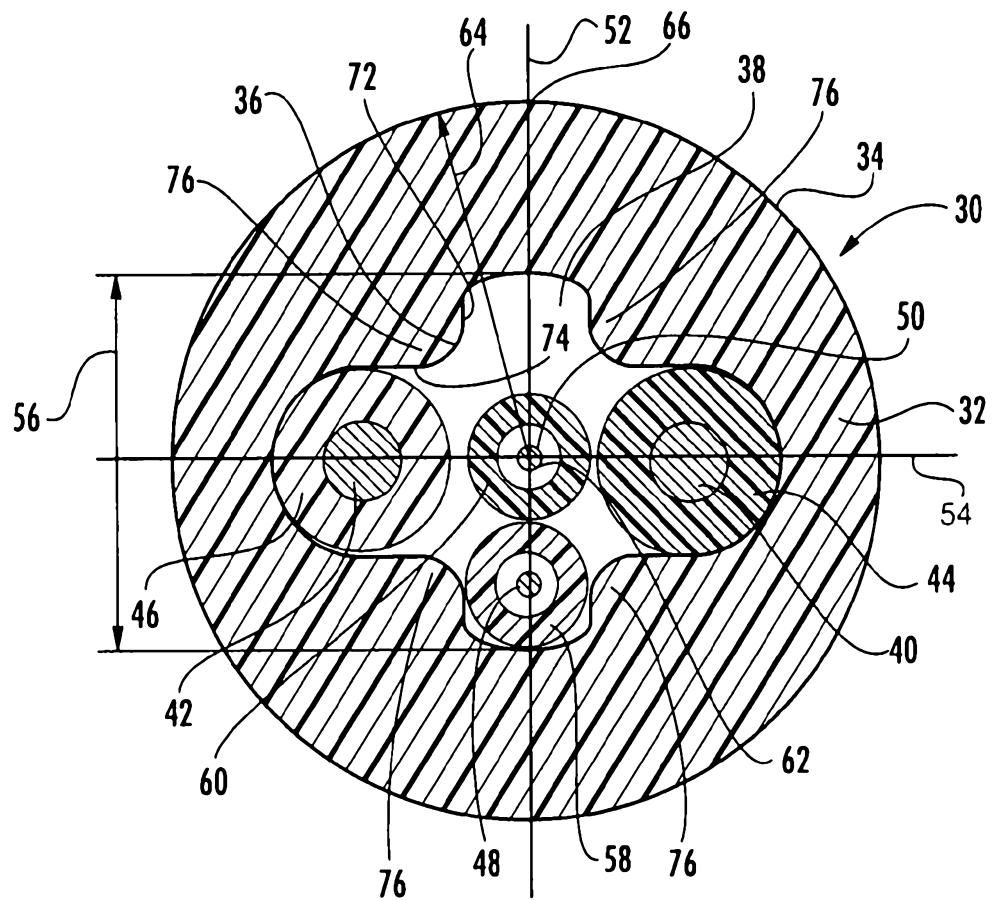


FIG. 2

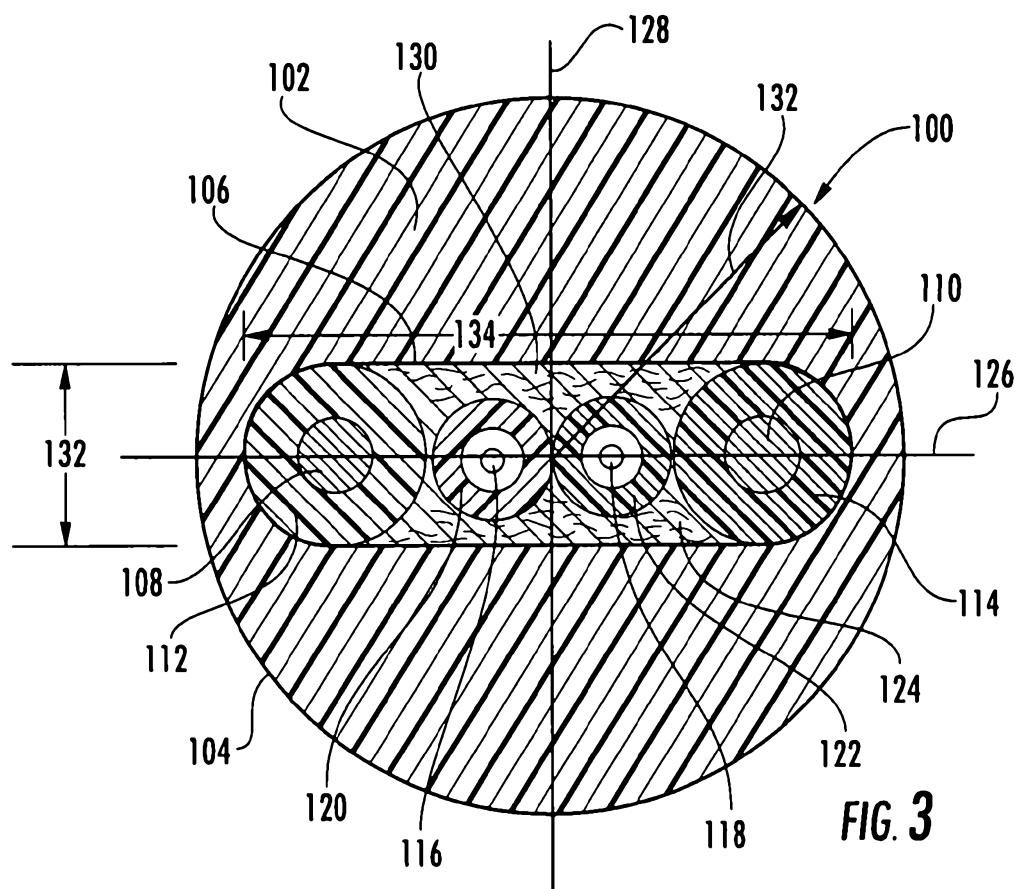


FIG. 3

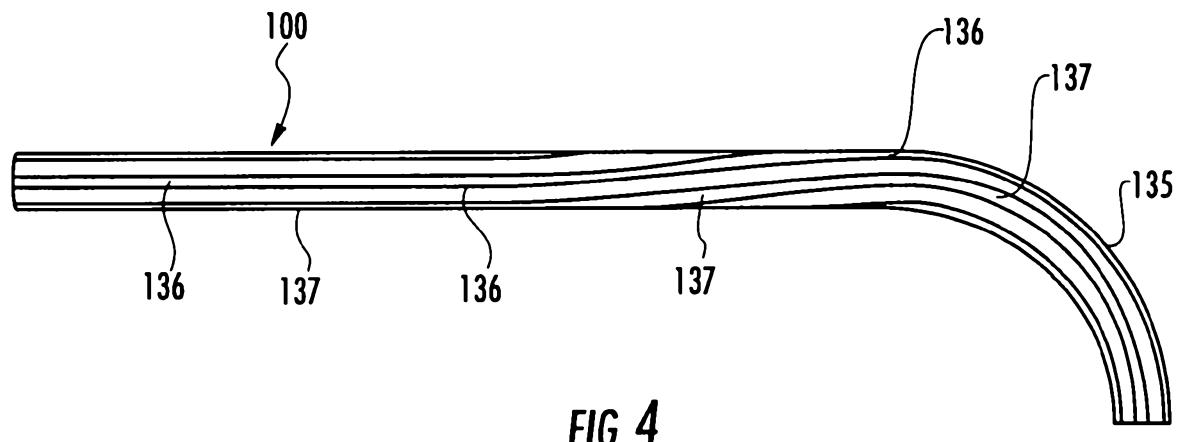
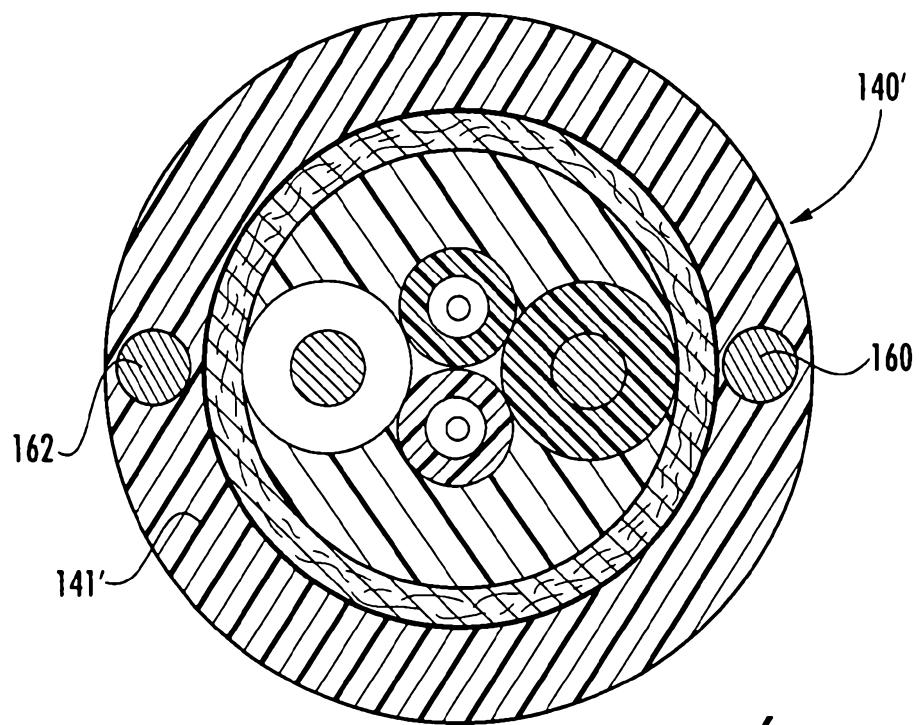
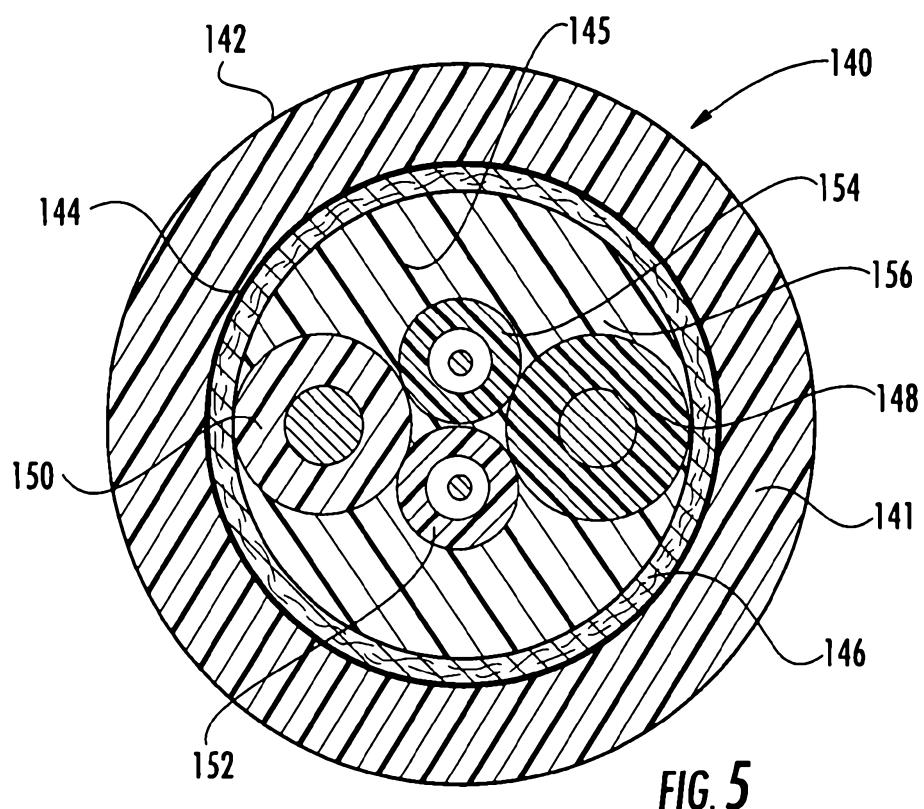


FIG. 4

4/5



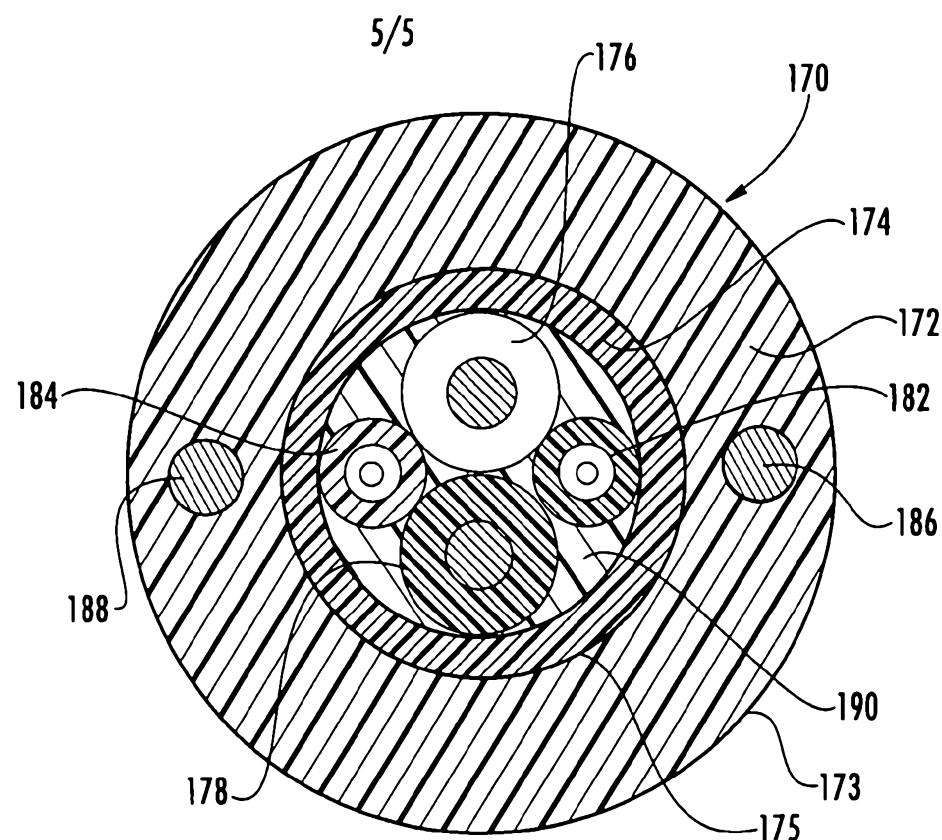


FIG. 7

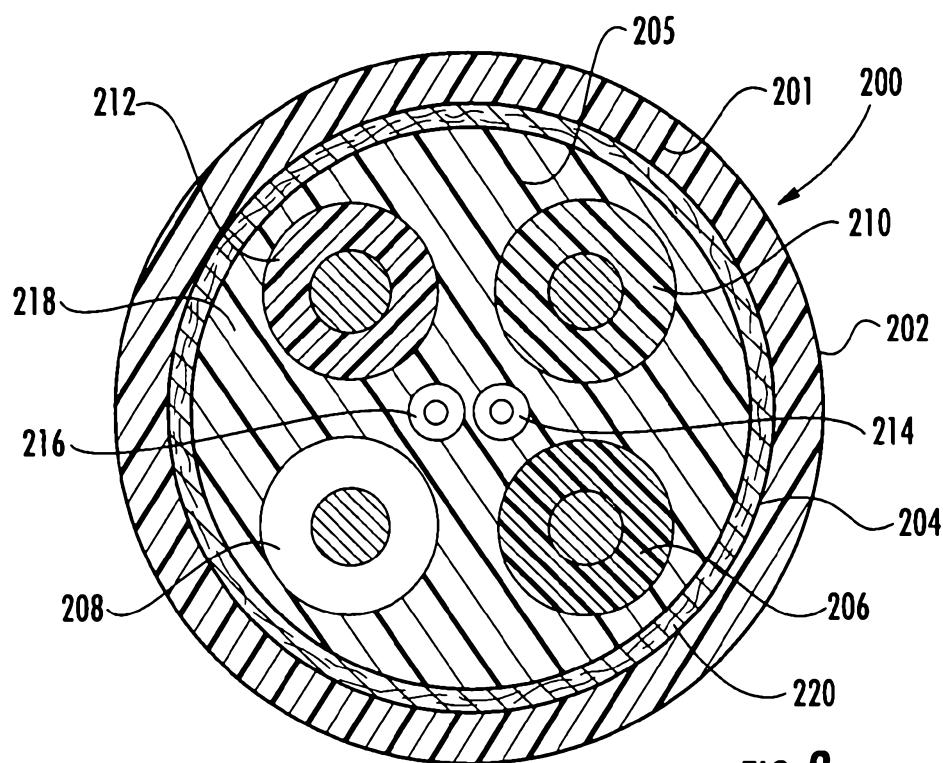


FIG. 8