



(86) **Date de dépôt PCT/PCT Filing Date:** 2012/12/13
(87) **Date publication PCT/PCT Publication Date:** 2013/10/31
(45) **Date de délivrance/Issue Date:** 2016/09/06
(85) **Entrée phase nationale/National Entry:** 2014/10/07
(86) **N° demande PCT/PCT Application No.:** JP 2012/082397
(87) **N° publication PCT/PCT Publication No.:** 2013/161122
(30) **Priorité/Priority:** 2012/04/24 (JP2012-098298)


(51) **Cl.Int./Int.Cl.** **C23C 2/06** (2006.01),
C22C 18/04 (2006.01), **C23C 2/02** (2006.01),
C23C 2/38 (2006.01)

(72) **Inventeurs/Inventors:**
OKAMOTO, KOUICHI, JP;
TAKEBAYASHI, HIROSHI, JP;
SOGA, YOSHITAKA, JP

(73) **Propriétaire/Owner:**
NIPPON STEEL & SUMITOMO METAL
CORPORATION, JP

(74) **Agent:** GOWLING WLG (CANADA) LLP

(54) **Titre : TUBE EN ACIER GALVANISE, ET PROCEDE DE FABRICATION DU TUBE EN ACIER GALVANISE**
(54) **Title: HOT-DIP GALVANIZED STEEL PIPE AND METHOD OF MANUFACTURING THE SAME**

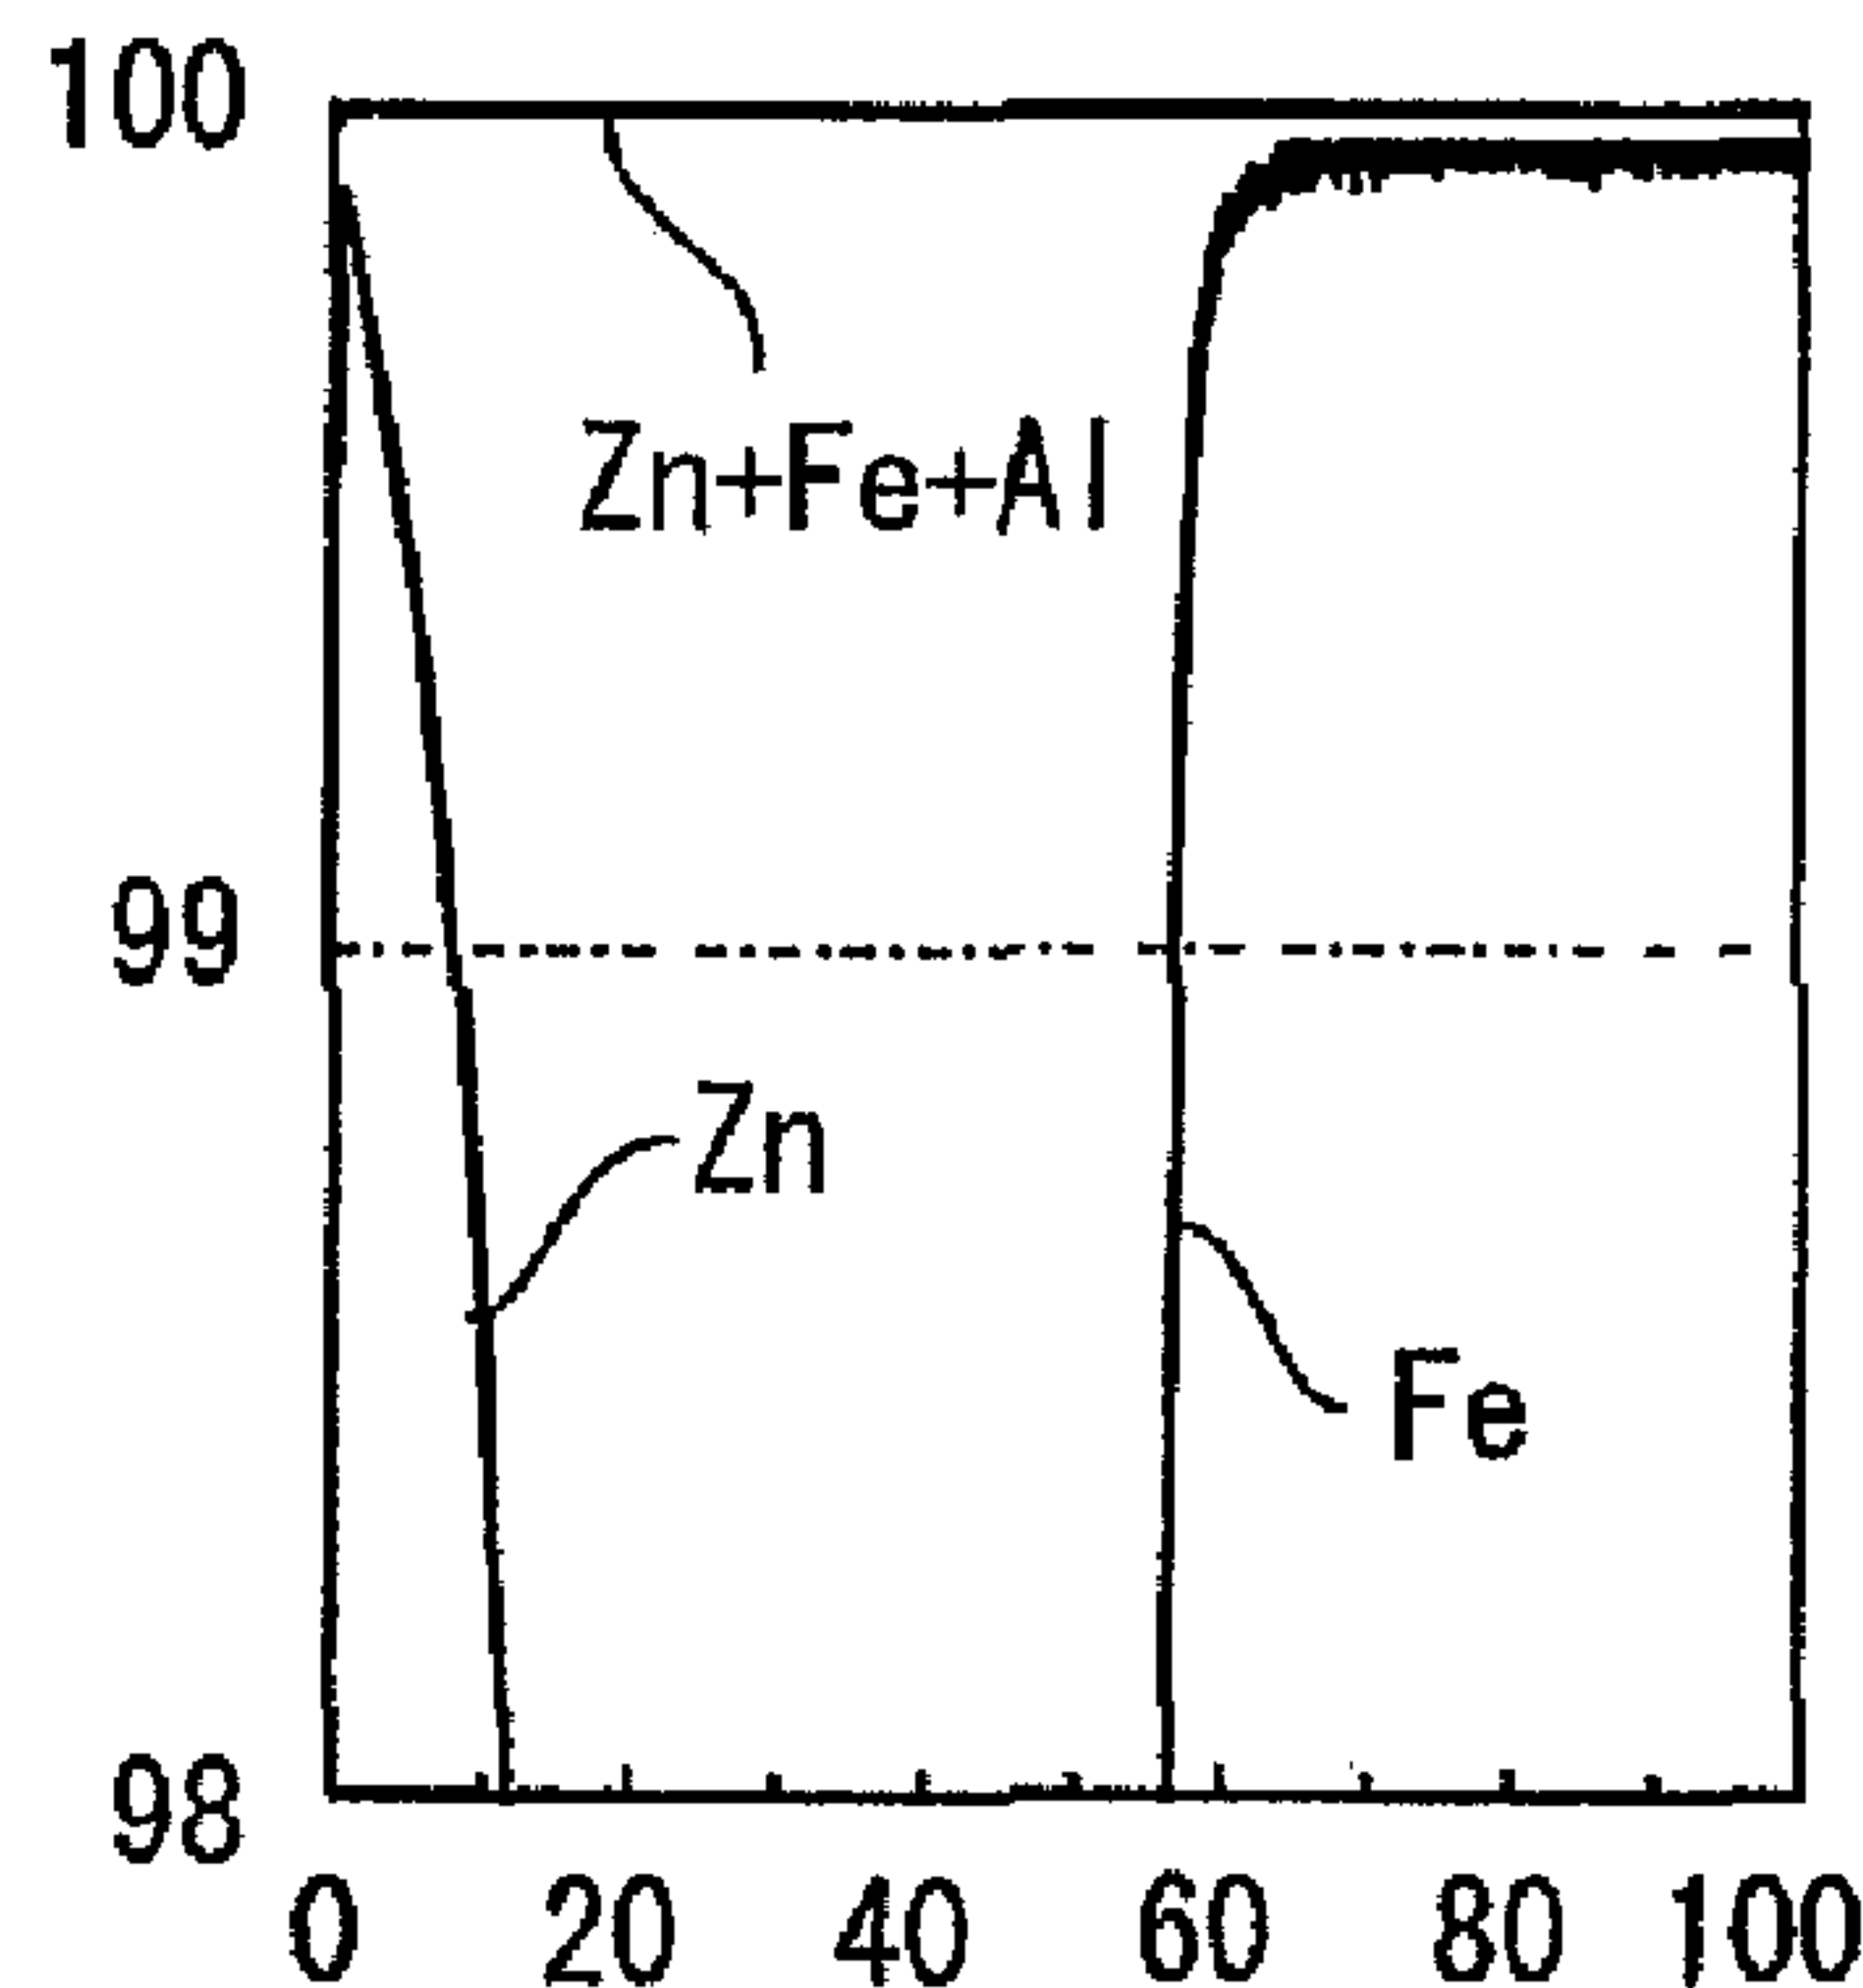

(57) **Abrégé/Abstract:**

There are provided a hot-dip galvanized steel pipe in which the plating layer thereof is less liable to peel off even if the steel pipe is worked, and a method of manufacturing the hot-dip galvanized steel pipe. The hot-dip galvanized steel pipe includes a steel pipe and the plating layer formed on the surface of the steel pipe. Throughout the entire depth of plating layer, the fn defined by the following formula is at least 99.9:

$$f_n = \text{Fe} + \text{Al} + \text{Zn}$$

where, the symbol of an element in the formula represents the content (mass%) of that element in the plating layer.



NSSMC Ref. 12-00617W00
Our Ref. 102-094P1

Abstract

There are provided a hot-dip galvanized steel pipe in which the plating layer thereof is less liable to peel off even if the steel pipe is worked, and a method of manufacturing the hot-dip galvanized steel pipe. The hot-dip galvanized steel pipe includes a steel pipe and the plating layer formed on the surface of the steel pipe. Throughout the entire depth of plating layer, the f_n defined by the following formula is at least 99.9:

$$f_n = \text{Fe} + \text{Al} + \text{Zn}$$

where, the symbol of an element in the formula represents the content (mass%) of that element in the plating layer.

NSSMC Ref. 12-00617WO0

Our Ref. 102-094P1

Description

Title of Invention:

HOT-DIP GALVANIZED STEEL PIPE AND METHOD OF MANUFACTURING
THE SAME

Technical Field

[0001]

The present invention relates to a hot-dip
galvanized steel pipe and a method of manufacturing the
hot-dip galvanized steel pipe.

Background Art

[0002]

The hot-dip galvanization has been used widely as a
technique for improving the corrosion resistance of a
steel material.

[0003]

JP2009-221601A, JP2009-221604A, JP2009-197328A,
JP2011-26630A, and JP2009-221605A describe methods of
manufacturing a hot-dip galvanized material in which,
even if a molten zinc bath in which the content of Pb is
restrained to at most 0.1 mass% and the content of Cd is
restrained to at most 0.01 mass% is used in conformity to
the RoHS instructions, poor plating occurs infrequently.
In the methods of manufacturing a hot-dip galvanized
material described in these Patent Documents, a metal

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

such as Sn, Sb, Bi, or In is added to the molten zinc bath in minute amounts.

[0004]

JP2006-307316A describes a hot-dip galvanizing bath composition for forming a galvanizing film on the surface of a steel material by means of a dipping process. The hot-dip galvanizing bath composition consists of 0.01 to 0.05 wt% of Ni, 0.001 to 0.01 wt% of Al, and 0.01 to 0.08 wt% of Bi, the balance being Zn and unavoidable impurities, and not containing Pb.

[0005]

JP2011-26632A describes a hot-dip galvanized steel material in which the composition of the plating layer contains at most 0.010 mass% of Pb and 0.04 to 0.50 mass% of Sb.

[0006]

JP10-140316A describes a method of manufacturing a hot-dip galvanized steel material in which a steel plate, which is plated by using a hot-dip galvanizing bath containing 0.1 to 0.3 wt% of Al and at most 0.01 wt% in total of Pb, Sn, Cd and Sb as impurities, is subjected to rolling with a rolling weight of 50 to 500 tons per 1 m width of steel plate that is in contact with a roll.

[0007]

JP2011-89175A describes a hot-dip galvanized steel pipe in which the lead concentration in a hot-dip galvanizing film is at most 0.1 mass%, the cadmium concentration therein is at most 0.01 mass%, and the

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Vickers hardness of an alloy layer part of the hot-dip galvanizing film is at most 110 Hv.

Disclosure of the Invention

[0008]

In recent years, with the wide use of flaring, the improvement of the workability of a hot-dip galvanized steel pipe has been demanded. Flaring is a treatment in which the opening part in the end portion of steel pipe is spread toward the outside to form a ring-shaped flare (collar).

[0009]

When the hot-dip galvanized steel pipe is subjected to flaring, the plating layer is liable to peel off. As a method of reducing the peeling-off of plating layer, it has been known to use a thinner plating layer. With a thinner plating layer, the strain applied to the plating layer at the time of working decreases. However, if the plating layer is made thin, predetermined corrosion resistance cannot be achieved in some cases.

[0010]

JP2009-221601A, JP2009-221604A, JP2009-197328A, JP2011-26630A, JP2009-221605A, JP2006-307316A, and JP2011-26632A do not describe the tendency of peeling-off of the plating layer at the time of working.

[0011]

In the method of manufacturing a hot-dip galvanized steel plate described in JP10-140316A, a large amount of

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Al is added to the hot-dip galvanizing bath. When a large amount of Al is added to the hot-dip galvanizing bath, poor plating is liable to occur on account of oxides of Al. Therefore, in the case where a large amount of Al is added, the atmosphere must be controlled throughout the entire process to prevent oxides from being formed on the surface of steel material and on the surface of hot-dip galvanizing bath. However, in the process of manufacturing a hot-dip galvanized steel pipe, it is difficult to carry out such control.

[0012]

The hot-dip galvanized steel pipe described in JP2011-89175A must be subjected to a special treatment to decrease the hardnesses of alloy layer and solidified zinc layer of the hot-dip galvanizing film.

[0013]

An object of the present invention is to provide a hot-dip galvanized steel pipe in which the plating layer is less liable to peel off even if the steel pipe is worked, and a method of manufacturing the hot-dip galvanized steel pipe.

[0014]

The hot-dip galvanized steel pipe in accordance with the present invention includes a steel pipe and a plating layer formed on the surface of the steel pipe, wherein throughout the entire depth of plating layer, the fn defined by the following formula is at least 99.9:

$$fn = Fe + Al + Zn$$

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

where, the symbol of an element in the above formula represents the content in mass% of that element in the plating layer.

[0015]

The method of manufacturing a hot-dip galvanized steel pipe in accordance with the present invention includes a step of dipping a material pipe in a hot-dip galvanizing bath, wherein the hot-dip galvanizing bath contains 0.002 to 0.01 mass% of Al, the balance being Zn and impurities, and the total content of Pb, Sn, Cd, Sb, Bi, Cu, Ni, and In of the impurities is at most 0.1 mass%.

[0016]

In the hot-dip galvanized steel pipe, and in the hot-dip galvanized steel pipe manufactured by the method of manufacturing the hot-dip galvanized steel pipe, the plating layer is less liable to peel off even if the steel pipe is worked.

Brief Description of the Drawings

[0017]

[Figure 1A] Figure 1A is a scanning electron micrograph enlargedly showing a plating layer including a Zn layer having a low purity.

[Figure 1B] Figure 1B is a scanning electron micrograph enlargedly showing a plating layer including a Zn layer having a high purity.

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

[Figure 2] Figure 2 is a flow diagram of a method of manufacturing a hot-dip galvanized steel pipe in accordance with one embodiment of the present invention.

[Figure 3A] Figure 3A is a graph showing an element distribution in a plating layer of a hot-dip galvanized steel pipe manufactured by using a hot-dip galvanizing bath of a certain condition.

[Figure 3B] Figure 3B is a graph showing an element distribution in a plating layer of a hot-dip galvanized steel pipe manufactured by using a hot-dip galvanizing bath of another condition.

[Figure 3C] Figure 3C is a graph showing an element distribution in a plating layer of a hot-dip galvanized steel pipe manufactured by using a hot-dip galvanizing bath of still another condition.

[Figure 3D] Figure 3D is a graph showing an element distribution in a plating layer of a hot-dip galvanized steel pipe manufactured by using a hot-dip galvanizing bath of yet another condition.

[Figure 4A] Figure 4A is an optical micrograph of a longitudinal cross section of a flared part of a hot-dip galvanized steel pipe manufactured by using a hot-dip galvanizing bath of a certain condition.

[Figure 4B] Figure 4B is an optical micrograph of a longitudinal cross section of a flared part of a hot-dip galvanized steel pipe manufactured by using a hot-dip galvanizing bath of another condition.

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Mode for Carrying Out the Invention

[0018]

[Hot-dip galvanized steel pipe]

The present inventors studied the workability of a hot-dip galvanized steel pipe, and obtained the findings described below. The plating layer includes a Zn-Fe alloy layer formed at the interface with a base metal, and a Zn layer (η layer) formed on the surface. Of these layers, the Zn-Fe alloy layer has a low ductility. In the Zn-Fe alloy layer, therefore, cracking is liable to occur on account of bending work such as flaring. If a crack generated in the Zn-Fe alloy layer propagates to the Zn layer on the surface, the plating layer peels off.

[0019]

If a dissimilar metal has mixedly entered into the Zn layer, the crack is further liable to propagate. Therefore, if a dissimilar metal has mixedly entered into the Zn layer, the plating layer is liable to peel off. In other words, by enhancing the purity of Zn layer, the plating layer can be restrained from peeling off, and the workability of the hot-dip galvanized steel pipe can be improved.

[0020]

Figure 1A is a scanning electron micrograph of the plating layer including the Zn layer having a low purity. Figure 1B is a scanning electron micrograph of the plating layer including the Zn layer having a high purity. As shown in Figure 1A, in the plating layer including the

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Zn layer having a low purity, a crack generated in the Fe-Zn alloy layer propagates to the Zn layer on the surface. On the other hand, as shown in Figure 1B, in the plating layer including the Zn layer having a high purity, a crack generated in the Fe-Zn alloy layer stops at the Zn layer on the surface.

[0021]

The present inventors found that if the f_n defined by Formula (1) is at least 99.9 throughout the entire depth of plating layer, the plating layer of the hot-dip galvanized steel pipe is less liable to peel off:

$$f_n = \text{Fe} + \text{Al} + \text{Zn} \quad \dots (1)$$

where, the symbol of an element in Formula (1) represents the content (mass%) of that element in the plating layer.

[0022]

The f_n is measured by the following method. In an arbitrary region (discharge area: 4-mm dia, hereinafter referred to as a specific region) of the plating layer of the hot-dip galvanized steel pipe, the element analysis in the depth direction is made by using a Markus type high frequency glow discharge optical emission spectroscopic apparatus (manufactured by Horiba, Ltd., GD-Profiler2). The measurement conditions at this time are as given in Table 1. Thereby, the element distribution in the entire depth of the specific region can be obtained. Based on the obtained element distribution, the value f_n at each depth (f_n distribution) is determined.

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

[0023]

[Table 1]

TABLE 1

Discharge area		4-mm diameter
RF output		35 W
Argon pressure		600 Pa
Measurement depth		To 200 μm
Measurement intervals	Early stage 60 sec	0.02 sec intervals
	Subsequently	0.50 sec intervals

[0024]

In the present invention, in the obtained fn distribution, each of the values fn is at least 99.9.

[0025]

The fn involves iron (Fe). Fe is alloyed with zinc to form the Zn-Fe alloy layer. Therefore, a large amount of Fe is contained in the plating layer. However, the Zn-Fe alloy layer is present separately from the Zn layer. Therefore, Fe does not mixedly enter into the Zn layer. For this reason, even if the plating layer contains iron, the workability of the hot-dip galvanized steel pipe does not decrease.

[0026]

The fn involves aluminum (Al). Al improves the flowability of hot-dip galvanizing bath. If Al is contained in the hot-dip galvanizing bath, Al is also contained in the plating layer of the hot-dip galvanized steel pipe. However, Al is present concentratedly at a depth of about one micron from the plating surface. Therefore, even if the plating layer contains Al, the

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

workability of hot-dip galvanized steel pipe does not decrease.

[0027]

As described above, if the fn is at least 99.9 throughout the entire depth of plating layer, the plating layer is less liable to peel off even if working such as flaring is performed.

[0028]

The hot-dip galvanized steel pipe can be manufactured by dipping a material pipe in a hot-dip galvanizing bath that contains 0.002 to 0.01 mass% of Al, the balance being Zn and impurities, wherein the total content of Pb, Sn, Cd, Sb, Bi, Cu, Ni, and In of the impurities is at most 0.1 mass%.

[0029]

Hereunder, a method of manufacturing a hot-dip galvanized steel pipe in accordance with one embodiment of the present invention is described in detail.

[0030]

Figure 2 is a flow diagram of the method of manufacturing a hot-dip galvanized steel pipe in accordance with one embodiment of the present invention. The method of manufacturing a hot-dip galvanized steel pipe includes a step of degreasing a material pipe (step S1), a step of pickling the degreased material pipe (step S2), a step of flux-treating the pickled material pipe (step S3), a step of plating the flux-treated material

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

pipe (step S4), and a step of cooling the plated steel pipe (step S5).

[0031]

First, a material pipe to be plated is prepared. As the material pipe, any steel pipe can be used. The material pipe is, for example, an SGP steel pipe specified in JIS G3452 or an STPG steel pipe specified in JIS G3454. As the SGP steel pipe and the STPG steel pipe, any of an electric-resistance welded pipe, a butt welded pipe, and a seamless pipe may be used.

[0032]

Next, the material pipe is dipped in a degreasing solution and is degreased (step S1). The degreasing is, for example, alkali degreasing or solvent degreasing. Thereby, oils sticking to the surface of material pipe are removed. Thereafter, the material pipe is washed by water to remove the sticking degreasing solution.

[0033]

Next, the degreased material pipe is dipped in a pickling solution and is pickled (step S2). The pickling solution is sulfuric acid of 5 to 20 mass%. It is preferable that the sulfuric acid be heated for use to a temperature of at least 65°C.

[0034]

To reduce the overpickling of material pipe and the grain boundary corrosion, a proper amount of acid corrosion inhibitor (inhibitor) may be contained in the pickling solution. The pickling time is, for example, 10

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

to 60 minutes. Thereby, scale on the surface of material pipe is removed. Thereafter, the material pipe is washed by water to remove the sticking pickling solution.

[0035]

Next, the pickled material pipe is flux-treated by a flux solution (step S3). In the flux treatment, the material pipe is dipped in the flux solution. As the flux solution, an aqueous solution of zinc chloride and ammonium chloride is used. The quantity ratio (mole ratio) of zinc chloride and ammonium chloride is preferably 1:1 to 1:5, further preferably 1:2 to 1:4.

[0036]

The flux solution is heated for use to a temperature of 70 to 90°C. As the flux solution, a flux solution having a high concentration of at least 500 g/L is preferably used. The concentration of flux solution is further preferably at least 600 g/L, and is in the range to saturation. The flux concentration (g/L) is represented by the ratio of the total mass (g) of the contained zinc chloride and ammonium chloride to one liter (L) of water.

[0037]

By the flux treatment, a flux film is formed on the material pipe. The flux film protects the surface of material pipe, and prevents zinc oxide from being involved at the time of plating and prevents poor plating from occurring.

[0038]

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Thereafter, the material pipe is dried. If moisture remains on the material pipe, the moisture vaporizes when it comes into contact with the hot-dip galvanizing bath, and scatters molten zinc, causing the occurrence of poor plating. To improve the draining of flux solution, a surface active agent is preferably contained in the flux solution. Also, by containing the surface active agent, the flux film is easily formed in a uniform manner. The surface active agent is, for example, lauryl trimethyl ammonium chloride, cetyl trimethyl ammonium chloride, or stearyl trimethyl ammonium chloride.

[0039]

If the content of surface active agent is too low, the above-described effects cannot be achieved. Therefore, the lower limit of the concentration of surface active agent in the flux solution is 0.05 mass%. The concentration of surface active agent is preferably higher than 0.05 mass%. The lower limit of the concentration of surface active agent is further preferably 0.10 mass%. On the other hand, if the content of surface active agent is too high, the effects are saturated, and the surface active agent acts as an impurity, whereby poor plating is rather increased. Therefore, the concentration of surface active agent is preferably lower than 0.3 mass%, further preferably lower than 0.2 mass%.

[0040]

NSSMC Ref. 12-00617WO0

Our Ref. 102-094P1

Next, the flux-treated material pipe is dipped in a hot-dip galvanizing bath and is plated (step S4). The hot-dip galvanizing bath used in this embodiment contains 0.002 to 0.01 mass% of Al, the balance being Zn and impurities, wherein the total content of Pb, Sn, Cd, Sb, Bi, Cu, Ni, and In of the impurities is at most 0.1 mass%.

[0041]

Aluminum (Al) improves the flowability of hot-dip galvanizing bath. If the content of Al in the hot-dip galvanizing bath is too low, the gloss of plating surface decreases. Therefore, the lower limit of Al content is 0.002 mass%. The Al content is preferably more than 0.002 mass%. The lower limit of Al content is further preferably 0.005 mass%. On the other hand, if the content of Al in the hot-dip galvanizing bath is too high, the effect of flux treatment is diminished, and poor plating occurs. Therefore, the upper limit of Al content is preferably 0.01 mass%.

[0042]

Of the impurities in the hot-dip galvanizing bath, lead (Pb), tin (Sn), cadmium (Cd), antimony (Sb), bismuth (Bi), copper (Cu), nickel (Ni), and indium (In) mixedly enter into the Zn layer of plating layer of the hot-dip galvanized steel pipe, causing the plating layer to peel off easily. Therefore, the total content of these elements is preferably at most 0.1 mass%.

[0043]

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

The temperature of the hot-dip galvanizing bath is, for example, 450 to 480°C. The time period for dipping the material pipe in the hot-dip galvanizing bath is, for example, 30 to 300 seconds. The temperature of the hot-dip galvanizing bath and the time period for dipping the material pipe in the hot-dip galvanizing bath are controlled according to the thickness of plating layer.

[0044]

After having been dipped for a predetermined time period, the material pipe is pulled up from the hot-dip galvanizing bath. The material pipe is held above the hot-dip galvanizing bath for a certain time period so that surplus molten zinc sticking to the material pipe runs down. At this time, the surplus molten zinc may be removed by blowing compressed air or steam.

[0045]

Finally, the plated steel pipe is cooled (step S5). The cooling may be air cooling, water cooling, or oil cooling. In the case of water cooling, warm water having a temperature of 40 to 80°C is used.

[0046]

Through the above-described steps, the hot-dip galvanized steel pipe is manufactured.

[0047]

For the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath, the fn defined by Formula (1) is at least 99.9 throughout the entire depth of plating layer. Therefore, even if the hot-dip

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

galvanized steel pipe is subjected to flaring, the plating layer is less liable to peel off.

[0048]

The method of manufacturing the hot-dip galvanized steel pipe in accordance with this embodiment is preferably such that (A) in the pickling step (step S2), the material pipe is pickled by sulfuric acid having a temperature of at least 65°C, and (B) in the flux-treating step (step S3), the flux treatment is performed by using a flux solution containing at least 600 g/L in total of at least one of zinc chloride and ammonium chloride and 0.05 to 0.3 mass% of the surface active agent.

[0049]

In the hot-dip galvanizing bath in accordance with this embodiment, the total content of Pb, Sn, Cd, Sb, Bi, Cu, Ni, and In is at most 0.1 mass%. These elements improve the flowability of the hot-dip galvanizing bath. Therefore, if plating is performed by using the hot-dip galvanizing bath in accordance with this embodiment, poor plating is liable to occur.

[0050]

Accordingly, by performing the preparations meeting the conditions of (A) and (B), the reactivity of the surface of material pipe is improved. Thereby, even if plating is performed by using the hot-dip galvanizing bath containing small amounts of impurities as in this embodiment, the occurrence of poor plating can be reduced.

NSSMC Ref. 12-00617WO0
Our Ref. 102-094P1

[0051]

This effect is thought to be based on the following action. First, by the pickling using high-temperature sulfuric acid, the formation of smut on the surface of material pipe is reduced, and a proper surface roughness is obtained. Incidentally, the smut is a ferric salt insoluble in acid, and sticks in black to the pipe surface after pickling. Thereby, a large amount of flux can be dispersed uniformly on the surface of material pipe. By dispersing a large amount of flux uniformly, even if plating is performed by using the hot-dip galvanizing bath containing small amounts of impurities, the occurrence of poor plating can be reduced. Concerning hydrochloric acid, although it has an effect of reducing the smut, it is poor in reactivity as compared with high-temperature sulfuric acid. Consequently, it is thought that some metal oxides remain on the surface in a state before pickling without reacting, and may cause poor plating.

Example 1

[0052]

In the following, the present invention is explained more specifically with reference to Examples. These examples by no means restrict the present invention.

[0053]

[Composition analysis test of plating layer]

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Hot-dip galvanized steel pipes were produced by using a plurality of hot-dip galvanizing baths. Then, the composition analysis of the plating layer of each of the hot-dip galvanized steel pipes was made.

[0054]

As a material pipe, an SGP steel pipe (C: 0.05 mass%, Si: 0.19 mass%, Mn: 0.34 mass%, electric-resistance welded pipe, outside diameter: 139.8 mm) was used. As shown in Figure 2, the degreasing, pickling, and flux treatment of material pipe were performed. As the conditions of pickling treatment, pickling condition 2 of the later-described Example 2 was employed, and as the conditions of flux treatment, fluxing condition 2 of the later-described Example 2 was employed. The flux-treated material pipes were dipped in four kinds of hot-dip galvanizing baths and was plated. Table 2 gives the contents (unit: mass%) of Fe, Al, Pb, Sn, Cd, Sb, Bi, Cu, Ni, and In of each of the hot-dip galvanizing baths (conditions 1 to 4). The balance of composition was Zn and impurities. In the "amounts of impurities" column in Table 2, the total value of the contents of Pb, Sn, Cd, Sb, Bi, Cu, Ni, and In was described.

[0055]

[Table 2]

NSSMC Ref. 12-00617W00
Our Ref. 102-094P1

TABLE 2

Composition of hot-dip galvanizing bath (unit: mass%, balance being zinc and impurities)												Amounts of impurities
	Fe	Al	Pb	Sn	Cd	Sb	Bi	Cu	Ni	In		
Condition 1	0.06	0.003	1.17	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	1.17	
Condition 2	0.022	0.0041	0.12	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	0.12	
Condition 3	0.02	0.0045	0.022	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	0.02	
Condition 4	0.05	0.005	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.008	

[0056]

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

The temperature of the hot-dip galvanizing bath was 465°C. Each of the material pipes was dipped in the hot-dip galvanizing bath for 60 seconds. The coating weight of a hot-dip galvanized steel pipe was about 500 g/m².

[0057]

For the hot-dip galvanized steel pipe manufactured by using each of the hot-dip galvanizing baths, the composition analysis of plating layer was made. As described before, the composition analysis of plating layer was made under the conditions given in Table 1 by using the Markus type high frequency glow discharge optical emission spectroscopic apparatus (manufactured by Horiba, Ltd., GD-Profiler2).

[0058]

The analysis results are shown in Figures 3A to 3D. Figures 3A to 3D are graphs showing element distributions in the depth directions of plating layers of the hot-dip galvanized steel pipes manufactured by using the hot-dip galvanizing baths, Figure 3A being a graph resulting from condition 1, Figure 3B being a graph from condition 2, Figure 3C being a graph from condition 3, and Figure 4D being a graph from condition 4. The abscissas in each graph of Figures 3A to 3D represents the distance (μm) in the depth direction from the surface of plating layer. The ordinates in each graph of Figures 3A to 3D represents the content (wt%) of Zn, the content (wt%) of Fe, and the total value of the contents of Zn, Fe, and Al

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

(Zn + Fe + Al = fn, wt%) of the composition of plating layer in each depth represented by the abscissas.

[0059]

As shown in Figures 3A to 3D, when the amounts of impurities in the hot-dip galvanizing bath decreased, the fn increased throughout the entire depth of plating layer of the hot-dip galvanized steel pipe. As shown in Figures 3C and 3D, in condition 3 and condition 4, the fn was at least 99.9 at every depth of plating layer of the hot-dip galvanized steel pipe. On the other hand, as shown in Figures 3A and 3B, in condition 1 and condition 2, the fn was less than 99.9 at some depths of plating layer of the hot-dip galvanized steel pipe.

[0060]

[Flaring test]

The hot-dip galvanized steel pipes manufactured by using the hot-dip galvanizing baths of conditions 1 to 4 were subjected to flaring. Further, each of the flared hot-dip galvanized steel pipes was sliced in parallel with the axial direction, and the longitudinal cross section of the flared part was observed.

[0061]

For the hot-dip galvanized steel pipes manufactured by using the hot-dip galvanizing baths of conditions 1 and 2, the floating and peeling-off of plating layer occurred in large numbers on account of flaring. On the other hand, for the hot-dip galvanized steel pipes manufactured by using the hot-dip galvanizing baths of

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

conditions 3 and 4, even if flaring was performed, the peeling-off of plating layer did not occur.

[0062]

Figure 4A is an optical micrograph of a longitudinal cross section of the flared part of the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath of condition 1. Figure 4B is an optical micrograph of a longitudinal cross section of the flared part of the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath of condition 4.

Figure 1A is a scanning electron micrograph enlargedly showing the plating layer of the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath of condition 1. Figure 1B is a scanning electron micrograph enlargedly showing the plating layer of the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath of condition 4.

[0063]

As shown in Figure 4A, for the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath of condition 1, the floating and peeling-off of plating layer occurred in large numbers on account of flaring. On the other hand, as shown in Figure 4B, for the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath of condition 4, even if flaring was performed, the peeling-off of plating layer did not occur.

[0064]

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

As shown in Figure 1A, in the plating layer of the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath of condition 1, a crack generated in the Fe-Zn alloy layer propagated to the Zn layer on the surface. On the other hand, as shown in Figure 1B, in the plating layer of the hot-dip galvanized steel pipe manufactured by using the hot-dip galvanizing bath of condition 4, a crack generated in the Fe-Zn alloy layer stopped at the Zn layer on the surface.

Example 2

[0065]

[Examination of pickling conditions and fluxing conditions]

Plating was performed by changing the pickling conditions and fluxing conditions, and the presence and absence of poor plating were examined. The plating conditions were the same as the conditions under which the hot-dip galvanized steel pipe was manufactured in the composition analysis test of plating layer. As the hot-dip galvanizing bath, the hot-dip galvanizing bath of condition 4 in Table 2 was used.

[0066]

As a material pipe, an SGP steel pipe (C: 0.05 mass%, Si: 0.19 mass%, Mn: 0.34 mass%, electric-resistance welded pipe, outside diameter: 139.8 mm) was used. The degreasing, pickling, and flux treatment of material pipe were performed. First, examination was conducted by

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

fixing the fluxing conditions and by changing the pickling conditions.

[0067]

Table 3 gives the pickling conditions (pickling conditions 1 to 4), and the foaming during pickling, appearance after pickling, appearance after flux treatment (after flux drying), and appearance after plating under each of the pickling conditions. The fluxing conditions were as described below. As a flux solution, an aqueous solution containing 625 g/L of a 1:3 mixture of zinc chloride and ammonium chloride and 0.2 mass% of a surface active agent was used. The pickled material pipe was dipped in the flux solution heated to a temperature of 75°C. The material pipe having been dipped in the flux solution was dried in a 180°C atmosphere for five minutes. For the material pipe on which smut had been produced by pickling, the flux treatment was performed after the smut had been removed. After plating, the plated material pipe was air-cooled, whereby a hot-dip galvanized steel pipe was manufactured.

[0068]

[Table 3]

NSSMC Ref. 12-00617W00
Our Ref. 102-094P1

TABLE 3

	Pickling condition 1	Pickling condition 2	Pickling condition 3	Pickling condition 4
Acid type	Sulfuric acid	Sulfuric acid	Hydrochloric acid	Hydrochloric acid
Acid concentration (mass%)	12.5	17.5	10.0	10.0
Inhibitor name	IBIT-600L-7	IBIT-600L-7	IBIT-700BK	IBIT-700BK
Inhibitor concentration (mass%)	0.05	0.05	0.1	0.1
Pickling temperature (°C)	60	80	20	40
Pickling time (min)	15	15	15	30
Appearance after plating	Poor plating present	Poor plating absent	Poor plating in large numbers	Poor plating present

[0069]

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

As given in Table 3, on the material pipe pickled under pickling condition 1, poor plating occurred. The cause for this is thought to be that the pickling temperature was low.

[0070]

On the material pipe pickled under pickling condition 2, poor plating did not occur.

[0071]

On the material pipes pickled under pickling conditions 3 and 4, poor plating occurred. The cause for this is thought to be that the pickling was performed by using hydrochloric acid.

[0072]

Next, examination was conducted by fixing the pickling conditions to pickling condition 2 of Table 3 and by changing the fluxing conditions.

[0073]

Table 4 gives the fluxing conditions (fluxing conditions 1 to 4), and the presence and absence of undissolved chemical agent, appearance after flux drying, and appearance after plating under each of the fluxing conditions. As a flux solution, an aqueous solution containing a 1:3 mixture of zinc chloride and ammonium chloride was used. In the "Undissolved chemical agent" column in Table 4, the presence and absence of undissolved part of this mixture were described. The pickled material pipe was dipped in the flux solution heated to a temperature of 75°C. The material pipe

NSSMC Ref. 12-00617W00
Our Ref. 102-094P1

having been dipped in the flux solution was dried in a
180°C atmosphere for five minutes.

[0074]

[Table 4]

NSSMC Ref. 12-00617W00
Our Ref. 102-094P1

TABLE 4

	Fluxing condition 1	Fluxing condition 2	Fluxing condition 3	Fluxing condition 4
Flux concentration (g/L)	200	625	900	625
Surface active agent concentration (mass%)	0.2	0.2	0.2	No surface active agent
Undissolved chemical agent	Absent	Absent	Present	Absent
Appearance after plating	Poor plating present	Poor plating absent	Poor plating absent	Poor plating in large numbers

[0075]

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

As given in Table 4, on the material pipe flux-treated under fluxing condition 1, poor plating occurred. The cause for this is thought to be that the flux concentration was low.

[0076]

On the material pipes flux-treated under fluxing conditions 2 and 3, poor plating did not occur.

[0077]

On the material pipe flux-treated under fluxing condition 4, poor plating occurred. The cause for this is thought to be that no surface active agent was contained.

Industrial Applicability

[0078]

The present invention can be used on an industrial basis as a hot-dip galvanized steel pipe in which the plating layer thereof is less liable to peel off, and as a method of manufacturing the hot-dip galvanized steel pipe.

What is claimed is:

[Claim 1]

A method of manufacturing a hot-dip galvanized steel pipe, comprising:
a step of pickling a material pipe by means of sulfuric acid having a temperature of at least 65°C;
a step of treating the pickled material pipe by means of a flux solution; and
a step of dipping the treated material pipe in a hot-dip galvanizing bath,
wherein the flux solution containing at least 600 g/L in total of at least one of zinc chloride and ammonium chloride and 0.05 to 0.3 mass% of surface active agent,
the hot-dip galvanizing bath contains 0.002 to 0.01 mass% of Al, the balance being Zn and impurities, and
a total content of Pb, Sn, Cd, Sb, Bi, Cu, Ni, and In of the impurities is at most 0.1 mass%.

[Claim 2]

The method of manufacturing a hot-dip galvanized steel pipe according to claim 1, wherein, in the step of pickling, the concentration of sulfuric acid is in the range of 5 to 20 mass% and the time of pickling is in a range of 10 to 60 minutes.

[Claim 3]

The method of manufacturing a hot-dip galvanized steel pipe according to claim 1 or 2, wherein the surface active agent is selected from the group consisting of lauryl trimethyl ammonium chloride, cetyl trimethyl ammonium chloride, and stearyl trimethyl ammonium chloride.

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Fig. 1A

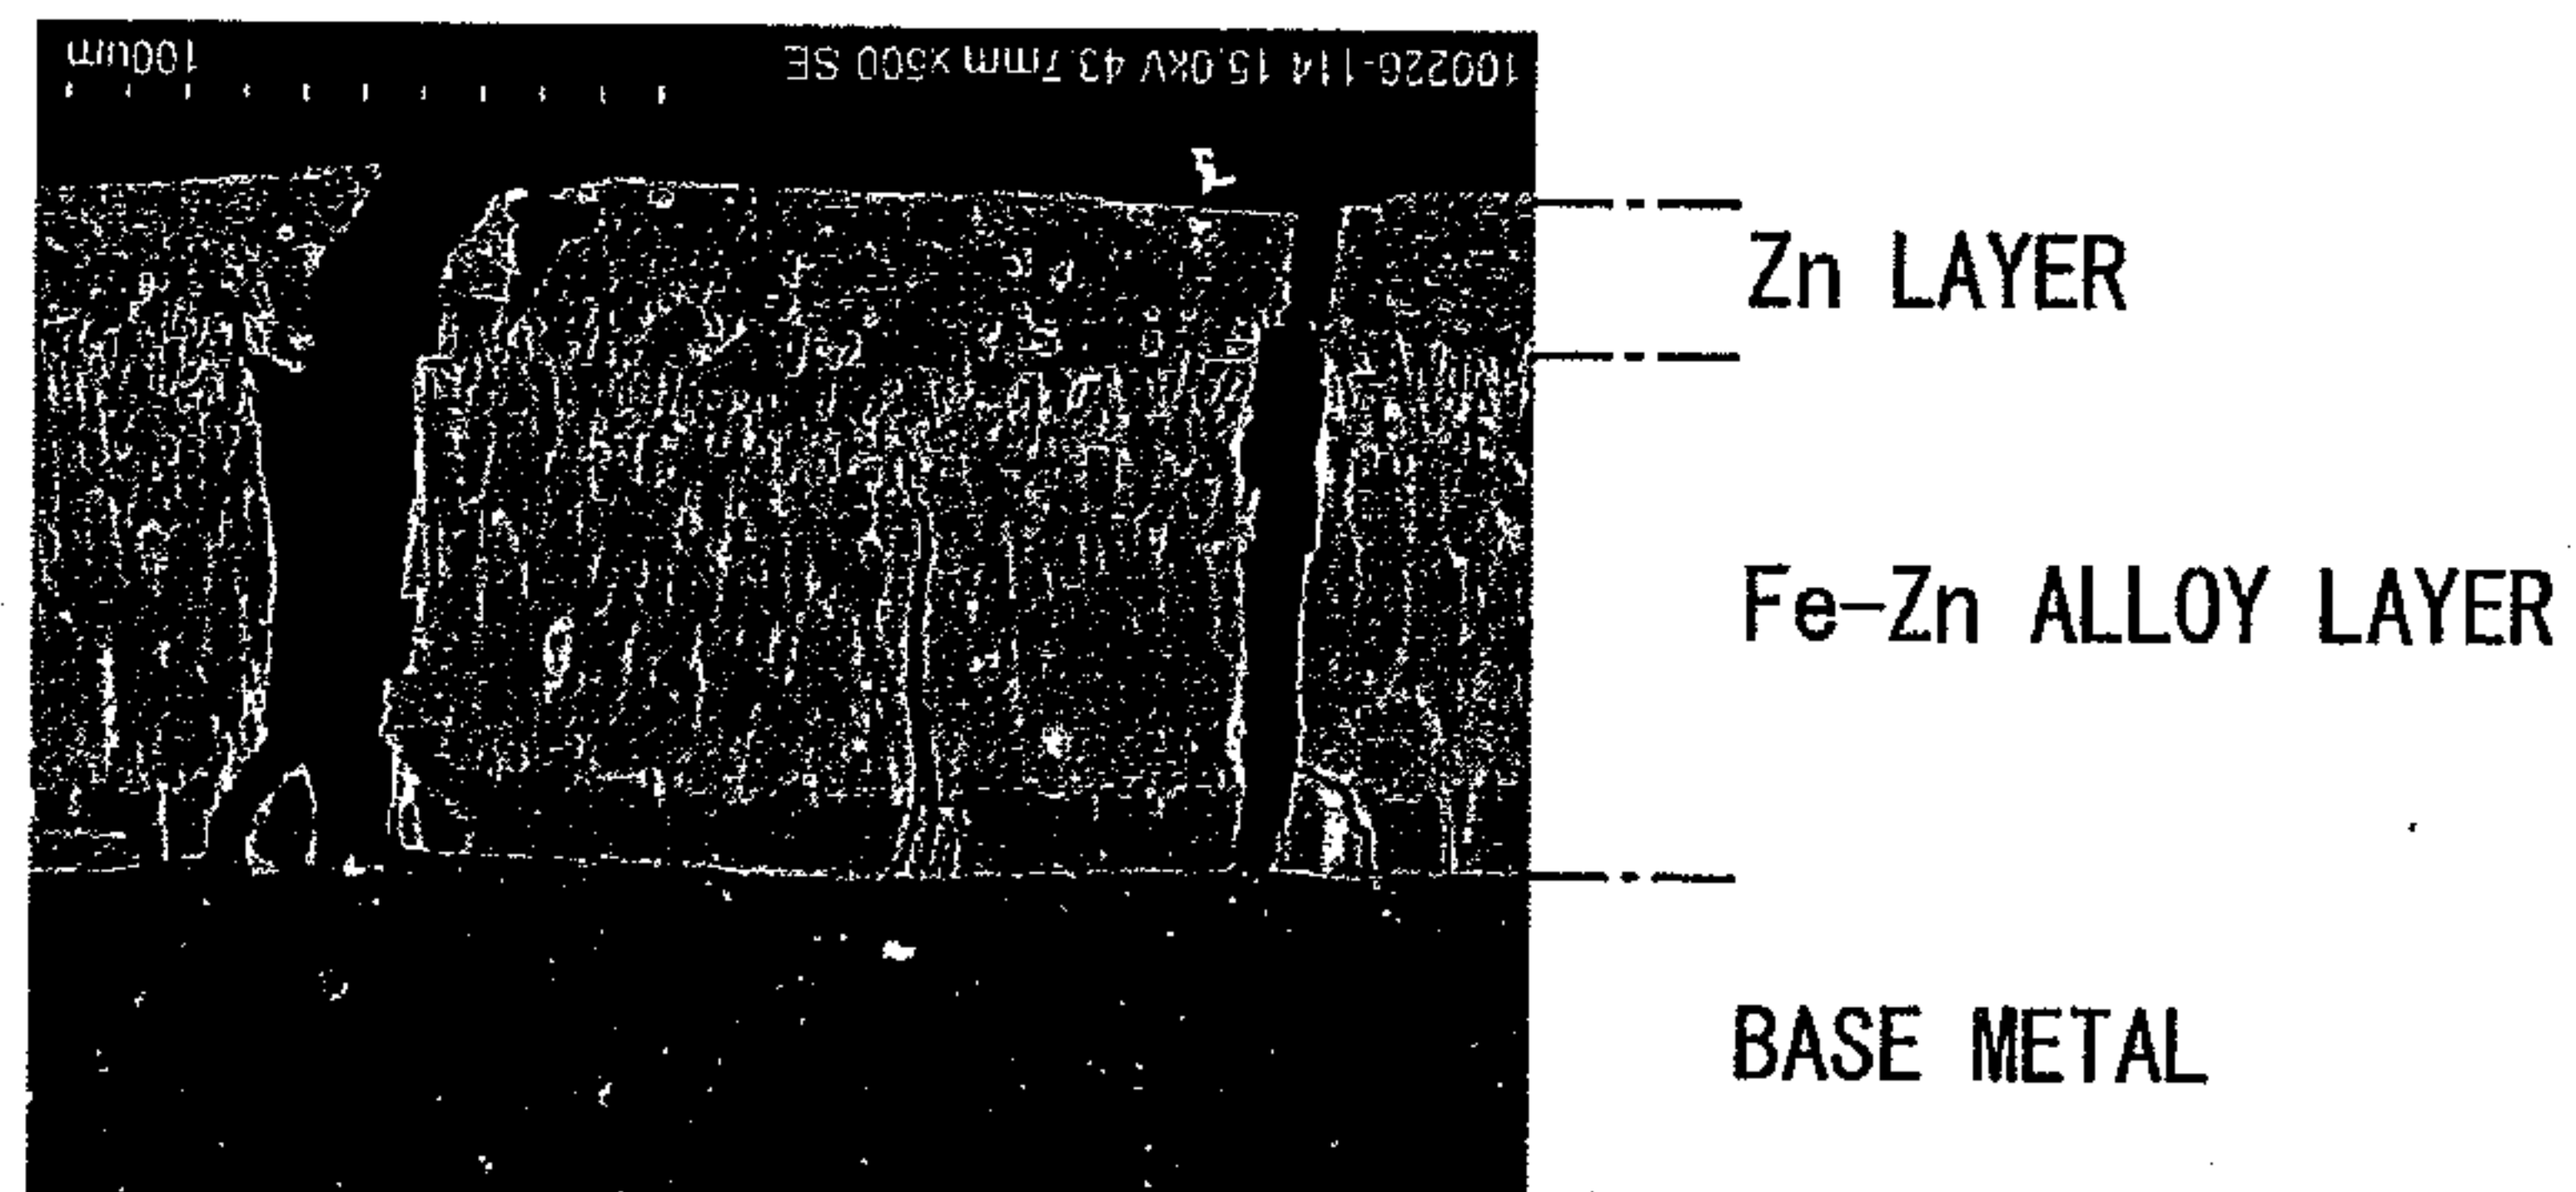


Fig. 1B




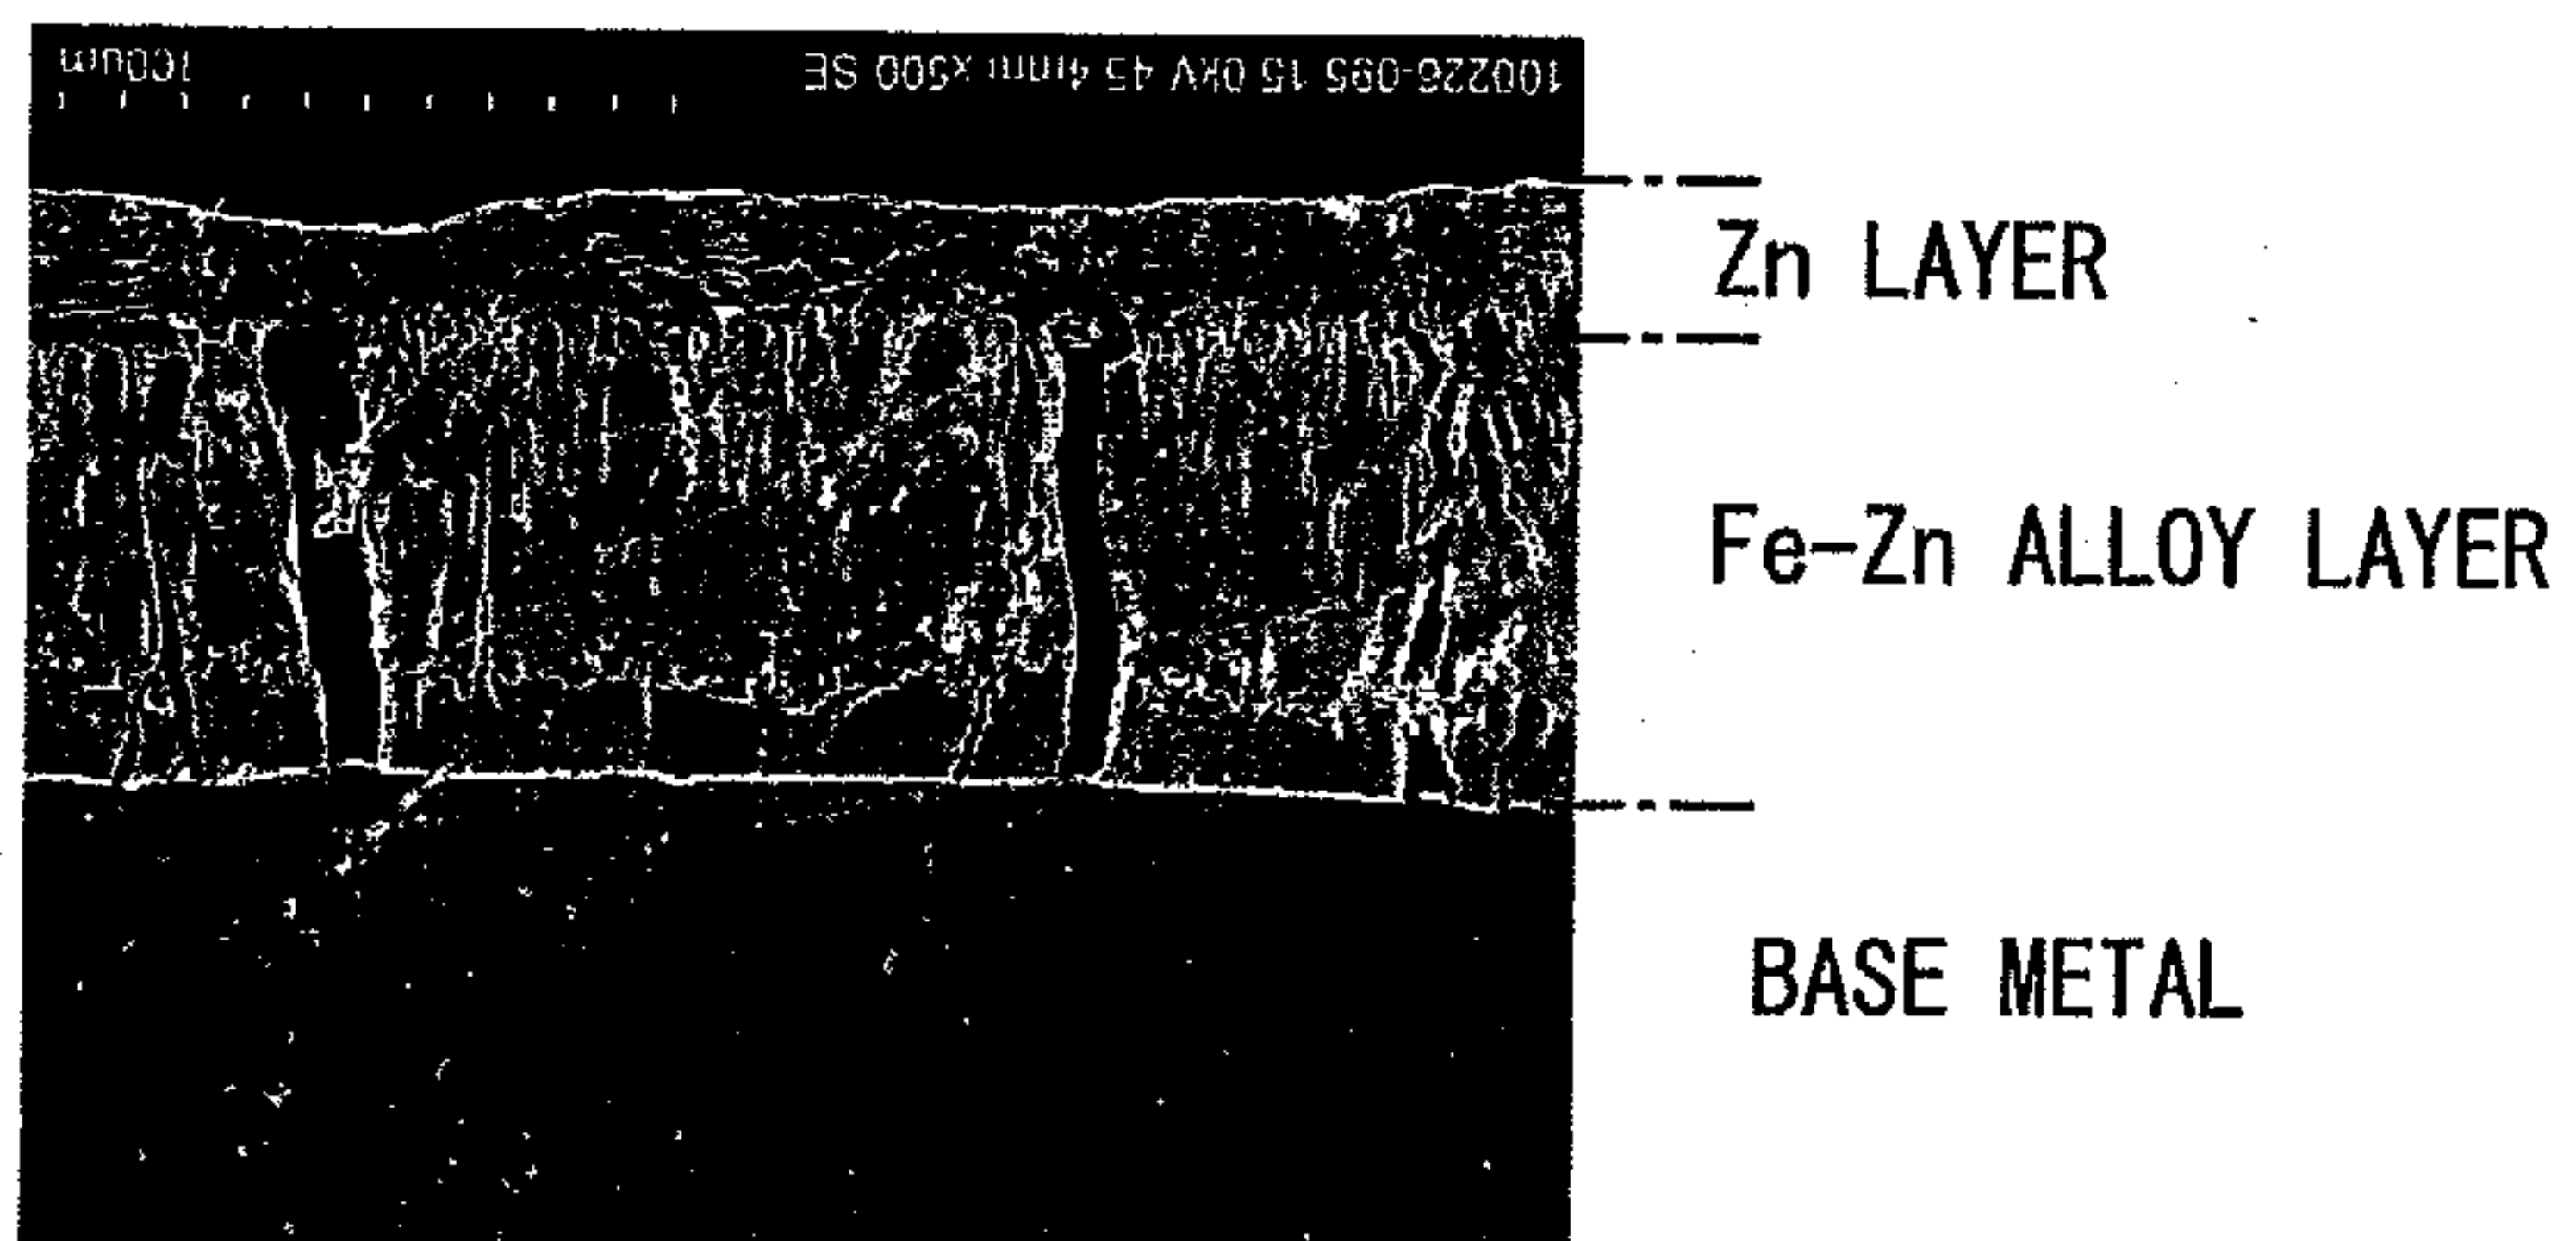


Fig. 2

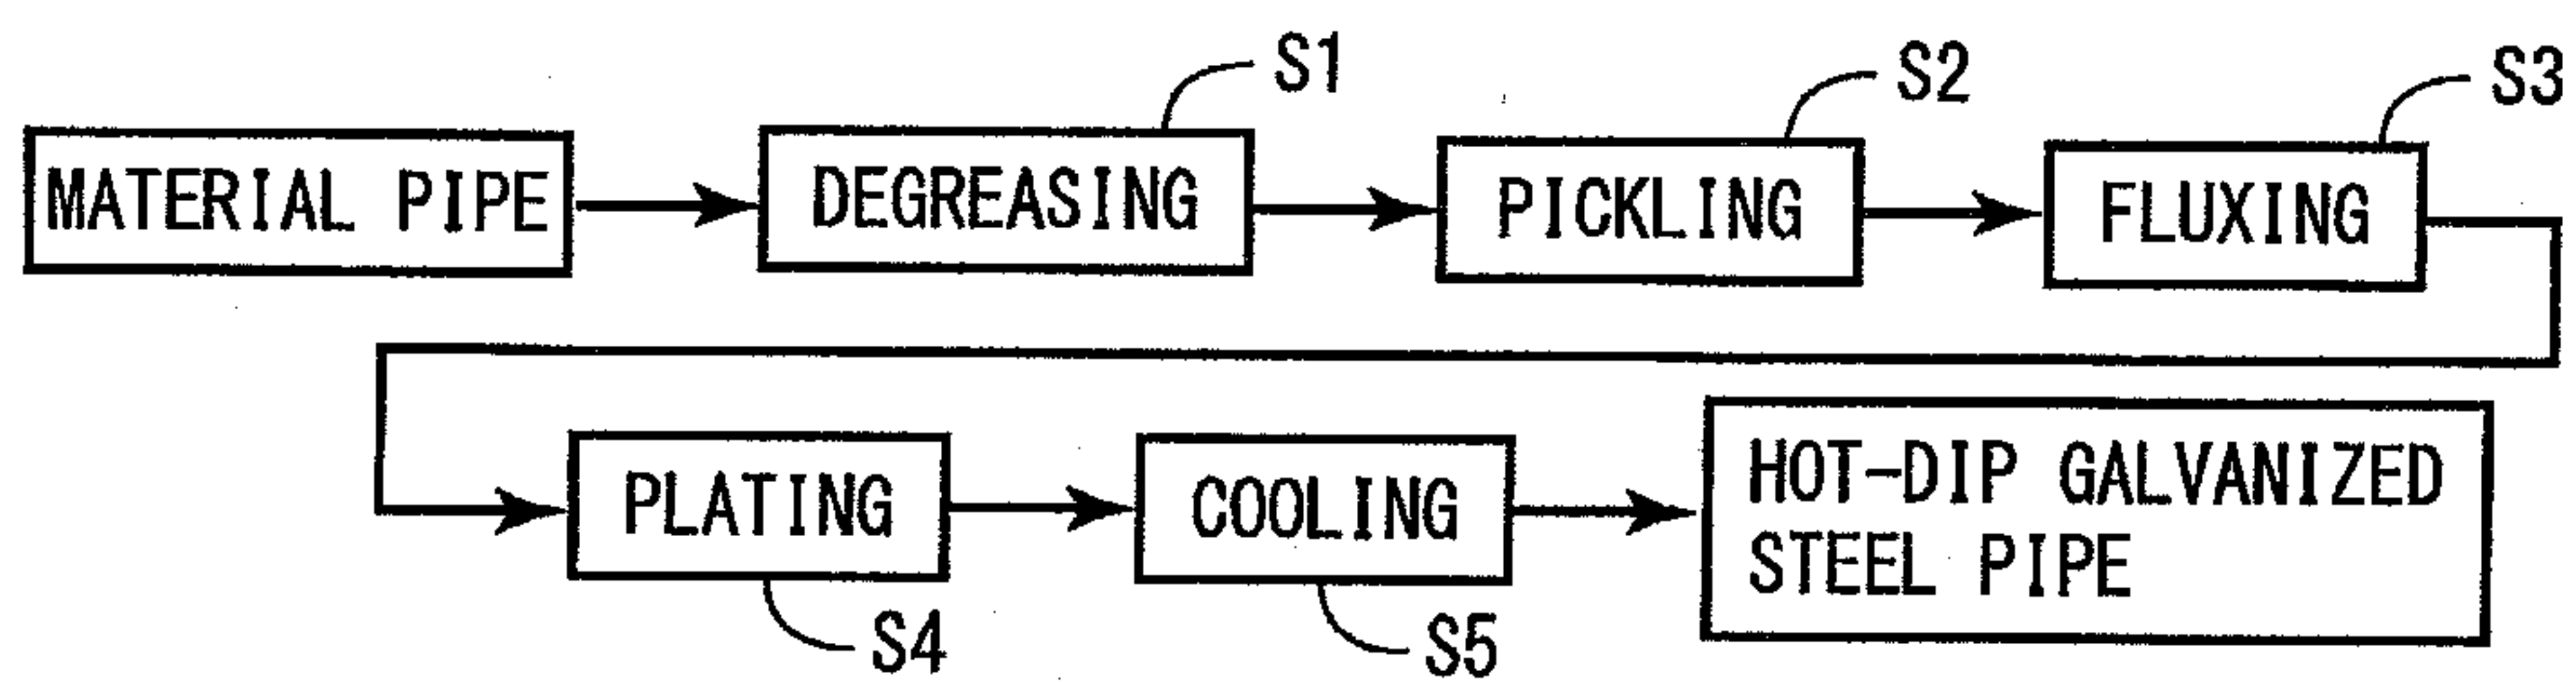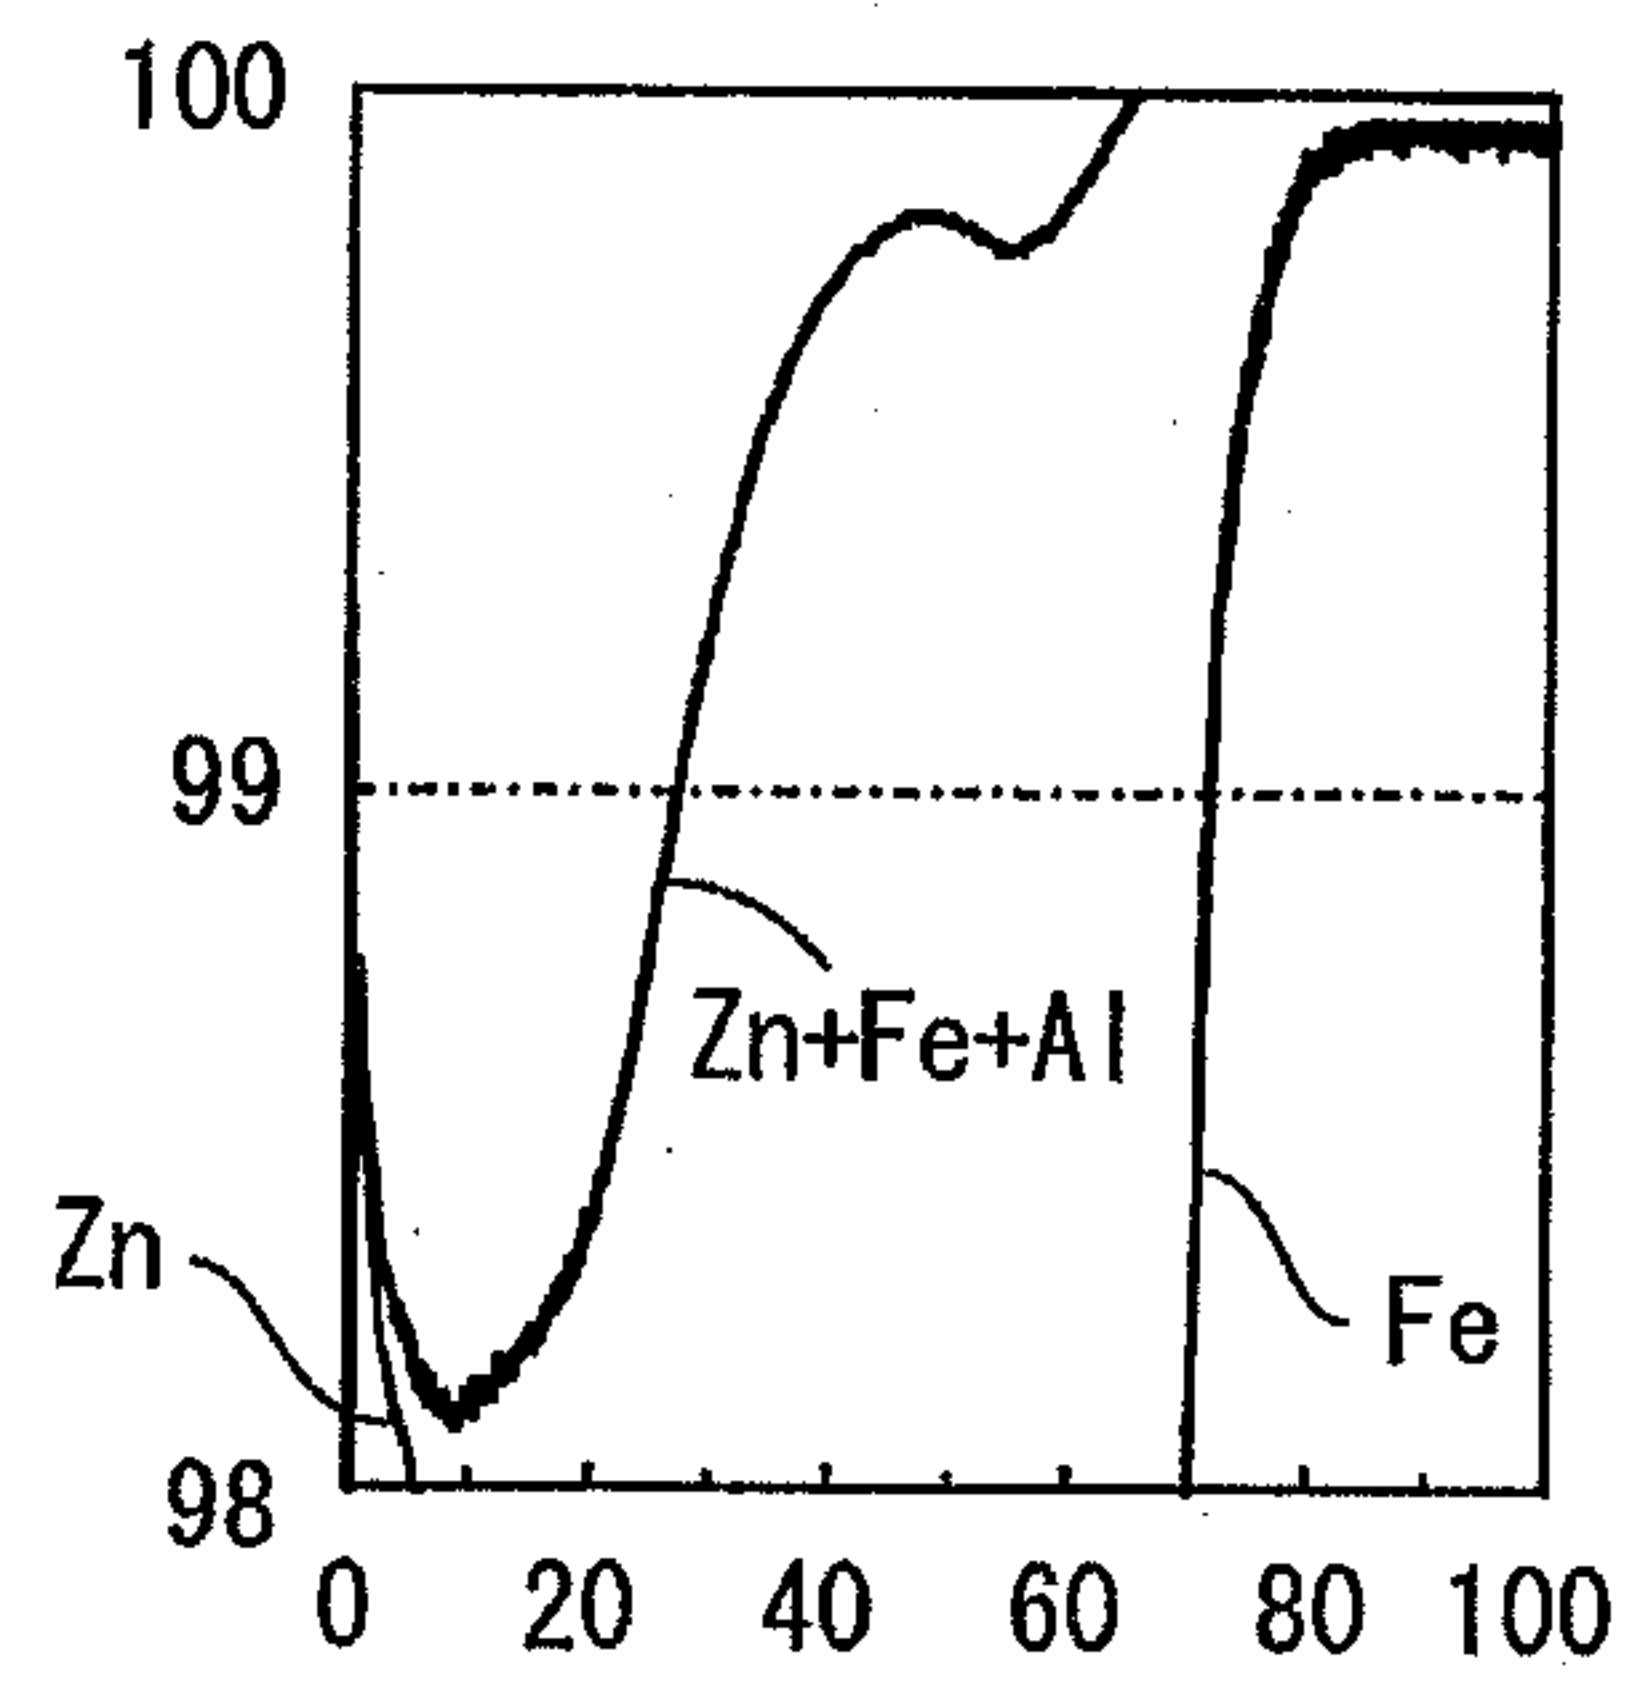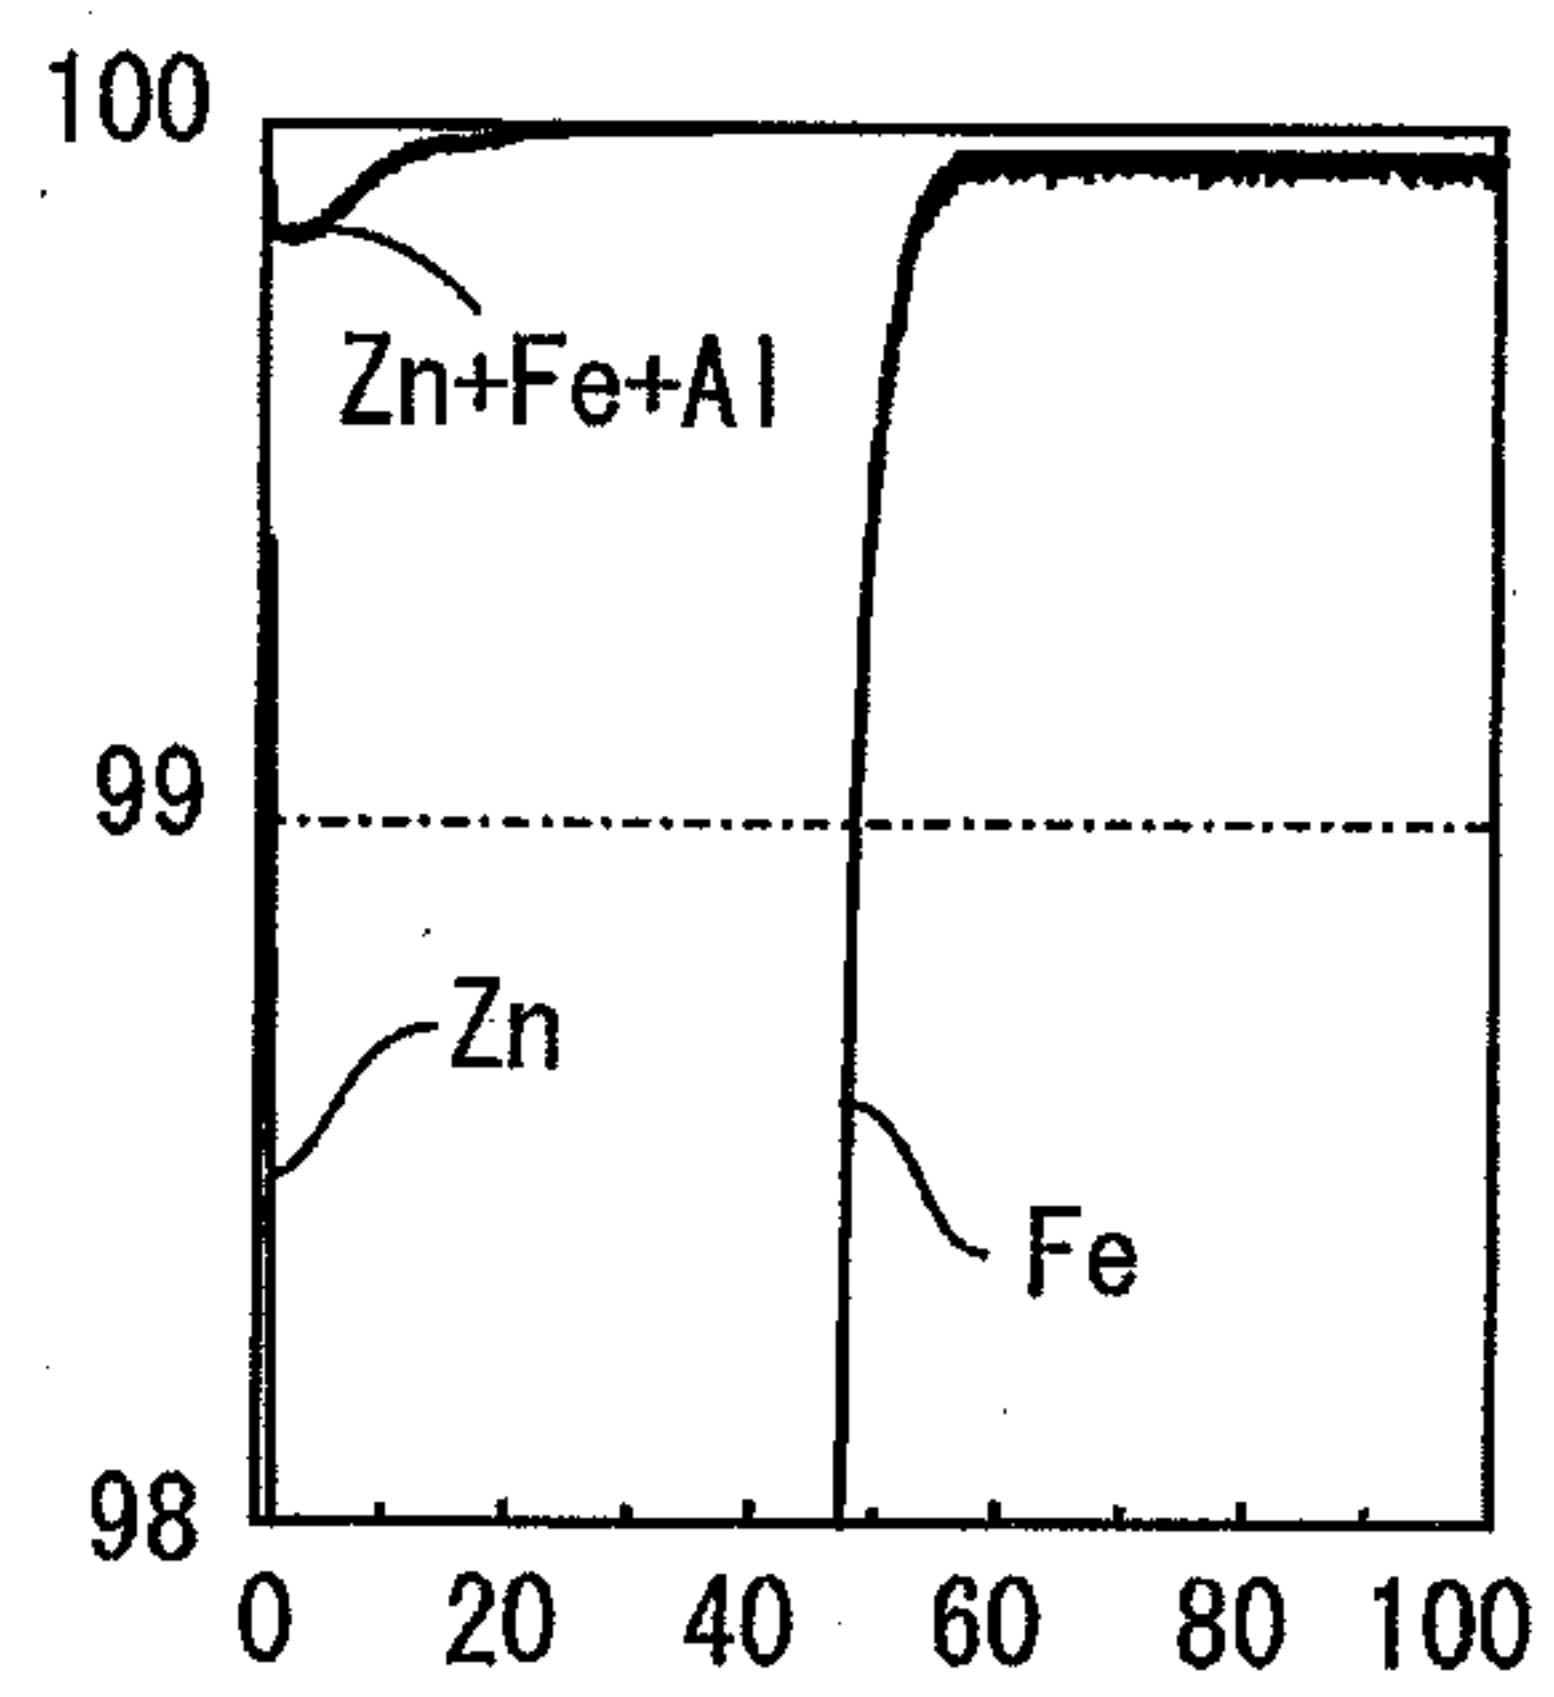



NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Fig.3A*Fig.3B*

NSSMC Ref. 12-00617WO0

Our Ref. 102-094P1

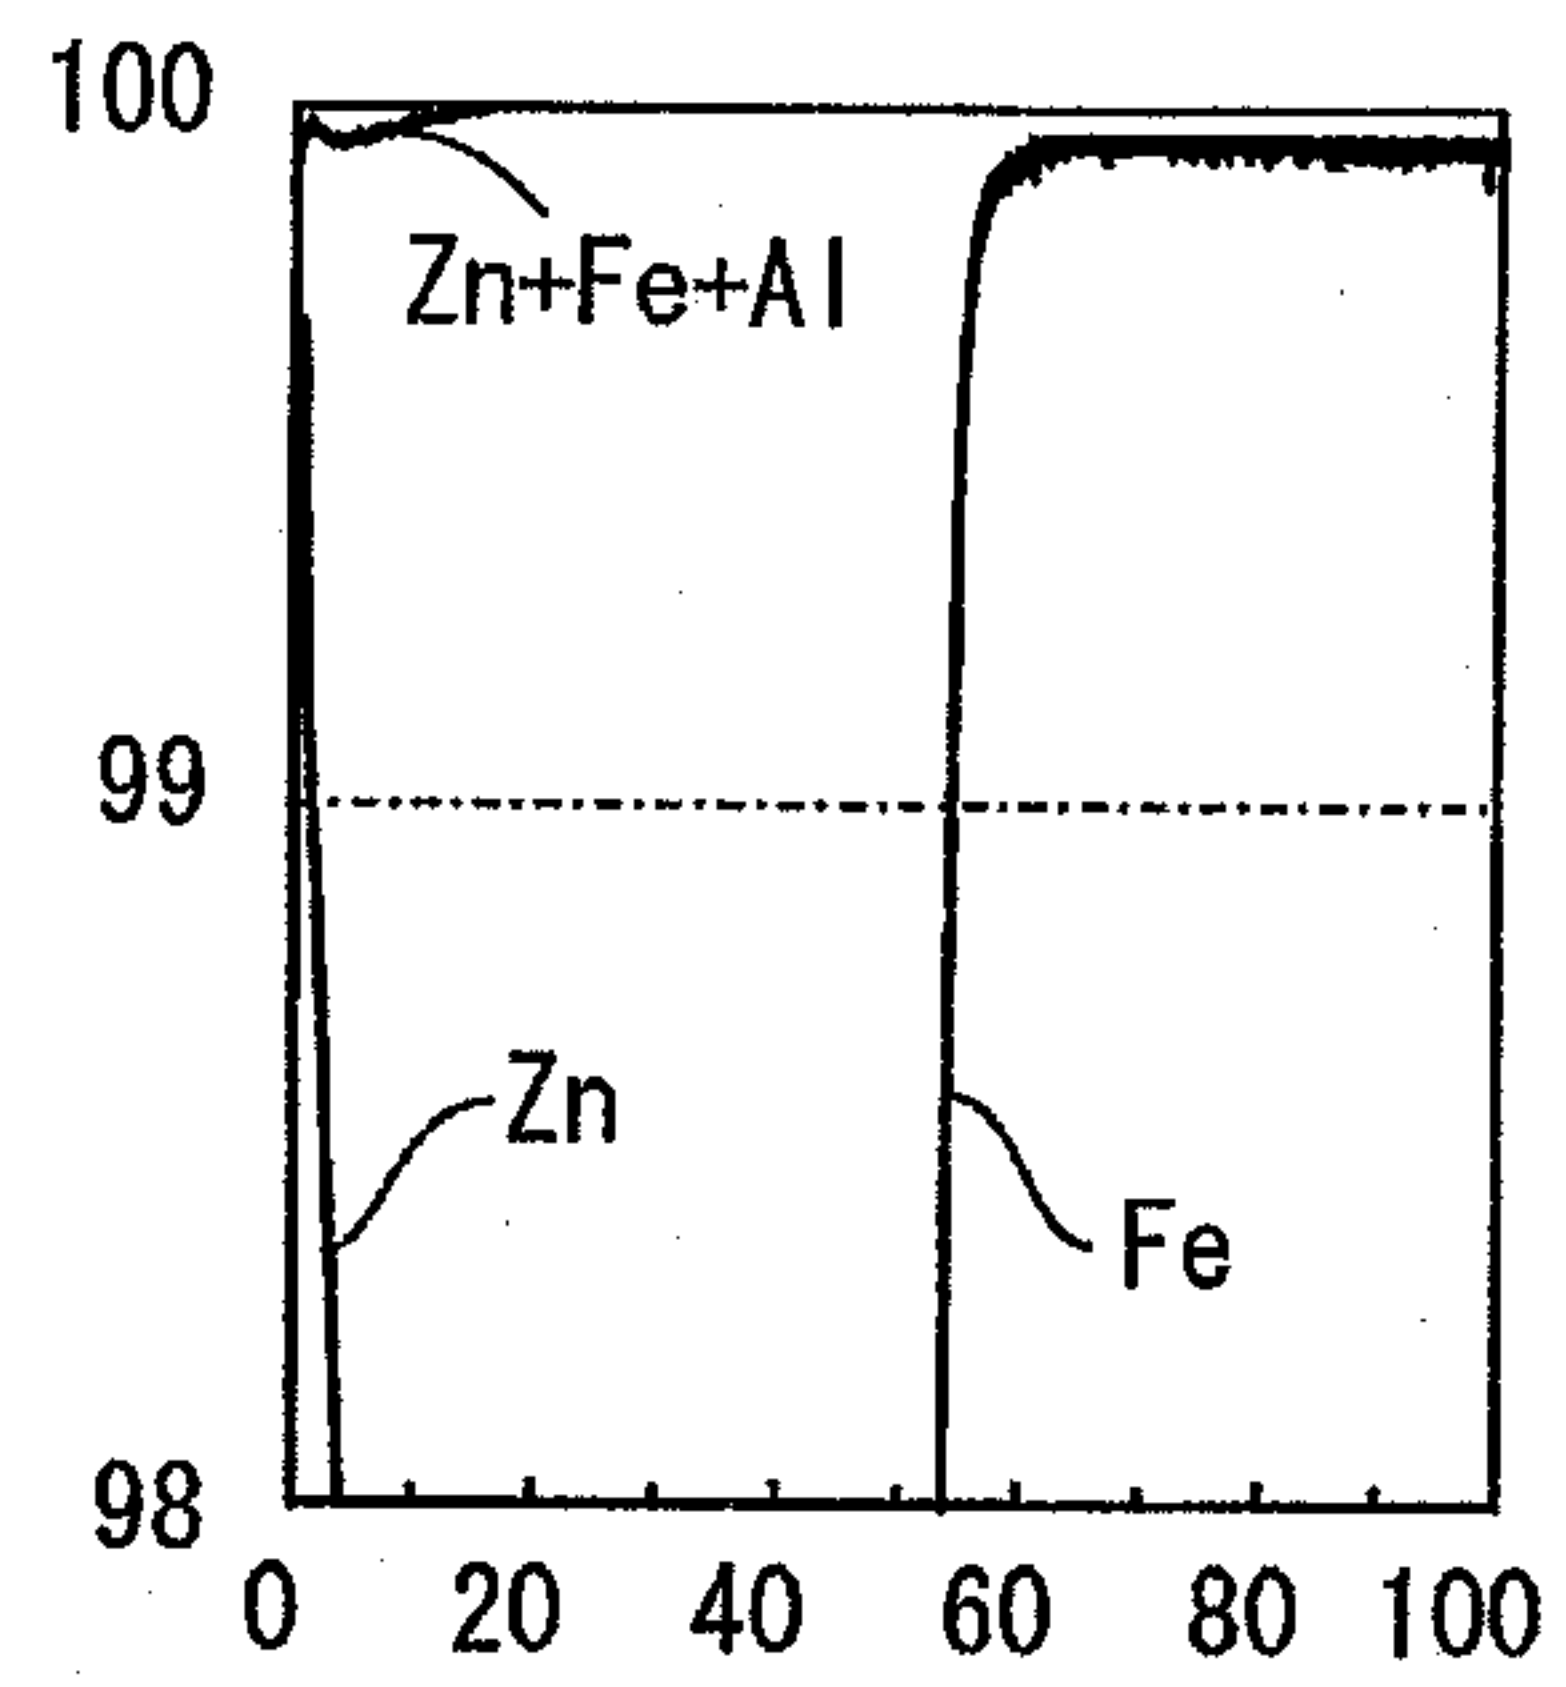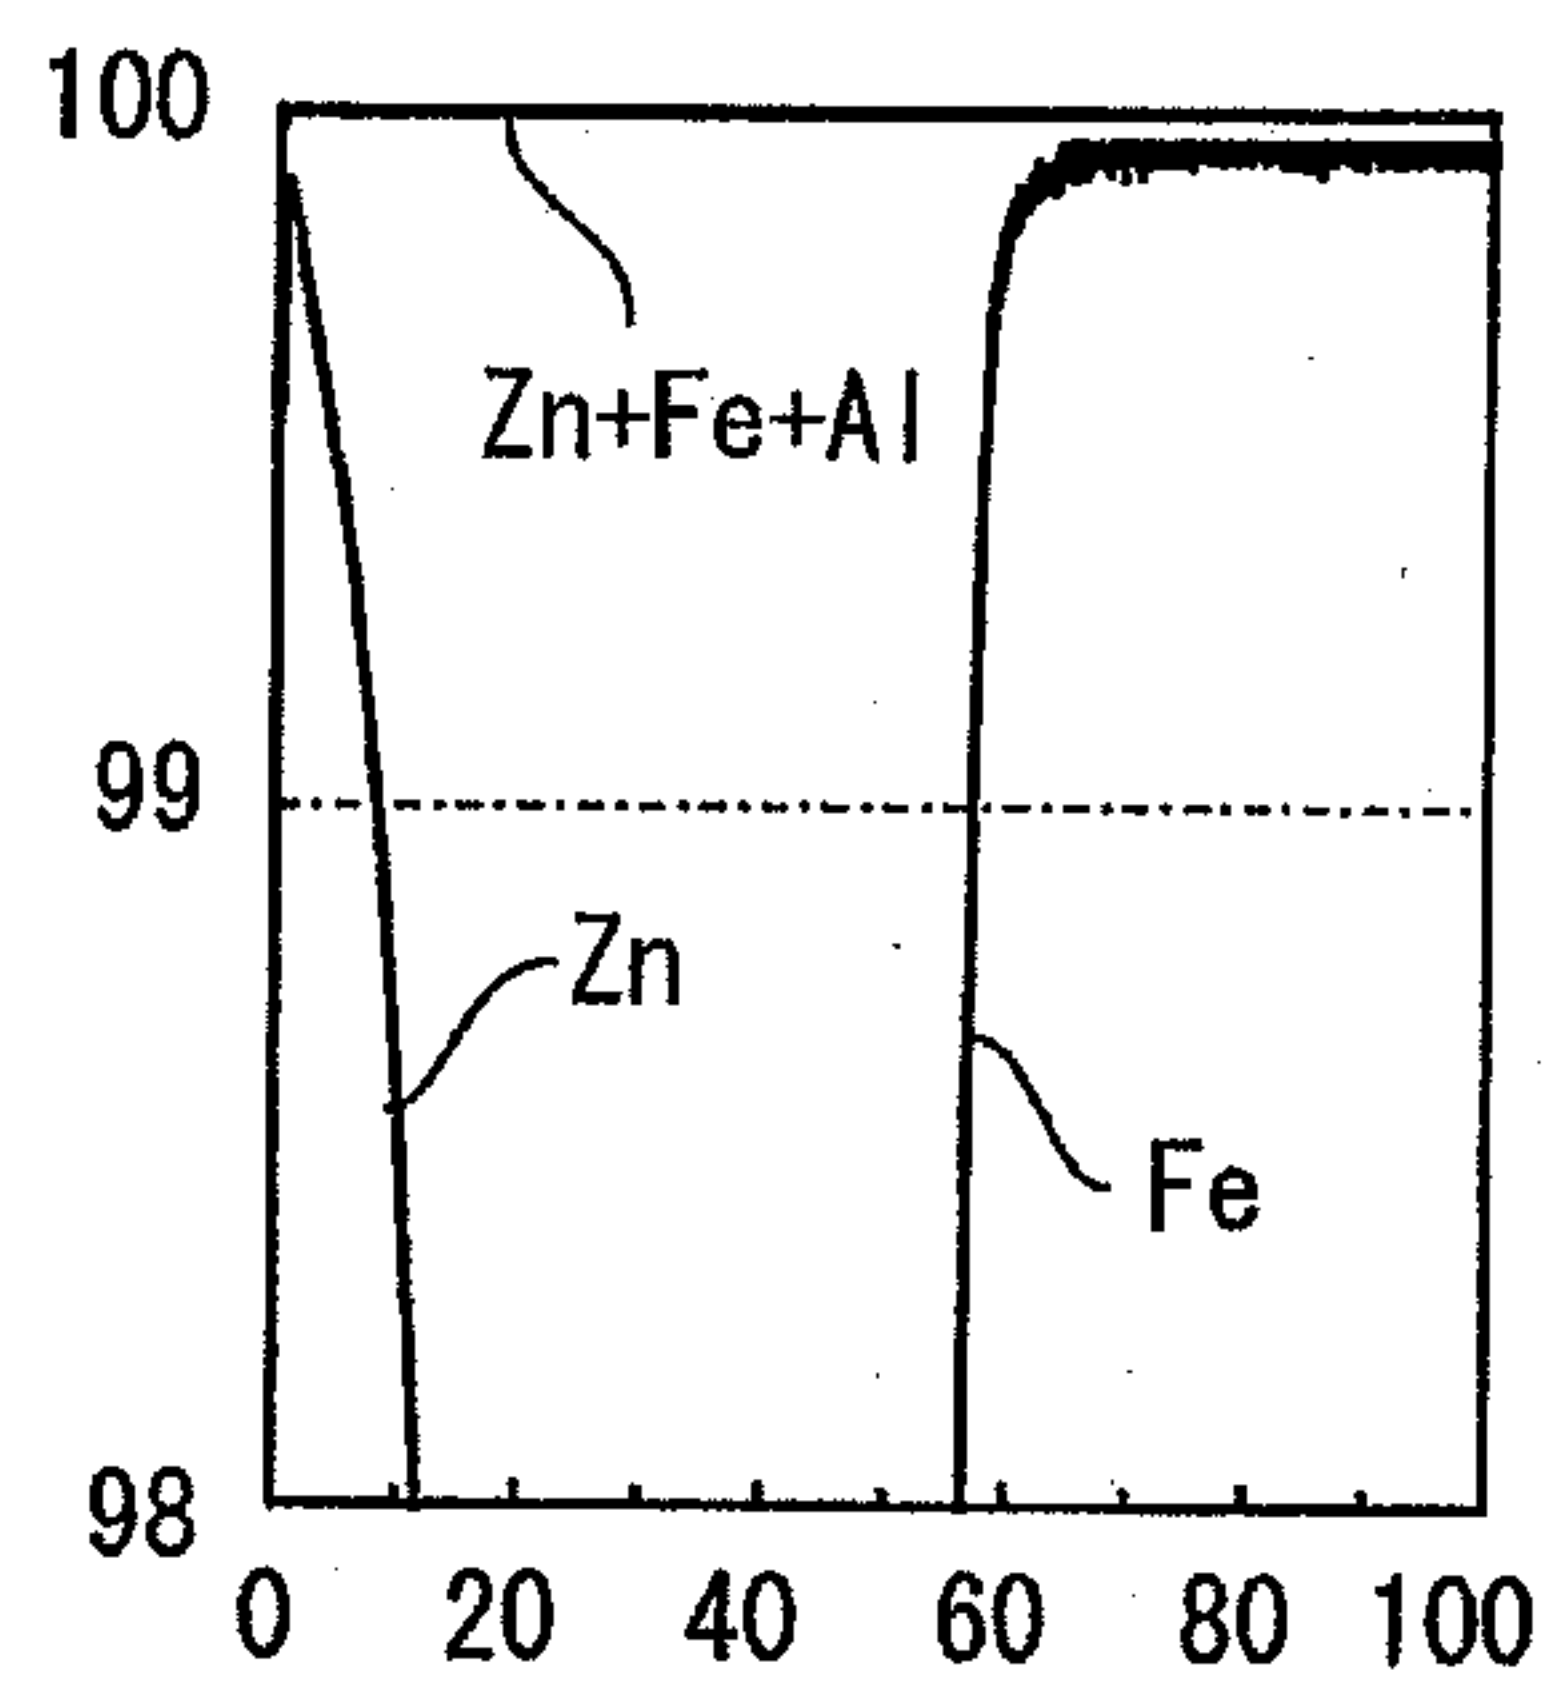Fig.3C*Fig.3D*

NSSMC Ref. 12-00617W00

Our Ref. 102-094P1

Fig.4A

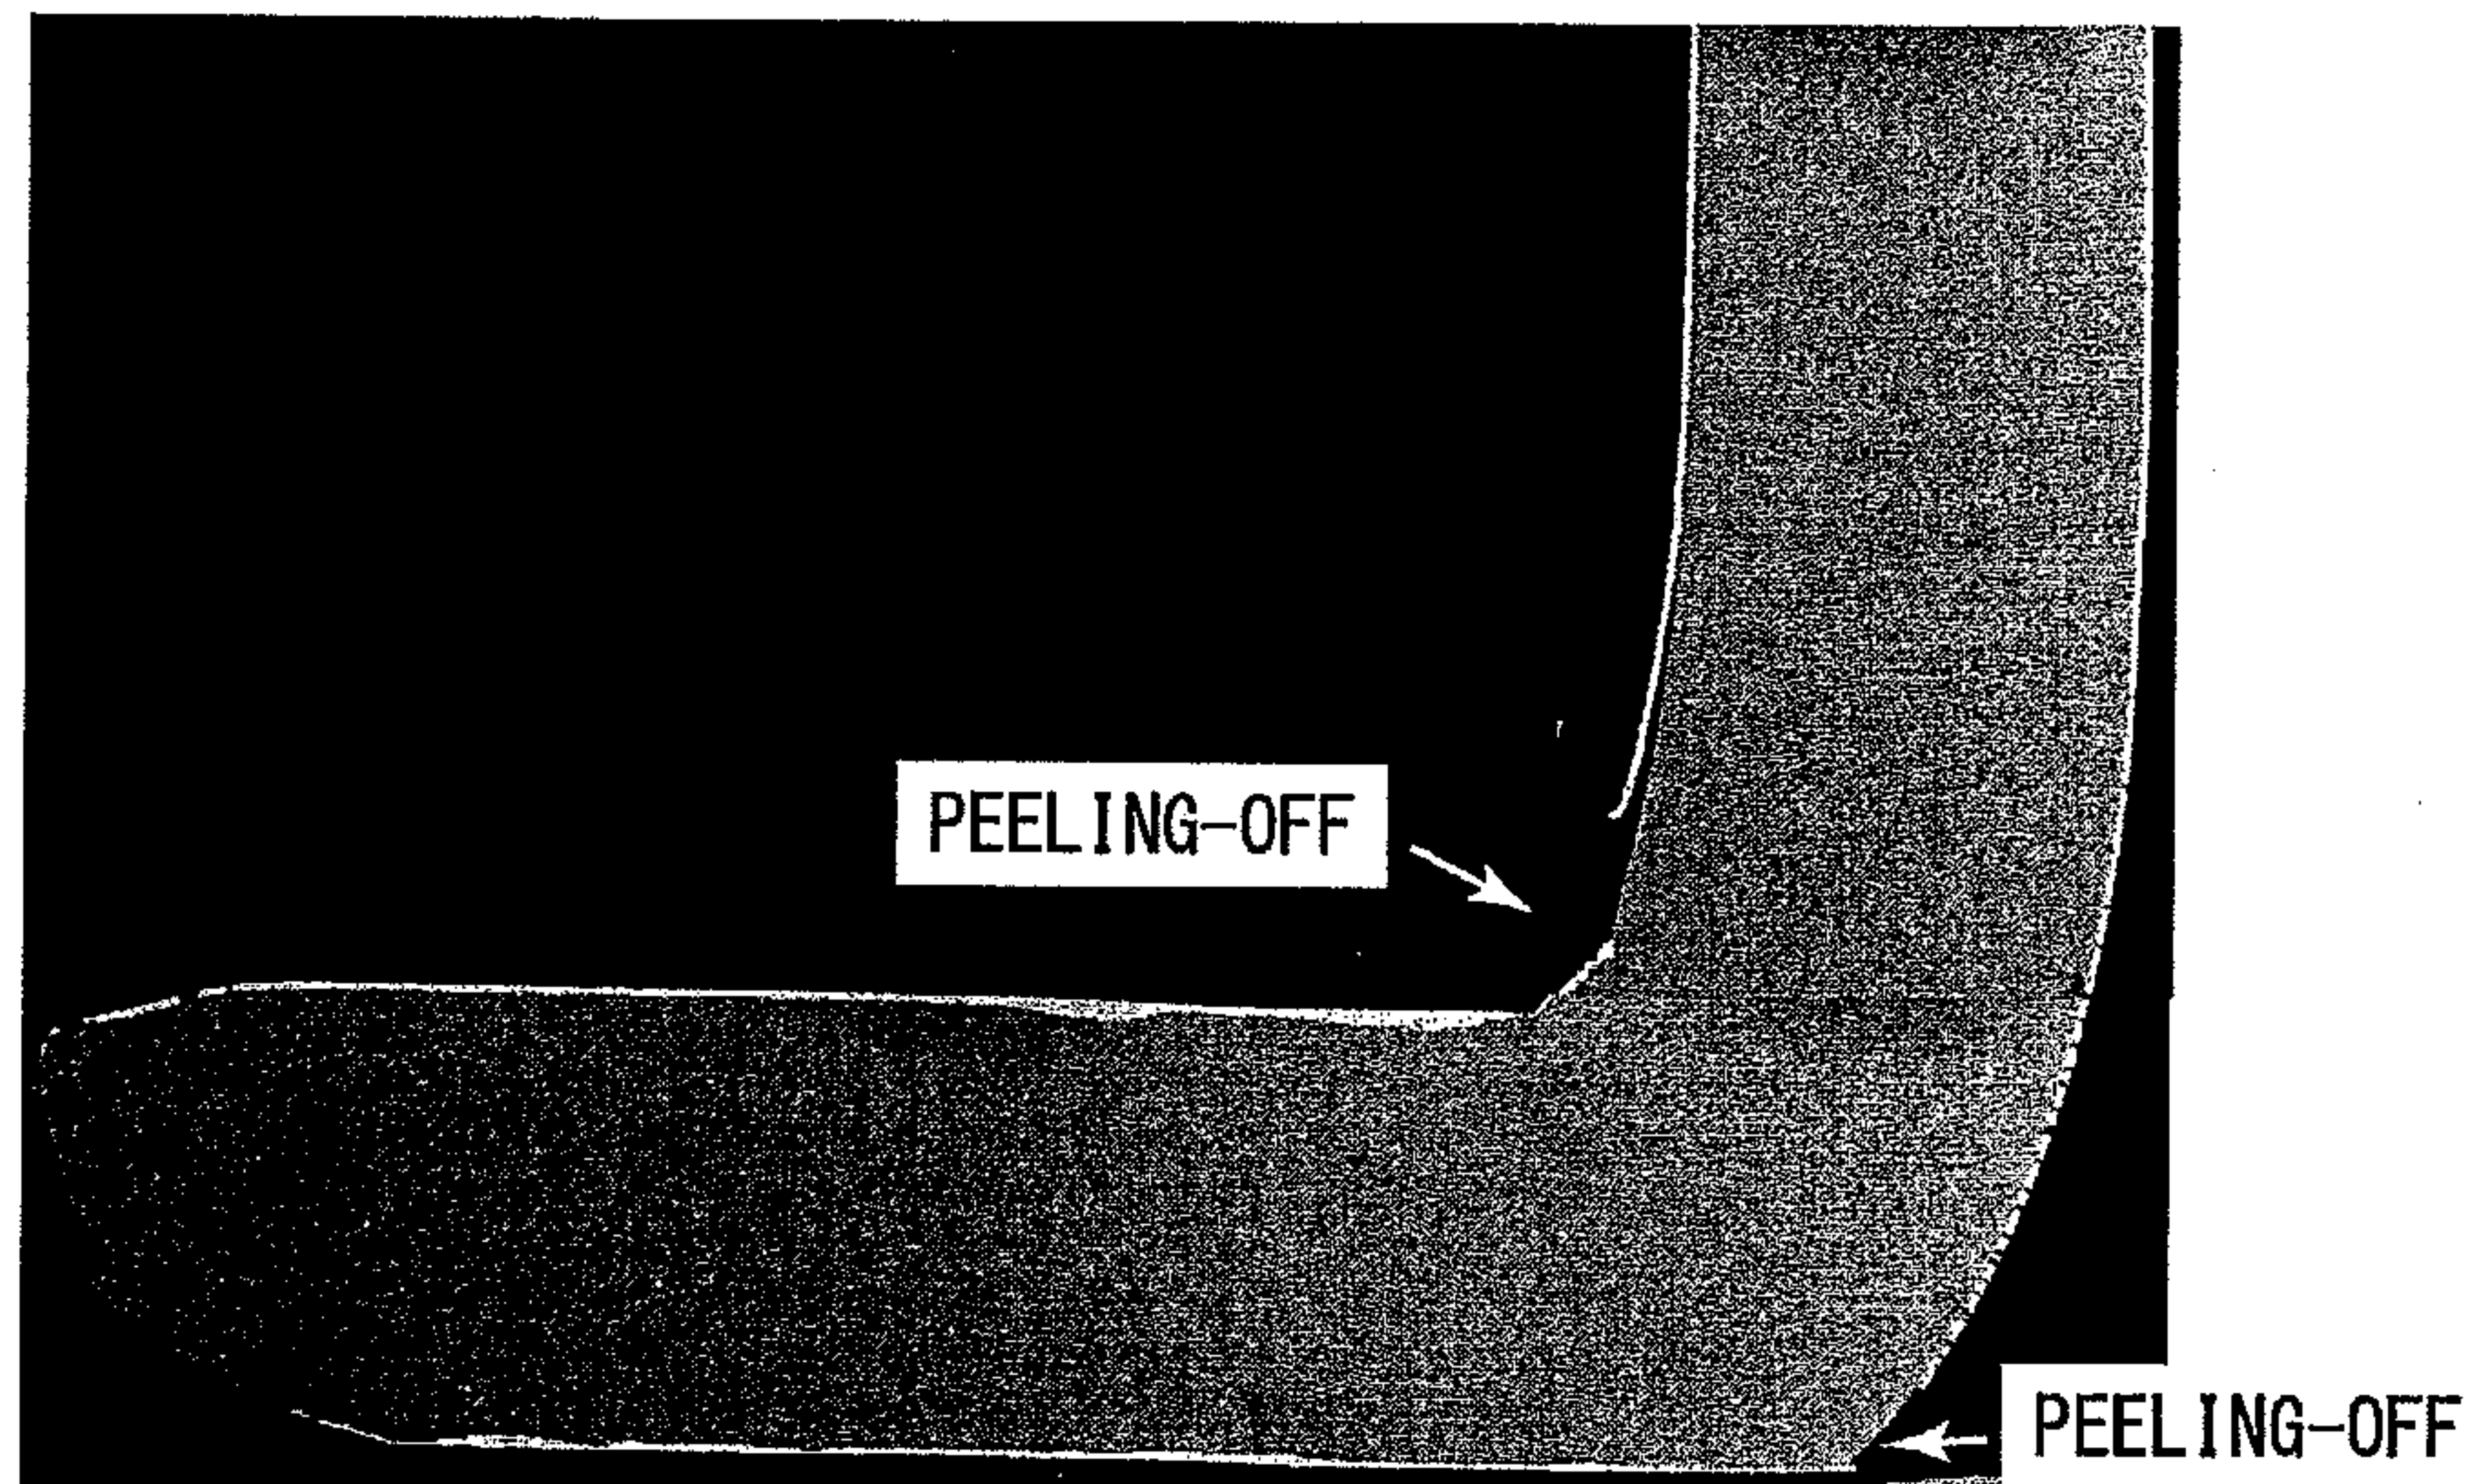


Fig.4B

