



(86) Date de dépôt PCT/PCT Filing Date: 1997/09/26
(87) Date publication PCT/PCT Publication Date: 1998/04/02
(45) Date de délivrance/Issue Date: 2004/11/30
(85) Entrée phase nationale/National Entry: 1999/03/09
(86) N° demande PCT/PCT Application No.: US 1997/017570
(87) N° publication PCT/PCT Publication No.: 1998/013805
(30) Priorité/Priority: 1996/09/26 (08/721,175) US


(51) Cl.Int.⁶/Int.Cl.⁶ G08B 23/00

(72) Inventeurs/Inventors:
ALICOT, JORGE F., US;
FREDERICK, RICHARD B., US;
TRIBBEY, SCOTT A., US;
PATTERSON, HUBERT A., US

(73) Propriétaire/Owner:
SENSORMATIC ELECTRONICS CORPORATION, US

(74) Agent: SMART & BIGGAR

(54) Titre : APPAREIL POUR LA COMMUNICATION DE DONNEES QUI DESACTIVE LES ETIQUETTES DE
SURVEILLANCE ELECTRONIQUES D'ARTICLES
(54) Title: AN APPARATUS FOR DATA COMMUNICATION AND DEACTIVATION OF ELECTRONIC ARTICLE
SURVEILLANCE TAGS

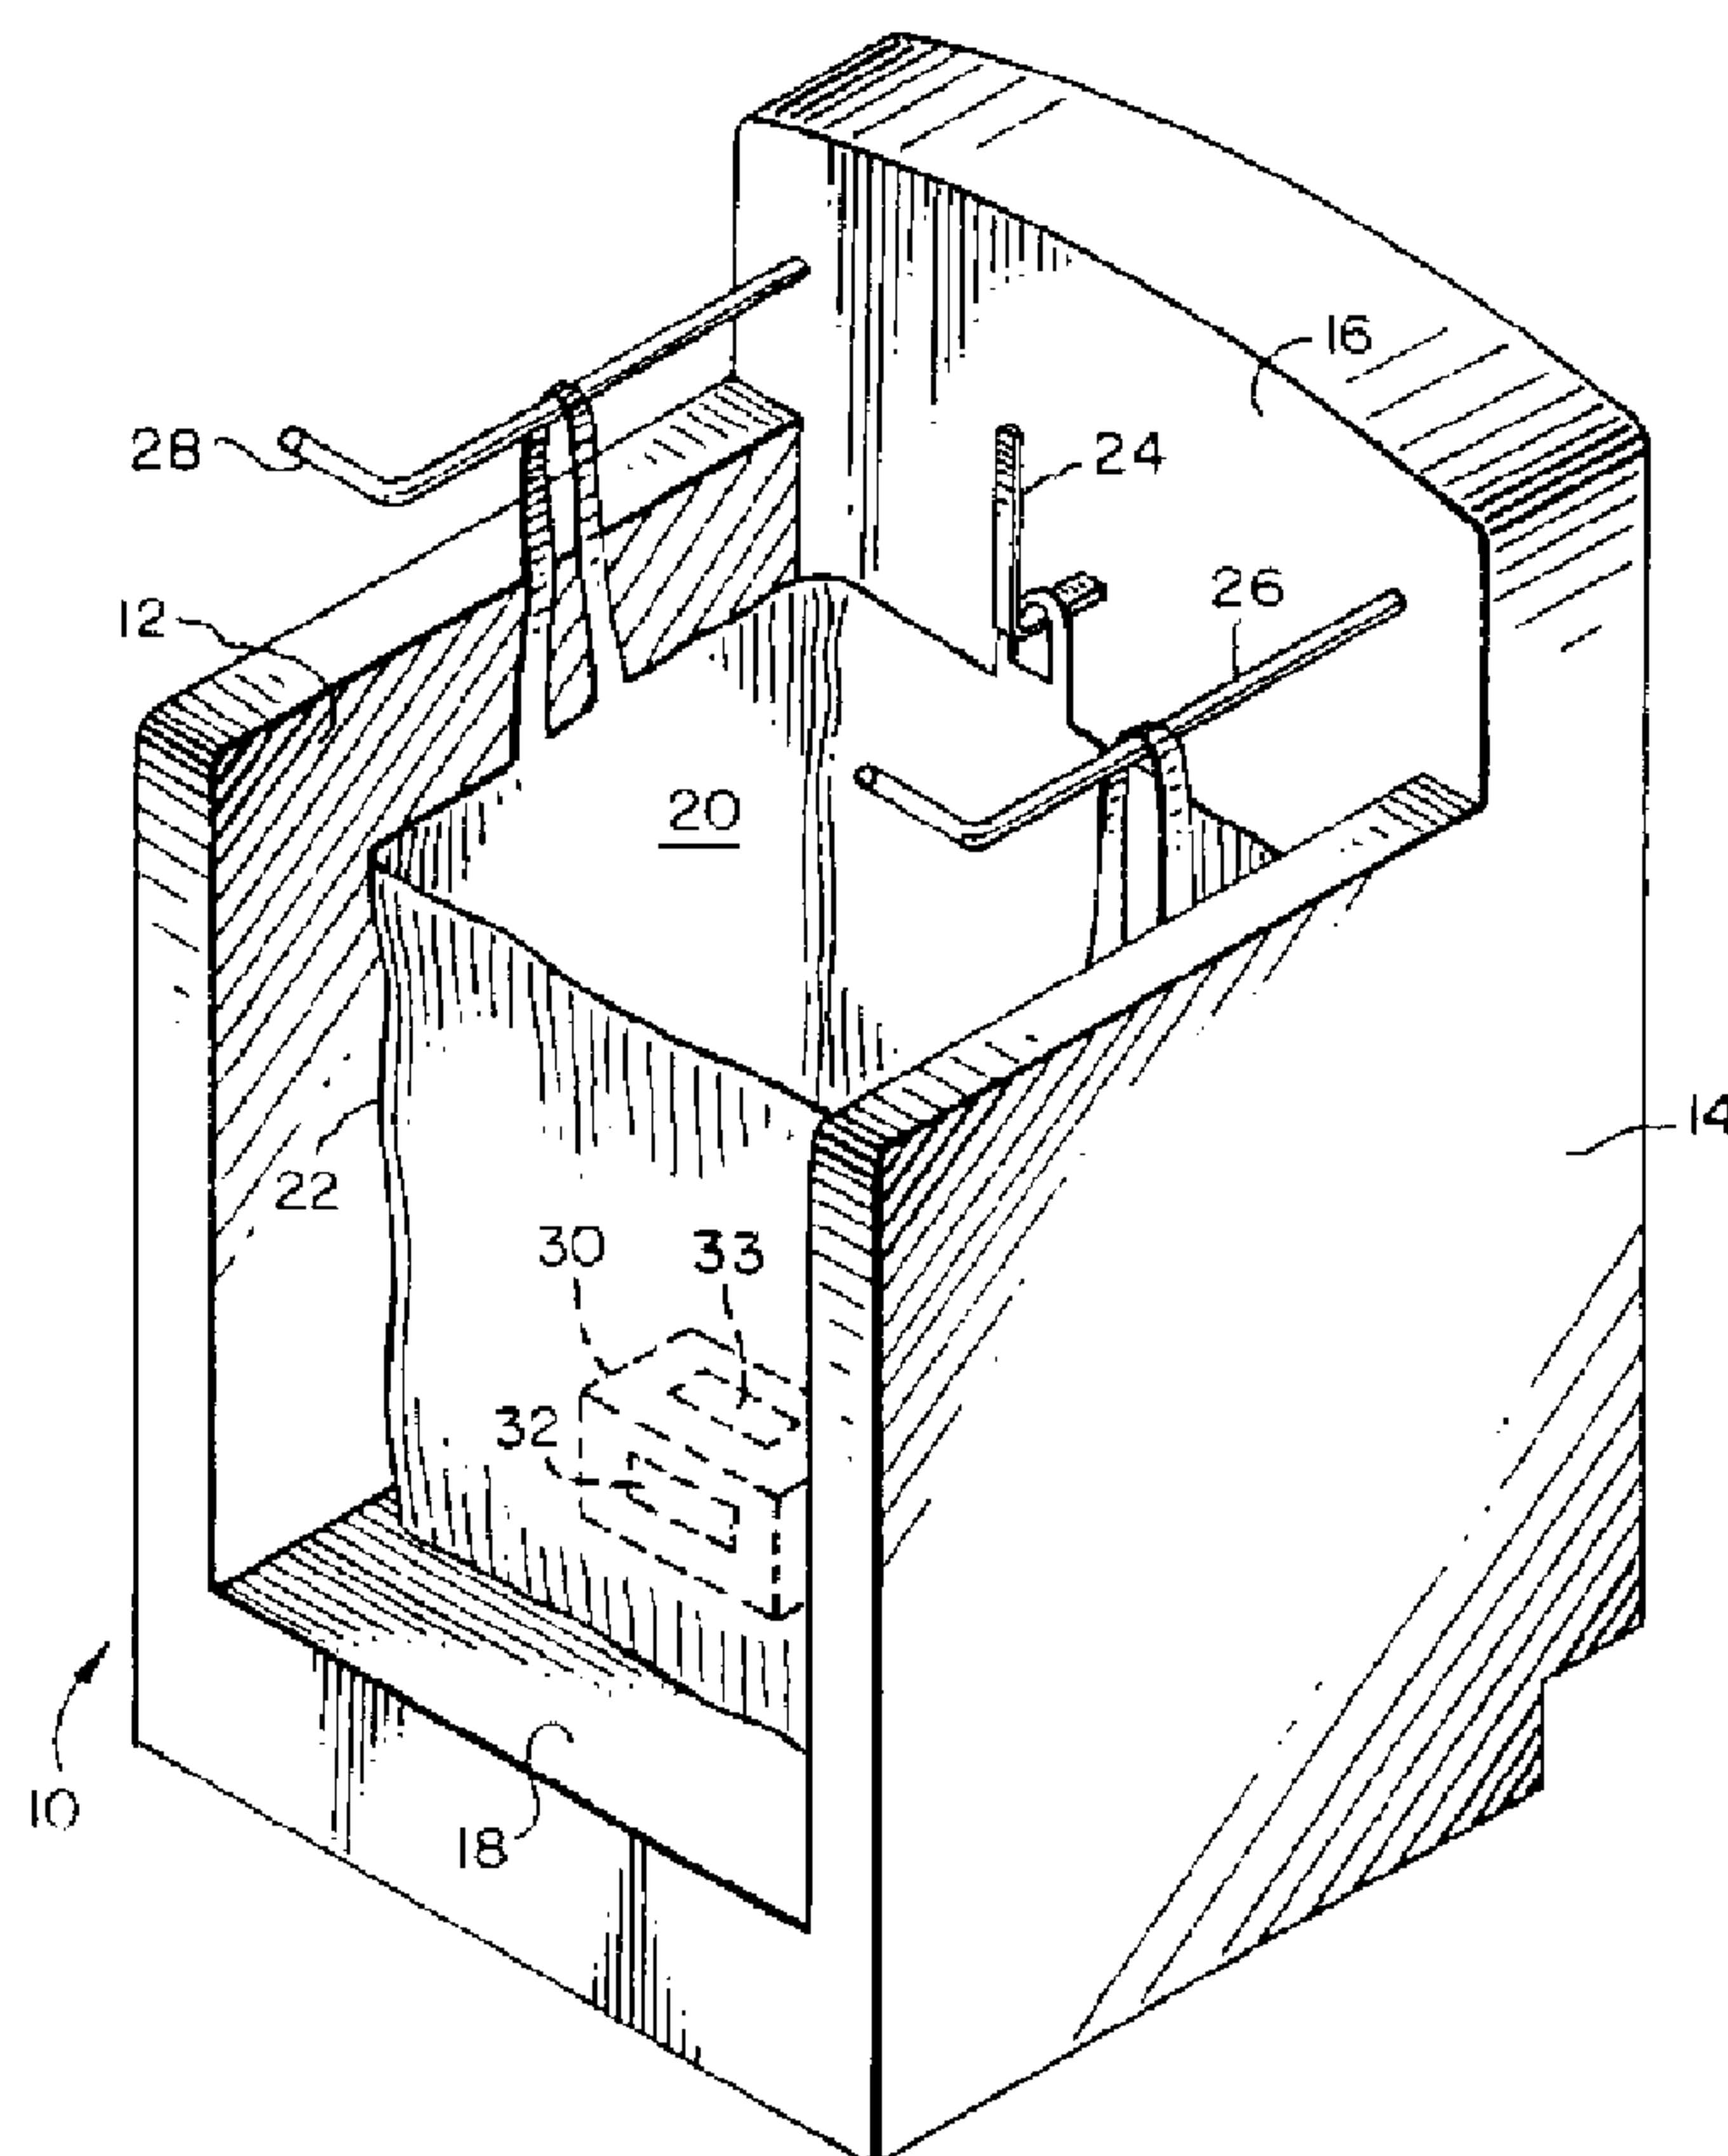

(57) Abrégé/Abstract:

An apparatus for data communication and deactivating an electronic article surveillance tag comprising an antenna (54) for communicating with a transponder located within a predetermined area and a deactivation coil (52) for deactivating an electronic article surveillance tag located within the predetermined area.




**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G08B 23/00	A1	(11) International Publication Number: WO 98/13805 (43) International Publication Date: 2 April 1998 (02.04.98)
(21) International Application Number: PCT/US97/17570 (22) International Filing Date: 26 September 1997 (26.09.97) (30) Priority Data: 08/721,175 26 September 1996 (26.09.96) US (71) Applicant: SENSORMATIC ELECTRONICS CORPORATION [US/US]; 951 Yamato Road, Boca Raton, FL 33431-0700 (US). (72) Inventors: ALICOT, Jorge, F.; 15849 Ashby Field Road, Davie, FL 33331 (US). FREDERICK, Richard, B.; 2531 N.E. 45th Street, Lighthouse Point, FL 33064 (US). TRIBBEY, Scott, A.; 6402 Lake Tern Way, Coconut Creek, FL 33073 (US). PATTERSON, Hubert, A.; 3663 24th Way N.W., Boca Raton, FL 33431 (US). (74) Agent: KASHIMBA, Paul, T.; 951 Yamato Road, Boca Raton, FL 33431-0700 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: AN APPARATUS FOR DATA COMMUNICATION AND DEACTIVATION OF ELECTRONIC ARTICLE SURVEILLANCE TAGS

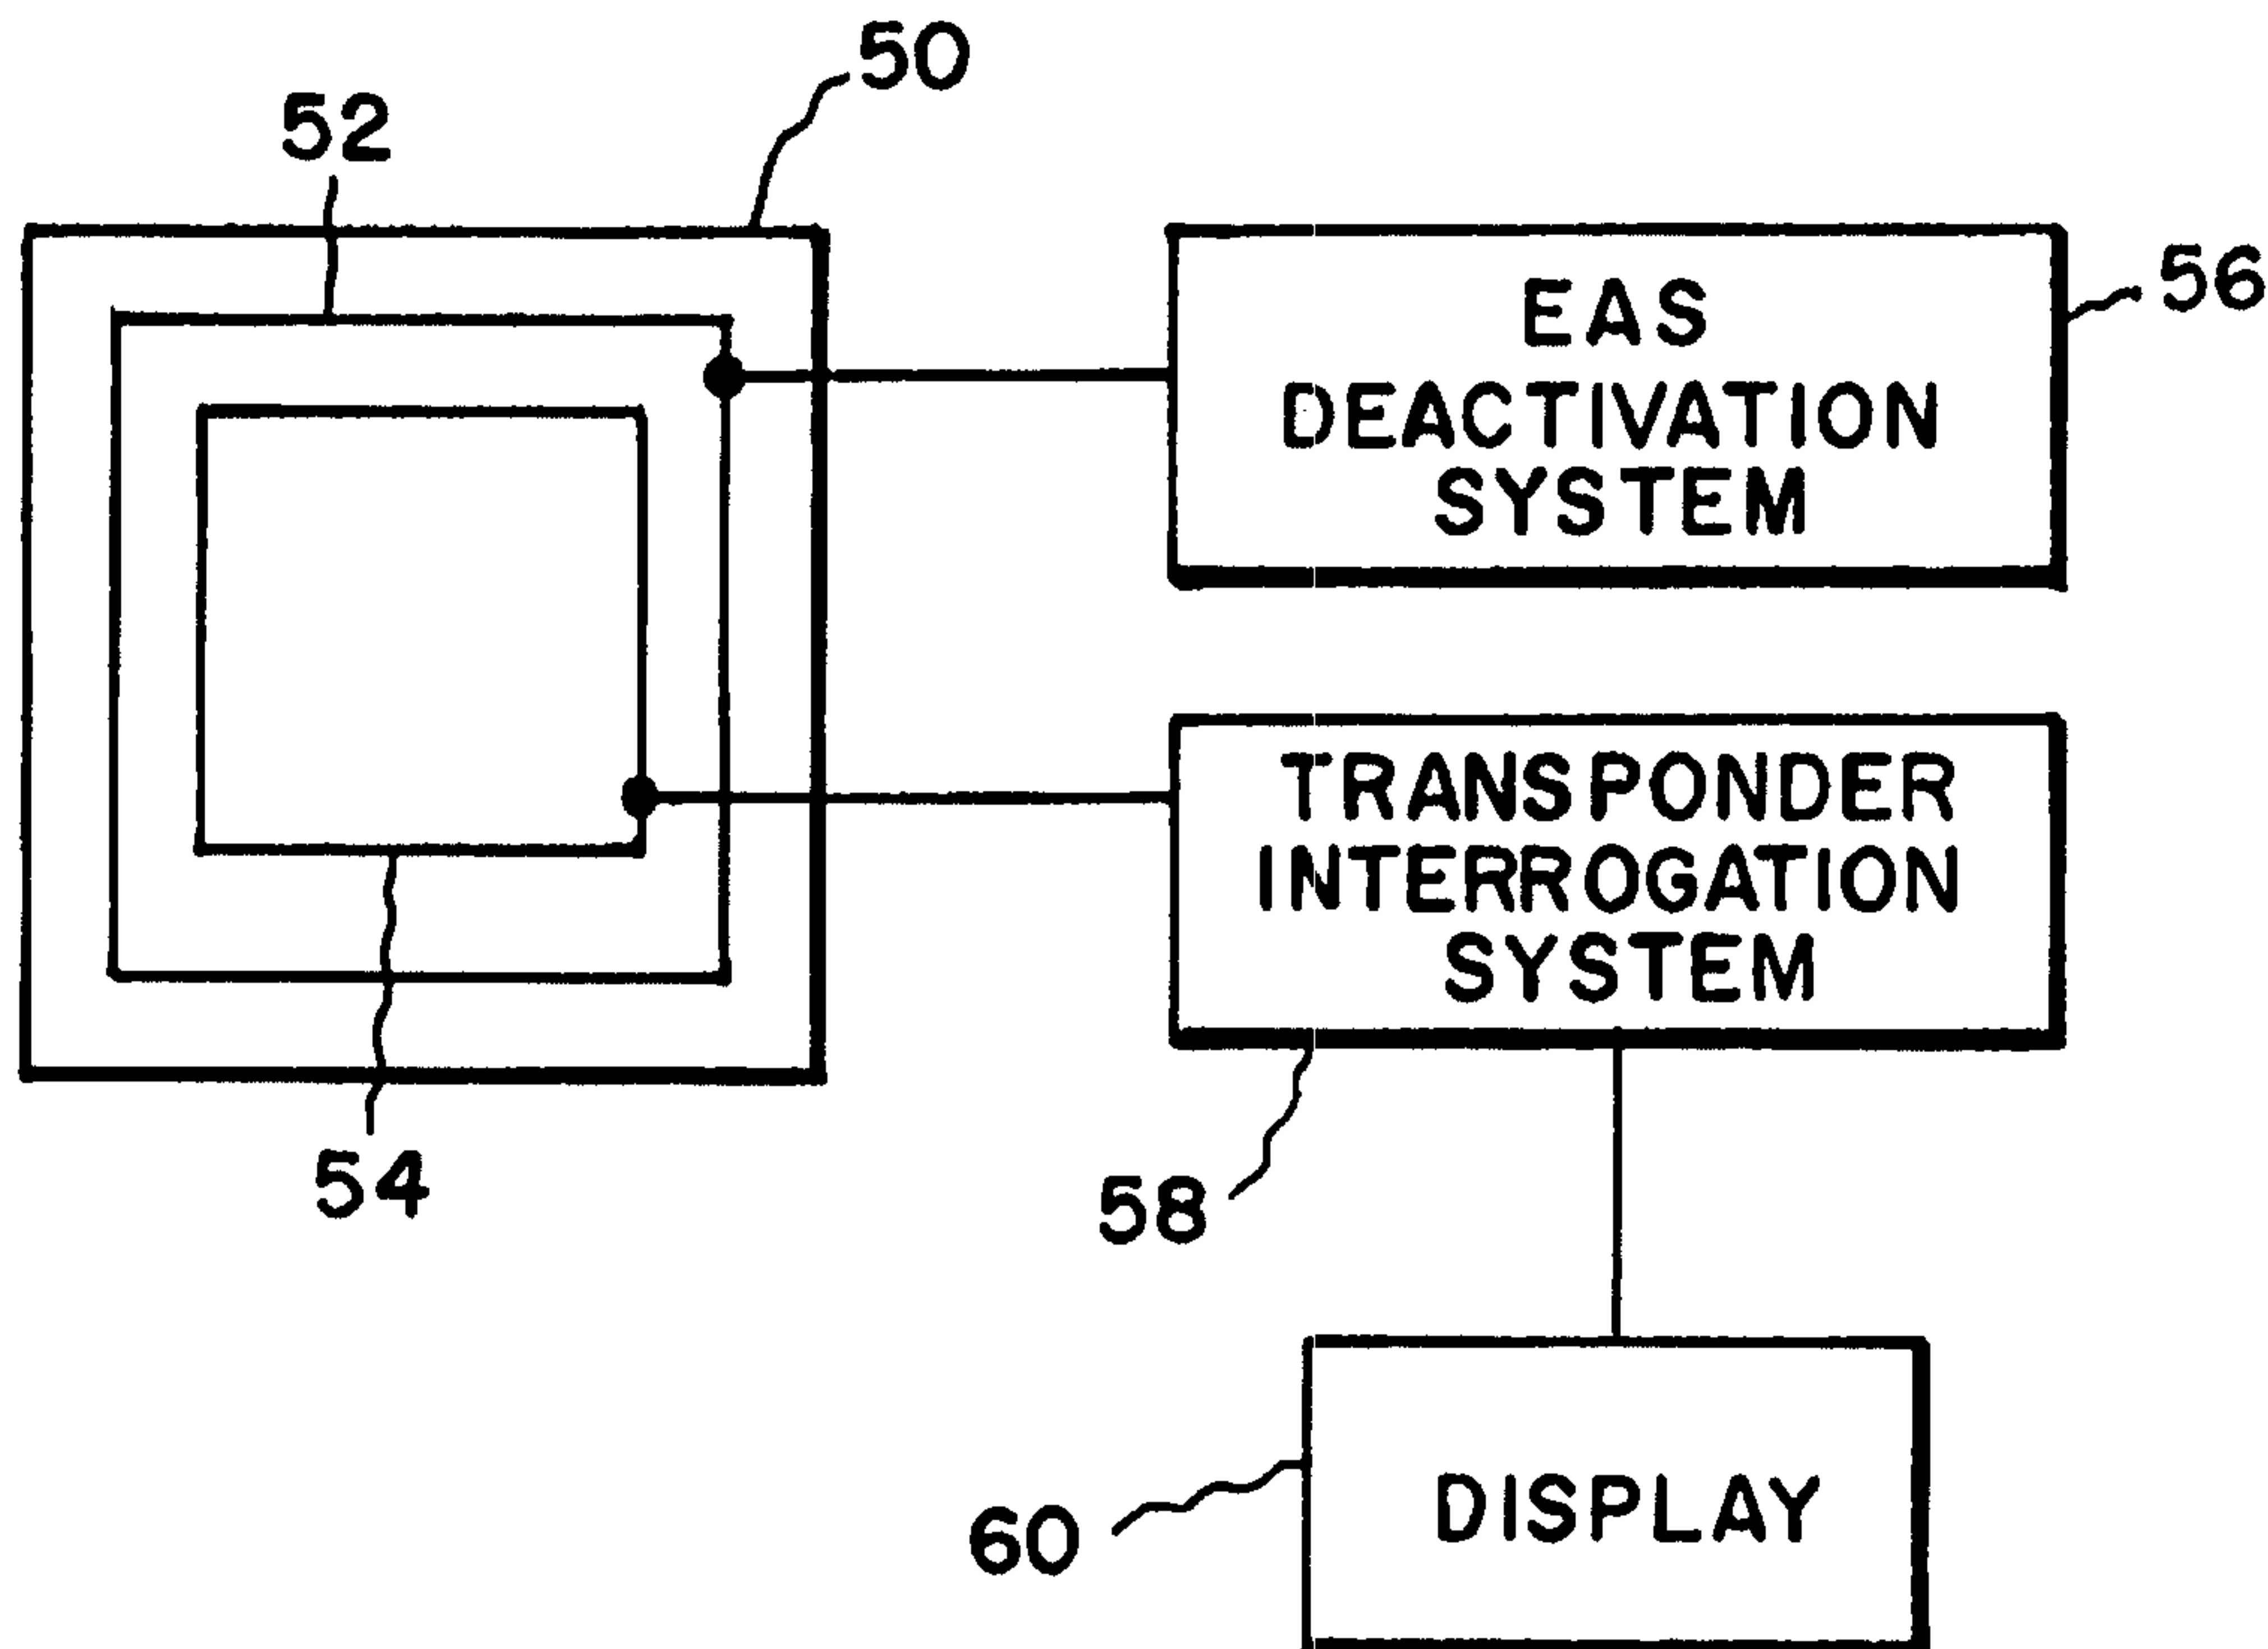**(57) Abstract**

An apparatus for data communication and deactivating an electronic article surveillance tag comprising an antenna (54) for communicating with a transponder located within a predetermined area and a deactivation coil (52) for deactivating an electronic article surveillance tag located within the predetermined area.

WO 98/13805

PCT/US97/17570

**AN APPARATUS FOR DATA COMMUNICATION AND DEACTIVATION OF
ELECTRONIC ARTICLE SURVEILLANCE TAGS**

FIELD OF THE INVENTION

5 This invention relates to electronic article surveillance and, more particularly, to data communication and deactivation of electronic article surveillance tags.

BACKGROUND OF THE INVENTION

 Electronic article surveillance (EAS) systems have employed either reusable EAS tags or disposable EAS tags to monitor articles to prevent shoplifting and unauthorized removal of
10 articles from store. The reusable EAS tags are normally removed from the articles before the customer exits the store. The disposable tags are generally attached to the packaging by adhesive or are disposed inside the packaging. These tags remain with the articles and must be deactivated before they are removed from the store by the customer. Deactivation devices use coils which are energized to generate a magnetic field of sufficient magnitude to render
15 the EAS tag inactive. The deactivated tags are no longer responsive to the incident energy of the EAS system so that an alarm is not triggered.

 In one type of deactivation system the checkout clerk passes the articles one at a time over a deactivation device to deactivate the tags and then places the articles into a shopping bag or other bulk container. This system employs one coil disposed horizontally within a
20 housing. The clerk moves the tagged articles across the horizontal top surface of the housing such that the tag is disposed generally coplanar with the coil.

 Another deactivation system utilizes a housing having a cavity with three sets of two coils each disposed around the cavity in respective x, y, and z axis planes, such that there is a coil located in a plane parallel to each side of the cavity and two coils disposed around the
25 cavity with one being near the top and the other being near the bottom of the cavity. The checkout clerk places a bag or bulk container into the cavity and then places the tagged articles into the bag. After all of the articles have been placed into the bag or when the bag is full, the clerk energizes the coils to deactivate all of the EAS tags in the bag. The clerk then lifts the bag out of the cavity. This system provides deactivation of multiple tags at one time
30 and does not require specific orientation of the tags.

77496-18

Many retail establishments having high volumes find it desirable to expedite and facilitate the checkout process including the gathering of data about the article being purchased and the deactivation of the EAS tags. The data required by many retailers includes article identification, the price of the article, and other information for inventory control. The bar code labels in current use are limited in the amount of data that can be provided, and the checkout clerk can have difficulties getting the proper line of sight between the bar code label and bar code scanner thereby slowing the checkout process.

SUMMARY OF THE INVENTION

In accordance with the present invention there is provided an apparatus for data communication and deactivation of an electronic article surveillance tag. The apparatus comprises an antenna positioned for communication with a transponder located within a predetermined area, and a deactivation coil for deactivating an electronic article surveillance tag located within the predetermined area.

The system of the present invention includes EAS deactivation and information gathering for the point of sale transaction to provide a complete solution to expedite retail checkout. High frequency radio frequency identification (RFID) tags are easily shielded or detuned by proximity to various materials and the human body, and RFID tags having small coil geometry do not provide the wide exit EAS coverage the retailers desire. However, the RFID tags are well suited to providing data about the article to which they are attached and are well suited to an expedited gathering of that data at the point of sale. In addition, data can be written to the RFID tag which can include the

77496-18

date and place of sale, the selling price, and the manufacturer for authenticity of the article. An EAS tag provides the security needed by the retail environment.

Other objectives, advantages, and applications of the present invention will be made apparent by the following detailed description of the preferred embodiment of the invention.

One broad aspect of the invention provides an apparatus for use with articles having associated data transponders and associated electronic article surveillance tags, said apparatus comprising: a housing defining a volume in which a bag can be placed for packaging said articles, said housing having an open side for removal of said bag and an open top; a plurality of deactivation coils positioned in said housing for simultaneously deactivating said electronic article surveillance tags when said articles are in said volume; and a data communication system comprising an antenna positioned in said housing for communicating with said data transponders when said articles are in said volume.

DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a bagging station having a data capture and EAS tag deactivation system according to one embodiment of the present invention.

Fig. 2 is a perspective partially cut away view showing one embodiment of the deactivation coils and transponder interrogation antenna in the bagging station of Fig. 1.

WO 98/13805

PCT/US97/17570

Fig. 3 is a diagram showing one embodiment of an EAS deactivation coil and transponder interrogation antenna.

Fig. 4 shows an alternative embodiment of the present invention.

Fig. 5 illustrates a preferred embodiment of an integrated tag for use with the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring to Fig. 1, a bagging station 10 incorporating a data capturing and EAS deactivation system according to one embodiment of the present invention is shown. Bagging station 10 has three sidewalls 12, 14, and 16 and a bottom 18 that define a volume 20 in which a shopping bag 22 or other bulk container can be placed. A quantity of plastic shopping bags can be placed on bulk holder 24 with their handles on bag racks 26 and 28 and then pulled out for use one at a time. Bulk holder 24 and bag racks 26 and 28 are mounted on sidewall 16. Shopping bag 22 contains article 30 which has an associated EAS tag 32 for use with an EAS system as is known in the art and a transponder tag 33 that contains a radio frequency identification (RFID) chip and an antenna. The RFID chip of transponder tag 33 has a memory that can contain data that identifies the article and the pricing of the article as well as other information to assist in the point of sale transaction, and inventory control. Preferably EAS tag 32 is a magnetoacoustic EAS tag sold by the assignee of this application under the brand name "ULTRA•MAX®", such EAS tags are used widely for theft deterrence.

Fig. 2 shows a deactivation coil and transponder antenna arrangement of the present invention for use with bagging station 10. Deactivation coil 34 is located inside sidewall 12, and deactivation coil 36 is located inside sidewall 14. Sidewalls 12 and 14 are parallel so that deactivation coils 34 and 36 are located in parallel planes. Deactivation coil 38 has four coil sections 40, 42, 44, and 46. Coil section 40 is located in bottom 18 near the front portion thereof, and coil section 42 is located in sidewall 16 near the top portion thereof. Coil sections 44 and 46 are located in sidewalls 12 and 14 respectively along the approximate respective diagonals of deactivation coils 34 and 36. A power supply energizes deactivation coils 34, 36, and 38 to create the magnetic fields to deactivate EAS tag 32. Antenna 48 for interrogating transponders located in a predetermined area, such as volume 20, captures the data about article 30 that is contained in transponder tag 33.

WO 98/13805

PCT/US97/17570

Fig. 3 illustrates diagrammatically one embodiment of an EAS deactivation coil and transponder interrogation antenna in a sidewall of the system shown in Figs. 1 and 2. Coil section 42 of deactivation coil 38 is located near the top portion of sidewall 16 as illustrated in Figs. 1 and 2. Interrogation coil 48 can be a simple loop antenna as shown or it can
 5 comprise alternate configurations as is known in the art.

Fig. 4. shows an alternative embodiment of the present invention in which the EAS deactivation coil and the transponder coil are positioned in a pad or housing 50, such as the deactivation pad marketed by the assignee of this invention under the brand name "Rapid Pad™". EAS deactivation coil 52 is located inside housing 50, and transponder interrogation
 10 antenna 54 is also positioned inside housing 50. As shown antenna 54 is positioned inside of deactivation coil 52; however, other configurations are possible, for example, antenna 54 can be located outside of deactivation coil 52 or antenna 54 and deactivation coil 54 can overlap. Deactivation coil 52 is actuated by EAS deactivation system 56 as is known in the art. Antenna 54 is connected to transponder interrogation system 58 which provides the
 15 appropriate interrogation signals, as is known in the art, to a transponder positioned in a predetermined area, such as an area above housing 50, to gather information about the article being checked out and then use such information for the transaction at the point of sale. In addition, transponder interrogation system 58 can provide or write information to the transponder. This information can include the date and place of sale, the selling price, and
 20 manufacturer for authenticity of the article. The information can be displayed on display 60 which can be a monitor, cash register display or other suitable display. In addition, transponder interrogation system 58 can store such information for inventory control or other uses.

Referring to Fig. 5, a preferred embodiment of a multifunction tag 10 for use with the
 25 present invention is shown. A bottom cover 12, such as a substrate or film, has an upper surface 14 on which EAS tag 16 is positioned. A transponder 18 comprising an RFID chip 20 and an antenna 22 attached to RFID chip 20 are positioned on surface 14 such that antenna 22 is located around EAS tag 16. RFID chip 20 contains logic and memory as is known in the art, and the memory can contain data about the article to which it will be attached. This
 30 data can include identification of the article, the price of the article, and inventory control information. A cover 24, such as a film or mylar, covers EAS tag 16 and transponder 18.

WO 98/13805

PCT/US97/17570

The surface of cover 24 which contacts surface 14, EAS tag 16, and transponder 18 can also have an adhesive to assist in bonding the parts together. Cover 12 can comprise a housing that has a cavity that is sized to accommodate transponder 18 and a another cavity that is sized to accommodate EAS tag 16.

- 5 It is to be understood that variations and modifications of the present invention can be made without departing from the scope of the invention. It is also to be understood that the scope of the invention is not to be interpreted as limited to the specific embodiments disclosed herein, but only in accordance with the appended claims when read in light of the foregoing disclosure.

77496-18

CLAIMS:

1. An apparatus for use with articles having associated data transponders and associated electronic article surveillance tags, said apparatus comprising: a housing defining a volume in which a bag can be placed for packaging said articles, said housing having an open side for removal of said bag and an open top; a plurality of deactivation coils positioned in said housing for simultaneously deactivating said electronic article surveillance tags when said articles are in said volume; and a data communication system comprising an antenna positioned in said housing for communicating with said data transponders when said articles are in said volume.

15

2. An apparatus as recited in claim 1, wherein said data transponders have data stored about said articles with which said data transponders are associated and said data communication system gathers the data from said data transponders when said articles are in said volume.

20

3. An apparatus as recited in claim 2, wherein said data gathered from said data transponders comprises at least one of selling prices of said articles, identification of said articles, and identities of manufacturers of said articles.

25

4. An apparatus as recited in claim 3, further comprising a display connected to said data communication system and wherein said data communication system provides the data gathered from data transponders to said display.

30

77496-18

5. An apparatus as recited in claim 1, wherein said data communication system can transmit data to said data transponders when said data transponders are in said volume and said data transponders can receive and store data
5 transmitted from said data communication system.

6. An apparatus as recited in claim 5, wherein said data transmitted by said data communication system comprises at least one of dates of sale of said articles, places of
10 sale of said articles, and selling prices of said articles.

7. An apparatus as recited in claim 2, wherein said data communication system can transmit data to said data transponders when said data transponders are in said volume
15 and said data transponders can receive and store data transmitted from said data communication system.

8. An apparatus as recited in claim 7, wherein said data transmitted by said data communication system comprises
20 at least one of dates of sale of said articles, places of sale of said articles, and the selling prices of said articles.

9. An apparatus as recited in claim 1, wherein said
25 plurality of deactivation coils comprises three deactivation coils.

10. An apparatus as recited in claim 9, wherein a first deactivation coil of said three deactivation coils is
30 positioned in a first wall of said housing, a second deactivation coil of said three deactivation coils is positioned in a second wall of said housing, and a third

77496-18

deactivation coil of said three deactivation coils is positioned in said housing such that said third deactivation coil intersects said first and second deactivation coils at an angle that is greater than zero
5 degrees and less than ninety degrees.

11. An apparatus as recited in claim 10, wherein said first and second walls are opposite each other and said antenna for communicating with said data transponders is
10 positioned in a wall located between said first and second walls.

12. An apparatus as recited in claim 11, wherein said third deactivation coil is collinear with a diagonal of said
15 first and second deactivation coils.

13. An apparatus as recited in claim 12, wherein said first and second walls are parallel.

20 14. An apparatus as recited in claim 13, wherein said data transponders have data stored about said articles with which said data transponders are associated and said data communication system gathers the data from said data transponders when said articles are in said volume.

25
15. An apparatus as recited in claim 14, wherein said data gathered from said data transponders comprises at least one of selling prices of said articles, identification of the articles and identification of manufacturers of said
30 articles.

16. An apparatus as recited in claim 15, further comprising a display connected to said data communication

77496-18

system and wherein said data communication system provides the data gathered from said data transponders to said display.

5 17. An apparatus as recited in claim 13, wherein said data communication system can transmit data to said data transponders when said data transponders are in a predetermined area and said data transponders can receive and store data transmitted from said data communication
10 system.

18. An apparatus as recited in claim 17, wherein said data transmitted by said data communication system comprises at least one of dates of sale of said articles, places of
15 sale of said articles, and selling prices of said articles.

19. An apparatus as recited in claim 14, wherein said data communication system can transmit data to said data transponders when said data transponders are in a
20 predetermined area and said data transponders can receive and store data transmitted from said data communication system.

20. An apparatus as recited in claim 19, wherein said
25 data transmitted by said data communication system comprises at least one of dates of sale of said articles, places of sale of said articles, and selling prices of said articles.

SMART & BIGGAR
OTTAWA, CANADA
PATENT AGENTS

1/4

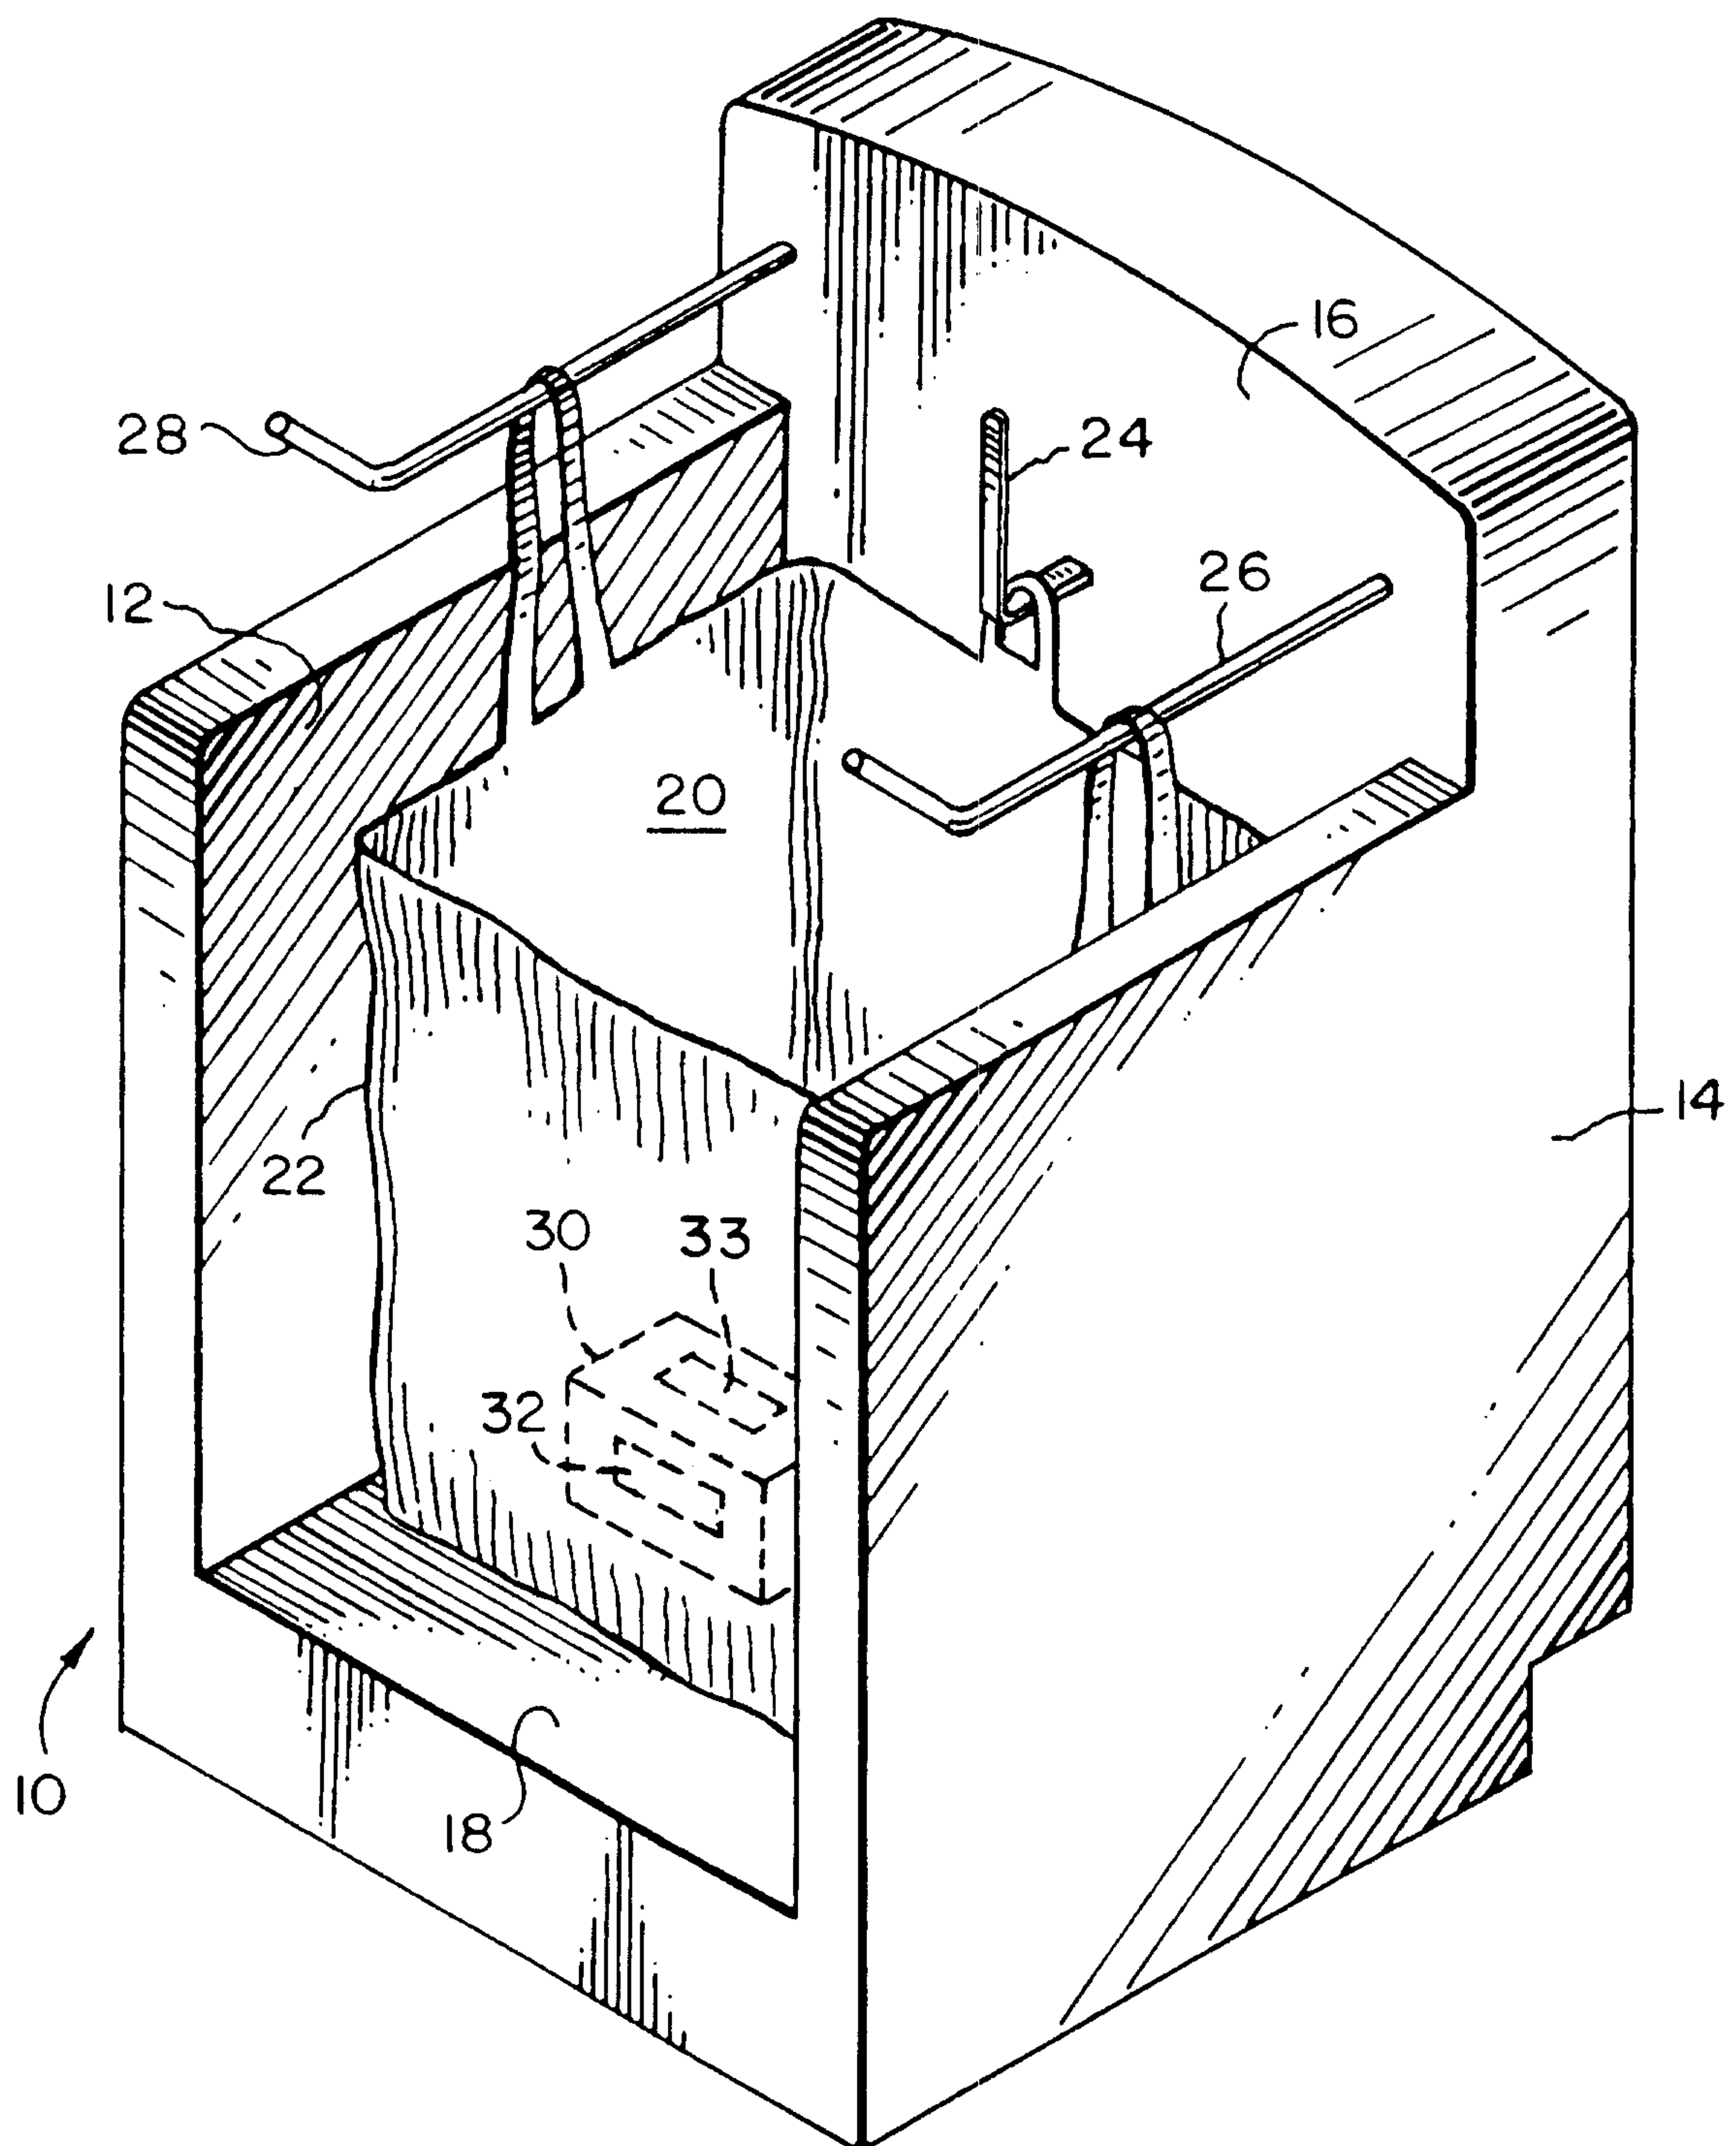


FIG. 1

SUBSTITUTE SHEET (RULE 26)

2/4

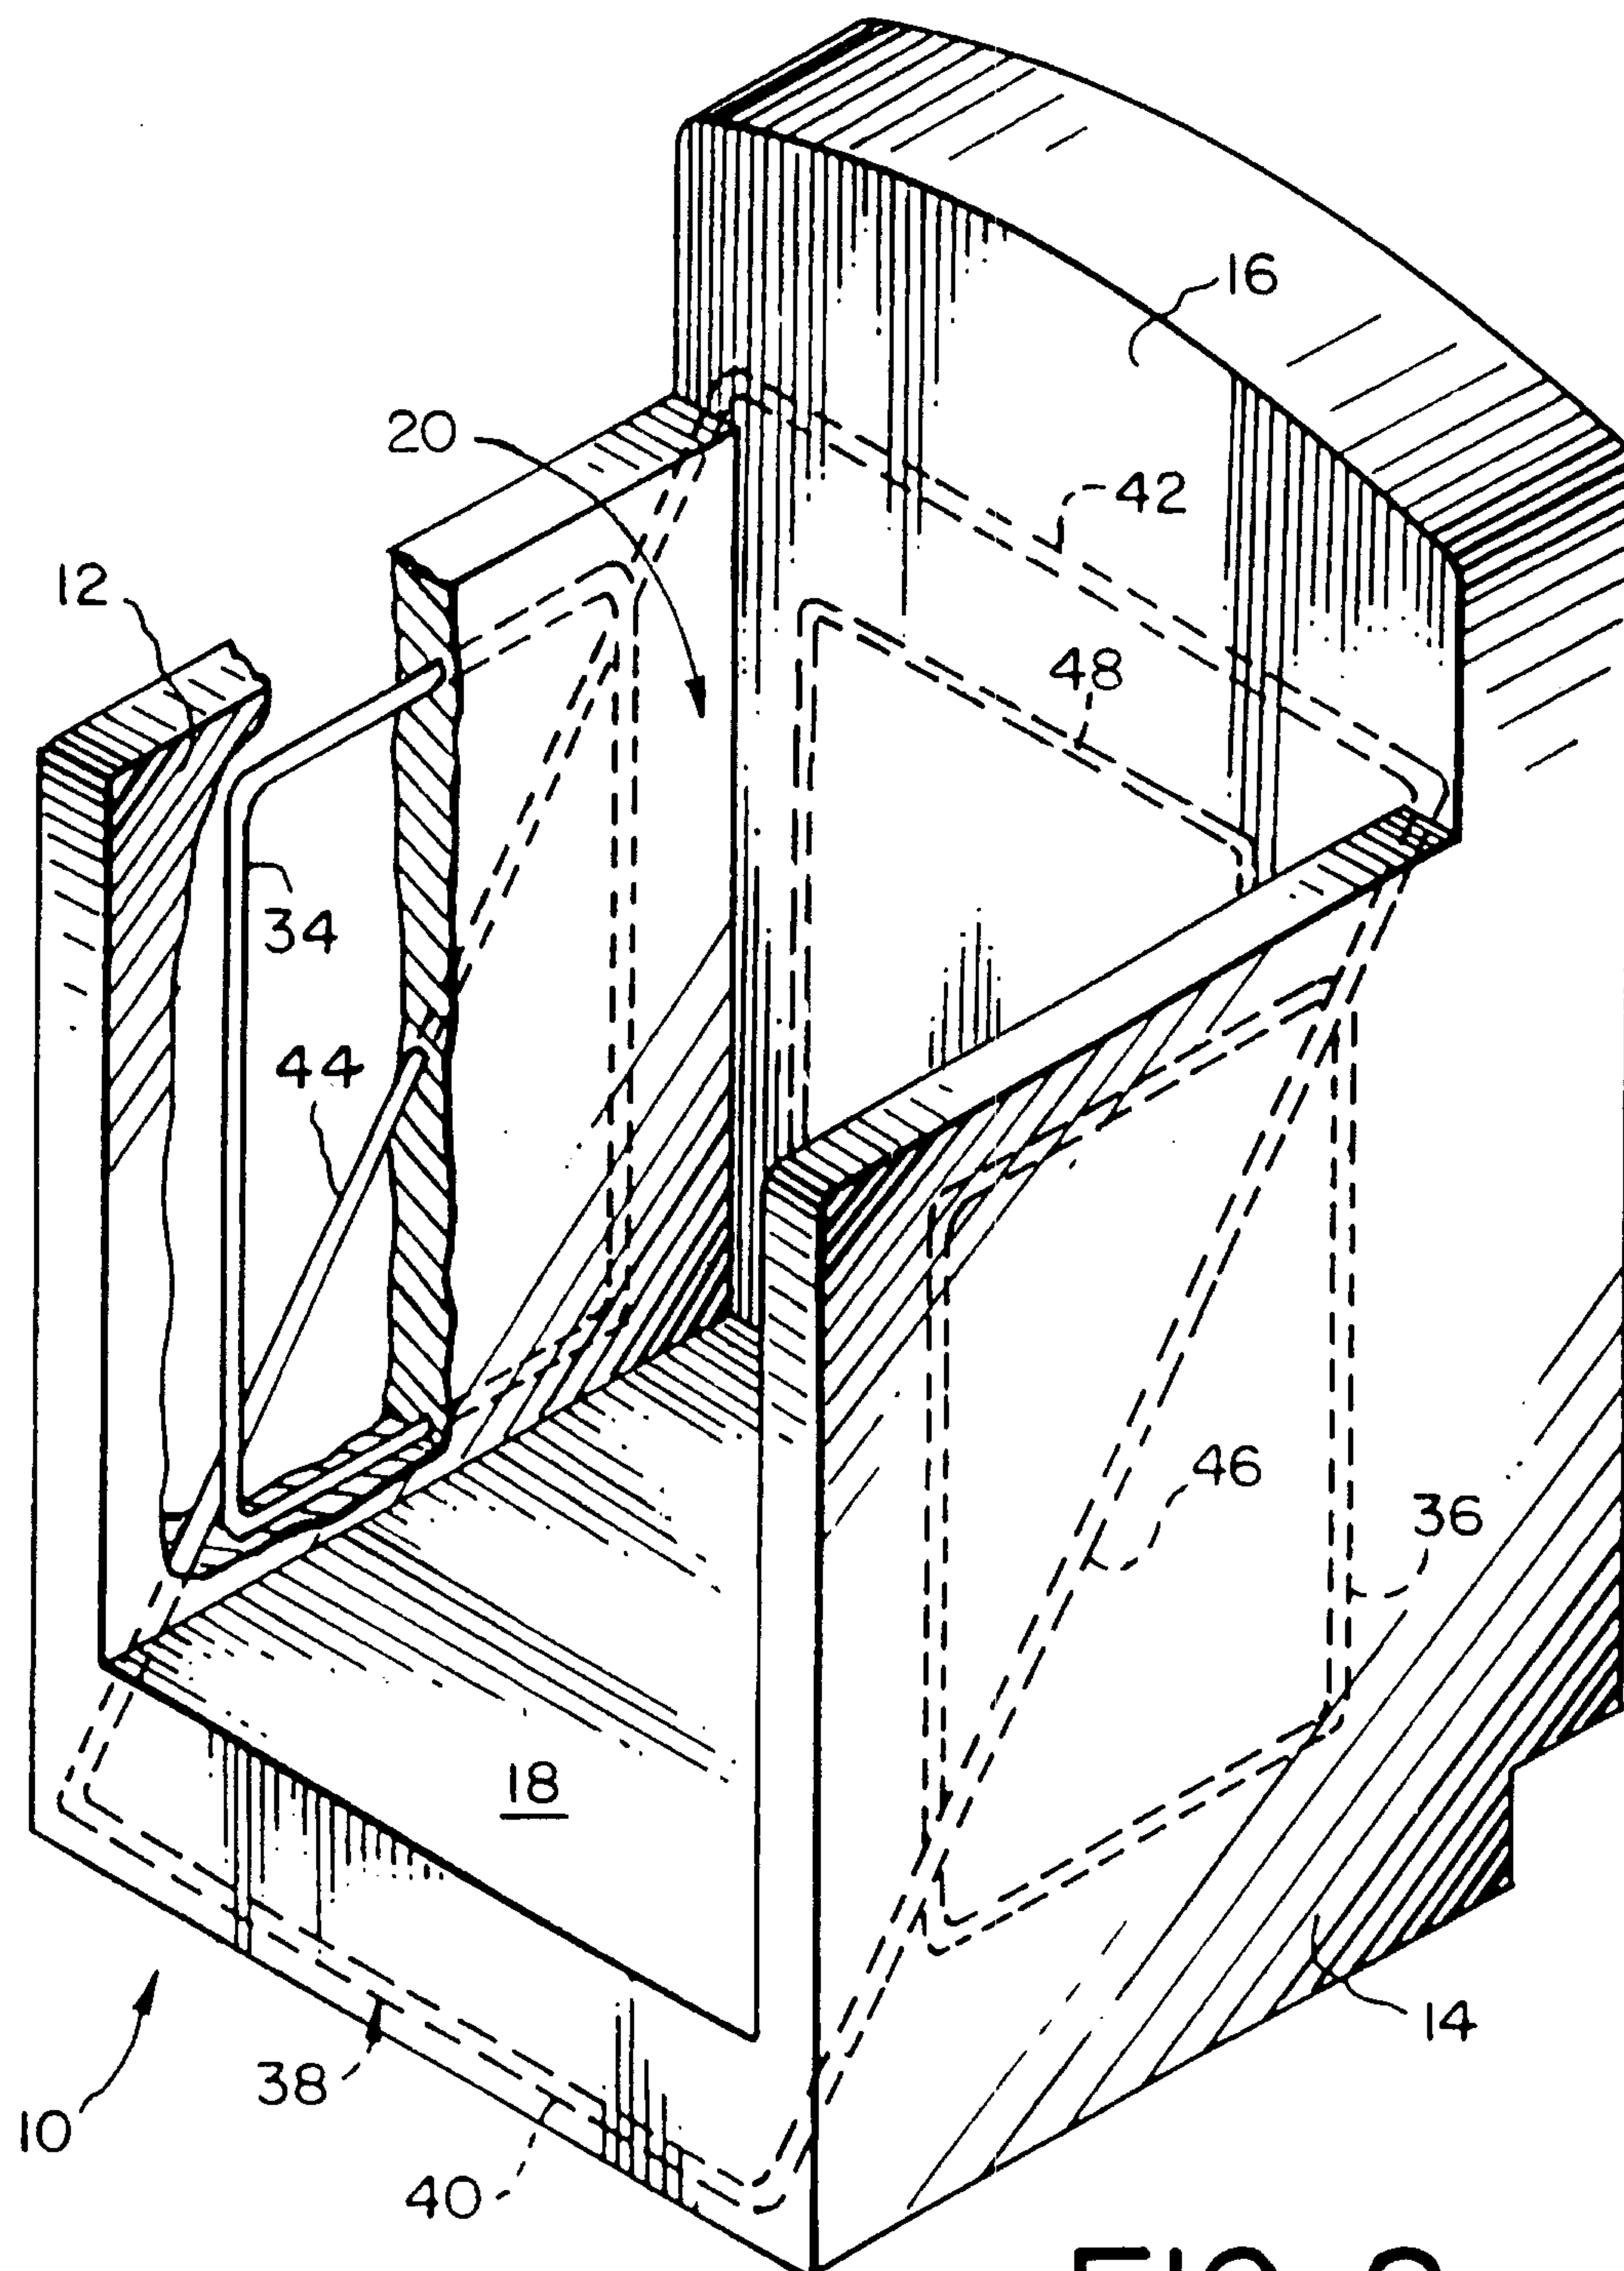
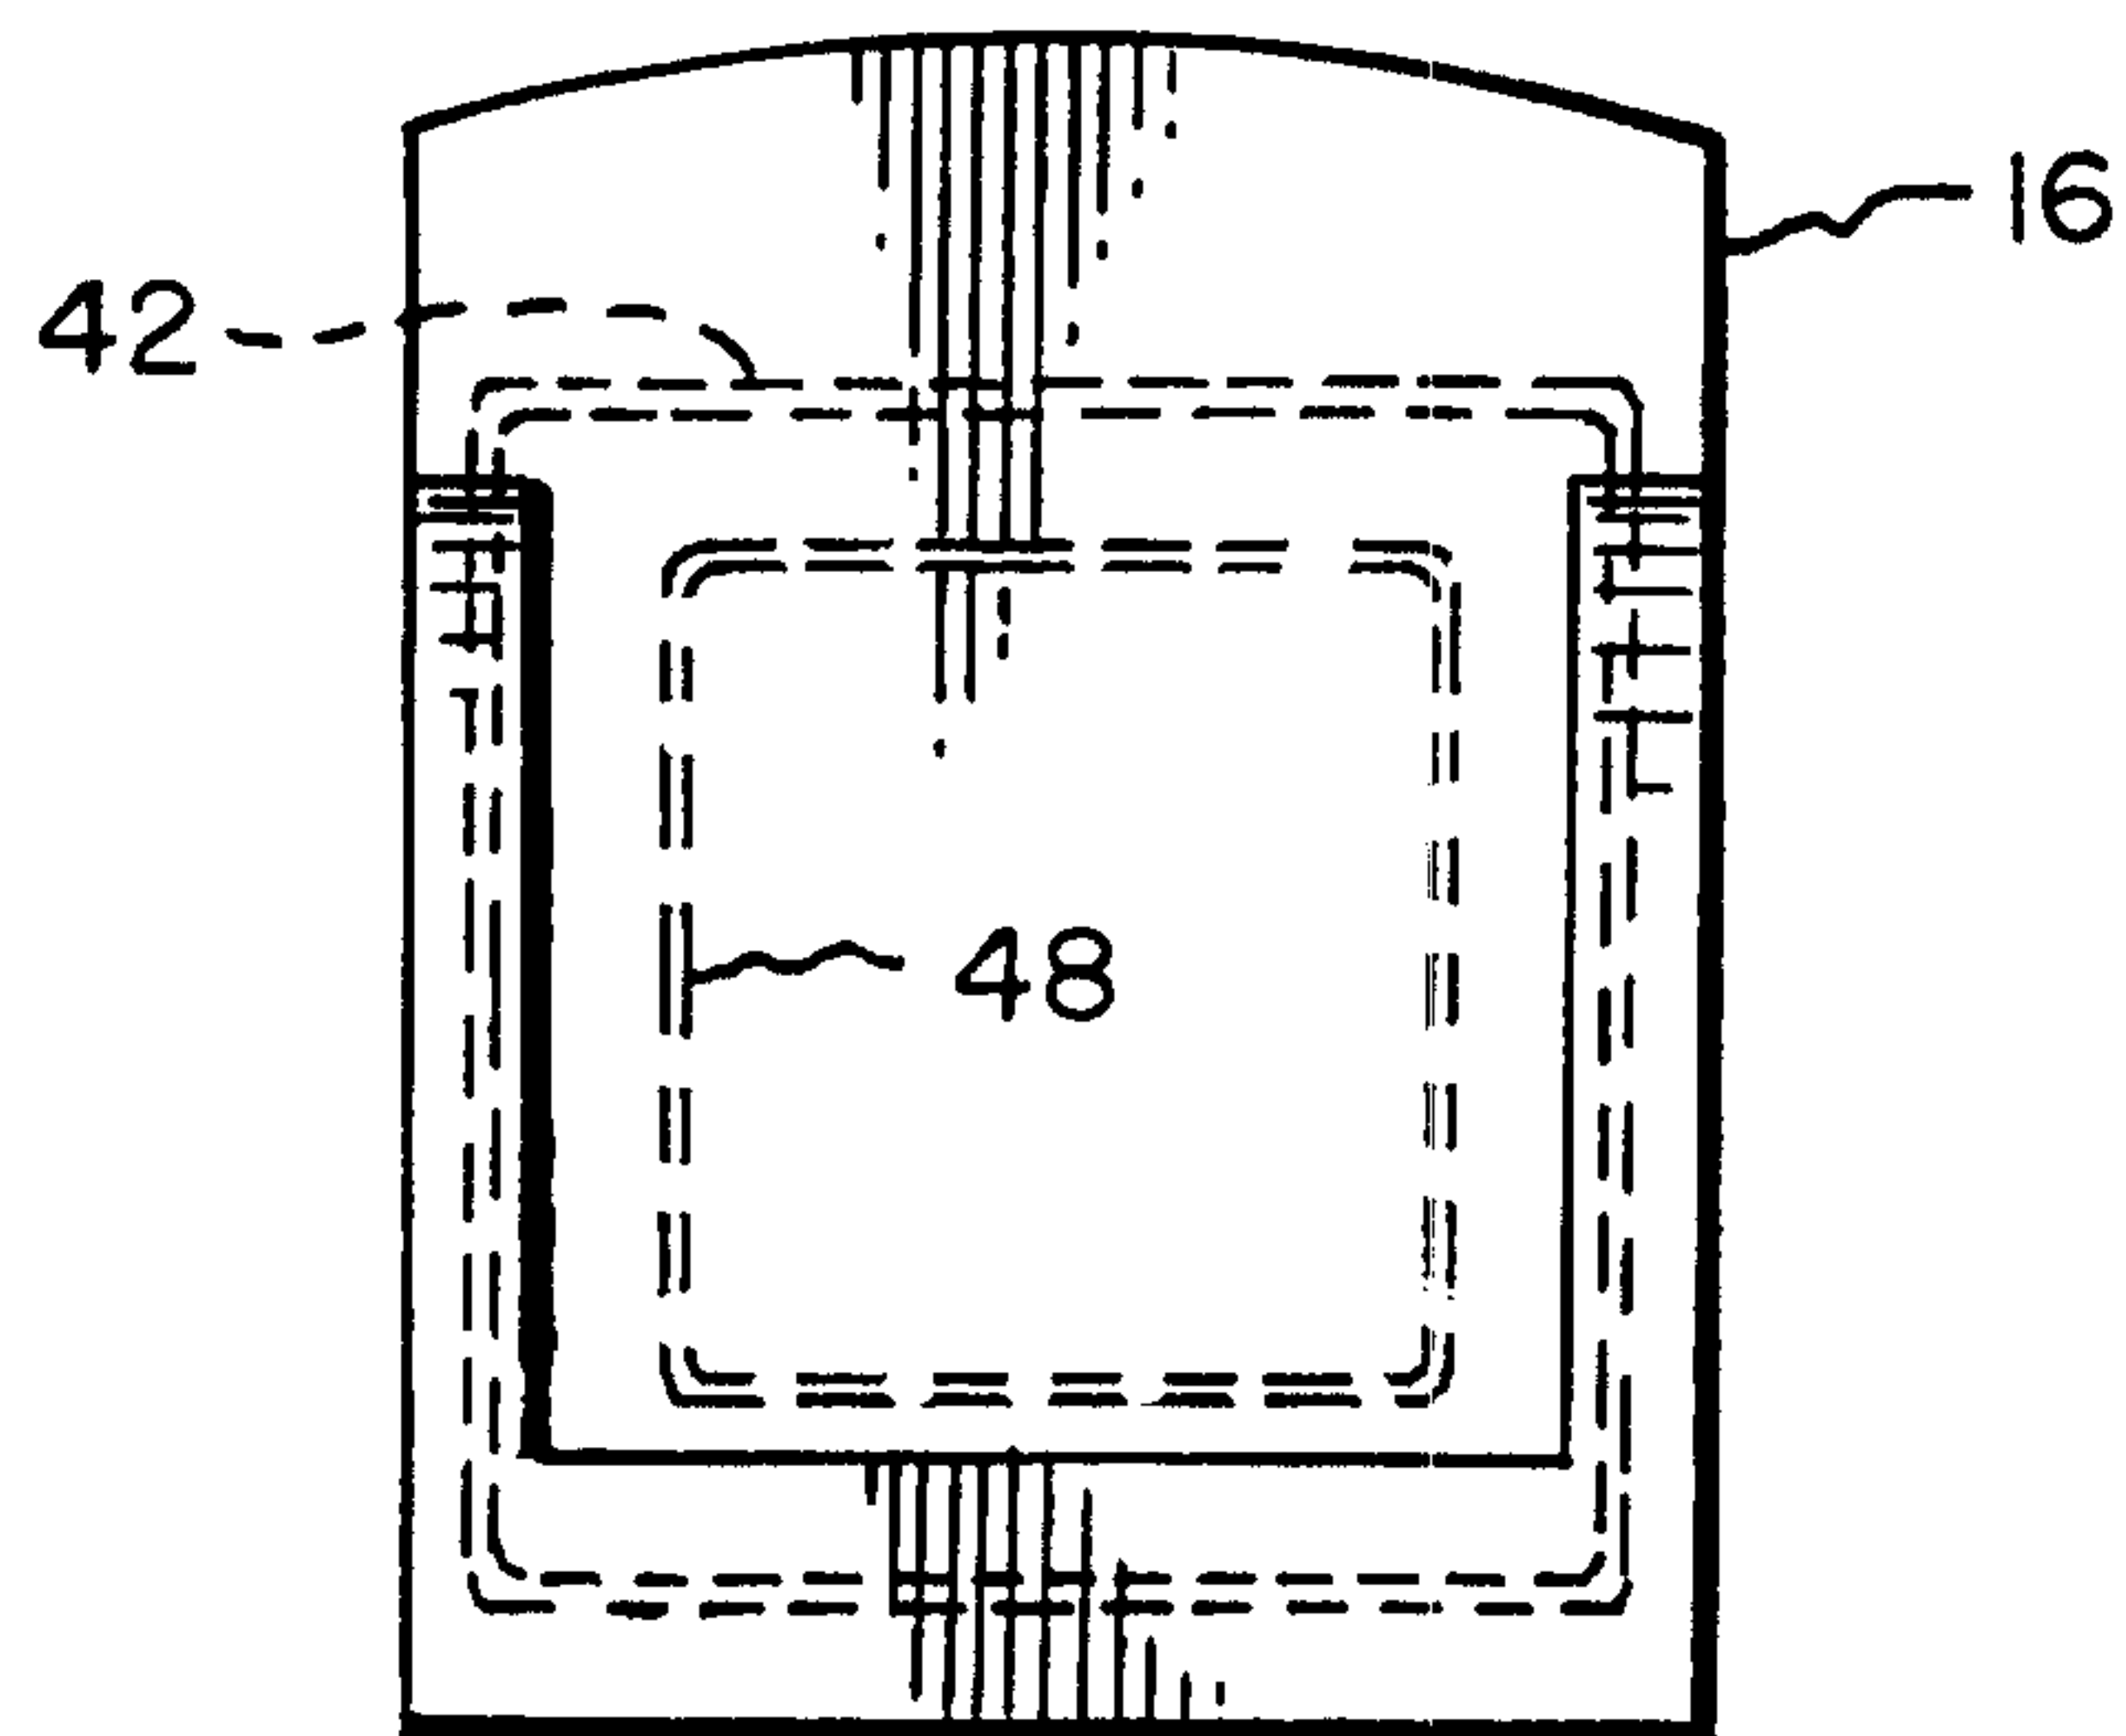
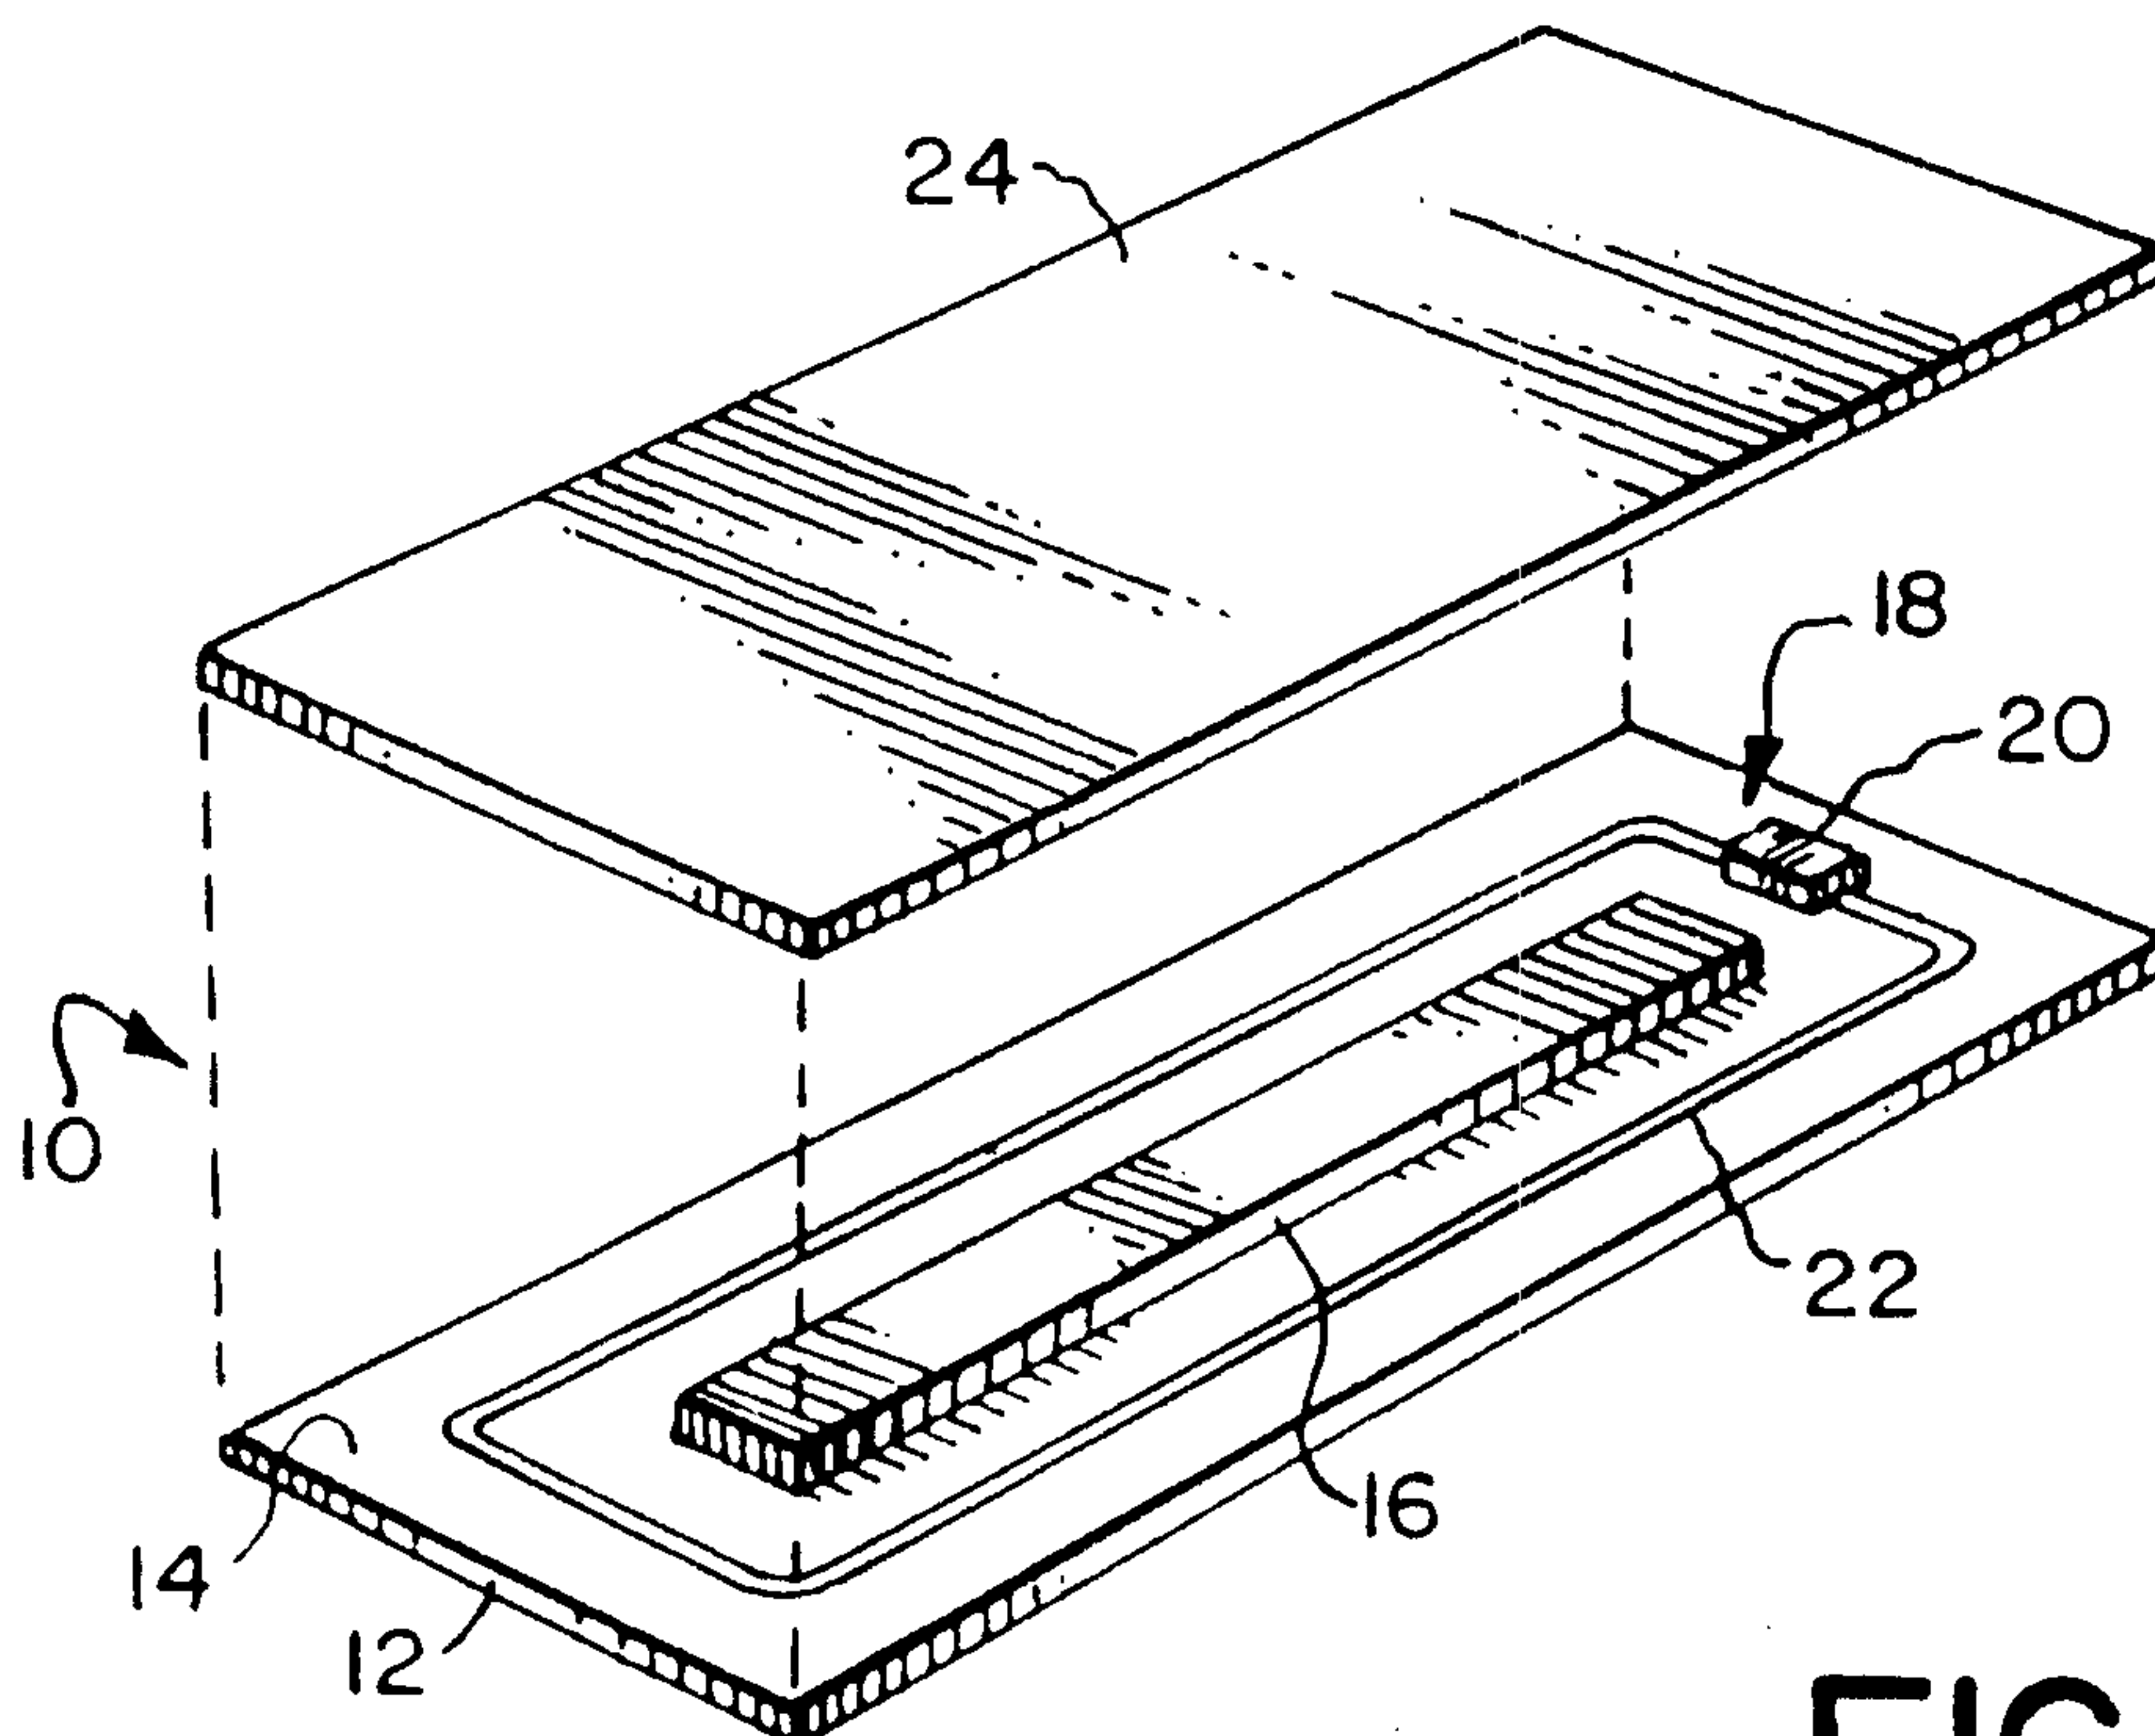
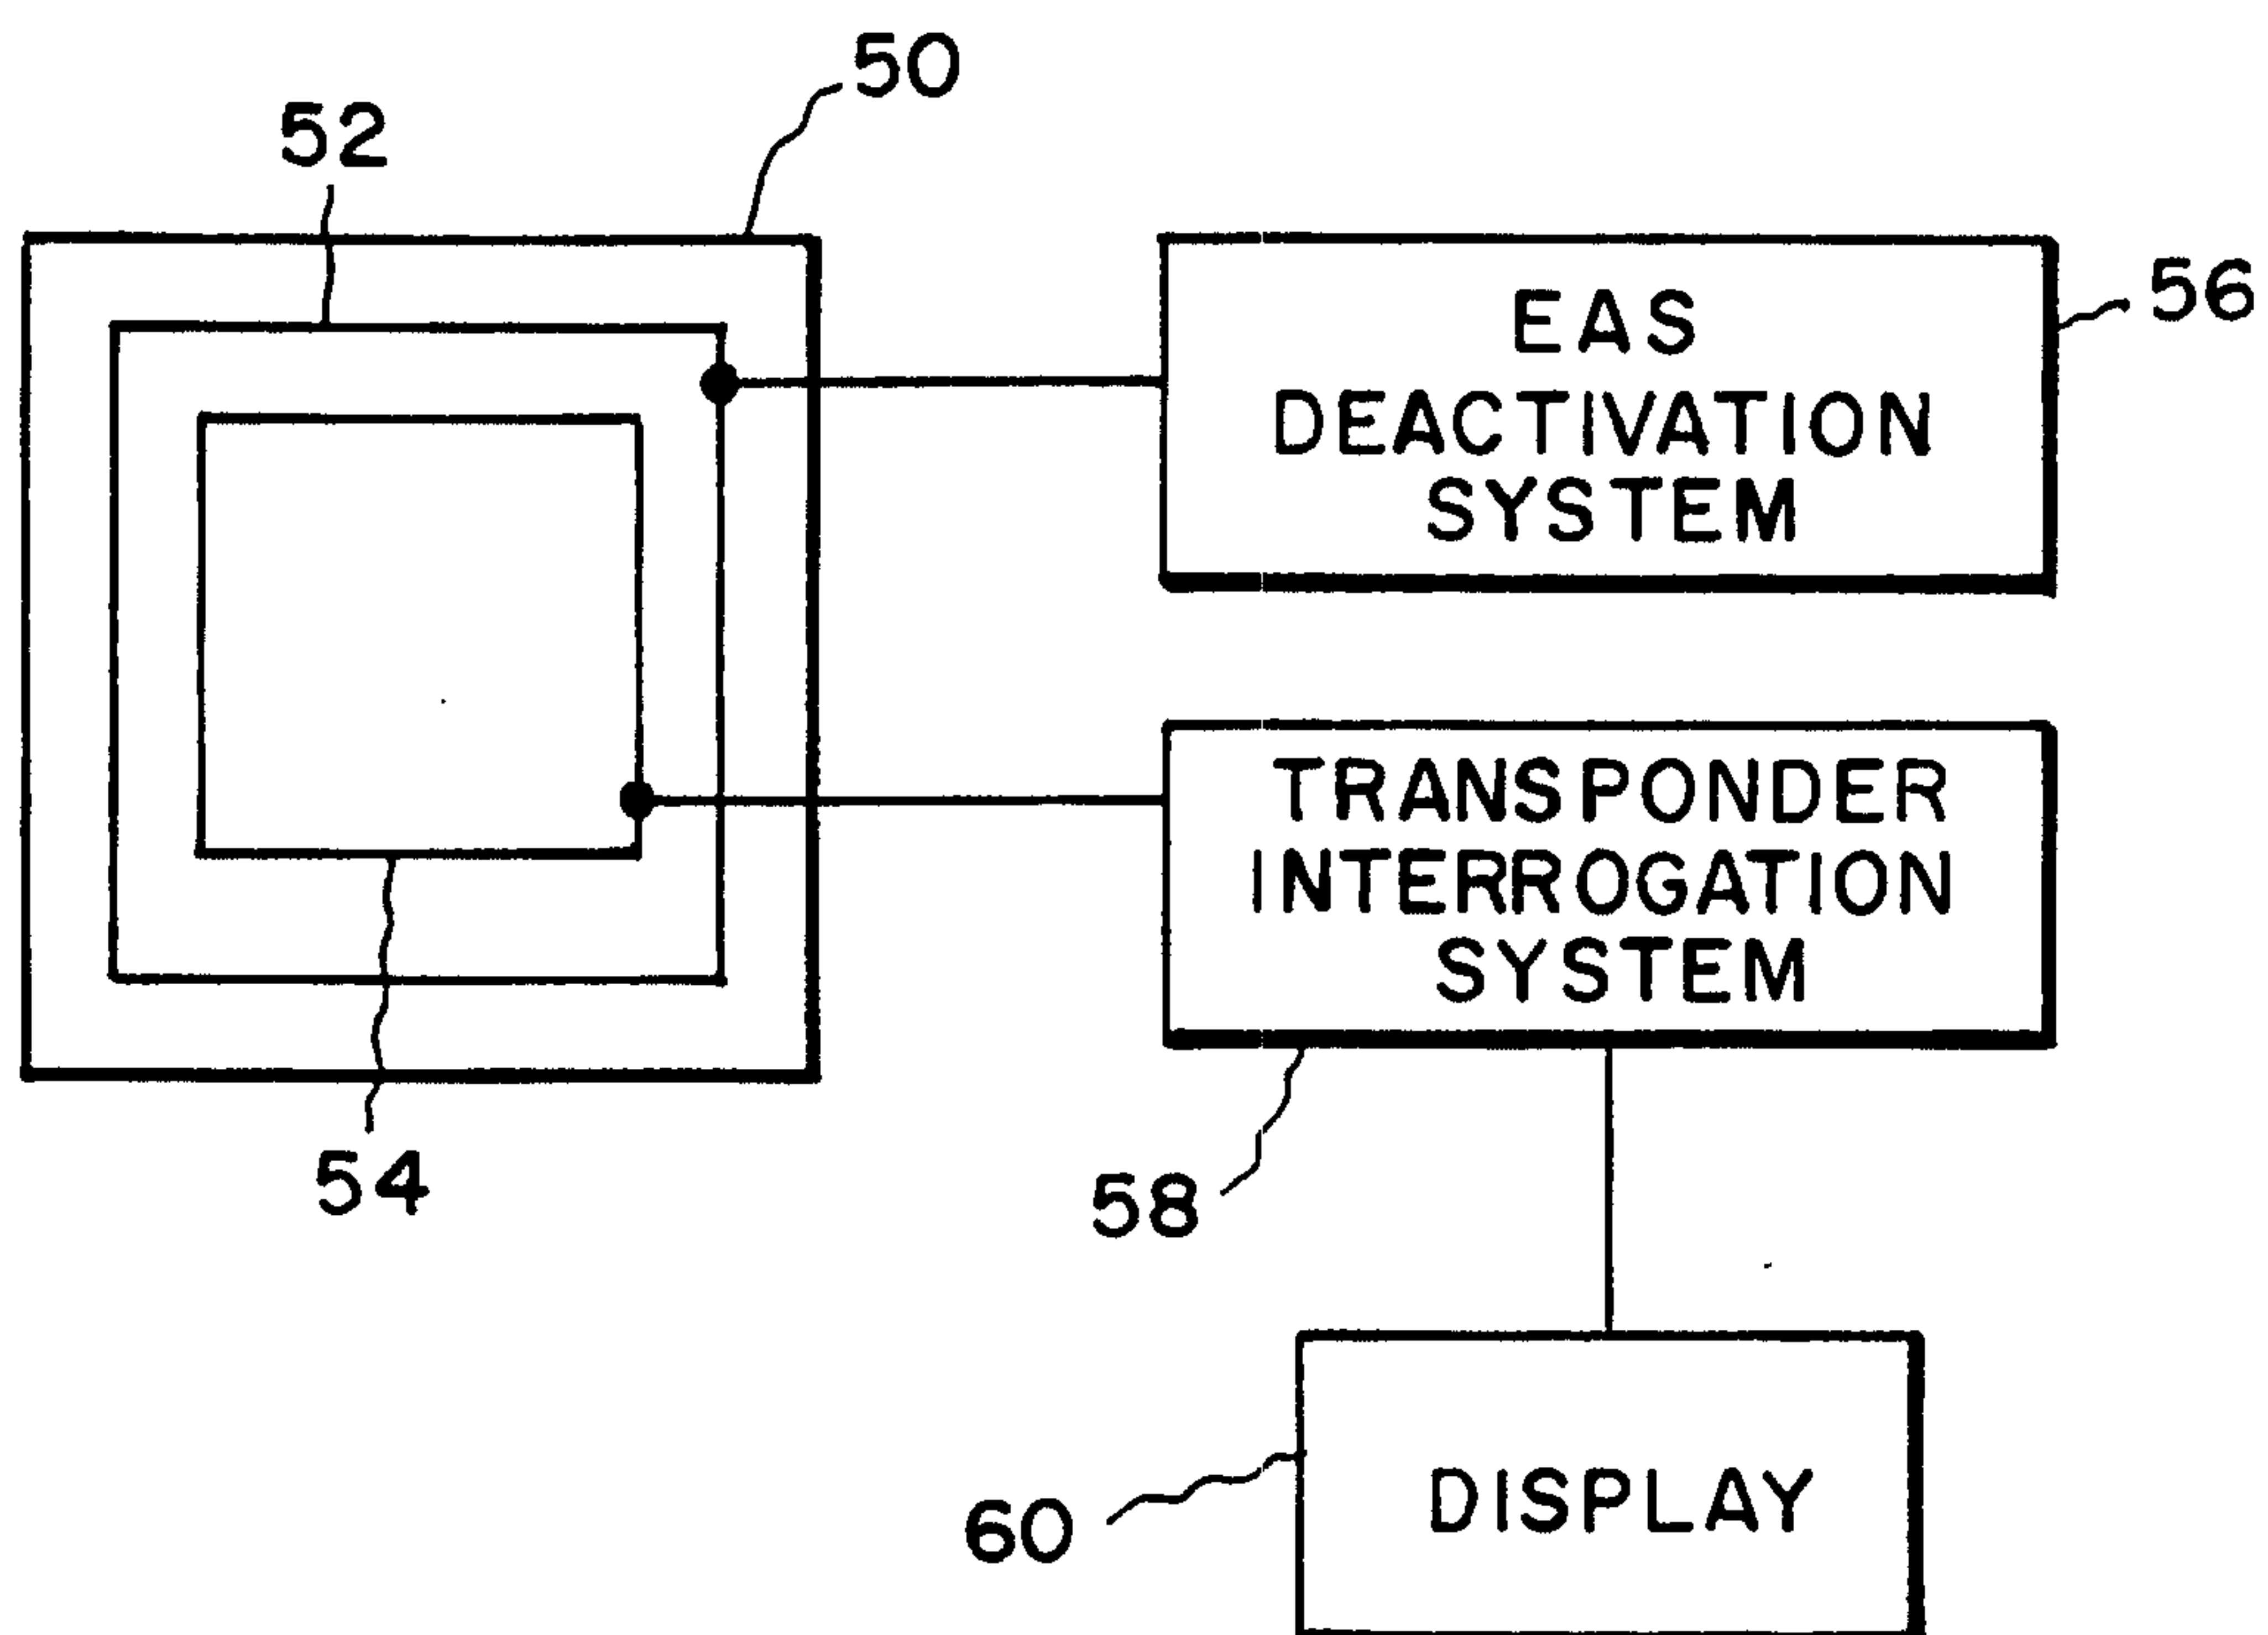


FIG. 2

3/4

FIG. 3FIG. 5

4/4

FIG. 4

