

CORRECTED VERSION

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
2 February 2006 (02.02.2006)

PCT

(10) International Publication Number  
**WO 2006/012510 A1**

(51) International Patent Classification<sup>7</sup>: **F15B 11/00**

(21) International Application Number:  
PCT/US2005/026030

(22) International Filing Date: 22 July 2005 (22.07.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/590,669 23 July 2004 (23.07.2004) US  
60/590,483 23 July 2004 (23.07.2004) US

(71) Applicant (for all designated States except US): **AFA CONTROLS, LLC** [US/US]; The Corporation Trust Company, Corporation Trust Center, 1209 Orange Street, Wilmington, Delaware 19801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **TEACH, William O.** [US/US]; 11326 Laura Lane, Frankfort, Illinois 60423 (US). **GIBSON, Paul W.** [US/US]; 25 South Poplar, Manteno, Illinois 60950 (US). **DOUGLAS, Kevin R.** [US/US]; 15342 Baneberry Circle, Lockport, Illinois 60441 (US). **HARRIS, Donald C.** [US/US]; 25528 Sharon Lane, Crete, Illinois 60417 (US). **LASKI, James C.** [US/US]; 391 Kristina Drive, Bourbonnais, Illinois 60914 (US).

(74) Agent: **MYERS BIGEL SIBLEY & SAJOVEC, P.A.;** P.O. Box 37428, Raleigh, North Carolina 27627 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

(48) Date of publication of this corrected version:


16 March 2006

(15) Information about Correction:

see PCT Gazette No. 11/2006 of 16 March 2006, Section II

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MICROVALVE ASSEMBLIES AND RELATED METHODS

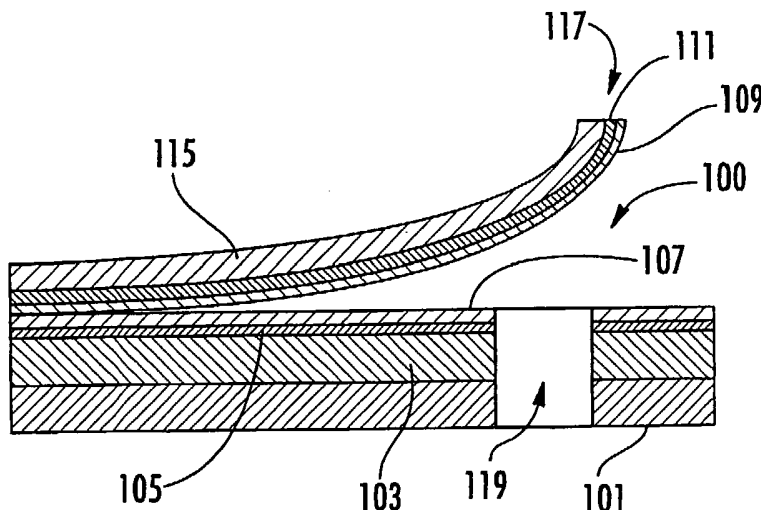

(57) Abstract: A valve chip may include a substrate having first and second faces and openings between the first and second faces, and a plurality of flexible valve flaps on one of the faces of the substrate with each flexible valve flap being associated with at least one of the openings. The valve chip may be packaged by forming a frame having an opening therein, and securing the valve chip in the opening of the frame. More particularly, the valve chip may be secured in the opening so that central portions of the first and second faces of the substrate are exposed through the opening in the frame and so that a fluid seal is provided between the frame and edges of the substrate. Related valves, valve assemblies, and methods are also discussed.

WO 2006/012510 A1

## MICROVALVE ASSEMBLIES AND RELATED METHODS

### Related Applications

[0001] This application claims the benefit of and priority to U.S. Provisional Application No. 60/590,483 filed July 23, 2004, and to U.S. Provisional Application No. 60/590,669 filed July 23, 2004. The disclosures of both of the above referenced provisional applications are hereby incorporated herein in their entirety by reference. This application is also related to U.S. Utility Application Serial No. \_\_\_\_\_ (Attorney Docket No. 9451-4) filed concurrently herewith and entitled "*Methods Of Operating Microvalve Assemblies And Related Structures and Devices*", the disclosure of which is hereby incorporated herein in its entirety by reference.

### Field Of The Invention

[0002] The present invention relates to the field of valves, and more particularly to microvalves and microvalve assemblies and related methods.

### Background

[0003] A conventional solenoid driven pneumatic valve may be used to control a fluid flow. When electrically energized or de-energized, a solenoid driven pneumatic valve may cut off and/or permit one or more fluid flows. An actuator of a solenoid driven pneumatic valve is an electromagnet. When the valve is energized, a magnetic field builds up to pull and/or push a plunger against the action of a spring. When de-energized, the plunger returns to its original position by action of the spring. Solenoid driven pneumatic valves are discussed, by way of example, in the reference "Technical Principles Of Valves" (omega.com, One Omega Drive, Stamford, CT, 06907, J-3 to J-7), the disclosure of which is hereby incorporated herein in its entirety by reference.

[0004] A flow of air (or other fluid) through a valve may be a function of a number of controlled port connections and a number of switching positions. Directional valve functionalities may be described by referring to them as a combination of "ways" and "positions", such as, for example, a 4-way 2-position valve also referred to as a 4/2-way valve. The term "way" defines a number of controlled flow paths the valve has (indicated by arrows in ISO symbology). With

respect to the term "position", a pneumatic directional valve may have two or three switching positions (indicated by squares in ISO symbology).

[0005] In a conventional 5-way, 2-position solenoid driven pneumatic valve (a 5/2 valve), fluid flows may be controlled between first and second actuator ports, first and second exhaust ports, and an air supply port. When the solenoid is energized, the 5/2 valve may provide fluid coupling between the air supply port and the first actuator port, and between the second actuator port and the second exhaust port. When the solenoid is de-energized, the 5/2 valve may provide fluid coupling between the air supply port and the second actuator port, and between the first actuator port and the first exhaust port. A 5/2 valve may thus be used to control operation of a pneumatic actuator coupled to the actuator ports.

[0006] A solenoid driven pneumatic valve, however, may be subject to mechanical wear that may reduce a useful life thereof. In addition, functionalities provided by a solenoid driven pneumatic valve may be limited. Moreover, a solenoid driven pneumatic valve may be unable to maintain an energized position in the event of a loss of power.

### Summary

[0007] According to some embodiments of the present invention, a valve assembly may include a main housing defining five chambers, four valves, and a controller. A first chamber may be coupled to a low pressure exhaust port, a second chamber may be coupled to a first actuator port, a third chamber may be coupled to a high pressure supply port, a fourth chamber may be coupled to a second actuator port, and a fifth chamber may be coupled to a low pressure exhaust port. Moreover, a first valve may be between the first and second chambers wherein the first valve allows or substantially blocks fluid communication between the first chamber and the second chamber responsive to a first electrical signal; a second valve may be between the second and third chambers wherein the second valve allows or substantially blocks fluid communication between the second chamber and the third chamber responsive to a second electrical signal; a third valve may be between the third and fourth chambers wherein the third valve allows or substantially blocks fluid communication between the third chamber to the fourth chamber responsive to a third electrical signal; and a fourth valve may be between the fourth and fifth chambers wherein the

fourth valve allows or substantially blocks fluid communication between the fourth chamber and the fifth chamber responsive to a fourth electrical signal.

[0008] Moreover, the controller may be configured to generate the first, second, third, and fourth electrical signals for the respective valve assemblies, and the controller may be configured to advance the valves through a sequence of conditions. In a first condition, the second and fourth valves may be opened and the first and third valves may be closed so that fluid communication is allowed between the second and third chambers and between the fourth and fifth chambers and so that fluid communication is substantially blocked between the first and second chambers and between the third and fourth chambers. In a second condition after the first condition, the second valve may be opened and the first, third, and fourth valves may be closed so that fluid communication is allowed between the second and third chambers and so that fluid communication is substantially blocked between the first and second chambers, between the third and fourth chambers, and between the fourth and fifth chambers. In a third condition after the second condition, the second and third valves may be opened and the first and fourth valves may be closed so that fluid communication is allowed between the second and third chambers and between the third and fourth chambers and so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers. In a fourth condition after the third condition, the third valve may be opened and the first, second, and fourth valves may be closed so that fluid communication is allowed between the third and fourth chambers and so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, and between the fourth and fifth chambers. In a fifth condition after the fourth condition, the first and third valves may be opened and the second and fourth valves may be closed, so that fluid communication is allowed between the first and second chambers and between the third and fourth chambers and so that fluid communication is substantially blocked between the second and third chambers and between the fourth and fifth chambers.

[0009] According to additional embodiments of the present invention, a valve assembly may include a housing having a first chamber coupled to a low pressure exhaust port, a second chamber coupled to a first actuator port, a third chamber coupled to a high pressure supply port, a fourth chamber coupled to a second actuator port, and a fifth chamber coupled to a low pressure exhaust port. The valve

assembly may also include a first valve between the first and second chambers, a second valve between the second and third chambers, a third valve between the third and fourth chambers, and a fourth valve between the fourth and fifth chambers.

[0010] The second and fourth valves may be opened and the first and third valves may be closed to provide a first condition so that fluid communication is allowed from the third chamber to the second chamber and from the fourth chamber to the fifth chamber and so that fluid communication is substantially blocked between the first and second chambers and between the third and fourth chambers. After the first condition, the second valve may be opened and the first, third, and fourth valves may be closed to provide a second condition so that fluid communication is allowed from the third chamber to the second chamber and so that fluid communication is substantially blocked between the first and second chambers, between the third and fourth chambers, and between the fourth and fifth chambers. After the second condition, the second and third valves may be opened and the first and fourth valves may be closed to provide a third condition so that fluid communication is allowed from the third chamber to the second chamber and from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers.

[0011] After the third condition, the third valve may be opened and the first, second, and fourth valves may be closed to provide a fourth condition so that fluid communication is allowed from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, and between the fourth and fifth chambers. After the fourth condition, the first and third valves may be opened and the second and fourth valves may be closed to provide a fifth condition so that fluid communication is allowed from the second chamber to the first chamber and from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the second and third chambers and between the fourth and fifth chambers.

[0012] According to yet additional embodiments of the present invention, a valve may include a substrate having first and second opposing faces, a plurality of holes through the substrate between the first and second faces, and a pair of input pads thereon. A plurality of flexible valve flaps may be provided on the substrate with each flexible valve flap being associated with at least one respective hole in the

substrate, and the flexible valve flaps may be configured to open or substantially block respective holes responsive to an electrical signal applied to the pair of input pads. In addition, a frame may surround and support the substrate at edges thereof so that central portions of the first and second faces of the substrate are exposed through an opening in the frame and so that a fluid seal is provided between the frame and edges of the substrate.

[0013] According to more embodiments of the present invention, a valve chip may include a substrate having first and second faces and openings between the first and second faces, and a plurality of flexible valve flaps on one of the faces of the substrate with each flexible valve flap being associated with at least one of the openings. A frame may be formed having an opening therein, and the valve chip may be secured in the opening of the frame. More particularly, central portions of the first and second faces of the substrate may be exposed through the opening in the frame and a fluid seal may be provided between the frame and edges of the substrate.

[0014] According to still more embodiments of the present invention, a valve assembly may include a main housing defining first, second, and third chambers, and defining a first valve enclosure between the first and second chambers and a second valve enclosure between the second and third chambers. First, second, third, and fourth electrical housing leads may be provided in the main housing with portions of each of the first and second electrical housing leads being exposed in the first valve enclosure and with portions of the third and fourth electrical housing leads being exposed in the second valve enclosure.

[0015] A first valve in the first valve enclosure may be electrically coupled with the first and second electrical housing leads wherein the first valve is configured to allow or substantially block fluid communication between the first and second chambers responsive to electrical signals provided on the first and second electrical housing leads. A second valve in the second valve enclosure may be electrically coupled with the third and fourth electrical housing leads wherein the second valve is configured to allow or substantially block fluid communication between the second and third chambers responsive to electrical signals provided on the third and fourth electrical housing leads. Moreover, a controller may be electrically coupled to the first, second, third, and fourth electrical housing leads, and the controller may be configured to generate the electrical signals to allow or substantially block fluid

communication between the first and second chambers and between the second and third chambers.

### **Brief Description Of The Drawings**

**[0016]** Figure 1 is a cross-sectional view of an electro-statically actuated valve according to some embodiments of the present invention.

**[0017]** Figure 2 is a plan view of a valve chip including an array of electro-statically actuated valves according to some embodiments of the present invention.

**[0018]** Figure 3 is a schematic diagram of a valve assembly according to some embodiments of the present invention, depicted here controlling a pneumatic actuator.

**[0019]** Figures 4A-F are schematic diagrams illustrating sequences of operations of valve assemblies according to some embodiments of the present invention.

**[0020]** Figure 5 is a front view of a packaging frame for a valve chip according to some embodiments of the present invention.

**[0021]** Figure 6 is a plan view of a packaged valve chip according to some embodiments of the present invention.

**[0022]** Figure 7 is a front view of a packaging frame for a valve chip according to some embodiments of the present invention.

**[0023]** Figure 8 is a plan view of a packaged valve chip according to some embodiments of the present invention.

**[0024]** Figure 9 is a plan view of electrical leads for a packaging frame according to some embodiments of the present invention.

**[0025]** Figure 10 is an exploded view of a main housing according to some embodiments of the present invention.

**[0026]** Figure 11 is a back perspective view of the main housing of Figure 10 shown assembled according to some embodiments of the present invention.

**[0027]** Figure 12 is a front perspective view of the main housing of Figure 10 shown assembled according to some embodiments of the present invention.

**[0028]** Figure 13 is a bottom perspective view of the main housing of Figure 10 according to some embodiments of the present invention.

[0029] Figure 14 is a perspective view of an electronics sub-assembly according to some embodiments of the present invention.

[0030] Figure 15 is a front perspective view of a printed circuit board of the electronics sub-assembly of Figure 14 according to some embodiments of the present invention.

[0031] Figure 16 is a transparent view of the electronics sub-assembly of Figure 14 according to some embodiments of the present invention.

[0032] Figure 17 is a back perspective view of a printed circuit board of the electronics sub-assembly of Figure 14 according to some embodiments of the present invention.

[0033] Figure 18 is a perspective view of a base of a valve assembly according to some embodiments of the present invention.

[0034] Figure 19 is a front perspective view of a valve assembly according to some embodiments of the present invention with encapsulation of the electronics sub-assembly shown transparent.

[0035] Figure 20 is a perspective view of the valve assembly of Figure 19 according to some embodiments of the present invention with non-metallic portions of the main housing excluded to show an orientation of leads of the main housing relative to valve chip assemblies.

[0036] Figure 21 is a bottom perspective view of the main housing of Figure 19 with packaged valve chip assemblies inserted in enclosures thereof.

[0037] Figure 22 is a back perspective view of the valve assembly of Figure 19 assembly according to some embodiments of the present invention with encapsulation of the electronics sub-assembly shown transparent.

[0038] Figure 23 is a front view of a baffle according to some embodiments of the present invention.

[0039] Figures 24 and 25 are plan views from different sides of a packaged valve chip according to some embodiments of the present invention.

[0040] Figure 26 is an exploded view of packaged valve chips according to some embodiments of the present invention.

[0041] Figure 27 is a plan view of electrical leads for a packaging frame according to embodiments of the present invention.

[0042] Figure 28 is an exploded view of a main housing according to some embodiments of the present invention.



[0043] Figure 29 is a back perspective view of an assembled main housing according to some embodiments of the present invention.

[0044] Figure 30 is a front perspective view of an assembled main housing according to some embodiments of the present invention.

[0045] Figure 31 is a bottom perspective view of a main housing according to some embodiments of the present invention.

[0046] Figure 32 is an enlarged cross-sectional view of an enclosure of a main housing and a packaged valve chip taken along portions of section line I-I' of Figures 29 and 30 according to some embodiments of the present invention.

[0047] Figure 33 is a perspective view of a valve assembly according to some embodiments of the present invention with non-metallic portions of the main housing excluded to show an orientation of leads of the main housing relative to the valve chip assemblies.

[0048] Figure 34 is a cross-sectional view of a valve assembly taken along section line I-I' of Figure 29 and 30 including filters according to some embodiments of the present invention.

[0049] Figures 35 and 36 are perspective views of an electronics sub-assembly with a battery cover respectively closed and open according to some embodiments of the present invention.

[0050] Figures 37 and 38 are top and bottom perspective views of a base for valve assemblies according to some embodiments of the present invention.

[0051] Figures 39 and 40 are perspective views of valve assemblies according to some embodiments of the present invention.

[0052] Figure 41 is a block diagram illustrating functionalities of a custom circuit such as an Application Specific Integrated Circuit (ASIC) for electronic sub-assemblies according to some embodiments of the present invention.

[0053] Figure 42 is a schematic diagram of electronic sub-assemblies including a custom circuit according to some embodiments of the present invention.

[0054] Figure 43 is a table illustrating logic relationships between inputs and outputs of custom circuits according to some embodiments of the present invention.

[0055] Figure 44 is a table illustrating sequences for state transitions and polarity reversals according to some embodiments of the present invention.

[0056] Figures 45A and 45B are tables illustrating pin definitions for custom circuits according to some embodiments of the present invention.

[0057] Figures 46A and 46B are tables illustrating design parameters for custom circuits according to some embodiments of the present invention.

[0058] Figures 47A and 47B are front and back perspective views of a valve assembly including a valve housing, a base, and an electronics sub-assembly according to some embodiments of the present invention.

[0059] Figure 48 is a perspective view of a common base configured to receive a plurality of valve housings and electronics sub-assemblies according to some embodiments of the present invention.

[0060] Figures 49A and 49B are schematic diagrams illustrating a valve assembly for vacuum applications according to some embodiments of the present invention.

[0061] Figure 50A and 50B are perspective and cross-sectional views of an integrated pneumatic valve and cylinder assembly according to embodiments of the present invention.

### **Detailed Description**

[0062] The present invention now will be described more fully hereinafter with reference to the accompanying drawings, in which embodiments of the invention are shown. This invention may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art.

[0063] In the drawings, thickness and/or widths of layers, regions, and/or lines are exaggerated for clarity. It will also be understood that when an element such as a layer, region or substrate is referred to as being on another element, it can be directly on the other element or intervening elements may also be present. In contrast, if an element such as a layer, region or substrate is referred to as being directly on another element, then no other intervening elements are present. Similarly, an element is referred to as being "connected to" or "coupled to" another element, it can be directly connected to or coupled to the other element or intervening elements may also be present. In contrast, when an element is referred to as being directly connected to or directly coupled to another element, then no other intervening

elements are present. As used herein, the term and/or includes any and all combinations of one or more of the associated listed items.

**[0064]** Furthermore, relative terms, such as beneath, over, under, upper, and/or lower may be used herein to describe one element's relationship to another element as illustrated in the figures. It will be understood that relative terms are intended to encompass different orientations of the device in addition to the orientation depicted in the figures. For example, if the device in one of the figures is turned over, elements described as below other elements would then be oriented above the other elements. The exemplary term below, can therefore, encompasses both an orientation of above and below.

**[0065]** It will be understood that although the terms first, second, third, etc. are used herein to describe various regions, layers, sections and/or steps, these regions, layers, sections and/or steps should not be limited by these terms. These terms are only used to distinguish one region, layer, section, or step from another region, layer, section, or step. Thus, a first region, layer, section, or step discussed below could be termed a second region, layer, section, or step, and similarly, a second region, layer, section, or step could be termed a first region, layer, section, or step without departing from the teachings of the present invention. Like numbers refer to like elements throughout.

**[0066]** The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms "a", "an" and "the" are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms "comprises" and/or "comprising," when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

**[0067]** Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this invention belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and will not be interpreted in an idealized or overly formal sense

unless expressly so defined herein.

**[0068]** In a pneumatic actuator, two actuator chambers are separated by a piston, and pressure differentials in the actuator chambers are used to move the piston. A rod can be used to transfer movement of the piston to a device being actuated outside the actuator. Valve assemblies according to some embodiments of the present invention can be used to control air flow into and out of one or both actuator chambers of a pneumatic actuator.

**[0069]** Valve assemblies according to some embodiments of the present invention may include a plurality of arrays of valves with each array of valves provided on a separate substrate. Each valve may include a valve orifice(s) through a substrate and an electro-statically actuated flexible valve flap used to gate the valve orifice(s). More particularly, each flexible valve flap may be anchored to the substrate at a first end and free at all other edges. In addition, the free end of each flexible valve flap may curl away from the substrate so that each flexible valve flap is normally open in the absence of an applied electro-static force. Valve flaps may be provided on a top surface of the substrate, and flow through an open valve orifice(s) may be from a high pressure on the bottom surface of the substrate to a low pressure on the top surface of the substrate.

**[0070]** The structure of an individual valve according to some embodiments of the present invention is illustrated in Figure 1. As shown in Figure 1, the valve **100** may include a substrate **101** (such as a silicon substrate), a fixed electrode **105** provided between first and second insulating layers **103** and **107** on a top surface of the substrate **101**, and a flexible electrode **111** provided between third and fourth insulating layers **109** and **115**. The fixed and flexible electrodes **105** and **111**, for example, may each include a layer of a metal such as Ti, Cr, Au, Al, Cu, W, Pt, and/or other flexible conductive material such as a conductive polymer (*e.g.*, polyanniline) and/or conductive oxide film (*e.g.*, ITO). When using certain conductive metal films (*e.g.*, Au, Ag, Al, Cu, and/or Pt), a thin adhesion layer (*e.g.*, Ti and/or Cr) may be provided on upper and/or lower surfaces of the conductive metal film to provide proper adhesion to the insulating layers of the flexible flap. One or more of the insulating layers **103**, **107**, **109**, and **115** may be layers of a polymer material, such as a polyimide or other photosensitive polymer. In alternative embodiments, one of the second insulating layer **107** or the third insulating layer **109** may be omitted, and/or the first insulating layer **103** may be omitted. In addition or in

an alternative, insulating layer 107 and/or insulating layer 109 may include a ceramic dielectric such as silicon oxide (SiO<sub>2</sub>).

[0071] The third and fourth insulating layers 109 and 115 and the flexible electrode 111 define a flexible valve flap 117 adjacent a respective valve-orifice(s) 119 through the substrate 101. The valve hole may be formed by wet chemical etching and/or by deep reactive ion etching through the substrate. The flexible valve flap 117 may be configured to curl away from the top surface of the substrate to a normally open position in the absence of an attractive electro-static force between the fixed and flexible electrodes 105 and 111 to allow fluid passage from a bottom surface of the substrate 101 through the valve-orifice(s) 119 and past the flexible valve flap 117 on the top surface of the substrate 101. The valve 100 may be closed by creating an attractive electro-static force between the fixed and flexible electrodes 105 and 111 so that the flexible valve flap 117 blocks the valve orifice(s) 119. More particularly, the valve flap 117 can be made to curl to the normally open position away from the top of the substrate 101 by fabricating the insulating layers 109 and 115 to have predetermined stresses therein. Microelectromechanical electrostatic valve devices are discussed, for example, in U.S. Patent No. 6,590,267 to Scott H. Goodwin-Johansson *et al.*, entitled "*Microelectromechanical Flexible Membrane Electrostatic Valve Devices And Related Fabrication Methods*," the disclosure of which is hereby incorporated herein in its entirety by reference. Electro-statically actuated valves may be provided according to embodiments of the present invention using valve flaps as discussed above with respect to Figure 1 or using other moveable valve members such as micromachined diaphragms.

[0072] An array of valves 100<sub>1-x,1-y</sub> may be provided on the top surface of a single substrate to provide the valve chip 131 shown in Figure 2. As shown in Figure 2, a plurality of valves 100<sub>1-x,1-y</sub> may be arranged in rows and columns on the chip 131, with each valve 100<sub>1-x,1-y</sub> including a respective valve orifice(s) 119 (or hole(s)) and flexible valve flap 117 (as shown in Figure 1). Moreover, the fixed electrodes 105 of each valve 100<sub>1-x,1-y</sub> on the valve chip 131 may be electrically connected to each other, and the flexible electrodes 111 of each valve 100<sub>1-x,1-y</sub> on the chip 131 may be electrically connected to each other so that a voltage potential can be provided between the fixed and flexible electrodes to create an electro-static attraction there between. While a plurality of valves (with each valve including one valve flap and one orifice) are illustrated in Figure 2, other arrangements may be provided for

valve chips according to embodiments of the present invention. For example, a valve chip according to some embodiments of the present invention may include a single valve with a single valve flap and a single orifice. In an alternative, a valve chip may include one or more valves with at least one valve including a single valve flap used to open and close a plurality of orifices.

[0073] Accordingly, the array of valves **100<sub>1-x,1-y</sub>** can be opened and closed in unison. More particularly, a closing electrical potential can be applied between the fixed electrodes **105** of the array and the flexible electrodes **111** of the array to create an attractive electro-static force so that all of the flexible valve flaps **117** close all of the valve orifices **119** on the valve chip **131**. Similarly, an opening electrical potential can be applied between the fixed electrodes **105** of the array and the flexible electrodes **111** to remove the attractive electro-static force so that all of the flexible valve flaps **117** open all of the valve orifices **119** on the chip **131**. By providing the array of commonly actuated valves **100<sub>1-x,1-y</sub>** on the chip **131**, the valve chip **131** can regulate a greater flow of fluid than would otherwise be possible with a single valve. Valve chips of different flow sizes (Cv) may thus be provided with flow sizes of up to 1.0 Cv. Flow sizes, for example, in the range of approximately 0.001 Cv to approximately 10Cv may be provided. (As used herein, the flow coefficient Cv is based on the imperial units system and is defined as the flow of water through a valve at 60 °F in US gallon/minute at a pressure drop of 1 lb/in<sup>2</sup>.) Flow sizes may be determined, for example, by a number of valves, a size of valve orifices, etc. A larger valve chip may thus provide a greater flow size. In an alternative, valves on a same chip could be individually addressed and operated separately.

[0074] A schematic diagram of valve assemblies **141** according to some embodiments of the present invention is illustrated in Figure 3. As shown in Figure 3, four valve chips **131a-d** separate five chambers **143a-e** of the valve assembly **141**. More particularly, valve chip **131a** separates chambers **143a** and **143b**; valve chip **131b** separates chambers **143b** and **143c**; valve chip **131c** separates chambers **143c** and **143d**; and valve chip **131d** separates chambers **143d** and **143e**. The chambers **143a** and **143e** are coupled to respective low pressure exhaust ports **142a** and **142b**; the chambers **143b** and **143d** are coupled through ports **146a** and **146b** to respective chambers **163a** and **163b** (separated by moveable piston **165**) of the pneumatic actuator **161**; and the chamber **143c** is coupled to a high pressure supply port **144c**. Accordingly, the valve chip **131a** is configured to allow or block fluid flow from

chamber **143b** to chamber **143a**. The valve chip **131b** is configured to allow or block fluid flow from chamber **143c** to chamber **143b**. The valve chip **131c** is configured to allow or block fluid flow from chamber **143c** to chamber **143d**. The valve chip **131d** is configured to allow or block fluid flow from chamber **143d** to chamber **143e**.

[0075] According to some embodiments of the present invention, the valve assembly **141** and the pneumatic actuator **161** (also referred to as a cylinder) may be produced separately and then coupled together. A customer may thus separately purchase valve assemblies and pneumatic actuators from the same or different vendors. According to other embodiments of the present invention, the valve assembly may be embedded (or integrated) in the pneumatic actuator so that the two are produced and/or sold as one unit.

[0076] Sequential conditions of operation of the valve assembly **141** of Figure 3 are discussed in greater detail below with respect to Figures 4A-F according to some embodiments of the present invention. In one possible startup condition illustrated in Figure 4A, valve flaps of all valves **100a-d** on the valve chips **131a-d** are closed in a first condition at startup. The valves are maintained closed by applying attractive electrostatic forces to the valve flaps of the valves. In this startup condition, there is gauge pressure in the supply chamber **143c** only, and there is no gauge pressure in any of the other chambers **143a-b** and **143d-e**. During operations after startup, gauge pressure will be present in the supply chamber **143c** and at least one of chambers **143b** or **143d**. The piston **165** and rod **167** are shown in the retracted position at startup by way of example.

[0077] In a second condition of Figure 4B, valve flaps of valves **100b** and **100d** on valve chips **131b** and **131d** are opened while valve flaps on valves **100a** and **100c** of valve chips **131a** and **131c** are closed. Because of the pressure differentials from chamber **143c** to **143b** and from chamber **143d** to **143e**, valve flaps of valves **100a** and **100c** can be opened by reducing/eliminating attractive electrostatic forces applied thereto so that the valve flaps curl to the normally open position. Accordingly, the pressure of chambers **143b** and **163a** rises, the piston **165** and rod **167** extend, and chambers **163b** and **143d** are exhausted through chamber **143e** and exhaust port **142b**.

[0078] In a third condition of Figure 4C, a sufficient equilibrium between the pressures of chambers **143d** and **143e** may be achieved so that the valve flaps of valves **100d** of valve chip **131d** can be closed, and an attractive electrostatic force on

the valve flaps is used to close the valves **100d** of valve chip **131d**. In a fourth condition of Figure 4D, valve flaps of valves **100c** can be opened because chamber **143d** was previously exhausted in the condition of Figure 4C. An electrostatic force used to close valve flaps of valves **100c** is removed so that valves **100c** are opened as valve flaps thereof curl to the normally open position as shown in Figure 4D while the valves **100b** are maintained open. By opening valves **100c** before the piston **165** is fully extended, an increasing pressure in chambers **143d** and **163b** may slow the piston motion.

[0079] In a fifth condition of Figure 4E, an equilibrium can be achieved between chambers **143b** and **143c** and the valve flaps of valves **100b** on valve chip **131b** can be closed by applying an attractive electrostatic force. Moreover, a pressure of chamber **143b** can be increased relative to that of chamber **143a**.

[0080] In a sixth condition of Figure 4F after increasing a pressure of chamber **143b** relative to that of chamber **143a**, the valve flaps of valves **100a** on valve chip **131a** can be opened by removing an electrostatic force used to close the valve flaps of valves **100a** so that the valve flaps curl to the normally open position. Accordingly, the pneumatic actuator chamber **163a** is coupled to low pressure exhaust port **142a** through chambers **143a** and **143b**, and the pneumatic actuator chamber **163b** is coupled to high pressure supply port **144c** through chambers **143c** and **143d**. In the condition of Figure 4F, the piston **165** and rod **167** retract. Once pressures in chambers **143c** and **143d** equalize and pressures in chambers **143a** and **143b** equalize, the valves **100a** and **100c** of valve chips **131a** and **131c** can be closed by applying attractive electrostatic forces to the valve flaps thereof and operations of Figures 4A-4F can be repeated to extend and retract the piston **165** and rod **167**.

[0081] According to some embodiments of the present invention, the valve chips **131a-d** of the valve assembly **141** may sequence through the conditions of Figure 4B to Figure 4C to Figure 4D to Figure 4E to Figure 4F to move the piston **165** and rod **167** from an extended position to a retracted position. The valve chips **131a-d** of the valve assembly **141** may sequence through the conditions of Figure 4F to Figure 4E to Figure 4D to Figure 4C to Figure 4B to move the piston **165** and rod **167** from a retracted position to an extended position.

[0082] Sequencing operations discussed above with respect to Figures 4A-F may thus be used to extend and retract the piston **165**. It will be understood, however, that not every command to extend the piston will result in extension or



complete extension of the piston, and that not every command to retract the piston will result in retraction or complete retraction of the piston. For example, a next command may be received/initiated before a previous extension/retraction has been completed. More particularly, a next command may be received/initiated before a previous extension/retraction has been completed, for example, if a fault condition is detected, if a safety sensor is tripped, and/or if a power outage is detected.

**[0083]** In an alternative, the valve chips of the valve assembly may sequence from the condition of Figure 4F to the condition of Figure 4D with valve chips **131a** and **131d** closed and with the valve chips **131b** and **131c** opened. In another alternative, the valve chips of the valve assembly sequence from the condition of Figure 4F to a condition with the valve chips **131b** and **131c** closed and the valve chips **131a** and **131d** opened.

**[0084]** Sequencing techniques discussed above with respect to figures 4A-F may increase a maximum pressure against which the valve assembly can operate to extend and retract the actuator. Any inherent operational restrictions to opening the valves in an array can be reduced because a higher pressure is present on the bottom surfaces of the valve chips. Restrictions may occur when closing a valve with a force from air pressure approximating an electro-static closing force of the valve. The valves may thus be selectively opened and closed to allow reduction of pressure differentials between adjacent chambers. By reducing pressure differentials between adjacent chambers, a condition can be created whereby valve flaps of a valve chip can be closed against a significantly lower pressure differential than was originally present. A relatively small delay of time (for example, on the order of about 100 microseconds) may be sufficient to reduce the pressure differential when closing valve flaps of a valve chip in a state where a relatively high pressure differential may have otherwise been present.

**[0085]** Microelectromechanical valves are discussed, for example, in: U.S. Patent No. 6,590,267 to Scott H. Goodwin-Johansson *et al.*, entitled "*Microelectromechanical Flexible Membrane Electrostatic Valve Devices And Related Fabrication Methods*"; U.S. Patent No. 6,236,491 to Scott H. Goodwin-Johansson *et al.*, entitled "*Micromachined Electrostatic Actuator With Air Gap*"; and/or International Publication No. WO 02/22492. The disclosures of each of these patents and publications is hereby incorporated herein in its entirety by reference.

[0086] Moreover, a valve chip may be packaged using a frame according to some embodiments of the present invention as illustrated, for example, in Figures 5-9. Alternative embodiments of a packaged valve chip (each including a valve chip **131** as discussed above with respect to Figure 2) are illustrated in Figures 6 and 8. Corresponding embodiments of packaging frames without valve chips are illustrated in Figures 5 and 7, and embodiments of electrical leads without a frame are illustrated in Figure 9.

[0087] As shown, for example, in Figure 5, a packaging frame **211a** according to some embodiments of the present invention may include a body **213a**, a gasket **215a**, and electrical leads **217**. The frame **211a** has a window **219a** therein and a recessed ledge **221a** surrounding the window **219a**. In addition, a trough **223a** may surround the ledge **221a**. A combined width of the ledge **221a** and trough **223a** may be in the range of approximately 0.025 inches to approximately 0.060 inches. More particularly, a combined width of the ledge **221a** and trough **223a** may be in the range of approximately 0.050 inches to approximately 0.060 inches. The electrical leads **217** may be formed of stamped metal, and the electrical leads **217** may be plated with tin (approximately 150 micro inches) and then plated with gold (approximately 40 micro-inches). The body **213a** may be formed of injection molded insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof), and the gasket **215a** may be formed of an injection molded flexible sealing material such as rubber, viton, and/or silicone. The gasket **215a** may provide a static fluid seal with respect to a main housing of a valve assembly.

[0088] More particularly, the body **213a** may be formed by injection molding insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof) with the electrical leads **217** being provided as inserts in the mold. Moreover, the gasket **215a** may be formed together with the body **213a** using a two-shot molding process and/or an overmolding process. The ledge **221a** may be recessed relative to a surrounding portion of the body **213a** so that a valve chip can be supported at edges thereof on one side by the ledge with top and bottom surfaces of the valve chip exposed for fluid communication therethrough. In addition, the ledge **221a** may be sufficiently recessed so that a subsequently placed valve chip is also recessed within the body **213a**. Moreover, portions of the electrical leads **217** are exposed adjacent the window **219a** for electrical connection (such as by wire bonding, solder bumping, conductive epoxy, or other means known to those

having skill in the art) to a subsequently placed valve chip. In addition, notches **225a** in the body **213a** may be provided adjacent portions of the ledge **221a** to allow room for a tool to place a valve chip on the ledge with other portions of the body **213a** fitting more closely to the valve chip. Portions of the body **213a** surrounding the leads **217** may be angled (for example, at approximately 30 degrees) to provide wire bonding tip clearance. While injection molding is discussed herein by way of example, other molding techniques such as insert molding and/or blow molding may be used.

[0089] An adhesive can then be provided in the trough **223a**, and a valve chip **131** can be placed on the ledge **221a**, with the trough **223a** providing for placement, retention, and/or control of spreading of the adhesive until it is fully cured. More particularly, an adhesive bead having a width of approximately 0.015 inches may be used. The valve chip may be placed on the ledge **221a** with accuracy of approximately 0.005 inches using optical sensor equipment. Accordingly, indication marks may be molded into the body **213a** of the packaging frame. More particularly, indication marks may be molded to include perpendicular intersecting lines having an appearance similar to that of an "L", a "T", a "+", or other similar characters. Moreover, the indication marks may have a depth of approximately 0.010 inches.

[0090] An adhesive used to secure the valve chip **131** on the ledge **221a** may be cured at approximately 150 degrees C (302 degrees F) for approximately 1 hour. In an alternative, the adhesive may be cured for a longer time at a lower temperature. Polycarbonate, for example, may be used for the body **213a** and polycarbonate may have a melting temperature in the range of approximately 430 degrees F to approximately 480 degrees F. To reduce deformation of the body **213a**, however, adhesive cure temperatures may be maintained in the range of approximately 125 degrees F to approximately 200 degrees F. In an alternative, a UV cured epoxy may be used as an adhesive.

[0091] Portions **229** of the body **213a** may be deformed around the exposed edges of the valve chip **131** to provide the structure illustrated in Figure 6. The adhesive may provide a fluid seal between the valve chip **131** and the body **213a**, and the deformed portions **229** may secure the valve chip within the body **213a**. More particularly, portions **229** of the body **213a** may be deformed using a heated tool (such as a heat stake) to retain the valve chip **131** within the body **213a**. Accordingly, edges of the valve chip **131** may be supported on one side by the ledge **221a** and on

the other side by the deformed portions **229** of the body **213a**. Moreover, a surface of the valve chip **131** adjacent the leads **217** may be recessed approximately 0.010 inches relative to the leads **217** and approximately 0.030 inches relative to a surface of the body **213a** surrounding the notches **225a**, ledge **221a**, and trough **223a**.

[0092] On the valve chip **131** all fixed electrodes may be electrically connected to a first input pad (such as a first gold bond pad), and all flexible electrodes may be electrically connected to a second input pad (such as a second gold bond pad), and the input pads may be electrically connected (*e.g.*, via wire bonding such as gold wire bonding, solder bumping, conductive epoxy, or other means known to those having skill in the art) to exposed portions of respective electrical leads **217** adjacent the window **219a**. A glob-top potting **231a** can be used to protect the electrical connection between the input pads of the valve chip **131** and the electrical leads **217**. Portions of the electrical leads **217** are exposed on an edge of the body **213** for electrical coupling to a main housing of a valve assembly.

[0093] According to alternate embodiments shown, for example, in Figure 7, a packaging frame **211b** according to some embodiments of the present invention may include a body **213b**, a housing gasket **215b**, and electrical leads **217**. The frame **211b** has a window **219b** (also referred to as a through hole) therein and a recessed ledge **221b** surrounding the window **219b**. In addition, a chip gasket **216b** may be provided on the ledge **221b**.

[0094] A width of the ledge **221b** may be in the range of approximately 0.025 inches to approximately 0.060 inches. More particularly, a width of the ledge **221b** may be in the range of approximately 0.050 inches to approximately 0.060 inches. The electrical leads **217** may be formed of stamped metal, and the electrical leads **217** may be plated with tin (approximately 150 micro inches) and then plated with gold (approximately 40 micro-inches). The body **213b** may be formed of injection molded insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof), and the gaskets **215b** and **216b** may be formed of an injection molded flexible sealing material such as rubber, viton, and/or silicone. The gasket **215b** may provide a static fluid seal with respect to a main housing. The gasket **216b** may provide a static fluid seal with respect to a valve chip placed thereon.

[0095] More particularly, the body **213b** may be formed by injection molding insulating material (such as a plastic material, an elastomeric material, a

polymer, a co-polymer, and/or derivatives thereof) with the electrical leads **217** being provided as inserts in the mold. Moreover, the gaskets **215b** and **216b** may be formed together with the body **213b** using a two-shot molding process and/or an overmolding process. The ledge **221b** may be recessed relative to a surrounding portion of the body **213b** so that a valve chip can be supported at edges thereof on one side by the ledge **221b** and the gasket **216b** with top and bottom surfaces of the valve chip exposed for fluid communication therethrough. In addition, the ledge **221b** may be sufficiently recessed so that a subsequently placed valve chip is also recessed within the body **213b**. Moreover, portions of the electrical leads **217** are exposed adjacent the window **219b** for electrical connection (such as by wire bonding, solder bumping, conductive epoxy, or other means known to those having skill in the art) to a subsequently placed valve chip. In addition, notches **225b** in the body **213b** may be provided adjacent portions of the ledge **221b** to allow room for a tool to place a valve chip on the ledge with other portions of the body **213b** fitting more closely to the valve chip. Portions of the body **213b** surrounding the leads **217** may be angled (for example, at approximately 30 degrees) to provide wire bonding tip clearance.

[0096] A valve chip **131** can be placed on the gasket **216b**, with the gasket **216b** providing a static fluid seal with respect to a valve chip placed thereon. In an alternative to the gasket **216b** or in addition, a stamped adhesive tape may be used to secure the valve chip to the ledge. The valve chip may be placed on the gasket **216b** with accuracy of approximately 0.005 inches using optical sensor equipment. Accordingly, indication marks may be molded into the body **213b** of the packaging frame. More particularly, indication marks may be molded to include perpendicular intersecting lines having an appearance similar to that of an "L", a "T", a "+", or other similar character. Moreover, the indication marks may have a depth of approximately 0.010 inches.

[0097] Portions **229** of the body **213b** may be deformed around the exposed edges of the valve chip **131** to provide the structure illustrated in Figure 8. The deformed portions **229** may secure the valve chip against the gasket **216b** within the body **213b**. More particularly, portions **229** of the body **213b** may be deformed using a heated tool (such as a heat stake) to retain the valve chip **131** within the body **213b**. Accordingly, edges of the valve chip **131** may be supported on one side by the ledge **221b** and gasket **216b** and on the other side by the deformed portions **229** of the body **213b**. Moreover, a surface of the valve chip **131** adjacent the leads **217** may be

recessed approximately 0.010 inches relative to the leads **217** and approximately 0.030 inches relative to a surface of the body **213b** surrounding the notches **225b** and ledge **221b**.

**[0098]** Moreover, the valve chip **131** may be packaged before releasing the valve flaps **117**. More particularly, the valve flaps **117** may be formed on a sacrificial oxide, and the sacrificial oxide may be maintained while the valve chip **131** is being assembled in the packaging frame. The sacrificial oxide may then be removed using a dry (vapor) HF (hydrofluoric acid) release without significantly damaging the packaging frame. More particularly, the packaging frame may be formed of viton and/or other materials which may be resistant to damage from a dry (vapor) HF release. While sacrificial oxide layers are discussed by way of example, other sacrificial layers (such as sacrificial metal layers) may be used with other suitable vapor and/or wet chemical etchants.

**[0099]** In an alternative, valve flaps of a valve chip may be released by removing sacrificial oxide using a wet HF acid etch either before dicing from a wafer including a plurality of valve chips, after dicing but before packaging, or after packaging. More particularly, the sacrificial oxide layer may be removed from the valve chip using a 49%HF solution for approximately 10 minutes, and the wet etch may be followed by a de-ionized (DI) water rinse, an isopropyl alcohol rinse, and first and second methanol rinses for 20 minutes each to remove any residual HF and/or water. After the wet processing, the valve chip with the released valve flaps may be primed with methanol for a supercritical dry cycle to reduce any surface tension that may otherwise result in stiction between valve flaps and the substrate.

**[0100]** More particularly, the valve chip may be loaded into a dryer chamber and covered with methanol, and liquid CO<sub>2</sub> is then used to displace the methanol from the chamber at a pressure of approximately 1200 psig. Once all of the methanol is displaced, the chamber is heated past the supercritical point (approximately 31 degrees C) to transition the CO<sub>2</sub> from the liquid to gas phase, and the pressure is released to vent the system of CO<sub>2</sub> vapor. Because supercritical CO<sub>2</sub> has extremely low surface tension, CO<sub>2</sub> is less likely to pull the valve flaps down as it transitions from liquid to gas. Commercially available and/or custom supercritical dryers may be used.

**[0101]** Visual inspection can be used to determine that an acceptable number of the valve flaps on a valve chip are successfully released. In particular, a

surface of the valve chip has a different color than exposed silicon under the flappers which is visible when the valve flaps are released and the valve chip is unpowered, and the color variations could be inspected. In an alternative, light can be projected through the wafer after release, and an optical detector could detect light differences between the powered (closed) and unpowered (open) valve chip. In either example, machine vision systems could be used to perform the inspections.

**[0102]** On the valve chip **131** all fixed electrodes may be electrically connected to a first input pad (such as a first gold bond pad), and all flexible electrodes may be electrically connected to a second input pad (such as a second gold bond pad), and the input pads may be electrically connected to exposed portions of respective electrical leads **217** adjacent the window **219b**, for example, using wire bonding such as gold wire bonding, solder bumping, conductive epoxy, or other means known to those having skill in the art. A glob-top potting **231b** can be used to protect the electrical connections between the input pads of the valve chip **131** and the electrical leads **217**. Portions of the electrical leads **217** are exposed on an edge of the body **213b** for electrical coupling to a main housing.

**[0103]** Moreover, tooling used to mold packaging frames according to some embodiments of the present invention illustrated in Figures 5-8 may be adaptable so that packaging frames with the same outer dimensions are molded with different window dimensions using substantially the same mold tooling. For example, a same mold base could be used to form different packaging frames with different mold lids being used to provide different window sizes, shapes, and/or locations. Accordingly, packaging frames may be efficiently fabricated for valve chips of different sizes. More particularly, a smaller window may be provided for a smaller valve chip for an application requiring a lower fluid flow capacity, and the smaller window may be provided adjacent the electrical leads (instead of being centered) to provide proximity for wire bonding. By providing the packaging frames with the same outer dimensions for different valve chip sizes, a same main housing may receive packaged valve chips of different capacities/sizes to provide different operating characteristics.

**[0104]** In addition, a baffle may be provided on the body (**213a** or **213b**) of the frame (**211a** or **211b**) to deflect pressure spikes and/or reduce stress on the electrostatic valve flaps of the valve chip **131**. More particularly, the baffle may be provided on the body (**213a** or **213b**) within the gasket (**215a** or **215b**) adjacent the

side of the valve chip **131** including the flexible valve flaps and input pads.

Moreover, the baffle may be provided as a plate that is secured to the body (**213a** or **213b**) with an adhesive.

[0105] An example of a baffle **971** is illustrated in Figure 23. As shown, the baffle **971** includes an orifice **973** there through, and dimensions of the baffle **971** may be such that the baffle is slightly longer and wider than the valve chip **131** but slightly less than interior dimensions of the gasket (**215a** or **215b**). Accordingly, the baffle **971** may be secured adjacent and spaced apart from the valve chip **131** and within the gasket (**215a** or **215b**). Moreover, a recess may be provided in the body (**213a** or **213b**) of the frame in which the baffle **971** can be placed, and the recess may define a spacing between the baffle **971** and the valve chip **131**. Moreover, the baffle **971** may be placed such that the orifice **973** is adjacent a portion of the valve chip **131** most distant from the electrical leads **217**. By including the baffle **971**, valve flaps of the valve chip **131** may be protected during handling and subsequent assembly. In addition, the baffle **971** may provide a more laminar flow through the valve chip **131**, and/or increase the speed of sequencing a valve assembly including packaged valve chips with the baffle. In an alternative, use of the baffle may eliminate the need for sequencing. While the baffle **971** is illustrated with a single elongate orifice, different shapes, configurations, and/or orientations may be provided, and/or a plurality of orifices may be provided.

[0106] The use of a baffle may provide a baffle chamber between the baffle and the associated valve chip with the valve flaps of the valve chip physically protected in the baffle chamber during handling and/or assembly. Moreover, an orifice(s) in the baffle may sufficiently restrict fluid flow so that a maximum force applied to the valve flaps of the valve chip may be reduced. In addition, a volume of the baffle chamber may be sufficiently small relative to the associated chamber of the valve housing so that a laminar fluid flow through the valve chip can be attained more quickly and so that fatigue of the valve flaps can be reduced. Baffles and sequencing operations (as discussed with respect to Figures 4A-F) can thus be used separately or in combination to increase pressures against which the valve chips can operate, to reduce fatigue, to improve flows, etc.

[0107] Moreover, baffles with orifices of different sizes may be provided for different valve chips in a same valve assembly. A 5-way valve, for example, with baffles providing greater flows into actuator ports and more restricted flows out of



actuator ports may provide relatively smooth piston motion and maximum piston velocities may be reduced.

[0108] The packaged valve chips can be plugged in and out of a main housing as discussed in greater detail with respect to Figures 13 and 21. Accordingly, a valve assembly including one or more packaged valve chips may be repairable and/or adaptable. A valve assembly with a malfunctioning valve chip may thus be repaired by removing the packaged valve chip that is not working and inserting a new packaged valve chip. In addition, functionality of a valve assembly may be changed by replacing original packaged valve chips with new packaged valve chips having a different characteristic (such as different flow capacity and/or size of valve chip).

[0109] A main housing according to some embodiments of the present invention is illustrated in Figures 10-13. More particularly, an exploded view of a main housing **401** and associated components is illustrated in Figure 10, and a bottom perspective view of the main housing is illustrated in Figure 13. As shown in the bottom view of Figure 13, the main housing **401** defines the valve assembly chambers **143a-e** discussed above with respect to Figures 3 and 4A-F. The main housing **401** also includes enclosures **403a-d** configured to receive packaged valve chips (such as discussed above with respect to Figures 6 and 8) perpendicular to a length of the main housing. In addition, main housing **401** includes conductive leads **405** therein used to transmit signals to metal leads **217** of the packaged valve chips in enclosures **403a-d**. In addition, a base gasket **407** may be included to provide a fluid seal with respect to a base of the assembly (illustrated in Figure 18), and a PCB gasket **409** may be included to provide a seal for an external connection to the leads **405** of the main housing.

[0110] The main housing **401** may be formed by injection molding an insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof) with conductive leads **405** insert molded therein, and the gaskets **407** and/or **409** may be formed of a flexible sealing material using a two-shot molding process and/or an overmolding process. More particularly, the molding tool creates the five separate chambers **143a-e** for high pressure air supply and low pressure exhaust as discussed above with respect to Figures 3 and 4A-F. When injection molding the main housing, a hole **411** may be included in the outside of the housing to accommodate formation of interior holes between chambers **143a-e**. The hole **411** in the outside of the housing may be sealed with a plug **413** that may be glued, welded or otherwise affixed to seal the hole **411**. In addition, baffles

may be provided adjacent valve chips to deflect pressure spikes and/or reduce stress on the electrostatic valve flaps. Baffles, for example, may be provided as plates in the main housing **401** adjacent low pressure sides of the valve chips **131**. As discussed above, baffles may be provided on packaging frames used to package the valve chips before insertion into the main housing. Baffles may provide a more laminar flow through the valve chips, a speed of sequencing a valve assembly including baffles may be increased, and/or baffles may eliminate a need for sequencing.

[0111] The main housing **401** may also have banjo fittings **415a-b**, O-rings **417a-b**, and collets **419a-b** (also referred to as quick connect fittings and/or cartridges) affixed thereto. More particularly, the collets **419a-b** may be push-in style cartridges. More particularly, the banjo fittings **415a-b** may be affixed to the main housing **401**, for example, using ultrasonic welding and/or an adhesive, and the banjo fittings **415a-b** are in fluid communication with the chambers **143b** and **143d** of the valve assembly. The O-rings **417a-b** and the collets **419a-b** may then be inserted in the banjo fittings **415a-b** for retention of air-tubes providing fluid communication with the pneumatic actuator chambers **163a-b** (shown in Figure 3). The main housing **401** can be used to provide either a three-way valve or a five-way valve depending on the number of packaged devices used and locations thereof to control fluid flow by placing the plug **413** at either the outermost edge of the fifth chamber (5-way) or between the third and fourth chambers (3-way).

[0112] As discussed above, a microelectromechanical systems (MEMS) valve chip **131** may be packaged in a frame to provide a packaged valve chip as illustrated, for example, in Figures 6 and/or 8. Packaged valve chips may be plugged in and out of respective enclosures **403a-d** of the main housing **401** so that the valve assembly is adaptable and/or repairable. The gasket **215a** or **215b** of the packaged valve chip provides a fluid seal with the respective enclosure **403a-d** so that fluid communication between enclosures is only provided through openings in respective valve chips. Moreover, the valve chip **131** in a packaged valve chip is directional and the gasket **215a** or **215b** should mate with a predetermined side of the particular enclosure so that the packaged valve chip is oriented in the main housing **401** to provide the fluid flows between chambers **143a-e** discussed above with respect to Figures 4A-F.

[0113] In some embodiments of the present invention, it may be desirable to provide different fluid flows through different flow paths of the valve assembly.

For example, different enclosures **403a-d** of the main housing **401** may be populated with packaged valve chips providing different flow characteristics. More particularly, some of the enclosures **403a-d** may be populated with packaged valve chips with relatively fewer and/or smaller valve orifices (holes), others of the enclosures may be populated with packaged valve chips with relatively more and/or larger valve orifices (holes), and all of the packaged valve chips may have the same exterior dimensions. In addition, packaged valve chips with relatively fewer and/or smaller valve orifices (holes) may be provided with baffles having relatively fewer and/or smaller baffle orifices (holes), and packaged valve chips with relatively more and/or larger orifices (holes) may be provided with baffles having relatively more and/or larger baffle orifices (holes). In an alternative, different flows may be provided by different packaged valve chips having the same number and sizes of valve orifices (holes) by providing baffles having different numbers and/or sizes of baffle orifices (holes).

[0114] As discussed above, an interior dimension of a window of a frame used to package a valve chip can be varied to accommodate valve chips of different sizes without varying outer dimensions of the packaged valve chip assembly. A same main housing **401** may thus receive packaged valve chip assemblies in enclosures **403a-d** having different flow capacity characteristics. Stated in other words, the size of a MEMS valve chip may be varied to provide different flow characteristics (for example, in the range of approximately 0.001Cv to approximately 10Cv) while maintaining a same envelope geometry of the packaged valve chip.

[0115] In addition, exposed portions of the metal leads **217** on an edge of the packaged valve may mate with corresponding leads of the main housing **401** to provide communication of electrical signals from outside the main housing with fixed and flexible electrodes of the valve chips plugged into enclosures **403a-d** of the main housing **401**.

[0116] While not shown in Figures 10-13, filters may be provided in one or more of the chambers **143a-e** to protect the microvalves. For example, a filter in chamber **143c** may protect microvalves from particles and/or other debris from a high pressure supply, and filters in chambers **143b** and **143d** may protect microvalves from particles and/or other debris introduced from the actuator during the exhaust cycle.

[0117] An electronics sub-assembly **501** for valve assemblies according to some embodiments of the present invention is illustrated in Figures 14-17. More particularly, a printed circuit board **503** may include electronic circuitry and/or

software and/or firmware used to control operations of the valve chips **131** included in the main housing **401**. For example, the printed circuit board **503** may include electronic circuitry and/or software to control and/or drive the valve chips **131** in accordance with operations discussed above with respect to Figures 4A-F as instructed by a remote device such as a programmable logic controller (PLC).

[0118] The printed circuit board may include integrated circuit chips **505**, resistors, capacitors, and/or inductors thereon. In addition, leads **507** on the printed circuit board **503** may provide electrical coupling with leads of the main housing **401**, and one or more connectors **509** (such as Molex connectors) may provide electrical connection to a remote controller such as a PLC. The printed circuit board may be configured to provide a plurality of different operating characteristics with one particular programming characteristic being selected using jumpers **511** or other means such as a dip switch(es), shunt(s) **510**, etc. More particularly, the printed circuit board may include one or more custom circuits (for example, including application specific integrated circuit ASIC devices) as discussed below with respect to Figures 41-44, 45A-B, and 46A-B. Additional operations of valve assemblies and/or electronic sub-assemblies thereof are discussed in the U.S. Provisional Application No. 60/590,699 to Kevin Douglas *et al.*, entitled "*Methods Of Operating Electrostatically Actuated Microvalve Assemblies And Related Structures*" and filed July 23, 2004 (hereinafter "Douglas *et al.*"). The disclosure of this provisional application is hereby incorporated herein in its entirety by reference.

[0119] During normal operation, the printed circuit board **503** may receive operating power along with control signals through connector(s) **509**. An alternate power source such as a battery **513** may also be provided so that the printed circuit board can sequence the valve chips **131** to a predetermined default condition in the event of a power outage. While a battery is shown in Figure 15, other alternate power sources (such as a capacitive storage device and/or a fuel cell) could be used. The printed circuit board **503** may also include a high voltage drive circuit (such as a multiple stage charge pump) used to drive the valve chip electrodes. For example, a 24V external power supply may be provided through the connector **509**, and a high voltage drive circuit may generate a 150V output used to drive the valve chip electrodes through leads **507**, leads **405**, and leads **217**. The printed circuit board may also include a transient voltage suppression (TVS) device **517** (such as a pair of serially connected and opposing zener diodes).

[0120] A controller of the electronic sub-assembly may be configured to monitor the external power supply, and upon detecting interruption of the external power supply, to advance the valve chips **131a-d** to a predetermined default condition and to hold that default condition using energy provided from the alternate power source. Upon detecting interruption of the external power supply, for example, the current condition of the valve chips **131a-d** may be maintained. In an alternative, upon detecting interruption of the external power supply, the controller may close the valve chips **131a-d** so that fluid communication is blocked between each of the chambers **143a-e**. In another alternative, upon detecting interruption of the external power supply, the controller may close valve chips **131b-c** and open valve chips **131a** and **131d**. In still another alternative, upon detecting interruption of the external power supply, the controller may close valve chips **131a** and **131d** and open valve chips **131b-c**.

[0121] The electronics sub-assembly **501** including the printed circuit board **503** and the battery **513** may be encapsulated in an insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof) as illustrated in Figures 14 and 16, for example, using an over-molding process. More particularly, an epoxy may be used that can be cured at a relatively low temperature and pressure to protect the electronics therein. An external geometry of the encapsulated electronics sub-assembly may be provided that fits on the main housing **401** so that the leads **507** of the printed circuit board **503** mate with the leads **405** of the main housing **401**.

[0122] In an alternative, a battery or other electrical power storage device may be removable from the electronics sub-assembly and/or a battery may be provided outside the encapsulation of the electronics sub-assembly. Accordingly, the battery may be more easily replaced. For example, a battery may be provided in a cable used to supply power and/or control signals to the electronics sub-assembly. Moreover, the electronics sub-assembly may include circuitry configured to charge the battery during normal operations using externally provided power. Accordingly, a life of a battery may be extended.

[0123] A base **601** for valve assemblies according to some embodiments of the present invention is illustrated in Figure 18. The base **601** may be formed using a metal casting process. More particularly, the base **601** may be formed of a metal such as aluminum or stainless steel, and the exhaust ports **142a-b** and the supply port

**144c** may be threaded tapped holes. Additional screw tapped holes **603a-b** may be used to secure the main housing **401** onto the base **601**. In addition, clearance and/or mounting holes **605** (perpendicular to and/or parallel with the ports) may be provided in the base for mounting the valve assembly.

[0124] By using a cast metal as the base, an integrity of the threads in the holes may be more easily maintained. Moreover, an epoxy finish may be provided on a cast aluminum base for protection and/or aesthetic purposes. In an alternative, the base **601** may be formed from an injection molded material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof) using metallic inserts at threaded locations.

[0125] The valve assembly may be completed by plugging packaged valve chips (such as illustrated in Figures 6 and 8) into enclosures in the bottom of the main housing **401** (as shown in Figure 21); securing the main housing (including the packaged valve chips therein) to the base **601** using screws **701**; and plugging the electronics sub-assembly onto the main housing as shown in Figures 19 and 21-22. Figure 20 illustrates the valve assembly with non-metallic portions of the main housing not shown so that leads of the main housing are visible, and so that interconnections of leads **217**, **405**, and **507** are visible.

[0126] The same main housing, base, and electronics sub-assembly can be configured for either 5-way or 3-way valve operations. For 5-way operations, as discussed above with respect to Figures 4A-F, four packaged valve chips may be plugged into respective enclosures in the bottom of the main housing as shown, for example, in Figure 21. For 3-way valve operations, a packaged valve chip may be plugged into each of the two enclosures most distant from the electronics sub-assembly, and a sealing plug **413** may be plugged into the two enclosures closest to the electronics sub-assembly so that chambers **143d-e** are permanently sealed. As discussed above, a same electronics sub-assembly may be configured to provide one of a plurality of modes of operation defined in memory (such as ROM, PROM, EPROM, EEPROM, etc.) depending on a selection made using a jumper(s), a switch(es), a shunt(s), a fuse(s), or other selection device that can be set during and/or after manufacture. For example, a same electronics sub-assembly can be used to control either 5-way, 4-way, 3-way, or 2-way operations depending on a switch, shunt, fuse, and/or jumper setting. For example, 3-way and 5-way valve operations are discussed in Douglas *et al.*

[0127] In further alternatives, a main housing, base, and electronics sub-assembly can be configured for 4-way and/or 2-way valve operations. For 4-way operations, the base may be modified so that fluid coupling is provided between exhaust chambers **143a** and **143e** and a same exhaust port. Otherwise, 4-way operations may be provided with four valve chips as discussed above with respect to Figures 4A-F. In an alternative, 2-way operations may be provided using a single valve chip to provide a unidirectional on/off flow device. A 2-way device could be provided using the components of Figures 10-13 with one valve chip and plugs substituted for other valve chips. In an alternative, a 2-way device could be provided using a smaller housing with one input port, one output port, and one enclosure for a single valve chip.

[0128] According to some embodiments of the present invention, air paths can be independently controlled between each of the five chambers **143a-e** in a valve assembly configured for 5-way operations, so that the same valve assembly may function as an "All Cylinder Ports Exhausted" valve, as an "All Cylinder Ports Blocked" valve, or as an "All Cylinder Ports Energized" valve. A valve assembly according to some embodiments of the present invention may thus replicate the functionality of any commercially available valve type based on programming of the electronics sub-assembly, selection of a program of the electronics sub-assembly, and/or insertion of packaged valve chip assemblies and/or sealing plugs into enclosures of the main housing.

[0129] Moreover, valve assemblies according to some embodiments of the present invention may provide independent control of airflow so that novel valve types may be implemented. With a back-up power source such as a battery, for example, a unique functionality may be provided when system power is lost. More particularly, the valve and pneumatic actuator may retain a last position during a power failure (as opposed to assuming a default condition).

[0130] In addition, circuits, such as custom integrated circuit devices (*e.g.*, application specific integrated circuit devices), for the electronics sub-assembly may provide different programs allowing the same physical valve assembly (including valve chips main housing, base, electronics sub-assembly, etc.) to provide functionality of any valve type. One of a plurality of programs of the electronics sub-assembly may be selected, for example, by pulling input pins to specific voltage levels, by programming a chip(s) of the electronic sub-assembly using an interface

(such as a serial interface), selectively destroying fusible links, cutting and/or maintaining one or more jumpers, placing and/or omitting a shunt between two or more pins, selecting a position of a switch(es), etc.

[0131] Valve assemblies according to additional embodiments of the present invention may use pulse width modulation to control a flow of fluid through the electro-statically actuated valves. For example, pulse width modulation may be used to open and close electro-statically actuated valve flaps at a predetermined frequency with a duty-cycle being used to determine a fluid flow through the valve. For example, a 100% duty cycle may provide a full flow, a 50% duty cycle may provide half flow, and 0% duty cycle may provide no flow. By using pulse width modulation to actuate valve chips **131a-d**, for example, a speed at which the rod **167** extends and retracts may be controlled. Moreover, an acceleration and/or deceleration of the rod **167** may be controlled as the rod extends and/or retracts by varying the duty cycle as the rod extends or retracts. For example, respective valve chips may be actuated at a greater duty cycle at the beginning of extending and/or retracting to overcome inertia, and the respective valve chips may be actuated at a reduced duty cycle as the rod approaches the fully extended and/or retracted positions.

[0132] Moreover, one or more filters may be provided in valve assemblies according to some embodiments of the present invention. Filters may be provided, for example, at high pressure supply port **144c** and/or actuator ports **146a** and **146b**. In addition or in an alternative, filters may be provided at exhaust ports **142a** and **142b**. Filters at supply port **144c** and/or exhaust ports **142a** and **142b** may be provided on and/or in the base **601** of Figure 18. Filters at actuator ports **146a** and **146b** may be provided inside or outside the main housing **401**, inside or outside banjo fittings **415a** and **415b**, and/or at collets **419a** and **419b**. The use of filters may protect the valve assemblies from contaminants such as dust, oil, and/or water that may degrade operation of the valve assemblies by plugging valve orifices and/or reducing a seal between valve flaps and respective orifices when a valve is closed.

[0133] Additional embodiments of a packaged valve chip (including a valve chip **131** as discussed above with respect to Figure 2) with a wedge shaped baffle **741**, a frame **711**, and leads **717**, are illustrated in Figures 24-26. Electrical leads **717** according to some embodiments of the present invention are illustrated in Figure 27 separate from the frame **711**.



[0134] As shown, for example, in Figures 24-26, a packaging frame 711 according to some embodiments of the present invention may include a body 713, a gasket 715, and electrical leads 717. The frame 711 may have a window therein, a recessed ledge surrounding the window, and a trough may surround the ledge as discussed above with regard to Figures 5-6 and/or 7-8. A combined width of the ledge and trough may be in the range of approximately 0.025 inches to approximately 0.060 inches. More particularly, a combined width of the ledge and trough may be in the range of approximately 0.050 inches to approximately 0.060 inches. The electrical leads 717 may be formed of stamped metal, and the electrical leads 717 may be plated with tin (approximately 150 micro inches) and then plated with gold (approximately 40 micro-inches). The body 713 may be formed of an injection molded insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof), and the gasket 715 may be formed of an injection molded flexible sealing material such as rubber, viton, and/or silicone. The gasket 715 may provide a static fluid seal with respect to a main housing of a valve assembly.

[0135] More particularly, the body 713 may be formed by injection molding an insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof) with the electrical leads 717 being provided as inserts in the mold. Moreover, the gasket 715 may be formed together with the body 713 using a two-shot molding process and/or an overmolding process. The ledge may be recessed relative to a surrounding portion of the body 713 so that a valve chip can be supported at edges thereof on one side by the ledge with top and bottom surfaces of the valve chip exposed for fluid communication therethrough. In addition, the ledge may be sufficiently recessed so that a subsequently placed valve chip is also recessed within the body 713. Moreover, portions of the electrical leads 717 are exposed adjacent the window for electrical connection (such as by wire bonding, solder bumping, conductive epoxy, or other means known to those having skill in the art) to a subsequently placed valve chip. In addition, notches 725 in the body 713 may be provided adjacent portions of the ledge to allow room for a tool to place a valve chip on the ledge with other portions of the body 713 fitting more closely to the valve chip. Portions of the body 713 surrounding the leads 717 may be angled (for example, at approximately 30 degrees) to provide wire bonding tip clearance.

[0136] An adhesive can then be provided in the trough of the body 713, and a valve chip 131 can be placed on the ledge of the body 713 surrounding the window, with the trough providing for placement, retention, and/or control of spreading of the adhesive until it is fully cured. More particularly, an adhesive bead having a width of approximately 0.015 inches may be used. The valve chip may be placed on the ledge of the body 713 with accuracy of approximately 0.005 inches using optical sensor equipment. Accordingly, indication marks may be molded into the body 713 of the packaging frame. More particularly, indication marks may be molded to include perpendicular intersecting lines having an appearance similar to that of a "L", "T", "+", or other similar character. Moreover, the indication marks may have a depth of approximately 0.010 inches.

[0137] An adhesive used to secure the valve chip 131 on the ledge of the body 713 may be cured at approximately 150 degrees C (302 degrees F) for approximately 1 hour. In an alternative, the adhesive may be cured for a longer time at a lower temperature. Polycarbonate, for example, may be used for the body 713 and polycarbonate may have a melting temperature in the range of approximately 430 degrees F to approximately 480 degrees F. To reduce deformation of the body 713, however, adhesive cure temperatures may be maintained in the range of approximately 125 degrees F to approximately 200 degrees F. In an alternative, a UV cured epoxy may be used as an adhesive.

[0138] Portions 729 of the body 713 may be deformed around the exposed edges of the valve chip 131 to provide the structure illustrated in Figure 26. The adhesive may provide a fluid seal between the valve chip 131 and the body 713, and the deformed portions 729 may secure the valve chip within the body 713. More particularly, portions 729 of the body 713 may be deformed using a heated tool (such as a heat stake) to retain the valve chip 131 within the body 713. Accordingly, edges of the valve chip 131 may be supported on one side by the ledge of the body 713 and on the other side by the deformed portions 729 of the body 713. Moreover, a surface of the valve chip 131 adjacent the leads 717 may be recessed approximately 0.010 inches relative to the leads 717 and approximately 0.030 inches relative to a surface of the body 713 surrounding the notches 725, ledge, and trough.

[0139] On the valve chip 131, all fixed electrodes may be electrically connected to a first input pad (such as a first gold bond pad), and all flexible electrodes may be electrically connected to a second input pad (such as a second gold

bond pad), and the input pads may be electrically connected (*e.g.*, via wire bonding such as gold wire bonding, solder bumping, conductive epoxy, or other means known to those having skill in the art) to exposed portions of respective electrical leads 717 adjacent the window through the body 713. A glob-top potting 731 can be used to protect the electrical connection between the input pads of the valve chip 131 and the electrical leads 717. Portions of the electrical leads 717 are exposed on an edge of the body 713 for electrical coupling to a main housing of a valve assembly.

[0140] According to alternate embodiments, the packaging frame 711 may use a chip gasket similar to that discussed above with regard to Figures 7 and 8 to provide a fluid seal between the valve chip 131 and the body of the packaging frame. As before, the body 713 may be formed of injection molded insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof), and the gasket 715 discussed above and the additional chip gasket may be formed of an injection molded flexible sealing material such as rubber, viton, and/or silicone. The gasket 715 may provide a static fluid seal with respect to a main housing, and the chip gasket may provide a static fluid seal with respect to a valve chip placed thereon. Moreover, the gasket 715 and the chip gasket may be formed together with the body 713 using a two-shot molding process and/or an overmolding process. In an alternative to a chip gasket or in addition, a stamped adhesive tape may be used to secure the valve chip to the ledge.

[0141] Moreover, the valve chip 131 may be packaged before releasing the valve flaps 117. More particularly, the valve flaps 117 may be formed on a sacrificial oxide, and the sacrificial oxide may be maintained while the valve chip 131 is being assembled in the packaging frame. The sacrificial oxide may then be removed using a dry (vapor) HF release without significantly damaging the packaging frame. More particularly, the packaging frame may be formed of viton and/or other materials which may be resistant to damage from a dry (vapor) HF release.

[0142] In an alternative, valve flaps of a valve chip may be released by removing sacrificial oxide using a wet HF acid etch either before dicing from a wafer including a plurality of valve chips, after dicing but before packaging, or after packaging. More particularly, the sacrificial oxide layer may be removed from the valve chip using a 49%HF solution for approximately 10 minutes, and the wet etch may be followed by a de-ionized (DI) water rinse, an isopropyl alcohol rinse, and first and second methanol rinses for 20 minutes each to remove any residual HF and/or

water. After the wet processing, the valve chip with the released valve flaps may be primed with methanol for a supercritical dry cycle to reduce any surface tension that may otherwise result in stiction between valve flaps and the substrate.

[0143] More particularly, the valve chip may be loaded into a dryer chamber and covered with methanol, and liquid CO<sub>2</sub> may then be used to displace the methanol from the chamber at a pressure of approximately 1200 psig. Once all of the methanol is displaced, the chamber is heated past the supercritical point (approximately 31 degrees C) to transition the CO<sub>2</sub> from the liquid to gas phase, and the pressure is released to vent the system of CO<sub>2</sub> vapor. Because supercritical CO<sub>2</sub> has extremely low surface tension, CO<sub>2</sub> is less likely to pull the valve flaps down as it transitions from liquid to gas. Commercially available and/or custom supercritical dryers may be used.

[0144] Visual inspection can be used to determine that an acceptable number of the valve flaps on a valve chip are successfully released. In particular, a surface of the valve chip has a different color than exposed silicon under the flappers which is visible when the valve flaps are released and the valve chip is unpowered, and the color variations could be inspected. In an alternative, light can be projected through the wafer after release, and an optical detector could detect light differences between the unreleased (closed) and released (open) valve chip. In either example, machine vision systems could be used to perform the inspections.

[0145] Moreover, tooling used to mold packaging frames according to some embodiments of the present invention illustrated in Figures 24-26 may be adaptable so that packaging frames with the same outer dimensions are molded with different window dimensions using substantially the same mold tooling. For example, a same mold base could be used to form different packaging frames with different mold lids being used to provide different window sizes, shapes, and/or locations. Accordingly, packaging frames may be efficiently fabricated for valve chips of different sizes. More particularly, a smaller window may be provided for a smaller valve chip for an application requiring a lower fluid flow capacity, and the smaller window may be provided adjacent the electrical leads (instead of being centered) to provide proximity for wire bonding. By providing the packaging frames with the same outer dimensions for different valve chip sizes, a same main housing may receive packaged valve chips of different capacities/sizes to provide different operating characteristics.

[0146] As further shown in Figures 24-26, a wedge shaped baffle 741 may be provided on the body 713 of the frame 711 to deflect pressure spikes and/or reduce stress on the electrostatic valve flaps of the valve chip 131. More particularly, the baffle 741 may be provided on the body 713 adjacent the side of the valve chip 131 including the flexible valve flaps and input pads. By including the baffle 741, valve flaps 117 of the valve chip 131 may be protected during handling and subsequent assembly. In addition, the baffle 741 may provide a more laminar flow through the valve chip 131, increase a speed of sequencing a valve assembly including packaged valve chips with the baffle, and/or eliminate a need for sequencing. While the baffle 741 is illustrated with four generally circular orifices 743, different shapes, configurations, and/or orientations may be provided, and/or lesser numbers of orifices such as a single orifice may be provided.

[0147] The baffle 741 may attach to the body 713 of the frame 711 using four pins 745a-b and 747a-b and a heat stake operation. More particularly, the pins 745a-b may be molded onto the body 713 of the frame 711 and configured to mate with through holes 749a-b molded into the baffle 741. The pins 747a-b may be molded onto the baffle 741 and configured to mate with through holes 751a-b molded into the body 713 of the frame 711. By arranging the pins 745a-b and 747a-b and through holes 749a-b and 751a-b as illustrated in Figures 24-26, a desired orientation of the baffle 741 relative to the body 713 can be provided thereby reducing assembly errors. In other words, the placement of pins and holes illustrated in Figures 24-26 can facilitate that a relatively thin portion of the wedge shaped baffle 741 is arranged adjacent the electrical leads 717, and a relatively wide portion of the wedge shaped baffle 741 is arranged distant from the electrical leads 717. The baffle 741 may be molded from a same material used for the body 713, or a different material may be used.

[0148] The through holes 749a-b in the baffle 741 may be provided with counter-bores (*i.e.*, wider portions) opposite the body 713, and the through holes 751a-b in the body 713 may be provided with counter-bores opposite the baffle 741. Accordingly, the pins 745a-b and 747a-b may be mated with respective through holes 749a-b and 751a-b, and a heat stake operation on the pins may be used to secure the baffle 741 to the body 713. By providing counter-bores for the through holes, room for movement of heat staked material from the pins may be provided so that outside

faces of the baffle **741** and/or the body **713** are not significantly deformed as a result of the heat stake operation.

[0149] As further shown in Figures 24-26, the baffle **741** may include a plurality of orifices **743** therethrough. Moreover, the baffle **741** may be provided adjacent a flapper side of the valve chip **131**, and the gasket **715** may be provided adjacent a backside of the valve chip **131**. A backside of the valve chip **131** may thus communicate with a high pressure environment (such as a chamber), the orifices **743** of the baffle **741** may communicate with a relatively low pressure environment (such as a chamber), and the valve chip **131** may allow or block flow from the high pressure environment through the valve chip and through the orifices **743** in the baffle **741** to the low pressure environment. Accordingly, the baffle **741** may protect the flapper side of the valve chip **131** during handling and/or subsequent assembly.

[0150] In addition, the baffle **741** may control a pressure differential across the valve chip **131**, so that the flappers of the valve chip **131** are not required to open and/or close against sonic air flow and/or against full input pressure. By providing the baffle **741**, a reservoir is provided between the baffle **741** and the valve chip **131** so that a flow may be restricted and/or so that a pressure against which the valves must close may be reduced. Stated in other words, a total pressure drop across the packaged valve chip may be split between a first pressure drop across the valve chip **131** and a second pressure drop across the baffle **741** so that the total pressure drop is not felt across the valve chip **131**. Because the baffle **741** may allow valve flaps of the valve chip **131** used in a valve assembly to open and/or close in relative short periods of time (*e.g.*, in less than 100 microseconds) against a reduced pressure, fluid flow through the valve chip **131** may be directed "at will" without requiring particular sequencing steps as discussed above, for example, with regard to Figures 4A-F. In other embodiments, sequencing operations of Figures 4A-F may be used together with valve chips **131** packaged with baffles **741** to provide operation at even higher pressures.

[0151] Sizes, locations, and numbers of the orifices **743** may be used to control back pressures and fluid flows thorough the valve chip **131** and assembly. As shown in Figures 24-26, the orifices **743** may be provided adjacent outside corners of the valve chip **131**, but other orientations, positions, shapes, etc. of orifices **743** may be provided. With the baffle **741**, valve flappers of the valve chip **131** may open and/or close against only a fraction of a total pressure across the assembly including

the baffle **741** and the valve chip **131**, and periods of turbulent flow may be reduced. Accordingly, response times to open and/or close the valve flaps may be reduced, improved functionality may be provided, and/or reliability may be improved. Moreover, a need for sequencing may be eliminated.

[0152] The wedge shape of the baffle **743** may also facilitate assembly of the packaged valve chip into a main housing. More particularly, the wedge shape may allow the packaged valve chip to be inserted approximately  $\frac{3}{4}$  (*i.e.*, 75%) of the way into a corresponding wedge shaped enclosure of a valve housing before the gasket **715** begins to compress. Accordingly, damage to the gasket **715** during subsequent assembly may be reduced.

[0153] As shown in Figures 24-26, the gasket **715** may be provided on a side of the body **713** adjacent the backside of the valve chip **131** and opposite the baffle **741**. The gasket **715** may thus be protected from adhesives, heat stake operations, etc. used to secure the valve chip **131** in the body **713** during assembly. By placing the gasket **715** as shown in Figures 24-26, interference between the gasket **715** and the baffle **741** may be reduced.

[0154] Moreover, the electrical leads **717** may be formed as shown in Figure 27 so that wire bond portions **717a** of the leads are substantially parallel to the valve chip **131** and so that external portions **717b** of the leads are substantially perpendicular with respect to the valve chip **131**. Moreover, dimples **717c** may be provided on the external portions **717b** of the leads to improve interconnection with leads of a main housing.

[0155] The packaged valve chips of Figures 24-26 can be plugged in and out of a main housing as discussed in greater detail with respect to Figures 28-34. Accordingly, a valve assembly including one or more packaged valve chips may be repairable and/or adaptable. A valve assembly with a malfunctioning valve chip may thus be repaired by removing the packaged valve chip that is not working and inserting a new packaged valve chip. In addition, functionality of a valve assembly may be changed by replacing original packaged valve chips with new packaged valve chips having a different characteristic (such as different flow capacity and/or size of valve chip).

[0156] A main housing **801** according to some embodiments of the present invention is illustrated in Figures 28-31. More particularly, an exploded view of a main housing **801** and associated components is illustrated in Figure 28, and a bottom

perspective view of the main housing is illustrated in Figure 31. As shown in the bottom view of Figure 31, the main housing **801** defines valve assembly chambers **143a-e** discussed above with respect to Figures 3 and 4A-F. The main housing **801** also includes enclosures **803a-d** configured to receive packaged valve chips (such as discussed above with respect to Figures 24-27) perpendicular to a length of the main housing. In addition, main housing **801** includes conductive leads **805** therein used to transmit signals to metal leads **717** of the packaged valve chips in enclosures **803a-d**. A perimeter base gasket **807** may be included to provide a fluid seal with respect to a base of the assembly (illustrated, for example in Figures 37 and 38), and a PCB gasket **809** may be included to provide a seal for an external connection to the leads **805** of the main housing.

[0157] The main housing **801** may be formed by injection molding an insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof) with conductive leads **805** insert molded therein, and the gaskets **807** and/or **809** may be formed of a flexible sealing material using a two-shot molding process and/or an overmolding process. More particularly, the molding tool creates the five separate chambers **143a-e** for high pressure air supply and low pressure exhaust as discussed above with respect to Figures 3 and 4A-F. When injection molding the main housing, a hole may be included in the outside of the housing to accommodate formation of interior holes between chambers **143a-e**, and the hole in the outside of the housing may be sealed with a plug that may be glued, welded or otherwise affixed to seal the hole.

[0158] As shown in Figures 28-30, the main housing **801** may also have banjo fittings **815a-b**, O-rings **817a-b**, and collets **819a-b** (also referred to as quick connect fittings and/or cartridges) affixed thereto. More particularly, the collets **819a-b** may be push-in style cartridges. More particularly, the banjo fittings **815a-b** may be affixed to the main housing **801**, for example, using ultrasonic welding and/or an adhesive, and the banjo fittings **815a-b** are in fluid communication with the chambers **143b** and **143d** of the valve assembly. The O-rings **817a-b** and the collets **819a-b** may then be inserted in the banjo fittings **815a-b** for retention of air-tubes providing fluid communication with the pneumatic actuator chambers **163a-b** (shown in Figure 3). The main housing **801** can be used to provide either a three-way valve or a five-way valve depending on the number of packaged devices used and locations thereof to control fluid flow.



[0159] As discussed above, a microelectromechanical systems (MEMS) valve chip **131** may be packaged in a frame to provide a packaged valve chip as illustrated, for example, in Figures 24-26. Packaged valve chips may be selectively plugged in and out of respective enclosures **803a-d** of the main housing **801** so that the valve assembly is adaptable and/or repairable. The gasket **715** of the packaged valve chip provides a fluid seal with the respective enclosure **803a-d** so that fluid communication between enclosures is only provided through openings in respective valve chips. Moreover, the valve chip **131** in a packaged valve chip is directional and the gasket **715** should mate with a predetermined side of the particular enclosure so that the packaged valve chip is oriented in the main housing **801** to provide the fluid flows between chambers **143a-e** discussed above with respect to Figures 4A-F.

[0160] As shown in Figure 32, each of the enclosures **803a-d** (shown in Figure 31) may have a wedge shaped profile to accept a respective packaged valve chip including a wedge shaped baffle **741** as discussed above with regard to Figures 24-27. More particularly, each of the enclosures **803a-d** may have a profile that is relatively wide adjacent a base **851** for the housing **801** and that becomes more narrow as the enclosure extends away from the base **851**. Accordingly, each of the enclosures **803a-d** may be configured to receive a respective packaged valve chip (including a wedge shaped baffle **741**) with a narrow portion of the packaged valve chip and leads **717** extending into the housing and with a wide portion of the packaged valve chip adjacent the base **851** for the housing **801**.

[0161] The possibility that a packaged valve chip is incorrectly inserted into the housing can be reduced because a wide portion of the wedge shaped package cannot be inserted into the housing first. For example, the wedge shape of the enclosure may reduce the possibility that the wedge shaped chip assembly can be inserted upside down or sideways. Moreover, complete insertion may not be possible if the wedge shaped chip assembly is inserted into the enclosure backwards so that the base **851** may not properly mate and/or form a seal with the housing **801**.

[0162] In addition, the wedge shaped package may be inserted a significant portion (*e.g.*, greater than 50%, and frequently as much as 75%) of the way into the respective wedge shaped enclosure before the gasket **715** of the package begins to compress. Accordingly, damage to the gasket **715** can be reduced, and/or an improved fluid seal may be provided between the wedge shaped package and the wedge shaped enclosure.

[0163] As discussed above, an interior dimension of a window of a frame used to package a valve chip can be varied to accommodate valve chips of different sizes without varying outer dimensions of the packaged valve chip assembly. A same main housing **801** may thus receive packaged valve chip assemblies in enclosures **803a-d** having different flow capacity characteristics. Stated in other words, the size of a MEMS valve chip may be varied to provide different flow characteristics (for example, in the range of approximately 0.001Cv to approximately 10Cv) while maintaining a same envelope geometry of the packaged valve chip.

[0164] In addition, exposed portions of the metal leads **717** on an edge of the packaged valve chip may mate with corresponding leads **805** of the main housing **801** to provide communication of electrical signals from outside the main housing with fixed and flexible electrodes of the valve chips plugged into enclosures **803a-d** of the main housing **801**.

[0165] Figure 33 illustrates a valve assembly including four packaged valve chips, an electronics sub-assembly **1001**, and a base **851** with non-metallic portions of the main housing **801** omitted. Accordingly, the electrical leads **805** of the main housing **801** are visible, and a coupling of the electrical leads **805** of the main housing and the electrical leads **717** of the packaged valve assemblies is also visible.

[0166] As shown in Figure 33, a bend may be provided in each of the electrical leads **805** so that portions (or tabs) of the electrical leads **805** making contact with the leads **717** of the packaged chip assembly may be provided parallel with respect to a length of the leads **805** (and parallel with respect to a length of the main housing **801**). Accordingly, the portions of the electrical leads **805** making contact with the leads **717** may be supported on both ends thereof for added strength. Moreover, as the packaged chip assembly is inserted into the enclosure of the main housing, the leads **717** of the packaged chip assembly may slide back and/or forth along the tabs of the leads **805** as the gasket **715** is compressed during insertion. A reliability of electrical coupling between the leads **717** and **805** can thus be improved.

[0167] In addition, filters may be provided in one or more of the chambers **143a-e** to protect the microvalves. For example, exhaust filters **1041** may be provided in chambers **143b** and **143c**, and input filter **1043** may be provided in chamber **143c**, as shown in Figure 34. A filter in chamber **143c** may protect microvalves from particles and/or other debris from a high pressure supply, and filters in chambers **143b** and **143d** may protect microvalves from particles and/or other debris introduced from

ports to the actuator. The filters **1041** and/or **1043** may be manufactured integrally with the housing **801**, and/or the filters **1041** and/or **1043** may be manufactured separately from the housing **801**. One or more of the filters, for example, may be porous plastic filters, porous metal filters, paper filters, desiccant filters, coalescing filters, fiber filters, membrane filters, mesh filters/separators, mist separators, vane separators, cyclonic separators, down flow separators, rain out separators, vertical flow separators, and/or horizontal separators.

[0168] The input filter **1043** may be used to filter a high pressure supply provided by the customer. While the high pressure supply may be filtered outside the housing **801**, damaging particles may be introduced into the high pressure supply during valve installation, and/or particles may otherwise be introduced downstream from any external filtering. By way of example, the input filter **1043** may be configured to catch materials such as particles of Teflon® tape, pipe sealant, and/or other particles that may be in a high pressure supply pipe downstream from the customer's high pressure supply filter/regulator. Accordingly, damage to valve chips in supply paths may be reduced. Moreover, the input filter **1043** may be configured to allow air flow in all directions. Accordingly, if one area of a filter becomes clogged with contaminants, air can flow through adjacent areas of the filter without significantly limiting flow. While the supply filter **1043** is shown in the housing **801**, other filters may be provided in place of and/or in addition to the supply filter **1043**. For example, a supply filter may be provided in the base **851**, and/or in a supply line coupled to the base.

[0169] The exhaust filters **1041** may be used to filter actuator exhaust that may include particles generated as a result of actuation. Actuator exhaust, for example, may include minute particles of dried lubricant, seal, rod bearing, and/or actuator body material. By filtering any such particles from the actuator, damage to the valve chips in exhaust paths can be reduced. Moreover, the exhaust filters **1041** may be configured to allow air flow in all directions. Accordingly, if one area of a filter becomes clogged with contaminants, air can flow through adjacent areas of the filter without significantly limiting flow. While the exhaust filters **1041** are shown in the housing **801**, other filters may be provided in place of and/or in addition to the exhaust filters **1041**. For example, exhaust filters may be provided in banjo fittings **815a-b**, in collets **819a-b**, and/or in the pneumatic actuator.

[0170] The use of a baffle **741** may provide a baffle chamber between the baffle and the associated valve chip with the valve flaps of the valve chip physically protected in the baffle chamber during handling and/or assembly. Moreover, an orifice(s) in the baffle may sufficiently restrict fluid flow so that a maximum force applied to the valve flaps of the valve chip may be reduced. In addition, a volume of the baffle chamber may be sufficiently small relative to the associated chamber of the valve housing so that a laminar fluid flow through the valve chip can be attained more quickly and so that fatigue of the valve flaps can be reduced. Baffles and sequencing operations (as discussed with respect to Figures 4A-F) can thus be used separately or in combination to increase pressures against which the valve chips can operate, to reduce fatigue, to improve flows, etc.

[0171] Moreover, baffles with orifices of different sizes may be provided for different valve chips in a same valve assembly. The 5-way valve of Figure 34, for example, may be provided with baffles **741b-c** providing greater flows into actuator ports and with baffles **741a** and **741d** providing more restricted flows out of actuator ports. Relatively smooth piston motion may be provided, and/or maximum piston velocities may be reduced.

[0172] An electronics sub-assembly **1001** for valve assemblies according to some embodiments of the present invention is illustrated in Figures 35-36. More particularly, a printed circuit board within the electronics sub-assembly **1001** may include electronic circuitry and/or software and/or firmware used to control operations of the valve chips **131** included in the main housing **801**. For example, the printed circuit board may include electronic circuitry and/or software to control and/or drive the valve chips **131** in accordance with operations discussed above with respect to Figures 4A-F as instructed by a remote device such as a programmable logic controller (PLC).

[0173] The printed circuit board may include integrated circuit chips, resistors, capacitors, and/or inductors thereon. In addition, leads on the printed circuit board may provide electrical coupling with leads **805** of the main housing **801**, and a connector **1005** (such as a 5-pin Molex connector) may provide electrical connection to a remote controller such as a PLC. The electronics sub-assembly may be configured to provide a plurality of different operating characteristics defined in memory (such as ROM, PROM, EPROM, EEPROM, etc.) with one particular programming characteristic being selected using means such as a jumper(s), a dip

switch(es), shunt(s), etc. More particularly, the printed circuit board may include one or more custom circuits (for example, including one or more application specific integrated circuit ASIC devices) as discussed below with respect to Figures 41-44, 45A-B, and 46A-B. Additional operations of valve assemblies and/or electronic sub-assemblies thereof are discussed in the U.S. Provisional Application No. 60/590,699 to Kevin Douglas *et al.*, entitled "*Methods Of Operating Electrostatically Actuated Microvalve Assemblies And Related Structures*" and filed July 23, 2004 (hereinafter "Douglas *et al.*"). The disclosure of this provisional application is hereby incorporated herein in its entirety by reference.

[0174] During normal operation, the electronics sub-assembly 1001 may receive operating power along with control signals through connector 1005. An alternate power source such as a battery 1013 may also be provided so that the electronics sub-assembly can sequence the valve chips 131 to a predetermined default condition in the event of a power outage. While a battery is shown in Figures 35 and 36, other alternate power sources (such as a capacitive storage device and/or a fuel cell) could be used. As shown in Figures 35 and 36, the battery 1013 may be provided in a hinged compartment cover 1015 so that the battery may be replaced. Hinges 1017 may provide that the compartment cover opens and closes, and gasket 1019 may protect the battery 1013 from contamination and/or moisture outside the battery compartment. The battery compartment may be formed using a two-shot process to provide an integral cover 1015 and gasket 1019. With a disk type battery, terminals 1021 may provide electrical coupling between electronics of the sub-assembly 1001 and the battery 1013. Moreover, the electronics sub-assembly may include circuitry configured to charge the battery during normal operations using externally provided power. Accordingly, a life of a battery may be extended.

[0175] Moreover, indicator lights 1023 (such as light emitting diodes) may provide indication of a current mode of operation, an external power supply status, a battery status, etc. In addition, pairs of manual override contacts 1025 may be used to manually drive an associated actuator to either the extended or retracted position. For example, a first pair of manual override contacts may be electrically shorted with the tip of a screwdriver or other tool to manually drive the associated actuator to a retracted position, and a second pair of manual override contacts may be electrically shorted with the tip of a screwdriver (or other tool) to manually drive the associated actuator to an extended position.

[0176] The electronics sub-assembly **1001** may also include a high voltage drive circuit (such as a multiple stage charge pump) used to drive the valve chip electrodes. For example, a 24V external power supply may be provided through the connector **1005**, and a high voltage drive circuit may generate a 150V output used to drive the valve chip electrodes through leads **805** of the housing **801** and leads **717** of the valve chips. The printed circuit board may also include a transient voltage suppressor (TVS) such as a pair of serially connected and opposing zener diodes.

[0177] A controller of the electronics sub-assembly may be configured to monitor the external power supply, and upon detecting interruption of the external power supply, to advance the valve chips **131a-d** to a predetermined default condition and to hold that default condition using energy provided from the alternate power source. Upon detecting interruption of the external power supply, for example, the current condition of the valve chips **131a-d** may be maintained. In an alternative, upon detecting interruption of the external power supply, the controller may close the valve chips **131a-d** so that fluid communication is blocked between each of the chambers **143a-e**. In another alternative, upon detecting interruption of the external power supply, the controller may close valve chips **131b-c** and open valve chips **131a** and **131d**. In still another alternative, upon detecting interruption of the external power supply, the controller may close valve chips **131a** and **131d** and open valve chips **131b-c**.

[0178] The electronics sub-assembly **1001** including a printed circuit board may be encapsulated in an insulating material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof) as illustrated in Figures 35 and 36, for example, using an over-molding process. More particularly, an epoxy may be used that can be cured at a relatively low temperature and pressure to protect the electronics therein. An external geometry of the encapsulated electronics sub-assembly may be provided that fits on the main housing **801** so that the leads of the electronics sub-assembly mate with the leads **805** of the main housing **801**.

[0179] The five pin connector **1005**, for example, may provide an electrical power (Vcc) input connection, a ground (GND) input connection, A and B input control connections, and a power status output connection. Moreover, each pair of manual override contacts **1025** may be recessed in the over-molded housing to reduce the possibility of accidental contact therewith. In addition, the pairs of manual

override contacts may be respectively labeled "2" and "4" on adjacent portions of the battery cover to correspond with actuator port numbers of the housing.

[0180] In addition, an extension **888** of the over-mold may be configured to guide placement of the electronics sub-assembly **1001** with respect to a base and a housing during subsequent assembly. More particularly, the extension **888** may mate with a corresponding slot of a base discussed below with respect to Figures 37-38. Moreover, the grooves **885** of the electronics sub-assembly **1001** may be configured to mate with a retaining clip as discussed with respect to Figures 39 and 40.

[0181] A base **851** for valve assemblies according to some embodiments of the present invention is illustrated in Figures 37 and 38. The base **851** may be formed using a metal casting process. More particularly, the base **851** may be formed of a metal such as aluminum or stainless steel, and the exhaust ports **142a-b** and the supply port **144c** may be threaded tapped holes. Additional screw tapped holes **853a-b** may be used to secure the main housing **801** onto the base **851**. In addition, clearance and/or mounting holes **855** (perpendicular to and/or parallel with the ports) may be provided in the base for mounting the valve assembly. Moreover, communication slots **857** provide relatively narrow openings between the screw tapped holes and the respective chambers in the main housing **801**.

[0182] By using a cast metal as the base, an integrity of the threads in the holes may be more easily maintained. Moreover, an epoxy finish may be provided on a cast aluminum base for protection and/or aesthetic purposes. In an alternative, the base **851** may be formed from injection molded material (such as a plastic material, an elastomeric material, a polymer, a co-polymer, and/or derivatives thereof) using metallic inserts at threaded locations. As shown in Figure 37, a groove **889** may be formed in a tang of the base **851**, and the groove **889** may be configured to receive the extension **888** of the electronics sub-assembly **1001**. Grooves **887** may also be formed in the base **851** to couple with a retaining clip as discussed below with respect to Figures 39 and 40.

[0183] Moreover, the exhaust ports **142a-b** and the supply port **144c** may be flat bottom tap drilled and then tapped. In addition, the communication slots **857** for the exhaust ports **142a-b** may be formed off-center. Accordingly, a length of the valve assembly may be reduced because the exhaust ports do not need to be centered relative to the respective valve chambers.

[0184] The valve assembly may be completed by plugging packaged valve chips (such as illustrated in Figures 24-26) into enclosures in the bottom of the main housing **801** (as shown in Figures 31 and 32); securing the main housing (including the packaged valve chips therein) to the base **851** using screws **861**; and attaching the electronics sub-assembly **1001** onto the main housing **801** and base **851** using a U-shaped retaining clip **881** as shown in Figures 39 and 40. More particularly, the U-shaped retaining clip **881** may be configured to couple with grooves **883** of the main housing **801**, with grooves **885** of the electronics sub-assembly **1001**, and with grooves **887** of the base **851** to fasten the components together. Moreover, the extension **888** of the electronics sub-assembly **1001** may be configured to mate with the slot **889** of the base **851** to provide alignment therebetween.

[0185] The same main housing, base, and electronics sub-assembly can be configured for 5-way, 4-way, 3-way, or 2-way valve operations. For 5-way operations, as discussed above with respect to Figures 4A-F, four packaged valve chips may be plugged into respective enclosures in the bottom of the main housing as shown, for example, in Figure 34. For 3-way valve operations, a packaged valve chip may be plugged into each of the two enclosures most distant from the electronics sub-assembly, and a sealing plug may be plugged into the two enclosures closest to the electronics sub-assembly so that chambers **143d-e** are permanently sealed. As discussed above, a same electronics sub-assembly may be configured to provide one of a plurality of modes of operation defined in memory (such as ROM, PROM, EPROM, EEPROM, etc.) depending on a selection made using a jumper(s), a switch(es), a shunt(s), a fuse(s), or other selection device that can be set during and/or after manufacture. For example, a same electronics sub-assembly can be used to control either 5-way, 4-way, 3-way, or 2-way operations depending on a switch, shunt, fuse, and/or jumper setting. For example, 3-way and 5-way valve operations are discussed in Douglas *et al.*

[0186] In further alternatives, a main housing, base, and electronics sub-assembly can be configured for 4-way and/or 2-way valve operations. For 4-way operations, the base may be modified so that fluid coupling is provided between exhaust chambers **143a** and **143e** and a same exhaust port. Otherwise, 4-way operations may be provided with four valve chips as discussed above with respect to Figures 4A-F. In an alternative, 2-way operations may be provided using a single



valve chip to provide a unidirectional on/off flow device. A 2-way device could be provided using the components of Figures 28-31 with one valve chip and plugs substituted for other valve chips. In an alternative, a 2-way device could be provided using a smaller housing with one input port, one output port, and one enclosure for a single valve chip.

[0187] According to some embodiments of the present invention, electrical functionalities of the electronics sub-assemblies discussed above with regard to Figures 14-17 and/or 35-36 may be provided using a custom circuit (for example, including one or more Application Specific Integrated Circuits also referred to as ASICs). Figure 41 is a block diagram illustrating functional blocks of a circuit **2001** according to some embodiments of the present invention, and Figure 42 is a schematic diagram illustrating elements of a printed circuit board including the circuit **2001** of Figure 41.

[0188] As shown in Figure 41, the circuit **2001** may include a power regulation/control circuit **2011**, a high voltage generation circuit **2013**, a battery detect/control circuit **2015**, a deglitch/debounce logic circuit **2017**, a sequence controller (state machine) circuit **2019**, a high voltage (HV) output level shifter circuit **2021**, a configuration circuit **2023**, a reversal timing/control circuit **2025**, and a light emitting diode (LED) driver circuit **2027**. As shown, the power regulation/control circuit **2011** may receive external power supply **VDD** and ground **GND** signals through respective ones of the connectors **509** of Figures 14-17, or through respective ones of the connectors **1005** of Figures 35-36. Similarly, the deglitch/debounce logic circuit **2017** may receive input controls signals **A** and **B** through respective ones of the connectors **509** of Figures 14-17, or through respective ones of the connectors **1005** of Figures 35-36. The battery detect/control circuit **2015** may receive the battery power supply **VBat** and ground **GBat** signals from a battery (such as battery **513** of Figures 14-17 or battery **1013** of Figures 35 and 36).

[0189] The outputs **F1-F4** and **HComO** and **HComE** of the HV output level shifter circuit **2021** are used to drive the valve chips of the valve assembly with the outputs **F1-F4** and **HComO** and **HComE** being coupled to respective valve chips through leads of the main housing (such as through leads **405** of Figures 13 and 20 or through leads **805** of Figures 31 and 33). More particularly, the valve chips of the valve assemblies may be identified as first (most distant from the electronics sub-assembly) through fourth (closest to the electronics sub-assembly) with the high

voltage outputs **F1** to **F4** being respectively applied to the first through fourth valve chips, with the High Voltage Common Odd **HComO** signal being applied to the first and third valve chips, and with the High Voltage Common Even **HComE** signal being applied to the second and fourth valve chips.

[0190] The configuration logic circuit **2023** may receive configuration select signals **C1-C3** which may be either grounded or floating. As shown in Figure 42, the circuit **2001** may be provided on a printed circuit board with each of the configuration select signals/pins **C1-C3** either coupled to ground through a respective jumper **J1-J3** or floating (by removing the respective jumper). In an alternative, traces to ground for respective configuration select signals/pins **C1-C3** may be either maintained or cut before packaging to provide that respective configuration select signals/pins are either grounded or floating. Moreover, the LED driver circuit **2027** outputs **LED-A** and **LED-B** may drive respective LEDs **1023**.

[0191] The custom circuit of Figures 41 and 42 may be configured so that the resulting valve assembly can be used as a drop-in replacement for a conventional solenoid driven valve. Accordingly, the physical and electrical interfaces for the electronics sub-assembly may conform to physical and electrical interfaces used for conventional solenoid driven valves. For example, the deglitch/debounce logic circuit **2017** may be configured to receive input controls signals **A** and **B** used for solenoid driven valves. As shown in Figures 41 and 42, four separate high voltage output signals **F1-F4** may be provided, and each valve chip load can effectively be modeled as a capacitor **VC1-VC4** with hysteresis. The capacitors **VC1-VC4** thus represent valve chips provided in a main valve housing as opposed to elements provided on a printed circuit board in an electronics sub-assembly. Moreover, the high actuation voltages may be generated using charge pumps, inductor circuits, and/or combinations thereof, and/or other circuits known to those having skill in the art.

[0192] The high voltage generation circuit **2013** may be configured to convert a low voltage source (such as a 24 Volt external power supply signal **VDD** and/or a 3 Volt battery power supply signal **VBat**) to a high voltage signal, such as a 200 Volt DC signal. The HV generation circuit **2013**, for example, may include a series of charge pumps provided on the circuit **2001**. In addition or in an alternative as illustrated in Figures 41 and 42, external inductor coils **LL** and **LH** may be provided in parallel with external resistors **RL** and **RH** to provide one or more boost converters used to generate high voltage signals while reducing a size and/or cost of

the circuit **2001**. Moreover, an absolute value of the high voltage(s) thus generated may be adjusted to accommodate different actuation voltages used for different applications and/or to accommodate variations in characteristics of different circuits (such as ASICs) resulting from manufacturing variations. The resulting high voltages may be adjusted using a resistor **HVAR** as part of a divider used with a comparator of the HV generation circuit **2013** to control when the high voltage generation circuit **2013** is active.

[0193] Upon loss of the primary power source (*e.g.*, upon loss of the external power supply signal **VDD**), an electronic sub-assembly including the circuit **2001** may be configured to provide that the valve assembly can maintain a state or transition to a desired state. Accordingly, the electronic sub-assembly including the circuit may be configured to provide sufficient energy from a battery (such as battery **513** of Figures 15-17, battery **1013** of Figure 36, and/or battery **3013** of Figure 42) to overcome leakage through the electrostatically actuated valve chips while maintaining the valve chips in a desired state for an indefinite period during loss of the external power supply signal **VDD** (which may be a 24 Volt supply).

[0194] Upon detection of a power loss, energy may also be needed to switch the high voltage output signals **F1-F4** to a predefined condition, depending upon a particular application and state of the inputs at the time of the power loss. A relatively low-cost 3 Volt lithium primary battery may be used to provide energy to maintain high voltage output signals **F1**, **F2**, **F3**, and/or **F4** when the DC external power supply signal **VDD** is lost and/or interrupted. In an alternative, a rechargeable lithium ion battery having a voltage output in the range of 3.0 to 4.2 Volts may be used, with the circuit **2001** being configured to recharge the battery when the external power supply signal **VDD** is present.

[0195] During normal operation with the external power supply signal **VDD** available, the deglitch/debounce logic circuit **2017** may receive and/or filter the input control signals **A** and **B**, and the deglitch/debounce circuit **2017** may provide the input control signals **A** and **B** to the sequence controller **2019**. With the external power supply signal **VDD** available, the sequence controller circuit **2019** directs operation of the HV output level shifter circuit **2021** in accordance with the input control signals **A** and **B** and in accordance with a circuit configuration defined by the configuration signals **C1-C3**. During loss of the external power supply signal **VDD**, the battery detect/control circuit **2015** may detect the power loss, and a power loss

signal may be generated by the detect/control circuit **2015** and provided to the sequence controller circuit **2019**. During loss of the external power supply signal **VDD**, the sequence controller circuit **2019** directs operation of the HV output level shifter circuit **2021** in accordance with a power loss mode defined by the configuration signals **C1-C3** (without regard to the input control signals **A** and **B**).

[0196] Operation during loss of the external power supply signal **VDD** may impact operations of the various components of the circuit **2001** because of the limited energy available from the battery. Stated in other words, one or more of the components of the circuit **2001** may be configured to operate in a low power mode during loss of the signal **VDD** to extend life of the battery. For example, the HV output level shifter circuit **2021** may be configured to provide low leakage operation, high voltage generation oscillators of the HV generation circuit **2013** may be operated on an "as-needed" basis during loss of the signal **VDD**, and/or the LED driver circuit **2027** may be configured to provide a leakage-only mode during loss of the signal **VDD**. By reducing current drawn from the battery, a period of time can be extended over which the battery can be used during loss of the signal **VDD**.

[0197] In addition, the battery detect/control circuit **2015** may be configured to detect a low battery voltage and to indicate the need for a replacement battery, for example, by flashing one or both of the LEDs **1023**. More particularly, the battery detect/control circuit **2015** may periodically sample the battery voltage under a nominal load, and the battery detect/control circuit **2015** may indicate that a replacement battery is needed when the battery voltage signal **VBat** falls to approximately 2 Volts (to accommodate different battery types). For example, the battery detect/control circuit **2015** may sample the battery voltage using a nominal load of at least approximately 10 M-ohms.

[0198] Logical relationships between inputs and outputs (of electronic sub-assemblies including the circuit **2001** illustrated in Figures 41 and 42) are provided in Table 1 of Figure 43. An exponential rise and fall (a capacitor charged and discharged through a transistor) may be sufficient to drive the electrostatically actuated valve chips. Wave shaping (such as an intentional overshoot and settling voltage), however, may be provided according to some embodiments of the present invention. In Table 1 of Figure 43, X denotes a "don't care" condition for the respective signal. Where a "don't care" condition is indicated for one or both of the

input control signals **A** and/or **B**, however, the input control signal may be driven to a high or low voltage at all times.

[0199] As shown in Table 1 of Figure 43, a 5-way, 3-position, cylinder ports exhausted configuration may be provided by providing that the configuration signals **C1** and **C2** are grounded (indicated as 0). During normal operations when the signal **VDD** is present, the high voltage output signals **F1-F4** (with 0 indicating valve open and with 1 indicating valve closed) and the LED output signals **LED-A** and **LED-B** (with 0 indicating off and 1 indicating on) may be driven responsive to the input control signals **A** and **B** as indicated. When the configuration signal **C3** is grounded and the signal **VDD** is interrupted, the HV output signals **F1-F4** may be driven to the "00" state such that the first and fourth valve chips are opened and the second and third valve chips are closed (*i.e.*, both cylinder ports are exhausted) without regard to the conditions of the input signals **A** and **B**. When the configuration signal **C3** is floating (indicated as 1) and the signal **VDD** is interrupted, the HV output signals **F1-F4** may be held in their last state at the time of the power interruption without regard to the conditions of the input signals **A** and **B**.

[0200] A 5-way, 3-position, all ports blocked configuration may be provided by providing that the configuration signal **C1** is grounded (indicated as 0) and that the configuration signal **C2** is floating (indicated as 1). During normal operations when the signal **VDD** is present, the high voltage output signals **F1-F4** (with 0 indicating valve open and with 1 indicating valve closed) and the LED output signals **LED-A** and **LED-B** (with 0 indicating off and 1 indicating on) may be driven responsive to the input control signals **A** and **B** as indicated. When the configuration signal **C3** is grounded and the signal **VDD** is interrupted, the HV output signals **F1-F4** may be driven to the "00" state such that all of the valve chips are closed (*i.e.*, both cylinder ports are isolated from high pressure and exhaust ports) without regard to the conditions of the input signals **A** and **B**. When the configuration signal **C3** is floating (indicated as 1) and the signal **VDD** is interrupted, the HV output signals **F1-F4** may be held in their last state at the time of the power interruption without regard to the conditions of the input signals **A** and **B**.

[0201] A 5-way, 3-position, cylinder ports energized configuration may be provided by providing that the configuration signal **C1** is floating (indicated as 1) and that the configuration signal **C2** is grounded (indicated as 0). During normal operations when the signal **VDD** is present, the high voltage output signals **F1-F4**

(with 0 indicating valve open and with 1 indicating valve closed) and the LED output signals **LED-A** and **LED-B** (with 0 indicating off and 1 indicating on) may be driven responsive to the input control signals **A** and **B** as indicated. When the configuration signal **C3** is grounded and the signal **VDD** is interrupted, the HV output signals **F1-F4** may be driven to the "00" state such that the first and fourth valve chips are closed and the second and third valve chips are opened (*i.e.*, both actuator ports are energized) without regard to the conditions of the input signals **A** and **B**. When the configuration signal **C3** is floating (indicated as 1) and the signal **VDD** is interrupted, the HV output signals **F1-F4** may be held in their last state at the time of the power interruption without regard to the conditions of the input signals **A** and **B**.

[0202] A 5-way, 2-position configuration may be provided by providing that the configuration signals **C1** and **C2** are floating (indicated as 1). Here, only one input control signal **B** is used, and the input control signal **A** is thus in a "don't care" condition. During normal operations when the signal **VDD** is present, the high voltage output signals **F1-F4** (with 0 indicating valve open and with 1 indicating valve closed) and the LED output signals **LED-A** and **LED-B** (with 0 indicating off and 1 indicating on) may be driven responsive to the input control signal **B** as indicated. When the configuration signal **C3** is grounded and the signal **VDD** is interrupted, the HV output signals **F1-F4** may be driven to the "0" state such that the first and third valve chips are opened and the second and fourth valve chips are closed without regard to the conditions of the input signals **A** and **B**. When the configuration signal **C3** is floating (indicated as 1) and the signal **VDD** is interrupted, the HV output signals **F1-F4** may be held in their last state at the time of the power interruption without regard to the conditions of the input signals **A** and **B**.

[0203] When a voltage is applied to an electrostatically actuated valve chip continuously for a sufficient period of time, charge build-up may cause deactivation delays. As applications according to some embodiments of the present invention may require that a given state be maintained for days or even weeks, charge build-up may need to be reduced. By periodically reversing the polarity of the applied voltage in this situation, residual charges can be reduced thereby reducing charge build-up and associated actuation delays. Because the valve chip is electrostatic, the polarity of the applied voltage does not matter. Moreover, if the polarity can be reversed before the valve chip can fully open, physical operation of the device may not be significantly affected.

[0204] Accordingly, the circuit may be configured to periodically reverse the polarity of a HV output signal (*e.g.*, **F1**, **F2**, **F3**, and/or **F4**) applied to a valve chip being held closed for a significant period of time to thereby reduce charge build-up. With an on-chip oscillator used in the high voltage generation circuit **2013**, a signal can be derived for timing of the polarity switching. An absolute period of the oscillation may not be critical for any of the functions of the high voltage generation circuit.

[0205] A minimum length of time ( $t_{rev}$ ) to wait between polarity reversals may be determined based on characteristics of the valve chips being used. Since charge build-up may also occur when the battery is being used to hold the valve chip states during loss of the external power supply signal **VDD**, polarity reversals may also be provided throughout power interruptions. Accordingly, polarity reversals may be triggered when the HV generation circuit **2013** is periodically activated during power outages so that continuous operation of oscillators of the HV generation circuit is not required during power outages. Moreover, if the input control signals **A** and **B** change state during a polarity reversal operation, the polarity reversal may be completed before responding to the new input control signal command.

[0206] When switching from one state to another, product functionality may require that the sequence controller circuit **2019** provide a controlled sequence of deactivations and/or activations during a transition from one operational state to the next as discussed above, for example, with respect to Figures 4A-F. In other words, a timed sequence of output states may be desired after a control input signal changes and/or after a power status changes. Moreover, polarity reversals may include sequencing through a series of intermediate states during execution thereof. More particularly, sequencing through intermediate states may provide that specific output combinations do not occur for even an instant, and that certain intermediate conditions are given sufficient time to settle.

[0207] As shown in Table 1 of Figure 43, there may be 5 unique operational states of the HV output signals **F1-F4** (0101, 1010, 1111, 0110 and 1001) and 14 different transition from one operational state to another. Examples of sequences for all 14 state changes are shown in Figure 44 according to some embodiments of the present invention. Figure 44 also illustrates sequences that may be used to execute the 5 polarity reversal transitions (for each of the five operational states). In addition, a minimum time delay ( $t_{del}$ ) may be provided before switching to

the states indicated in bold. In addition, the polarity reversal sequences of Figure 44 may occur during power loss modes. Accordingly, high voltage signal transitions may be required using battery power during power outages.

[0208] A valve chip having its polarity reversed first goes through a state where zero volts is applied across it. These points of zero crossings are indicated with over-line (*i.e.*, " $\bar{0}$ ") in Figure 44. After the circuit **2001** achieves an over-lined state where both HV output signals of a pair (*e.g.*, **F1** and **F3**, or **F2** and **F4**) are driven with zero potential difference relative to the respective shared common signal (*e.g.*, **HComO** or **HComE**), the polarity of the shared common signal relative to the respective HV output signal pair can be reversed. If the HV output signals were initially at a high voltage potential relative to the respective shared common signal at the beginning of the polarity reversal operation, the pair of high voltage output signals and the respective shared common signal may all be pulled to the high voltage potential during the transition, and then the pair of high voltage output signals may be pulled to a low voltage potential relative to the respective shared common signal. If the HV output signals were initially at a low voltage potential relative to the respective shared common signal at the beginning of the polarity reversal operation, the pair of high voltage output signals and the respective shared common signal may all be pulled to the low voltage potential during the transition, and then the pair of high voltage output signals may be pulled to a high voltage potential relative to the respective shared common signal.

[0209] Figures 45A-B provide a summary of input/output signals and/or pins of the circuit **2001**. Multiple bond pads may be provided for some of these pins to accommodate potential current surges.

[0210] Electrostatic Discharge (ESD) circuit protection may be provided within the circuit **2001** on all input/output pins of the circuit **2001** in compliance with IEC 61000-4-2, Compliance Level 2 (4 kV for contact). In addition, the input control signal pins (**A** and **B**) and the power supply pins (**VDD** and **GND**) may be provided with external Electrical Fast Transients (EFT) circuits per IEC 61000-4-4, to Compliance Level 4. In particular, a transient voltage suppressor **TVS** (for example, including two zener diodes) and/or a storage capacitor **SC** may be provided between the main power supply signal/pin **VDD** and the ground signal/pin **GND**. In addition, a diode **RP1** may be provided between the external power supply **Vcc** and the main power supply signal/pin **VDD**. In addition, diodes **RP2** and **RP3** may be provided for



the input control signals/pins **A** and **B**. Figures 46A-B provide design parameters for the circuit **2001** according to some embodiments of the present invention.

[0211] A Transient Voltage Suppressor **TVS** may include a pair of zener diodes connected between the input power supply signal **Vcc/VDD** and ground **GND**. The zener diodes may be placed in series with their cathodes connected as shown in Figure 42. The transient voltage suppressor **TVS** may provide over-voltage protection and may provide protection from relatively large, fast transients. The transient voltage suppressor **TVS** may be located relatively distant from the circuit **2001** on the printed circuit board for the electronics sub-assembly to facilitate reliable transient protection. Volumes, thicknesses, widths, lengths, and materials for traces of the printed circuit board from the electronics sub-assembly may be selected to provide effective signal paths for normal operations and also to provide transient protection at elevated temperatures.

[0212] A reverse polarity diode **RP1** may also be provided in series with the circuit **2001** between the power supply pin **VDD** and the external power supply **Vcc** (such as a 24 Volt DC external power supply), and the reverse polarity diode **RP1** may provide reverse polarity protection for the circuit **2001**. Additional diodes **RP2** and **RP3** may provide reverse polarity protection for input control signals/pins **A** and **B**. A storage capacitor **SC** may be provided in parallel with the transient voltage suppressor **TVS**, and the storage capacitor **SC** may provide low pass filtering. The storage capacitor **SC** may also act as a storage device to provide power to the circuit **2001** during loss of external power. After external power (*i.e.*, **Vcc**) is lost, the storage capacitor **SC** may source sufficient electrical current so that the circuit **2001** may detect the power loss and/or begin transition to a power loss operational mode until the circuit can switch to the battery **3013**.

[0213] The high voltage generation circuit **2013** may generate the high voltage **HVDD** using resistors **RL** and/or **RH** and inductors **LL** and/or **LH** to create inductive kickback used to charge the storage capacitor **HVSC**. The resistors **RL** and/or **RH** may be used to limit a maximum kickback voltage, to thereby generate a sufficiently high voltage without damaging switching circuits of the high voltage generation circuit **2013**.

[0214] A rate of current change in an inductor is dependent on a voltage applied across it. A voltage across an inductor can be calculated using the equation:  $V = L (di/dt)$ , and providing a voltage across an inductor may cause the current

through the inductor to rise as a ramp. If a switch sourcing/sinking current to/from the inductor is opened, a voltage across the inductor will rise because the current through the inductor cannot change suddenly due to the inductor property that  $V = L \, di/dt$ . When the switch is opened, the voltage across the inductor will suddenly rise to a level sufficient to force current to flow. By providing the resistors **RL** and **RH** in parallel with the inductors **LL** and **LH**, a maximum current generated by the inductors can be limited and the possibility of damaging the circuit **2001** can be reduced. As shown in Figure 41, the inductive kickback circuit including inductor **LH** and resistor **RH** may be used to charge the high voltage storage capacitor **HVSC** through the charging diode **CD1**. During power outages, the inductive kickback circuit including inductor **LL** and resistor **RL** may be used to charge the storage capacitor **SC** through the charging diode **CD2**.

[0215] Figures 47A and 47B are front and back perspective views of a valve assembly including a valve housing **801'**, a base **851'**, and an electronics sub-assembly **1001'** according to some embodiments of the present invention. In the assembly of Figures 47A-B, all couplings to supply, exhaust, and actuator ports may be provided through the base **851'**. As shown, threaded couplings **146a'** and **146b'** may provide actuator ports for a pneumatic cylinder, threaded couplings **142a'** and **142b'** may provide exhaust ports; and threaded coupling **144c'** may provide a high pressure supply port. The valve assembly of Figures 47A-B may thus provide the same functionalities as discussed above with respect to valve assemblies and components of Figures 28-40. Moreover, the electronics sub-assembly **1001'** may be identical to electronic sub-assemblies discussed above with respect to Figures 33, 35-36, and 39-40.

[0216] Moreover, the valve housing **801'** may be identical to the valve housings **801** of Figures 28-34 and 39-40 with the exception that there are no ports (*i.e.*, banjo fittings **815a-b** or collets **819a-b**) on the surface of the valve housing **801'** opposite the base **851'**. As shown in Figures 47A-B a surface of the valve housing **801'** opposite the base **851'** may be flat with no openings therein. The interior of the valve housing **801'**, however, may include chambers, valve enclosures, leads, etc. as discussed above with respect to Figures 28-34 and 39-40.

[0217] The valve housing **801'** of Figures 47A-B and the valve housing **801** of Figures 28-34 and 39-40 may be produced using some shared tooling. More particularly, a same lower molding tool may be used to mold lower portions of the

valve housings **801** and **801'**, wherein the same lower molding tool defines the chambers and valve enclosures of the valve housings **801** and **801'**. Different upper molding tools may be used to mold different upper portions of the valve housings **801** and **801'**. More particularly, the same lower molding tool may be used together with a first upper molding tool to mold the valve housing **801** including the banjo fittings **815a-b**, and the same lower molding tool may be used together with a second upper molding tool to mold the valve housing **801'** without openings in the surface of the valve housing **801'** opposite the base **851'**.

[0218] As shown in Figure 48, an extruded aluminum manifold base **851''** may provide the same supply port **144c''** and exhaust ports **144a-b'** for a plurality of valve housings **801a'** to **801c'** and electronic sub-assemblies **1001a'** to **1001c'**, with the valve housings and electronic sub-assemblies provided as discussed above with respect to Figures 47A-B. Moreover, the manifold base **851''** may provide separate pairs of actuator ports **146aa** to **146af** and **146ba** to **146bf** for each valve housing. Fluid coupling may thus be provided between the supply port **144c''** and supply chambers of each of the valve housings **801a'** to **810c'**. Similarly, fluid coupling may be provided between the exhaust ports **142a''** and **142b''** and respective exhaust chambers of each of the valve housings **801a'** to **810c'**. In contrast, actuator ports **146aa** and **146ba** may be coupled to respective actuator chambers of the valve housing **801a'**; actuator ports **146ab** and **146bb** may be coupled to respective actuator chambers of the valve housing **801b'**; and actuator ports **146ac** and **146bc** may be coupled to respective actuator chambers of the valve housing **801c'**.

[0219] Additional actuator ports **146ad** to **146af** and **146bd** to **146bf** may be provided for additional valve housings coupled to the manifold base **851''**. The manifold base **851''** illustrated in Figure 48, for example, is configured to accept six valve assemblies. If fewer than six valve housings are used with the manifold base **851''** of Figure 48, unused valve housing positions may be capped to reduce leakage from the supply port **144c''**. As shown in Figure 48, each valve housing position on the manifold base **851''** includes couplings **893** to the respective actuator ports and to the supply and exhaust ports. If a valve housing is not provided at a valve housing position of the manifold base **851''**, the couplings **893** (or at least the coupling to the supply port **144c''**) may be capped to reduce leakage(s). In addition, the manifold base **851''** may be provided with a standard connector such as a connector for a DIN rail **891** (according to the Deutsche Industrie Norm standard).

[0220] The manifold base **851"**, for example, may be may be machined from an extruded aluminum profile, and may be mounted on a DIN Rail. The supply port **144c"** and the exhaust ports **142a"** and **142b"** may be formed by extrusion. The actuator ports **146aa** to **146af** and **146ba** to **146bf** may be machined into the manifold base **851"** from a direction perpendicular to the supply and exhaust ports. The couplings **893** for the valve housings to the supply port, the exhaust ports, and the actuator ports may be machined into the manifold base from a direction perpendicular to the supply and exhaust ports and perpendicular to the actuator ports.

[0221] Valve chips and/or valve assemblies according to embodiments of the present invention may also be used in vacuum applications. As shown in Figures 49A and 49B, for example, a valve assembly **4141** may define three chambers **4143a-c** separated by two valve chips **4131a-b** supported in valve enclosures of the valve assembly. In addition, a vacuum port **4142** may be coupled to a vacuum pump, a relief port **4144** may be coupled to a pressure relief source (such as the atmosphere), and the output port **4146** may be coupled to a vacuum tool **4148** (such as a vacuum wand used in microelectronics fabrication industries to handle microelectronic wafers).

[0222] As shown in Figure 49A, a vacuum may be applied by the vacuum tool **4148** by opening valve flaps of the valve chip **4131a** while closing valve flaps of the valve chip **4131b** so that the output port **4146** is coupled with the vacuum port **4143a** through valve chip **4131a**. As shown in Figure 49B, a vacuum may be removed from the vacuum tool **4148** by opening valve flaps of the valve chip **4131b** while closing valve flaps of the valve chip **4131a** so that the output port **4146** is coupled with the relief port **4143b** through valve chip **4131b**. While not shown in Figures 49A-B, the valve chips **4131a-b** may be operated under control of a controller responsive to user and/or other inputs.

[0223] The valve assembly **4141** may be provided, for example, using the valve housing **801** of Figures 28-30 with plugs used to seal valve enclosures **803c-d** closed. In an alternative, a three chamber valve assembly may be provided. Moreover, filters may be provided in one or more of the chambers **4143a-c** to protect the valve chips **4131a-b**. Moreover, the valve chips **4131a-b** may be packaged as discussed above with respect to Figures 6-9 and/or 24-27, and/or baffles may be provided with the valve chips **4131a-b** as discussed above with respect to Figures 23-26.

[0224] According to some embodiments of the present invention, a valve assembly and associated controls may be operated using a relatively low power battery (such as a battery **513** of Figures 15-17, battery **1013** of Figure 36, and/or battery **3013** of Figure 42) without an external power supply. Moreover, control signals can be provided via optical communication, radio frequency communication, and/or other wireless communication so that no electrical connections are required. Such a valve assembly may thus satisfy Intrinsically Safe (IS) requirement standards for IS applications.

[0225] Moreover, microelectromechanical systems (MEMS) valves according to some embodiments of the present invention may operate with lower wear than conventional mechanical valves. MEMS valves according to some embodiments of the present invention may thus generate fewer particulates (resulting from wear). Accordingly, MEMS valves according to some embodiments of the present invention may be especially useful in applications that are most sensitive to contamination, such as in the semiconductor industry, the pharmaceutical industry, the medical industry, the bio-medical industry, etc.

[0226] Figure 50A is a perspective view of an integrated pneumatic valve and cylinder assembly **5001** according to embodiments of the present invention, and Figure 50B is a cross-sectional view of the assembly **5001** of Figure 50A. Dimensions of elements of Figures 50A-B may be exaggerated for clarity. More particularly, the assembly may include a cylinder tube **5003** (such as a rigid metal cylindrical tube), first and second end caps **5005** and **5007**, a piston **5008** in the cylinder tube **5003**, and a rod **5009** coupled to the piston **5008** and extending through the first end cap **5005**. In addition, a spring **5010** may be provided in the cylinder tube **5003** to push the piston **5008** and rod **5009** to a retracted (default) position in an unpowered (*i.e.*, an exhausted) state.

[0227] As shown in Figure 50B, the second end cap **5007** may define first, second, and third valve chambers **5015a-c**. The first valve chamber **5015a** may be configured to be coupled to a high pressure supply **5011**, the second valve chamber **5015b** may be configured to be coupled to a cavity **5017** within the tube cylinder **5003**, and the third valve chamber may be configured to be coupled to a low pressure exhaust **5019**. In addition, electro-statically actuated valve chips **5021a-b** may be provided in the second end cap **5007**. More particularly, the valve chip **5021a** may be provided between the first and second valve chambers **5015a** and **5015b**, and the

valve chip **5021a** may be configured to allow fluid communication from the first valve chamber **5015a** to the second valve chamber **5015b** or to block fluid communication between the first and second valve chambers **5015a** and **5015b** responsive to electrical signals applied thereto. Similarly, the valve chip **5021b** may be provided between the second and third valve chambers **5015b** and **5015c**, and the valve chip **5021b** may be configured to allow fluid communication from the second valve chamber **5015b** to the second third valve chamber **5015c** or to block fluid communication between the second and third valve chambers **5015b** and **5015c** responsive to electrical signals applied thereto.

[0228] Electrical signals may be provided to the first and second valve chips **5021a-b** via a coupling **5023** to an electrical bus **5025**. For example, extend and retract signals may be received at the second end cap **5007** from a programmable logic controller (PLC) over the electronic bus **5025** and coupling **5023** with a control circuit at the second end cap **5007** generating the high voltage signals and/or providing logic for sequencing, power loss operations, polarity reversal, etc. In an alternative, some or all processing of extend and retract signals may occur outside the second end cap **5007**.

[0229] Accordingly, the valve chips **5021a-b** may provide 3-way valve functionality to control extension and retraction of the piston **5008** and rod **5009**. In a first condition, the valve chip **5021a** may be closed to substantially block fluid communication between the first and second valve chambers **5015a-b**, and the second valve chip **5021b** may be opened to allow fluid communication between the second and third valve chambers **5015b-c**. Accordingly, the cavity **5017** may be coupled through the second valve chip **5021b** to the low pressure exhaust **5019** so that the spring **5010** pushes the piston **5008** and rod **5009** to the retracted position.

[0230] In a second condition, the valve chip **5021a** may be opened to allow fluid communication between the first and second valve chambers **5015a-b**, and the second valve chip **5021b** may be closed to substantially block fluid communication between the second and third valve chambers **5015b-c**. Accordingly, the cavity **5017** may be coupled through the first valve chip **5021a** to the high pressure supply **5019** so that the piston **5008** and rod **5009** are pushed to the extended position thereby compressing the spring **5010**.

[0231] Five-way valve functionality may be provided, for example, by similarly including two valve chips in the first end cap **5005** to thereby control a

coupling of supply and exhaust pressures to a second cavity of the cylinder tube **5003** between the piston **5008** and the first end cap **5005**. Accordingly, electrical and pressure couplings may be provided at both end caps. In an alternative, 5-way operations may be provided using four valve chips provided at one of the end caps with a pneumatic coupling(s) provided between the two end caps. With five-way valve operations, the spring **5010** may not be required.

[0232] The end caps **5005** and **5007** and the cylinder tube **5003** may be formed separately and then assembled. Ends of the cylinder tube **5003**, for example, may be threaded to receive female threads of the respective end caps **5005** and **5007**, or the tube and end caps may be assembled by other means known to those having skill in the art.

[0233] The valve chips **5021a-b** may be provided and/or packaged as discussed above with respect to Figure 1-2, 5-9, and/or 24-27, and the end cap **5007** may be formed of a rigid material by molding, turning (*e.g.*, on a lathe), machining and/or other means known to those having skill in the art. After forming the end cap **5007** including the valve chambers **5015a-c**, the valve chips can be inserted into an opening(s) in the end cap **5007**, and a base can be secured to the opening(s) in the end cap **5007** before securing the end cap **5007** (with the valve chips and base) to the cylinder tube **5008**. The end cap **5007** may thus provide a rigid valve housing, the first and second valves **5015a-b** may be provided in the rigid valve housing defined by the end cap **5007**, and the rigid valve housing defined by the end cap **5007** may be mounted directly to the cylinder tube **5003**. Accordingly, a fluid seal may be provided between the valve housing defined by the end cap **5007** and the cylinder tube **5003**.

[0234] While embodiments of the present invention have been discussed above with valve assemblies used to control pneumatic actuators including rods, valve assemblies according to embodiments of the present invention can also be used to control pneumatic actuators including rodless cylinders such as magnetically coupled cylinders and/or rotary actuators. For example, the rod **5009** may be eliminated from the structure of Figures 50A-B, and a magnet may be coupled to the piston **5008** inside the cylinder tube **5003**. Accordingly, movement of the magnet with the piston **5008** inside the cylinder tube **5003** may be used to affect movement of a carriage outside the cylinder tube **5003**.

[0235] While the present invention has been particularly shown and described with reference to embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims and their equivalents.



That which is claimed is:

1. A valve assembly comprising:

a main housing defining five chambers, a first chamber coupled to a low pressure exhaust port, a second chamber coupled to a first actuator port, a third chamber coupled to a high pressure supply port, a fourth chamber coupled to a second actuator port, and a fifth chamber coupled to a low pressure exhaust port;

a first valve between the first and second chambers wherein the first valve allows or substantially blocks fluid communication between the first chamber and the second chamber responsive to a first electrical signal;

a second valve between the second and third chambers wherein the second valve allows or substantially blocks fluid communication between the second chamber and the third chamber responsive to a second electrical signal;

a third valve between the third and fourth chambers wherein the third valve allows or substantially blocks fluid communication between the third chamber to the fourth chamber responsive to a third electrical signal;

a fourth valve between the fourth and fifth chambers wherein the fourth valve allows or substantially blocks fluid communication between the fourth chamber and the fifth chamber responsive to a fourth electrical signal; and

a controller configured to generate the first, second, third, and fourth electrical signals for the respective valve assemblies wherein the controller is configured to advance the valves through the following sequence of conditions,

in a first condition, opening the second and fourth valves and closing the first and third valves so that fluid communication is allowed between the second and third chambers and between the fourth and fifth chambers and so that fluid communication is substantially blocked between the first and second chambers and between the third and fourth chambers,

in a second condition after the first condition, opening the second valve and closing the first, third, and fourth valves so that fluid communication is allowed between the second and third chambers and so that fluid communication is substantially blocked between the first and second chambers, between the third and fourth chambers, and between the fourth and fifth chambers,

in a third condition after the second condition, opening the second and third valves and closing the first and fourth valves so that fluid communication is allowed between the second and third chambers and between the third and fourth chambers and so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers,

in a fourth condition after the third condition, opening the third valve and closing the first, second, and fourth valves so that fluid communication is allowed between the third and fourth chambers and so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, and between the fourth and fifth chambers, and

in a fifth condition after the fourth condition, opening the first and third valves and closing the second and fourth valves, so that fluid communication is allowed between the first and second chambers and between the third and fourth chambers and so that fluid communication is substantially blocked between the second and third chambers and between the fourth and fifth chambers.

2. A valve assembly according to Claim 1 wherein the controller is configured to provide the sequence of conditions further including,

in an initial condition before the first condition, closing the first, second, third, and fourth valves so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, between the third and fourth chambers, and between the fourth and fifth chambers.

3. A valve assembly according to Claim 1 wherein the controller is configured to provide the sequence of conditions further including,

in a sixth condition after the fifth condition, closing the first, second, third, and fourth valves so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, between the third and fourth chambers, and between the fourth and fifth chambers.

4. A valve assembly according to Claim 1 wherein the controller is configured to provide the sequence of conditions further including,

in a sixth condition after the fifth condition, closing the second and third valves so that fluid communication is substantially blocked between the second and third chambers and between the third and fourth chambers, and opening the first and fourth valves so that fluid communication is allowed between the first and second chambers and between the fourth and fifth chambers.

5. A valve assembly according to Claim 1 wherein the controller is configured to provide the sequence of conditions further including,

in a sixth condition after the fifth condition, closing the first and fourth valves so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers, and opening the second and third valves so that fluid communication is allowed between the second and third chambers and between the third and fourth chambers.

6. A valve assembly according to Claim 1 wherein the controller is further configured to provide the sequence of conditions further including,

in an initial condition before the first condition, closing the second and third valves so that fluid communication is substantially blocked between the second and third chambers and between the third and fourth chambers, and opening the first and fourth valves so that fluid communication is allowed between the first and second chambers and between the fourth and fifth chambers.

7. A valve assembly according to Claim 1 wherein the controller is configured to provide the sequence of conditions further including,

in an initial condition before the first condition, closing the first and fourth valves so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers, and opening the second and third valves so that fluid communication is allowed between the second and third chambers and between the third and fourth chambers.

8. A method of operating a valve assembly including a housing having a first chamber coupled to a low pressure exhaust port, a second chamber coupled to a first

actuator port, a third chamber coupled to a high pressure supply port, a fourth chamber coupled to a second actuator port, and a fifth chamber coupled to a low pressure exhaust port, the valve assembly further including a first valve between the first and second chambers, a second valve between the second and third chambers, a third valve between the third and fourth chambers, and a fourth valve between the fourth and fifth chambers, the method comprising:

opening the second and fourth valves and closing the first and third valves to provide a first condition so that fluid communication is allowed from the third chamber to the second chamber and from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the first and second chambers and between the third and fourth chambers,

after the first condition, opening the second valve and closing the first, third, and fourth valves to provide a second condition so that fluid communication is allowed from the third chamber to the second chamber and so that fluid communication is substantially blocked between the first and second chambers, between the third and fourth chambers, and between the fourth and fifth chambers,

after the second condition, opening the second and third valves and closing the first and fourth valves to provide a third condition so that fluid communication is allowed from the third chamber to the second chamber and from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers,

after the third condition, opening the third valve and closing the first, second, and fourth valves to provide a fourth condition so that fluid communication is allowed from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, and between the fourth and fifth chambers, and

after the fourth condition, opening the first and third valves and closing the second and fourth valves to provide a fifth condition so that fluid communication is allowed from the second chamber to the first chamber and from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the second and third chambers and between the fourth and fifth chambers.

9. A method according to Claim 8 further comprising:

before the first condition, closing the first, second, third, and fourth valves to provide an initial condition so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, between the third and fourth chambers, and between the fourth and fifth chambers.

10. A method according to Claim 8 further comprising:

after the fifth condition, closing the first, second, third, and fourth valves to provide a sixth condition so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, between the third and fourth chambers, and between the fourth and fifth chambers.

11. A method according to Claim 8 further comprising:

after the fifth condition, closing the second and third valves and opening the first and fourth valves to provide a sixth condition so that fluid communication is substantially blocked between the second and third chambers and between the third and fourth chambers, and so that fluid communication is allowed between the first and second chambers and between the fourth and fifth chambers.

12. A method according to Claim 8 further comprising:

after the fifth condition, closing the first and fourth valves and opening the second and third valves so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers, and so that fluid communication is allowed between the second and third chambers and between the third and fourth chambers.

13. A method according to Claim 8 further comprising:

before the first condition, closing the second and third valves and opening the first and fourth valves to provide an initial condition so that fluid communication is substantially blocked between the second and third chambers and between the third and fourth chambers, and so that fluid communication is allowed between the first and second chambers and between the fourth and fifth chambers.

14. A method according to Claim 8 further comprising:

before the first condition, closing the first and fourth valves and opening the second and third valves to provide an initial condition so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers, and so that fluid communication is allowed between the second and third chambers and between the third and fourth chambers.

15. A method according to Claim 8 wherein the first and fifth chambers are coupled to a same low pressure exhaust port.

16. A method according to Claim 8 wherein the first and fifth chambers are coupled to different low pressure exhaust ports.

17. A method according to Claim 8 wherein each of the valves comprises a respective valve chip including a respective plurality of valve flaps thereon.

18. A method according to Claim 17 wherein the first valve chip is spaced apart from the second valve chip.

19. A method according to Claim 17 wherein the first valve chip is parallel with respect to the second valve chip.

20. A method according to Claim 8 further comprising:  
during each of the first and fifth conditions, monitoring an external power source;  
upon detecting an interruption in the external power source during the first condition, maintaining the first condition; and  
upon detecting an interruption in the external power source during the fifth condition, maintaining the fifth condition.

21. A method according to Claim 8 further comprising:  
during each of the first, second, third, fourth, and fifth conditions, monitoring an external power source; and  
upon detecting an interruption in the external power source during any of the first, second, third, fourth, and fifth conditions, closing the first, second, third, and

fourth valves to provide a default condition so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, between the third and fourth chambers, and between the fourth and fifth chambers.

22. A method according to Claim 8 further comprising:

during each of the first, second, third, fourth, and fifth conditions, monitoring an external power source; and

upon detecting an interruption in the external power source during any of the first, second, third, fourth, and fifth conditions, closing the second and third valves and opening the first and fourth valves to provide a default condition so that fluid communication is substantially blocked between the second and third chambers and between the third and fourth chambers, and so that fluid communication is allowed between the first and second chambers and between the fourth and fifth chambers.

23. A method according to Claim 8 further comprising:

during each of the first, second, third, fourth, and fifth conditions, monitoring an external power source; and

upon detecting an interruption in the external power source during any of the first, second, third, fourth, and fifth conditions, closing the first and fourth valves and opening the second and third valves to provide a default condition so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers, and so that fluid communication is allowed between the second and third chambers and between the third and fourth chambers.

24. A valve comprising:

a substrate having first and second opposing faces, a hole through the substrate between the first and second faces, and a pair of input pads thereon;

a moveable valve member on the substrate with the movable valve member being associated with the hole in the substrate, wherein the movable valve member is configured to open or substantially block the hole responsive to an electrical signal applied to the pair of input pads; and

a frame surrounding and supporting the substrate at edges thereof so that central portions of the first and second faces of the substrate are exposed through an

opening in the frame and so that a fluid seal is provided between the frame and edges of the substrate.

25. A valve according to Claim 24 wherein the movable valve member comprises a flexible valve flap.

26. A valve according to claim 24 further comprising:  
first and second conductive leads in the frame, the first and second conductive leads being electrically coupled to the respective input pads on the substrate.

27. A valve according to Claim 26 wherein portions of the first and second conductive leads are exposed along an outside edge of the frame.

28. A valve according to Claim 27 wherein the exposed portions of the first and second conductive leads are oriented in a direction substantially perpendicular with respect to the substrate.

29. A valve according to Claim 27 wherein the exposed portions of the first and second conductive leads are exposed through slots in the frame.

30. A valve according to Claim 26 wherein the first and second conductive leads are wire bonded to the respective input pads.

31. A valve according to Claim 24 wherein the frame has a thickness greater than a thickness of the substrate and wherein the frame includes a recessed ledge along the opening in the frame with the edges of the substrate being supported by the recessed ledge.

32. A valve according to Claim 31 further comprising:  
a flexible gasket between the recessed ledge and the edges of the substrate.

33. A valve according to Claim 31 wherein the edges of the substrate are secured to the gasket and the recessed ledge with portions of the frame overlapping edges of the substrate opposite the recessed ledge.



34. A valve according to Claim 31 wherein the edges of the substrate are secured to the recessed ledge using an adhesive.

35. A valve according to Claim 24 further comprising:  
a baffle on the frame and spaced apart from the substrate, the baffle having at least one opening there through.

36. A valve according to Claim 35 wherein the valve member is between the substrate and the baffle.

37. A valve according to Claim 35 wherein the baffle and the substrate define a baffle chamber there between.

38. A valve according to Claim 35 wherein the baffle provides a restriction to fluid flow in series with the plurality of holes through the substrate.

39. A valve according to Claim 35 wherein the baffle has a wedge shape.

40. A valve according to Claim 39 further comprising:  
first and second conductive leads on a first edge of the frame, the first and second conductive leads being electrically coupled to the respective input pads on the substrate, wherein a thin portion of the baffle is adjacent the first edge of the frame and wherein a wide portion of the baffle is adjacent a second edge of the frame opposite the first edge.

41. A valve according to Claim 35 wherein the baffle, the frame and the substrate define an enclosure with the moveable valve member being included in the enclosure.

42. A valve according to Claim 35 further comprising:  
a flexible gasket on the frame such that the frame is between the flexible gasket and the baffle.

43. A valve according to Claim 24 further comprising:

a flexible gasket on the frame with the substrate being recessed in the frame relative to the gasket, the flexible gasket defining an opening therein having dimensions greater than dimensions defined by a perimeter of the substrate.

44. A valve according to Claim 24 wherein the frame comprises a rigid polymer material.

45. A method of packaging a valve chip including a substrate having first and second faces and a hole through the substrate between the first and second faces, a moveable valve member on one of the faces of the substrate with the moveable valve member being associated with the hole, the method comprising:

forming a frame having an opening therein; and

securing the valve chip in the opening of the frame so that central portions of the first and second faces of the substrate are exposed through the opening in the frame and so that a fluid seal is provided between the frame and edges of the substrate.

46. A method according to Claim 45 wherein the moveable valve member comprises a flexible valve flap.

47. A method according to Claim 45 wherein forming the frame comprises molding the frame separate from the valve chip, and wherein securing the valve chip comprises securing the valve chip in the opening of the frame after completion of molding.

48. A method according to claim 45 wherein the valve chip includes a pair of input pads on the substrate, and wherein providing the frame includes providing first and second conductive leads in the frame, the method further comprising:

after securing the valve chip in the opening, electrically coupling the first and second conductive leads to the respective input pads on the substrate.

49. A method according to Claim 48 wherein portions of the first and second conductive leads are exposed along an outside edge of the frame.

50. A method according to Claim 49 wherein the exposed portions of the first and second conductive leads are oriented in a direction substantially perpendicular with respect to the substrate.

51. A method according to Claim 49 wherein the exposed portions of the first and second conductive leads are exposed through slots in the frame.

52. A method according to Claim 48 wherein electrically coupling the first and second conductive leads comprises wire bonding the first and second conductive leads to the respective input pads.

53. A method according to Claim 45 wherein the frame has a thickness greater than a thickness of the substrate and wherein the frame includes a recessed ledge along the opening therein with the edges of the substrate being supported by the recessed ledge.

54. A method according to Claim 53 further comprising:

before securing the valve chip in the opening, forming a flexible gasket on the recessed ledge wherein securing the valve chip comprises securing edges of the substrate on the flexible gasket.

55. A method according to Claim 54 wherein forming the frame and forming the flexible gasket comprise molding the frame and the gasket using a first shot of a first material for the frame and a second shot of a second material for the gasket.

56. A method according to Claim 53 wherein securing the valve chip includes placing the valve chip on the recessed ledge and then deforming portions of the frame to overlap edges of the substrate opposite the recessed ledge so that edges of the substrate are secured between the recessed ledge and the deformed portions of the frame.

57. A method according to Claim 53 wherein securing the valve chip includes providing an adhesive between the edges of the substrate and the recessed ledge.

58. A method according to Claim 45 further comprising:  
providing a baffle on the frame wherein the baffle is spaced apart from the substrate and wherein the baffle has at least one opening there through.
59. A method according to Claim 58 wherein the baffle provides a restriction to fluid flow in series with the plurality of holes through the substrate.
60. A method according to Claim 58 wherein the baffle has a wedge shape.
61. A method according to Claim 60 wherein the frame includes first and second conductive leads on a first edge of the frame, the first and second conductive leads being electrically coupled to the respective input pads on the substrate, wherein a thin portion of the baffle is adjacent the first edge of the frame and wherein a wide portion of the baffle is adjacent a second edge of the frame opposite the first edge.
62. A method according to Claim 58 wherein the baffle, the frame, and the substrate define an enclosure with the moveable valve member being included in the enclosure.
63. A method according to Claim 58 further comprising:  
forming a flexible gasket on the frame such that the frame is between the flexible gasket and the baffle.
64. A method according to Claim 45 further comprising:  
before securing the valve chip in the opening, forming a flexible gasket on the frame, the flexible gasket defining an opening therein having dimensions greater than dimensions defined by a perimeter of the substrate.
65. A method according to Claim 64 wherein forming the frame and forming the flexible gasket comprise molding the frame and the gasket using a first shot of a first material for the frame and a second shot of a second material for the gasket.

66. A method according to Claim 45 wherein the frame comprises a rigid polymer material.

67. A method according to Claim 45 further comprising:

providing a housing defining first and second chambers and a valve chip enclosure between the first and second chambers, wherein the first and second chambers and the valve chip enclosure are open at one end;

after securing the valve chip in the opening of the frame, inserting the frame in the valve chip enclosure; and

after inserting the frame in the valve chip enclosure, securing a base on the open end of the housing so that the first and second chambers are separated by the valve chip.

68. A method according to Claim 67 wherein the housing includes a first port providing fluid communication into and/or out of the first chamber and wherein the base includes a second port providing fluid communication into and/or out of the second chamber.

69. A valve assembly comprising:

a main housing defining first, second, and third chambers, the main housing further defining a first valve enclosure between the first and second chambers and a second valve enclosure between the second and third chambers;

first, second, third, and fourth electrical housing leads in the main housing with portions of each of the first and second electrical housing leads being exposed in the first valve enclosure and with portions of the third and fourth electrical housing leads being exposed in the second valve enclosure;

a first valve in the first valve enclosure electrically coupled with the first and second electrical housing leads wherein the first valve is configured to allow or substantially block fluid communication between the first and second chambers responsive to electrical signals provided on the first and second electrical housing leads;

a second valve in the second valve enclosure electrically coupled with the third and fourth electrical housing leads wherein the second valve is configured to allow or substantially block fluid communication between the second and third

chambers responsive to electrical signals provided on the third and fourth electrical housing leads; and

a controller electrically coupled to the first, second, third, and fourth electrical housing leads wherein the controller is configured to generate the electrical signals to allow or substantially block fluid communication between the first and second chambers and between the second and third chambers.

70. A valve assembly according to Claim 69 wherein the first valve comprises a first planar substrate having a plurality of holes through the first planar substrate, wherein the second valve comprises a second planar substrate having a plurality of holes through the second planar substrate.

71. A valve assembly according to Claim 70 wherein the first and second planar substrates are substantially parallel with respect to each other.

72. A valve assembly according to Claim 70 wherein the first valve comprises a plurality of flexible valve flaps on a surface thereof with the flexible valve flaps being configured to open or substantially block respective holes responsive to the electrical signals applied to the first and second electrical housing leads.

73. A valve assembly according to Claim 69 further comprising a filter in at least one of the first, second, and/or third chambers.

74. A valve assembly according to Claim 69 wherein the first valve comprises a planar substrate having a plurality of holes through the substrate, and a frame surrounding and supporting the planar substrate at edge portions thereof so that central portions of the planar substrate are exposed through an opening in the frame and so that a fluid seal is provided between the frame and edges of the substrate.

75. A valve assembly according to Claim 74 wherein the first valve further comprises a baffle on the frame so that the baffle, the frame, and the planar substrate define an enclosure, and wherein the baffle includes at least one opening therein.

76. A valve assembly according to Claim 74 wherein the first valve has a wedge shaped profile.

77. A valve assembly according to Claim 69, wherein the main housing further defines a fourth chamber and a third valve enclosure between the third and fourth chambers, the valve assembly further comprising:

a fifth electrical housing lead in the main housing with portions of each of the second and fifth electrical housing leads being exposed in the third valve enclosure; and

a third valve in the third valve enclosure electrically coupled with the fifth and second electrical housing leads wherein the third valve is configured to allow or substantially block fluid communication between the third and fourth chambers responsive to electrical signals provided on the fifth and second electrical housing leads;

wherein the controller is electrically coupled to the fifth electrical housing lead and wherein the controller is configured to generate the electrical signals to allow or substantially block fluid communication between the third and fourth chambers.

78. A valve assembly according to Claim 69 further comprising:

a first flexible gasket providing a fluid seal between the first valve and the first valve enclosure; and

a second flexible gasket providing a fluid seal between the second valve and the second valve enclosure.

79. A valve assembly comprising:

a valve housing defining first and second chambers;

a valve in the housing between the first and second chambers wherein the valve includes a planar substrate having a hole therethrough and a moveable valve member adjacent to the hole, and wherein the valve is configured to allow or substantially block fluid communication between the first and second chambers; and  
a filter in the second chamber of the housing.

80. A valve assembly according to Claim 79 wherein the moveable valve member comprises a flexible valve flap.

81. A valve assembly according to Claim 79 wherein the valve housing further defines a third chamber, the valve assembly further comprising:

a second valve in the housing between the second and third chambers wherein the second valve is configured to allow or substantially block fluid communication between the second and third chambers.

82. A valve assembly according to Claim 81 further comprising:

a second filter in the third chamber of the housing.

83. A valve assembly according to Claim 81 wherein the valve housing further defines a fourth chamber, the valve assembly further comprising:

a third valve in the housing between the third and fourth chambers wherein the third valve is configured to allow or substantially block fluid communication between the third and fourth chambers.

84. A valve assembly according to Claim 83 further comprising:

a second filter in the fourth chamber of the housing.

85. A valve assembly according to Claim 83 wherein the valve housing further defines a fifth chamber, the valve assembly further comprising:

a fourth valve in the housing between the fourth and fifth chambers wherein the fourth valve is configured to allow or substantially block fluid communication between the fourth and fifth chambers.

86. A valve assembly according to Claim 85 further comprising:

a second filter in the fourth chamber.

87. A valve assembly according to Claim 86 further comprising:

a third filter in the third chamber.

88. A valve assembly according to Claim 85 wherein the third chamber is configured to be coupled to a high pressure fluid supply, wherein the second and fourth chambers are configured to be coupled to respective ports of a cylinder, and



wherein the first and fifth chambers are configured to be coupled to low pressure exhaust.

89. A valve assembly according to Claim 79 wherein the valve comprises an electro-statically actuated valve.

90. A valve assembly according to Claim 89 wherein the electro-statically actuated valve includes a substrate having a hole therethrough and a moveable valve member on a surface of the substrate facing the first chamber adjacent the hole.

91. A valve assembly according to Claim 79 wherein the housing includes a main portion having openings to the first and second chambers and a base portion secured to the main portion to seal the openings in the main portion to the first and second chambers.

92. A method of operating a valve assembly including a housing having a first chamber coupled to a low pressure exhaust port, a second chamber coupled to a first actuator port, a third chamber coupled to a high pressure supply port, a fourth chamber coupled to a second actuator port, and a fifth chamber coupled to a low pressure exhaust port, the valve assembly further including a first valve between the first and second chambers, a second valve between the second and third chambers, a third valve between the third and fourth chambers, and a fourth valve between the fourth and fifth chambers, the method comprising:

providing a first condition by applying opening electrical signals to the second and fourth valves and by applying closing electrical signals to the first and third valves so that fluid communication is allowed from the third chamber to the second chamber and from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the first and second chambers and between the third and fourth chambers; and

providing a second condition by applying opening electrical signals to the first and third valves and by applying closing electrical signals to the second and fourth valves so that fluid communication is allowed from the second chamber to the first chamber and from the third chamber to the fourth chamber and so that fluid

communication is substantially blocked between the second and third chambers and between the fourth and fifth chambers.

93. A method according to Claim 92 further comprising:

providing a third condition by closing at least the first and second valves so that fluid communication is substantially blocked between the first and second chambers and between the second and third chambers, or closing at least the second and third valves so that fluid communication is substantially blocked between the second and third chambers and between the third and fourth chambers, or closing at least the third and fourth valves so that fluid communication is substantially blocked between the third and fourth chambers and between the fourth and fifth chambers, or by opening at least the first and second valves so that fluid communication is allowed between the first and second chambers and between the second and third chambers, or by opening at least the second and third valves so that fluid communication is allowed between the second and third chambers and between the third and fourth chambers, or by opening at least the third and fourth valves so that fluid communication is allowed between the third and fourth chambers and between the fourth and fifth chambers.

94. A method according to Claim 92 further comprising:

providing a third condition by closing at least the first and fourth valves so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers, or by closing at least the second and third valves so that fluid communication is substantially blocked between the second and third chambers and between the third and fourth chambers.

95. A method according to Claim 94 wherein providing the third condition comprises opening the second valve and closing the first, third, and fourth valves so that fluid communication is allowed from the third chamber to the second chamber and so that fluid communication is substantially blocked between the first and second chambers, between the third and fourth chambers, and between the fourth and fifth chambers.

96. A method according to Claim 94 wherein providing the third condition comprises opening the second and third valves and closing the first and fourth valves

so that fluid communication is allowed from the third chamber to the second chamber and from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the first and second chambers and between the fourth and fifth chambers.

97. A method according to Claim 94 wherein providing the third condition comprises opening the third valve and closing the first, second, and fourth valves so that fluid communication is allowed from the third chamber to the fourth chamber and so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, and between the fourth and fifth chambers.

98. A method according to Claim 94 wherein providing the third condition comprises opening the first and fourth valves and closing the second and third valves so that fluid communication is allowed from the second chamber to the first chamber and from the fourth chamber to the fifth chamber and so that fluid communication is substantially blocked between the second and third chambers and between the third and fourth chambers.

99. A method according to Claim 94 wherein providing the third condition comprises closing the first, second, third, and fourth valves so that fluid communication is substantially blocked between the first and second chambers, between the second and third chambers, between the third and fourth chambers, and between the fourth and fifth chambers.

100. A method according to Claim 94 wherein providing the third condition comprises providing the third condition as an intermediate condition in time between providing the first and second conditions.

101. A method according to Claim 94 wherein providing the third condition comprises providing the third condition as an initial condition in time before providing the first and second conditions.

102. A method according to Claim 94 wherein providing the third condition comprises providing the third condition as a final condition in time after providing the first and second conditions.

103. A method according to Claim 94 wherein providing the first condition precedes in time providing the second condition.

104. A method according to Claim 94 wherein providing the second condition precedes in time providing the first condition.

105. A method according to Claim 92 wherein each of the valves comprises an electro-statically actuated valve.

106. A method according to Claim 92 wherein the valve assembly includes a coupling to an external power source, the method further comprising:

while providing each of the first and second conditions, monitoring the external power source;

upon detecting an interruption of the external power source while providing the first condition, maintaining the first condition during the interruption of the external power source; and

upon detecting an interruption of the external power source while providing the second condition, maintaining the second condition during the interruption of the external power source.

107. A method according to Claim 106 wherein the valve assembly further includes a coupling to a back-up power source, wherein maintaining the first condition during interruption of the external power source comprises maintaining the first condition using the back-up power source, and wherein maintaining the second condition during interruption of the external power source comprises maintaining the second condition using the back-up power source.

108. A method according to Claim 107 wherein the back-up power source comprises a battery.

109. A valve assembly comprising:

a valve housing defining first, second, and third chambers;

a first valve between the first and second chambers, the first valve comprising a first valve substrate, wherein the first valve is configured to allow or substantially block fluid communication between the first and second chambers; and

a second valve between the second and third chambers, the second valve comprising a second valve substrate, wherein the second valve is configured to allow or substantially block fluid communication between the second and third chambers and wherein the first and second substrates are separate.

110. A valve assembly according to Claim 109 wherein the first and second substrates are non-parallel.

111. A valve assembly according to Claim 109 wherein the first and second valves comprises first and second electro-statically actuated valves.

112. A valve assembly according to Claim 109 wherein the first substrate comprises a first hole therethrough and a first valve member adjacent the first hole with the first valve member being configured to open and close the first hole responsive to first electrical signals applied thereto, and wherein the second substrate comprises a second hole therethrough and a second valve member adjacent the second hole with the second valve member being configured to open and close the second hole responsive to second electrical signals applied thereto.

113. A valve assembly according to Claim 112 wherein the first and second valve members comprise respective first and second flexible valve flaps.

114. A valve assembly according to Claim 109 further comprising:

a baffle between the first valve and one of the first and second chambers wherein the baffle defines a baffle chamber between the baffle and the valve and wherein the baffle includes an orifice there through.

115. A valve assembly according to Claim 109 further comprising a filter in at least one of the first and second chambers.

116. A valve assembly according to Claim 109 wherein the valve housing further defines fourth and fifth chambers, the valve assembly further comprising:

a third valve between the third and fourth chambers, the third valve comprising a third valve substrate, wherein the third valve is configured to allow or substantially block fluid communication between the third and fourth chambers; and

a fourth valve between the fourth and fifth chambers, the fourth valve comprising a fourth valve substrate, wherein the fourth valve is configured to allow or substantially block fluid communication between the fourth and fifth chambers and wherein the first, second, third, and fourth substrates are separate.

117. A valve assembly according to Claim 109 further comprising:

a controller coupled to each of the first and second valves, wherein the controller is configured to control opening and closing of the first and second valves.

118. A valve assembly according to Claim 117 wherein a first electrical signal coupling is provided between the controller and the first valve, wherein a second electrical signal coupling is provided between the controller and the second valve, and wherein the first and second couplings are different.

119. A valve assembly according to Claim 109 further comprising:

a tube wherein the valve housing is mounted to a first end of the tube so that the second valve chamber is in fluid communication with an interior of the tube;

a piston in the tube defining a cavity between the piston and the valve housing; and

an end cap on a second end of the tube.

120. A valve assembly according to Claim 119 wherein the valve housing provides an end cap sealing the first end of the tube.

121. A valve assembly according to Claim 119 wherein the valve housing comprises a rigid valve housing wherein the first and second valves are in the rigid valve housing and wherein the rigid valve housing is mounted directly to the tube.

122. A method of forming a valve assembly, the method comprising:  
forming a housing defining first, second, and third chambers, the first and second chambers being separated by a first valve enclosure for a valve chip, and the second and third chambers being separated by a second valve enclosure for a valve chip, wherein chambers and valve enclosures are open at an open end of the housing;  
after forming the housing, inserting a valve chip in one of the valve enclosures wherein the valve chip includes a substrate having a hole therein and a moveable valve member configured to open and close the valve hole, with opposite sides of the valve chip being exposed to chambers on opposite sides of the valve enclosure; and  
after inserting the valve chip, securing a base to the open end of the housing thereby closing the chambers and the valve enclosures.

123. A method according to Claim 122 wherein the moveable valve member comprises a flexible valve flap.

124. A method according to Claim 122 wherein the housing further defines fourth and fifth chambers, the third and fourth chambers being separated by a third valve enclosure for a valve chip, and the fourth and fifth chambers being separated by a fourth valve enclosure for a valve chip.

125. A method according to Claim 124 wherein inserting a valve chip comprises inserting a first valve chip in the first valve enclosure, inserting a second valve chip in the second valve enclosure, inserting a third valve chip in the third valve enclosure, and inserting a fourth valve chip in the fourth valve enclosure.

126. A method according to Claim 124 further comprising:  
before securing the base, inserting a sealing plug in a another of the valve enclosures so that chambers on opposite sides of the plug are sealed from one another.

127. A method according to Claim 124 wherein the housing includes a first output port providing fluid communication from the second chamber through the housing and a second output port providing fluid communication from the fourth chamber through the housing, wherein the base includes a first exhaust port providing fluid communication from the first chamber through the base, a supply port providing

fluid communication from the third chamber through the base, and a second exhaust port providing fluid communication from the fifth chamber through the base.

128. A method according to Claim 122 wherein the housing includes conductive leads therein providing electrical coupling from the valve chip to outside the housing.

129. A method according to Claim 122 wherein forming the housing comprises molding the housing and providing the leads as inserts while molding the housing.

130. A method of operating a valve assembly including a housing having a first chamber coupled to a low pressure exhaust port, a second chamber coupled to an actuator port, and a third chamber coupled to a high pressure supply port, the valve assembly further including a first valve between the first and second chambers and a second valve between the second and third chambers, the method comprising:

providing a first condition so that fluid communication is allowed from the second chamber to the first chamber and so that fluid communication is substantially blocked between the second and third chambers;

providing a second condition so that fluid communication is allowed from the second chamber to the third chamber and so that fluid communication is substantially blocked between the first and second chambers;

while providing each of the first and second conditions, monitoring an external power source;

upon detecting an interruption of the external power source while providing the first condition, maintaining the first condition during the interruption of the external power source; and

upon detecting an interruption of the external power source while providing the second condition, maintaining the second condition during the interruption of the external power source.



131. A method according to Claim 130 wherein maintaining the first condition during interruption of the external power source comprises maintaining the first condition using a back-up power source, and wherein maintaining the second




condition during interruption of the external power source comprises maintaining the second condition using the back-up power source.

132. A method according to Claim 131 wherein the back-up power source comprises a battery.

133. A method according to Claim 120 wherein the valve assembly further includes a fourth chamber coupled to a second actuator port, a fifth chamber coupled to a low pressure exhaust port, a third valve between the third and fourth chambers, wherein providing the first condition further includes allowing fluid communication from the third chamber to the fourth chamber and substantially blocking fluid communication between the fourth and fifth chambers, and wherein providing the second condition further comprises allowing fluid communication from the fourth chamber to the fifth chamber and substantially blocking fluid communication between the third and fourth chambers.

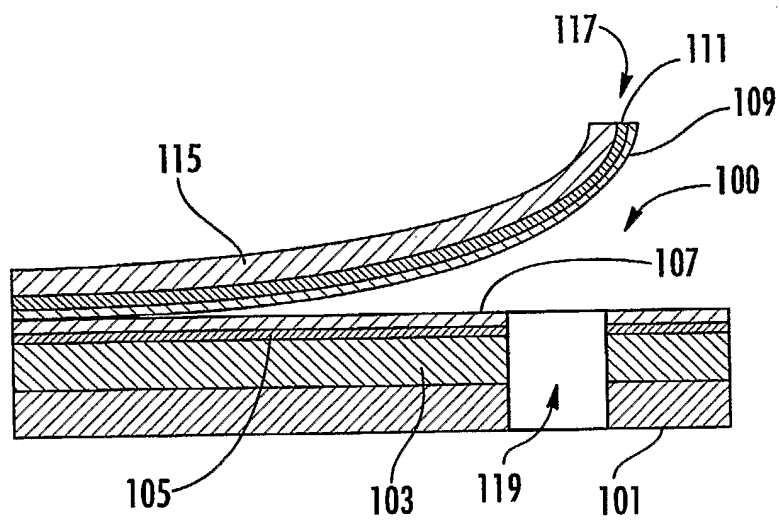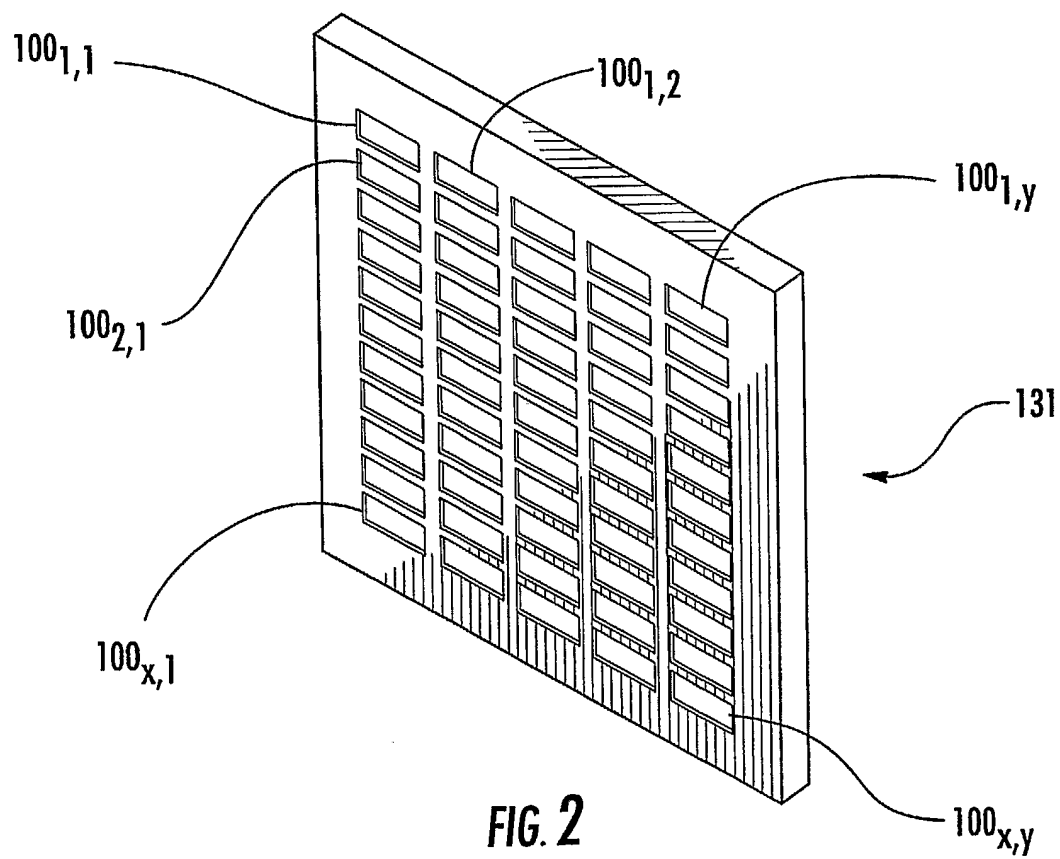**FIG. 1****FIG. 2**

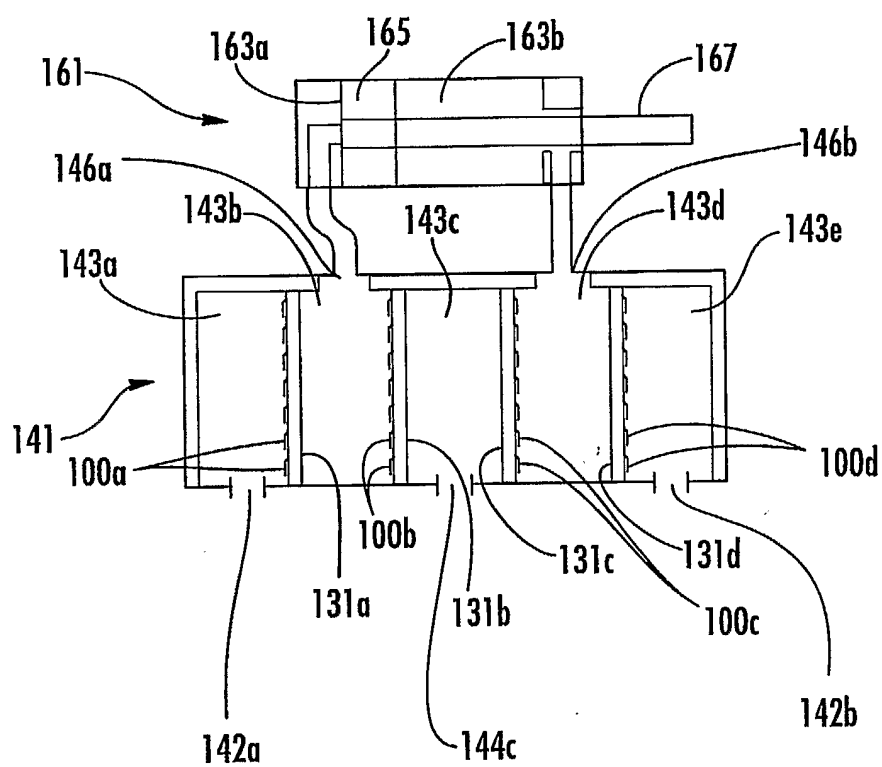**FIG. 3**

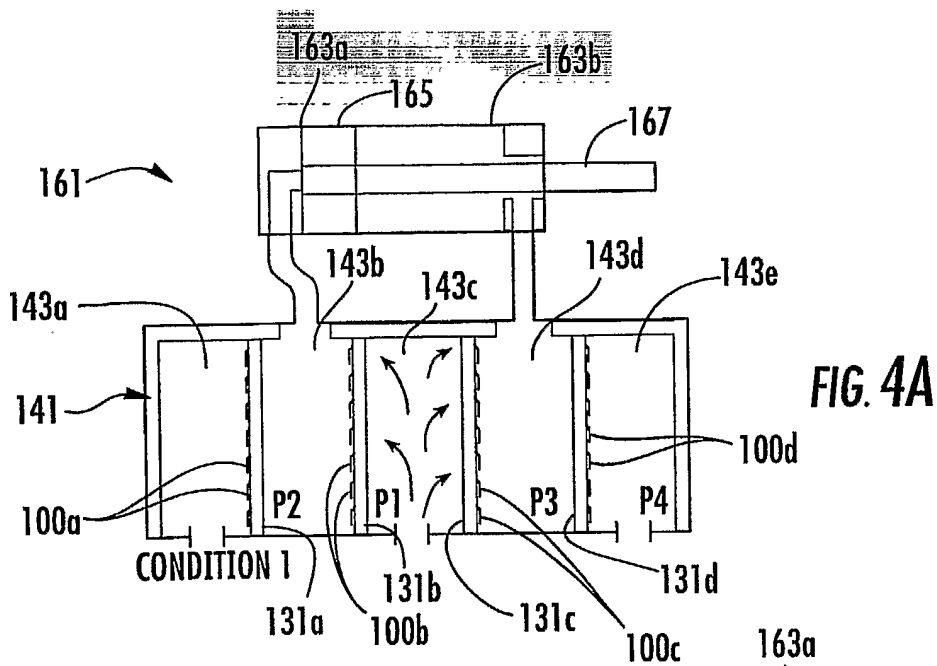


FIG. 4B

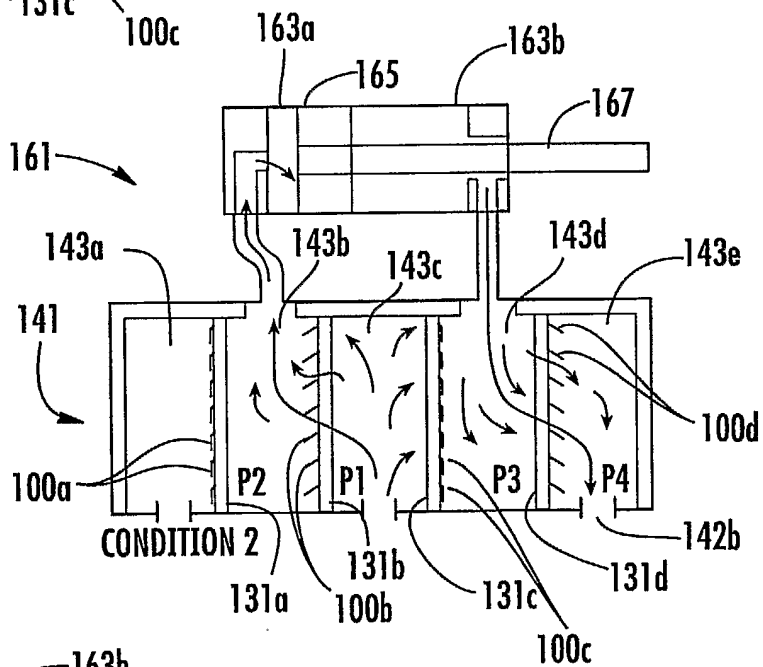


FIG. 4C

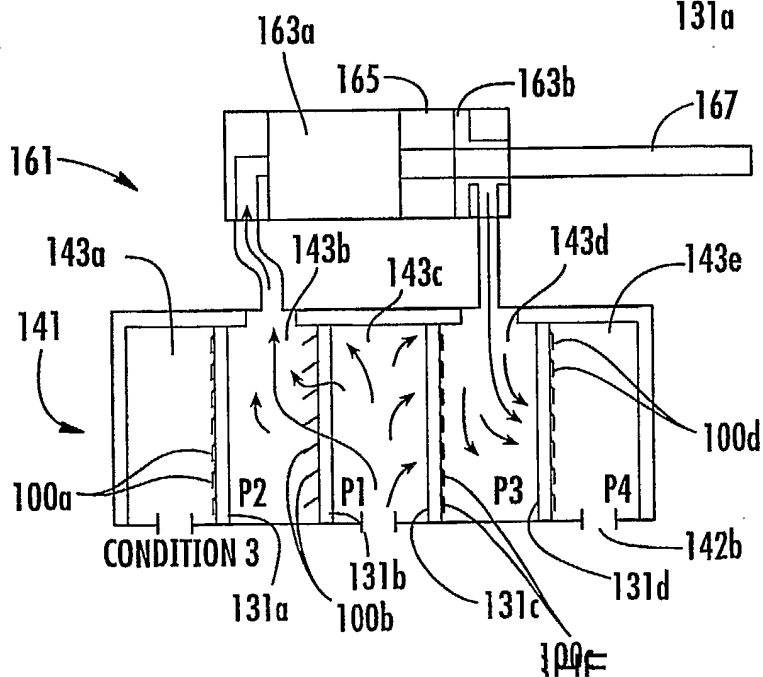


FIG. 4D

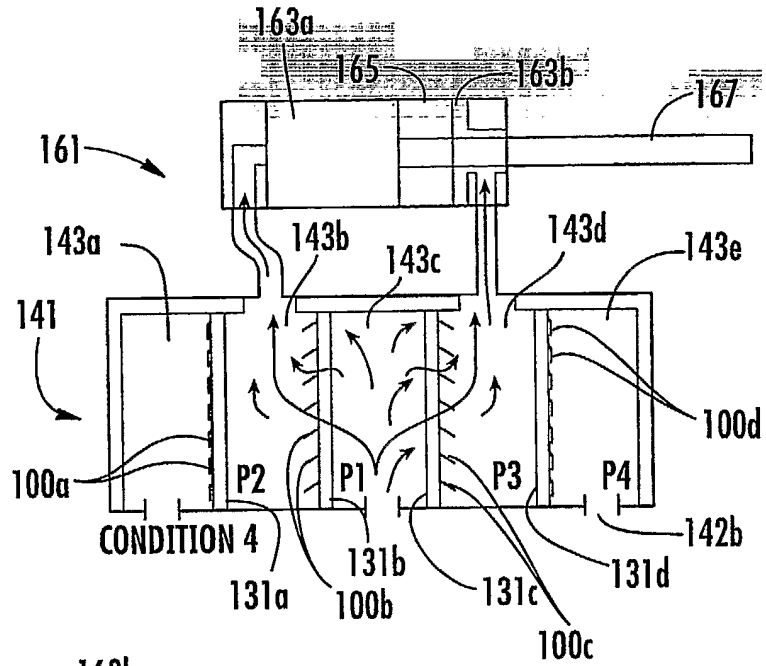


FIG. 4E





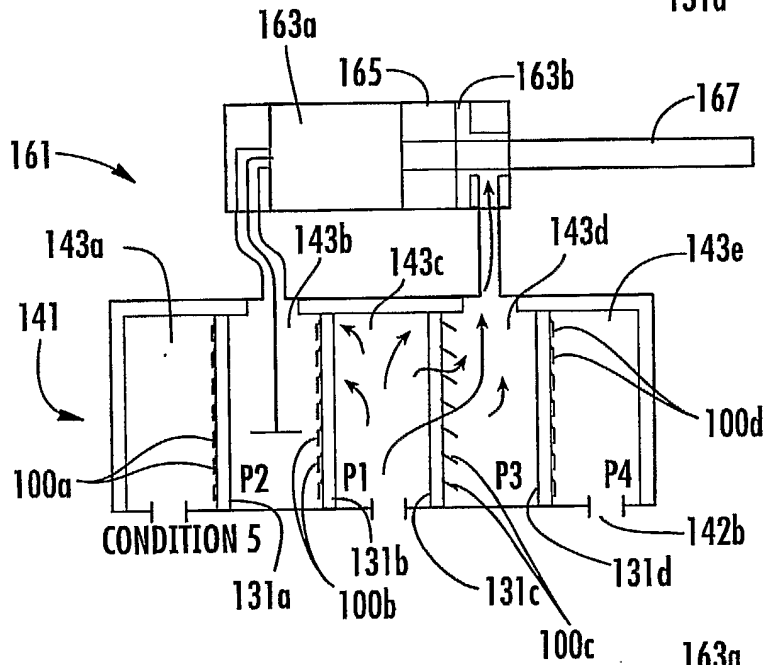



FIG. 4F

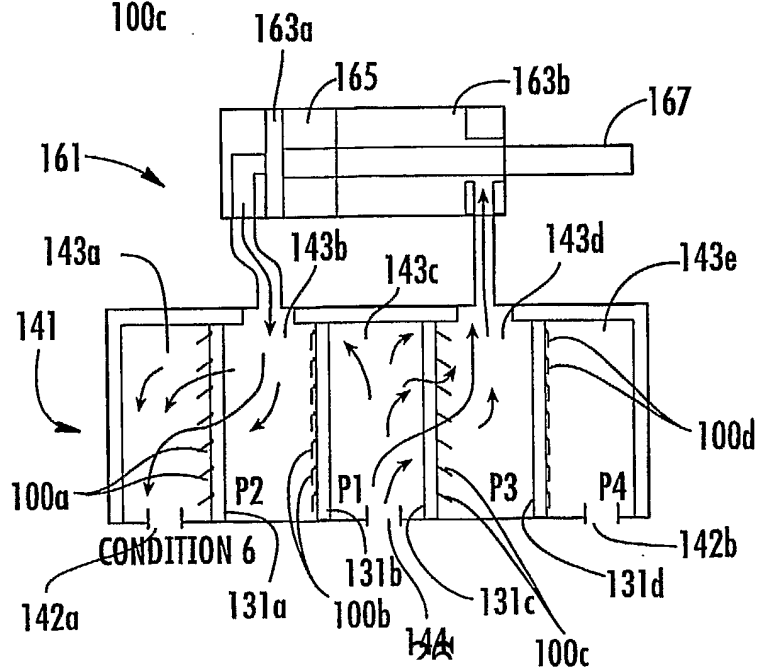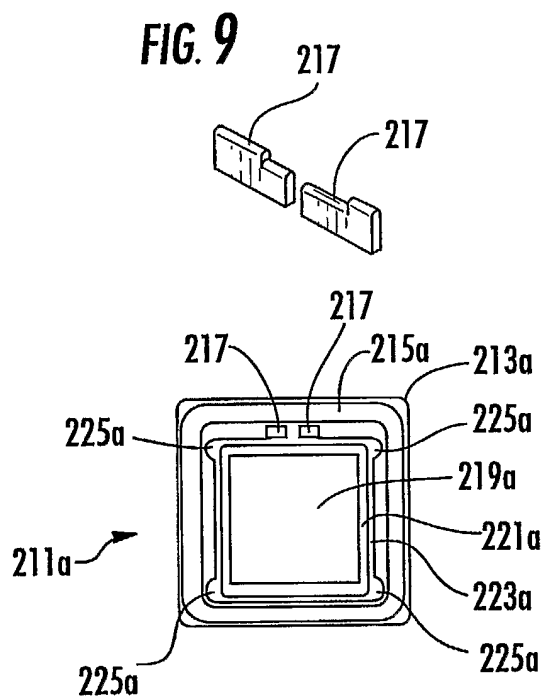


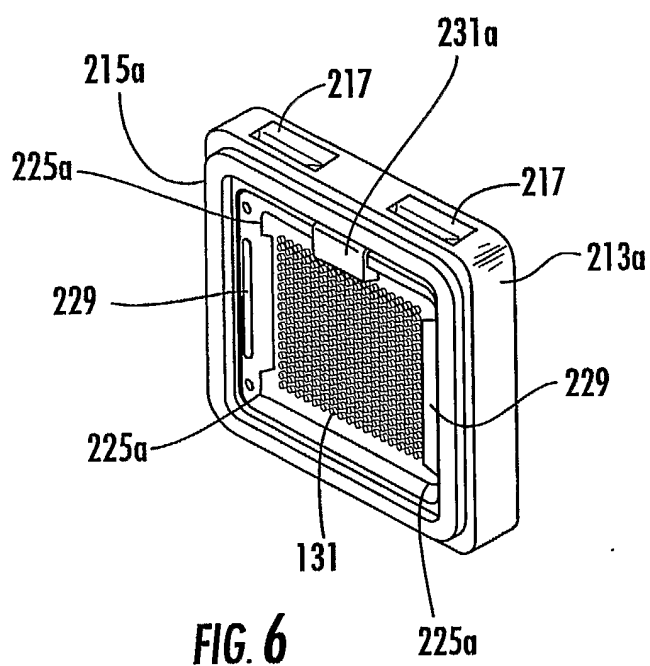


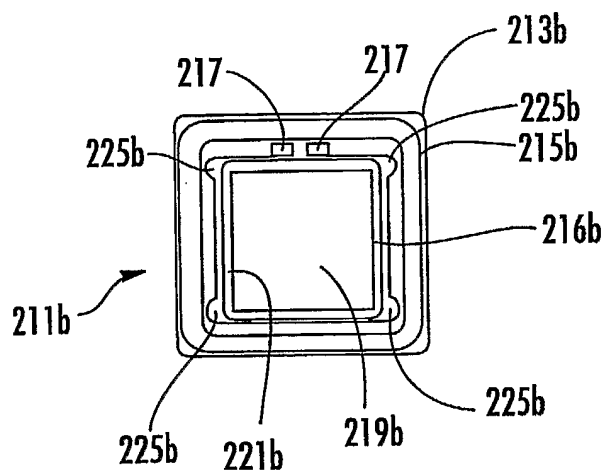



**FIG. 7**

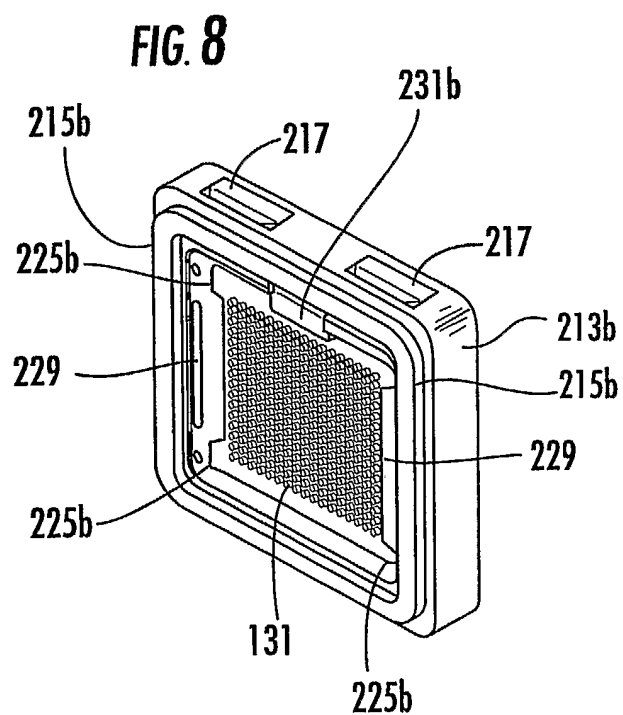

**FIG. 8**

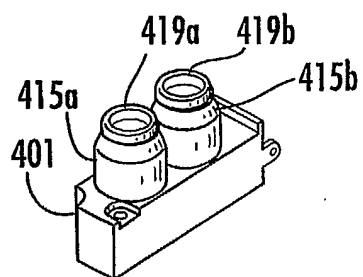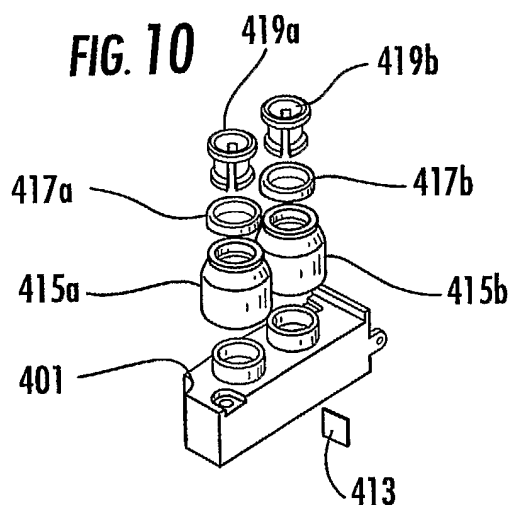


**FIG. 12**

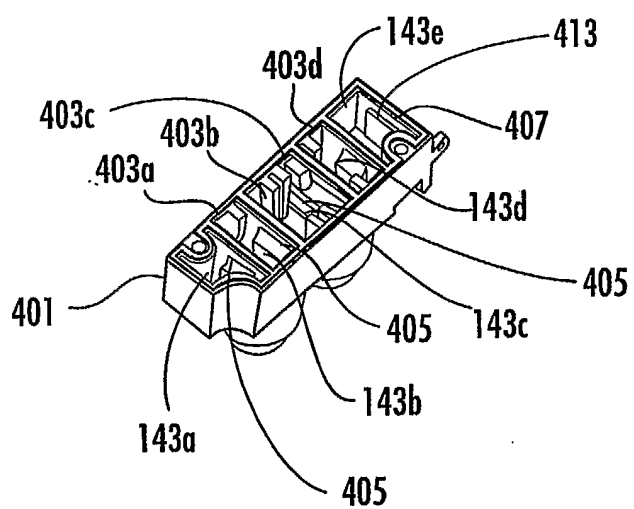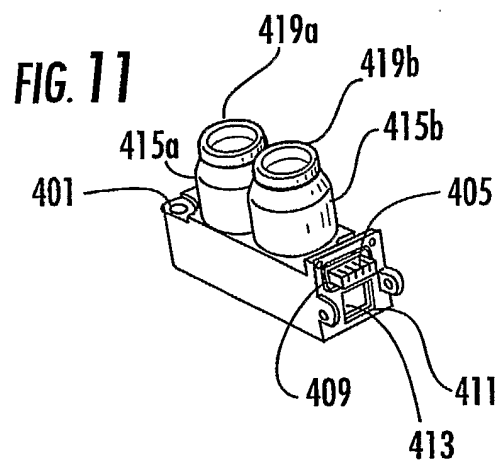


**FIG. 13**




**FIG. 14**

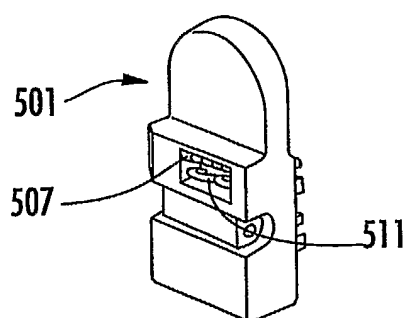


**FIG. 15**

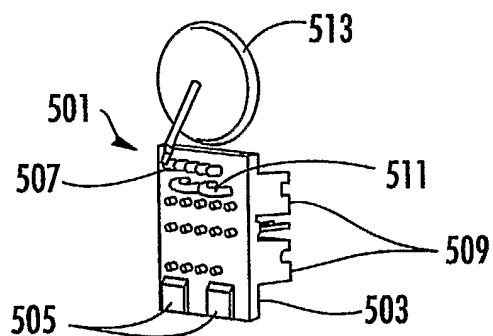






**FIG. 16**

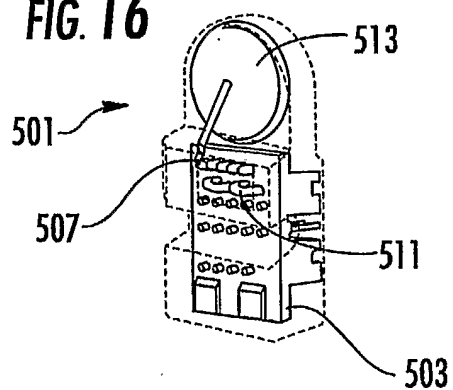


**FIG. 17**

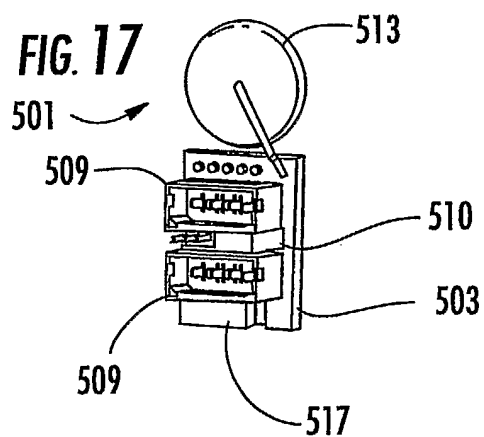


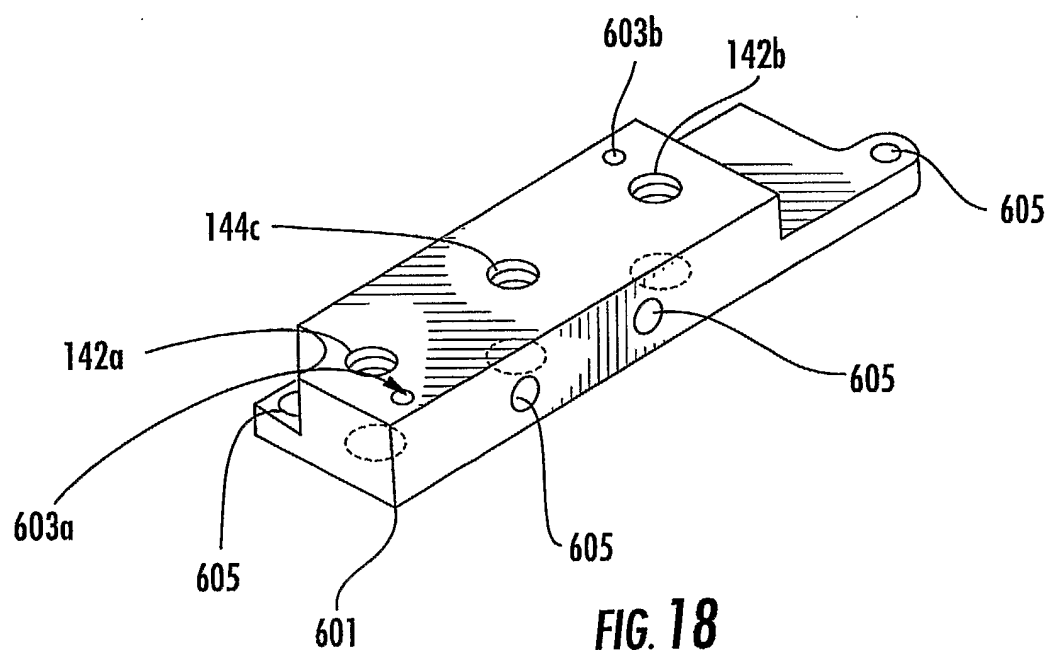

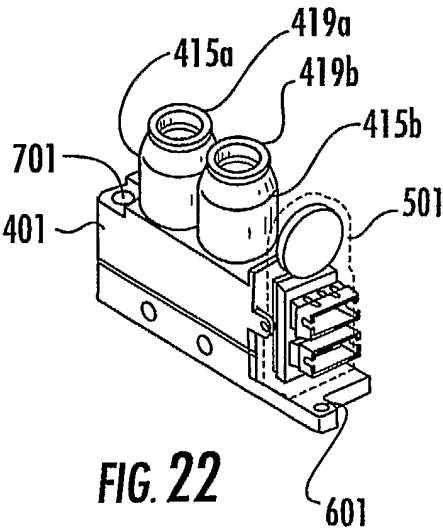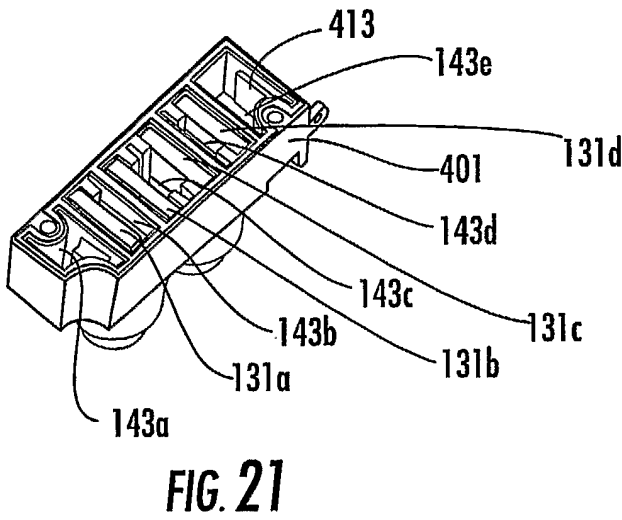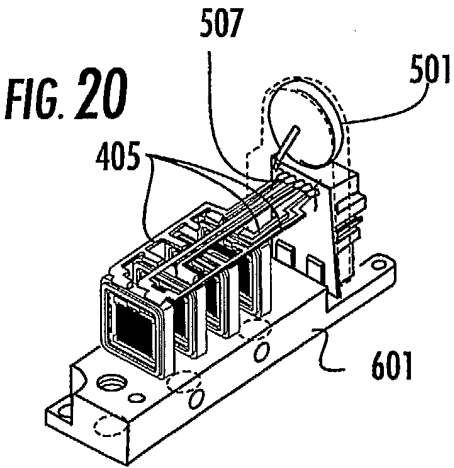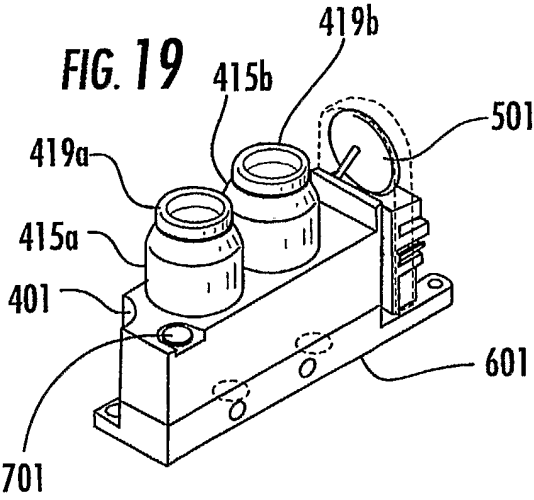






**FIG. 23**

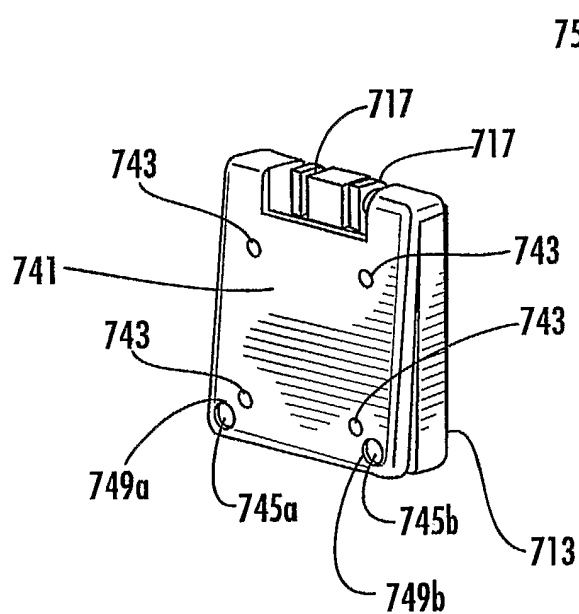


**FIG. 24**

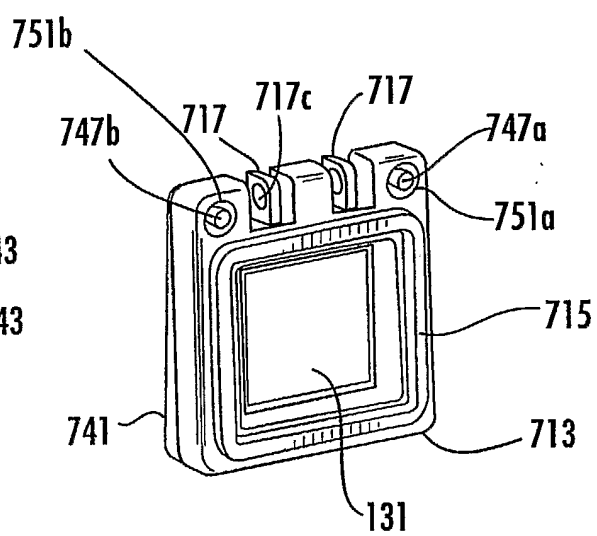


**FIG. 25**

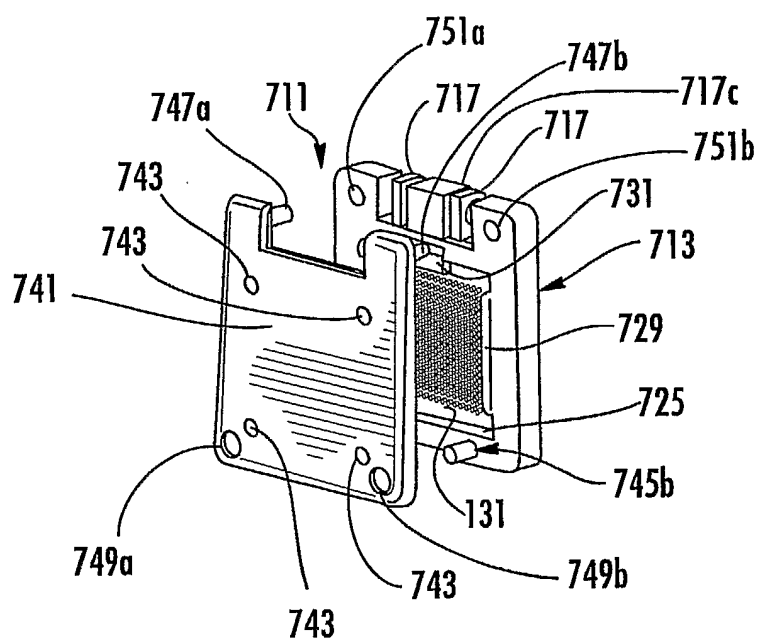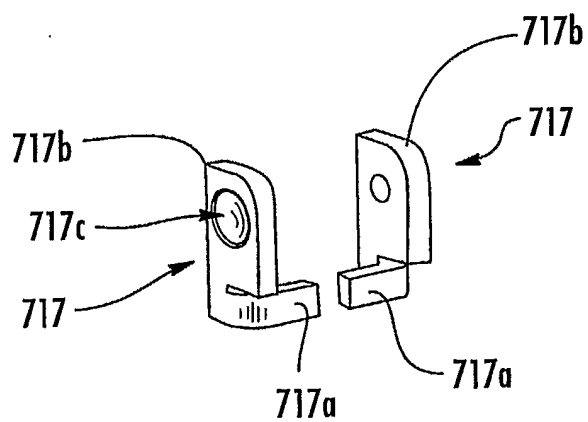
**FIG. 26****FIG. 27**

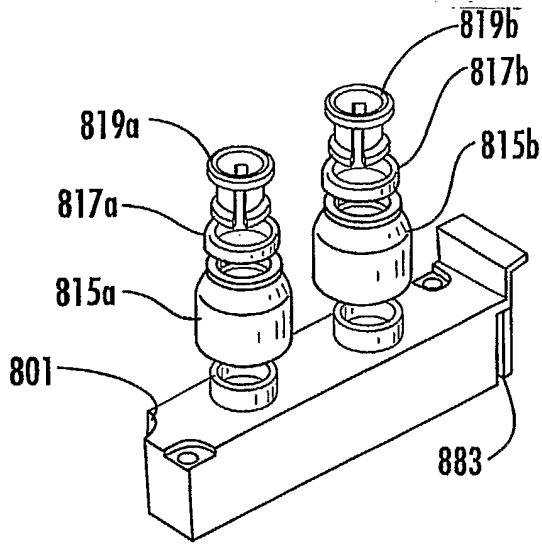


**FIG. 28**

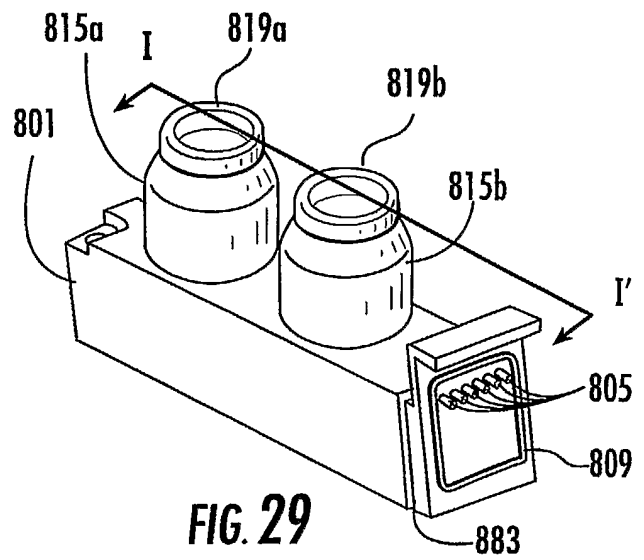


**FIG. 29**

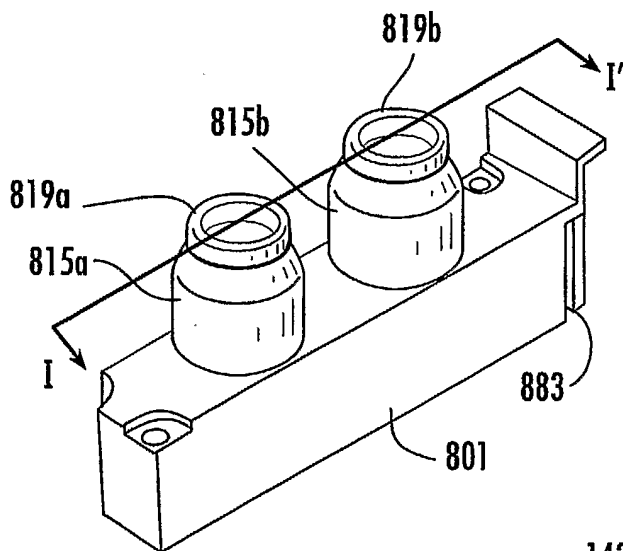

**FIG. 30**

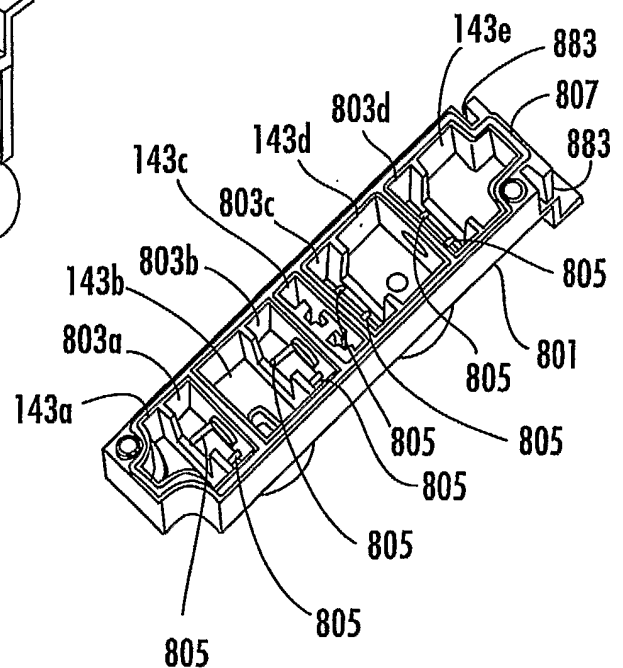

**FIG. 31**

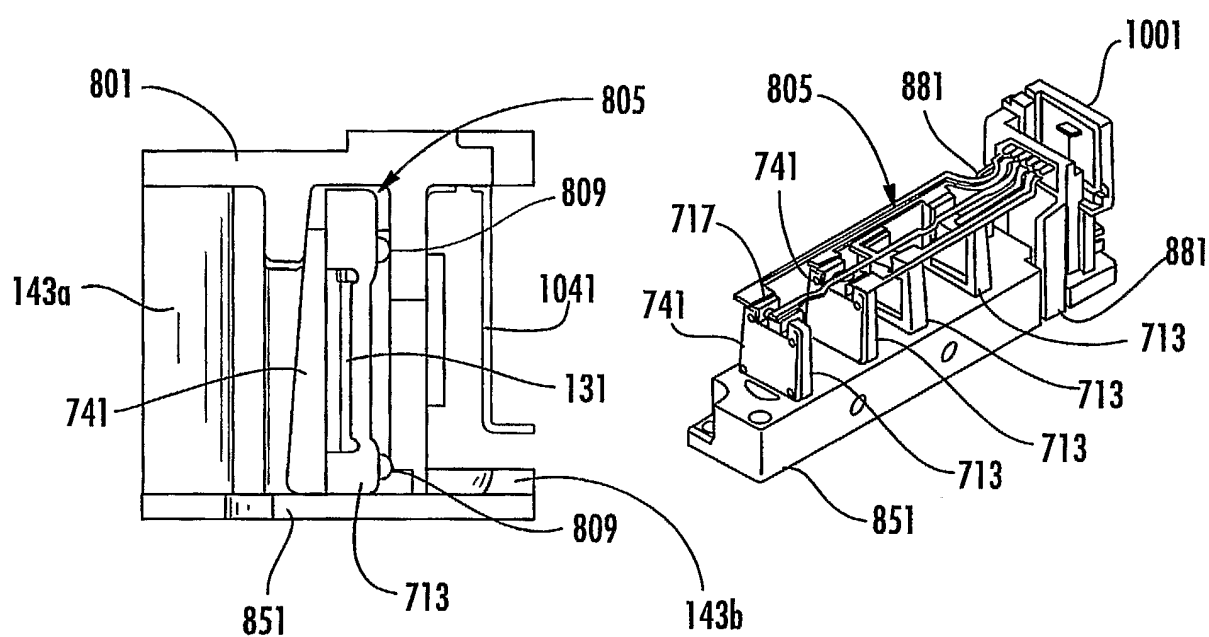

**FIG. 32**

**FIG. 33**



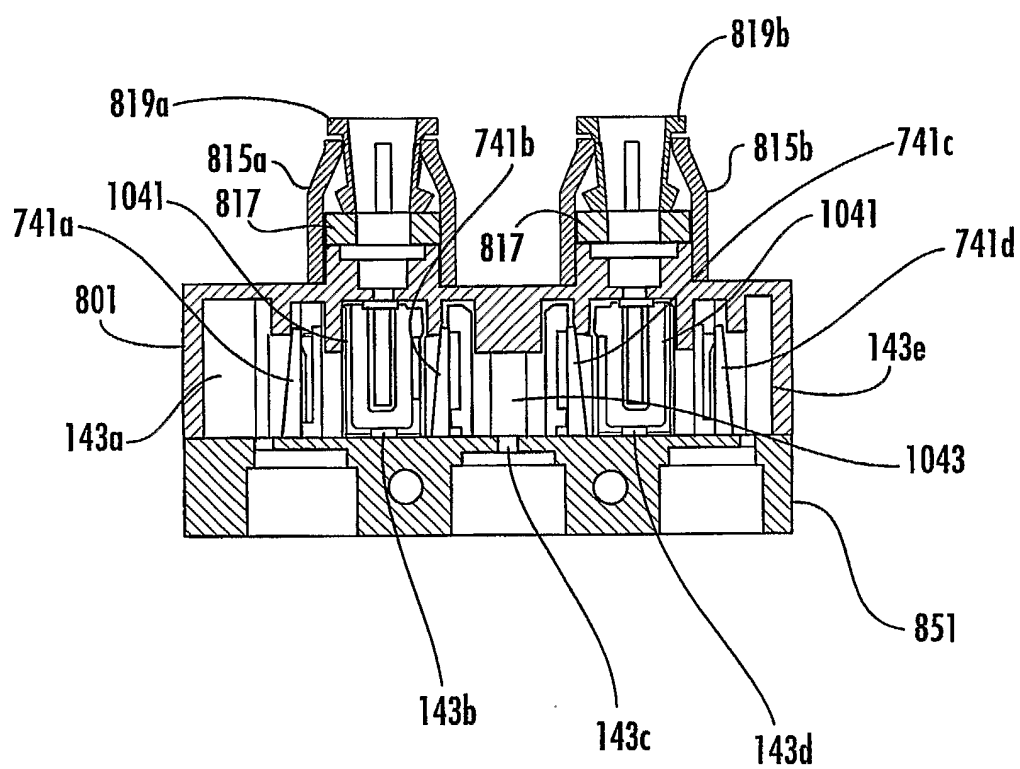
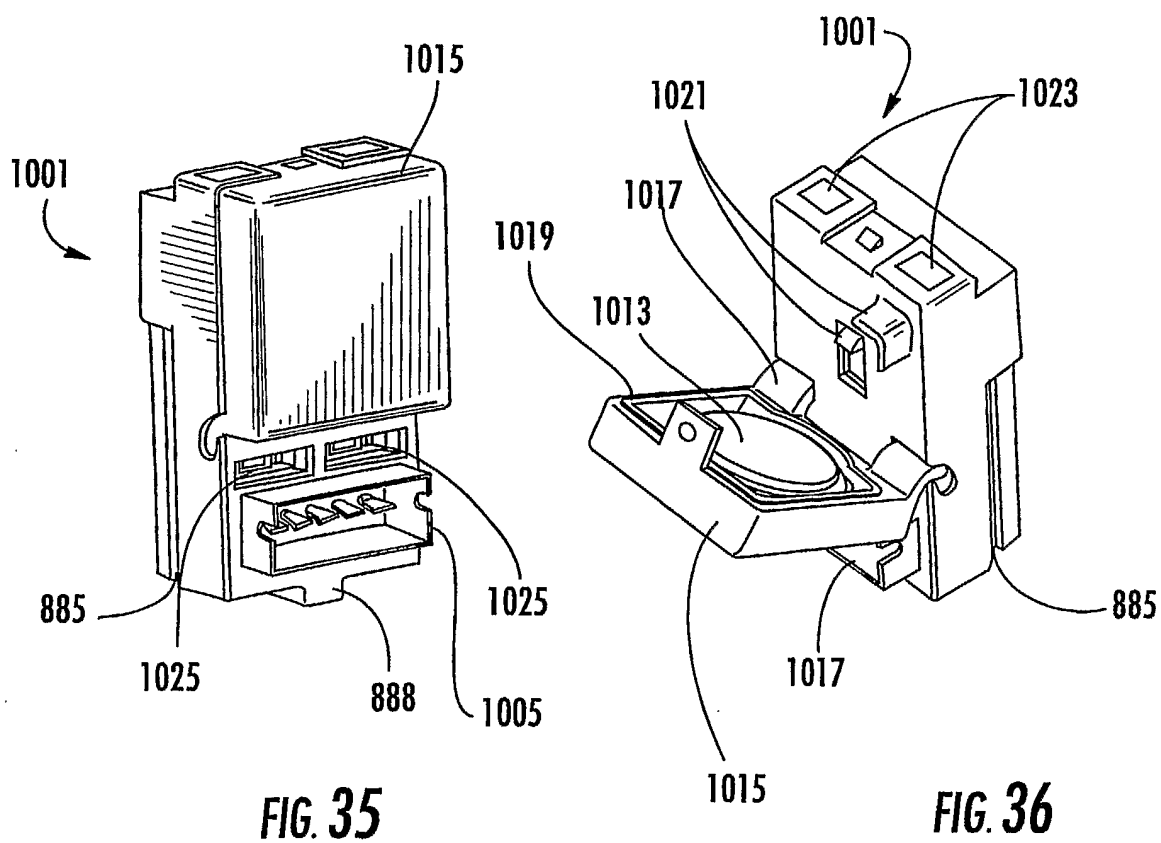
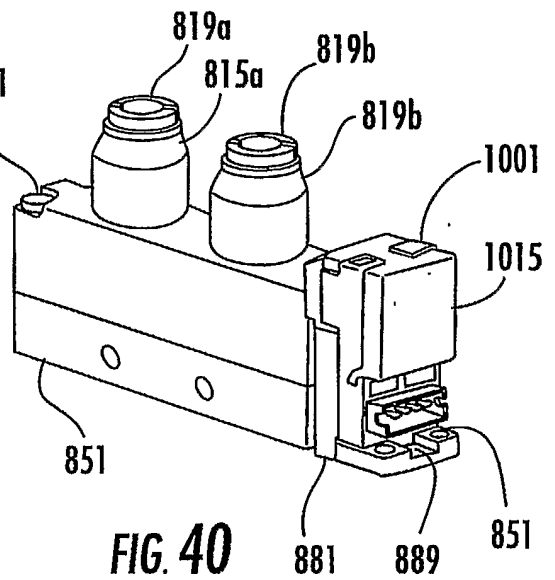
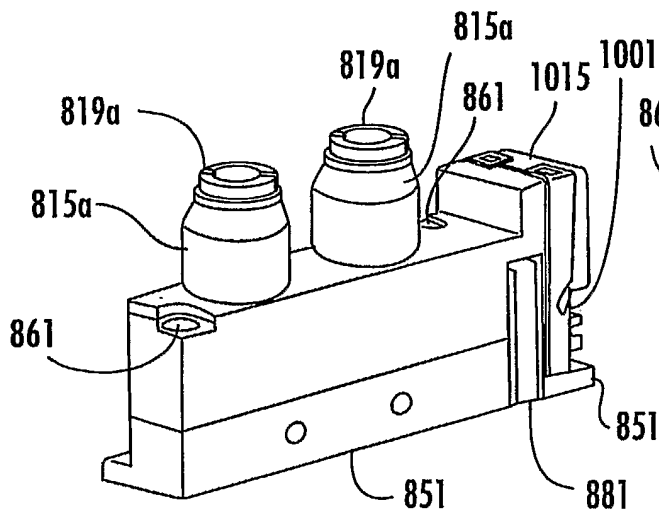
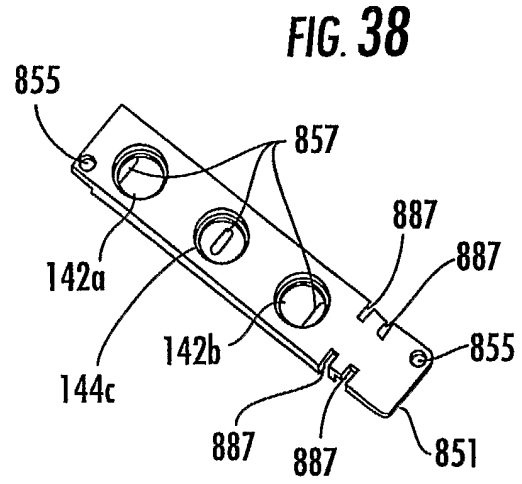
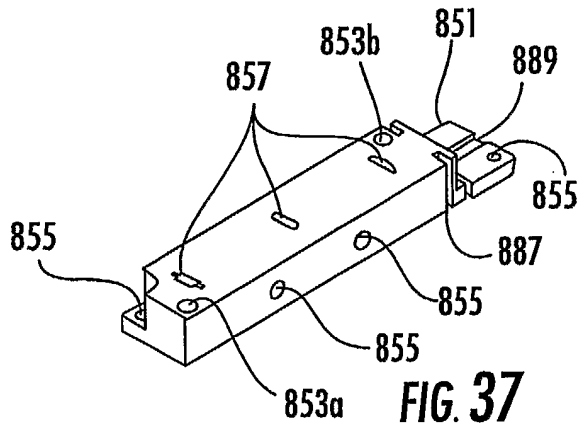


FIG. 34





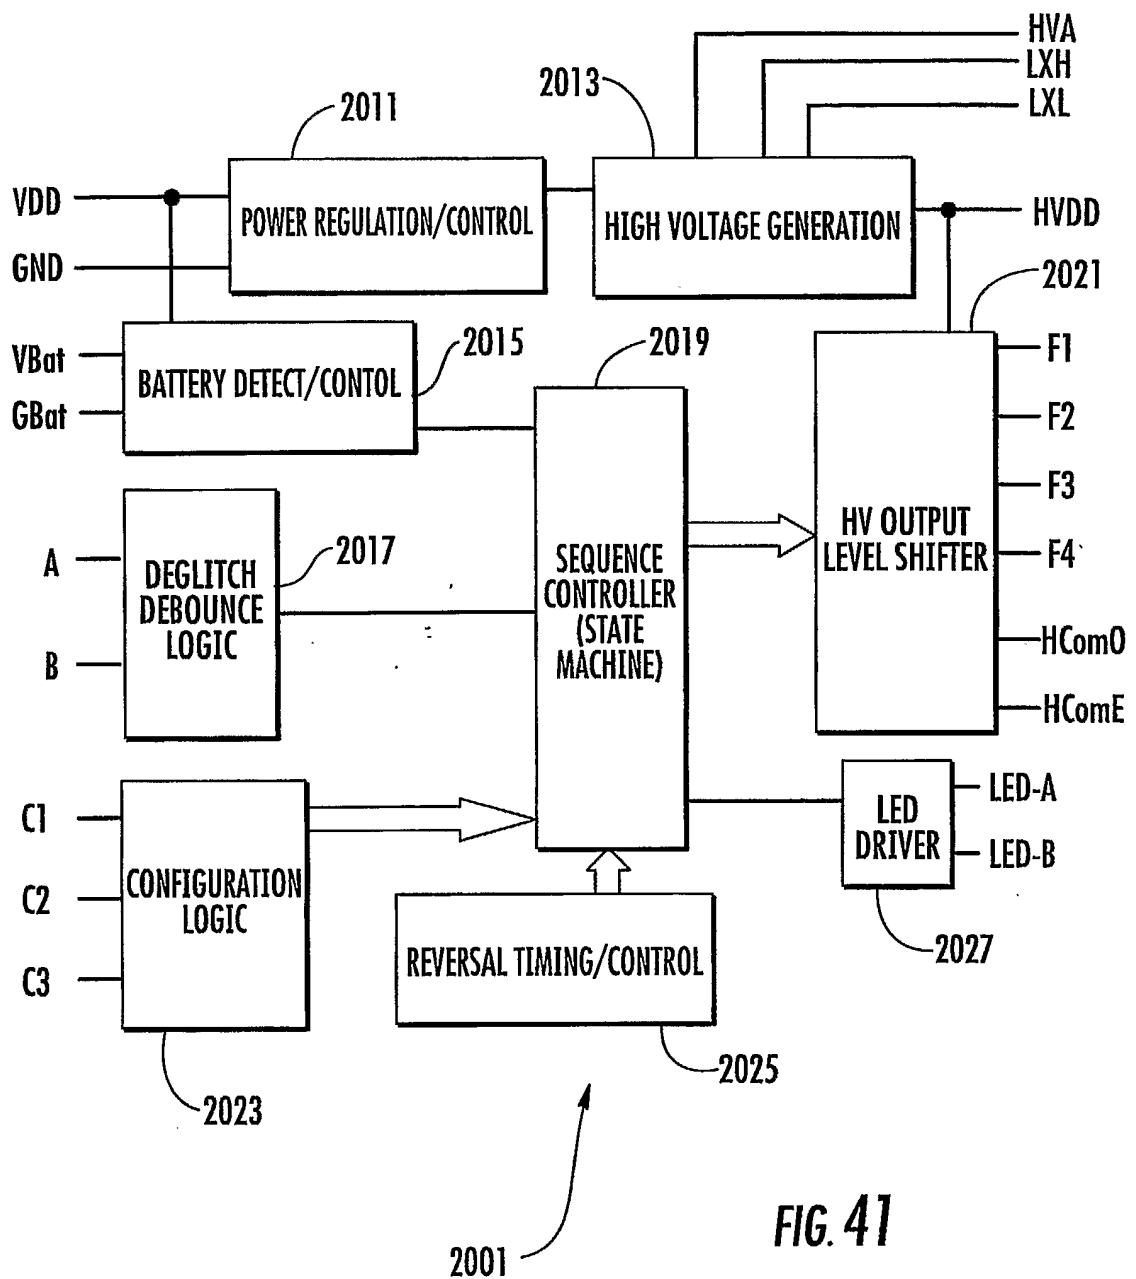


FIG. 41

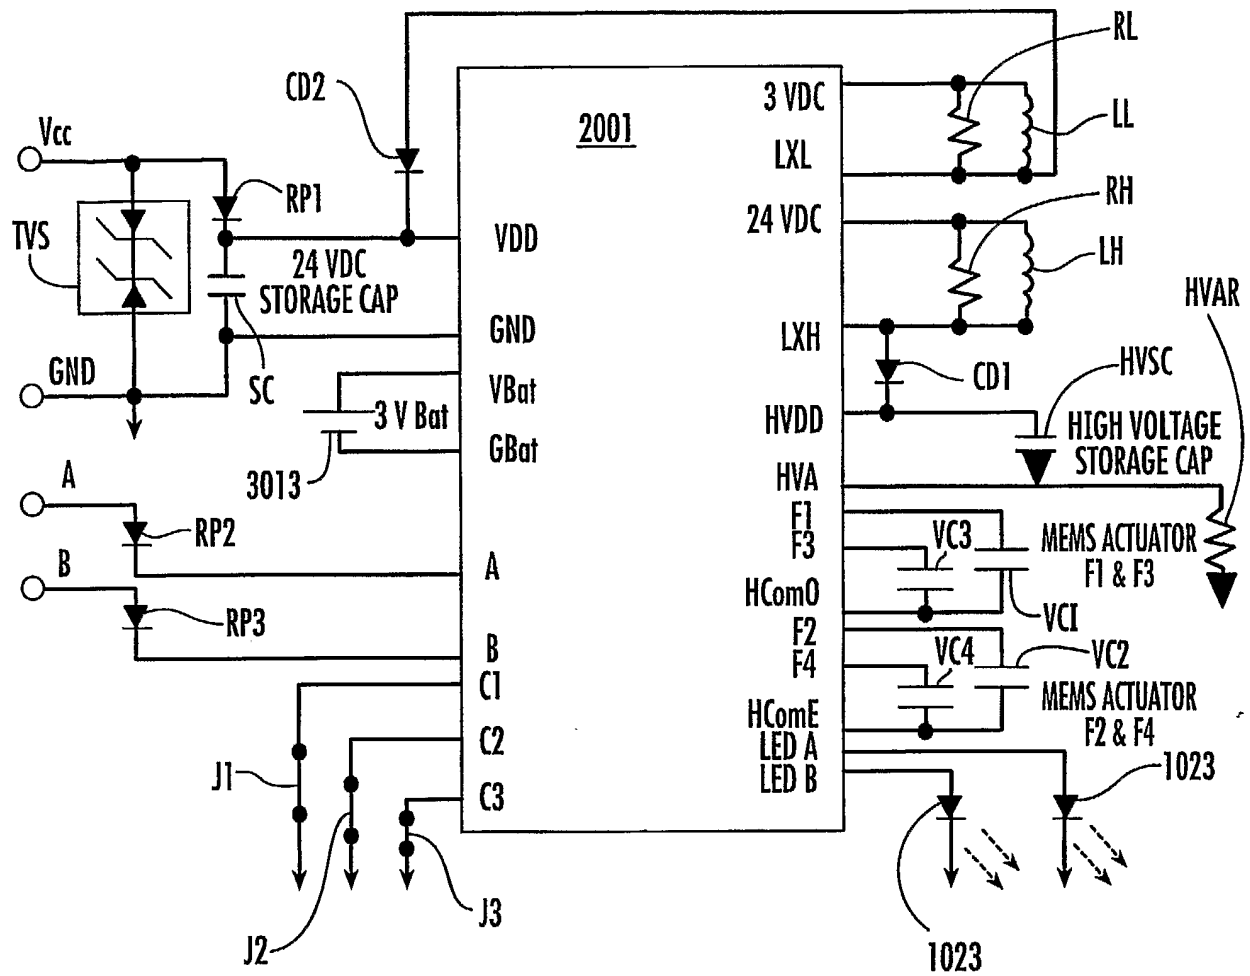


FIG. 42

LOGIC RELATIONSHIP BETWEEN INPUTS AND OUTPUTS											
CONFIGURATION DECIPTION	CONFIGURATION SELECTION			INPUT SIGNALS		HIGH VOLTAGE OUTPUTS (F)				LED OUTPUT	
	C1	C2	C3	A	B	1	2	3	4	A	B
5 WAY 3 POS - CYL PORTS EXHAUSTED	0	0	X	0	0	0	1	1	0	1	1
	0	0	X	0	1	0	1	0	1	0	1
	0	0	X	1	0	1	0	1	0	1	0
	0	0	X	1	1	0	1	1	0	1	1
ON POWER LOSS - GO TO 00 STATE	0	0	0	X	X	0	1	1	0	0	0
ON POWER LOSS - HOLD STATE	0	0	1	X	X	HOLD POSITION				0	0
5 WAY 3 POS - ALL PORTS BLOCKED	0	1	X	0	0	1	1	1	1	1	1
	0	1	X	0	1	0	1	0	1	0	1
	0	1	X	1	0	1	0	1	0	1	0
	0	1	X	1	1	1	1	1	1	1	1
ON POWER LOSS - GO TO 00 STATE	0	1	0	X	X	1	1	1	1	0	0
ON POWER LOSS - HOLD STATE	0	1	1	X	X	HOLD POSITION				0	0
5 WAY 3 POS - CYL PORTS ENEGIZED	1	0	X	0	0	1	0	0	1	1	1
	1	0	X	0	1	0	1	0	1	0	1
	1	0	X	1	0	1	0	1	0	1	0
	1	0	X	1	1	1	0	0	1	1	1
ON POWER LOSS - GO TO 00 STATE	1	0	0	X	X	1	0	0	1	0	0
ON POWER LOSS - HOLD STATE	1	0	1	X	X	HOLD POSITION				0	0
5 WAY 2 POSITION	1	1	X	X	0	0	1	0	1	1	1
	1	1	X	X	1	1	0	1	0	0	1
ON POWER LOSS - GO TO 0 STATE	1	1	0	X	X	0	1	0	1	0	0
ON POWER LOSS - HOLD STATE	1	1	1	X	X	HOLD POSITION				0	0

FIG. 43

SEQUENCE TO TRAVERSE FROM ONE STATE TO ANOTHER		
FROM	TO	TRANSITION SEQUENCE
0101	1010	1101,1001,1011,1010
1010	0101	1011,1001,1101,0101
0101	1111	1101,1111
1111	0101	1101,0101
0101	0110	0111,0110
0110	0101	0111,0101
0101	1001	1101,1001
1001	0101	1101,0101
1010	1111	1011,1111
1111	1010	1011,1010
1010	0110	1011,1111,0111,0110
0110	1010	1110,1010
1010	1001	1110,1001
1001	1010	1011,1010
POLARITY REVERSAL		TRANSITION SEQUENCE
0101		1101,1001,1011,1 $\bar{0}$ 1 $\bar{0}$ ,1011,1001,1101,0101
1010		1011,1001,1101, $\bar{0}$ 1 $\bar{0}$ 1,1101,1001,1011,1010
1111		1101, $\bar{0}$ 1 $\bar{0}$ 1,1101,1001,1011,1 $\bar{0}$ 1 $\bar{0}$ ,1011,1111
0110		0111, $\bar{0}$ 1 $\bar{0}$ 1,1101,1001,1011,1 $\bar{0}$ 1 $\bar{0}$ ,1011,1111,0111,0110
1001		1101, $\bar{0}$ 1 $\bar{0}$ 1,1101,1001,1011,1 $\bar{0}$ 1 $\bar{0}$ ,1011,1001

FIG. 44

PIN DEFINITIONS	
PINS	DESCRIPTION
VDD	NOMINAL 24V POWER SUPPLY SIGNAL/PIN.
GND	GROUND / POWER SUPPLY RETURN SIGNAL/PIN.
VBAT	POSITIVE BATTERY SUPPLY SIGNAL/PIN. FOR EXAMPLE, A 3V LITHIUM BATTERY MAY BE USED TO MAINTAIN CHARGE ON THE FOUR OUTPUT PINS WHEN VDD FAILS.
GBAT	NEGATIVE BATTERY RETURN SIGNAL/PIN. MAY BE BENEFICIAL FOR COMPLETELY SWITCHING OUT BATTERY FOR NORMAL OPERATION SO THAT NO DRAIN OCCURS WHEN VDD IS ACTIVE.
C1,C2,C3	CONFIGURATION SELECT SIGNAL/PINS. THE PINS MAY BE JUMPERED OR HARDWIRED AT TIME OF ASSEMBLY TO GND (FOR A "0") OR LEFT FLOATING (FOR A "1"). WITH THREE CONFIGURATION SELECTION SIGNAL/PINS, ONE OF 8 DEVICE CONFIGURATIONS MAY BE SELECTED TO PROVIDE FUNCTIONALITY OF A PARTICULAR MECHANICAL DEVICE. THE DIFFERENT CONFIGURATIONS MAY PROVIDE DIFFERENT OPERATIONS DURING POWER LOSS AND/OR WHEN INPUT CONTROL SIGNALS A AND B ARE EQUAL. THE POWER SUPPLY SIGNAL VDD MAY BE USED TO PULL ANY FLOATING CONFIGURATIONS SELECT SIGNALS UP DURING NORMAL OPERATIONS, THE CONFIGURATION SELECT SIGNALS MAY BE LATCHED DURING LOSS OF THE POWER SUPPLY SIGNAL VDD SO THAT LIMITED BATTERY POWER IS NOT CONSUMED PULLING UP CONFIGURATIONS SELECT SIGNALS DURING POWER LOW.
A,B	INPUT CONTROL SIGNAL/PINS. A CURSORY INSPECTION OF THE TABLE 1 REVEALS THAT OUTPUTS F1 AND F3 ESSENTIALLY REFLECT INPUT A, LIKEWISE FOR F2 AND F4 WITH RESPECT TO INPUT B. THESE TWO INPUTS REQUIRE CIRCUITRY TO PREVENT SWITCHING DUE TO SPURIOUS ARTIFACTS ( $I_{sup}$ )
F1, F2, F3, F4	HIGH VOLTAGE OUTPUT SIGNALS/PINS. EACH HV OUTPUT SIGNAL MAY DRIVE A FULLY ACTUATED CAPACITANCE OF APPROXIMATELY 2nF. FOR A SWITCHING SPEED OF 100 $\mu$ s (microseconds), A PEAK CURRENT OF APPROXIMATELY 4 ma ( $2nF * 200V/100\mu s$ ) MAY BE REQUIRED. A MAXIMUM LEAKAGE FOR EACH OF THE VALVE CHIPS MAY BE APPROXIMATELY 10 pA WITH A 200 VOLT ELECTRICAL POTENTIAL APPLIED THERETO.
HComO, HComE	HIGH VOLTAGE COMMON ODD AND EVEN SIGNALS/PINS. VOLTAGES OF HV OUTPUT SIGNALS/PINS F1 AND F3 ARE APPLIED WITH RESPECT TO THE HComO COMMON SIGNAL/PIN. VOLTAGES OF HV OUTPUT SIGNALS/PINS F2 AND F4 ARE APPLIED WITH RESPECT TO THE HComE SIGNAL/PIN. BECAUSE THE VALVE CHIPS ARE ELECTROSTATICALLY ACTUATED, ACTUATION IS ACHIEVED BY PROVIDING A DIFFERENCE IN VOLTAGE POTENTIAL, BUT THE POLARITY OF THE DIFFERENCE DOES NOT MATTER. THIS TRAIT MAY BE USED TO REDUCE CHARGE BUILD-UP. BY PERIODICALLY REVERSING THE DIRECTION/POLARITY OF THE VOLTAGE DIFFERENCE BETWEEN THE HIGH VOLTAGE OUTPUTS AND THE COMMON SIGNALS/PINS, EFFECTS DUE TO CHARGE BUILD UP MAY BE REDUCED. PROVIDING TWO DIFFERENT COMMON SIGNALS/PINS MAY SIMPLIFY A SEQUENCING OPERATION USED TO REVERSE POLARITY.

FIG. 45A



<b>HVDD</b>	HIGH VOLTAGE SUPPLY SIGNAL/PIN. THE HV SUPPLY SIGNAL/PIN MAY PROVIDE THE HIGH VOLTAGE POTENTIAL THAT IS SWITCHED TO THE HV OUTPUT SIGNALS/PINS F1-F4. A RELATIVELY LARGE, HIGH VOLTAGE, EXTERNAL STORAGE CAPACITOR MAY BE COUPLED TO THE ASIC 2001 ON THIS SIGNAL/PIN FOR THE REGULATION AND ENERGY STORAGE. COMBINATIONS OF ON-CHIP AND/OR EXTERNAL CIRCUITRY MAY BE PROVIDED TO LOCALLY GENERATE THIS THE HIGH VOLTAGE SUPPLY SIGNAL FROM VDD AND/OR VBat.
<b>LXH</b>	INDUCTOR SWITCH HIGH SIGNAL/PIN. A SIMPLE YET EFFECTIVE METHOD OF GENERATING. THE HIGH VOLTAGE SUPPLY SIGNAL HVDD MAY BE GENERATED FROM A LOW VOLTAGE SUPPLY BY SWITCHING CURRENT THROUGH AN INDUCTOR AT A CONTROLLED DUTY CYCLE. THE LXH SIGNAL/PIN MAY PROVIDE APPROPRIATE SWITCHING CHARACTERISTICS GENERATE AN APPROXIMATELY 200 V HVDD SIGNAL USING AN APPROXIMATELY 24 V VDD SIGNAL.
<b>LXL</b>	INDUCTOR SWITCH LOW SIGNAL/PIN. A SEPARATE CIRCUIT MAY BE USED TO GENERATE THE HIGH VOLTAGE SUPPLY SIGNAL HVDD FROM A 3V BATTERY, AND THE LXL SIGNAL/PIN MAY PROVIDE APPROPRIATE SWITCHING CHARACTERISTICS. THE HIGH VOLTAGE GENERATION CIRCUIT 2013 MAY BOOST THE V BATTERY SIGNAL VBAT TO 24V WHICH IS FED BACK TO THE VDD SIGNAL/PIN, AND THE HIGH VOLTAGE GENERATION CIRCUIT CAN THEN CONVERT THE 24 V SIGNAL TO THE 200 V HVDD SIGNAL AS DISCUSSED ABOVE WITH REGARD TO THE LDH SIGNAL/PIN.
<b>HVA</b>	HIGH VOLTAGE ADJUST SIGNAL/PIN. A RESISTOR HVAR COUPLED TO THE HVA SIGNAL/PIN MAY SET A VOLTAGE LEVEL AT WHICH THE HIGH VOLTAGE GENERATION CIRCUIT 2013 CEASES BOOSTING. A VOLTAGE OF THE HV SUPPLY SIGNAL/PIN HVDD MAY THUS BE ADJUSTED, FOR EXAMPLE, IN THE RANGE OF APPROXIMATELY 50 VOLTS TO APPROXIMATELY 200 VOLTS. MOREOVER, A POWER DOWN MODE MAY BE PROVIDED FOR BATTERY MODE OPERATING DURING LOSS OF THE EXTERNAL POWER SUPPLY.
<b>LED-A, LED-B,</b>	LIGHT EMITTING DIODE SIGNALS/PINS. THE LIGHT EMITTING DIODE (LED) DRIVER CIRCUIT 2027 MAY GENERATE THE LED SIGNALS IN ACCORDANCE WITH LOGICAL OPERATIONS SHOWN IN TABLE 1. SHORT CIRCUIT PROTECTION MAY ALSO BE PROVIDED, AND THE LEDs MAY BE INACTIVE DURING LOSS OF PRIMARY EXTERNAL POWER. BOTH LED SIGNALS/PINS MAY BE CAPABLE OF SOURCING UP TO 30MA AT 2.2VDC.

**FIG. 45B**

SELECTED DESIGN PARAMETERS		
PARAMETER	SPEC	NOTES
VDD	24V +/- 10%	MAIN POWER SUPPLY SIGNAL. AT LEVELS BELOW THE SPECIFIED MINIMUM, POWER LOSS MAY BE DETECTED AND HV OUTPUTS SIGNALS F1-F4 MAY BE SWITCHED TO A POWER LOSS STATE
IDD	200MA	VDD CURRENT MAXIMUM. A RELATIVELY ARBITRARY LIMIT MAY BE USED TO INDICATE A NON-CRITICAL NATURE OF OVERALL POWER CONSUMPTION. WITH A LOWER WORST CASE CURRENT, LOWER THE OPERATING TEMPERATURE MAY BE PROVIDED, BETTER NOISE MARGINS MAY BE PROVIDED, HIGHER THE RELIABILITY MAY BE PROVIDED, ETC
I <sub>bat</sub>	1 TO 10 $\mu$ A TARGET	AVERAGE CURRENT FROM BATTERY DURING POWER LOSS MODES. UNDER NORMAL POWERED CONDITIONS, THERE MAY BE INSIGNIFICANT CURRENT DRAWN FROM THE BATTERY. IF THE AVERAGE BATTERY CURRENT EXCEEDS A TARGET VALUE, A LARGER BATTERY MAY NEED TO BE USED.
V <sub>il</sub>	-3 to +5 V	INPUT LOW VOLTAGE FOR C1, C2, C3, A AND B. BOARD LEVEL COMPONENTS MAY BE USED TO PROVIDE THAT THIS SPECIFICATION IS MET SO THAT THE INPUT DIODES TO SUBSTRATE ARE NOT FORWARD BIASED.
V <sub>ih</sub>	10 V to 30 V	INPUT HIGH VOLTAGE FOR A AND B. BOARD LEVEL COMPONENTS MAY BE USED TO PROVIDE THAT THIS SPECIFICATION IS MET SO THAT THE INPUT DIODES TO VDD ARE NOT FORWARD BIASED.
t <sub>rev</sub>	1 second to 1 hour	POLARITY REVERSAL TIME. A MAXIMUM LENGTH OF ELAPSED TIME TO WAIT IN AN OUTPUT STATE BEFORE A POLARITY REVERSAL OPERATION IS PERFORMED WHILE MAINTAINING THE SAME OUTPUT STATE MAY BE DETERMINED. THE POLARITY REVERSAL TIME MAY BE ON THE ORDER OF SECONDS OR POSSIBLY MINUTES
t <sub>del</sub>	1 ms to 1 second	TRANSITION DELAY TIME. A MINIMUM LENGTH OF ELAPSED TIME TO WAIT BEFORE SWITCHING TO A PARTICULAR OUTPUT STATE DURING OUTPUT STATE TRANSITIONS. THE TRANSITION DELAY TIME MAY BE ON THE ORDER OF MILLISECONDS.
t <sub>max</sub>	250Hz	MAXIMUM CYCLE FREQUENCY OF INPUTS. THE MAXIMUM CYCLE FREQUENCY MAY BE USED TO SET AN AVERAGE POWER TO BE GENERATED BY THE HIGH VOLTAGE GENERATION CIRCUIT DURING NORMAL OPERATION.
t <sub>sw</sub>	100 $\mu$ s	MAXIMUM SWITCH TIME. A TIME TO CHARGE AND DISCHARGE HIGH VOLTAGE OUTPUT SIGNALS F1-F4. THIS PARAMETER MAY ALSO DETERMINE A CURRENT CAPABILITY OF A FINAL STAGE


FIG. 46A

SUBSTITUTE SHEET (RULE 26)


$T_{SUP}$	$1\ \mu s$	MINIMUM TIME PRIMARY INPUTS MAY BE HELD CONSTANT BEFORE TRANSITION IS DETECTED. THIS PARAMETER MAY BE USED BY THE DEGLITCH/DEBOUNCE LOGIC CIRCUIT 2017 TO REDUCE GLITCHES FROM INPUT SIGNALS A AND B SO THAT FALSE SWITCHING OF THE HV OUTPUT SIGNALS F1-F4 MAY BE REDUCED
$T_{OP}$	$0-70^{\circ}C$	AMBIENT OPERATING TEMPERATURE

**FIG. 46B**

**FIG. 47A**

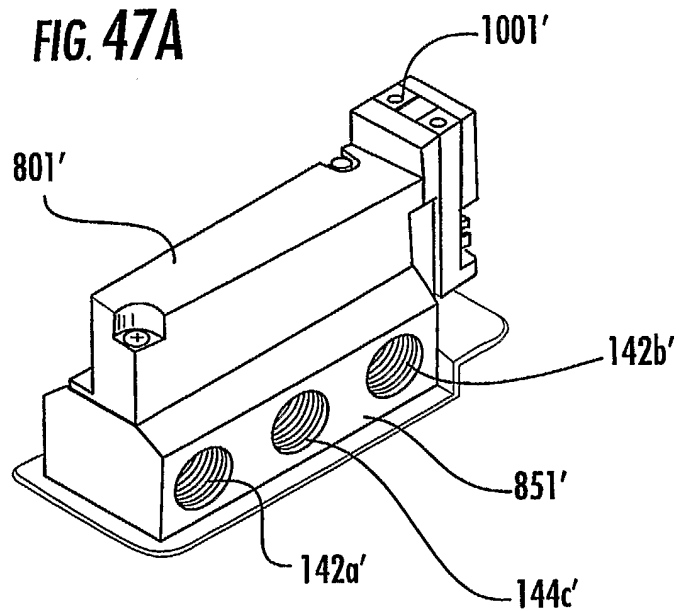

**FIG. 47B**

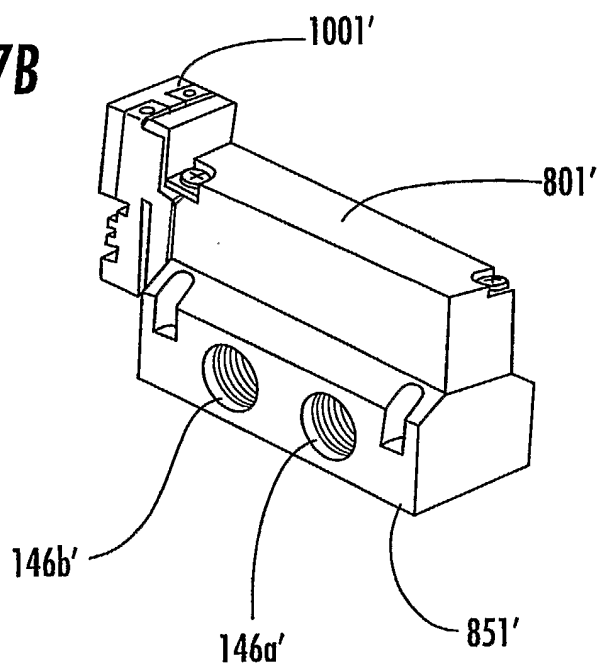

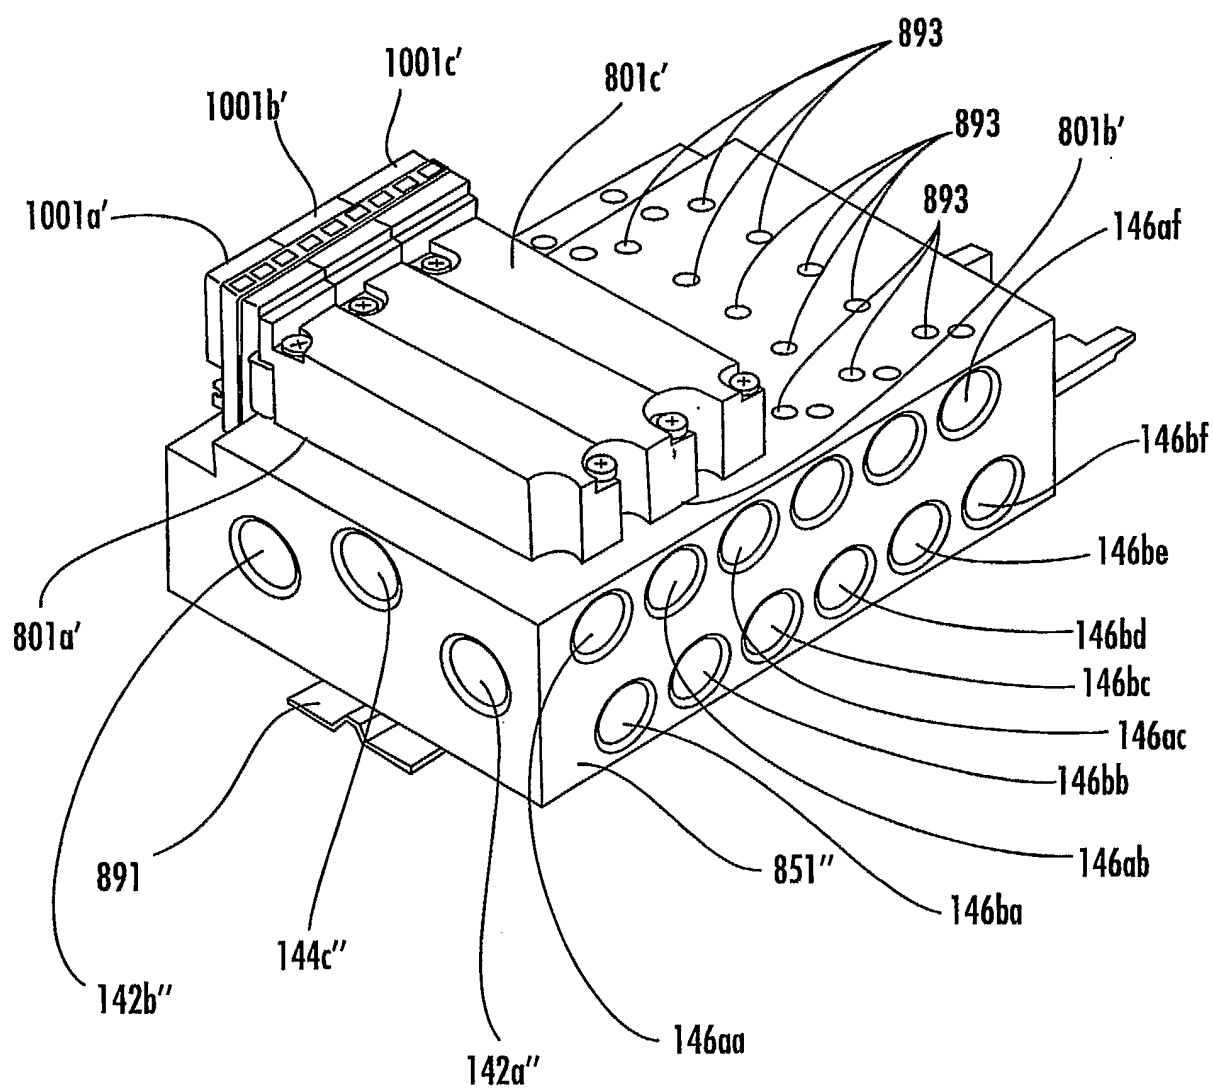
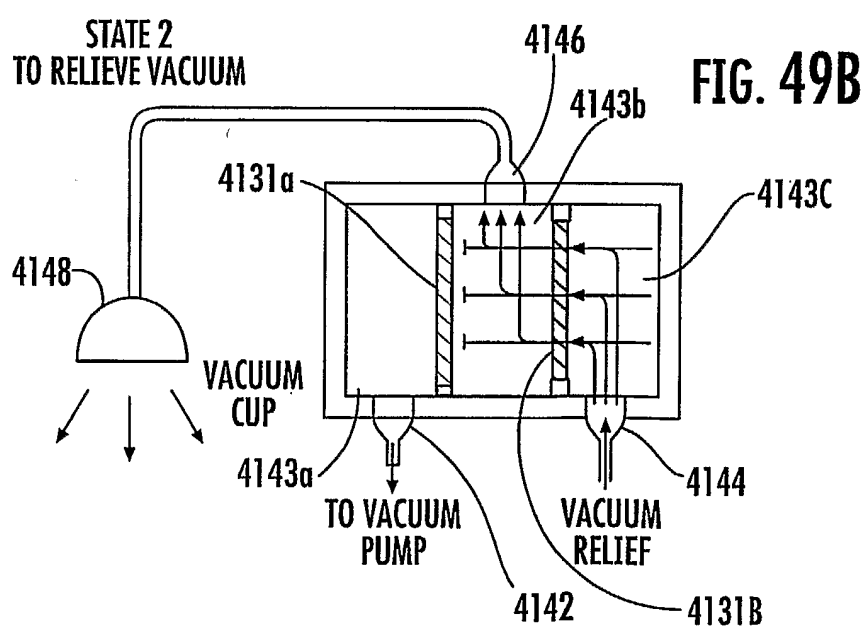
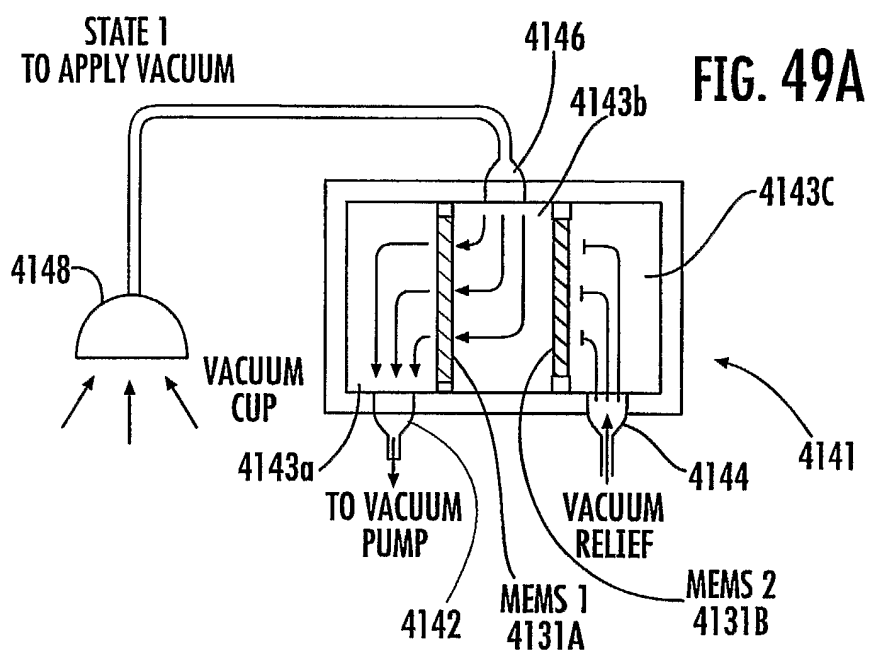


FIG. 48




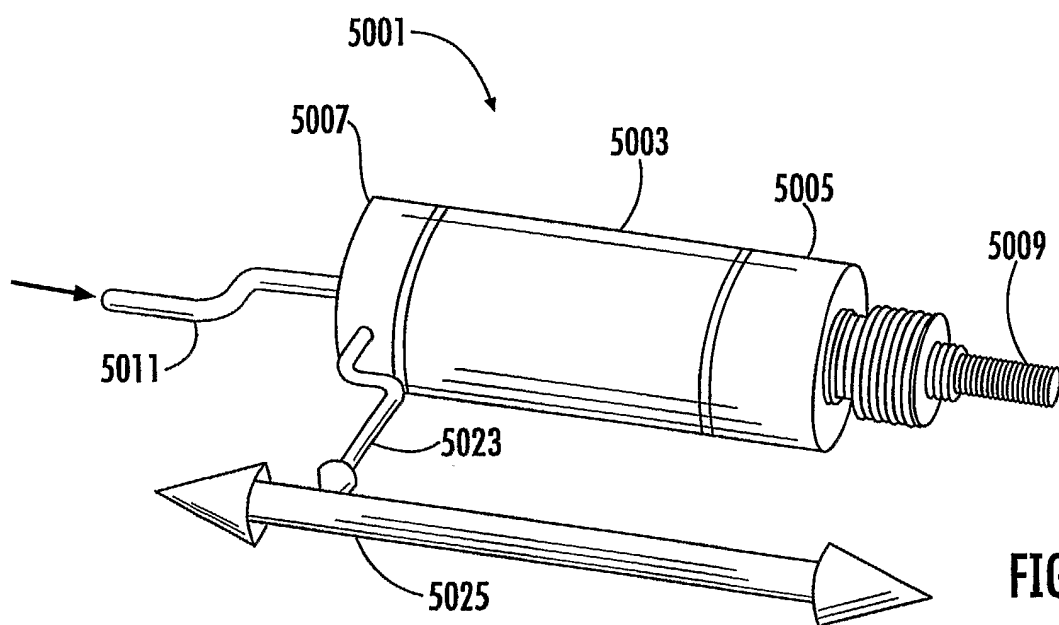


FIG. 50A



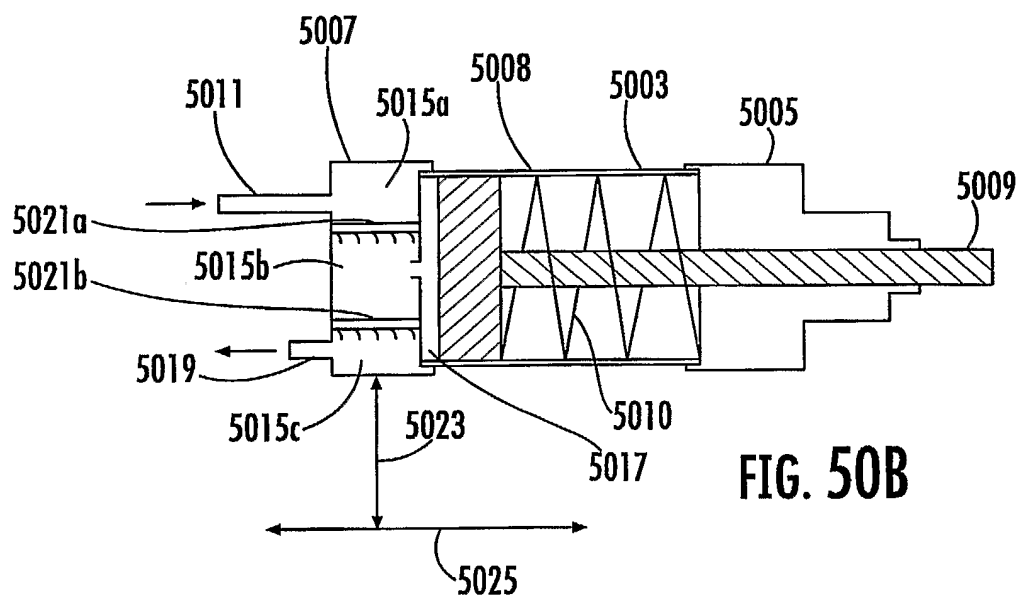

# INTERNATIONAL SEARCH REPORT

Inter Application No  
PCT/US2005/026030

## A. CLASSIFICATION OF SUBJECT MATTER F15B11/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
F15C F15B F16K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2003/106420 A1 (YOSHINO KAZUNORI) 12 June 2003 (2003-06-12)	1-7
A	paragraphs '0013! - '0015!; figures 1,2	8
X	US 2001/039968 A1 (DETTMANN HEINRICH) 15 November 2001 (2001-11-15)	1-7
	paragraphs '0031!, '0042!; figures 8,12	

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*&\* document member of the same patent family

Date of the actual completion of the international search

15 November 2005

Date of mailing of the international search report

24/11/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Krikorian, O

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

## Continuation of Box II.2

The present application contains 133 claims, of which 10 are independent. There is no clear distinction between the independent claims because of overlapping scope. There are so many claims, and they are drafted in such a way that the claims as a whole are not in compliance with the provisions of clarity and conciseness of Article 6 PCT, as it is particularly burdensome for a skilled person to establish the subject-matter for which protection is sought. The non-compliance with the substantive provisions is to such an extent, that the search was performed taking into consideration the non-compliance in determining the extent of the search (PCT Guidelines 9.19 and 9.25).

The search was based on the subject-matter that, as far as can be understood, could reasonably be expected to be claimed later in the procedure, and the corresponding claims, namely 1-23.

The applicant's attention is drawn to the fact that claims relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure. If the application proceeds into the regional phase before the EPO, the applicant is reminded that a search may be carried out during examination before the EPO (see EPO Guideline C-VI, 8.5), should the problems which led to the Article 17(2) declaration be overcome.

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US2005/026030

### Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:  
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

#### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter I Application No  
PCT/US2005/026030

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2003106420 A1	12-06-2003	DE 10250159 A1 JP 2003172314 A	18-06-2003 20-06-2003
US 2001039968 A1	15-11-2001	NONE	