



(86) Date de dépôt PCT/PCT Filing Date: 1996/02/28

(87) Date publication PCT/PCT Publication Date: 1996/09/06

(45) Date de délivrance/Issue Date: 2006/08/29

(85) Entrée phase nationale/National Entry: 1997/08/11

(86) N° demande PCT/PCT Application No.: CA 1996/000121

(87) N° publication PCT/PCT Publication No.: 1996/027226

(30) Priorité/Priority: 1995/02/28 (GB9503981.4)


(51) Cl.Int./Int.Cl. *H01L 21/265* (2006.01),
H01L 21/18 (2006.01), *H01L 21/266* (2006.01),
H01L 21/477 (2006.01), *H01L 33/00* (2006.01),
H01S 5/34 (2006.01), *H01S 5/026* (2006.01),
H01S 5/16 (2006.01), *H01S 5/20* (2006.01),
H01S 5/40 (2006.01)

(72) Inventeurs/Inventors:
POOLE, PHILIP J., CA;
CHARBONNEAU, SYLVAIN, CA;
AERS, GEOFFREY C., CA;
DAVIES, MICHAEL, CA;
KOTELES, EMIL S., CA

(73) Propriétaire/Owner:
NATIONAL RESEARCH COUNCIL OF CANADA, CA

(54) Titre : ACCORD PAR BANDE INTERDITE DE LA STRUCTURE A Puits DE SEMI-CONDUCTEUR

(54) Title: BANDGAP TUNING OF SEMICONDUCTOR WELL STRUCTURE

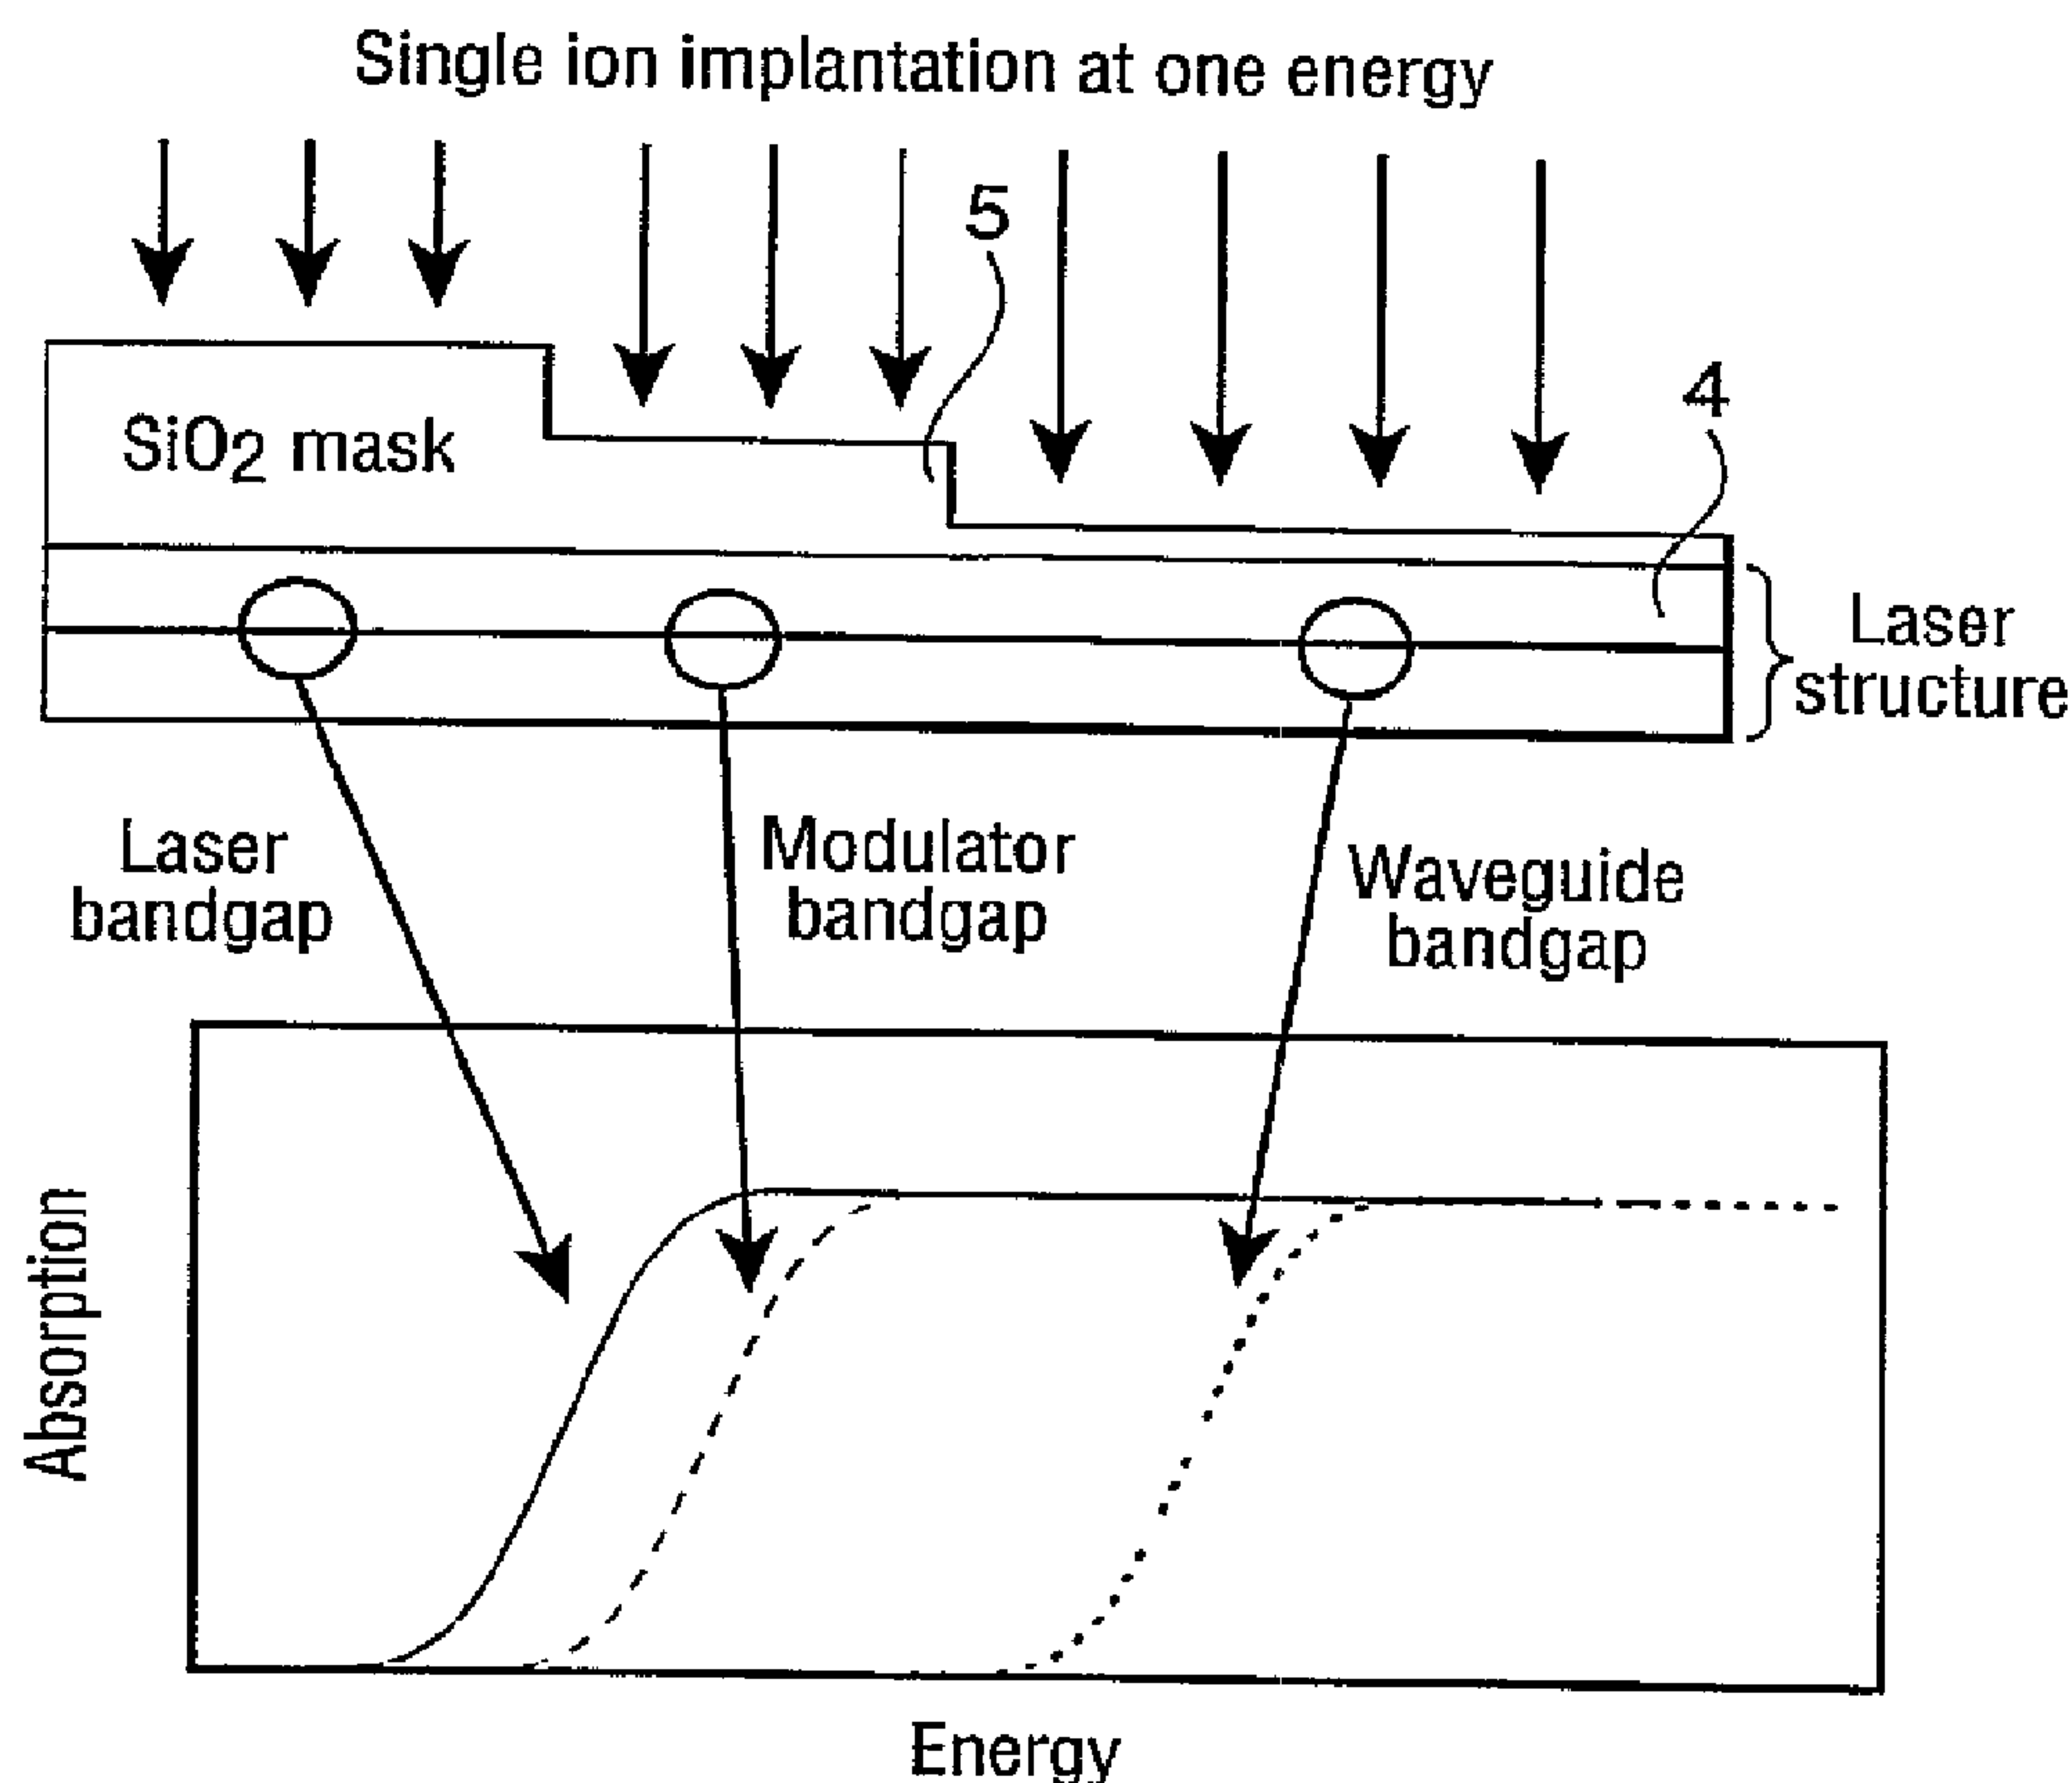

(57) **Abrégé/Abstract:**

In a method of bandgap tuning of a quantum well heterostructure wherein ions are implanted in the heterostructure by ion implantation, the ions are implanted so that different regions are implanted in such a way as to create different concentrations of defects. This provides varying bandgap energies to various areas of the heterostructure during a subsequent thermal treatment, which removes residual defects and initiates intermixing in the quantum well region to result in a structure having a selectively shifted bandgap.

(74) **Agent:** MARKS & CLERK

ABSTRACT OF THE DISCLOSURE

In a method of bandgap tuning of a quantum well heterostructure wherein ions are implanted in the heterostructure by ion implantation, the ions are implanted so that different regions are implanted in such a way as to create different concentrations of defects. This provides varying bandgap energies to various areas of the heterostructure during a subsequent thermal treatment, which removes residual defects and initiates intermixing in the quantum well region to result in a structure having a selectively shifted bandgap.

- 1 -

BANDGAP TUNING OF SEMICONDUCTOR WELL STRUCTURE

This invention relates to semiconductor heterostructures and, more specifically, to a method of bandgap tuning a quantum well structure in a spatially selective manner.

The invention can also be applied to post processing to modify device properties. The invention provides a useful and new method for the monolithic integration of multi-use devices on a single substrate with simplified growth topology.

Optical and electrical properties of quantum well structures are of great importance for novel semiconductor device applications. The ultimate goal of monolithic integration of optical, optoelectronic and electronic components requires the capability for controllable lateral and vertical modifications of optical constants and electrical characteristics in such components.

Present techniques include etching and regrowth. Regrowth involves growing a device structure such as a laser, and then etching away the regions where other components, such as modulators etc., are desired and regrowing these components. This involves a large number of processing steps, with problems associated with growing good quality material after etching, leading to poor device yields.

US patent no. 5,238,868 describes in detail a technique for shifting the bandgap using quantum well intermixing. This technique involves mixing quantum well material with surrounding barrier material to change the bandgap of the quantum well. This is performed by introducing impurities or defects into the quantum well in the region of the wafer that requires a modification

- 2 -

of the bandgap. The implanted wafer is then annealed to intermix the defects and shift the bandgap. This technique does not, however, permit different regions of the wafer to be selectively tuned.

5 An object of the invention is to alleviate these problems.

10 According to the present invention there is provided a method of bandgap tuning a quantum well heterostructure wherein ions are implanted into the heterostructure to
15 create defects therein, and the heterostructure is then thermally treated, e.g. annealed, to initiate intermixing in the quantum well region, characterized in that different regions are implanted with ions in a spatially selective manner to create different concentrations of
20 defects and thereby result in different bandgap shifts during subsequent treatment.

25 Tuning the bandgap of a quantum well structure during subsequent thermal treatment in a spatially selective manner in this way is a powerful technique for
30 performing monolithic integration. This allows the fabrication of lasers (of many wavelengths), detectors, waveguides, modulators, etc. on a single wafer.

35 In one embodiment, the ions are implanted through a mask, for example of SiO_2 , of varying thickness at a
40 single energy, for example, of about 1MeV. This varies the energy of ions reaching different regions, resulting in different concentrations of defects in the semiconductor. A thin SiO_2 layer will slow down the ions so that they will reach the surface of the semiconductor
45 slower than they would in the absence of the mask, and hence will result in a smaller bandgap shift. A very thick mask will stop the ions completely and will result in no shift. Therefore, by varying the thickness of the

- 3 -

mask, the degree of damage can be controlled. The mask may be removed prior to thermal treatment, although this is not necessary.

5 In another embodiment, the ions are implanted through a mask of varying density to achieve a similar result. In other embodiments, alternative techniques are employed to vary the dosage in a spatially selective manner.

10 The inventive technique works because of dependence of the shift in quantum well bandgap on defect concentration, which in turn is dependent on ion energy and/or dosage. The greater the dose, or the higher the energy of the implanted ions, the more damage that will be done. This invention provides the enabling technology
15 for the integration and modification of optoelectronic components on a monolithic structure.

The invention also provides an apparatus for bandgap tuning a quantum well heterostructure comprising means for implanting ions in said heterostructure to create
20 defects therein, and means for thermally treating heterostructure to initiate intermixing in the quantum well region, characterized in that it further comprises means for controlling the ion implantation in a spatially selective manner so as that different regions of said
25 heterostructure have different concentrations of defects, which during the subsequent thermal treatment give rise to different bandgap shifts.

In a preferred embodiment, the invention also includes means for providing a mask of varying thickness
30 or density on the surface of said heterostructure so that different regions are implanted with ions having different energies during a single ion implantation, thereby providing varying bandgap energies to various

- 4 -

areas of said heterostructure to obtain controlled bandgap shifts in said heterostructure, and means for removing the mask prior to annealing.

5 The invention will now be described in more detail, by way of example only, with reference to the accompanying drawings, in which:-

10 Figure 1 shows the change in quantum well bandgap due to ion implantation into an unmasked structure at different ion energies for an InP based quantum well laser;

Figure 2(a) shows a typical photonic circuit that has been created using this technique;

15 Figure 2(b) shows a SiO₂ masking pattern that is used in a method according to the invention and the resulting different shifts in bandgap caused by ions of different energies;

Figure 3 shows a precursor of an extended spectrum super luminescent diode (SLD) and the output spectrum of the resulting;

20 Figure 4 is a schematic diagram of two sections of a demultiplexer fabricated in accordance with the invention;

Figure 5 shows the wavelength response of the two photodetectors in the demultiplexer;

25 Figure 6 shows an alternative embodiment using focused ion implantation;

Figure 7 shows an embodiment employing a multiple thickness mask; and

30 Figure 8a shows a further embodiment employing a multiple thickness contact mask;

- 5 -

Figure 8b shows an embodiment employing a multiple thickness contact mask created using a shadow masking technique;

Figure 9a shows multiple ion implants using contact masks; and

Figure 9b shows multiple ion implants using shadow masks.

Figure 1 shows the change in quantum well bandgap with ion implantation energy for an InP based quantum well laser. This has been implanted with different energy P ions at a dose of $2.5 \times 10^{13} \text{ cm}^{-2}$, and then annealed at 700°C for 60 seconds. As can be seen from Figure 1, there is a strong dependence of bandgap shift on ion energy up to 2 MeV. By implanting, for example, 2 MeV ions through a SiO₂ mask using standard technology compatible with InP processing, any bandgap shift from 0 to 41 meV can be obtained with a single ion implant. This can be performed purely by varying the mask thickness, although other means to vary the implanted dose can be employed.

Figure 2(a) shows a typical photonic circuit that can be created using the above technique. It consists of a laser 1, a modulator 2, which controls the output of the laser 1, and a waveguide 3 to send the light to another region of the wafer 4, or an optical fiber.

By using an SiO₂ mask 5 of varying thickness, as shown in Figure 2(b), different defect concentrations are created in different regions of the wafer using a single ion implantation step. As ions travel through the SiO₂ they are slowed down, i.e. they decrease in energy. The thicker the SiO₂, the more the ions are slowed, until they are stopped completely. The mask is implanted with ions of a single energy, e.g. 1 MeV, but the surface of the wafer actually receives ions with different energies, 0

- 6 -

to 1MeV, depending on the thickness of the SiO₂ that the ions travel through. The resulting wafer is annealed, causing different shifts in bandgap for the different regions. The result is a bandgap profile suitable for the
5 fabrication of a photonic integrated circuit.

Using this process, a standard quantum well laser wafer can be processed into any photonic integrated circuit simply by changing the SiO₂ mask used for implantation. For example, the wafer used to create the
10 device shown in Figure 2(a) could easily have been used to make a sensor for detecting a specified chemical compound. A tuned laser/detector pair would be made with an air gap between them. The presence of the specified chemical in the air gap would lead to an absorption of
15 the laser light, and a drop in the signal from the detector.

New devices can also be implemented, such as an extended-gain-spectrum laser or an extended spectrum super luminescent diode (SLD) shown in Figure 3.
20 Normally, the output spectrum of an SLD is directly limited to the gain spectrum, which is typically 20-30 nm. There are numerous applications, such as fiber based gyroscopes and broad band illumination sources for spectroscopy, for SLDs with an output spectrum
25 approaching 100 nm or greater. To extend the output spectrum of this device, a variable thickness mask is used along the length of the laser cavity (Figure 3a). After ion implantation, the gain spectrum is shifted in wavelength by different amounts in different sections of
30 the cavity (Figure 3b). This results in a total gain spectrum, the dashed line, which is almost flat, and covers a wider frequency range than the untreated material.

-7-

The addition of a high reflecting coating on the Facet 1 (Figure 3(a)) and anti-reflection coating on Facet 2 (Figure 3a) results in a uni-directional extended spectrum SLD.

Mirrors on both facets result in an extended-gain-spectrum
5 laser. With anti-reflection coatings on both facets, an amplifier can be made with an extended wavelength gain.

It is also possible to practice the invention using multiple masks and multiple implants. In such an embodiment, for example, each density region can be exposed for a desired
10 length of time through a mask having an aperture over the associated region where implantation was desired. Different masks can be exposed for a desired length of time through a mask having other regions, which can be exposed for a different length of time so as to vary the density of ion
15 implantation between regions. Alternatively, the apertures in the successive masks could overlap so that the regions of higher desired density received higher doses.

In a further embodiment, instead of varying the actual thickness of the mask, it is possible to vary the effective
20 thickness by varying the density. This can be achieved, for example, by depositing an SiO₂ mask on some regions of the surface of the heterostructure and then sputtering metal on other regions where it is desired to have a higher density mask.

25 In Figure 4, a monolithic demultiplexer comprises a substrate 30 and an InP based laser structure 31. Photodetectors 32, 33 are formed over different regions of the structure, which has been subjected to bandgap tuning in accordance with the invention. In the structure
30 of Figure 4, four different thicknesses (0, 0.65, 1.2 and 2.2µm) of SiO₂ mask were evaporated onto the sample

- 8 -

surface. Phosphorus ions were implanted into the sample through the mask at a dose of $2.5 \times 10^{13} \text{ cm}^{-2}$ with an energy of 1 MeV. The thickest SiO_2 region was designed to stop the 1 MeV ions completely. During implantation the sample was tilted at an angle of 7° to the surface normal to minimize ion channeling.

After ion implantation the mask was removed. This was followed by an anneal at 700°C for 90 seconds in a nitrogen atmosphere, using a Heatpulse 410 Rapid Thermal Annealer. During the annealing, the defects diffused rapidly through the InP material and the quantum well (QW) region causing an intermixing of the QW and barrier layers. This resulted in a shift of the QW absorption edge that was greatest for the region which had had no SiO_2 mask above it, and decreased as the SiO_2 mask layers increased in thickness. The region under the thickest SiO_2 layer had no shift in the QW absorption edge at all.

Separate gold contact pads were put on each of the differently masked regions to create a photodetector array. Light was coupled into the structure passing from the strongly intermixed into the non-intermixed region. Since the QW bandgap in each of the masked regions was different, the wavelength response for each was modified.

As can be seen in Figure 5, the response of photodetector 1, which lies over the bandgap shifted region, is shifted about 80 nm to the left.

This simple device allows the demultiplexing of a wavelength division multiplexed signal.

In an alternative method of manufacture, shown in Figure 6, regions having different concentrations of defects are created by using a scanning microbeam or projection ion beam system. A suitable practical example is a focused ion beam (FIB) machine. By varying the ion

- 9 -

beam current, or by repetitive patterning, the number of defects can be adjusted in a lateral manner on the wafer. In step 1, the left side of the wafer is subjected to a large ion dose, and in step 2, the right side is
5 subjected to a small ion dose.

After a repetitive scan in step 3, the wafer is subjected to a single rapid thermal anneal (RTA) in step 4 to effect a bandgap shift that depends on the concentration of defects, and thus the ion dose in the
10 various regions. The Quantum well bandgap shifts reflect the defect density produced by the complex ion implantation pattern written on the wafer.

Figure 7 shows in detail a method of making a wafer employing a single, multiple thickness mask. After
15 despositing an SiO₂ layer 11 on wafer surface 1 (step 1), a temporary mask 12 is applied to cover a portion of the wafer surface, and a deep etch (step 3) is performed on the remainder. The temporary mask 12 is removed and a second SiO₂ deposition 13 performed. The process is
20 repeated through steps 6 to 12 adding additional SiO₂ layers 15 and employing masks 14, 16 to produce a multiple thickness mask as shown at step 12. Finally, in step 13, the wafer is subjected to ion implantation. Clearly, the exposed region receives the greatest ion
25 dose and thus exhibits the greatest band gap shift.

Figure 8a shows the use of a single multiple thickenss contact mask. As in Figure 7, an SiO₂ mask 11 is formed on the surface of the wafer 10. A temporary mask 12 applied to cover parts of the exposed surface. A deep
30 etch (step 3) is then performed and the temporary mask 12 removed. A second temporary mask 14 is applied and a shallow etch performed, which after removal of the mask 14, produces the stepped structure shown in step 7.

- 10 -

An ion implantation is then performed as shown in step 8. The thicker the mask the lower the ion energy reaching the sample surface, and hence the lower the concentration of defects. Thus, after intermixing the region with no mask exhibits the largest bandgap shift, and the region under the thickest portion of the mask, which does not receive any ions, exhibits no shift at all.

Figure 8b shows how a similar result can be achieved using a shadow mask 20. The stepped mask 11, 21 is built up in a series of steps where the region over which it is not desired to deposit an SiO_2 layer is covered with shadow mask 20. In step 5, a single implant and anneal is performed to create different densities of defects and thus different bandgap shifts.

Figure 9a shows how a variable density defect concentration can be achieved using multiple implants with a single mask.

An ion implantation is performed through a first temporary mask 12 into the wafer 10. A second mask 14 is then applied over different regions and a second implantation carried out in step 5. The regions that are exposed more than once receive a greater dose of ions and thus have a greater defect concentration. After annealing, these have the greatest bandgap.

Figure 9b shows a similar case for a shadow mask 20. Clearly, the exposed region receives the ions with the greatest energy and thus exhibits the greatest bandgap shift. The dose delivered by each implantation step differs, resulting in a wafer in which different areas experience different defect concentrations and thus shift differently during anneal. The anneal can be a single

- 11 -

anneal, after all the doses have been applied, or
separate anneals after each dose.

5 The described technique allows the monolithic
integration of multi-use devices on a single substrate
without deterioration of the material quality after the
process.

- 12 -

The embodiments of the present invention in which an exclusive property or privilege is claimed are defined as follows:

5 1. A method of bandgap tuning a quantum well heterostructure wherein ions are implanted into the heterostructure to create defects therein, and the heterostructure is then annealed to initiate intermixing in the quantum well region, and wherein
10 different regions are implanted in a single-ion implantation step with ions of different energy in a spatially selective manner through a mask of varying effective thickness to create different concentrations of defects in the different regions and thereby result in different bandgap shifts during subsequent annealing.

15

2. A method as claimed in claim 1, wherein said ions are implanted in a single step through a mask of varying height to vary the energy of the ions reaching different regions of the heterostructure.

20

3. A method as claimed in claim 1, wherein said ions are implanted in a single step through a mask of varying density so that different regions are reached by ions of different energy.

25

4. A method of bandgap tuning a quantum well heterostructure wherein ions are implanted into the heterostructure to create defects therein, and the heterostructure is then annealed to initiate intermixing in the quantum well region, and wherein
30 different regions are implanted with ions of different energy using a scanning microbeam or projection ion beam system in a

- 13 -

spatially selective manner to create different concentrations of defects and thereby result in different bandgap shifts in the different regions during subsequent annealing.

5 5. A method as claimed in claim 4, wherein the ions are selectively implanted with a focused ion beam machine.

6. A method as claimed in any one of claims 1 to 3, wherein the mask is an SiO₂ mask.

10

7. A method as claimed in any one of claims 1 to 6, wherein the heterostructure is an InP-based quantum well laser.

8. A method as claimed in any one of claims 1 to 6, wherein
15 the heterostructure is a super-luminescent diode.

9. A method as claimed in any one of claims 1 to 6, wherein the heterostructure is a demultiplexer for wavelength division multiplexing.

20

10. A method as claimed in any one of claims 1 to 6, wherein the heterostructure is an integrated internal laser modulator.

11. A method as claimed in any one of claims 1 to 6, wherein
25 the heterostructure is a single mode waveguide laser.

12. A method as claimed in any one of claims 1 to 6, wherein the heterostructure is a transparent facet for a high-powered laser.

30

- 14 -

13. A method as claimed in any one of claims 1 to 6, wherein the heterostructure is annealed at about 700° for about 60 seconds.

5 14. A method of bandgap tuning a quantum well heterostructure wherein ions are implanted into the heterostructure to create defects therein, and the heterostructure is then annealed to initiate intermixing in the quantum well region, wherein
10 different regions are implanted with ions of different energy in a spatially selective manner to create different concentrations of defects in the different regions and thereby result in different bandgap shifts during subsequent thermal treatment.

15 15. A method as claimed in claim 14, wherein the selective implantation is achieved in a plurality of steps, with different regions being exposed in each step.

16. An apparatus for bandgap tuning a quantum well
20 heterostructure, comprising means for implanting ions in said heterostructure to create defects therein, and means for annealing the heterostructure to initiate intermixing in the quantum well region, wherein a mask of varying effective thickness is placed on said heterostructure for controlling
25 the ion implantation in a spatially selective manner so as that in a single implantation step different regions of said heterostructure receive ions of different energy and thereby have different concentrations of defects, and means are provided for removing said mask, whereby during the subsequent
30 annealing said different concentrations of defects give rise to different bandgap shifts in the different regions.

- 15 -

17. An apparatus as claimed in claim 16, wherein said mask of varying effective thickness has a different height so that different regions are reached by ions having different
5 energies during a single ion implantation.

18. An apparatus as claimed in claim 16, wherein said mask of varying effective thickness has varying density so that different regions are reached by ions having different
10 energies during a single ion implantation.

19. An apparatus as claimed in any one of claims 16 to 18, wherein said mask is an SiO₂ mask.

15 20. An apparatus for bandgap tuning a quantum well heterostructure, comprising means for implanting ions in said heterostructure to create defects therein, and means for annealing the heterostructure to initiate intermixing in the quantum well region, wherein a scanning microbeam system, a
20 projection ion beam system, or a focused ion beam system are provided for controlling the ion implantation in a spatially selective manner so as that different regions of said heterostructure receive ions of different energy and thereby have different concentrations of defects, whereby during the
25 subsequent annealing said different concentrations of defects give rise to different bandgap shifts in the different regions.


21. A precursor of a semiconductor heterostructure that can
30 be band-gap tuned, wherein it has on its surface a mask of

- 16 -

varying effective thickness through which ion implantation can take place.

22. A precursor of a semiconductor heterostructure that can
5 be band-gap tuned as claimed in claim 21, wherein said mask of
varying effective thickness has a varying effective density
through which ion implantation can take place.

1/8

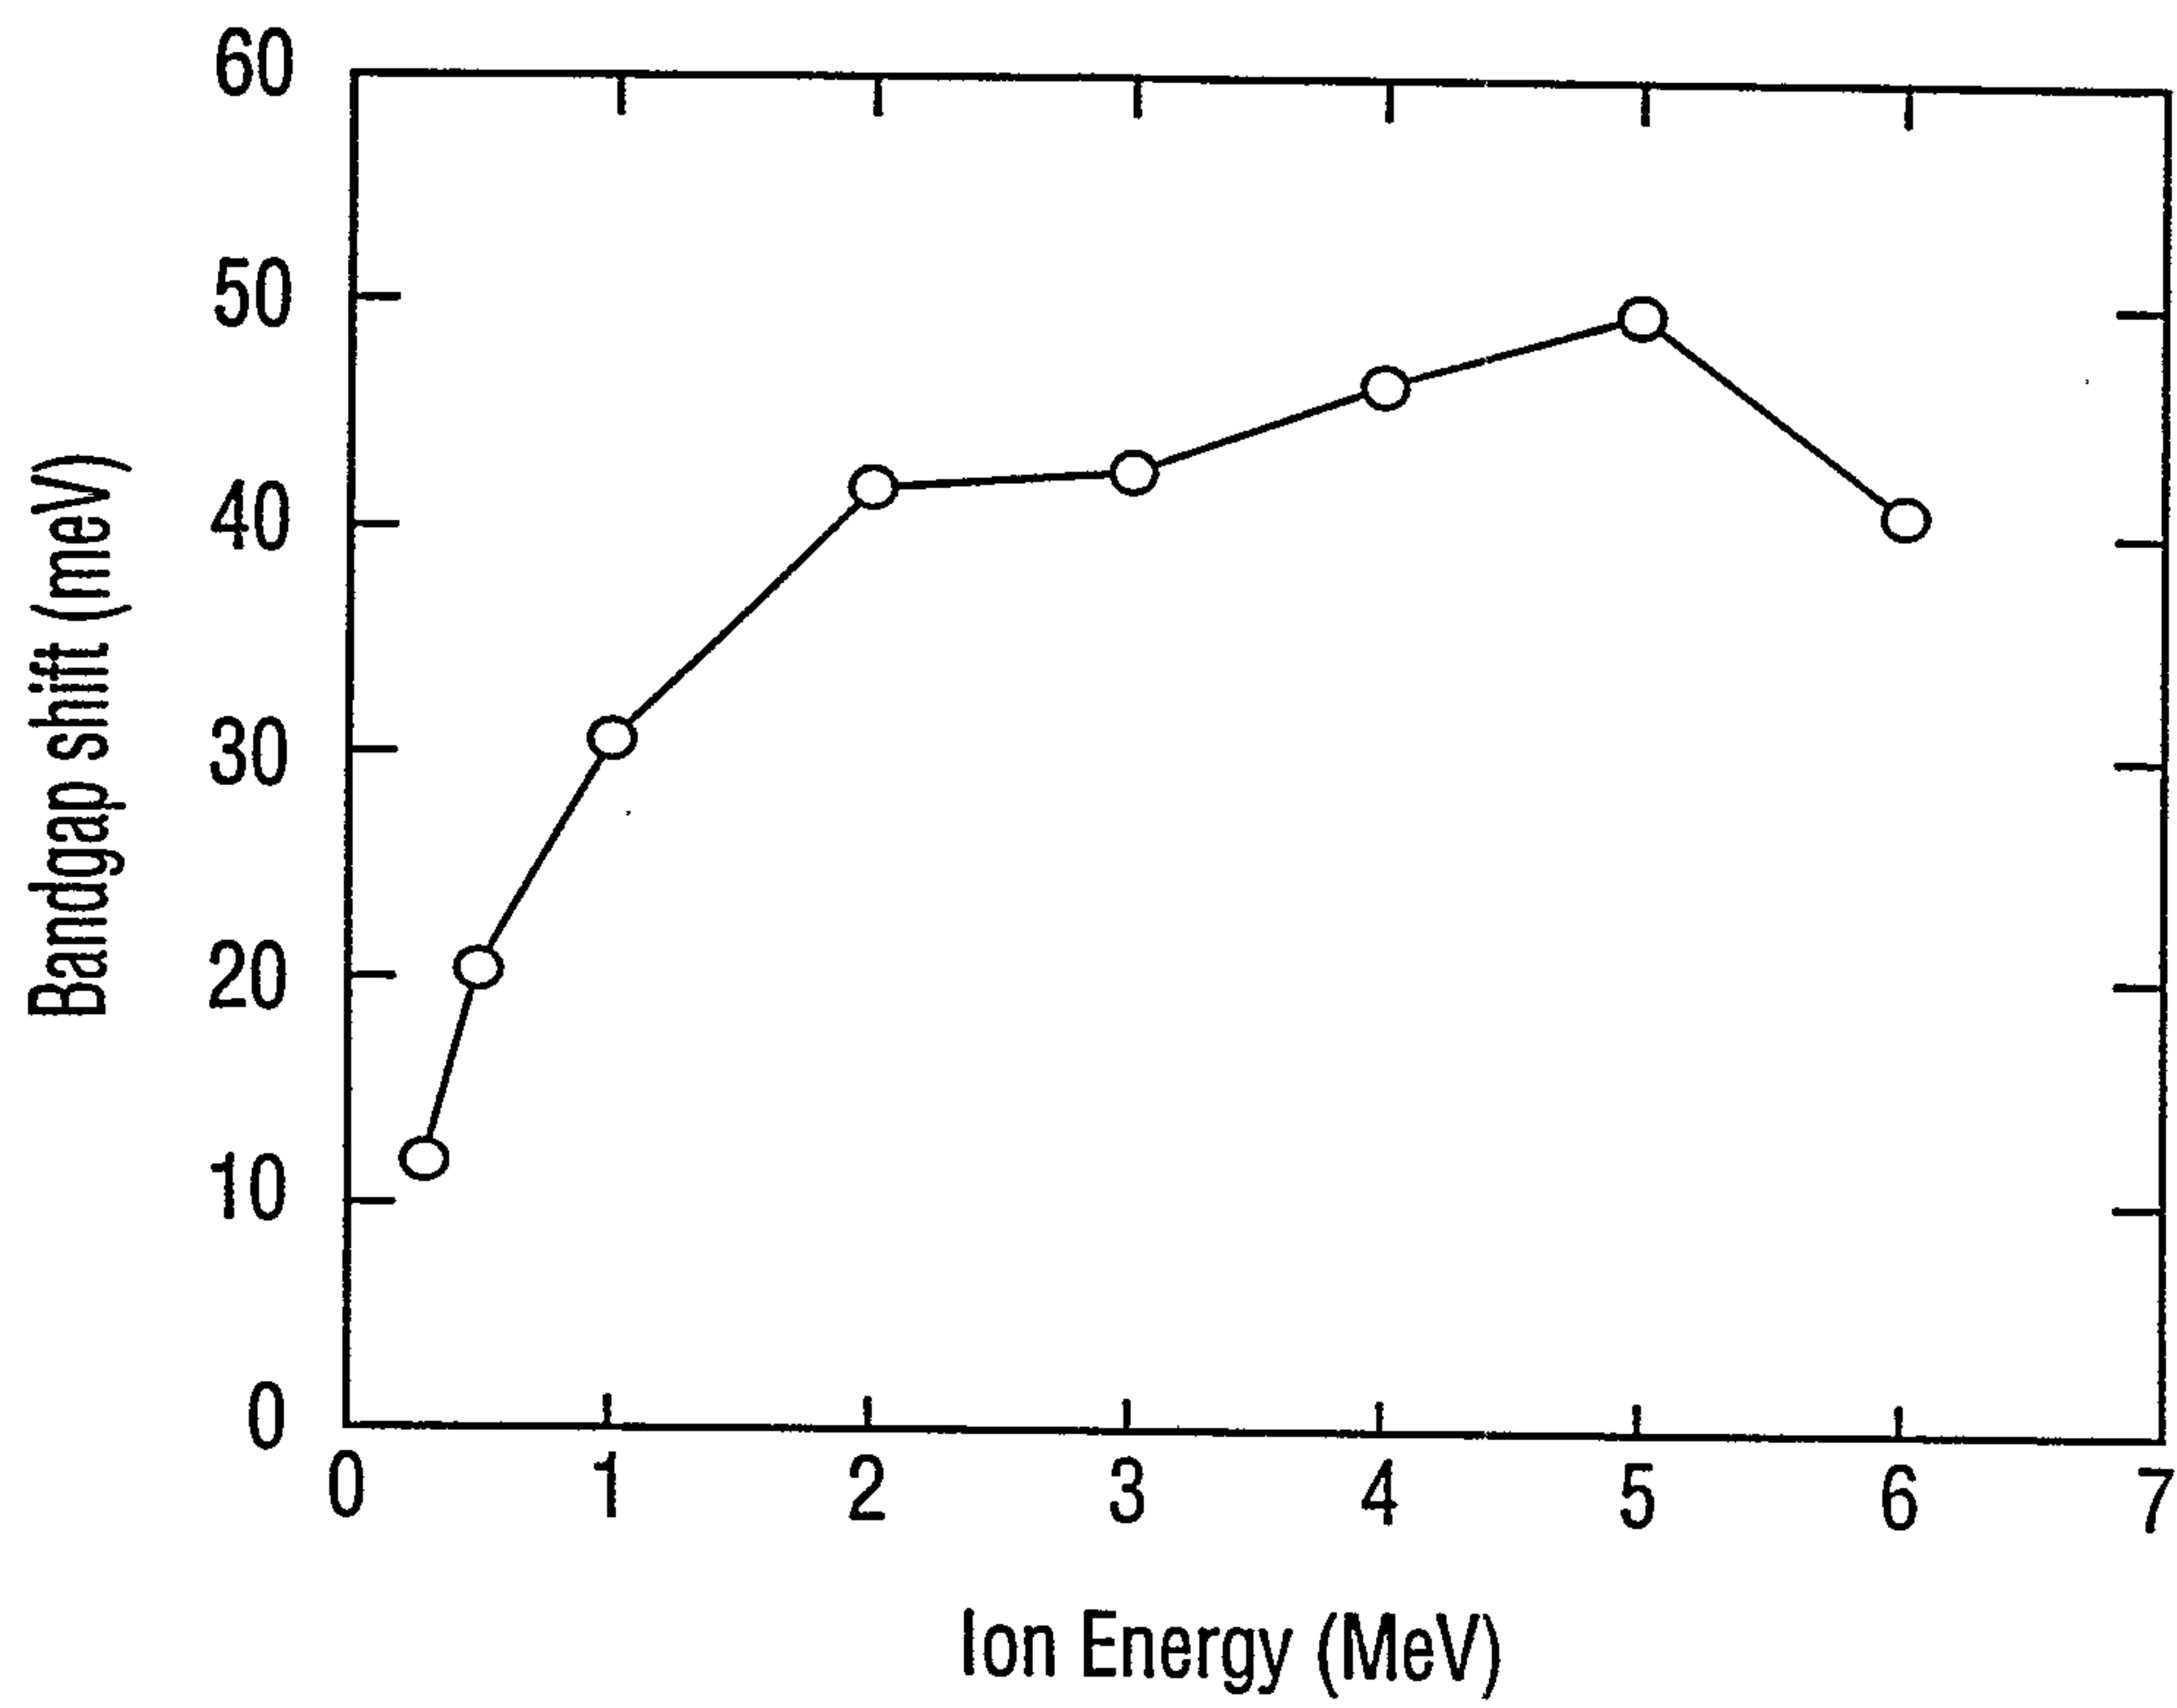**FIG. 1**

2/8

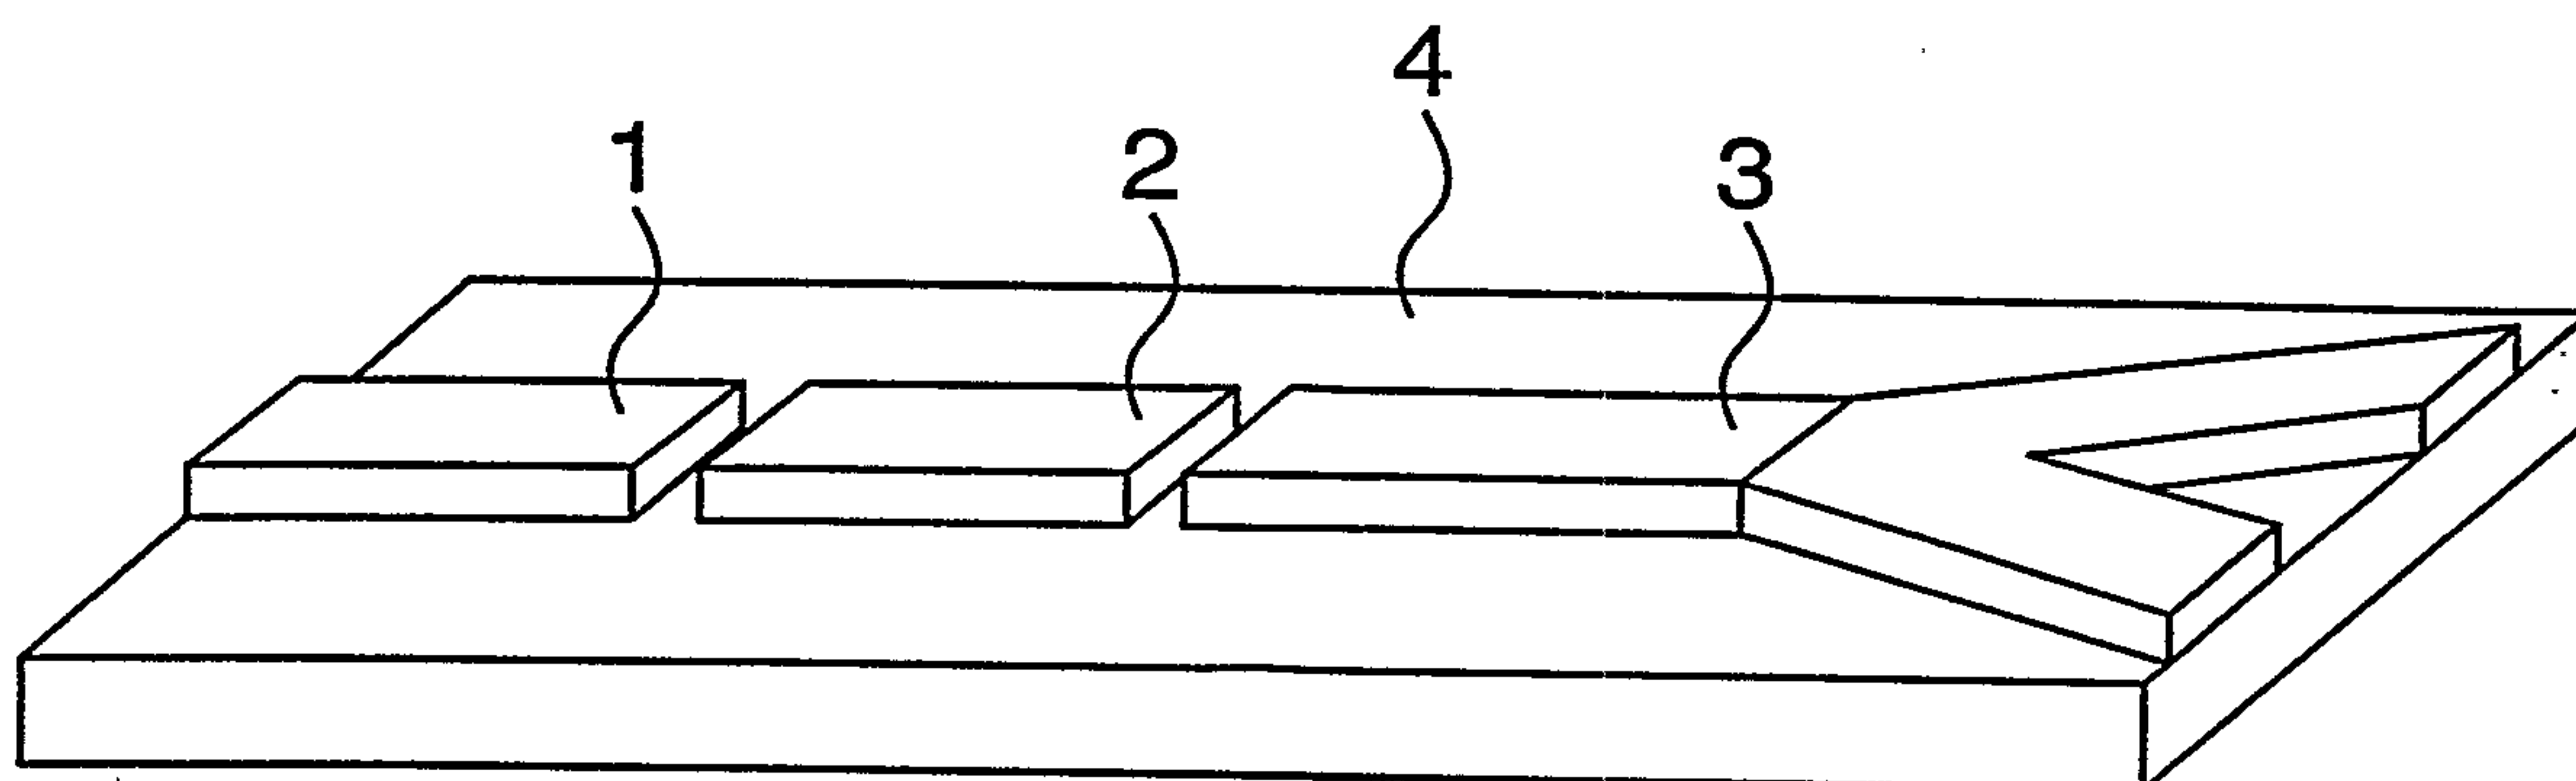


FIG. 2a

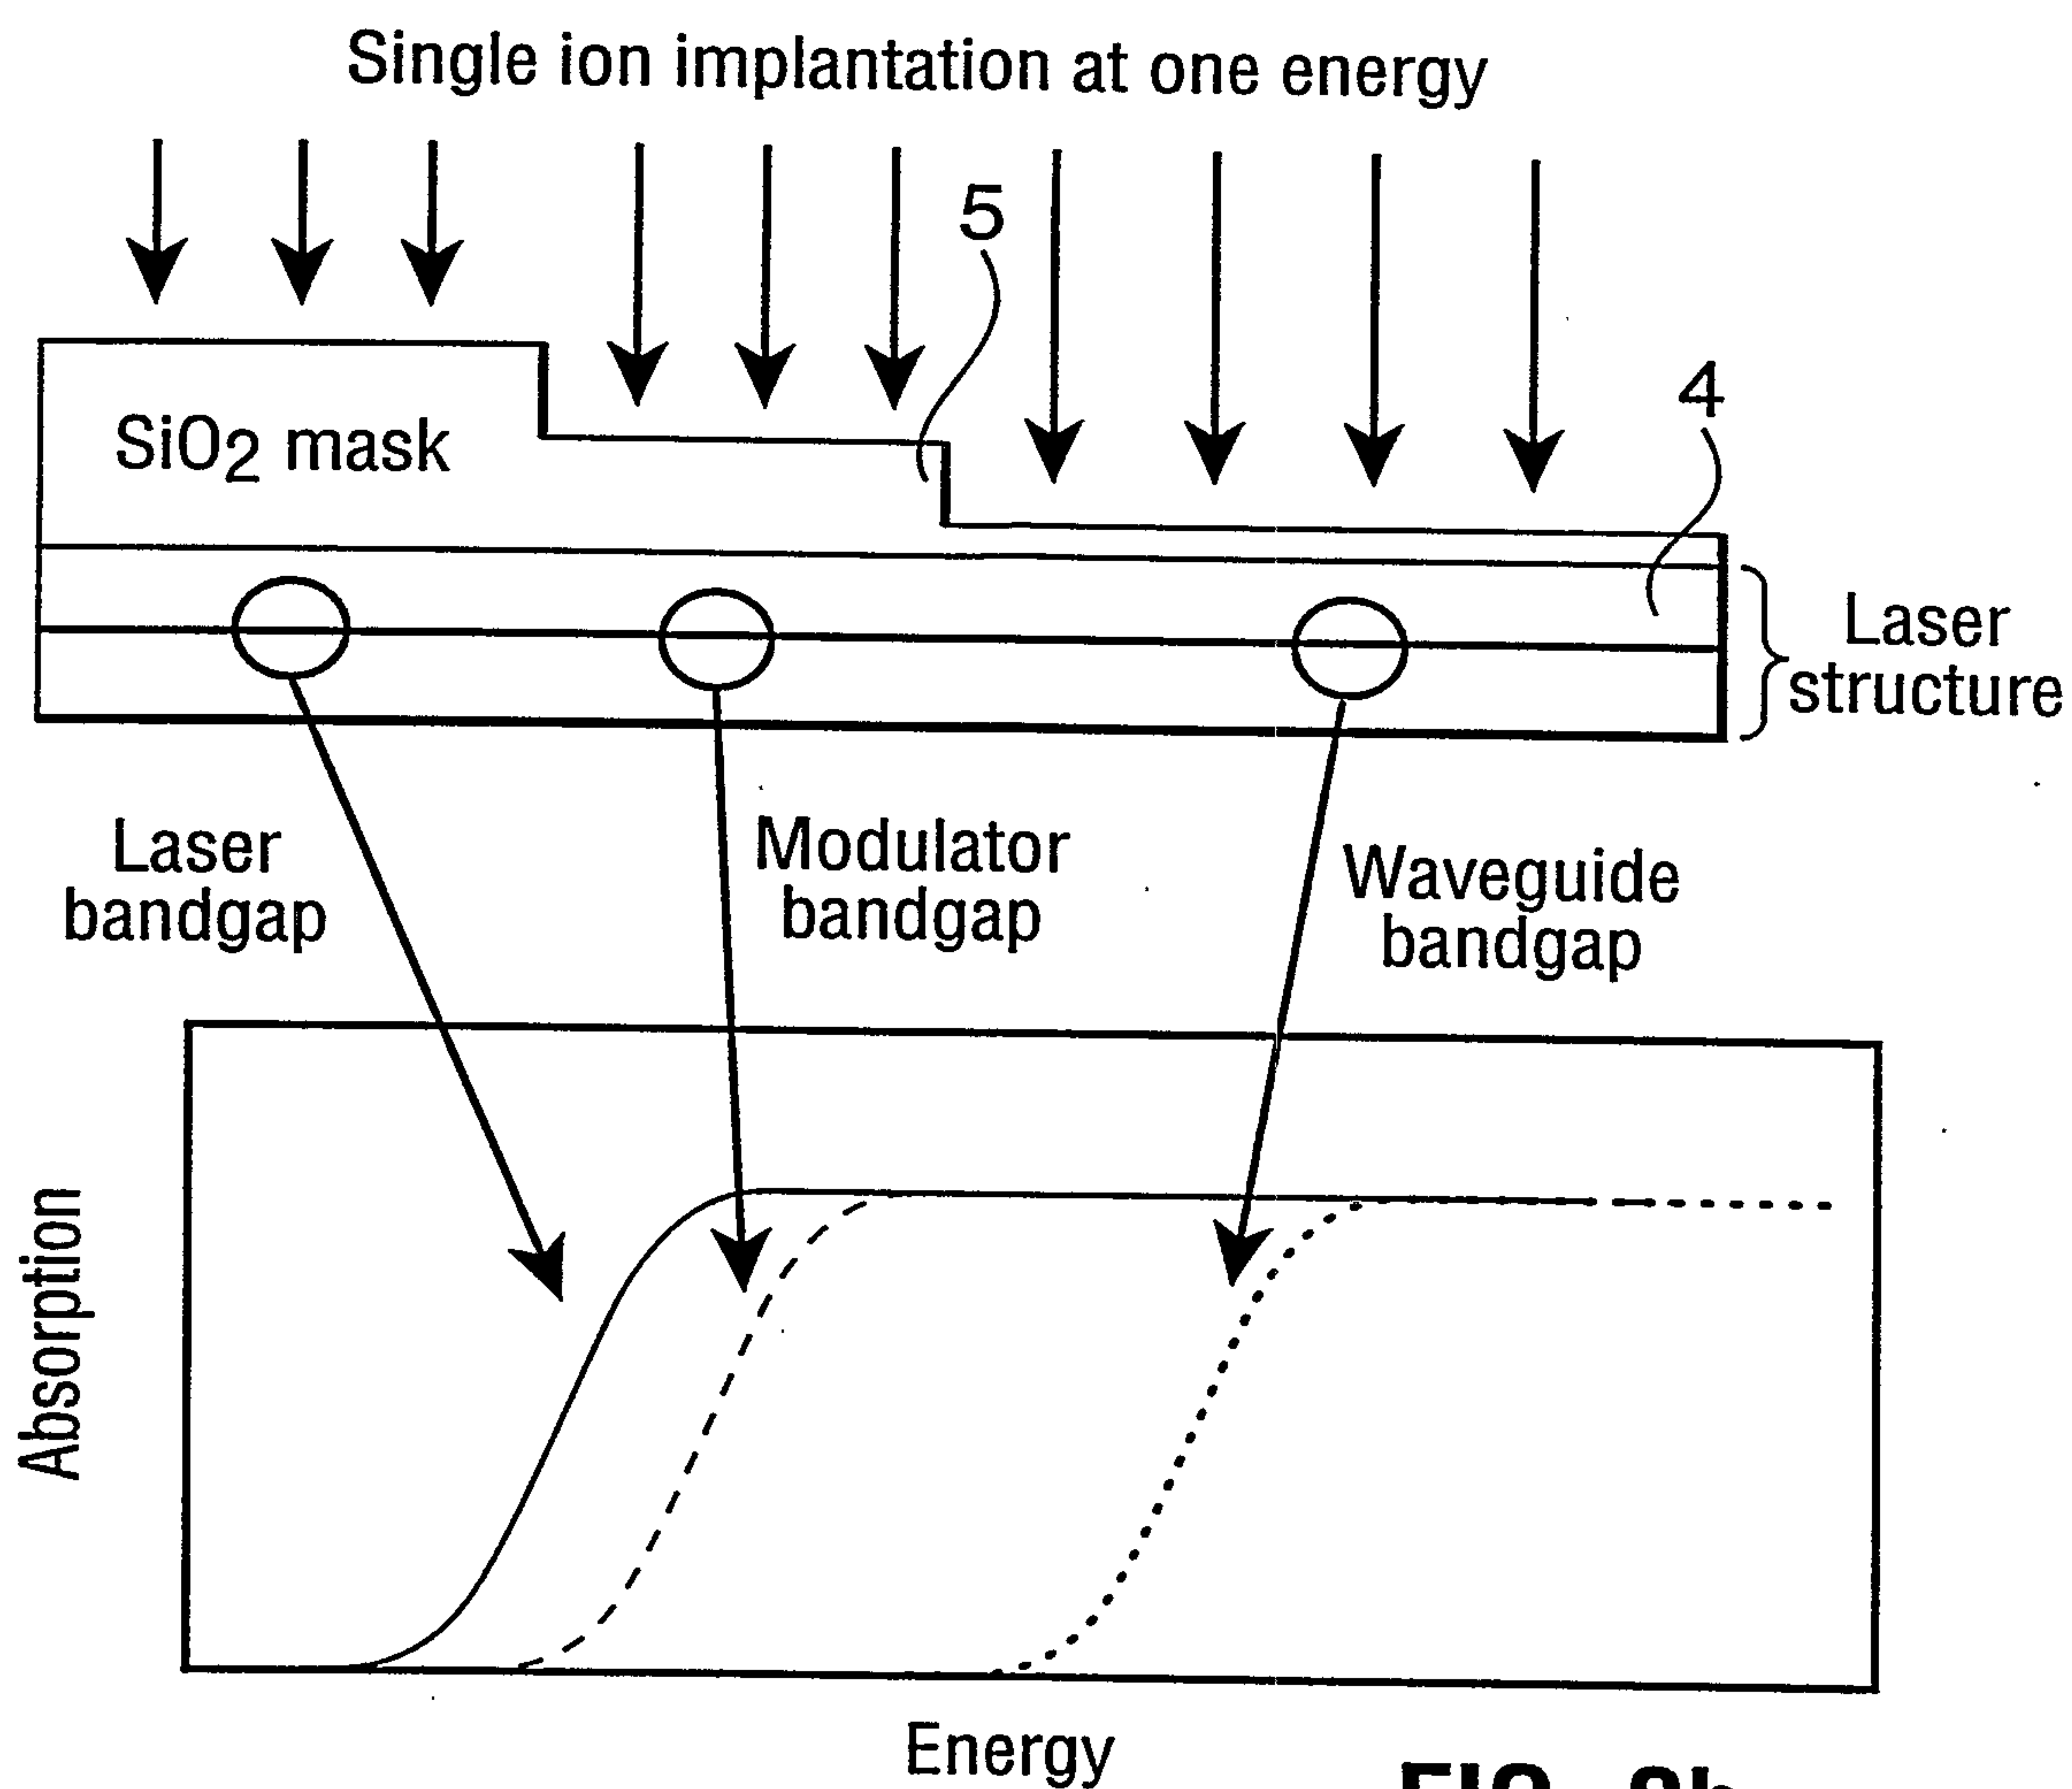


FIG. 2b

SUBSTITUTE SHEET (RULE 26)

Mark & Clerk

3/8

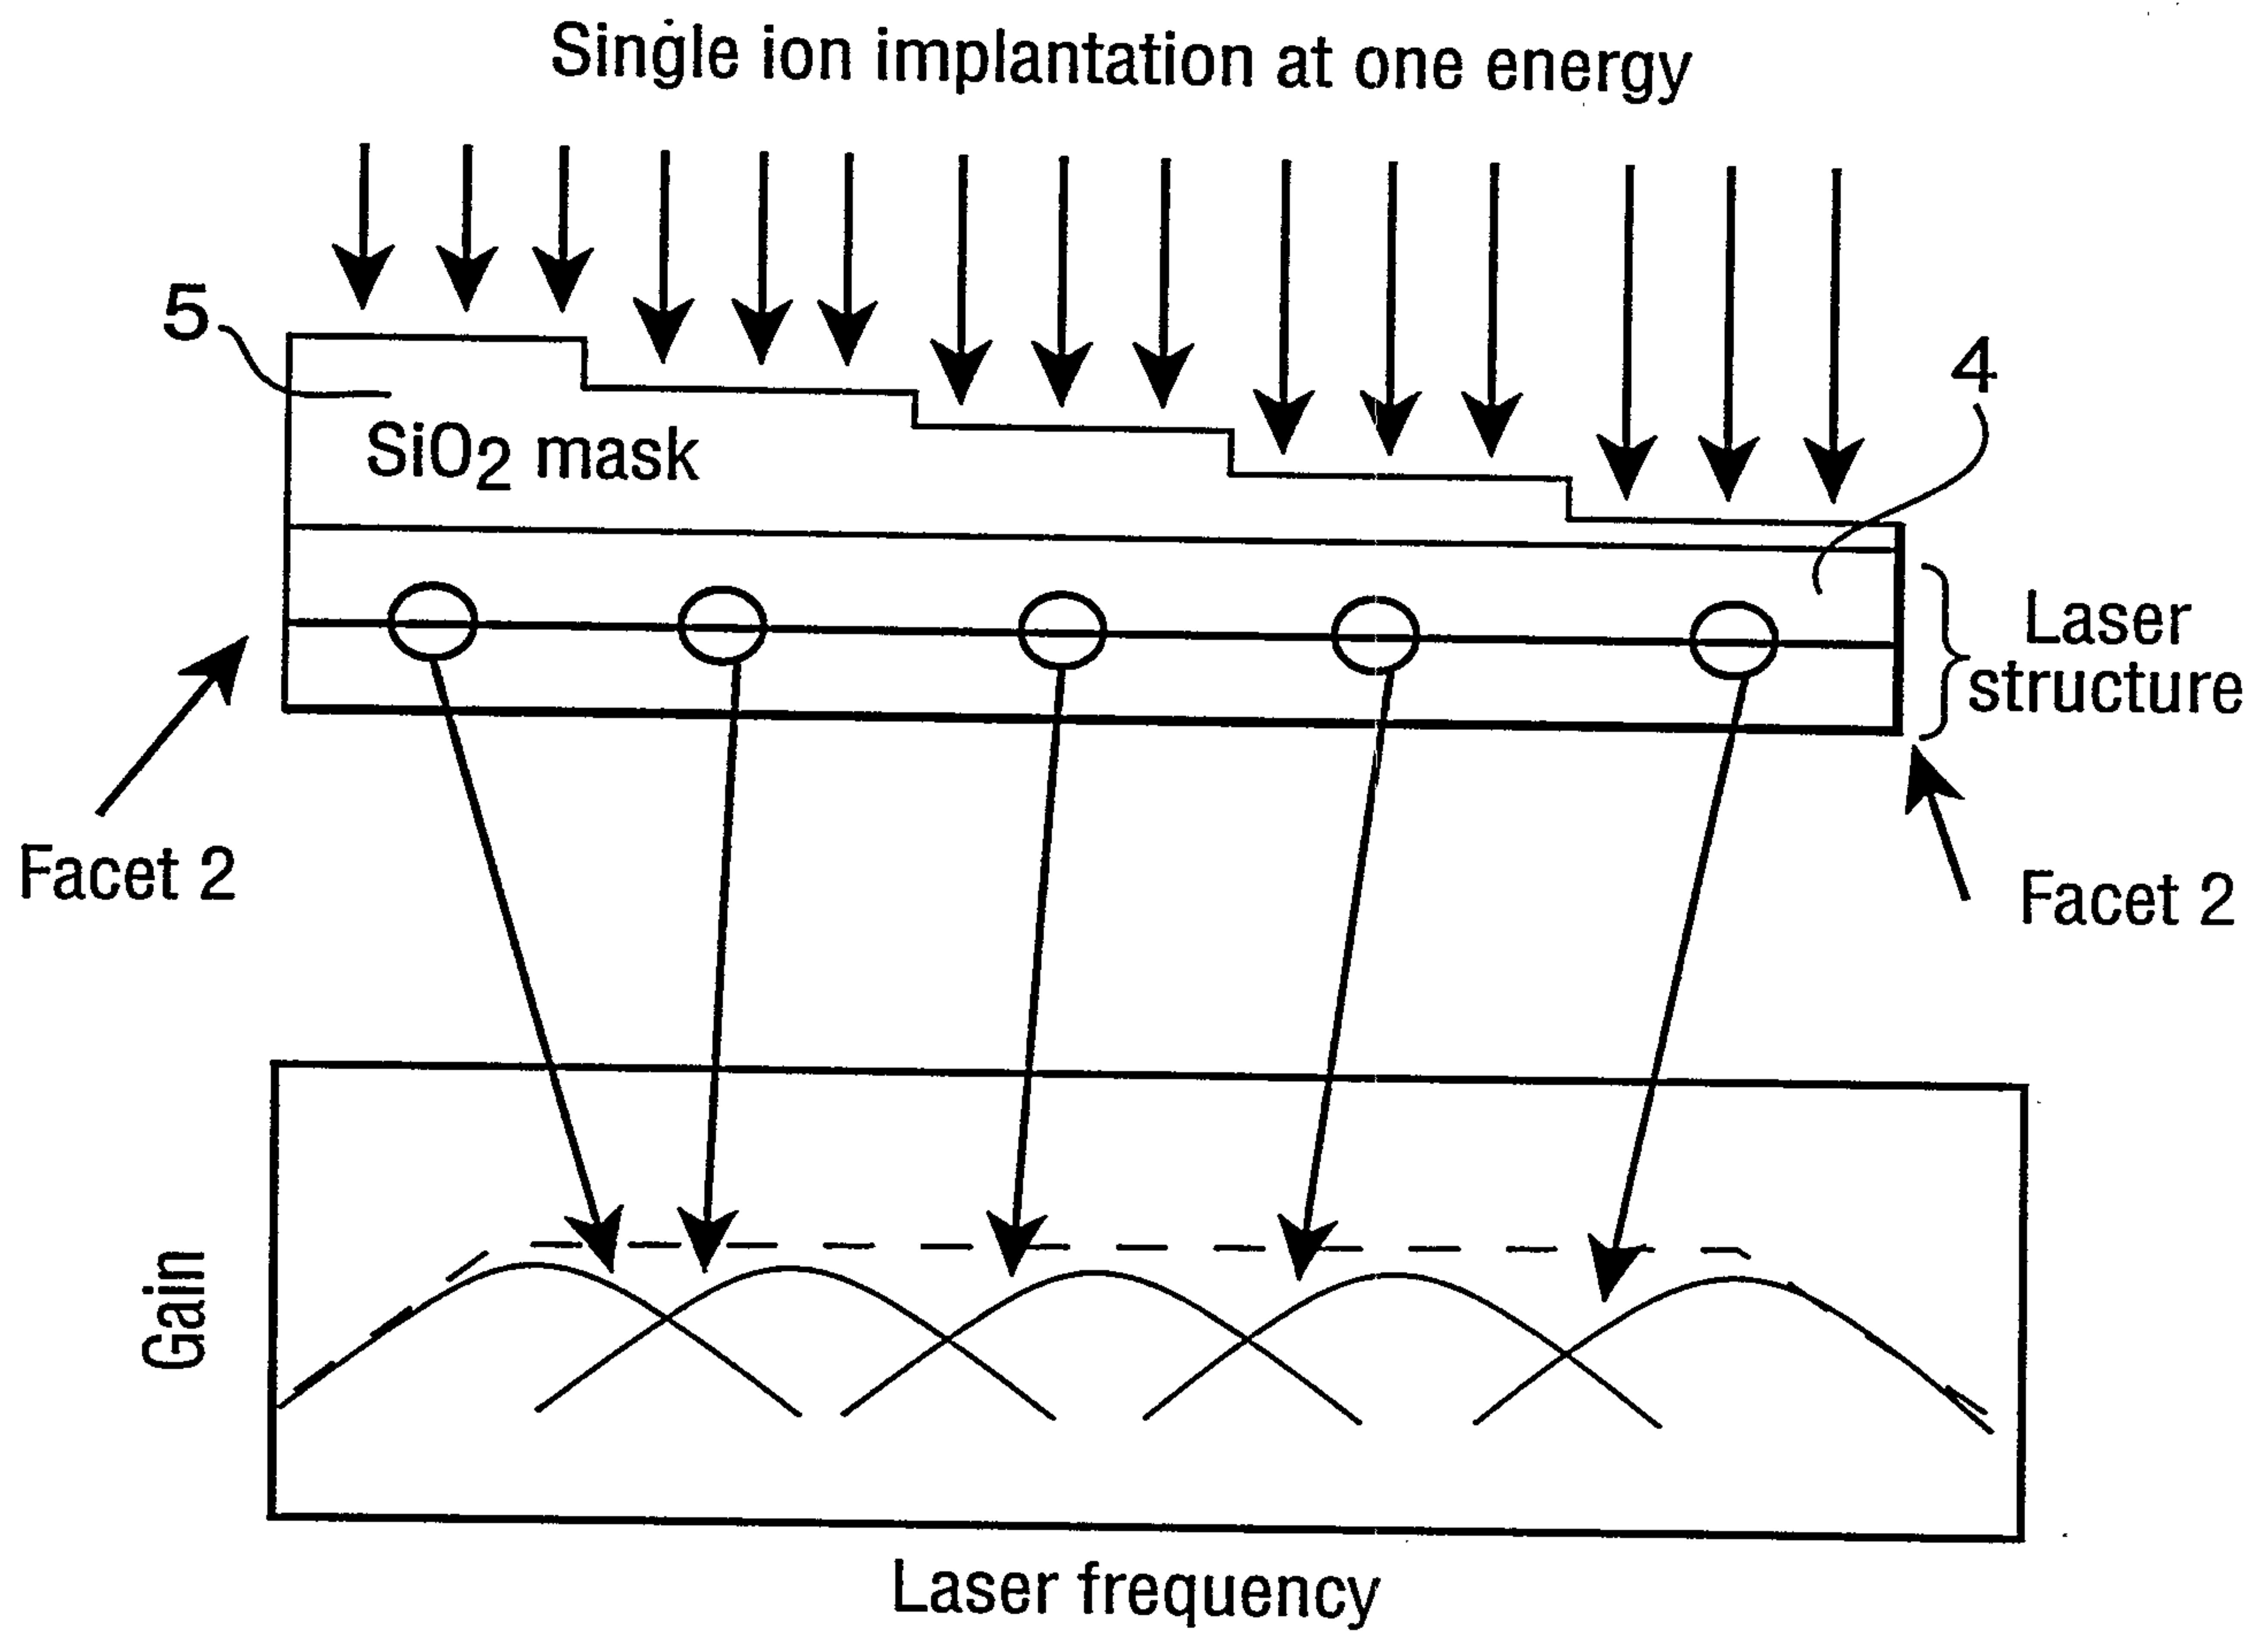
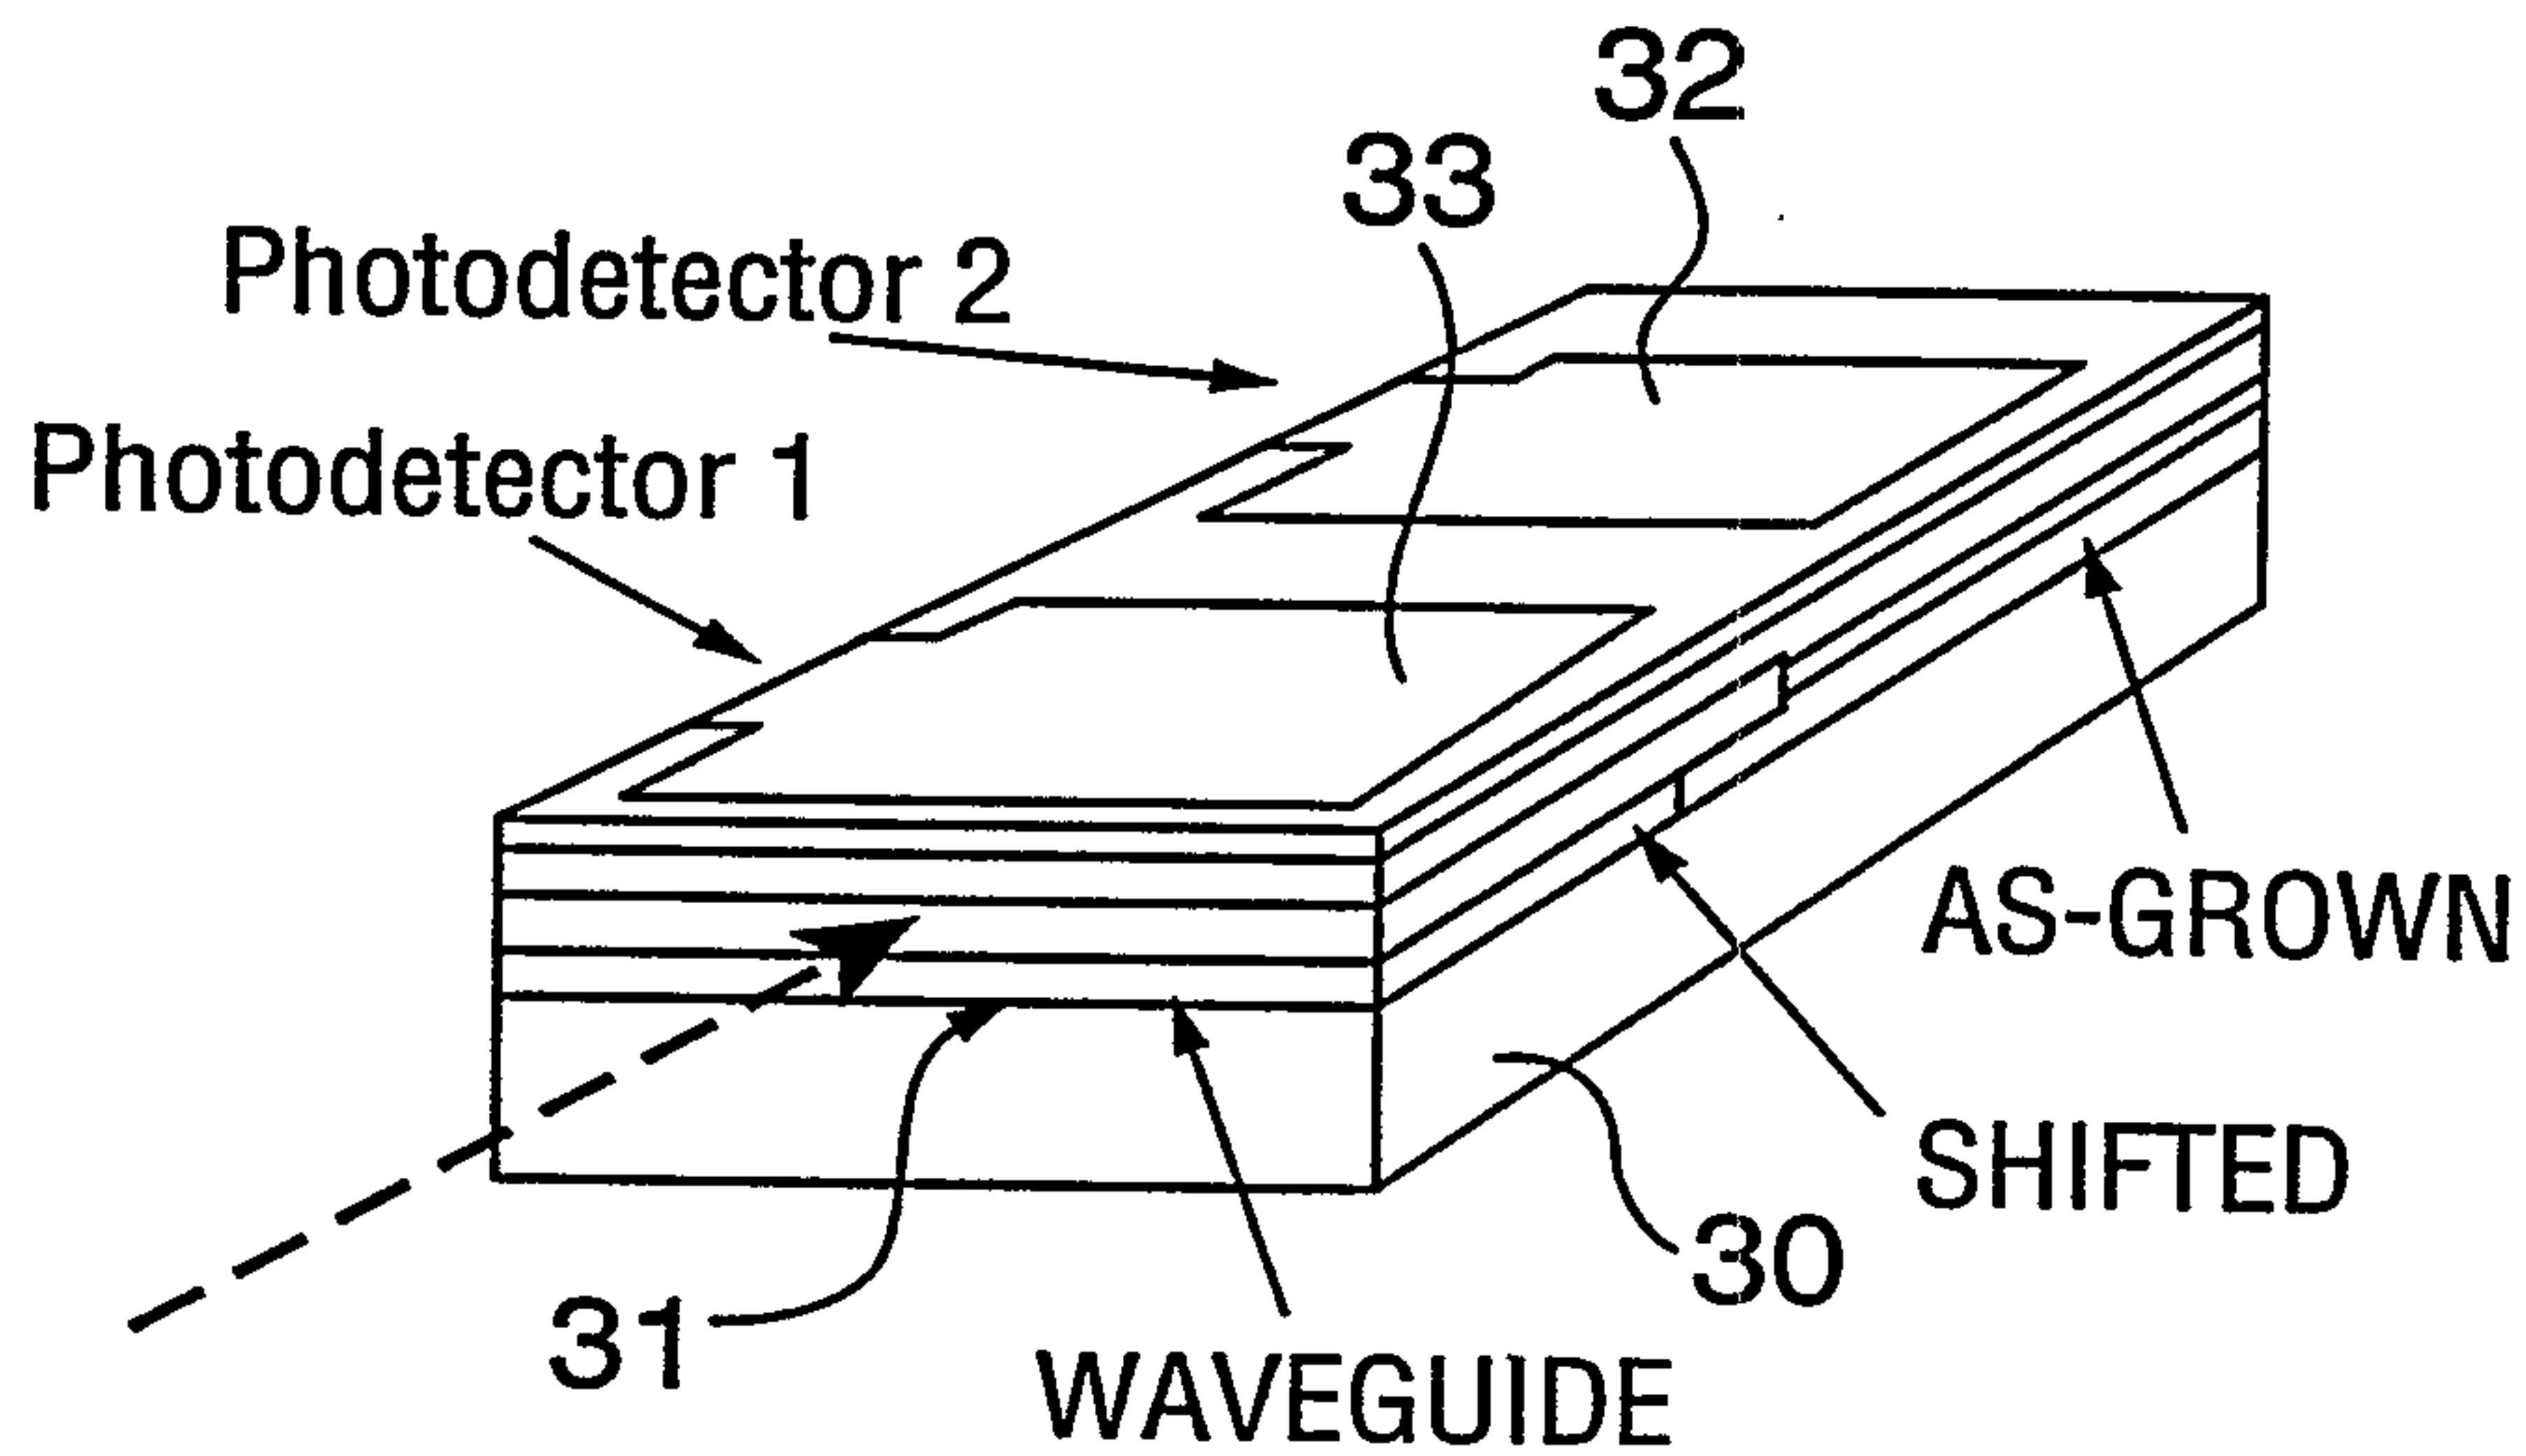
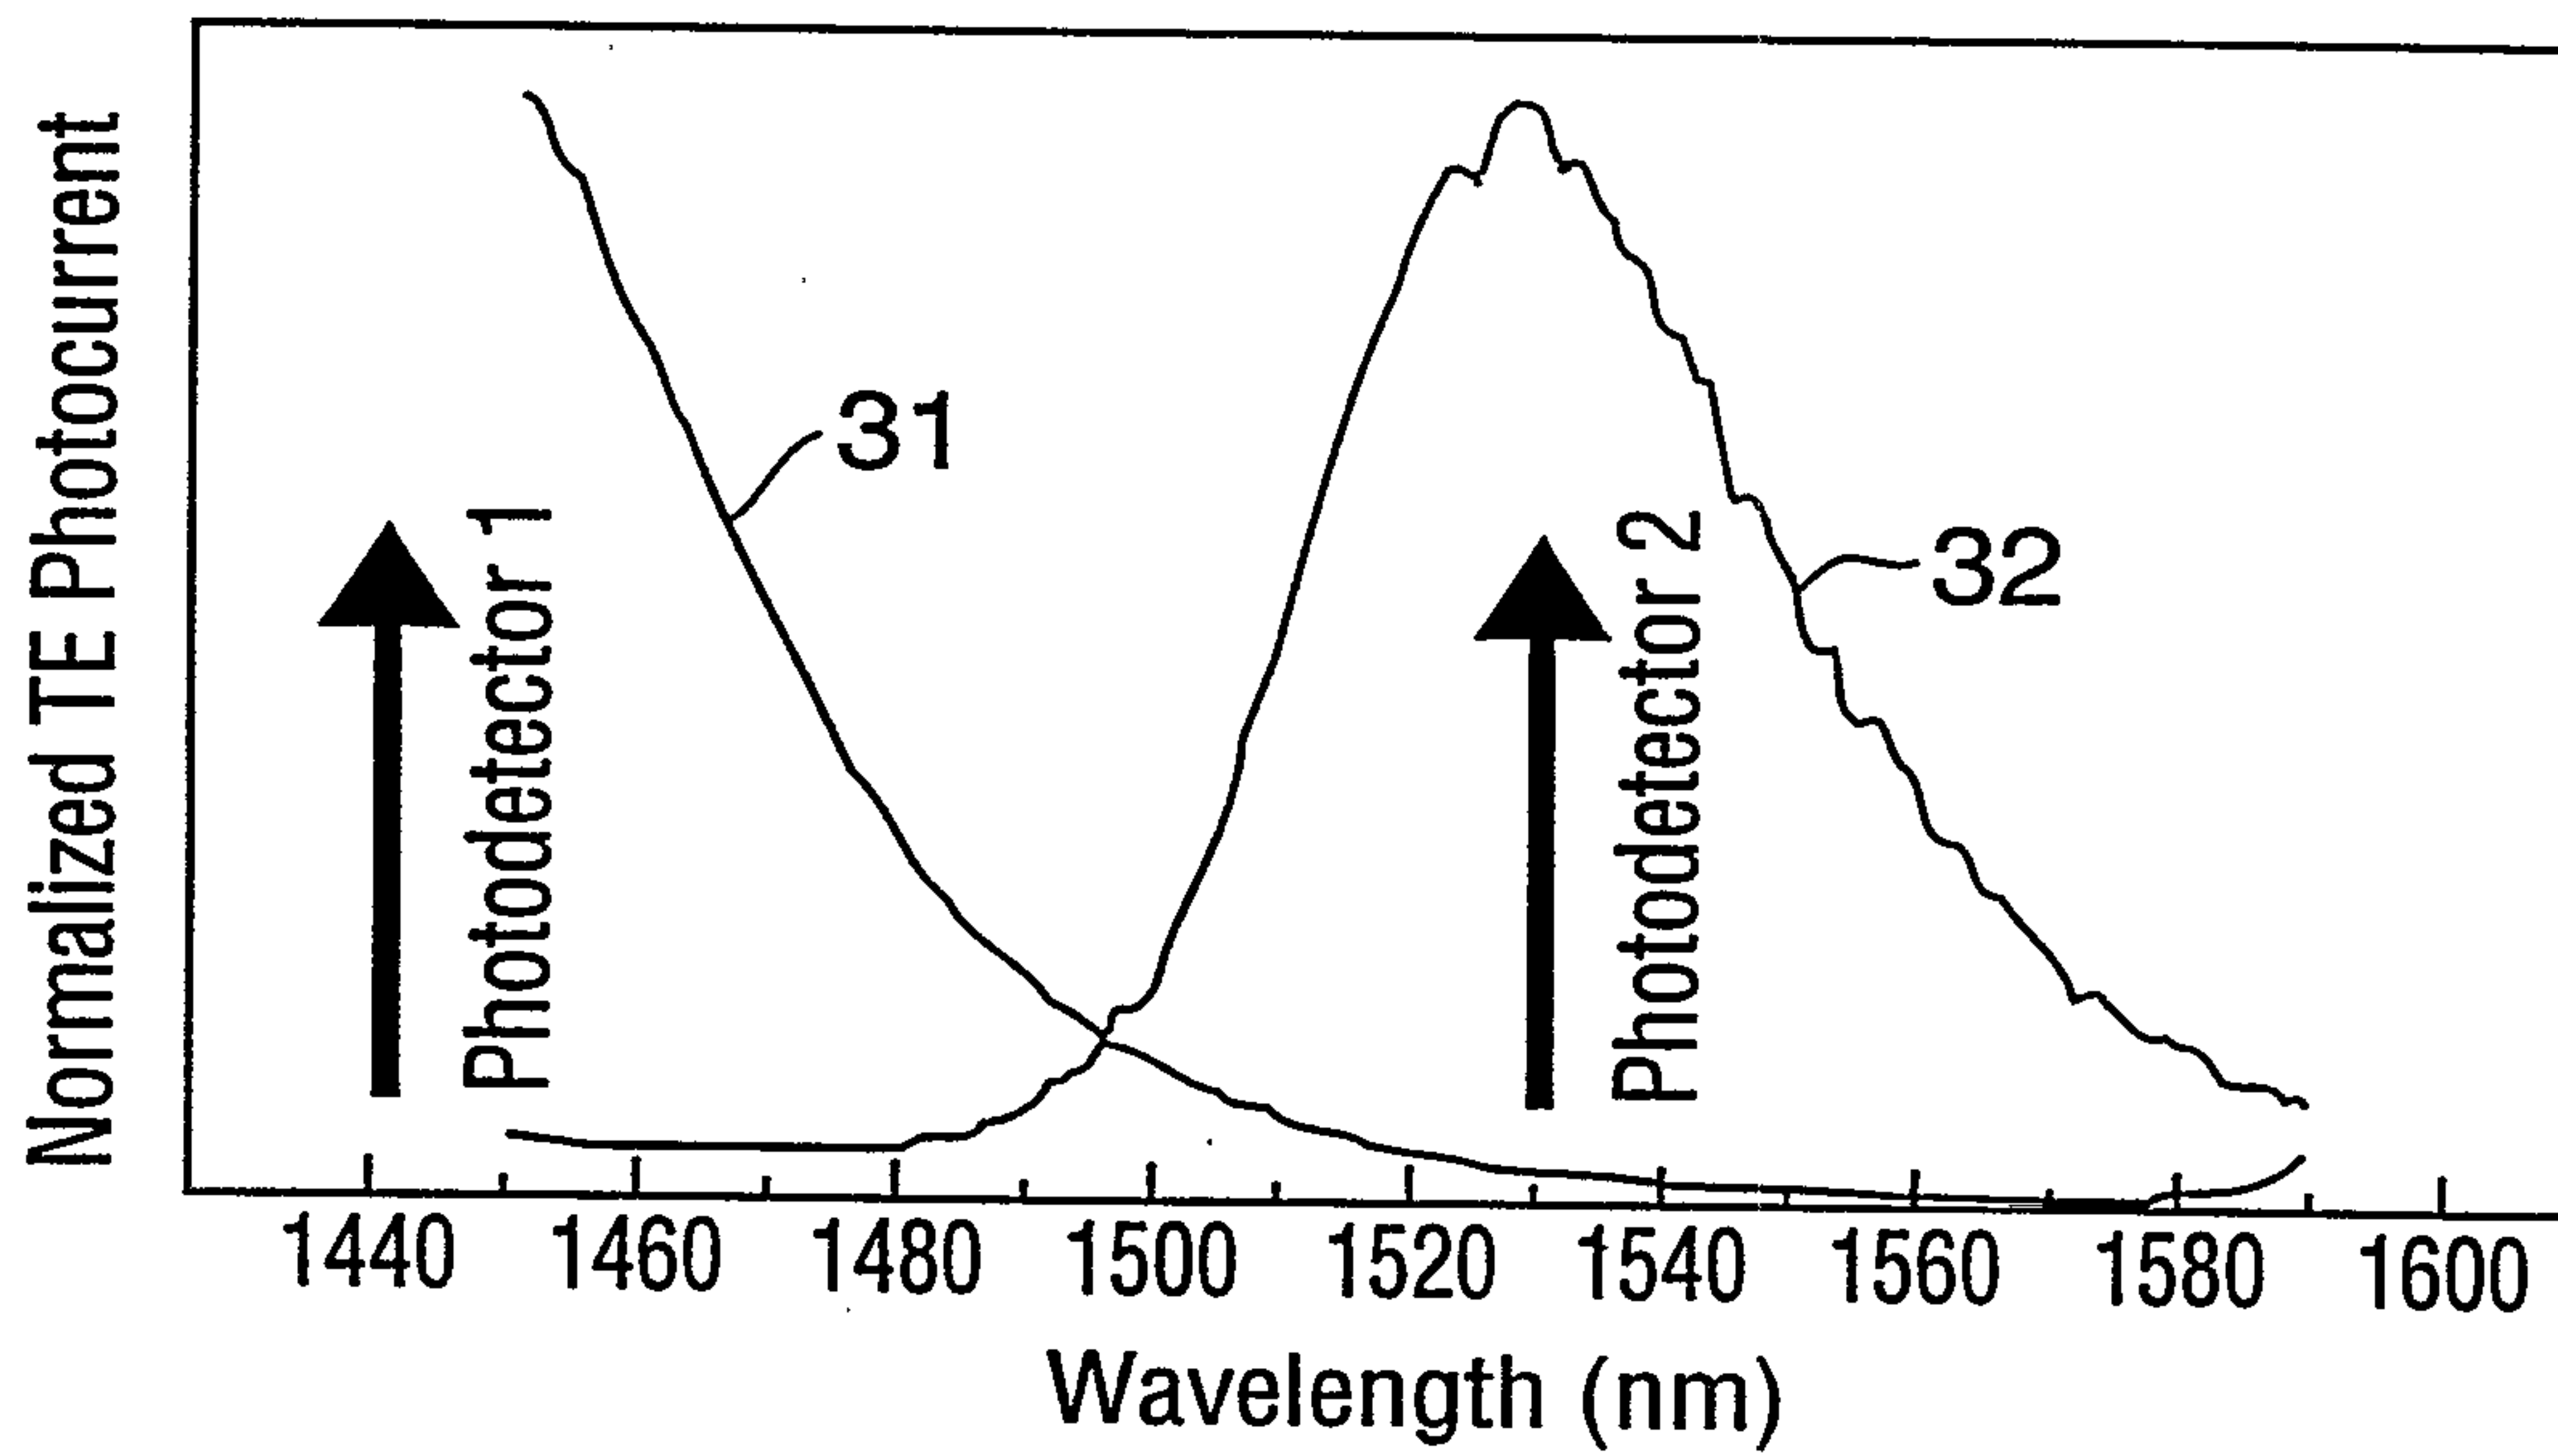


FIG. 3

4/8

**FIG. 4****FIG. 5**

5/8

Scanning Ion Beam Implantation

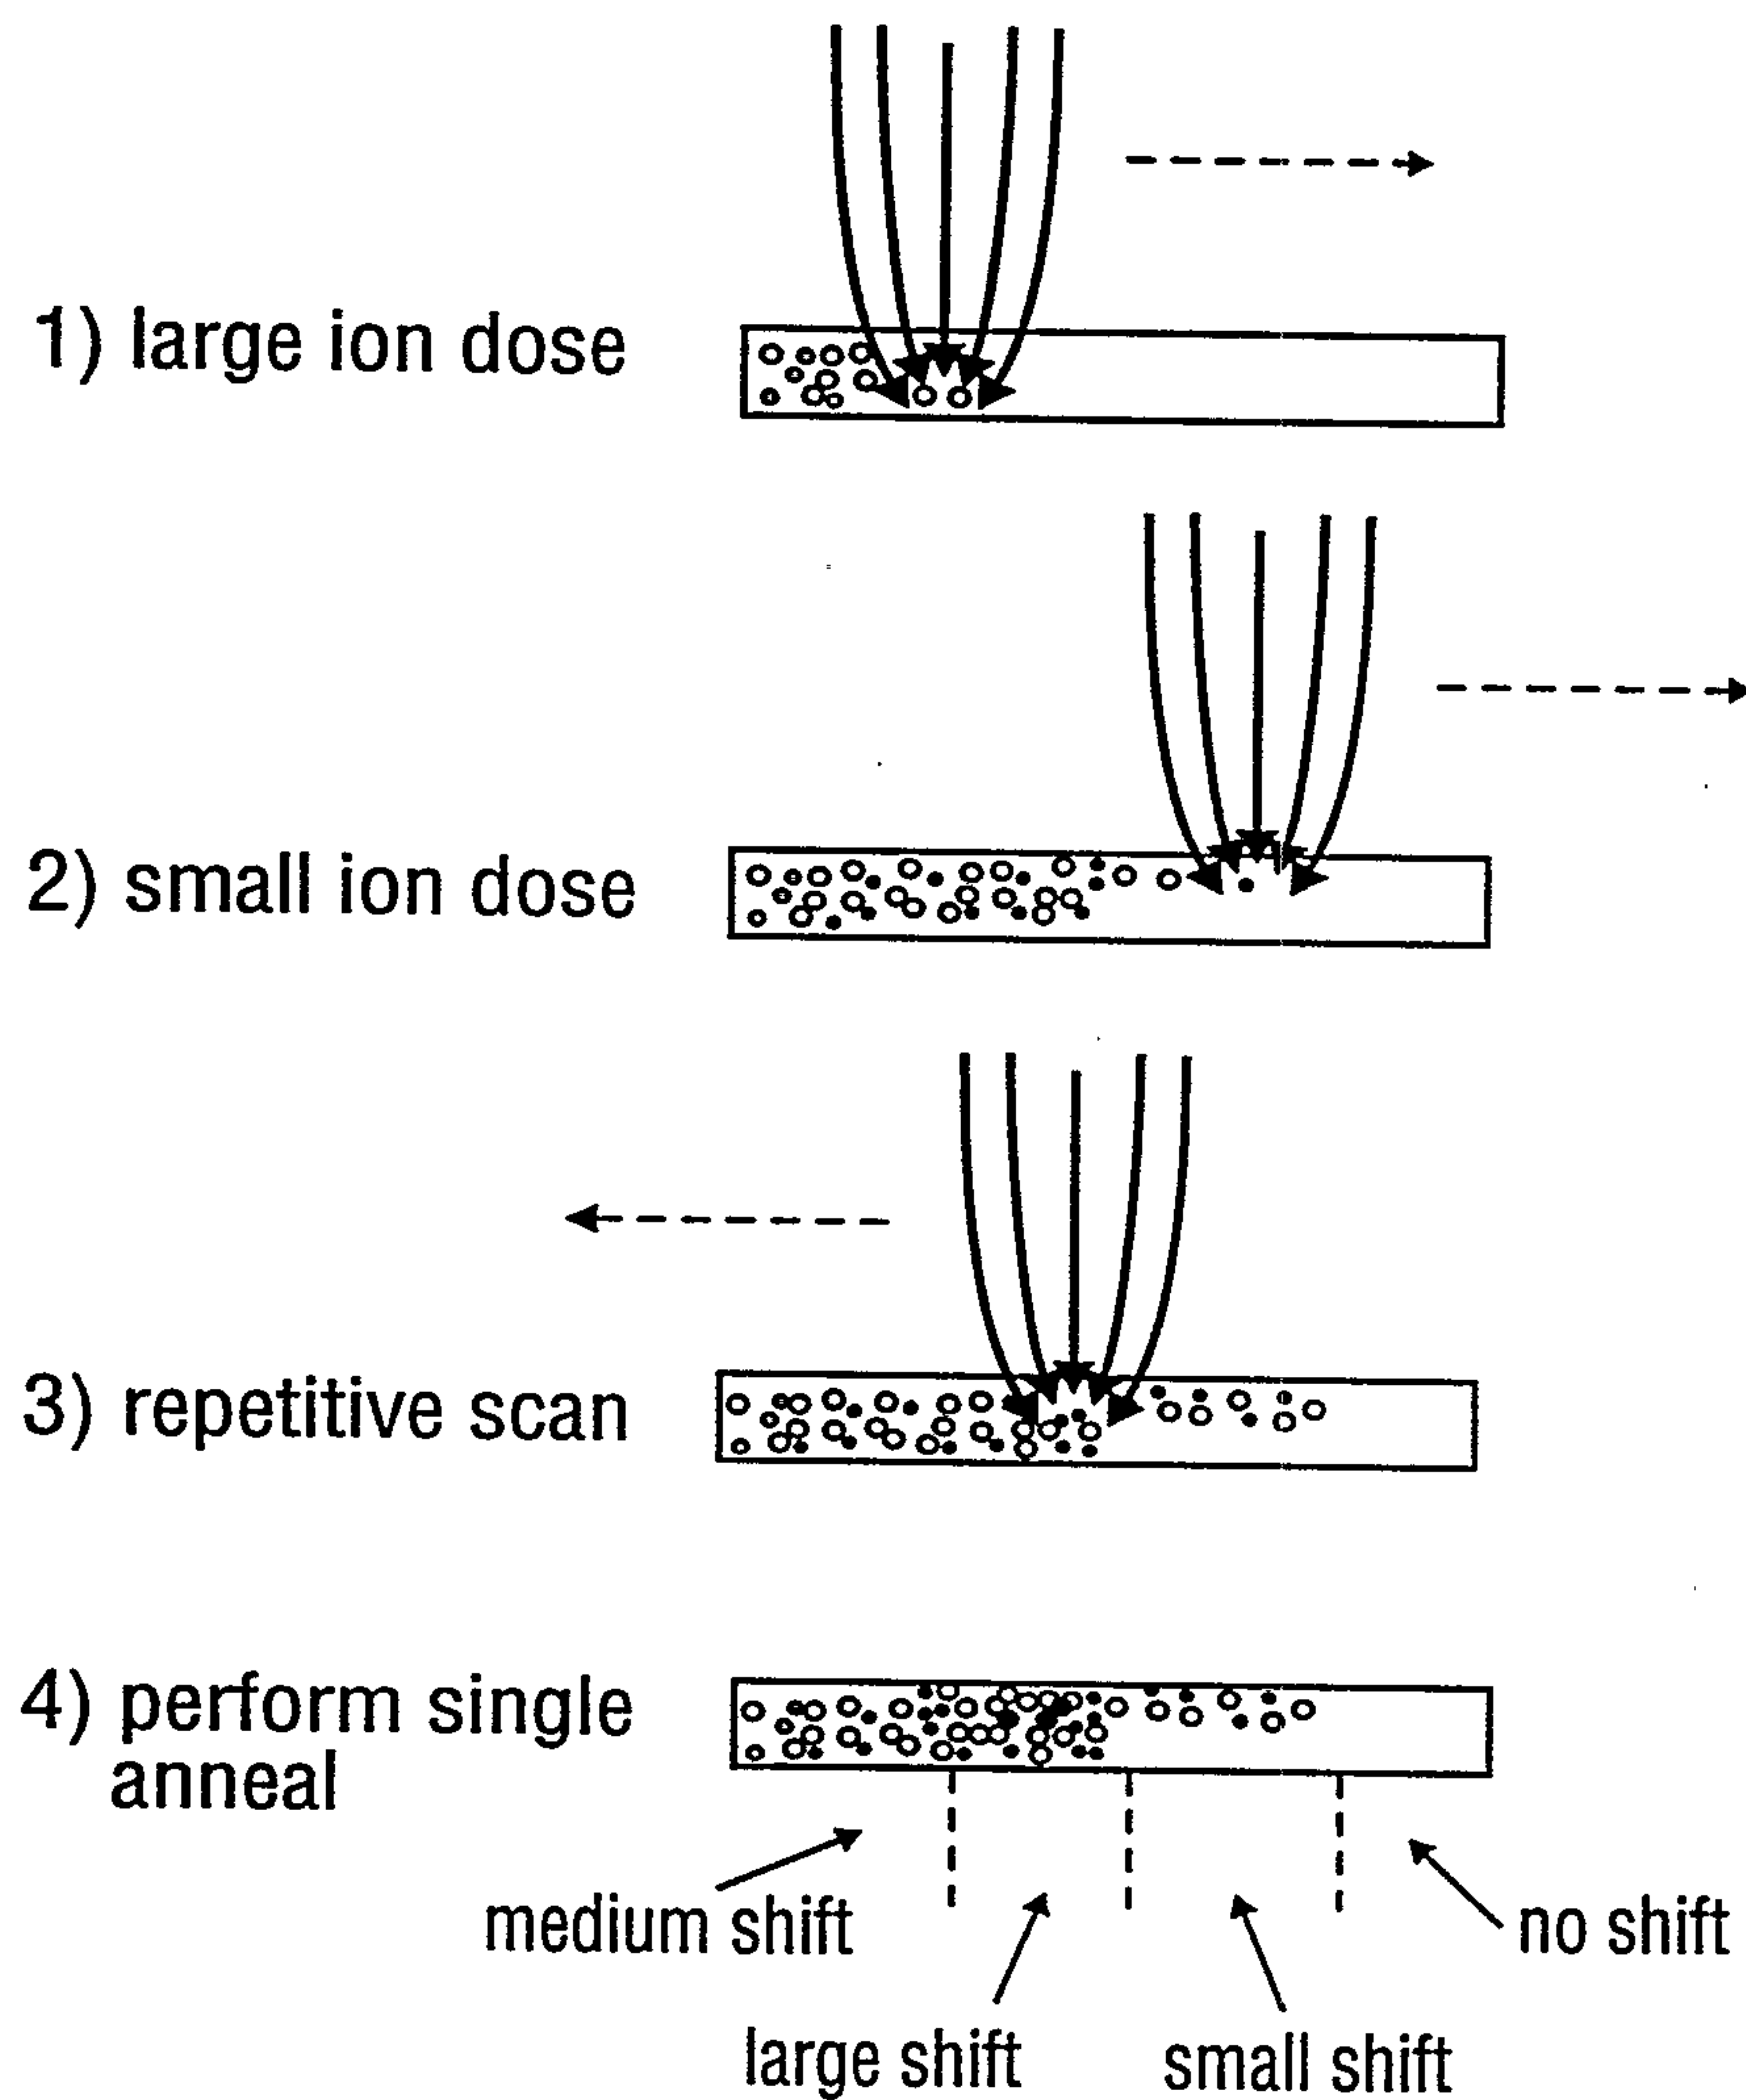


FIG. 6

6/8

Multiple Thickness Mask [Contact Mask]

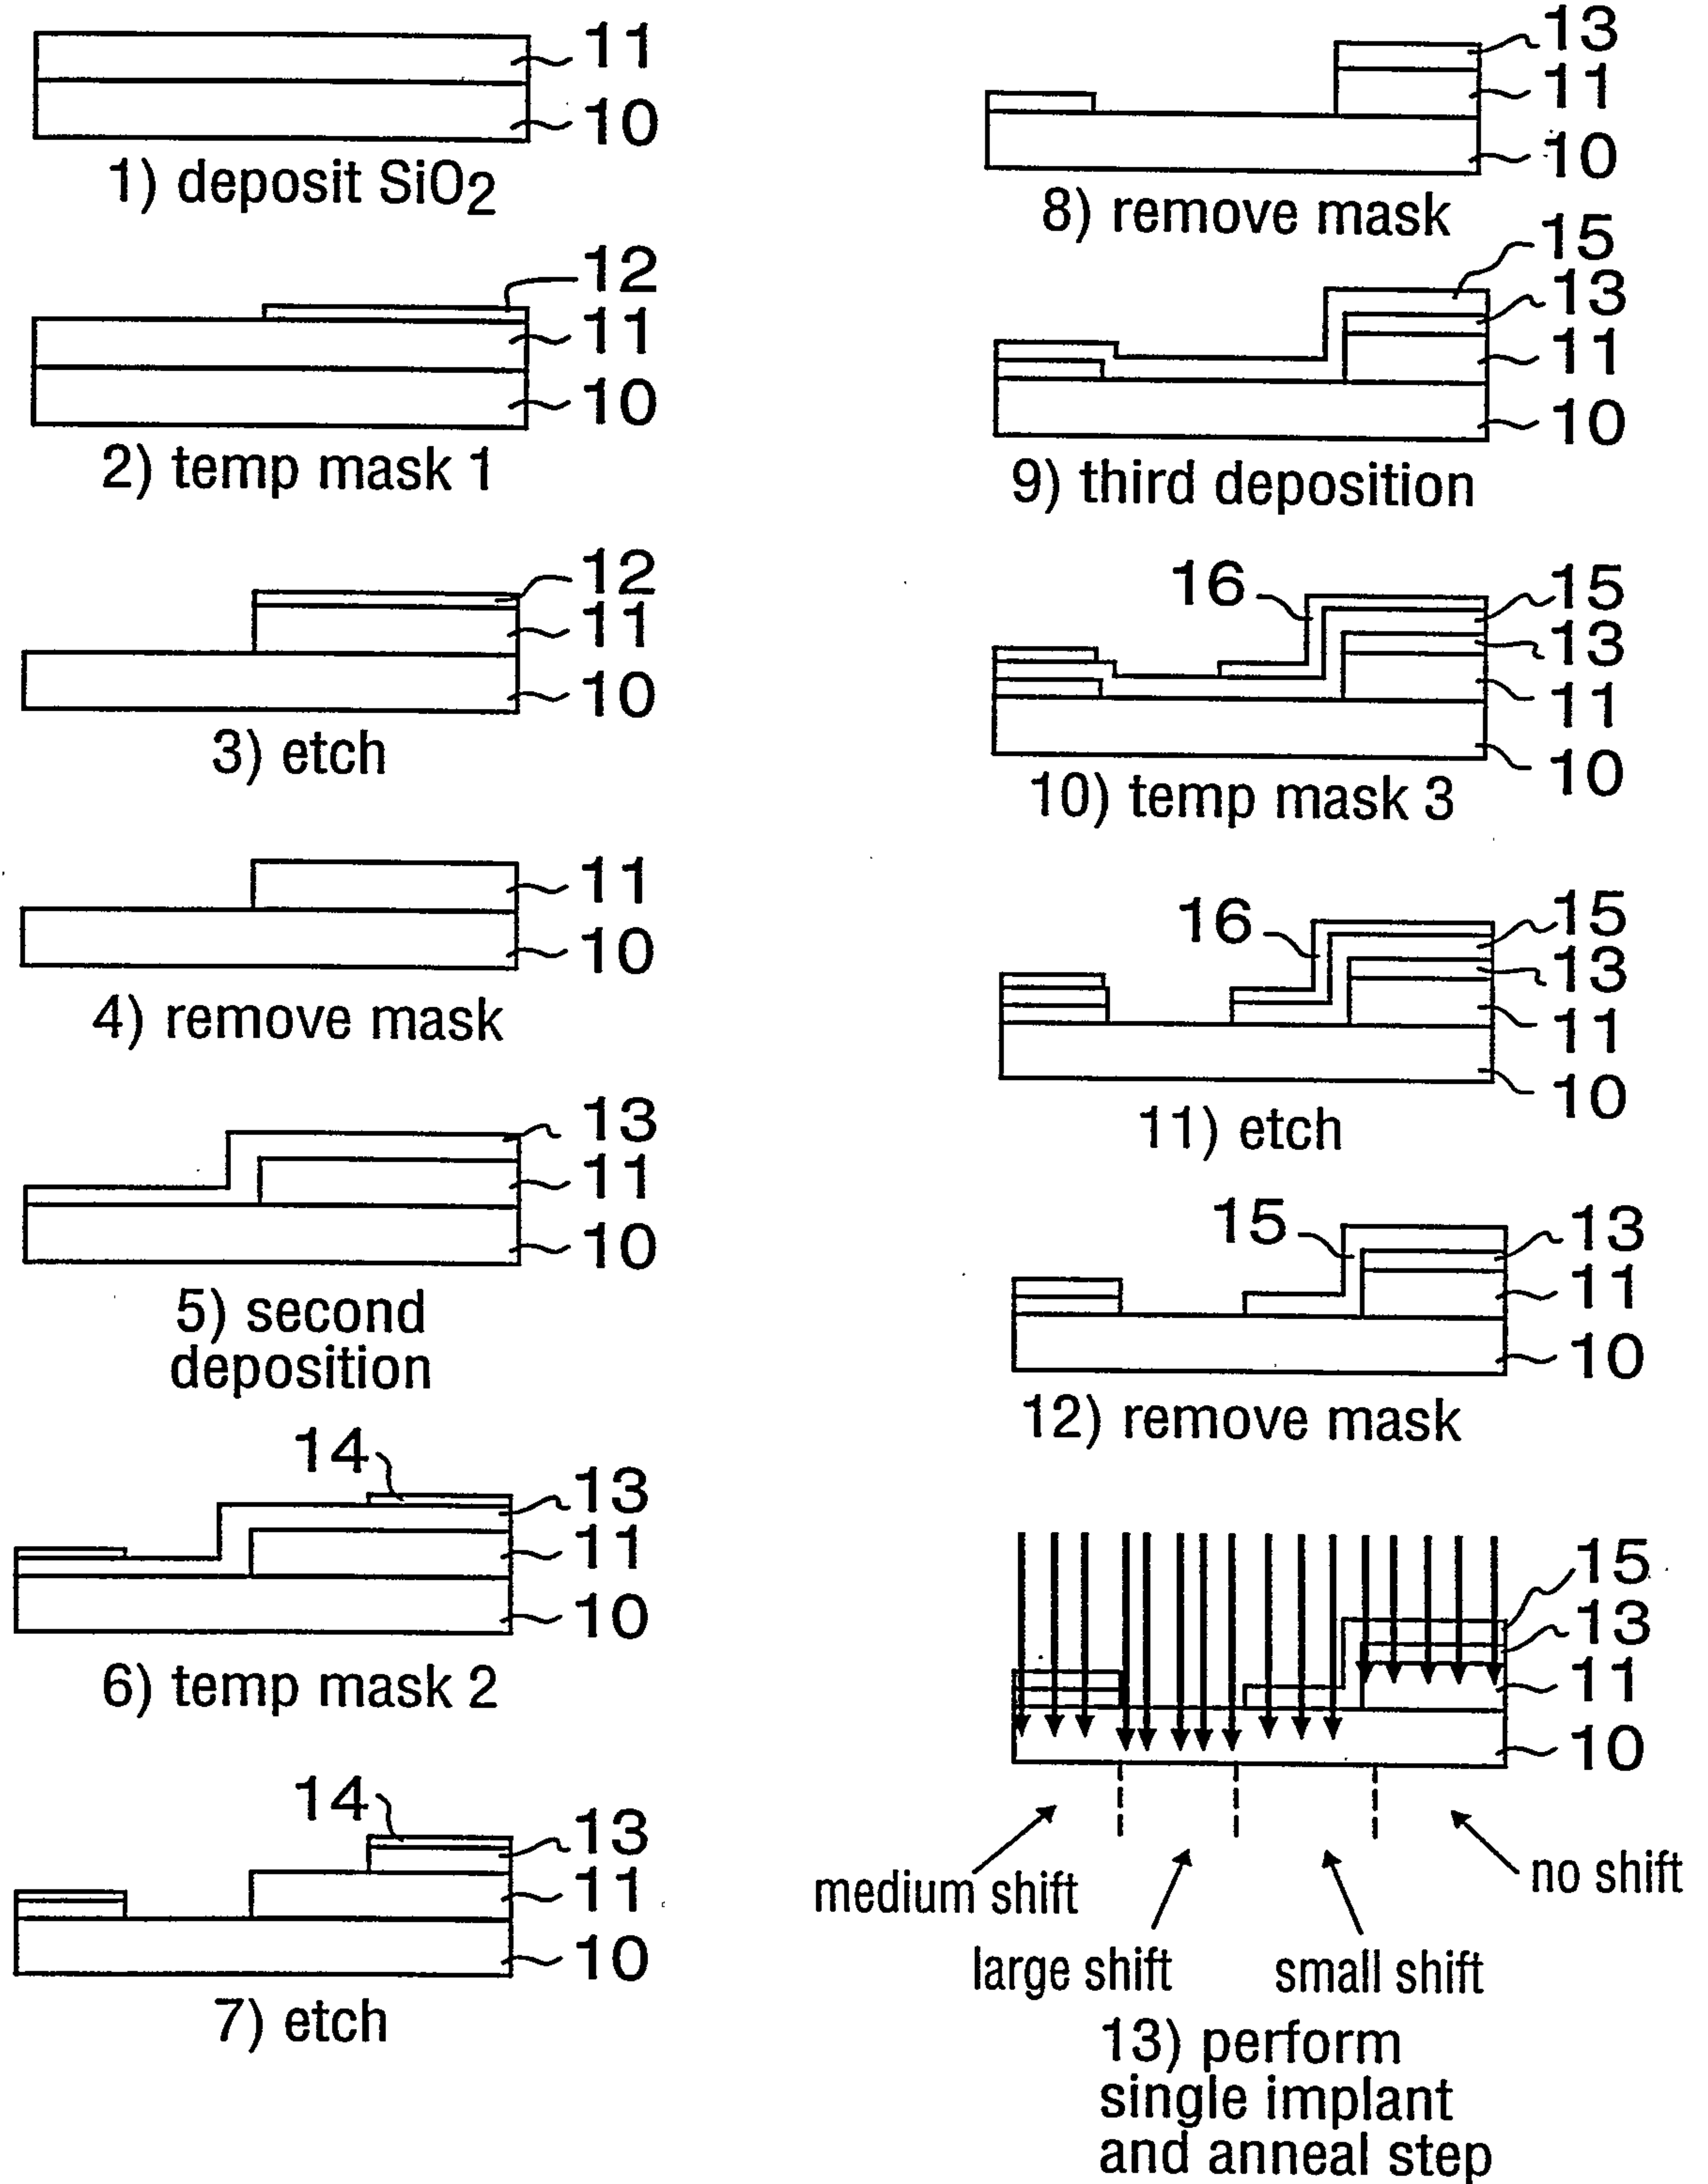




FIG. 7

SUBSTITUTE SHEET (RULE 26)


Mark & Clerk

7/8


Multiple Thickness Mask (a) Contact Masks

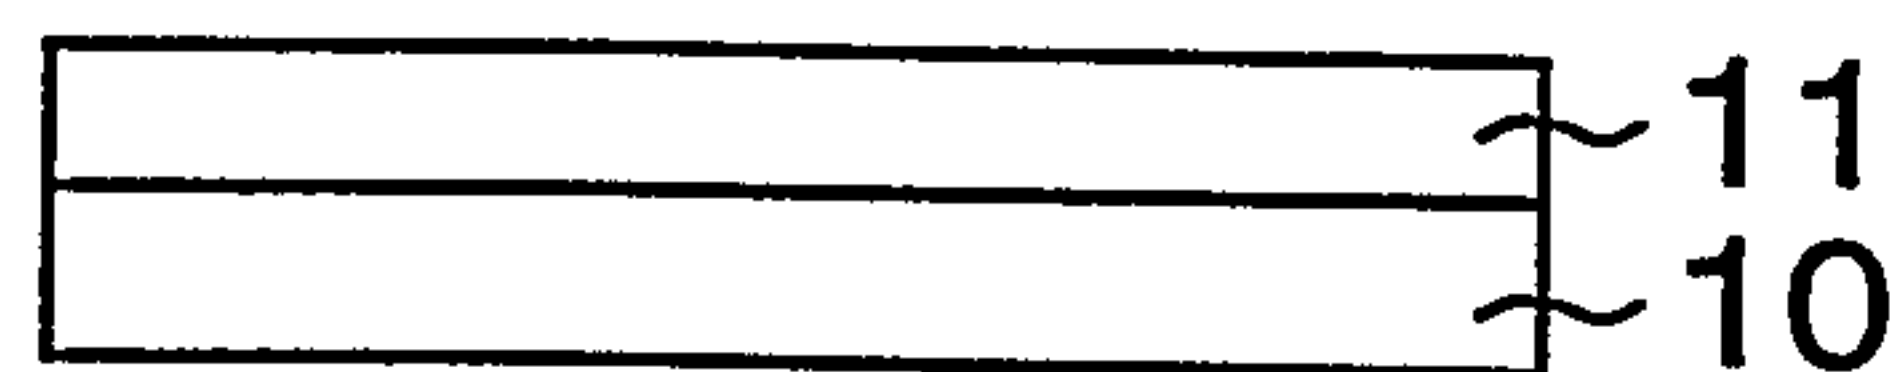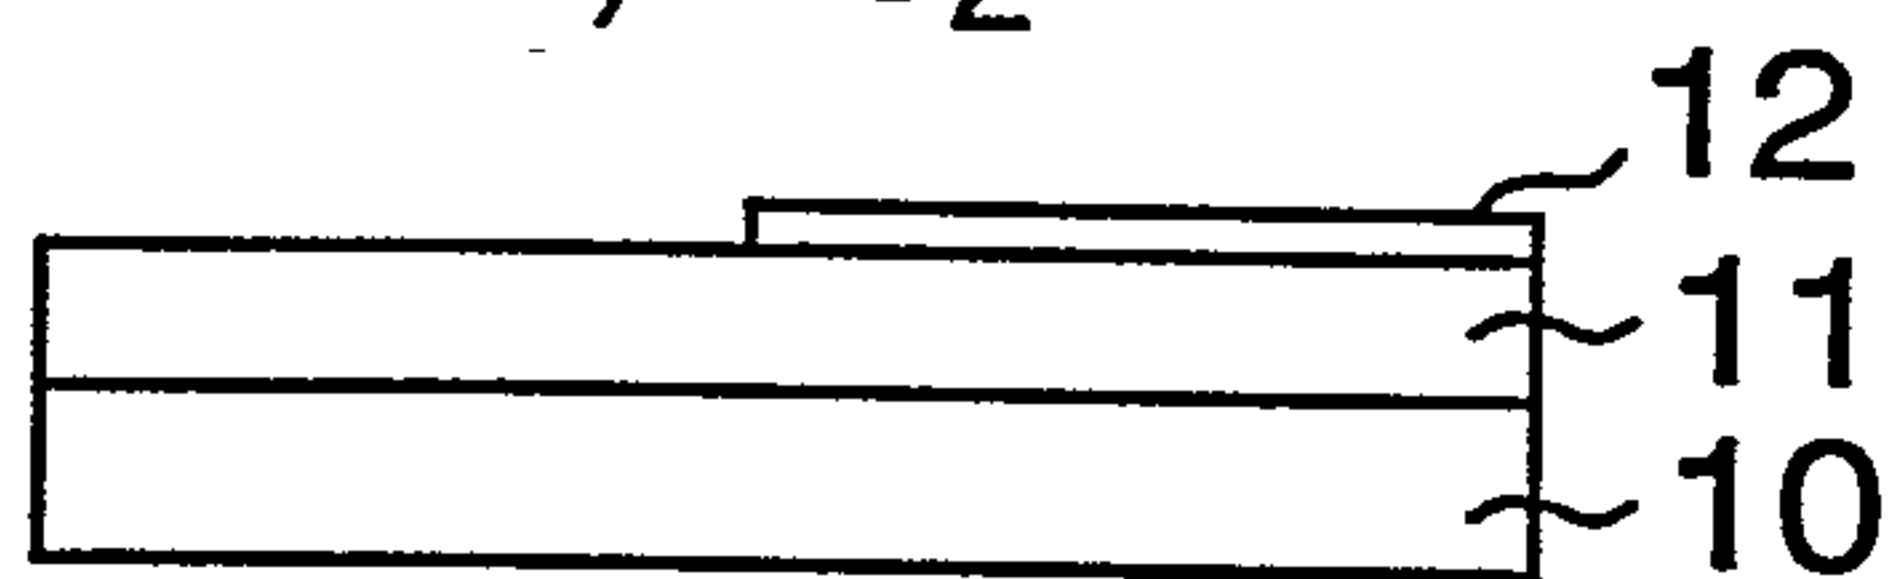1) SiO₂


2) temp mask 1

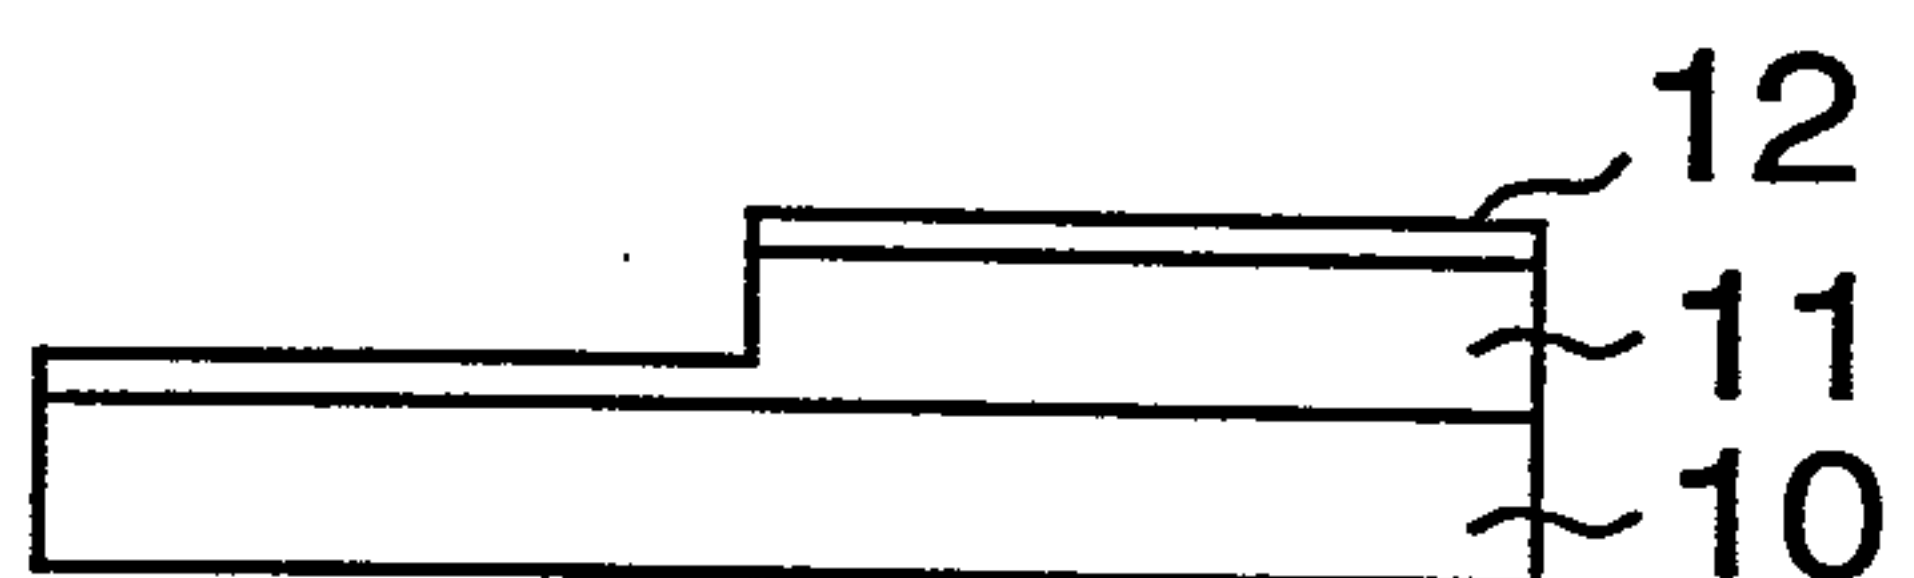


3) deep etch

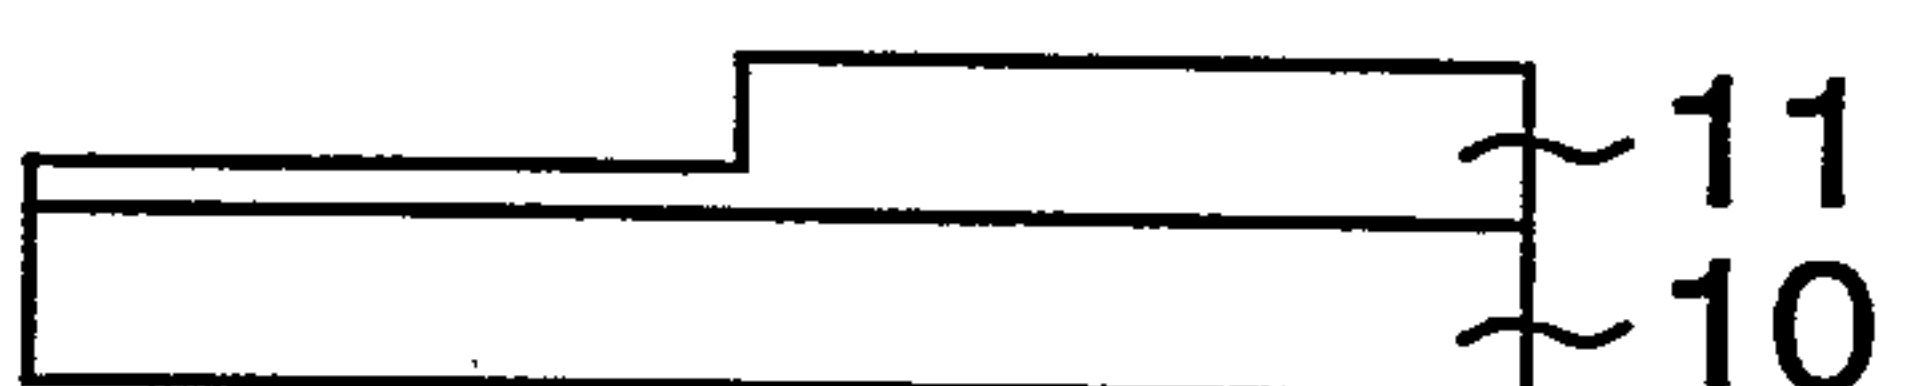


4) remove mask

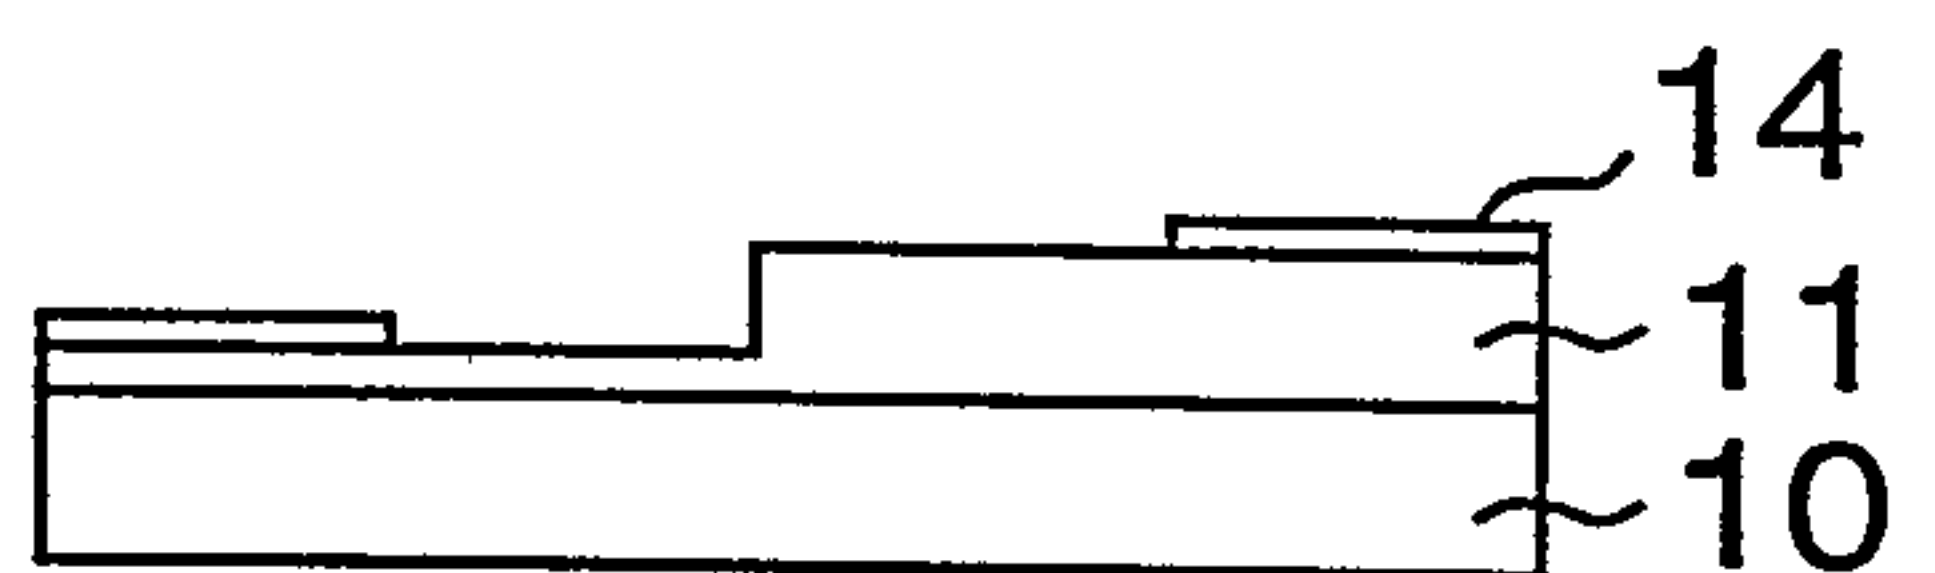


5) temp mask 2

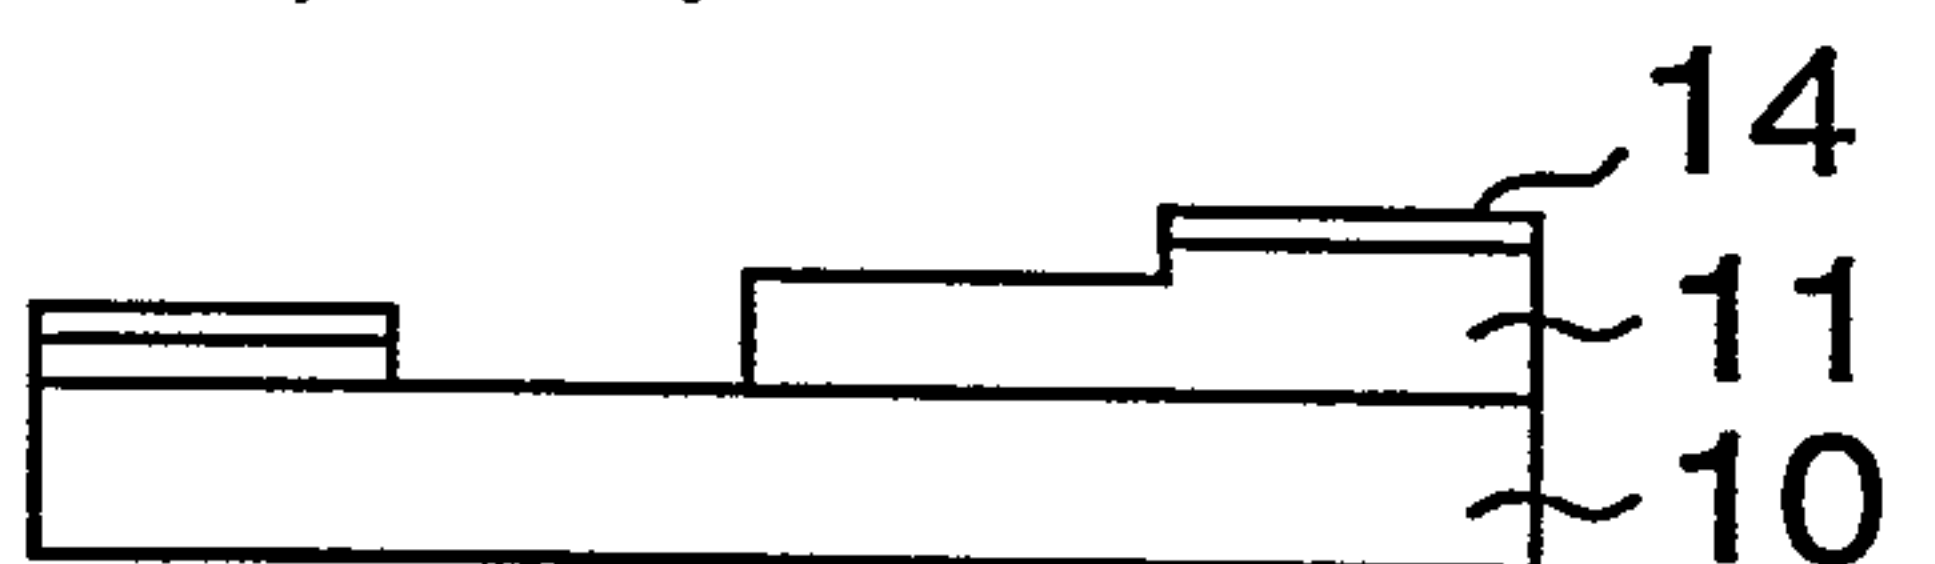

6) shallow mask

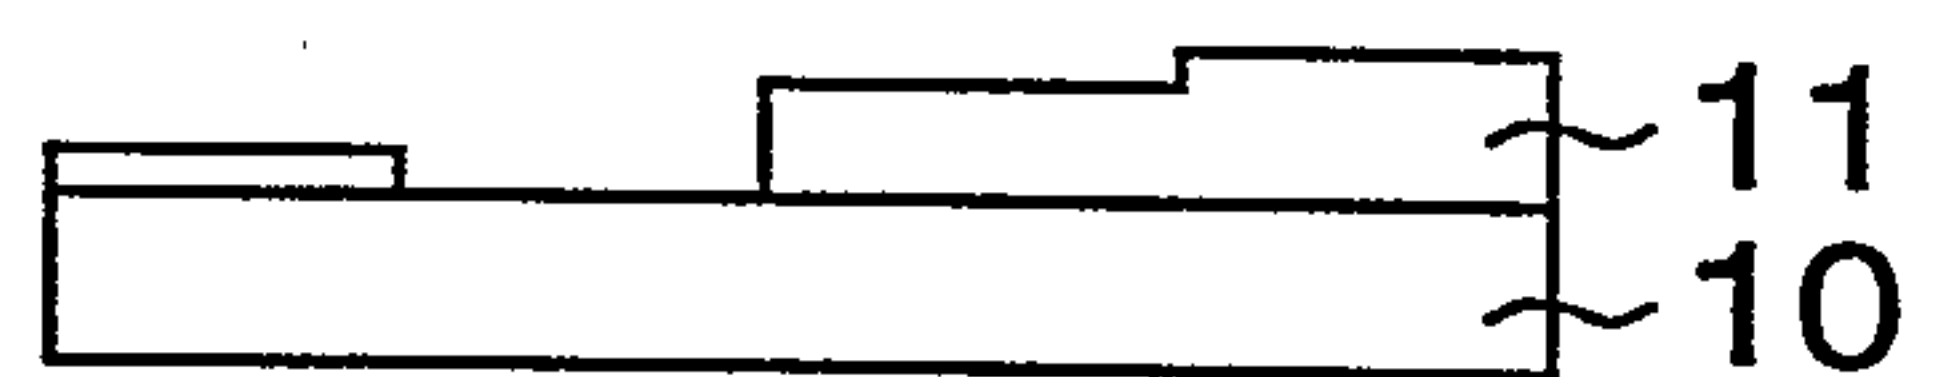


7) remove mask

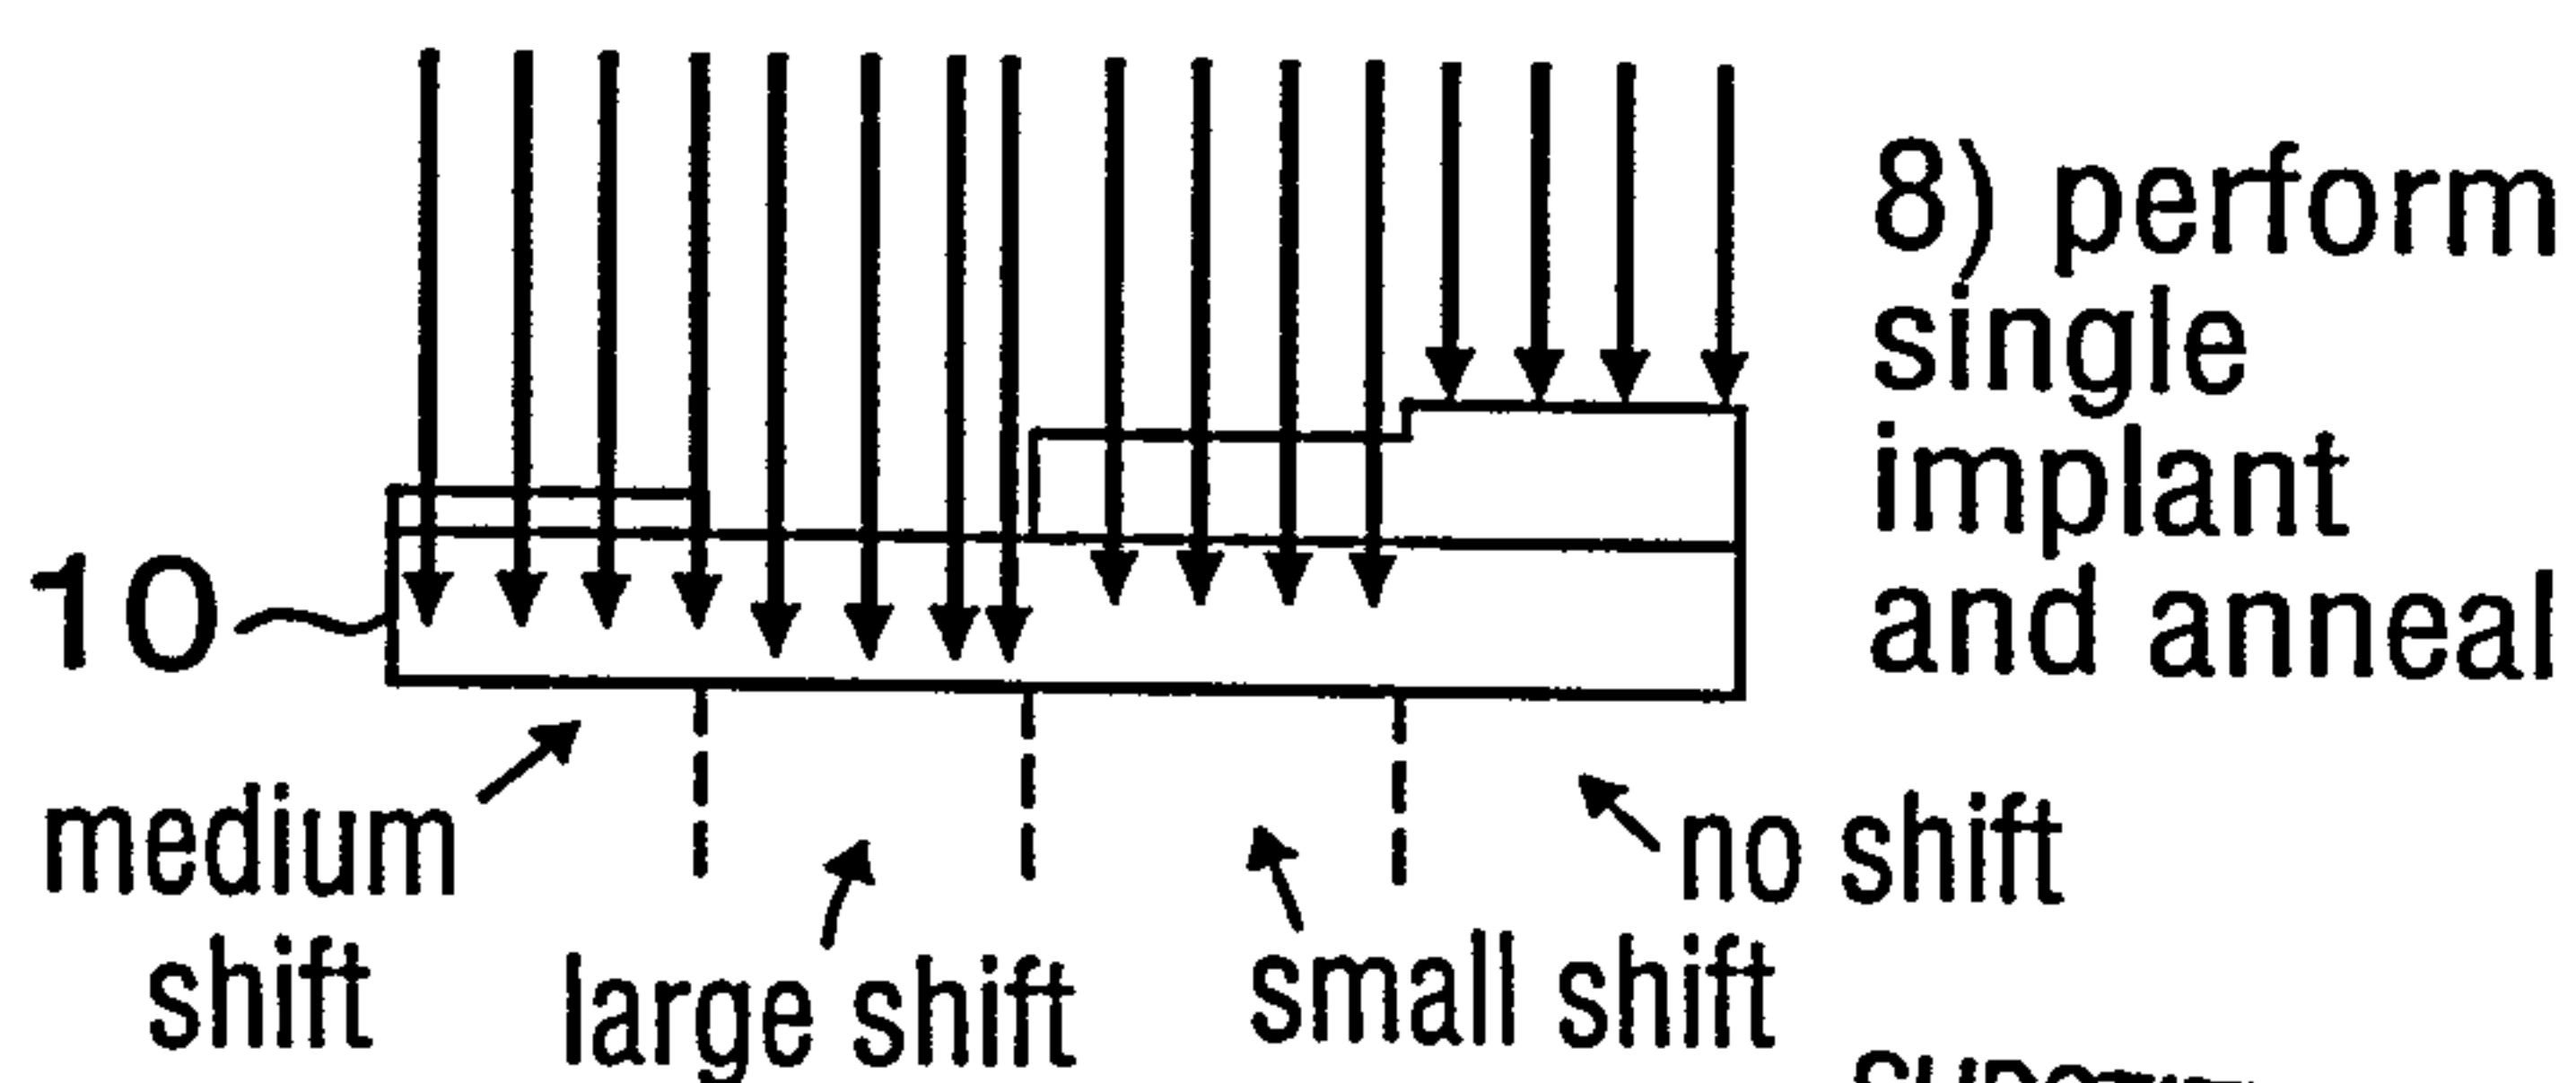8) perform
single
implant
and anneal


Multiple Thickness Mask (b) Contact Masks




1) shadow mask 1

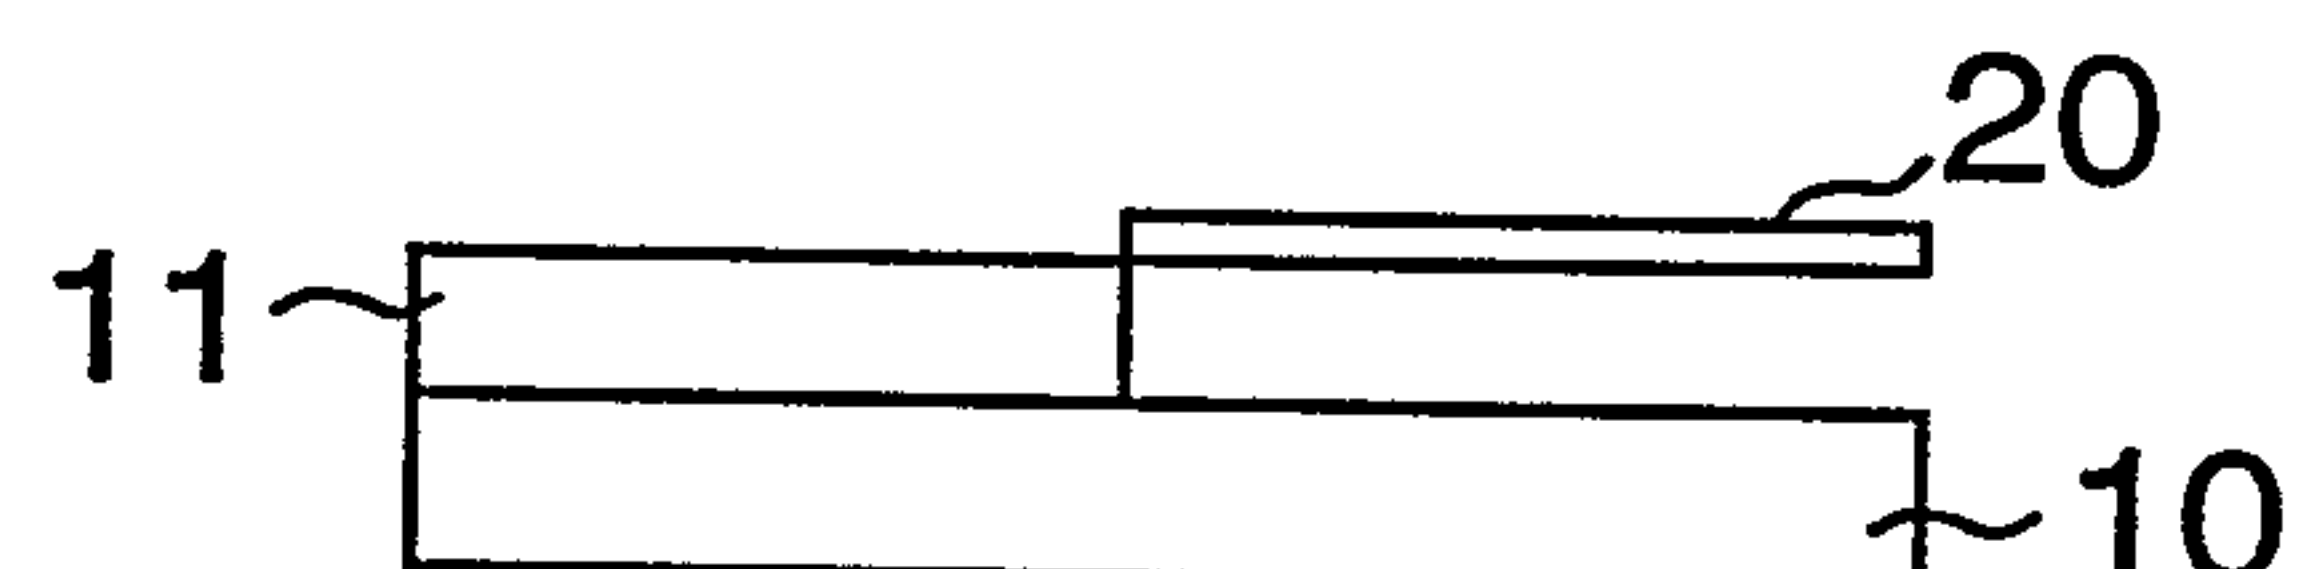


2) thick layer

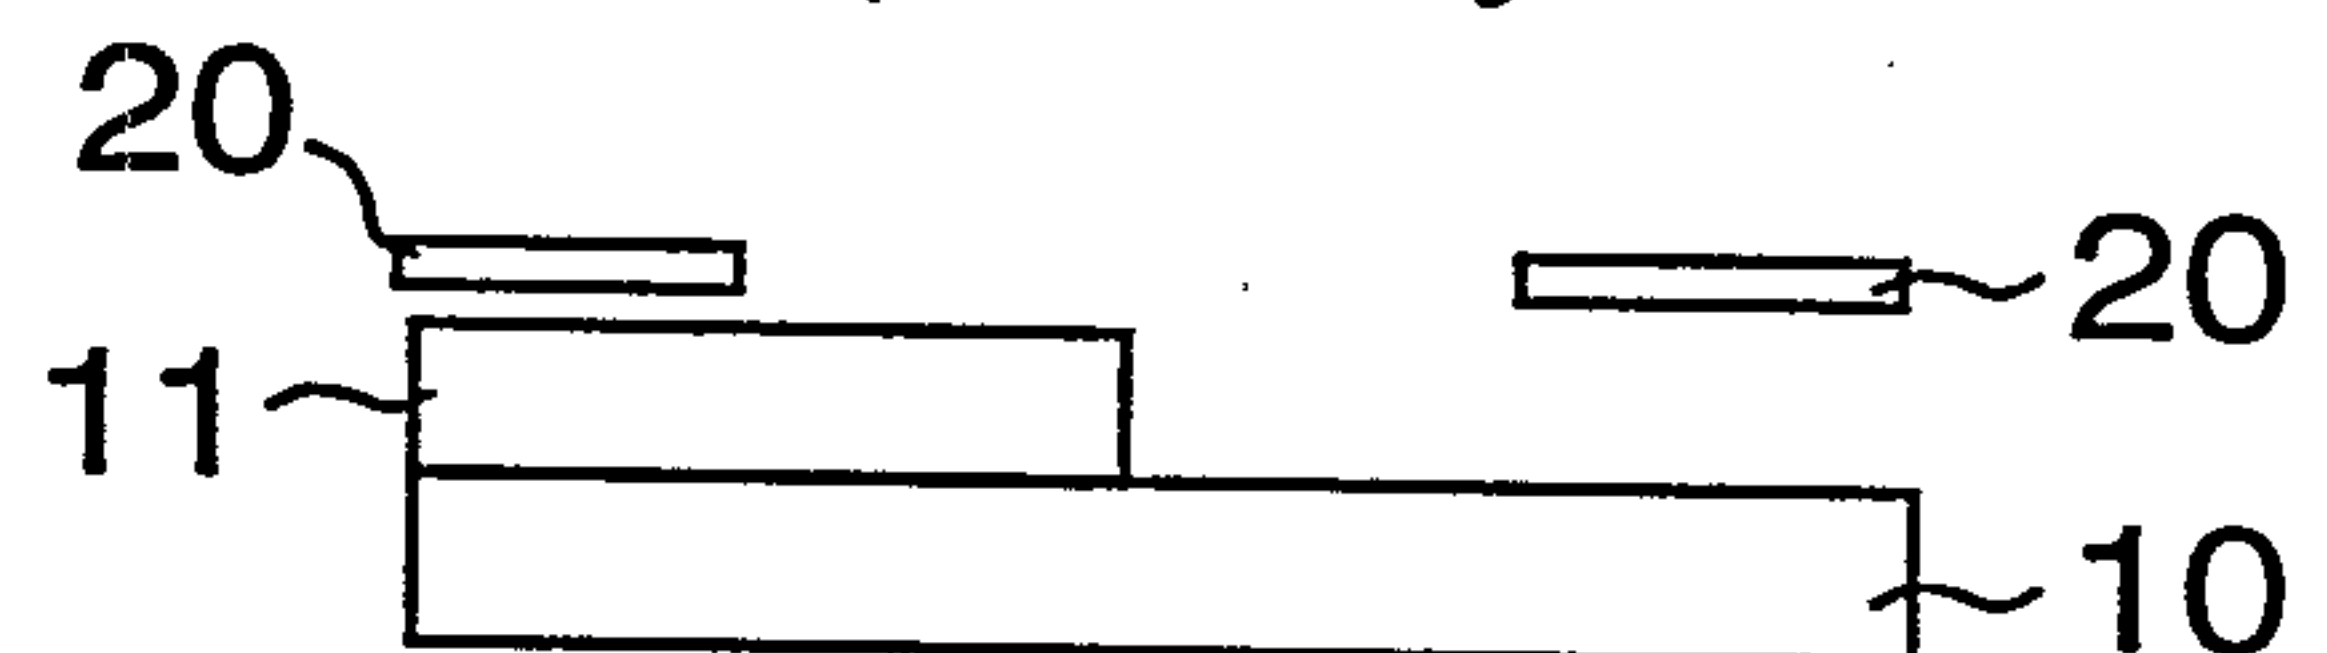

3) shadow mask 2

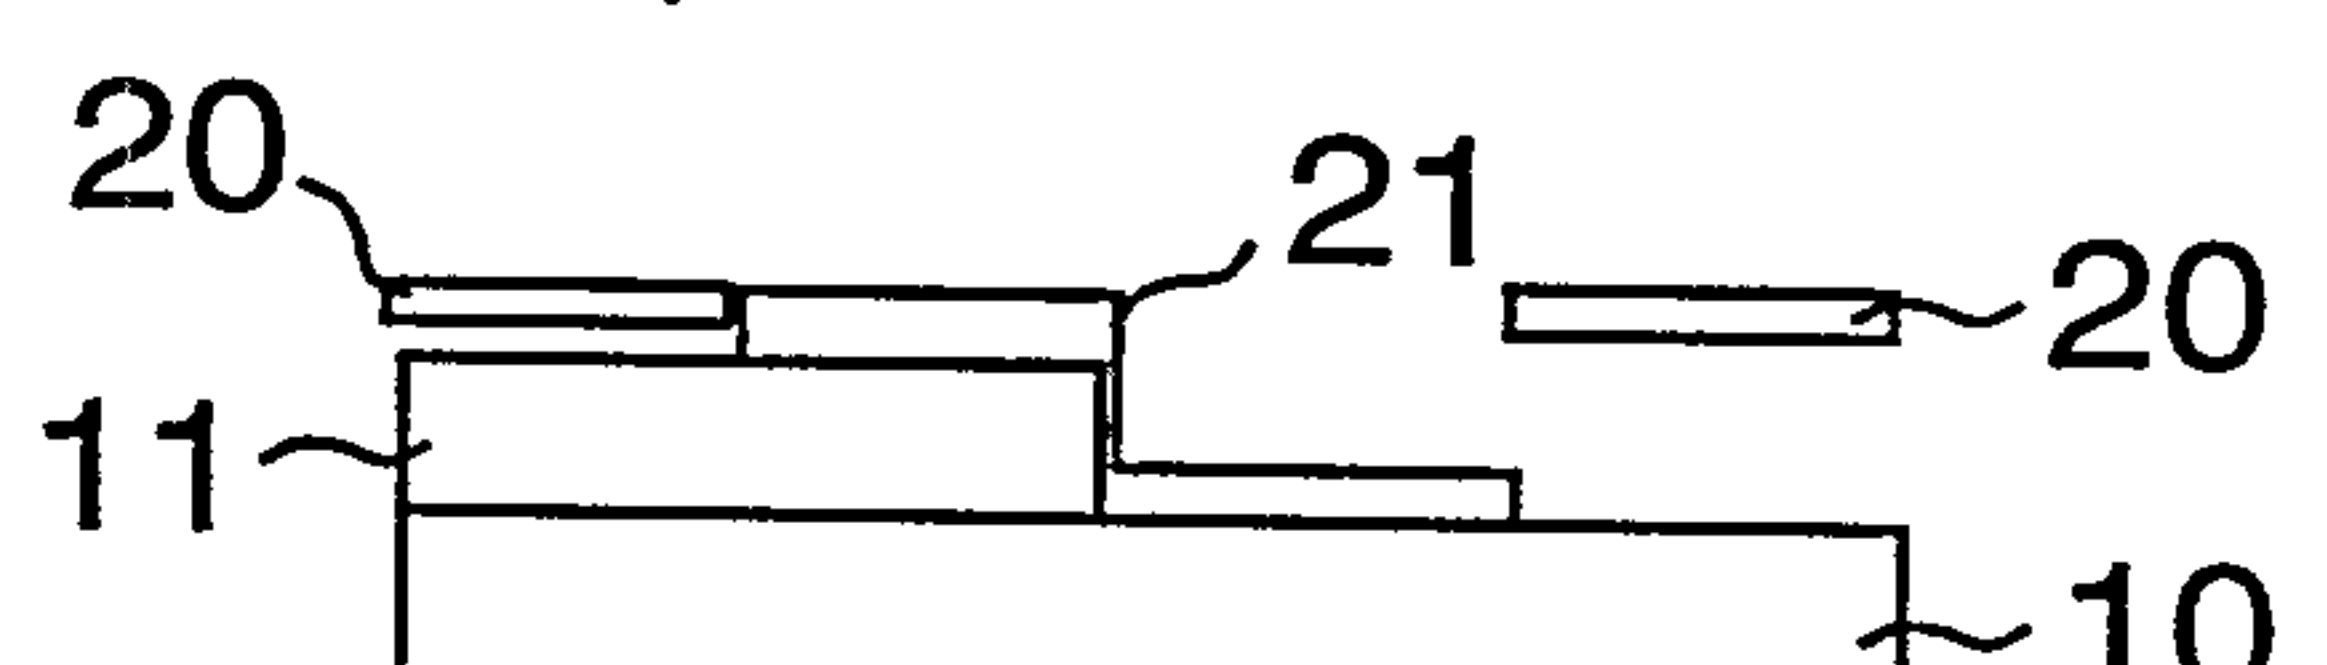


4) thin layer

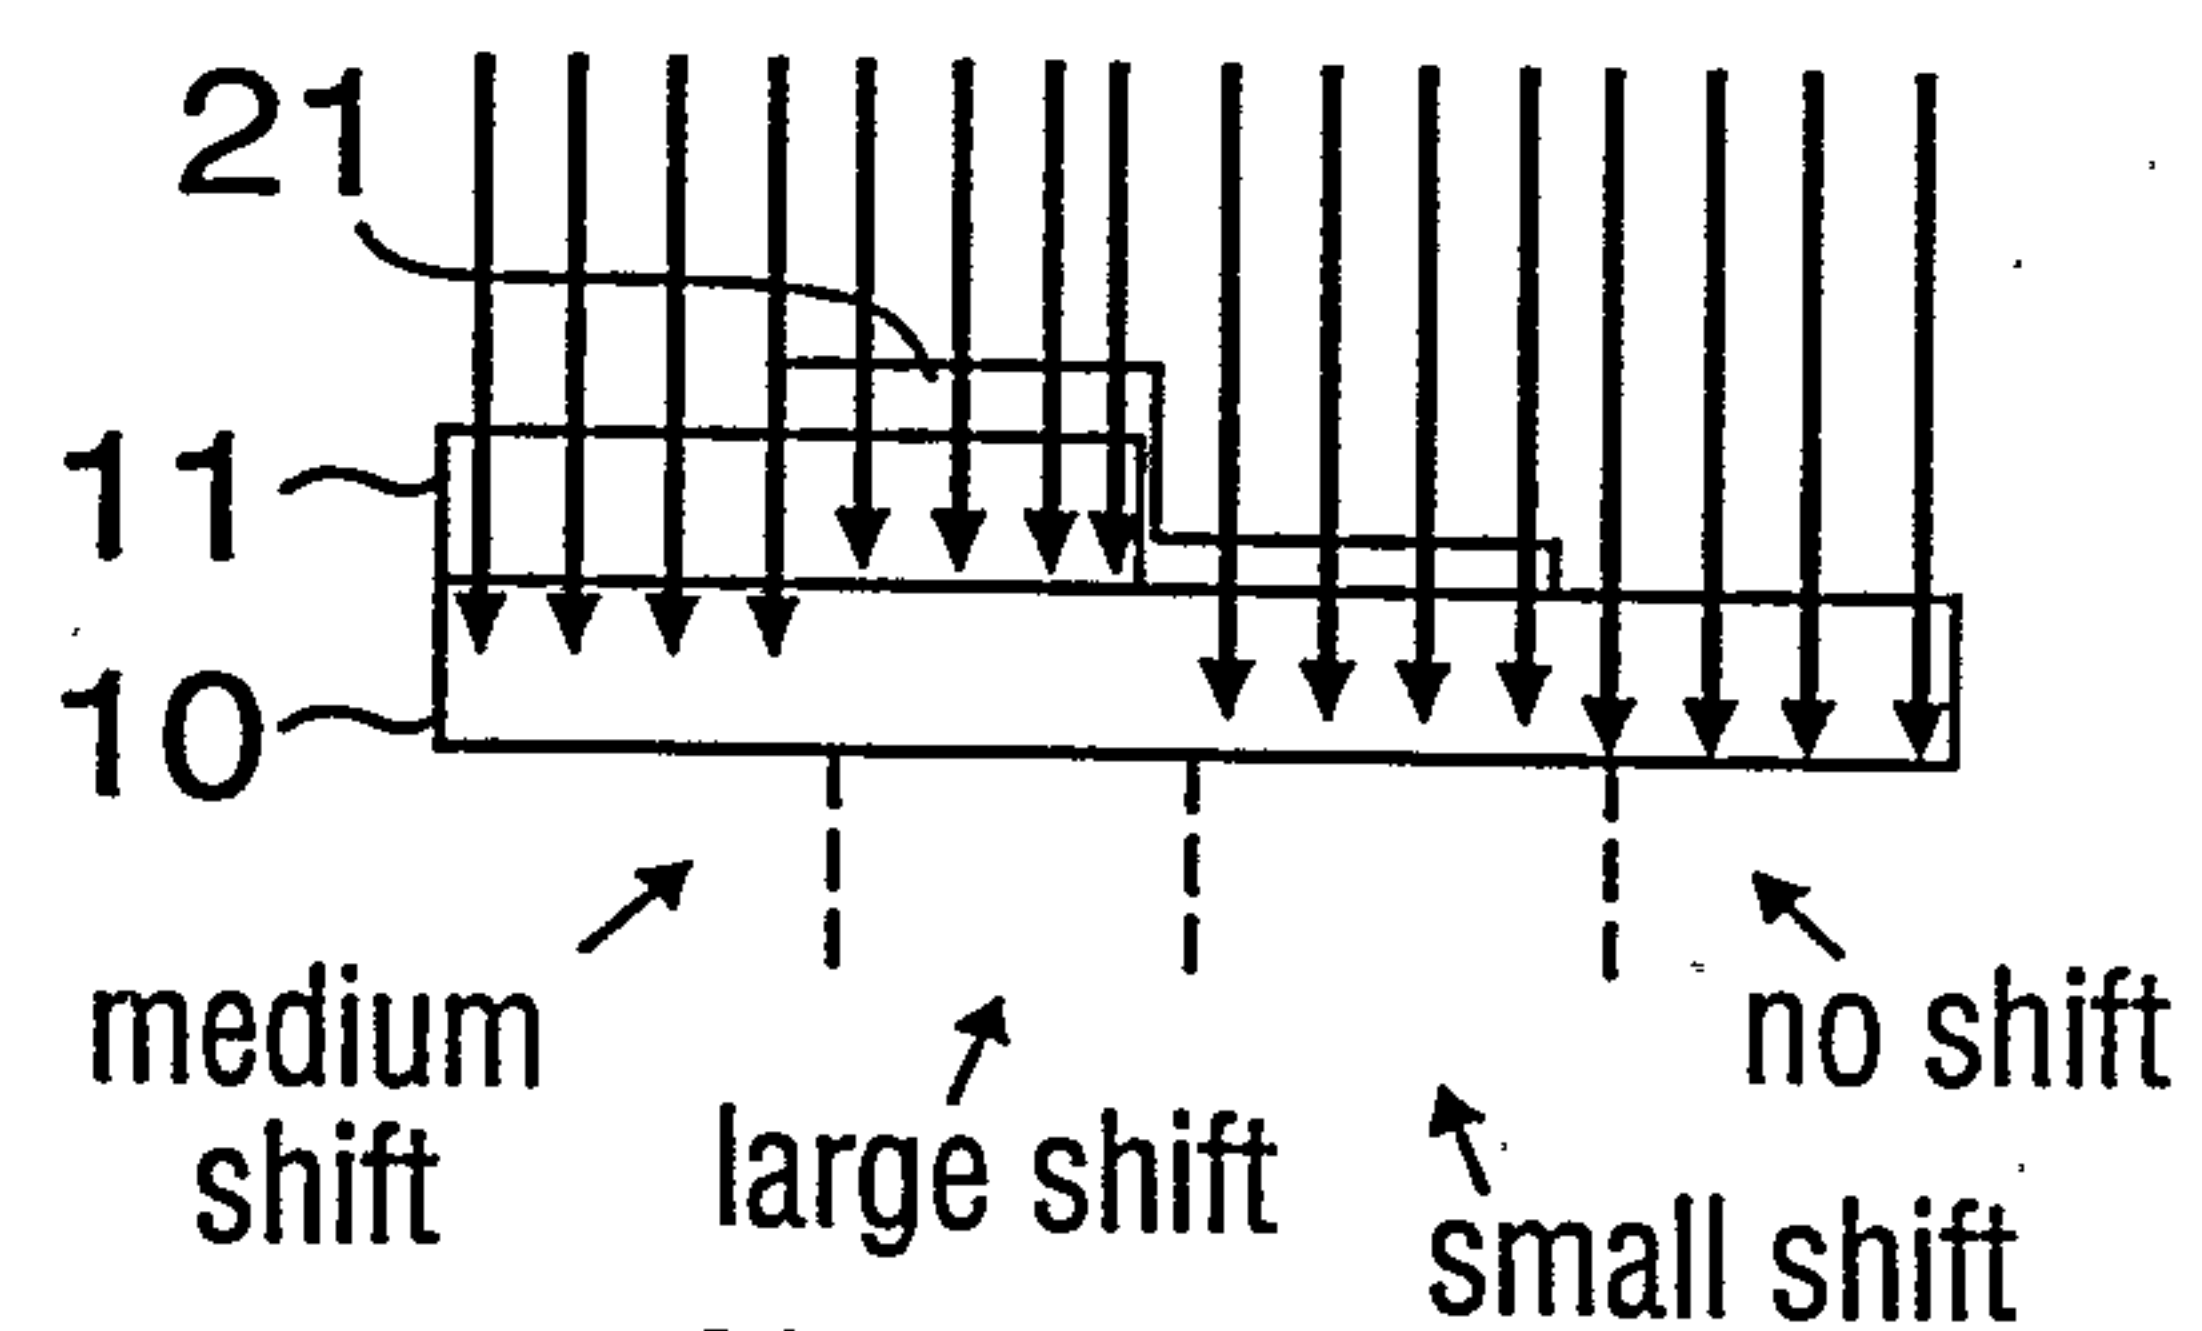
5) perform
single implant
and anneal**FIG. 8b****FIG. 8a**

8/8

Multiple Implants (a) Contact Masks

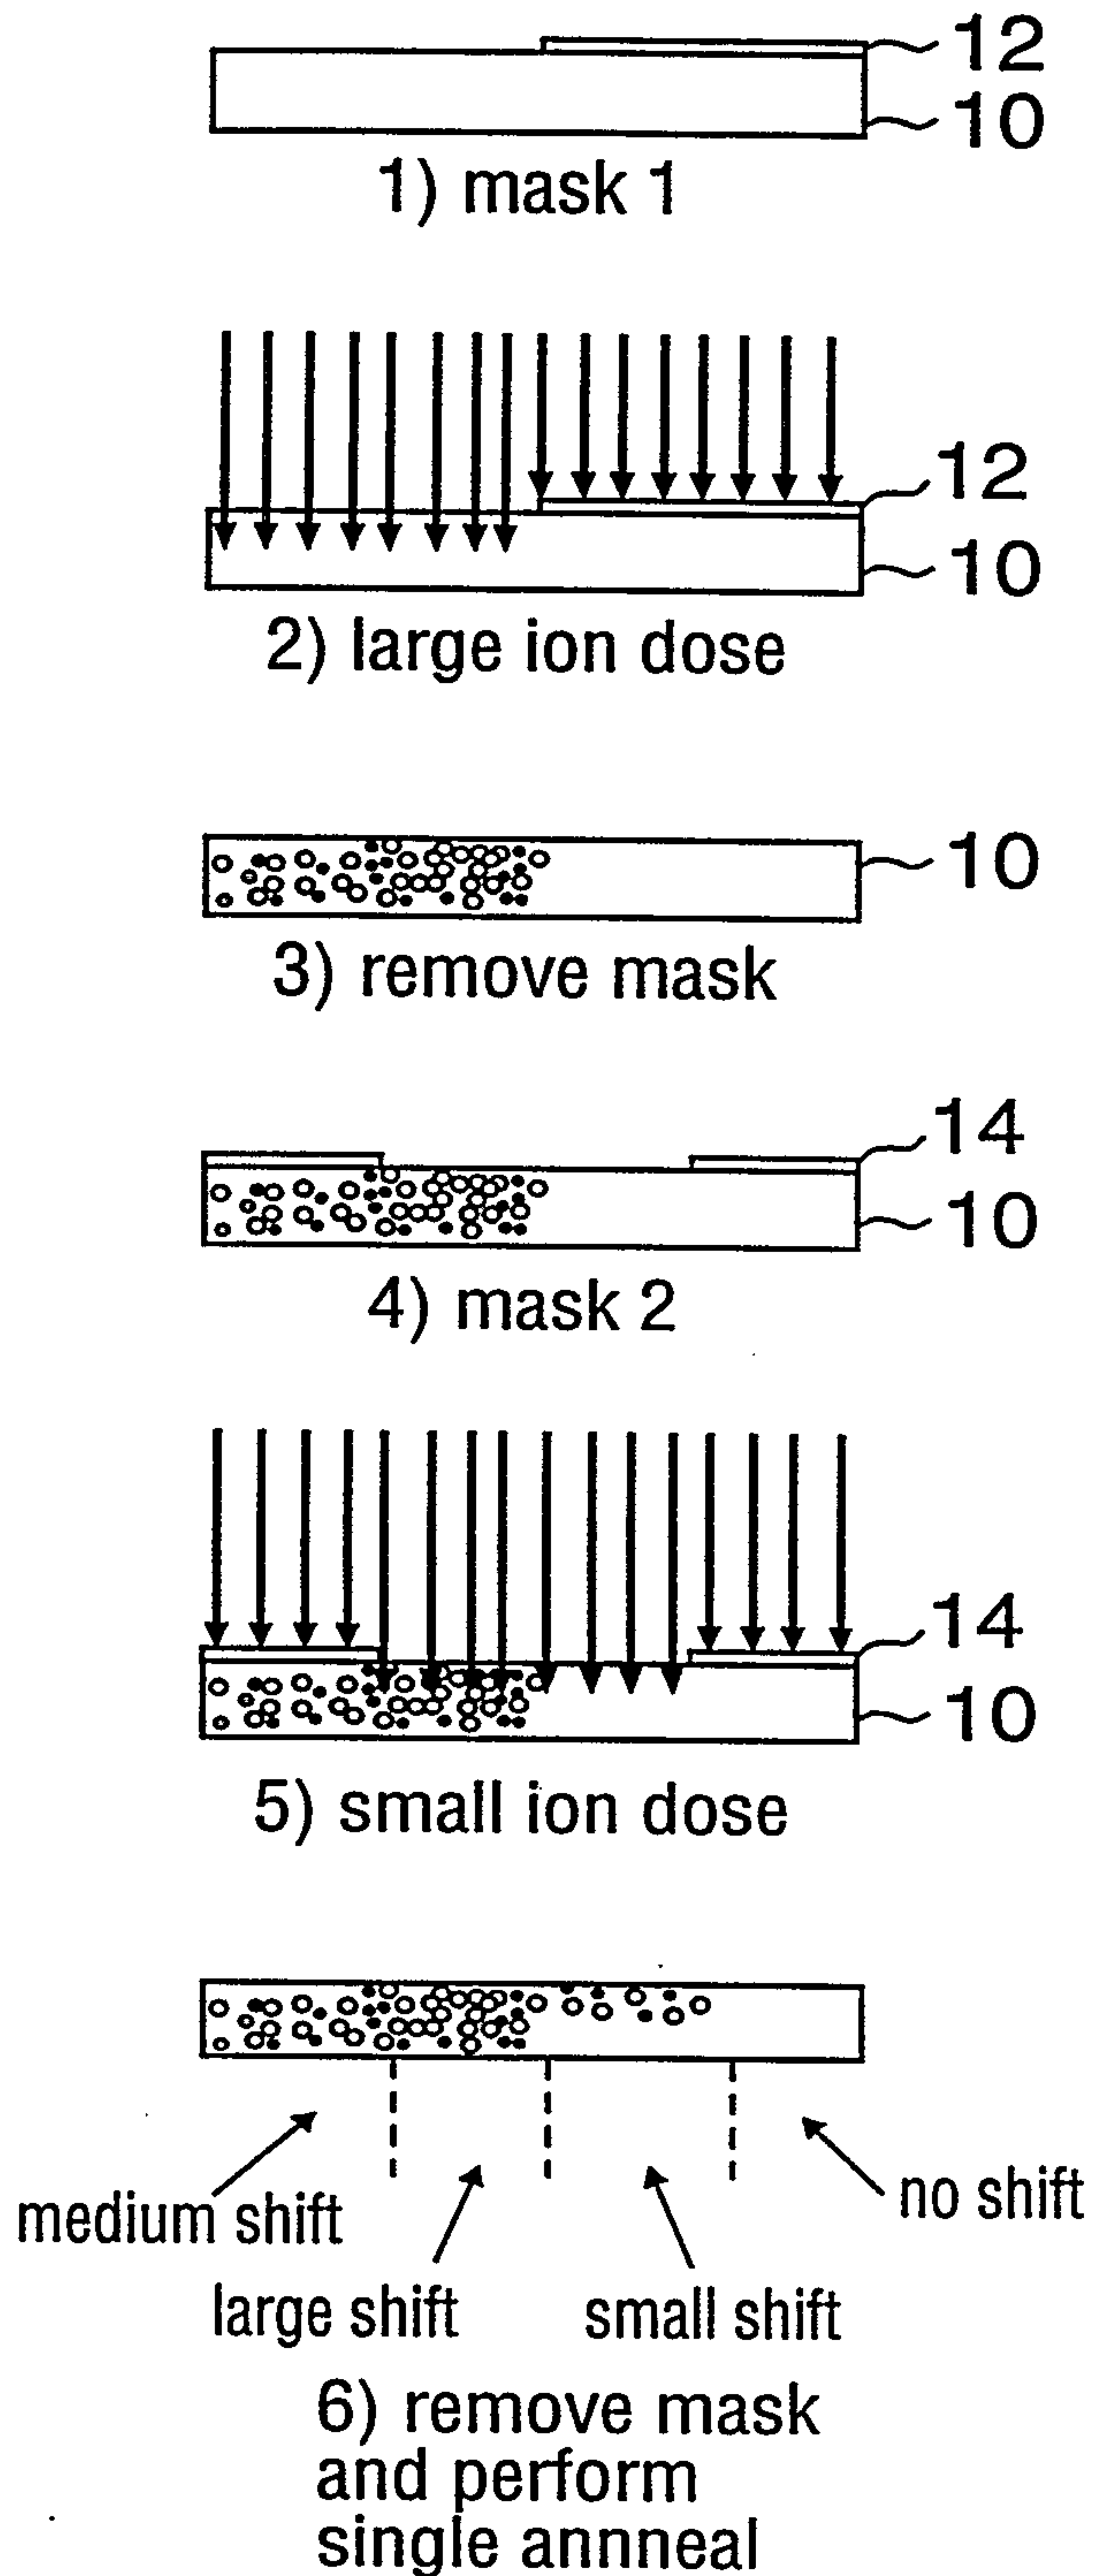**FIG. 9a**

Multiple Implants (a) Contact Masks

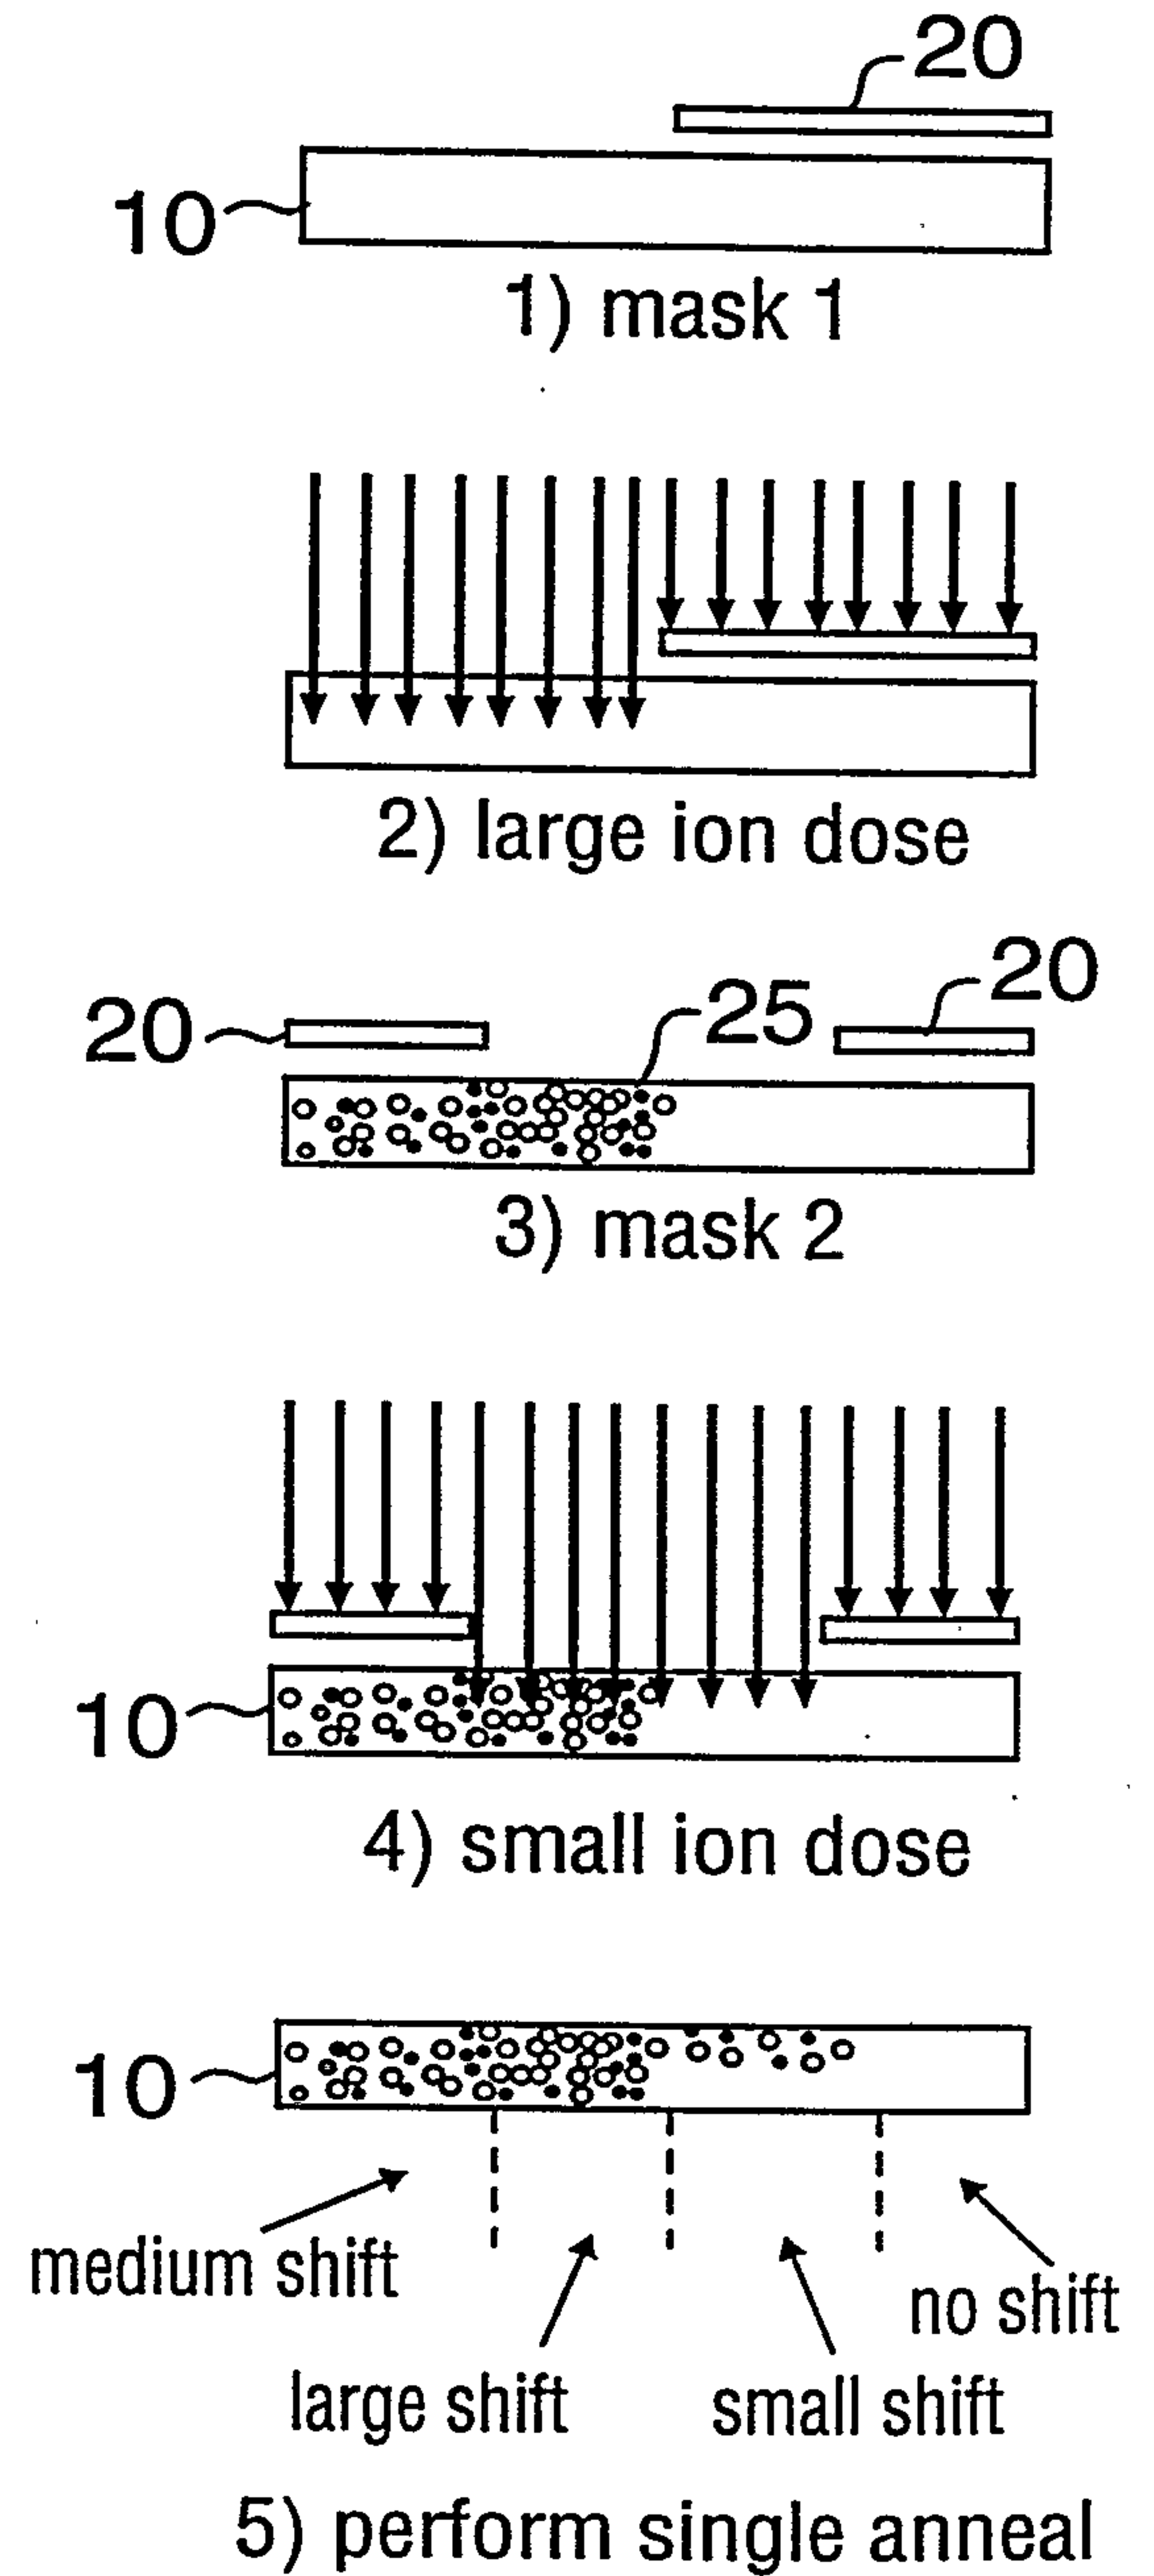**FIG. 9b**

Single ion implantation at one energy

