

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 February 2003 (06.02.2003)


PCT

(10) International Publication Number
WO 03/010521 A1

- (51) International Patent Classification⁷: **G01N 21/35**, A01C 21/00, G01J 3/427, G01N 21/47
- (21) International Application Number: PCT/US02/23009
- (22) International Filing Date: 19 July 2002 (19.07.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
09/912,077 24 July 2001 (24.07.2001) US
- (71) Applicant: **THE BOARD OF REGENTS FOR OKLAHOMA STATE UNIVERSITY** [US/US]; 203 Whitehurst, Oklahoma State University, Stillwater, OK 74078 (US).
- (72) Inventors: **STONE, Marvin, L.**; 1505 S. August, Stillwater, OK 74074 (US). **NEEDHAM, DUANE**; 225 S. Dryden St., Stillwater, OK 74074 (US). **SOLIE, John, B.**; 2812 Fox Ledge Dr., Stillwater, OK 74074 (US). **RAUN, William, R.**; 1019 Edgemoor Dr., Stillwater, OK 74074 (US). **JOHNSON, Gordon, V.**; 2226 Tanglewood Circle, Stillwater, OK 74074 (US).
- (74) Agent: **WEEKS, R., Alan**; Fellers, Snider, Blankenship, Bailey & Tippens, P.C., Suite 800, 321 South Boston, Tulsa, OK 74103-3318 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,

[Continued on next page]

(54) Title: OPTICAL SPECTRAL REFLECTANCE SENSOR AND CONTROLLER

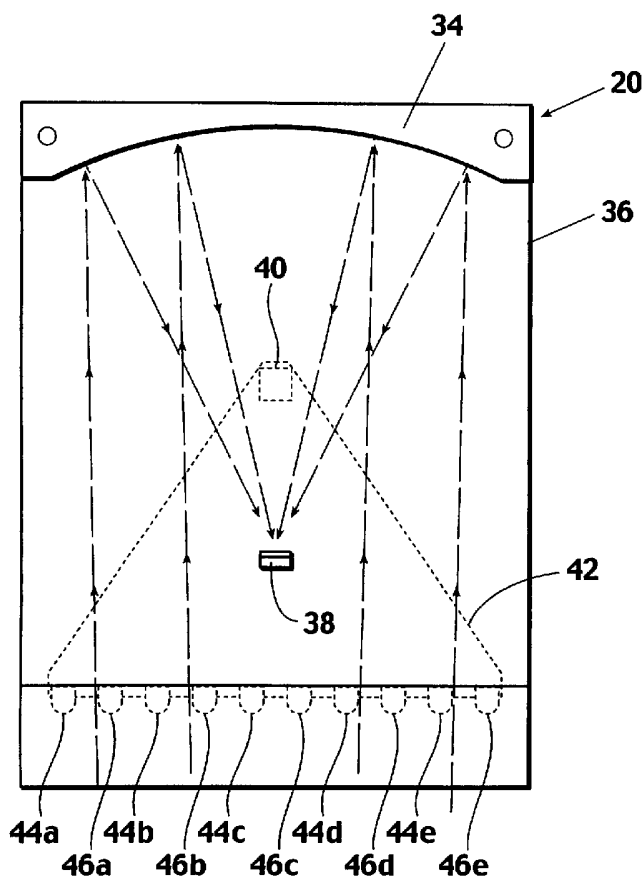

(57) Abstract: A spectral reflectance sensor including: a light source for emitting a modulated beam of red light; a light source for emitting a modulated beam of near infrared light; a receiver for receiving reflected light produced by either the red source or the near infrared source; a receiver for receiving incident light from either the red source or the infrared source; a signal conditioner responsive to the modulation such that the signals produced by the receivers in response to reflected and incident light from the source can be discriminated from signals produced by ambient light; and a microprocessor having an input such that the microprocessor can determine the intensities of incident red light, reflected red light; incident near infrared light; and reflected near infrared light. From these intensities, and by knowing the growing days since emergence or planting, the sensor can calculate the mid-growing season nitrogen fertilizer requirements of a plant.



MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

OPTICAL SPECTRAL REFLECTANCE SENSOR AND CONTROLLER

BACKGROUND OF THE INVENTION

1. Field of the Invention:

This invention relates generally to a sensor for use in precision farming. More particularly, but not by way of limitation, the present invention relates to an optical spectral reflectance sensor and controller for use in a site specific fertilization system.

2. Background:

"Precision farming" is a term used to describe the management of intrafield variations in soil and crop conditions. "Site specific farming", "prescription farming", and "variable rate application technology" are sometimes used synonymously with precision farming to describe the tailoring of soil and crop management to the conditions at discrete, usually contiguous, locations throughout a field. The size of each location depends on a variety of factors, such as the type of operation performed, the type of equipment used, the resolution of the equipment, as well as a host of other factors. Generally speaking, the smaller the location size, the greater the benefits of precision farming, at least down to approximately one square meter.

Typical precision farming techniques include: varying the planting density of individual plants based on the ability of the soil to support growth of the plants; and the selective application of farming products such as herbicides, insecticides, and, of particular interest, fertilizer.

In contrast, the most common farming practice is to apply a product to an entire field at a constant rate of application. The rate of application is selected to maximize crop yield over the entire field. Unfortunately, it would be the exception rather than the

rule that all areas of a field have consistent soil conditions and consistent crop conditions. Accordingly, this practice typically results in over application of product over a portion of the field, which wastes money and may actually reduce crop yield, while also resulting in under application of product over other portions of the field,
5 which may also reduce crop yield.

Perhaps even a greater problem with the conventional method is the potential to damage the environment through the over application of chemicals. Excess chemicals, indiscriminately applied to a field, ultimately find their way into the atmosphere, ponds, streams, rivers, and even the aquifer. These chemicals pose a serious threat to water
10 sources, often killing marine life, causing severe increases in algae growth, leading to eutrophication, and contaminating potable water supplies.

Thus it can be seen that there are at least three advantages to implementing precision farming practices. First, precision farming has the potential to increase crop yields, which will result in greater profits for the farmer. Second, precision farming may
15 lower the application rates of seeds, herbicides, pesticides, and fertilizer, reducing a farmer's expense in producing a crop. Finally, precision farming will protect the environment by reducing the amount of excess chemicals applied to a field which may ultimately end up in a pond, stream, river, and/or other water source.

Predominately, precision farming is accomplished by either: 1) storing a
20 prescription map of a field wherein predetermined application rates for each location are stored for later use; or 2) by setting application rates based on real-time measurements of crop and/or soil conditions. In the first method, a global positioning system (GPS) receiver, or its equivalent, is placed on a vehicle. As the vehicle moves through the field, application rates taken from the prescription map are used to adjust variable rate

application devices such as spray nozzles. A number of difficulties are associated with the use of such a system, for example: due to the offset between the GPS receiver and the application element, the system must know the exact attitude of the vehicle in order to calculate the precise location of each nozzle or application element, making it
5 difficult to accurately and precisely treat the target area; soil and plant conditions must be determined and a prescription developed and input prior to entering the field; and resolving a position with the requisite degree of accuracy requires relatively expensive equipment.

In the latter method, a sensor is used to detect particular soil and plant conditions
10 as the application equipment is driven through the field. The output of the sensor is then used to calculate application rates and adjust a variable rate applicator in real time. Since the physical relationship between the sensor and the applicator is fixed, the problems associated with positional based systems (i.e., GPS) are overcome. In addition, the need to collect data prior to entering the field is eliminated, as is the need
15 for a prescription map.

The limiting factor, thus far, in the later method has been the degree to which sensors are available which provide meaningful information concerning conditions within the field. For example, United States Patent No. 5,585,626 issued to Beck et. al., and United States Patent No. 5,763,873, likewise issued to Beck et al., discloses a
20 sensor which detects plants in a field so that herbicide may be selectively applied to unwanted plants. Unfortunately, these devices discriminate only between soil and a plant. Thus, as a sprayer is passed over areas where there should only be bare soil, herbicide will automatically be applied to any plants detected. In practice, the sensors of the Beck '626 and '873 patents have proven to be temperature sensitive and thus, to

require nearly continuous monitoring and regular re-adjustment while being used. Furthermore, due to the nature of these devices, the distance between the sensor and the ground must be maintained with a relatively high degree of precision. Another limitation is that presently, no such sensor exists for the application of nitrogen fertilizer.

Thus it is an object of the present invention to provide a sensor for use in precision farming which provides an output indicative of one or more growing conditions over a relatively small area, which may be used for the selective application of a farming product or used in the development of a prescription map.

SUMMARY OF THE INVENTION

The present invention provides a sensor for use in precision farming which satisfies the needs and overcomes the problems discussed above. The sensor measures the reflectance of a target at one or more wavelengths of light and, based on known reflectance properties of the target, produces an output indicative of the need for a given farm product.

In a preferred embodiment, the sensor comprises: a light emitter which provides one or more light sources, each source producing light at a specific wavelength; a modulator for modulating each light source at a particular frequency, a reflected light receiver for receiving, detecting, and discriminating each wavelength of light; a direct receiver for receiving light directly from each source; and a processor for gathering information from the receivers and processing such information to determine reflectance of a plant and to determine the need for a given product based on the reflectance information.

The reflectance properties of a target are known to vary based on the amount of nitrogen available to the plant. By observing the reflected light, at particular wavelengths, preferably in the ranges of red and near infrared, and the intensity of the light source at the same wavelengths, it is possible to predict, with a reasonable degree of certainty, the expected crop yield with the present level of available nitrogen and the maximum crop yield if an ideal amount of nitrogen fertilizer is added. This information may be used in real time to control a variable rate applicator for applying a mid-growing season nitrogen fertilizer or, alternatively, used to develop a prescription map for later application of mid-growing season nitrogen fertilizer to a field. Although the inventive sensor could be easily adjusted for any particular target size, the preferred embodiment allows precision farming of sites having an area of approximately four square feet.

Another feature of the inventive device is that the accuracy of the resulting measurement is relatively independent of the height of the sensor above the ground. Thus, as a vehicle equipped with the sensor moves through a field, the output of the sensor is consistent regardless of the terrain and its effect on the height of the sensor.

Further objects, features, and advantages of the present invention will be apparent to those skilled in the art upon examining the accompanying drawings and upon reading the following description of the preferred embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 provides a side view of a farming vehicle having an inventive spectral reflectance sensor mounted thereon.

FIG. 1A provides a top view of the farming vehicle showing a typical arrangement of the inventive sensors in use to control the selective application of a farm product.

5 FIG. 2 provides a perspective view of a preferred embodiment of the spectral reflectance sensor.

FIG. 3 provides a cutaway back view of the spectral reflectance sensor.

FIG. 4 provides a cutaway side view of the spectral reflectance sensor.

FIG. 5 provides a schematic representation of a preferred emitter circuit as employed in the inventive sensor.

10 FIG. 6 provides a block diagram of a preferred receiver circuit employed in the inventive sensor.

FIG. 7 provides a block diagram of the preferred circuitry of the circuit board employed in the inventive sensor.

15 FIG. 8 provides a cutaway perspective view of a preferred multiple sensor embodiment of the inventive reflectance sensor.

FIG. 9 provides a perspective view of the multiple sensor embodiment.

FIG. 10 provides a cutaway side view of an improved reflectance sensor.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

20 Before explaining the present invention in detail, it is important to understand that the invention is not limited in its application to the details of the construction illustrated and the steps described herein. The invention is capable of other embodiments and of being practiced or carried out in a variety of ways. It is to be

understood that the phraseology and terminology employed herein is for the purpose of description and not of limitation.

Referring now to the drawings, wherein like reference numerals indicate the same parts throughout the several views, a preferred embodiment of the inventive
5 reflectance sensor **20** is shown in its general environment in FIGS. 1 and 1A. In one application, a plurality of sensors, of which sensors **20** are representative, are disposed along boom **22** at substantially equal spacings. Preferably, boom **22** extends laterally from vehicle **24**. Spray nozzles, of which nozzle **26** is representative, are also disposed along boom **22** preferably such that a nozzle **26**, or group of nozzles, corresponds to
10 each sensor **20**. As the vehicle **24** travels along a crop row, boom **20** projects over the plants such that each sensor **20** evaluates the plant or plants in its immediate view, determines the extent to which nitrogen fertilizer is needed, and controls the rate of application of fertilizer through its corresponding nozzle **26**.

Referring next to FIGS. 2 and 3, reflectance sensor **20** comprises: a housing **28**;
15 an emitter lens **30** located on the bottom of housing **28**; and a receiver lens **32** likewise located on the bottom of housing **28**. Preferably lens **32** and lens **30** will be selected such that the light emitted by sensor **20** will illuminate an area of consistent size and shape over a range of heights above the ground and likewise, sensor **20** will detect the reflected light consistently from approximately the same area as is illuminated by the
20 sensor.

As best seen in FIGS. 3 and 4, housed within housing **28**, sensor **20** further includes parabolic reflector **34** secured to divider **36**, for focusing light received through receiver lens **32** onto photodetector **38**. Reflected light photodetector **38** projects

through aperture **116** in divider **36** to receive only light received through receiver lens **32**.

While not critical to the operation of the present sensor, it should be noted that in the preferred embodiment, the light source LEDs **44a-e** and **46a-e** are located in close physical proximity to the detector **38**. This feature minimizes the effect of sensor height on the location of the illuminated surface relative to the field-of-view of the detector **38**. In addition, the LED's **44a-e** and **46a-e** are distributed along a row and, furthermore, the light is projected through a cylindrical lens **30** oriented parallel with the row of LEDs **44a-e** and **46a-e** to restrict the spread of light in the direction of travel to further minimize the effects of variations in sensor height. Finally, the receiver employs a parabolic reflector **34** with the detector **38** located at the point of focus of the reflector **34** to establish a field-of-view of the detector **38** which is relatively independent of sensor height. Preferably the reflector **34** is in the form of an offset section of a 3-dimensional paraboloid such that detector **38** may be located outside of the field-of-view. This construction results in a sensor which produces consistent results relatively independent of sensor height, particular when compared to prior art sensors.

Located on the opposite side of divider **36**, sensor **20** includes circuit board **40** and light pipe **42**. Circuit board **40** includes a first light source for producing red light made up of a row of LEDs, **44a-e** which are positioned to project light downward through lens **30**; and a second light source for producing light in the near infrared range made up of a row of LEDs **46a-e**, preferably arranged such that LEDs **44a-e** and **46a-e** are aligned in a row wherein adjacent LEDs alternate between red and near infrared. Preferably, LEDs **44a-e** produce red light having a wavelength of approximately 670

nanometers while LEDs **46a-e** produce light in the near infrared range ("NIR"), having a wavelength of approximately 780 nanometers. Light pipe **42** receives and collects incident light from LEDs **44a-e** and **46a-e** and transmits such light to photodetector **48**. Detector **48** thus provides a means for directly measuring the intensity of the light produced by LEDs **44a-e** and **46a-e**. Since light pipe **42** collects light from all of the LEDs **44a-e** and **46a-e**, the sensor can measure true reflectance from its field-of-view. In addition, by storing a baseline intensity in nonvolatile memory, the sensor can determine when an LED fails based on a reduced intensity of incident light.

The circuitry of circuit board **40** is shown in FIGS. 5-7. Beginning with FIG. 7, circuit board **40** includes: microprocessor **50**; an emitter circuit **52** having a color input **54** and an intensity input **56**; a receiver circuit **68** having an input **70** to select between the signal representing the light striking the reflected light photodetector **38** or the signal representing the light striking the direct photodetector **48**, and an analog output **72** which is connected to track and hold analog to digital converter **58**. In the preferred embodiment, analog to digital converter **58** provides 12 bits of resolution although analog to digital converters of more or less resolution are suitable for use with the present invention. Microprocessor **50** includes outputs **60**, **62**, and **64** for driving variable rate applicator **66** which will be discussed in more detail, hereinbelow.

The term "microprocessor" is used in its broadest sense to describe any computing device. In addition to devices generically known as microprocessors, the term includes, by way of example and not limitation, microcontrollers, RISC devices, ASIC devices manufactured to provide logical and mathematical functions, FPGA

devices programmed to provide logical and mathematical functions, computers made up of a plurality of integrated circuits, and the like.

Referring next to FIG. 5, preferably emitter **52** comprises: an oscillator **74** which produces a periodic output having a frequency of approximately 40 kilohertz; switch **76**;
5 amplifiers **78**, **80**, **82**, and **84**; LEDs **44a-e** and **46a-e**; and current mirrors **86** and **88**.

Analog switch **76** includes a color input **54** and an intensity input **56**. When color input **54** is at a first binary state, the output of oscillator **74** is directed to either amplifier **78** or amplifier **80**, depending on the state of intensity input **56**. When color input **54** is at its second binary state, the output of oscillator **74** is instead directed to
10 either amplifier **82** or amplifier **84**, likewise depending on the state of intensity input **56**. Thus, input **54** allows selection of the color of the lighted emitted, either red, from LEDs **44a-e** when input **54** is in its first binary state, or near infrared, from LEDs **46a-e** when input **54** is in its second binary state.

Amplifiers **78**, **80**, **82**, and **84** are each a transistor, wired in an emitter-follower
15 configuration. Depending on the states of inputs **54** and **56**, only a single amplifier **78-84** will receive an input from oscillator **74** at any given time. Preferably resistor **96** will be selected such that its impedance is approximately twice that of resistor **94** and resistor **100** will be selected such that its impedance will be twice that of resistor **98**. The outputs of amplifiers **78** and **80** are directed to current mirror **86** while the outputs
20 of amplifiers **82** and **84** are directed to current mirror **88**. The current which flows through transistor **102a** will be roughly proportional to the current flowing through transistor **102c**. Similarly, the current flowing through transistor **104a** will be roughly proportional to the current flowing through transistor **104c**. Accordingly, a greater

current will flow through LEDs **44a-e** when amplifier **78** is selected than when amplifier **80** is selected, and in a similar manner, more current will flow through LEDs **46a-e** when amplifier **82** is selected than when amplifier **84** is selected. Thus, by manipulating inputs **54** and **56**, microprocessor **50** can select a color of light, between red or near infrared, and can select, between two choices, the intensity of the light produced.

Preferably, oscillator **74** will produce a waveform which approximates a sine wave, thus having harmonic content substantially less than that of a square wave. When LEDs **44a-e** and **46a-e** are driven in this fashion, the electrical current flowing through the LED's will have a harmonic content far below that of a square wave current. Accordingly, the light produced by each individual LED **44a-e** or **46a-e**, will result in a modulated light beam having substantially less harmonic energy than would be produced if modulated with a square wave.

Referring now to FIG. 6, receiver **68** preferably comprises: a first amplifier **106** for amplifying a signal produced by direct light photodetector **48**; a second amplifier **108** for amplifying a signal produced by reflected light photodetector **38**; amplifier **114** providing ambient light compensation means for reducing the effects of ambient light on photodetector **38**; analog selector **110** for selecting either the direct light signal or the reflected light signal as directed by input **70**; and signal conditioner **112**. Signal conditioning is generally known in the art and typically includes filtering and, if necessary, amplification of the signal. Signal conditioner **112** can also be thought of as a discriminator. Preferably signal conditioner **112** includes a second order band pass filter centered about 40 kilohertz. Since LEDs **44a-e** and **46a-e** are modulated at 40 kilohertz, signal conditioner **112** will discriminate between the signal resulting from the

light produced by LEDs **44a-e** and **46a-e** and "noise" resulting from the signal produced by other light sources. As will be apparent to those skilled in the art, a variety of other methods, such as synchronous demodulation, are available to discriminate between the reflected, modulated light, and unwanted ambient light.

5 It should be noted that the light produced by LEDs **44a-e** and **46a-e** will contain a DC component if the signal from oscillator **74** (FIG. 5) is superimposed on a DC voltage. For the purposes of this invention, the steady-state light so produced is considered part of the ambient light and the low frequency affects of such light, particularly as the sensor height varies or from terrain variations, on reflected light
10 detector **38** will also be compensated for by amplifier **114** and ultimately removed by signal conditioner **112**.

 In particular, amplifier **114** allows detector **38** to operate over a wider range of ambient lighting conditions without saturating. In addition, capacitors **116** and **118** AC couple the outputs of photodetectors **48** and **38**, respectively, to eliminate DC offset
15 voltages from the signals produced by detectors **48** and **38** which could otherwise cause the outputs of amplifiers **106** and **108** to saturate. In general, ambient light compensation means includes any of these techniques which reduce the degree to which ambient light may degrade or impede reception of the reflected light from light sources **44** and **46**, or any other technique for improving the signal to noise ratio of the received
20 signal.

 Receiver circuit **68** provides output **72** which produces an amplified and filtered version of the signal received by one of the two detectors **38** or **48**, as selected by input

70. The operation of analog to digital converter **58** is synchronized with the oscillator **74** so that conversions are performed on the peaks of the signal present at output **72**.

In operation, the sensor is passed over crops such that modulated light from the emitter, both red and near infrared, is reflected back through the receiver lens and
5 focused by the parabolic reflector onto the photodetector. The microprocessor **50** directs analog to digital converter **58** to read the received signal at the peaks of the waveform output by signal conditioner **112** for both the output of the reflected light detector **38** and the direct light detector **48**. By calculating the ratio of the light reflected at each wavelength, i.e. the reflected intensity divided by the source intensity, the
10 reflectance of the crop at each wavelength can be determined.

In a typical system, multiple sensors **20** will be used to scan a contiguous strip across one or more rows of plants. In such a system, microprocessor **50** receives synchronization timing information from a central source and uses that timing information to synchronize emission from emitter circuit **52**. This process assures that
15 light from adjacent sensors **20** are synchronized and consequently that such sensors do not interfere with each other. In a preferred method for synchronizing multiple units, microprocessor **50** includes a controller area network (CAN) interface. Such networks are well known in the art. To synchronize the emitters, a message is periodically transmitted on the network from the central source. Upon receipt of this message, each
20 sensor sets the output of oscillator **74** to a known position in its periodic waveform, thereby synchronizing all sensors connected to the network.

Once the microprocessor **50** has gathered reflectance information from receivers **38** and **48**, it is necessary to process the information to determine the need for nitrogen.

One method for using reflectance information to determine such a need is disclosed in co-pending United States Patent Application, Serial No. [REDACTED], entitled "A Process for In-Season Fertilizer Nitrogen Application Based on Predicted Yield Potential," filed contemporaneously herewith, which is incorporated herein by reference.

5

To summarize the process, data from the sensor is used to predict the potential yield that can be achieved with additional, mid-growing season, nitrogen fertilization based on an in-season response index given by the equation:

$$YP_N = YP_0 * RI_{NDVI}$$

10 where:

YP_N is the predicted or potential yield that can be achieved with additional fertilizer;

YP_0 is the predicted or potential yield based on growing conditions up to the time of sensing, that can be achieved with no additional nitrogen fertilizer;

15

RI_{NDVI} is the In-Season-Response-Index computed as NDVI from Feekes 4 to Feekes 6 from a non-N-limiting fertilized strip divided by NDVI from Feekes 4 to Feekes 6 in the farmer's field fertilized in the common practice employed by the farmer, located adjacent to the non-N-limiting strip; and

20

NDVI is the normalized difference vegetation index calculated as $(NIR - red)/(NIR + red)$ where NIR and red are reflectance values measured by the inventive sensor.

YP_N can then be used to predict the percent of nitrogen (PNG) contained in the crop calculated as:

$$\text{PNG} = -0.1918 * \text{YP}_N + 2.7836 \text{ (PNG in \% N)};$$

the predicted grain nitrogen uptake (GNUP) is calculated as :

5
$$\text{GNUP} = \text{PNG} * (\text{YP}_N/100);$$

the predicted forage nitrogen uptake (FNUP) calculated as:

$$\text{FNUP}_{\text{NDVI}} = 14.76 + 0.7758e^{5.468*\text{NDVI}};$$

and finally, the in-season mid-growing season fertilizer nitrogen requirement (FNR) is calculated as:

10
$$\text{FNR} = (\text{GNUP} - \text{FNUP})/0.70 \text{ kg/ha.}$$

As will be apparent to those skilled in the art, the above series of calculations may easily be performed in microprocessor **50** and FNR can then be used to control the rate of fertilizer application through a variable rate applicator **66**.

Due to variations in various components employed in the inventive sensor, it may be desirable to provide a calibration procedure. Typically, the sensor may be calibrated by shining the emitter at an object having known reflectance properties and comparing the signal produced by photodetector **38** to an expected value. The response of the entire system may be determined independently for both red and near infrared and may be determined at each of the two selectable intensities. Constants may then be calculated and stored in non-volatile memory within microprocessor **50** for later use to correct subsequent measurements of plant reflectance.

15

20

One advantage of the present invention is that each individual sensor **20** may be independently calibrated. When multiple sensors are employed, for example along a boom, and each sensor has been properly calibrated, the amount of nitrogen available

to each plant will be consistent throughout the field, regardless of which particular sensor scans any given plant.

Referring again to FIG. 5, emitter **52** can be adapted to output more light by adding additional LED's. Preferably, additional LEDs **44f-j** and **46f-j** would be driven by adding additional current mirror transistors **102b** and **104b**, respectively. In this way, the electrical current flowing through LEDs **44a-e** would closely approximate the current flowing through LEDs **44f-j** and similarly, the electrical current flowing through LEDs **46a-e** would closely approximate the current flowing through LEDs **46f-j**, resulting in consistent brightness throughout the individual LEDs of a given color. As will be apparent to those skilled in the art, additional groups of LEDs could be added to achieve any desired level of intensity. In addition, the number of red LED's **44** need not equal the number of infrared LEDs **46**.

In a similar vein, it should also be noted that additional wavelengths of light may also be produced by sensor **20**. A switch similar to switch **76** could be employed which provides the desired number of individual switches to accommodate the desired additional wavelengths of light. For each wavelength emitted, additional amplifiers, current mirrors, and LEDs are employed in the same configuration as those presently employed. Thus, the present invention is suitable for measuring the reflectance at any number of wavelengths. Incorporating additional wavelengths of light allows the sensor to separate confounding factors from the estimate of nitrogen as well as increase the number of possible applications for the sensor. When more than two wavelengths of light are produced, it may be more practical to arrange the light emitting diodes into additional parallel rows with appropriately configured lenses such that the gap between individual LEDs of the same color does not become large enough to leave unilluminated

holes in the field-of-view. For purposes of this invention, the parallel rows are viewed collectively as a single row having a width greater than one LED.

As mentioned hereinbefore, prior art reflectance sensors are available to direct the selective application of herbicide to eliminate unwanted plants in a field. Features of the inventive sensor may be incorporated into such a prior art sensor to improve the performance of such a sensor and to adapt such a sensor for use in the application of other farming products. For example, the sensors described in United States Patent No. 5,763,873 issued to Beck et al., which is incorporated herein by reference, and United States Patent No. 5,789,741 issued to Kinter et al., likewise incorporated herein by reference, could easily be adapted to house the inventive circuitry. As shown in FIG. 10, light source **210** directs a beam of light, as indicated by line **212**, through lense **214** towards a target. Light reflected by the target, as indicated by line **216**, is focused by lense **226** on to reflected light photodetector **218**. In accordance with the present invention, a portion of the light emitted from all of the emitters which collectively comprise light source **210** is collected by light pipe **220** and directed to direct light photodetector **222**. While mechanically, sensor **224** differs from sensor **20** (FIG. 2), the circuitry employed therein may be identical, resulting in a sensor which provides improved accuracy in regard to the measured reflectance over the prior art design and which is, therefore, suitable for purposes beyond the selective application of herbicide.

As will be apparent to those skilled in the art, the inventive sensor **20** may be scaled upward or downward in size to achieve virtually any desired resolution. Thus, while the preferred embodiment is suitable for sites of approximately four square feet, the invention is not so limited. With presently available light sources and detectors, a resolution of less than 12 square inches per site is possible.

It should also be noted that, while the inventive sensor can provide an output to directly control the rate of application of fertilizer, it could also be used to create a prescription map for later application of fertilizer. In such a system, positional information is obtained from a GPS receiver, from the vehicle carrying the sensor, or from some other position indicating system. Crop conditions are stored in nonvolatile memory in such a manner that the condition at each specific site within the field may be later recalled for use in developing a prescription map.

It should be further noted that multiple sensors **200** may be incorporated into a single housing **202** as shown in FIGS. 8 and 9. Typically, each sensor **200** would be constructed in accordance with the description of sensor **20** and have its own microprocessor for performing the calculations to arrive at the required mid-growing season fertilizer. This arrangement is particularly well suited for a use on a spray boom where, ideally, sensors are aligned, end-to-end along the boom. Optionally, instead of directly controlling a variable rate applicator, the sensors may provide reflectance data or growing conditions to a central computer via a communication network, such as a CAN network. The central computer would both direct an array of variable rate applicators and create a log of crop conditions throughout the field for later analysis or to create a history for comparison with those of other growing seasons.

In a multiple sensor configuration, it is also possible for a single microprocessor to control multiple sensors. When multiple sensors are controlled by a single processor, or when sensors are interconnected via a network, and the resolution is reduced, it is possible to perform image processing within an individual sensor to determine such factors as: missing plants; non-uniform plant stands; chlorophyll concentration; infestation of disease or pests; changes in soil background; etc. In addition, networking

of the individual sensors allows conditions to be averaged over a larger area for applications where a larger site is desired and networking enables microprocessor controllers to use information collected from sensors not under their direct control to make treatment decisions.

5 Through the proper selection of resolution and appropriate use of reflectance information from various wavelengths of light, the inventive sensor can be used to simultaneously detect and treat multiple anomalies in a single pass over a field. For example, using the techniques described in United States Patent No. 5,789,741 issued to Kinter, previously incorporated herein by reference, the inventive sensor could be
10 used to selectively apply nitrogen at an optimal rate to desirable plants while also selectively applying herbicide between plant rows to eliminate unwanted weeds.

 Finally, it should likewise be noted that, while farming applications of the inventive sensor were discussed in relation to the preferred embodiment, the invention is not so limited. The inventive device could be used to improve the efficiency of plant
15 maintenance in virtually any application, i.e. golf courses, lawn care, landscape maintenance; etc. While the constants in the equations given above may vary from crop-to-crop, the inventive method is otherwise applicable to virtually any type of plant.

* * * * *

 Thus, the present invention is well adapted to carry out the objects and attain the
20 ends and advantages mentioned above as well as those inherent therein. While presently preferred embodiments have been described for purposes of this disclosure, numerous changes and modifications will be apparent to those skilled in the art. Such changes and modifications are encompassed within the spirit of this invention as defined by the appended claims.

CLAIMS

What is claimed is:

1. A spectral reflectance sensor for determining the reflectance of a plant comprising:

5 a housing;

a light source housed in said housing, said light source projecting light of a predetermined wavelength;

a reflected light receiver including:

10 a first photodetector positioned to receive reflected light originating from said light source

ambient light compensation means for reducing the effects of ambient light on said first photodetector; and

a first output;

a direct light receiver including:

15 a second photodetector positioned to receive incident light from said light source; and

a second output;

a discriminator for distinguishing the light originating from said light source and reflected by a plant from ambient light; and

20 a microprocessor having an input for reading said first output and an input for reading said second output,

wherein the reflectance at said predetermined wavelength is proportional to the quotient of the value of said first output divided by the value of said second output.

2. The spectral reflectance sensor of claim 1 wherein said light source is a first light source and said predetermined wavelength of light is a first predetermined wavelength of light and the reflectance sensor further comprises:

5 a second light source housed in said housing, said second light source projecting light of a second predetermined wavelength.

3. The spectral reflectance sensor of claim 2 further comprising:

a selector in communication with said microprocessor wherein said microprocessor can select either said first light source to emit light or
10 said second light source to emit light,

wherein said microprocessor can measure the reflectance at said first predetermined wavelength independently of the reflectance at said second predetermined wavelength of light.

15 4. The spectral reflectance sensor of claim 3 wherein said first light source produces red light of a predetermined wavelength and said second light source produces near infrared light of a predetermined wavelength and wherein said microprocessor calculates NDVI based on the reflectance computed while red light is emitted and the reflectance computed while near infrared light is emitted.

20

5. The spectral reflectance sensor of claim 1 wherein said light source is a first light source of a plurality of light sources and each light source of said plurality of light sources produces light at a predetermined wavelength different from the wavelength of each of the other light sources of said plurality of light sources.

6. The spectral reflectance sensor of claim 5 wherein each light source of said plurality of light sources comprises a plurality of light emitting diodes.

5 7. A normalized difference vegetation index sensor comprising:
a first light source which emits a modulated beam of red light;
a second light source which emits a modulated beam of near infrared light;
a first receiver for receiving reflected light produced by said first light source
and said second light source, said receiver having a first output;
10 a second receiver for receiving incident light from said first light source and said
second light source, said second receiver having a second output;
a signal conditioner responsive to the modulation of said modulated beam such
that said signal conditioner can discriminate between said first or second
light sources and ambient light, said signal conditioner having a first
15 input for receiving said first output or said second output and said signal
conditioner having a third output;
a microprocessor having a second input for receiving the output of said signal
conditioner such that said microprocessor can determine the intensity of
said first light source, the intensity of said second light source, the
20 intensity of the reflected light received from said first light source; and
the intensity of the reflected light received from said second light source,
wherein said microprocessor provides an output indicative of the normalized
difference vegetation index calculated from the intensities determined
from the signal at said second input.

8. A farming apparatus for precision farming comprising:

a vehicle;

a plurality of variable rate application elements supported by said vehicle; and

5 a plurality of sensors supported by said vehicle, each of said sensors having a

means for determining the nitrogen uptake of a plant and providing an

output indicative of the need for mid-growing season nitrogen fertilizer,

wherein for each sensor of said plurality of sensors, there is a corresponding

variable rate application element of said plurality of variable rate

10 application elements.

9. A method for applying nitrogen fertilizer using the sensor of claim 1

comprising the steps of:

(a) passing said sensor over an area;

15 (b) calculating the reflectance of the plant to red light and to near infrared light;

(c) calculating the mid-growing season nitrogen fertilizer requirements from the reflectance calculated in step (b);

20 (d) setting the rate of application of a variable rate applicator to deliver the amount of nitrogen fertilizer calculated in step (c).

10. A method for synchronizing light emissions from adjacent reflectance sensors in a system having a plurality of reflectance sensors, wherein each sensor emits a modulated beam of light, including the steps of:

- (a) providing a network interface on each sensor of the plurality of sensors;
- 5 (b) connecting said network interfaces of two or more sensors of the plurality of sensors to form a network;
- (c) periodically transmitting a message on said network; and
- (d) synchronizing the modulation within each sensor upon receiving said message.

10

11. A height independent reflectance sensor comprising:

a cylindrical lens;

a light source including a plurality of light emitting diodes configured in a row parallel to, and directed to emit light through, said cylindrical lens to
15 illuminate an area;

a parabolic reflector positioned to receive light reflected from said illuminated area;

a photodetector positioned at the focal point of said parabolic reflector to receive said light reflected from said illuminated area.

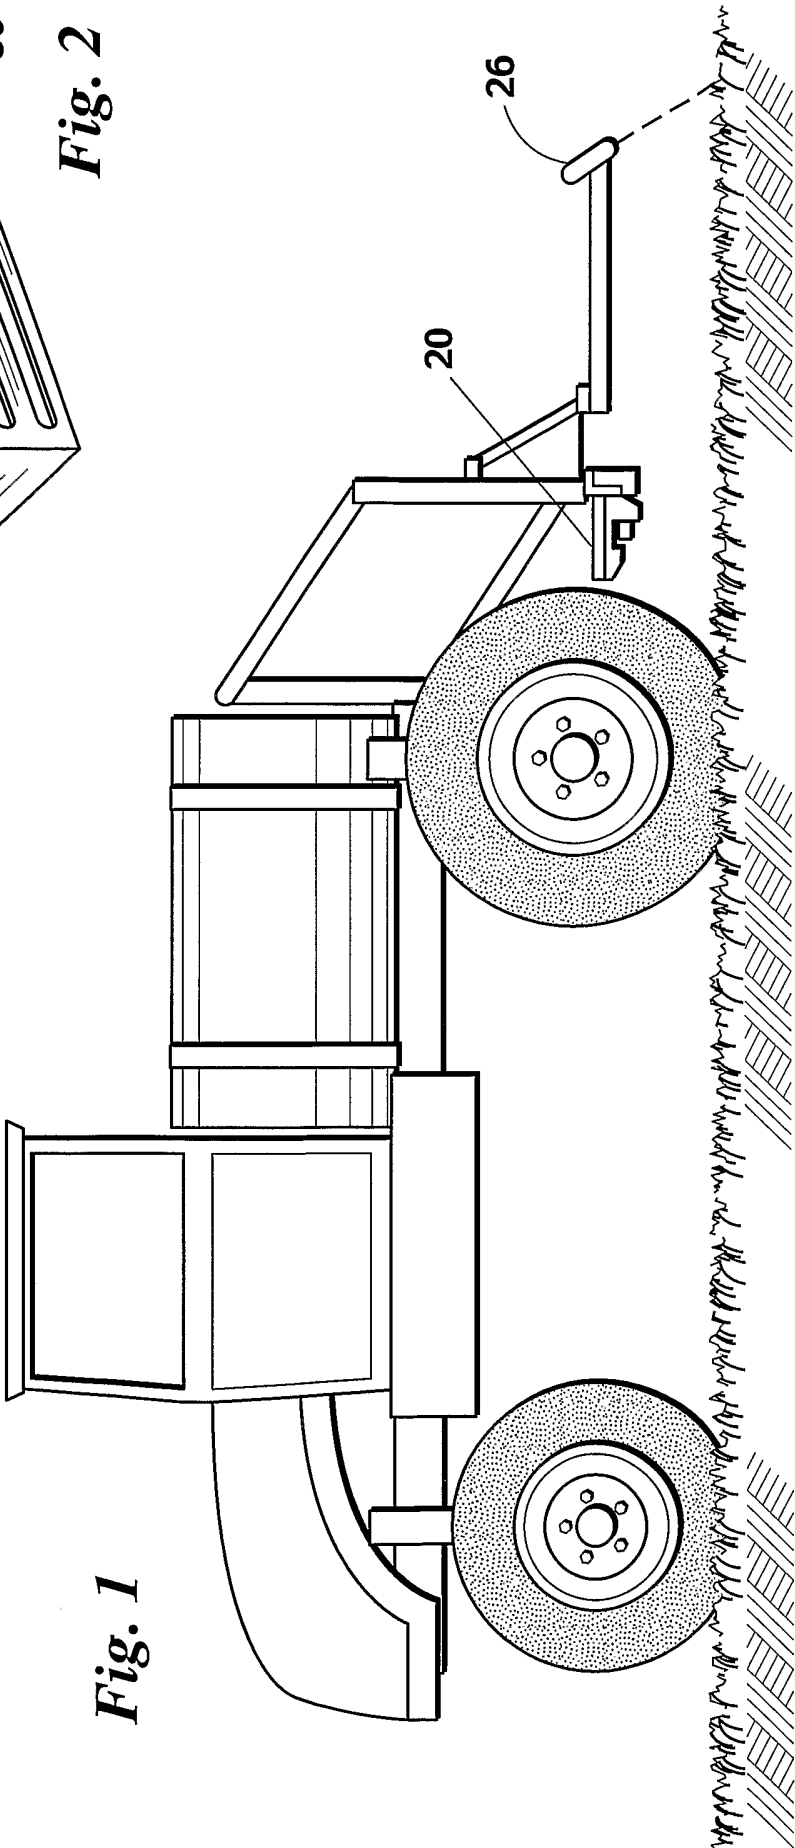


Fig. 1

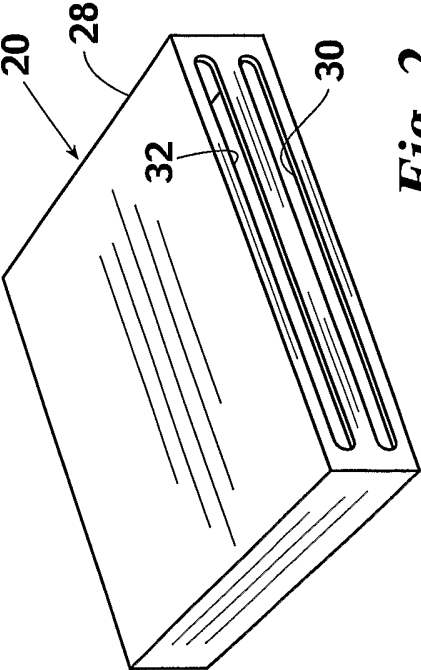


Fig. 2

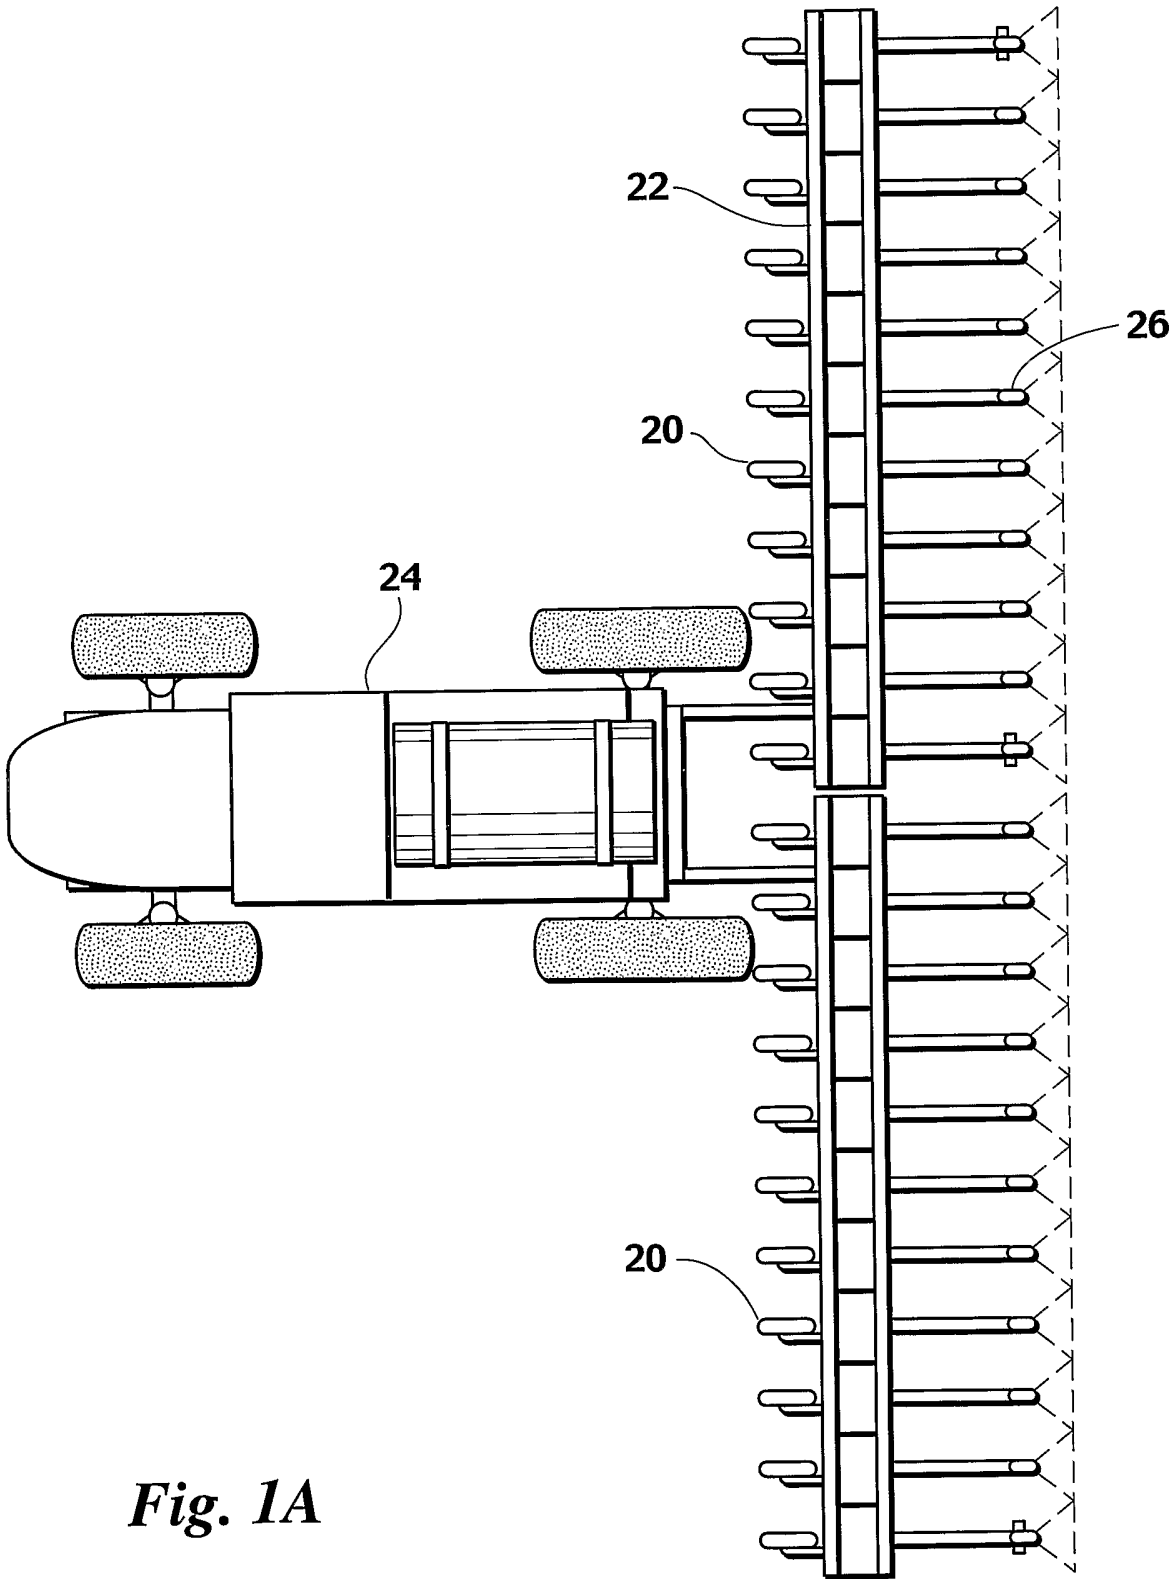
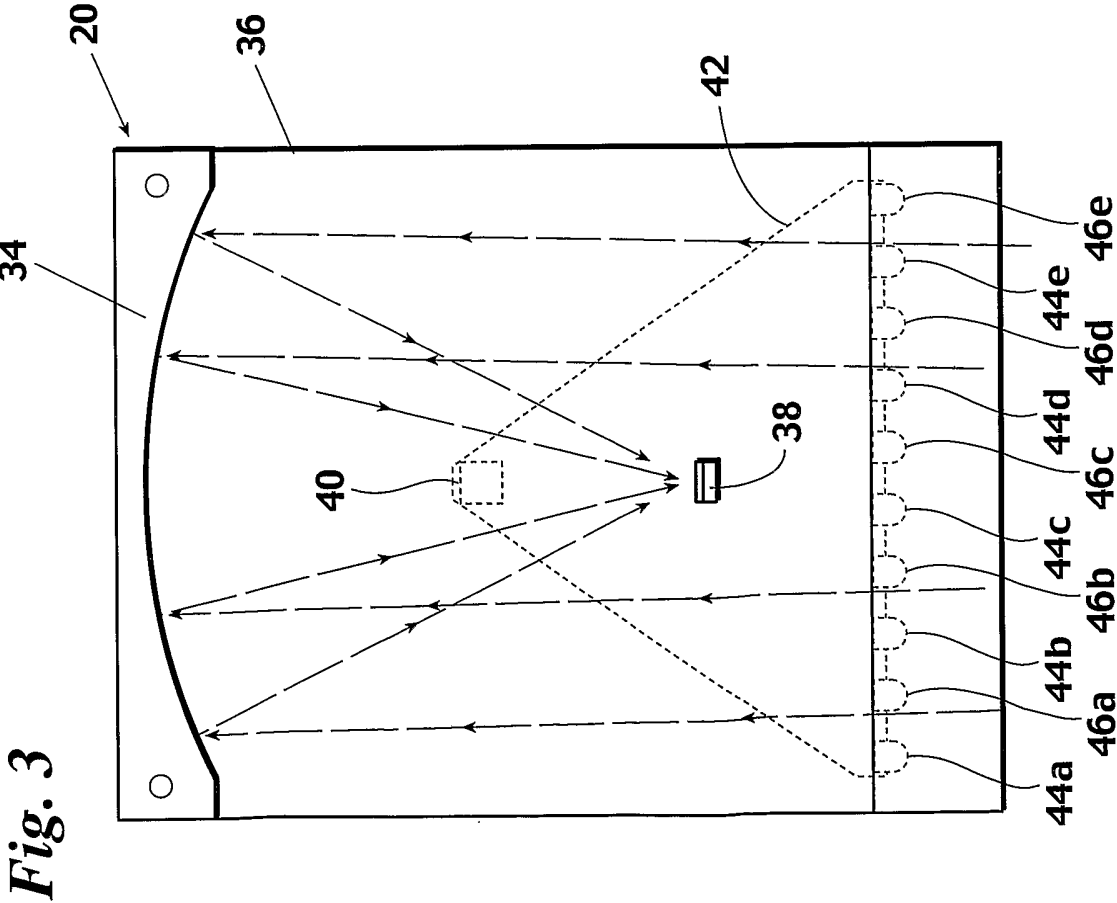
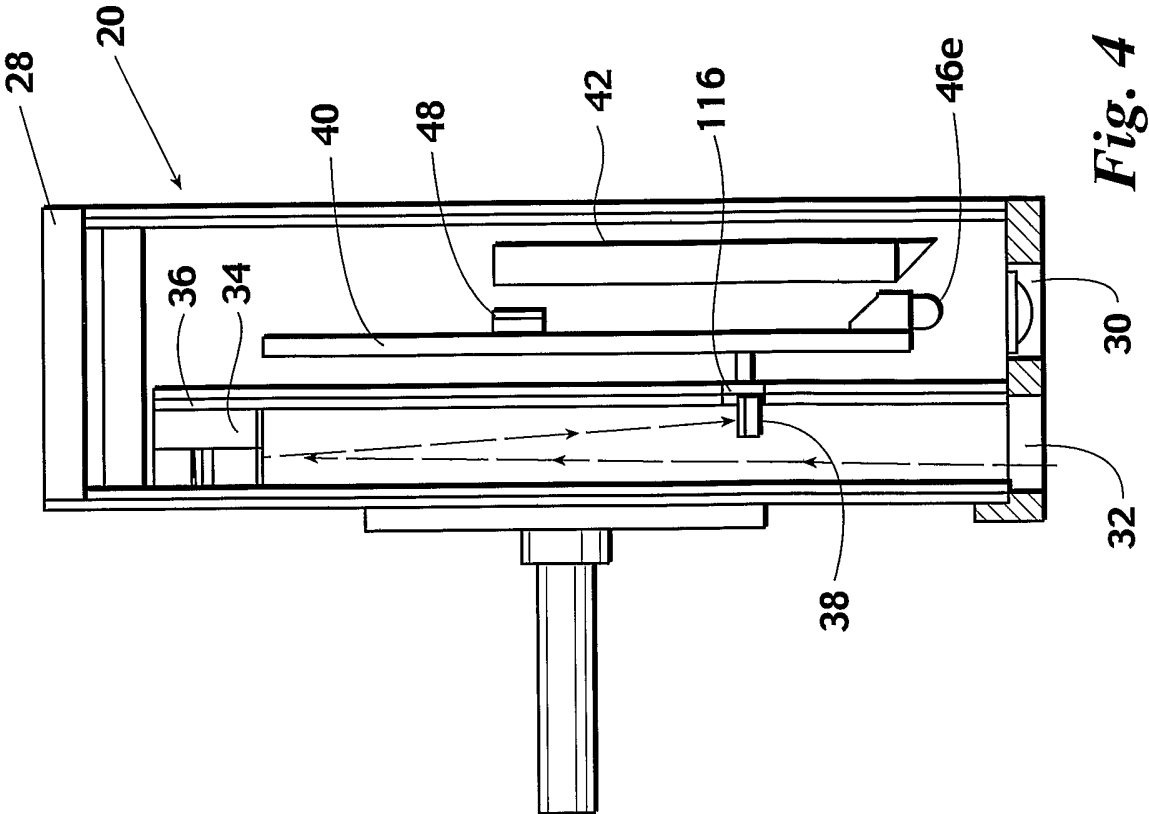


Fig. 1A



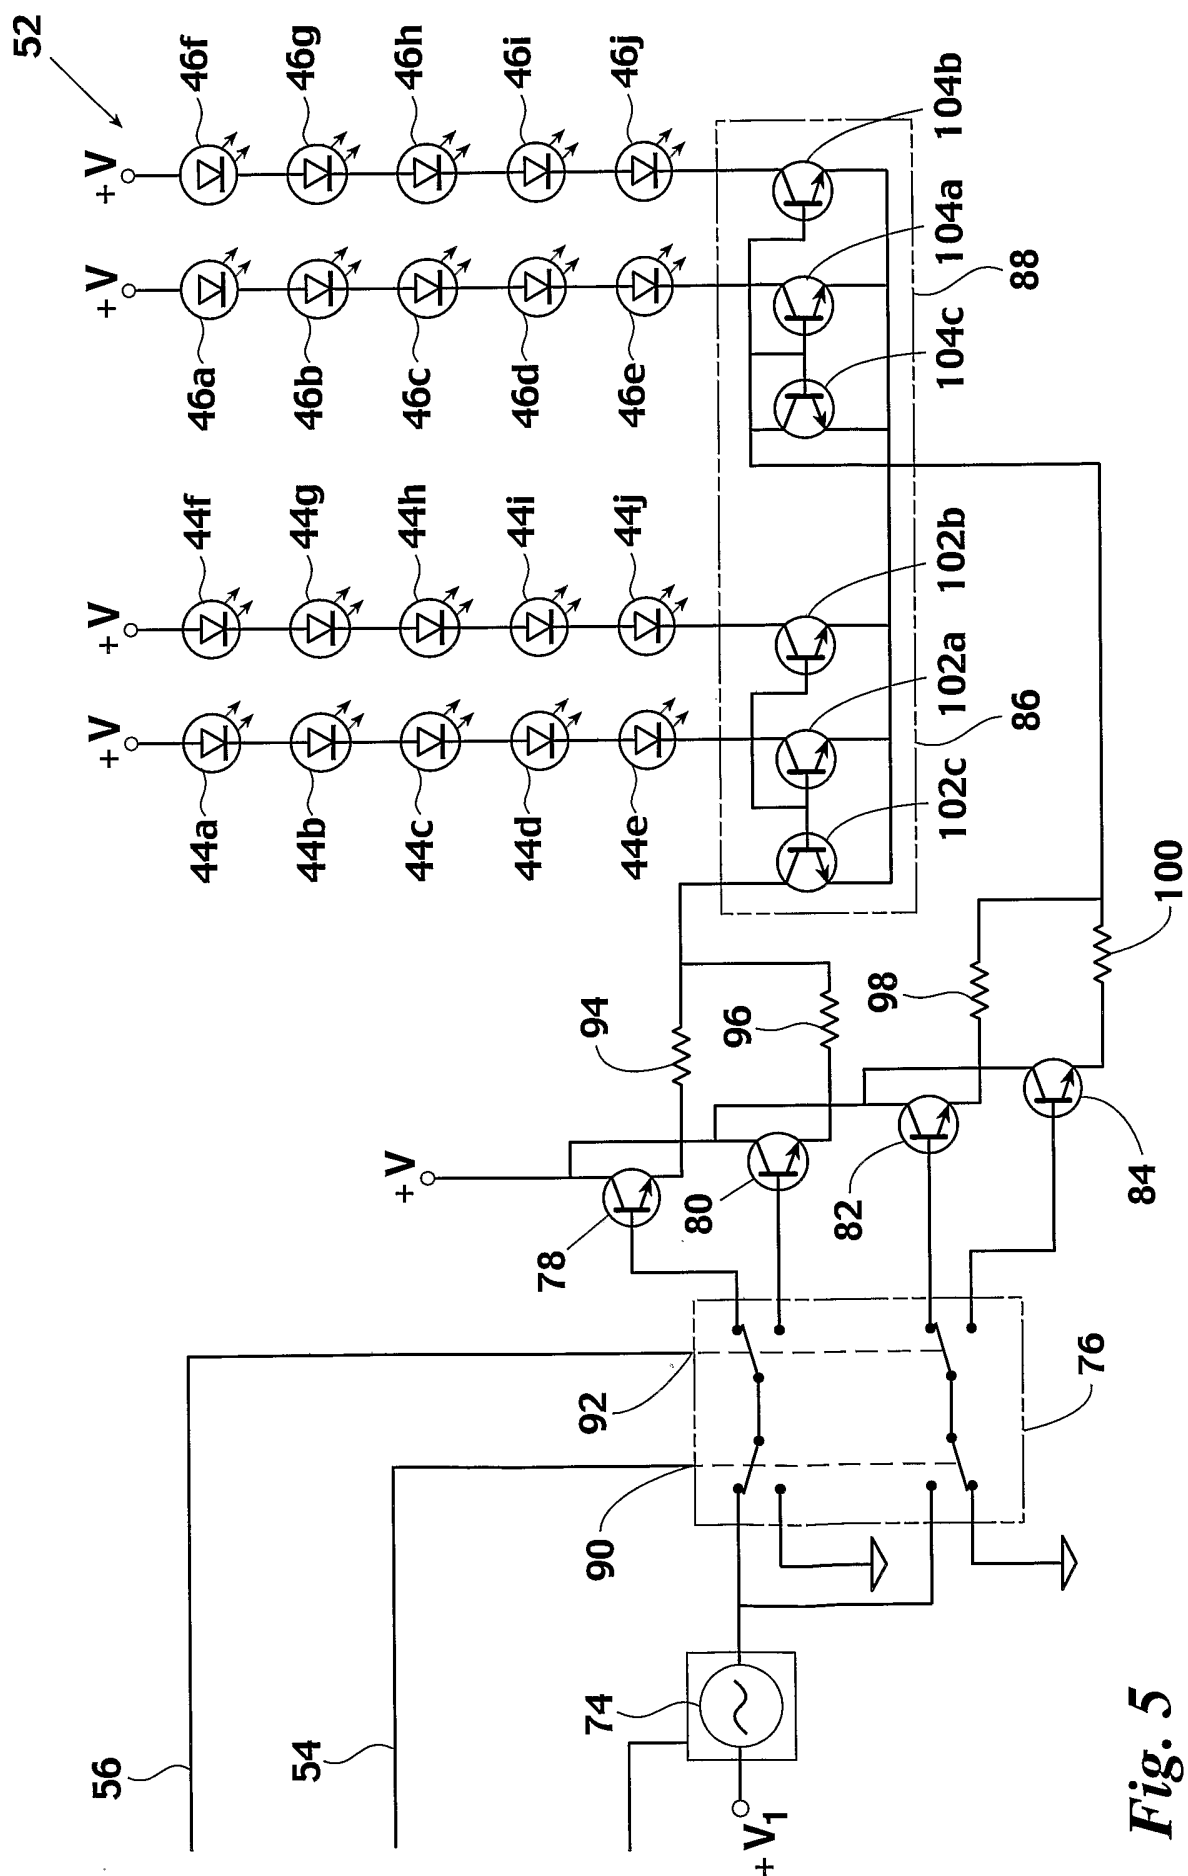


Fig. 5

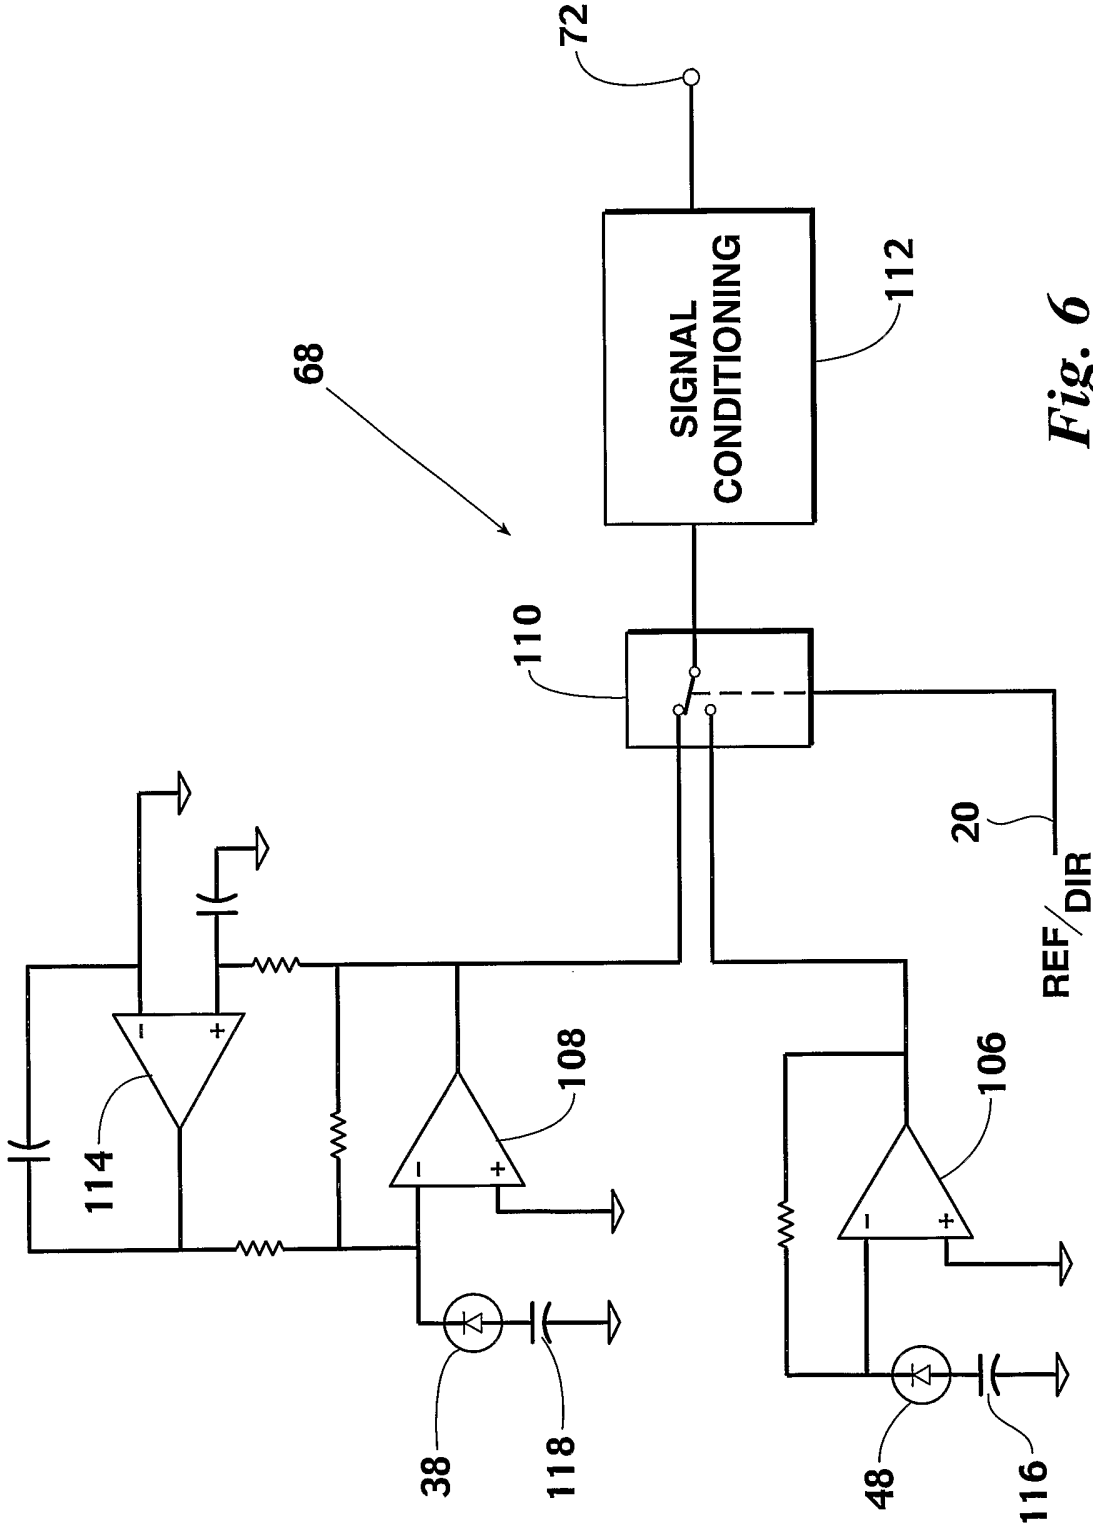


Fig. 6

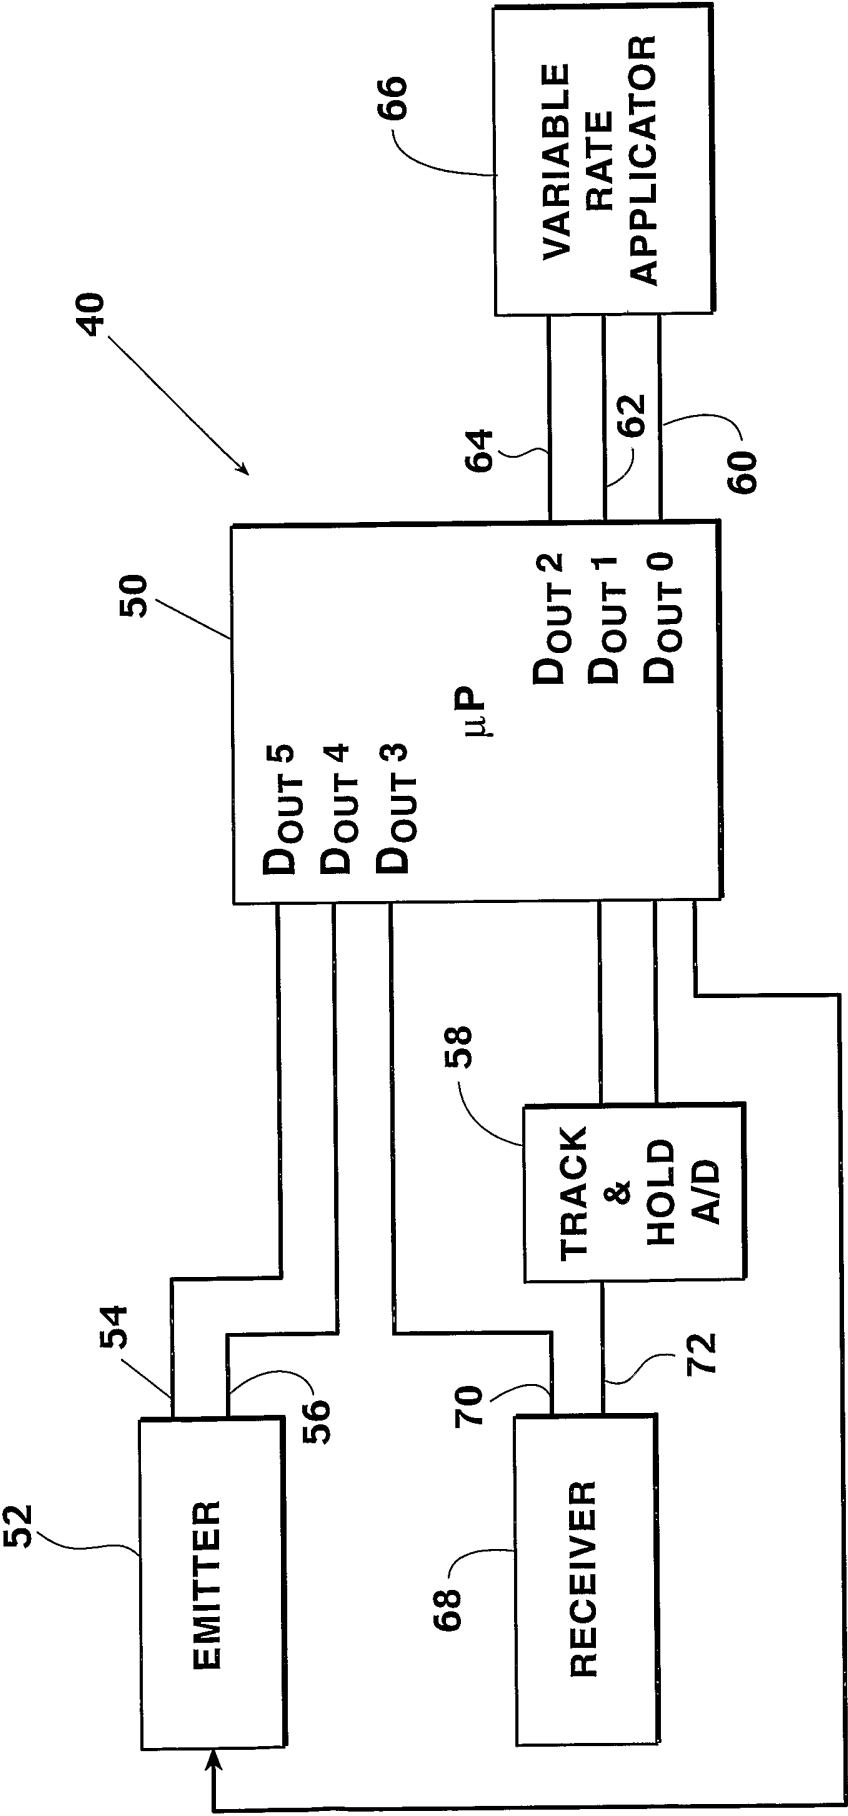
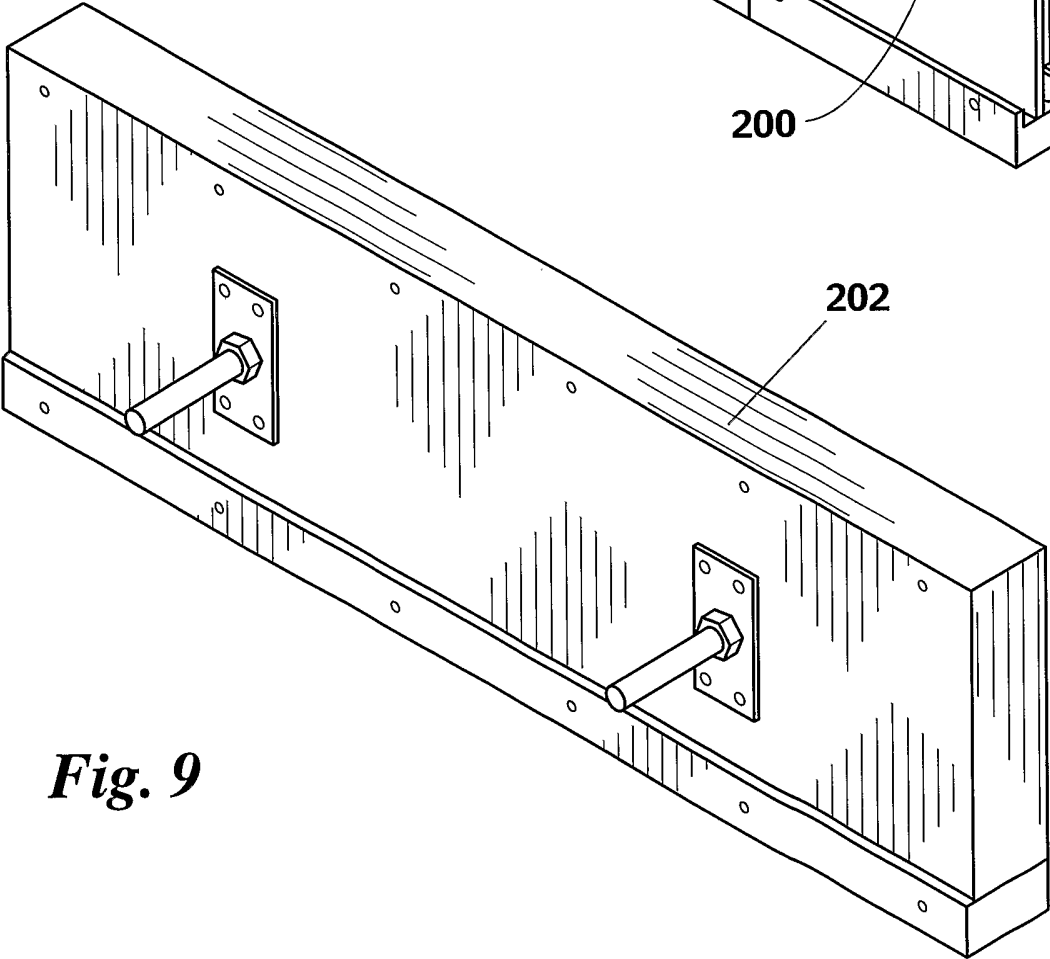
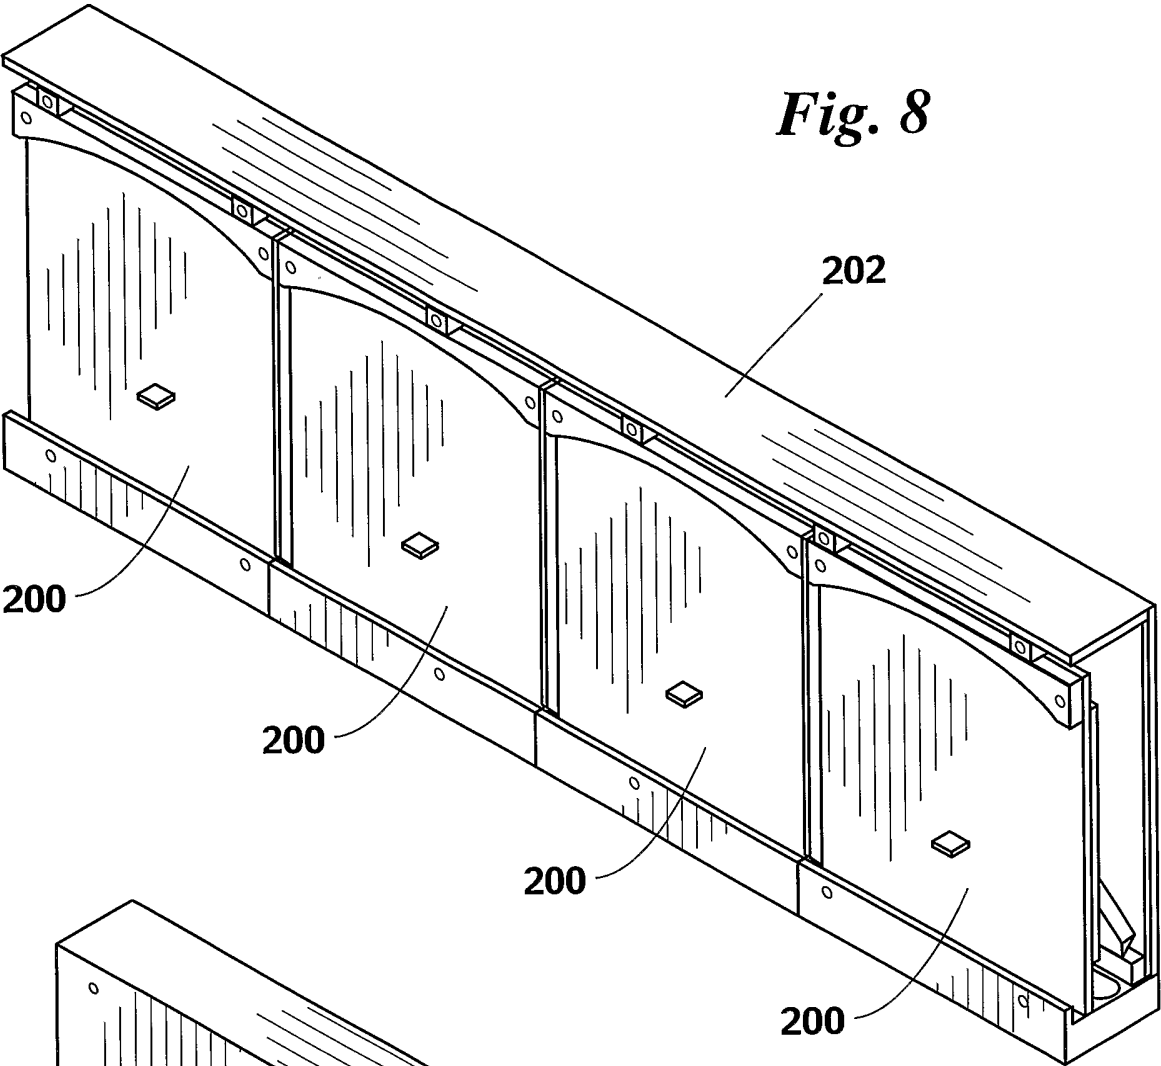


Fig. 7



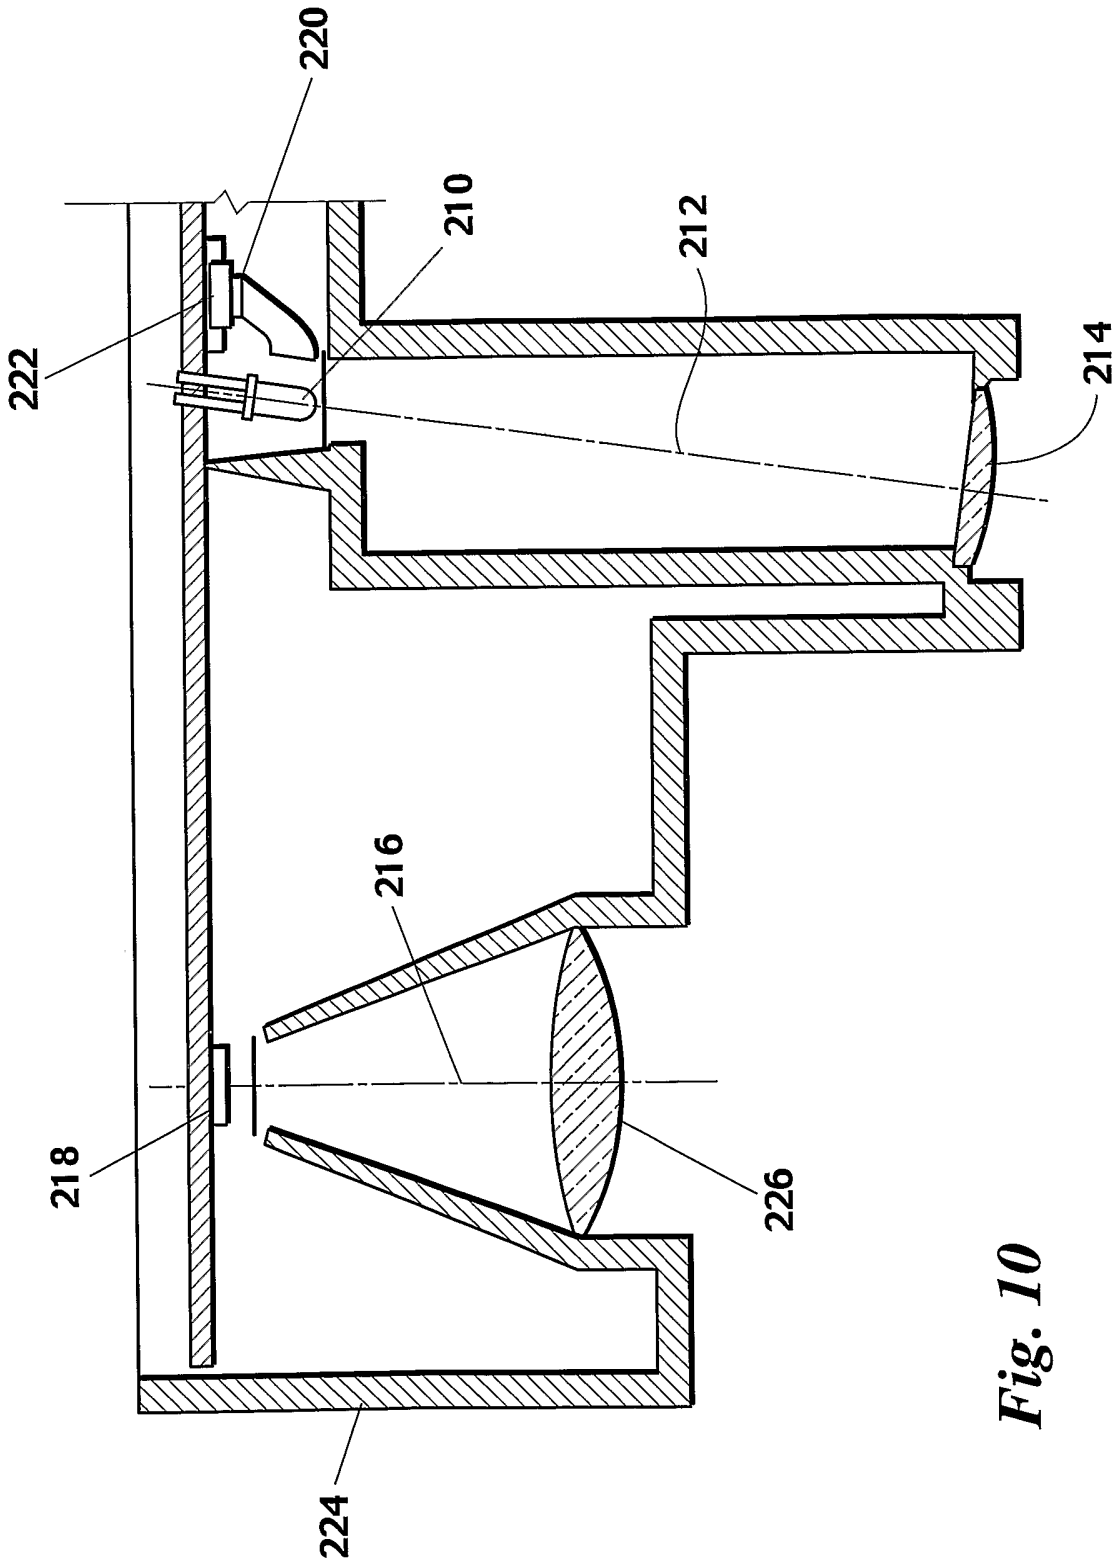


Fig. 10

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/US 02/23009

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N21/35 A01C21/00 G01J3/427 G01N21/47

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N A01C G01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

COMPENDEX, EPO-Internal, INSPEC, PAJ, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y A	WO 98 57539 A (PATCHEN INC) 23 December 1998 (1998-12-23) page 3, line 12 - line 27 page 7, line 13 - line 22 page 9, line 10 - page 10, line 22 page 10, line 27 - line 30 figure 4	1-3,5 7,9
Y A	US 5 789 741 A (BECK JAMES L ET AL) 4 August 1998 (1998-08-04) cited in the application figure 10 column 5, line 56 - column 6, line 8 -/-	1-3,5 7,9



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

11 November 2002

Date of mailing of the international search report

20/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Verdoodt, E

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/23009

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	STONE, M.L. ET AL: " Sensors for detection of nitrogen in winter wheat" SAE TECHNICAL PAPER SERIES, NO. 961757, 1996, XP001122879	8
A	figure 1 page 5, left-hand column, last paragraph -right-hand column, line 3	9
A	US 5 144 767 A (MCCLOY KEITH ET AL) 8 September 1992 (1992-09-08) the whole document	1
A	EP 0 837 317 A (FUJI XEROX CO LTD) 22 April 1998 (1998-04-22) figure 13 column 20, line 10 - line 43	10
A	US 4 632 546 A (SICK ERWIN ET AL) 30 December 1986 (1986-12-30) figure 2	11

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/23009

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9857539	A	23-12-1998	AU 8252998 A	04-01-1999
			WO 9857539 A1	23-12-1998
US 5789741	A	04-08-1998	AU 4901997 A	22-05-1998
			WO 9819141 A1	07-05-1998
US 5144767	A	08-09-1992	AU 3777589 A	12-01-1990
			WO 8912510 A1	28-12-1989
			CA 1330362 A1	21-06-1994
			DE 68912126 D1	17-02-1994
			DE 68912126 T2	09-06-1994
			EP 0420896 A1	10-04-1991
			NZ 229625 A	28-05-1991
EP 0837317	A	22-04-1998	JP 10175330 A	30-06-1998
			EP 0837317 A1	22-04-1998
			US 5894353 A	13-04-1999
US 4632546	A	30-12-1986	DE 3411934 A1	25-10-1984
			DE 3472300 D1	28-07-1988
			EP 0123929 A2	07-11-1984
			ES 531768 D0	16-05-1985
			ES 8505480 A1	01-09-1985
			JP 60089735 A	20-05-1985