



- (51) **International Patent Classification:**
G05F 1/10 (2006.01) *G05F 1/56* (2006.01)
- (21) **International Application Number:**
PCT/IB2012/053677
- (22) **International Filing Date:**
19 July 2012 (19.07.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant** (for all designated States except US): **FREESCALE SEMICONDUCTOR, INC.** [US/US]; 6501 William Cannon Drive West, Austin, Texas 78735 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants** (for US only): **PRIEL, Michael** [IL/IL]; 18 Hanotea Str app #4, 42300 Netanya (IL). **KUZMIN, Dan** [IL/IL]; 18/32 Rahavat Ilan, 54056 Givat Shmuel (IL). **SOFER, Sergey** [IL/IL]; 4 Arthur Rubinstein Street, 75412 Rishon Lezion (IL).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

- (54) **Title:** SYSTEM ON A CHIP, APPARATUS AND METHOD FOR VOLTAGE RIPPLE REDUCTION ON A POWER SUPPLY LINE OF AN INTEGRATED CIRCUIT DEVICE OPERABLE IN AT LEAST TWO MODES

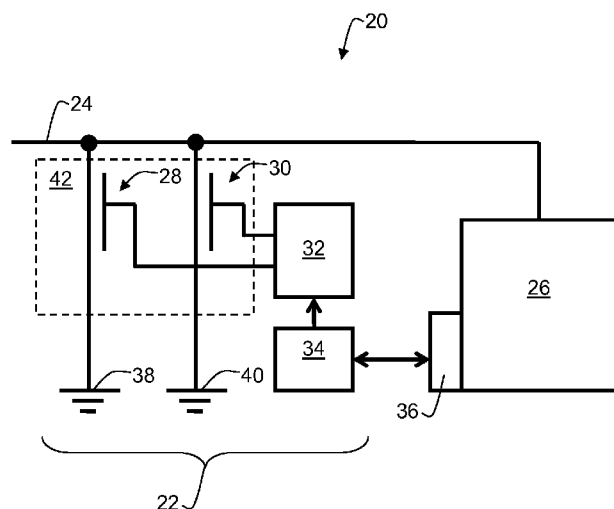


FIG. 2

(57) **Abstract:** An apparatus (22) for voltage ripple reduction on a power supply line (24) of an integrated circuit device (26) operable in at least two modes, comprises one or more clamping devices (28, 30) connectable to the power supply line; a clamp control unit (32); and a mode change detection unit (34) arranged to monitor an interface (36) of the integrated circuit device for one or more information indicating an upcoming mode change of the integrated circuit device and to provide a mode change signal to the clamp control unit when the one or more information is detected; wherein the clamp control unit is arranged to connect at least one of the one or more clamping devices to the power supply line when receiving the mode change signal.

Title: System on a chip, apparatus and method for voltage ripple reduction on a power supply line of an integrated circuit device operable in at least two modes

Description

5

Field of the invention

This invention relates to a system on a chip, an apparatus and a method for voltage ripple reduction on a power supply line of an integrated circuit device operable in at least two modes.

10 Background of the invention

In order to operate properly, an integrated circuit (IC) connected to a power supply needs to be supplied with a DC voltage whose level remains constant within a certain tolerance range. Integrated circuits comprising modern application processors are provided in packages which may introduce parasitic resistances R, inductances L and capacitances C which may result in a distinct
15 dependency of the voltage supplied to the integrated circuit device on the characteristic over time of the current consumed by the integrated circuit device. High current consumption may, for example, be accompanied by a drop in the supply voltage, whereas fast, sharp changes of the consumed current may be accompanied by high frequency portions or voltage ripples added to the DC voltage signal received from the power supply.

20 Referring to FIG. 1, a sketch of a prior art supply voltage reaction on a sharp IC current change is schematically shown. The sketch illustrates a characteristic over time t of a supply voltage level U 10 provided to an integrated circuit in response to a sharp change of the IC current 12 drawn from the power supply. As shown, the supply voltage level 10 exhibits voltage ripples caused by the current level change at time T. These ripples may, for example, be reduced by
25 employing an on-die decoupling capacitor.

In US 6,717,389, a method for transient voltage reduction in a current controlled voltage regulator is described. It is shown that an always opened and controlled current source can be added in parallel to the actual current load to keep a total regulator current constant.

In US 7,633,773, an on-die anti-resonance structure for an integrated circuit is described.
30 The structure may reduce the effects of chip-package resonance in an integrated circuit assembly. This includes employing a series RLC circuit to reduce the output impedance of the power delivery system at the resonance frequency.

Summary of the invention

35 The present invention provides a system on a chip, an apparatus and a method for voltage ripple reduction on a power supply line of an integrated circuit device operable in at least two modes as described in the accompanying claims.

Specific embodiments of the invention are set forth in the dependent claims.

40 These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

Brief description of the drawings

Further details, aspects and embodiments of the invention will be described, by way of example only, with reference to the drawings. In the drawings, like reference numbers are used to identify like or functionally similar elements. Elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale.

FIG. 1 schematically shows a sketch of a prior art supply voltage reaction on a sharp IC current change.

FIG. 2 schematically shows a circuit diagram of an example of an embodiment of a system on a chip with an embodiment of an apparatus for voltage ripple reduction on a power supply line of an integrated circuit device operable in at least two modes.

FIG. 3 schematically shows a sketch of a supply voltage, clamp current and clamp control voltage reaction on a sharp IC current change.

FIG. 4 schematically shows a diagram of simulated supply voltage, clamp current and clamp control voltage reaction on a sharp IC current change.

FIG. 5 schematically shows a flowchart of an example of an embodiment of a method for voltage ripple reduction on a power supply line of an integrated circuit device operable in at least two modes.

Detailed description of the preferred embodiments

Because the illustrated embodiments of the present invention may for the most part, be implemented using electronic components and circuits known to those skilled in the art, details will not be explained in any greater extent than that considered necessary, as illustrated, for the understanding and appreciation of the underlying concepts of the present invention and in order not to obfuscate or distract from the teachings of the present invention.

Referring to FIG. 2, a circuit diagram of an example of an embodiment of a system on a chip with an embodiment of an apparatus 22 for voltage ripple reduction on a power supply line 24 of an integrated circuit device 26 operable in at least two modes is schematically shown. The apparatus 22 for voltage ripple reduction on a power supply line 24 of an integrated circuit device 26 operable in at least two modes comprises one or more clamping devices 28, 30 connectable to the power supply line 24; a clamp control unit 32; and a mode change detection unit 34 arranged to monitor an interface 36 of the integrated circuit device 26 for one or more information indicating an upcoming mode change of the integrated circuit device 26 and to provide a mode change signal to the clamp control unit 32 when the one or more information is detected; wherein the clamp control unit 32 is arranged to connect at least one of the one or more clamping devices 28, 30 to the power supply line 24 when receiving the mode change signal. The provided apparatus 22 may allow for higher operation frequency and/or lower power consumption of the integrated circuit device 26.

The power supply line 24 may, for example, be connected to a pin for connecting the system on a chip 20 to a power supply. The integrated circuit device 26 may be any suitable device and, for example, be a processing device, such as a microprocessor, a graphics processing unit, or a

microcontroller unit, just to name a few, or it may, for example, be a module, e.g., a processing core, of a system on a chip 20. As shown, the integrated circuit device 22 may be, or be part of, a system on a chip 20 e.g. used in an embedded system. Also, the integrated circuit device 22 may be part of a system comprising several chips. As another example, the integrated circuit device 26
5 may be a memory device, such as random access memory (RAM) device.

The integrated circuit device 22 may be operable in at least two modes, for example a sleep mode, stand-by mode or low power mode and a normal operation mode or full power mode. As another example, the different modes, usually of processing devices or graphics processing units, may be different voltage modes when using dynamic voltage scaling, such as overvolting and
10 undervolting, as a power management technique, may be different frequency modes when using dynamic frequency scaling, such as processor throttling, as a power management technique, or to DVFS, i.e., combined Dynamic Voltage and Frequency Scaling, or other suitable modes.

The clamping device may be any device connectable to the power supply line 24 and arranged to, when in connecting state, allow a clamp current between the power supply line 24 and, for example, ground 38, 40 or any other current sink, such as a transistor, for example a field
15 effect transistor or other transistor operated as a clamp device. For example, a field effect clamp transistor device may be referred to as in a connecting state when its path between source and drain terminals is in a conductive state for a current flow between said terminals.

The interface 36 of the integrated circuit device 26 may be any point of interaction between components where data communicated to and from the integrated circuit device 26 may be
20 accessible. As an example, the interface may comprise an interrupt register of a processing device receiving interrupts related to the integrated circuit device 26 or a configuration register. The interface may, for example, be a register device, such as an interrupt register or configuration register, or any other point of interaction where any data communicated to and from the integrated
25 circuit device 26 may be accessible for the mode change detection unit 34.

The mode change detection unit 34 may, for example, be any circuitry arranged to monitor the interface 36, i.e., to read the content or receive data or other signals sent to the interface 36, e.g., by monitoring the related traffic on a bus.

The mode change detection unit 34 may monitor the interface 36 for information indicating
30 an upcoming mode change of the integrated circuit device 26. The information may, for example, be a trigger for initiating the mode change, such as a wake-up request for the integrated circuit device received during a low power mode, or other suitable signal or data or event. The information may be available before the actual mode change is carried out.

The mode change detection unit 34 may be arranged to provide the mode change signal to
35 the clamp control unit 32 before the mode of the integrated circuit device 26 is changed. This may allow communicating the upcoming mode change which will result in a significant change of current consumed by the integrated circuit device 26 to the clamp control unit 32 early enough to connect at least one of the one or more clamping devices 28, 30 to the power supply line 24. For instance, prior to the actual mode change of the integrated circuit device 26, i.e., functionality change of the
40 IC module, which may cause a current load step, the clamping device 28, 30 may be brought into

connecting state and be opened, for example, gradually. This may initiate current through parasitic inductances. After the mode change, the clamping device(s) 28, 30 may be disconnected or shutdown again.

This may allow to have a clamp current flowing through the now connected clamping devices. The clamp current may be a portion of the current which otherwise would be entirely provided to the integrated circuit device 26. The amount of clamp current may depend on the number and physical characteristics of the connected clamping device. The clamp control unit 32 may, for example, be arranged to enable one more of the clamping devices 28, 30 with respect to the expected level of current change in the integrated circuit device, i.e., depending on the type of expected mode change.

The apparatus 22 may comprise an electrostatic discharge (ESD) current clamping structure 42 comprising the one or more clamping devices 28, 30. The ESD current clamping structure 42 may be a structure dedicated to protecting the integrated circuit device 26 from being damaged in the event of a high current received through the power supply line 24 due to an electrostatic discharge encountered, for example, at the power supply pin to which the power supply line 24 may connect. According to the presented embodiment of the apparatus, an ESD clamping structure 42, which may already be available for the purpose of ESD protection of the integrated circuit device 26, may also be used for voltage ripple reduction by smoothing the current into the integrated circuit device 26 by means of an additional clamp current through the one or more clamping devices 28, 30. This may save die area as compared to, for example, a solution using an on-die decoupling capacitor.

The clamp control unit 32 may further be arranged to connect the one or more clamping devices 28, 30 to the power supply line 24 when receiving an electrostatic discharge trigger signal. In other words, the clamp control unit may be arranged to perform the functionality required for ESD protection and it may also be able to perform the functionality of mode change signal triggered controlling of the clamping devices 28, 30 for voltage ripple reduction.

At least one of the one or more clamping devices 28, 30 may, for example, be a field effect transistor (FET) circuit, which may easily be integrated. It may, for example, be an ESD FET clamp transistor or a transistor being part of a larger ESD FET clamp structure. As an example, an ESD "bigFET" device, which may be connected between each power supply line and ground on the die, may be used for ESD protection as well as for generating controllable current from the power supply line 24 for smoothing an expected sharp current change and, thereby, reduce or avoid ripples in the supply voltage. In other embodiments, other clamping devices, such as other types of transistor circuits may be used.

In an embodiment of the apparatus 22, the clamp control unit 32 may be arranged to select a specific conductivity level detected when connecting the at least one of the one or more clamping devices 28, 30 to the power supply line 24. The clamping device may be partially opened and may allow to carry a lower clamp current when the mode change is detected than during, for example an ESD event. This may, for example, be achieved by using a reduced gate control voltage in case the clamping device is a FET, as shown in FIG. 2. It may also be possible to open the respective

gate such that a big slope waveform for the gate control, e.g. a triangular shaped control of the gate, is realized.

The clamp control unit 32 may, for example, be arranged to connect a set, which depends on which specific information is detected, i.e., the clamp control unit 32 may be arranged to select which or how many of the clamping devices 28, 30 to connect to the power supply line 24 depending on the type of mode change signalled by the one or more detected information.

At least one of the one or more information may, for example, be a wake-up request for the integrated circuit device 26. It may, for example, be an interrupt request for a wake-up, i.e., a wake-up signal, detected, e.g., in an interrupt register. This information may be issued prior to switching the integrated circuit device 26 from a low power mode to a normal operation mode.

The mode change detection unit 34 may allow detecting more than one type of information, each indicative for the same type of mode change or for different types of mode change of the integrated circuit device 26. It may, for example, also allow issuing different mode change signals depending on the detected upcoming mode change or mode changes.

At least one type of information may, for example, be a voltage scaling request for the integrated circuit device 26, which may be used for processing devices or graphics processing units when using dynamic voltage scaling. It should be noted that some changes may occur simultaneously. As an example, performing a wake up procedure may comprise a dynamic voltage scaling. As another example, the type may be a frequency scaling request for the integrated circuit device or an information regarding a combined DVFS.

As shown in FIG. 2, a system on a chip, SoC, 20 may comprise an integrated circuit device 22 operable in at least two modes, an interface 36 of the integrated circuit device 26 and an apparatus 20 for voltage ripple reduction on a power supply line 24 of the integrated circuit device 26 as described above. A system on a chip (SOC) may be an integrated circuit that integrates all components of an electronic system into a single chip. The integrated circuit device 26 shown in FIG. 2 may be regarded as a module of the SOC 20 that shares a common IC die with, for example, the apparatus 22.

Referring to FIG. 3, a graph of a supply voltage 50, clamp current 54 and clamp control voltage 56 as a function of time illustrating a reaction on a sharp IC current 52 change is schematically shown. When comparing the supply voltage 50 of FIG. 3 with the supply voltage shown in FIG. 1, it can be seen that voltage ripples caused by the sharp IC current 52 change at time T are reduced, which is achieved by changing the clamp control voltage 56 prior to time T for connecting the clamping device with the power supply line, which results in a linear increase of the clamp current 54 in the shown example.

Referring to FIG. 4, a graph of a supply voltage 60, 66, and clamp current 64 as a function of time from a simulated reaction on a sharp IC current 62 change is shown. As shown, supply voltage 66 ripple is reduced significantly on account of a small clamp current 64 pulse through an ESD clamp transistor as compared with the supply voltage 60 ripple without employing the apparatus described above. In the shown example, the clamp current 64 pulse may have an amplitude of 300 mA, provided by 3 integrated ESD clamp cells for protecting a processing core.

Partial opening of the clamping devices may be obtained by, e.g., application of a short clamp current 64 pulse.

In the shown example, the IC current 62 consumption contains a step from 0.5 A (Ampere) to 1 A within 3 nanoseconds (nsec), whereas the shunt current or clamp current 64 applied to
5 compensate for the change or step may be up to 300 mA. Voltage characteristic 60 illustrates a characteristic of a supply voltage without shunt compensation by the clamp current 64, whereas voltage characteristic 66 illustrates a characteristic of a supply voltage with shunt compensation by the clamp current 64, which provides a gain of about 10 mV in the supply voltage amplitude, translated into about 120 MHz.

10 Referring to FIG. 5, a flowchart of an example of an embodiment of a method for voltage ripple reduction on a power supply line of an integrated circuit device operable in at least two modes is schematically shown. The method shown in Fig. 5 allows implementing the advantages and characteristics of the described apparatus as part of a method for voltage ripple reduction on a power supply line of an integrated circuit device operable in at least two modes. The shown method
15 is a method for voltage ripple reduction on a power supply line of an integrated circuit device operable in at least two modes using an apparatus comprising one or more clamping devices connectable to the power supply line; a clamp control unit; and a mode change detection unit. The method comprises monitoring 70, by the mode change detection unit, an interface of the integrated circuit device for one or more information indicating an upcoming mode change of the integrated
20 circuit device; providing 72, by the mode change detection unit, a mode change signal to the clamp control unit when the one or more information is detected; and connecting 74, by the clamp control unit, at least one of the one or more clamping devices to the power supply line when receiving the mode change signal.

In the foregoing specification, the invention has been described with reference to specific
25 examples of embodiments of the invention. It will, however, be evident that various modifications and changes may be made therein without departing from the broader spirit and scope of the invention as set forth in the appended claims.

The connections as discussed herein may be any type of connection suitable to transfer signals from or to the respective nodes, units or devices, for example via intermediate devices.
30 Accordingly, unless implied or stated otherwise, the connections may for example be direct connections or indirect connections. The connections may be illustrated or described in reference to being a single connection, a plurality of connections, unidirectional connections, or bidirectional connections. However, different embodiments may vary the implementation of the connections. For example, separate unidirectional connections may be used rather than bidirectional connections and vice versa. Also, plurality of connections may be replaced with a single connection that
35 transfers multiple signals serially or in a time multiplexed manner. Likewise, single connections carrying multiple signals may be separated out into various different connections carrying subsets of these signals. Therefore, many options exist for transferring signals.

Although specific conductivity types or polarity of potentials have been described in the
40 examples, it will be appreciated that conductivity types and polarities of potentials may be reversed.

Those skilled in the art will recognize that the boundaries between logic blocks are merely illustrative and that alternative embodiments may merge logic blocks or circuit elements or impose an alternate decomposition of functionality upon various logic blocks or circuit elements. Thus, it is to be understood that the architectures depicted herein are merely exemplary, and that in fact
5 many other architectures can be implemented which achieve the same functionality. For example, the clamp control unit 32 and the mode change detection unit 34 may be provided as a single unit.

Any arrangement of components to achieve the same functionality is effectively "associated" such that the desired functionality is achieved. Hence, any two components herein combined to achieve a particular functionality can be seen as "associated with" each other such that the desired
10 functionality is achieved, irrespective of architectures or intermedial components. Likewise, any two components so associated can also be viewed as being "operably connected," or "operably coupled," to each other to achieve the desired functionality.

Furthermore, those skilled in the art will recognize that boundaries between the above described operations merely illustrative. The multiple operations may be combined into a single
15 operation, a single operation may be distributed in additional operations and operations may be executed at least partially overlapping in time. Moreover, alternative embodiments may include multiple instances of a particular operation, and the order of operations may be altered in various other embodiments.

Also for example, in one embodiment, the illustrated examples may be implemented as
20 circuitry located on a single integrated circuit or within a same device. For example, the apparatus 22 and the integrated circuit device 26 may be provided as circuitry located on a single integrated circuit and may, for example, be part of a SOC 20. Alternatively, the example may be implemented as any number of separate integrated circuits or separate devices interconnected with each other in a suitable manner. For example, the clamping devices 28, 30 may be provided externally
25 attached to a power supply pin supplying power to the power supply line 24.

Also for example, the examples, or portions thereof, may implemented as soft or code representations of physical circuitry or of logical representations convertible into physical circuitry, such as in a hardware description language of any appropriate type.

Also, the invention is not limited to physical devices or units implemented in non-
30 programmable hardware but can also be applied in programmable devices or units able to perform the desired device functions by operating in accordance with suitable program code, such as mainframes, minicomputers, servers, workstations, personal computers, notepads, personal digital assistants, electronic games, automotive and other embedded systems, cell phones and various other wireless devices, commonly denoted in this application as 'computer systems'.

35 However, other modifications, variations and alternatives are also possible. The specifications and drawings are, accordingly, to be regarded in an illustrative rather than in a restrictive sense.

In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word 'comprising' does not exclude the presence of other elements or steps
40 then those listed in a claim. Furthermore, the terms "a" or "an," as used herein, are defined as one

or more than one. Also, the use of introductory phrases such as "at least one" and "one or more" in the claims should not be construed to imply that the introduction of another claim element by the indefinite articles "a" or "an" limits any particular claim containing such introduced claim element to inventions containing only one such element, even when the same claim includes the introductory phrases "one or more" or "at least one" and indefinite articles such as "a" or "an." The same holds true for the use of definite articles. Unless stated otherwise, terms such as "first" and "second" are used to arbitrarily distinguish between the elements such terms describe. Thus, these terms are not necessarily intended to indicate temporal or other prioritization of such elements. The mere fact that certain measures are recited in mutually different claims does not indicate that a combination of these measures cannot be used to advantage.

Claims

1. An apparatus (22) for voltage ripple reduction on a power supply line (24) of an integrated circuit device (26) operable in at least two modes, comprising

5 one or more clamping devices (28, 30) connectable to said power supply line;
 a clamp control unit (32); and
 a mode change detection unit (34) arranged to monitor an interface (36) of said integrated circuit device for one or more information indicating an upcoming mode change of said integrated circuit device and to provide a mode change signal to said clamp control unit when said one or
10 more information is detected;

 wherein said clamp control unit is arranged to connect at least one of said one or more clamping devices to said power supply line when receiving said mode change signal.

2. The apparatus as claimed in claim 1, wherein said mode change detection unit is arranged to
15 provide said mode change signal to said clamp control unit before said mode of said integrated circuit device is changed.

3. The apparatus as claimed in claim 1 or claim 2, comprising an electrostatic discharge current clamping structure (42) comprising said one or more clamping devices.

4. The apparatus as claimed in any one of the preceding claims, wherein said at least one of said one or more clamping devices is a field effect transistor circuit.

5. The apparatus as claimed in any one of the preceding claims, wherein said clamp control unit
25 is arranged to connect said one or more clamping devices to said power supply line when receiving an electrostatic discharge trigger signal.

6. The apparatus as claimed in any one of the preceding claims, wherein said clamp control unit is arranged to select a conductivity level depending on said one or more detected information when
30 connecting said at least one of said one or more clamping devices to said power supply line.

7. The apparatus as claimed in any one of the preceding claims, wherein said clamp control unit is arranged to connect a set depending on said one or more detected information of said one or more clamping devices to said power supply line.

8. The apparatus as claimed in any one of the preceding claims, wherein at least one of said one or more information is a wake-up request for said integrated circuit device.

9. The apparatus as claimed in any one of the preceding claims, wherein at least one of said one
40 or more information is a voltage scaling request for said integrated circuit device.

10. The apparatus as claimed in any one of the preceding claims, wherein at least one of said one or more information is a frequency scaling request for said integrated circuit device.

- 5 11. A system on a chip (20), comprising
an integrated circuit device (26) operable in at least two modes;
an interface (36) of said integrated circuit device; and
an apparatus (22) as claimed in any one of the preceding claims for voltage ripple
reduction on a power supply line (24) of said integrated circuit device.
- 10 12. The system on a chip as claimed in claim 11, wherein said integrated circuit device is a
processing device.
- 15 13. The system on a chip as claimed in claim 11 or claim 12, wherein said interface is a register
device.
- 20 14. A method for voltage ripple reduction on a power supply line of an integrated circuit device
operable in at least two modes using an apparatus comprising one or more clamping devices
connectable to said power supply line; a clamp control unit; and a mode change detection unit; said
method comprising
monitoring (70), by said mode change detection unit, an interface of said integrated circuit
device for one or more information indicating an upcoming mode change of said integrated circuit
device;
providing (72), by said mode change detection unit, a mode change signal to said clamp
25 control unit when said one or more information is detected; and
connecting (74), by said clamp control unit, at least one of said one or more clamping
devices to said power supply line when receiving said mode change signal.

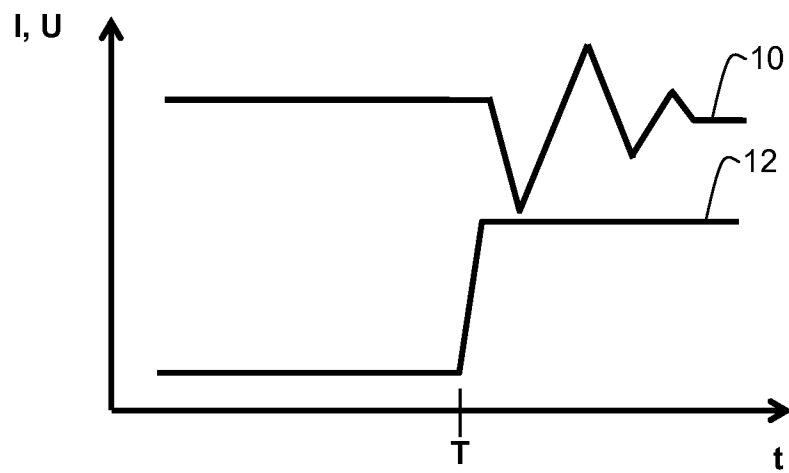


FIG. 1 (PRIOR ART)

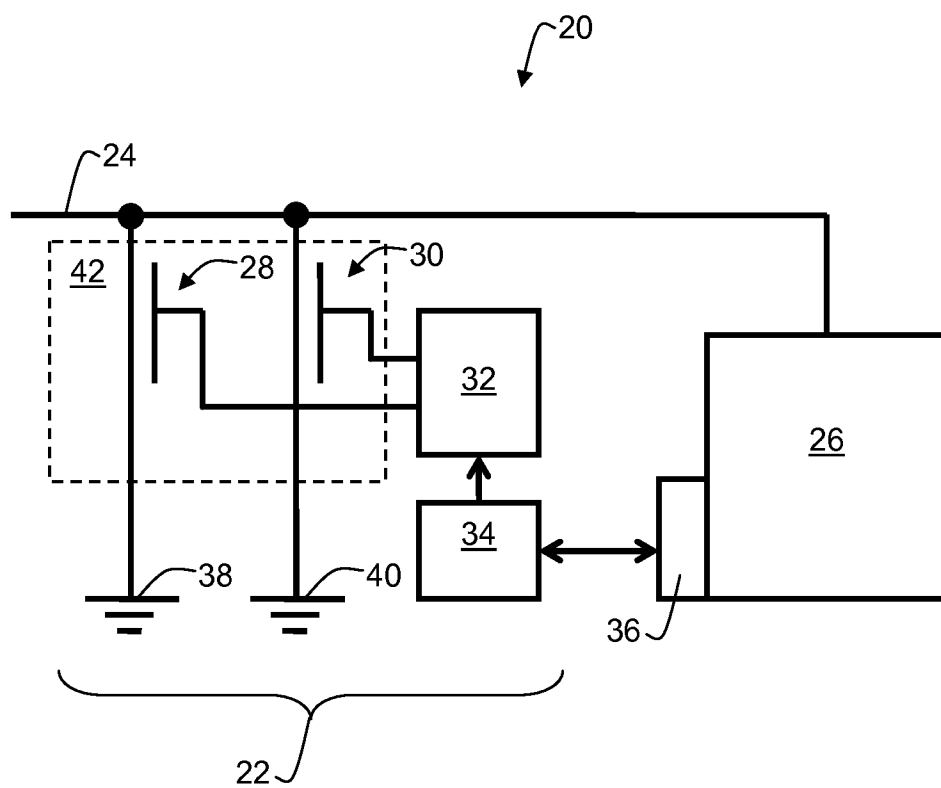


FIG. 2

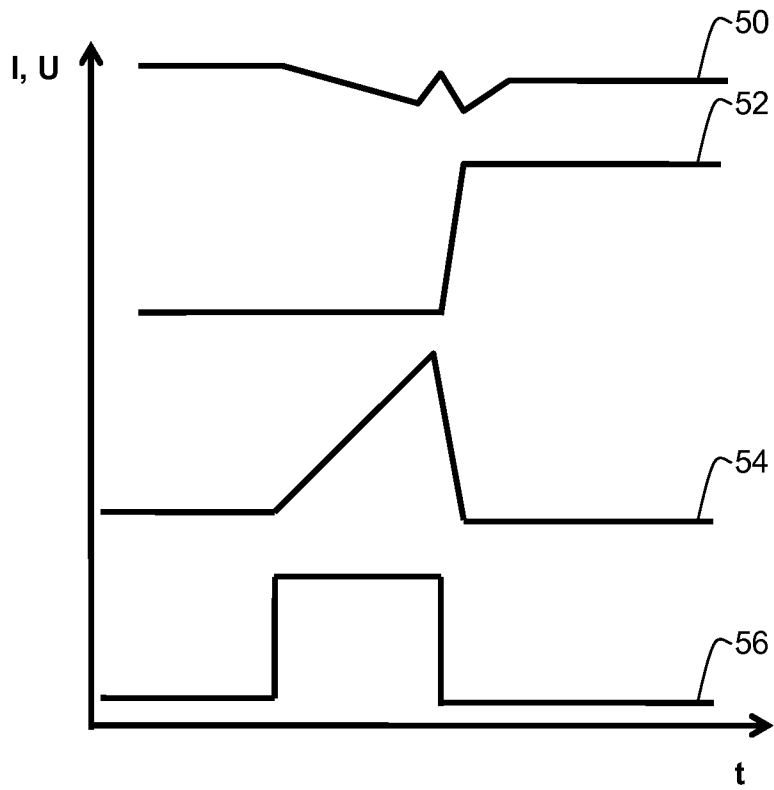


FIG. 3

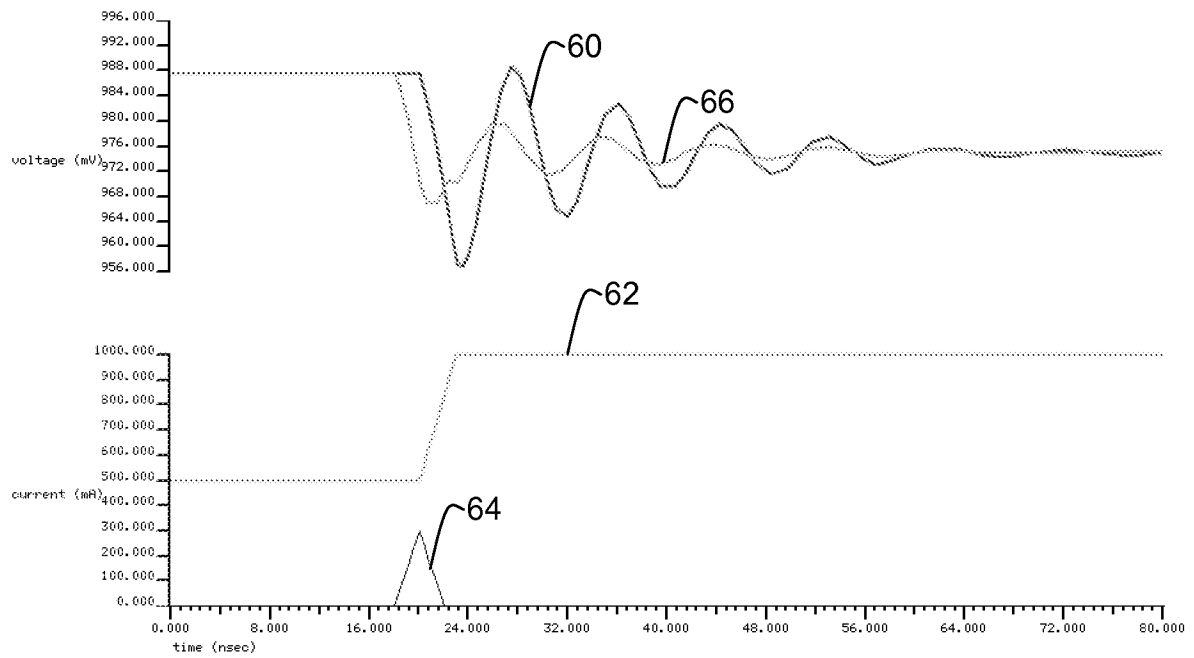


FIG. 4

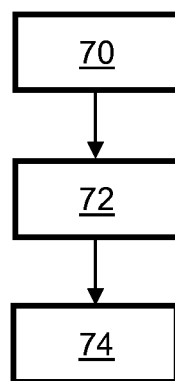


FIG. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/IB2012/053677**A. CLASSIFICATION OF SUBJECT MATTER****G05F 1/10(2006.01)i, G05F 1/56(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G05F 1/10; G06F 1/10; H02M 7/537; G05F 1/613; H02M 7/06; G05F 1/44; H03F 1/26

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: "VOLTAGE," "RIPPLE," "REDUCTION," "CLAMP," "MODE," AND "CHANGE"

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 7157891 B1 (ROB DRURY et al.) 02 January 2007 See abstract; figures 1A-2C; claims 1-17.	1-3, 14
A	US 2001-0015637 A1 (YASUMASA NISHIYAMA) 23 August 2001 See abstract; figures 1, 4; paragraphs [4]-[10], paragraphs [23]-[33].	1-3, 14
A	US 2012-0051108 A1 (LEU CHING-SHAN et al.) 01 March 2012 See abstract; figures 1-12; claims 1-8.	1-3, 14
A	US 6734718 B1 (PAN; FENG) 11 May 2004 See abstract; figures 1, 2, 4, 6-11; claims 1-14.	1-3, 14
A	US 04092609 A (KAPLAN; LEONARD ABRAHAM) 30 May 1978 See abstract; figures 1, 2; claims 1-9.	1-3, 14

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

21 FEBRUARY 2013 (21.02.2013)

Date of mailing of the international search report

21 FEBRUARY 2013 (21.02.2013)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

Cho Sung Chan

Telephone No. 82-42-481-8462



INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB2012/053677**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 12
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:

Claim 12 does not meet the requirement of PCT Article 6 because these depend on multiple dependent claim 11 that does not comply with PCT Rule 6.4(a).
3. ☒ Claims Nos.: 4-11, 13
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- ☐ The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/IB2012/053677

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 7157891 B1	02.01.2007	None	
US 2001-0015637 A1	23.08.2001	CN 1156986 C0 CN 1310522 A0 EP 1128533 A2 EP 1128533 A3 JP 2001-236130 A KR 10-0393536 B1 KR 10-2001-0083199 A US 6445166 B2	07.07.2004 29.08.2001 29.08.2001 10.12.2003 31.08.2001 02.08.2003 31.08.2001 03.09.2002
US 2012-0051108 A1	01.03.2012	None	
US 6734718 B1	11.05.2004	AU 2003-297939 A1 AU 2003-297939 A8 CN 1729610 A CN 1729610 C0 EP 1576717 A2 JP 2006-512887 A JP 2006-512887 T KR 10-2005-0098843 A US 2004-0251956 A1 US 7116155 B2 WO 2004-062074 A2 WO 2004-062074 A3	29.07.2004 29.07.2004 01.02.2006 01.02.2006 21.09.2005 13.04.2006 13.04.2006 12.10.2005 16.12.2004 03.10.2006 22.07.2004 04.11.2004
US 04092609 A	30.05.1978	None	