



(22) Date de dépôt/Filing Date: 2008/11/12

(41) Mise à la disp. pub./Open to Public Insp.: 2009/06/18

(45) Date de délivrance/Issue Date: 2018/03/27

(30) Priorité/Priority: 2007/12/18 (GB0724630.9)

(51) Cl.Int./Int.Cl. *G01D 11/24* (2006.01),
G01K 1/00 (2006.01), *G01K 13/00* (2006.01),
G01K 13/02 (2006.01), *B64D 43/00* (2006.01),
G01K 7/16 (2006.01)


(72) Inventeur/Inventor:
KULCZYK, WOJCIECH KONRAD, GB

(73) Propriétaire/Owner:
WESTON AEROSPACE LIMITED, GB

(74) Agent: FETHERSTONHAUGH & CO.

(54) Titre : CAPTEUR ET METHODE DE MESURE DE TEMPERATURE

(54) Title: TEMPERATURE SENSOR AND METHOD FOR MEASURING TEMPERATURE

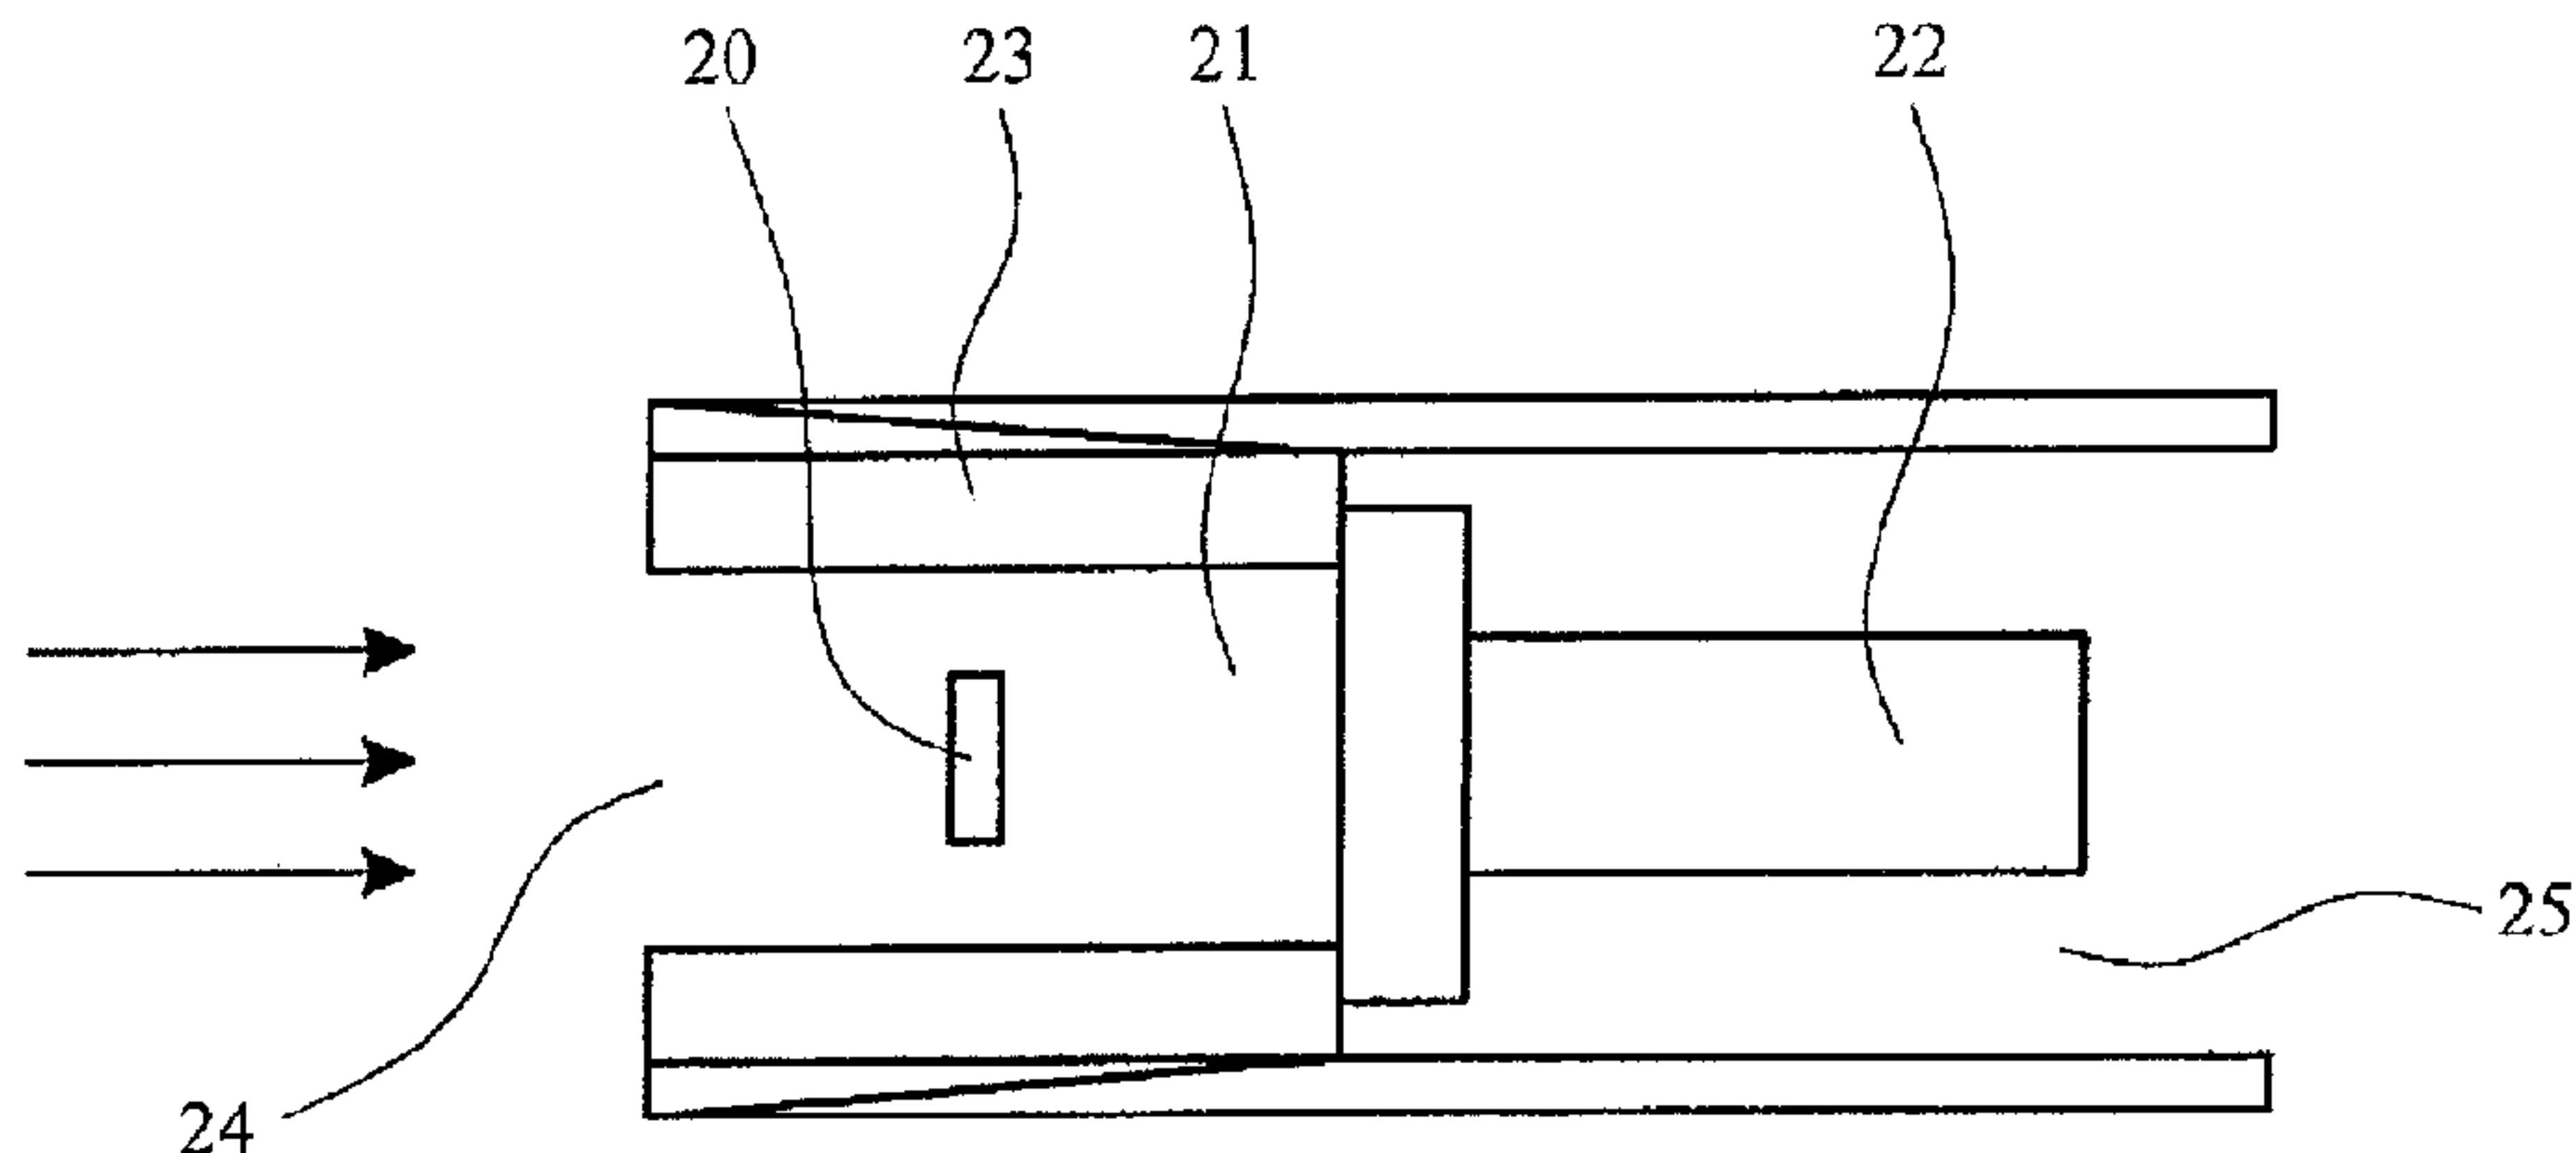

(57) **Abrégé/Abstract:**

This provides a total gas temperature sensor for measuring the temperature of gas in a gas flow. A gas temperature sensor comprises a measurement chamber having a gas inlet and a gas outlet; an outlet valve located at the gas outlet, operable to seal the gas outlet when in a closed position, and a temperature sensing element located in the measurement chamber. The sensor may be simple to manufacture, robust, provide for a low recovery correction and may not suffer from significant boundary layer problems.

Abstract

This provides a total gas temperature sensor for measuring the temperature of gas in a gas flow. A gas temperature sensor comprises a measurement chamber having a gas inlet and a
5 gas outlet; an outlet valve located at the gas outlet, operable to seal the gas outlet when in a closed position, and a temperature sensing element located in the measurement chamber. The sensor may be simple to manufacture, robust, provide for a low recovery correction and may not suffer from significant boundary layer problems.

TEMPERATURE SENSOR AND METHOD FOR MEASURING TEMPERATURE

This relates to a system and method for measuring the total temperature of a gas.

5 In particular, this is applicable to total air temperature sensing on aircraft.

Total air temperature (TAT) is a measure of air temperature that is used for air flows.

TAT is the static air temperature plus the adiabatic temperature rise of the air produced by the complete conversion of the kinetic energy of the air into thermal energy.

10

Total Air Temperature can be expressed by the following equation:

$$T_{TAT} = T_s \left[1 + \frac{\gamma - 1}{2} M^2 \right]$$

where

Ts is the Static Air Temperature

15

M is the free stream Mach number

γ is the ratio of gas specific heats (1.4 at 0 deg. C)

The free stream Mach number M is a measure of the speed of the air flow past the sensor.

20

However the measured temperature, sometimes called the recovered temperature, is different from the total temperature because of incomplete conversion of the gas motion energy into the thermal energy.

25

Therefore the recovered temperature is given by:

$$T_R = T_s \left[1 + r \frac{\gamma - 1}{2} M^2 \right]$$

- 2 -

where r is the recovery factor and is defined as:

$$r = \frac{T_R - T_S}{T_{TAT} - T_S}$$

The recovery factor depends on the effectiveness of the sensor in capturing the adiabatic temperature rise and on the ratio between the internal and external air velocities. The recovery factor also depends on the construction of the probe and varies with Mach number.

The recovered temperature T_R can be expressed more conveniently by:

10

$$T_R = T_{TAT}(1 - \eta)$$

where

$$\eta = \frac{T_{TAT} - T_R}{T_{TAT}}$$

15 and is called the recovery correction.

Total air temperature measurement is critical to many aircraft systems. TAT sensors mounted on the aircraft body provide information about the air temperature that can be used to calculate true air speed. TAT sensors mounted at the inlet to gas turbine engines are used to provide accurate engine power settings and to select engine pressure ratios prior to take off. TAT measurements are also required for stall control, with inlet guide vane scheduling and for calculation of engine parameters such as corrected speed, fuel flow and fuel consumption.

25 The basic architecture of TAT sensors on aircraft has remained unchanged for many years. US2588840 and US2970475 describe the principles of operation and the basic architecture of these sensors.

- 3 -

Prior TAT sensors comprise a temperature sensing element 10 mounted inside a housing 11 through which air flows, as illustrated in Figure 1. The arrows in Figure 1 indicate the direction of air flow. The housing is mounted on a strut 12 so that the sensor air inlet is positioned away from the aircraft body and the associated boundary layer of air. The sensors work by slowing down the flow of air through the housing so that the kinetic energy of the air is converted into an adiabatic temperature rise. The airflow is divided into a through channel 13 and a deflected channel 14. The sensing element 10 is located in the deflected path. The air channels 13 and 14 are arranged in such a way that the air speed past the sensor may be very much reduced. Dividing the airflow in this way may also reduce the amount of water droplets and debris that impinge on the sensing element 10.

There are a number of technical problems with this basic solution that have led to very complex mechanical and electrical configurations for the sensors.

One parameter that affects the accuracy of TAT measurements is the boundary layer formed inside the sensor housing. Typically, during flight the temperature of the walls of the housing surrounding the sensor is lower than the air temperature. The air close to the walls is therefore cooler than the air in the centre of the housing. The air close to the walls also moves more slowly than the air passing through the centre of the housing and so forms a boundary layer of cool air. At low air speeds, the boundary layer thickness can build up to the extent that it will affect the measured temperature.

In order to control the thickness of the boundary layer, prior designs have included a complex array of apertures 15 within the housing, as shown in Figure 1, designed to bleed off air from the boundary layer and thus control its thickness. The size and position of these holes has been empirically determined so as to reduce the effect of the boundary layer without affecting the main flow of air through the sensor. The need for accurate fabrication of the sensor housing including these holes is a major factor in the high cost of the probe.

- 4 -

Another problem with prior total air temperature sensors is that they are not able to completely convert the kinetic energy of the gas into an adiabatic temperature rise. The recovery correction typically varies with Mach number from 0 to about 0.6%.

5 A further problem associated with prior total air temperature sensors is the build up of ice on the sensor housing. The solution to the problem of build up of ice on the sensor housing has been to include heater elements within the housing itself. However, the de icing heater elements affect the accuracy of the temperature measurement, as the generated heat is detected by the temperature sensor. This effect is more prominent at
10 low speeds and can result in an error of up to 80C. The heating elements can actually cause the boundary layer of air close to the interior surfaces of the housing to have a higher temperature than the main airflow and at low speed the thickness of the boundary layer can be enough to contact the sensing element.

15 A novel sensor is disclosed. Apparatus and methods for de-icing a temperature sensor that may not significantly affect temperature measurements taken by the temperature sensor and that may use a low power are disclosed.

According to an aspect, there is provided a total air temperature sensor for measuring
20 the total air temperature of a flow of air, the sensor comprising: a measurement chamber having an air inlet and an air outlet; an outlet valve located at the air outlet, the outlet valve configured to seal the air outlet and stop the flow of air in the measurement chamber when in a closed position; and a temperature sensing element located in the measurement chamber, the temperature sensing element configured to provide an
25 output indicative of the total air temperature when the outlet valve is in the closed position.

According to another aspect, there is provided a total air temperature sensor for measuring the total air temperature of a flow of air, the sensor comprising; a
30 measurement chamber having an air inlet and an air outlet; an outlet valve located at the air outlet, the outlet valve configured to seal the air outlet when in a closed position; a temperature sensing element located in the measurement chamber; and a controller, the controller connected to the outlet valve and to

- 4a -

the temperature sensing element, and the controller is configured to control the outlet valve to move between the closed position and an open position at a predetermined frequency and to record total air temperature measurements from the temperature sensing element when the outlet valve is in the closed position.

5

Embodiments will now be described in detail, with reference to the accompanying drawings, in which:

Figure 1 illustrates a total air temperature probe in accordance with the prior art;

10

Figure 2a is a schematic illustration of an air temperature probe in accordance with an embodiment, with the valve in a closed position;

Figure 2b shows the temperature sensor of Figure 2a with the valve in the open position;

Figure 3 illustrates a sensor in accordance with an embodiment mounted within a
5 housing;

Figure 4 is a schematic illustration of the electronic components of an air temperature sensing system in accordance with an embodiment;

10 Figure 5 is a flow diagram illustrating the method steps for sensing total air temperature in accordance with an embodiment;

Figure 6 illustrates a de-icing system for use with an embodiment; and

15 Figure 7 illustrates a second de-icing system suitable for use with an embodiment.

Figures 2a and 2b are schematic illustrations of a TAT sensor in accordance with an embodiment. A temperature sensing element 20 is located in a measurement chamber 21. The chamber comprises side walls 23, an air inlet 24 and an air outlet 25.
20 The air outlet 25 can be sealed by a valve 22. In Figure 2a, the valve is in a closed position, sealing the outlet 25. In Figure 2b, the valve is in an open position allowing the air to flow through the measurement chamber.

In this embodiment, the temperature sensor is a resistance temperature device (RTD),
25 such as a platinum resistance thermometer (PRT) of either a wire wound or sintered film type, a tungsten resistor or a rhodium-iron RTD. Alternatively, a thermistor, such as a diamond thermistor, a thermocouple or optical temperature sensor may be used.

The valve in Figure 2 is illustrated schematically and may be any suitable type of valve.
30 It is preferably a micro-electrical mechanical system (MEMS) valve. Robust and reliable MEMS valves that can operate at high frequency (in the order of 1 KHz) are now available. A MEMS valve can be fabricated specifically for a TAT sensor in accordance with an embodiment, having the desired performance characteristics. Alternatively a

- 6 -

solenoid valve or any other suitable type of valve may be used.

5 The chamber sidewalls 23 can be made of any suitable material. In MEMS devices, silicon may be a preferred material.

The measurement chamber shown in Figure 2 has a circular cross-section, with a diameter of approximately 3-5mm. However, other cross-sectional shapes and dimensions are possible.

10

The operation of the TAT sensor shown in Figure 2 will now be described, with reference to Figure 5. With the valve 22 in an open position, as shown in Figure 2b, air flows through the measurement chamber. The valve is then moved to a closed position, as shown in Figure 2a, in step 502. The air flow through the chamber is stopped, resulting in conversion of the kinetic energy of the air into a temperature rise inside the measurement chamber. While the valve is closed a temperature measurement is taken from the temperature sensing element 20, in step 504. The temperature measurement is taken only a short time, in this example within 10 milliseconds, after the valve is closed. The short delay between valve closure and measurement is shown as step 503. This ensures that there is insufficient time for any significant thermal transfer between the air and the housing before measurement. The valve is then opened again in step 505 to allow air to flow through the chamber as shown in Figure 2b. The valve remains open for a short period, again of the order of 10 milliseconds, shown as step 506, before the process is repeated and another temperature measurement taken. A practically continuous TAT measurement may be obtained in this way. Typical sampling time in an aircraft engine control unit is about 20ms and this is a reasonable temperature sampling rate. For a minimum airflow of 10m/s, the air in the measurement chamber will be replaced in a few milliseconds.

30 This mode of operation may provide almost complete recovery of the kinetic energy of the airflow, resulting in a low recovery correction factor. The speed of operation of the valve may also prevent the build up of a boundary layer within the measurement chamber. Air is stopped as a result of the valve being closed but is then flushed through

- 7 -

the measurement chamber after the valve is opened. The temperature measurement is taken very shortly after the valve is closed may also prevent any significant thermal transfer from the sidewalls.

5

It is possible to take a plurality of temperature measurements per cycle of the valve, i.e. a plurality of measurements may be taken during each period when the valve is closed. Equally, temperature measurements may be taken only once every few cycles of the valve.

10

Figure 3 is an illustration of a TAT sensor in accordance with an embodiment. The sensing element and measurement chamber are mounted within a housing similar to that used for prior TAT sensors. The sensor is mounted to the aircraft body 30 on a vane 31.

Air flows through inlet 32. The air flow is then split between a straight through path exiting through outlet 33 and a deflected path exiting through outlet 34, via the measurement chamber 21. The deflection of the air before it enters the measurement chamber passes the sensing element may reduce the amount of solid particles and water droplets that enter the measurement chamber. As the valve is used to stop air flow it is less crucial that air is slowed before entering the measurement chamber. Boundary layer control is also less critical. As a result, the air channels may be made to a simpler and cheaper design.

15

Figure 4 is a schematic diagram showing the electronic control elements associated with a TAT sensor in accordance with an embodiment. Both the temperature sensing element 20 and the valve 22 are connected to an electronic controller 41. The controller 41 synchronises the operation of the sensing element of the valve so that temperature measurements are taken at a predetermined time following closure of the valve. The controller 41 also controls the frequency of operation of the valve 22. The frequency of operation of the valve may be adjusted according to particular environmental conditions and engine speed.

25

30

The results of the temperature measurements taken by the sensing element are passed from the controller 41 into elements of the aircraft control system 40. The total air

- 8 -

temperature measurements are passed to the Air dData Computer 42, the Full Authority Digital Engine Control (FADEC) 43, and to the Cockpit display 44.

- 5 It is possible to take total air pressure measurements in the measurement chamber as well. For example, MEMS pressure measurement devices may be incorporated into the chamber walls or into the valve.

Figure 6 illustrates a second aspect. Figure 6 shows a TAT probe mounted to an aircraft
10 body 30. The TAT probe may be of the type shown in Figure 1 or of a type in accordance with the first aspect as shown in Figure 3. Mounted to the sensor housing 11 at the air inlet 61 are piezo-electric transducers 60 that are operable to produce ultrasonic vibrations in the housing 11. The transducers are driven (by electronic control means not shown) at a frequency chosen to optimally prevent
15 deposition of any ice crystals approaching the inlet 61. The maximum interaction between ultrasonic waves and small particles occurs when the wavelength of waves is close to the size of particles.

$$f = V/\lambda$$

20 where f is the frequency, V is the wave velocity in material and λ is the wavelength of the wave

e.g. for $V=5000\text{m/sec}$ and $d=0.025\text{mm}$, $f=200\text{MHz}$.

The transducers can be mounted to the housing to produce different types of waves in
25 the housing, e.g. shear, longitudinal, transverse. These waves may be generated in combination or separately and at the same or different frequencies.

The transducers require low power in comparison to the heater elements of the prior art. Furthermore, the transducers may be quickly switched on when icing conditions are
30 detected and turned off otherwise, saving power.

Using ultrasonic transducers may reduce the build up of ice at the inlet to the TAT sensor is that there is no heating of the incoming air and so no interference with the temperature

- 9 -

measurement taken by the TAT sensor. In contrast, prior solutions, incorporating heating elements into the housing do affect the accuracy of temperature measurements taken by a TAT probe.

5

Figure 6 shows ultrasonic transducers used with a TAT probe, but transducers may be used in any type of gas probe when ice build up is an issue. It is also possible to use transducers in conjunction with other de-icing techniques, such as heating elements.

10

Figure 7 illustrates a third aspect, which is another apparatus and method of preventing ice build up at the inlet to a TAT probe. The TAT probe shown in Figure 7 may be of the type in accordance with the first aspect as shown in Figure 3 or may be a TAT probe in accordance with the prior art, as shown in Figure 1. The system shown in Figure 7 may also be applied to other types of gas probes and with other de-icing techniques.

15

The system in Figure 7 shows a microwave source 70 mounted to the aircraft body 30 including microwave focussing element 71 for focussing the emitted microwave radiation onto the inlet 72 of the TAT probe or just upstream of the inlet. The microwave radiation is of a frequency (2.45GHz) that is strongly absorbed by water (and ice) but is not strongly absorbed by air or by the material of the housing. The microwave radiation will be absorbed by any ice crystals and may melt the ice crystals prior to entry into the probe without significantly heating the surrounding air. The microwave source 70 should be mounted close to the inlet (e.g. 3-4cm away) so that the microwaves can reach ice deposited on the inside of the housing on the lower lip. Using a microwave source may prevent ice build up without significantly affecting the temperature of the air entering the probe or the temperature of the housing, and so the accuracy of the temperature measurement may not be compromised.

Any suitable microwave source may be used in the system shown in Figure 7. Solid-state microwave sources, such as IMPATT diodes, are now widely available which may be low power when compared to the heating elements of the prior art and may be robust. These solid state microwave sources may be simply mounted to an aircraft body and may be quickly switched on when icing conditions are detected and switched off

30

- 10 -

otherwise. The focussing elements may ensure that the power required is kept to a minimum and that the microwaves do not interfere with any electronic systems on the aircraft.

- 11 -

Claims

1. A total air temperature sensor for measuring the total air temperature of a flow of air, said sensor comprising:

5

a measurement chamber having an air inlet and an air outlet;

10

an outlet valve located at the air outlet, said outlet valve configured to seal the air outlet and stop the flow of air in the measurement chamber when in a closed position; and

15

a temperature sensing element located in the measurement chamber, said temperature sensing element configured to provide an output indicative of the total air temperature when the outlet valve is in the closed position.

20

2. A total air temperature sensor according to claim 1, further comprising a controller, wherein the controller is connected to the outlet valve and to the temperature sensing element, and wherein the controller is configured to synchronise the operation of the outlet valve and the temperature sensing element.

25

3. A total air temperature sensor according to claim 2, wherein the controller is configured to control the outlet valve to move between the closed position and an open position at a predetermined frequency.

4. A total air temperature sensor according to claim 2 or 3, wherein the controller is configured to store a temperature measurement from the temperature sensor within a predetermined time of the outlet valve moving to a closed position.

30

5. A total air temperature sensor according to any one of claims 1 to 4, wherein the temperature sensing element is a resistance temperature device.

- 12 -

6. A total air temperature sensor according to any one of claims 1 to 5, wherein the outlet valve is a micro-electrical mechanical systems (MEMS) valve or a solenoid driven valve.

5

7. A total air temperature sensor according to any one of claims 1 to 6, further comprising a housing, wherein the measurement chamber is located within the housing, and de-icing means for reducing the build-up of ice on the housing wherein said de-icing means comprises an ultrasonic transducer or a microwave source.

10

8. A total air temperature sensor for measuring the total air temperature of a flow of air, said sensor comprising;

a measurement chamber having an air inlet and an air outlet;

15

an outlet valve located at the air outlet, said outlet valve configured to seal the air outlet when in a closed position;

a temperature sensing element located in the measurement chamber; and

a controller, said controller connected to the outlet valve and to the temperature sensing element, and the controller is configured to control the outlet valve to move between the closed position and an open position at a predetermined frequency and to record total air temperature measurements from the temperature sensing element when the outlet valve is in the closed position.

20

25

-1/7-

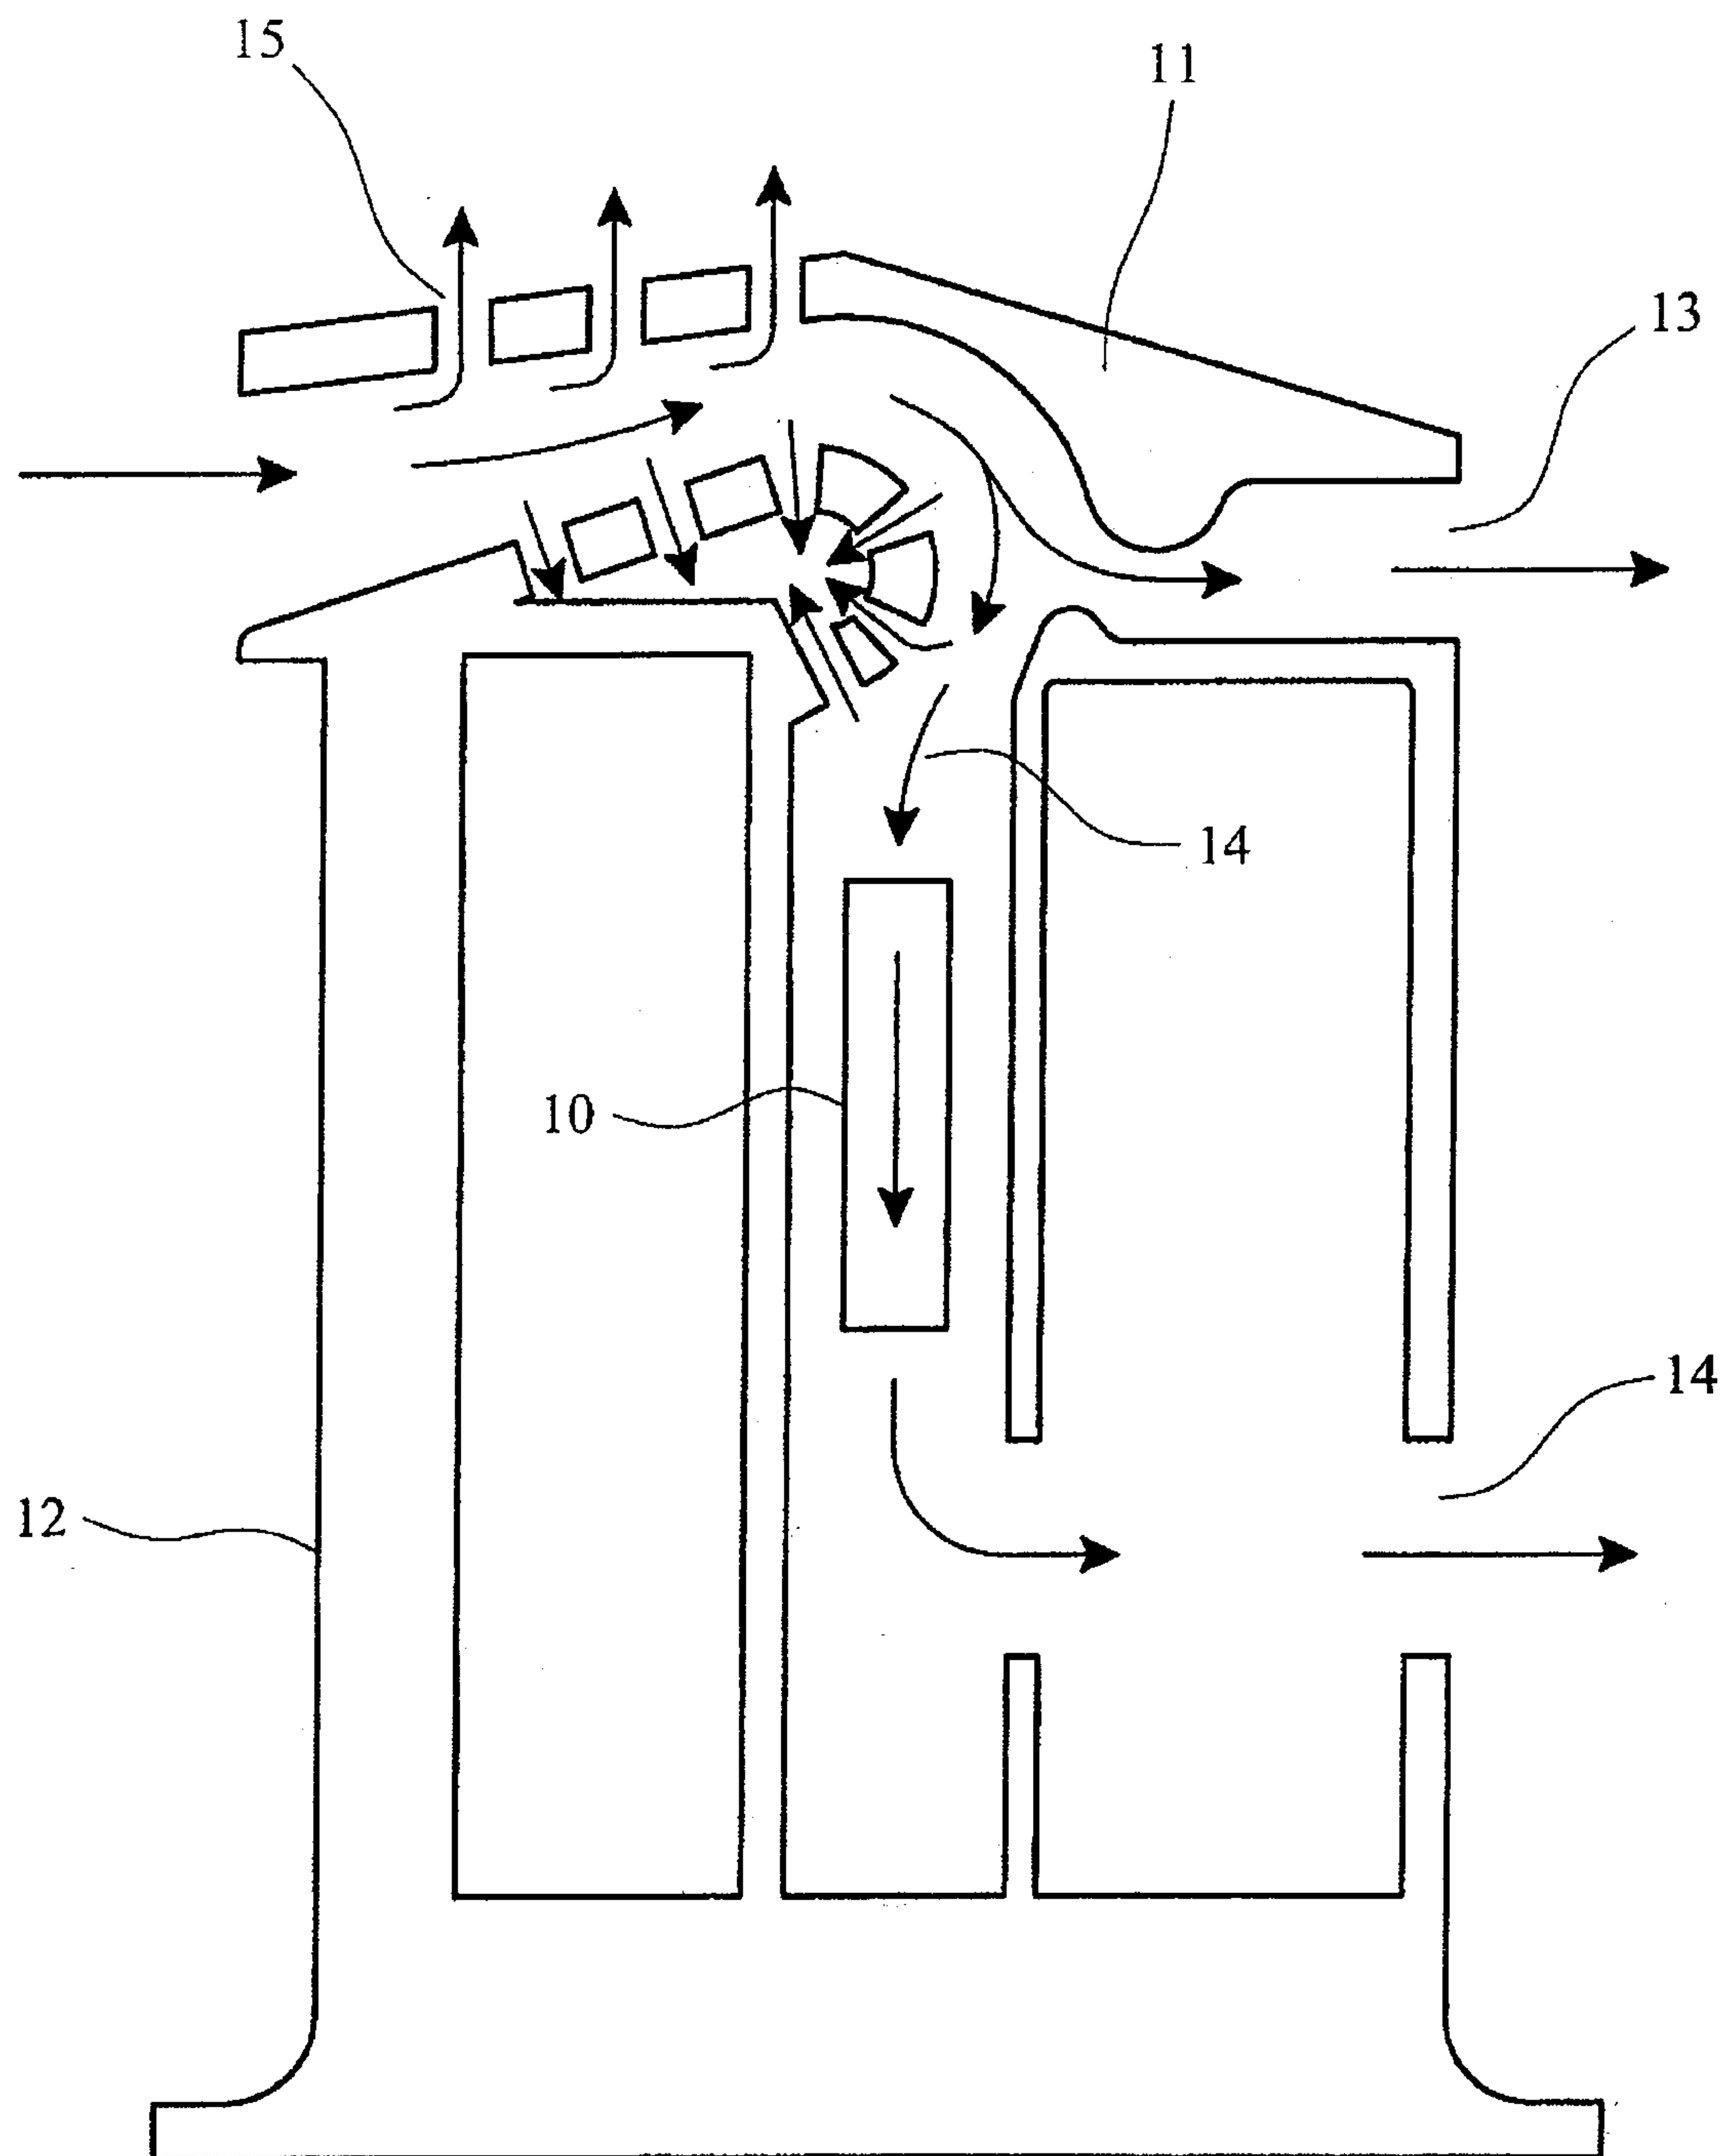


FIG. 1

-2/7-

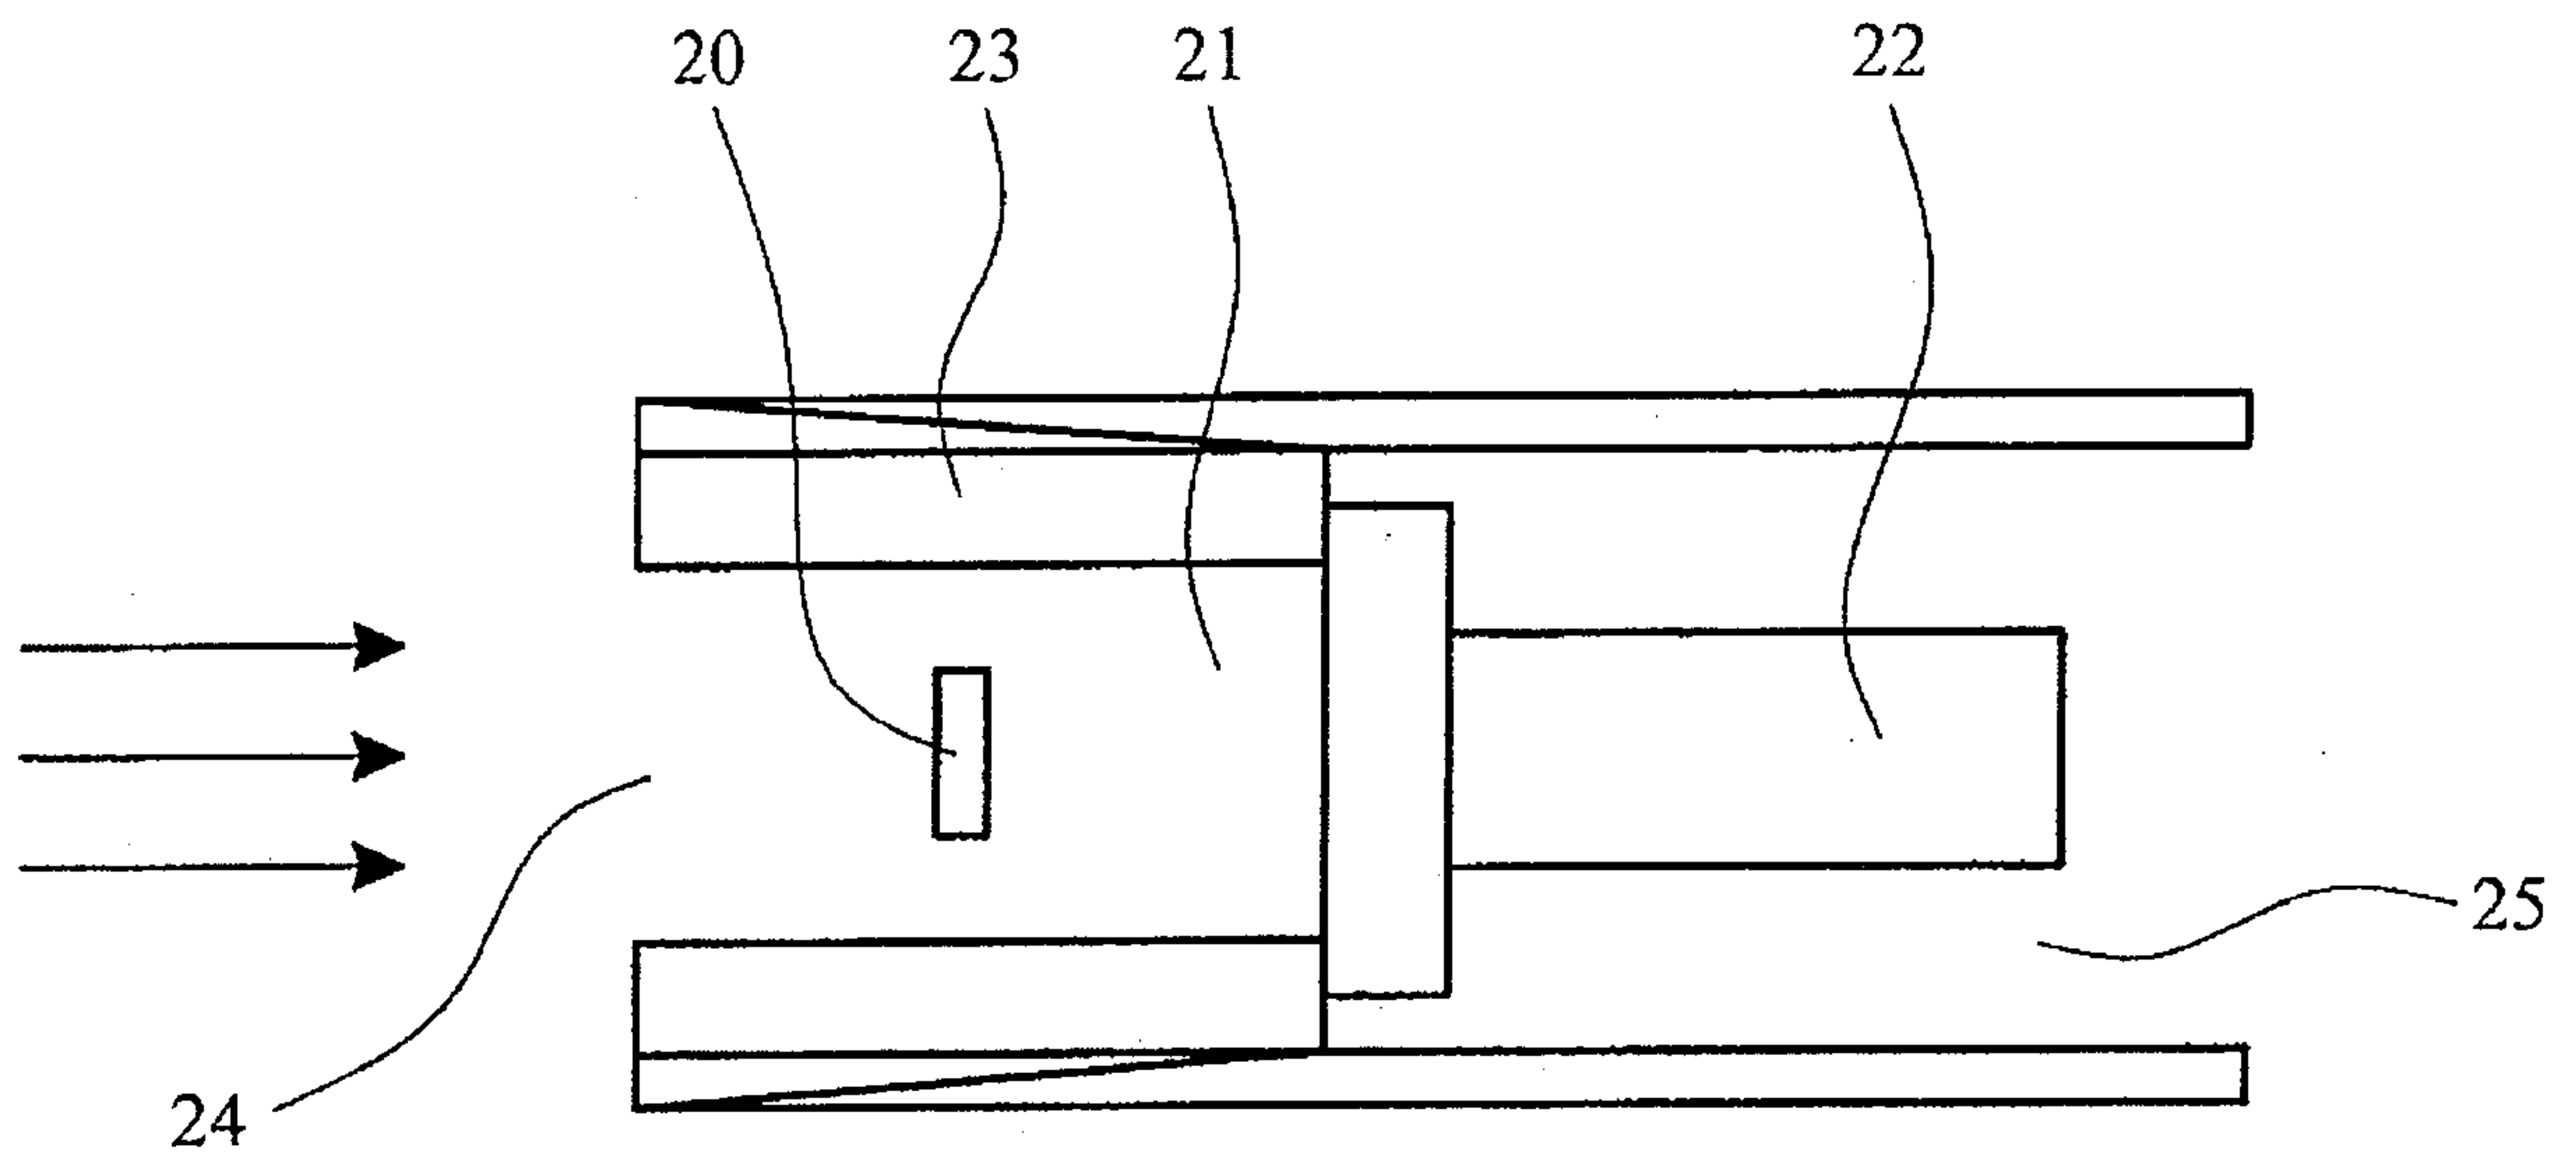


FIG. 2a

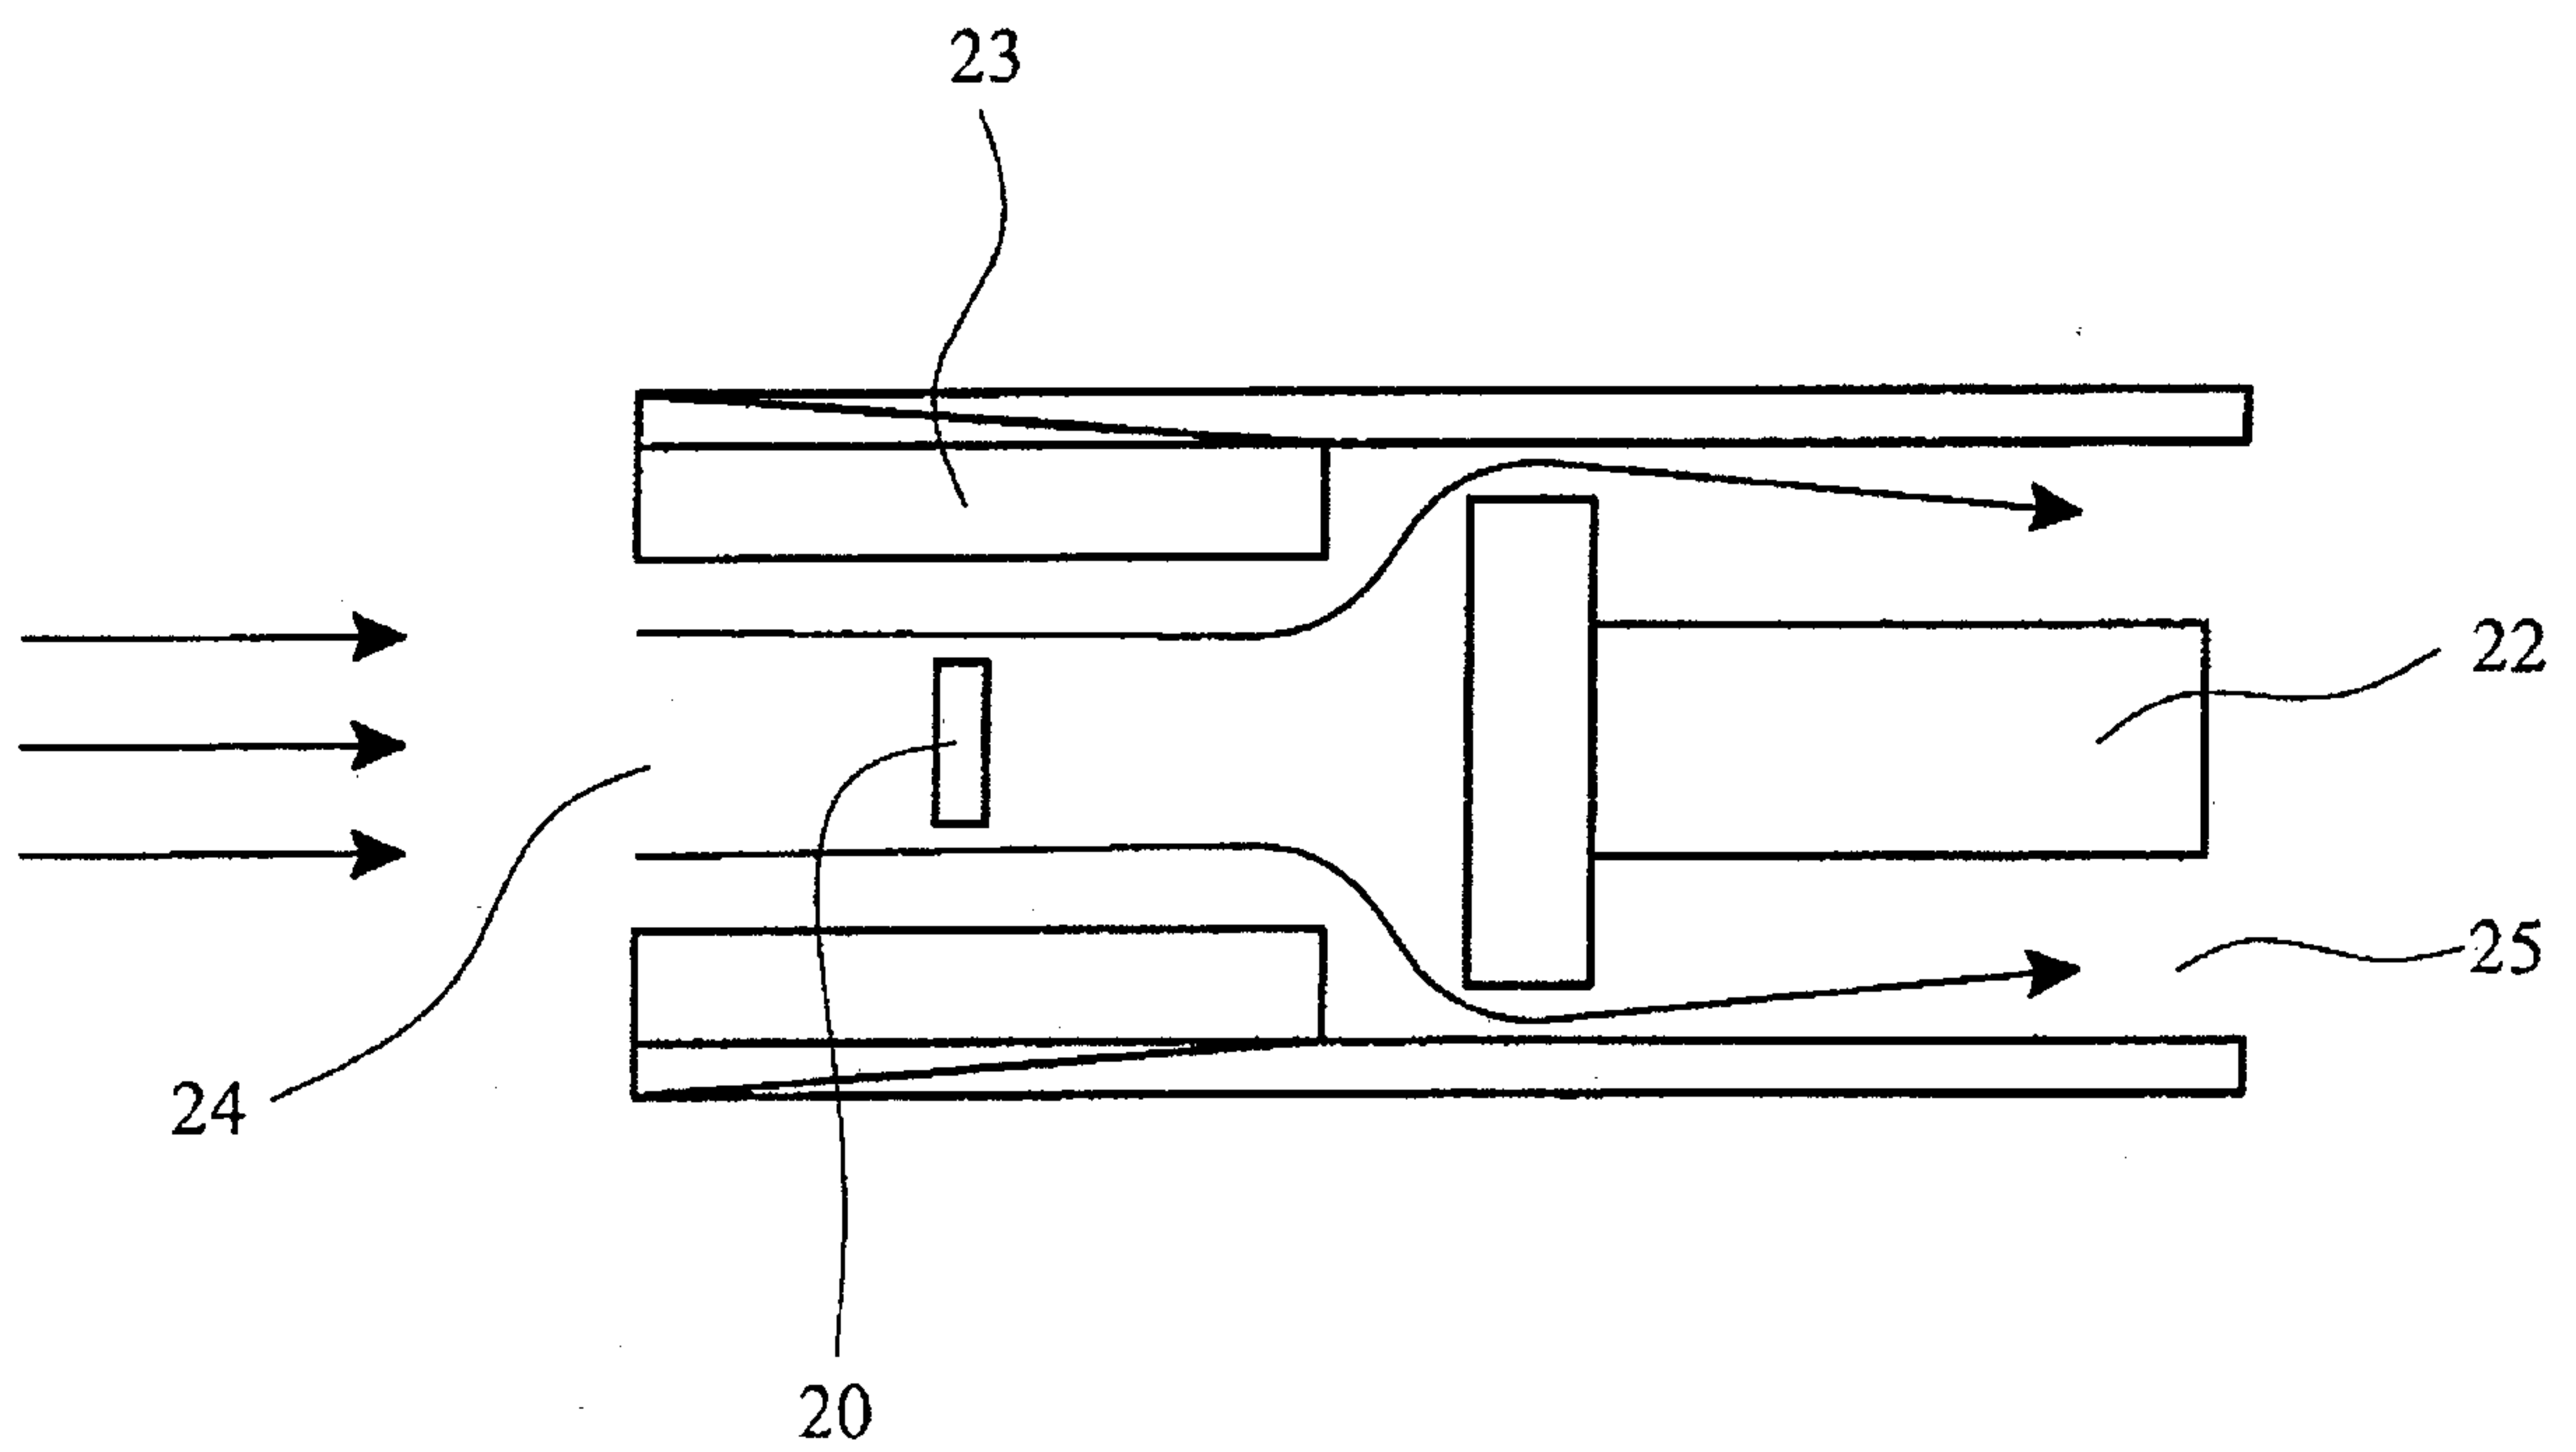


FIG. 2b

-3/7-

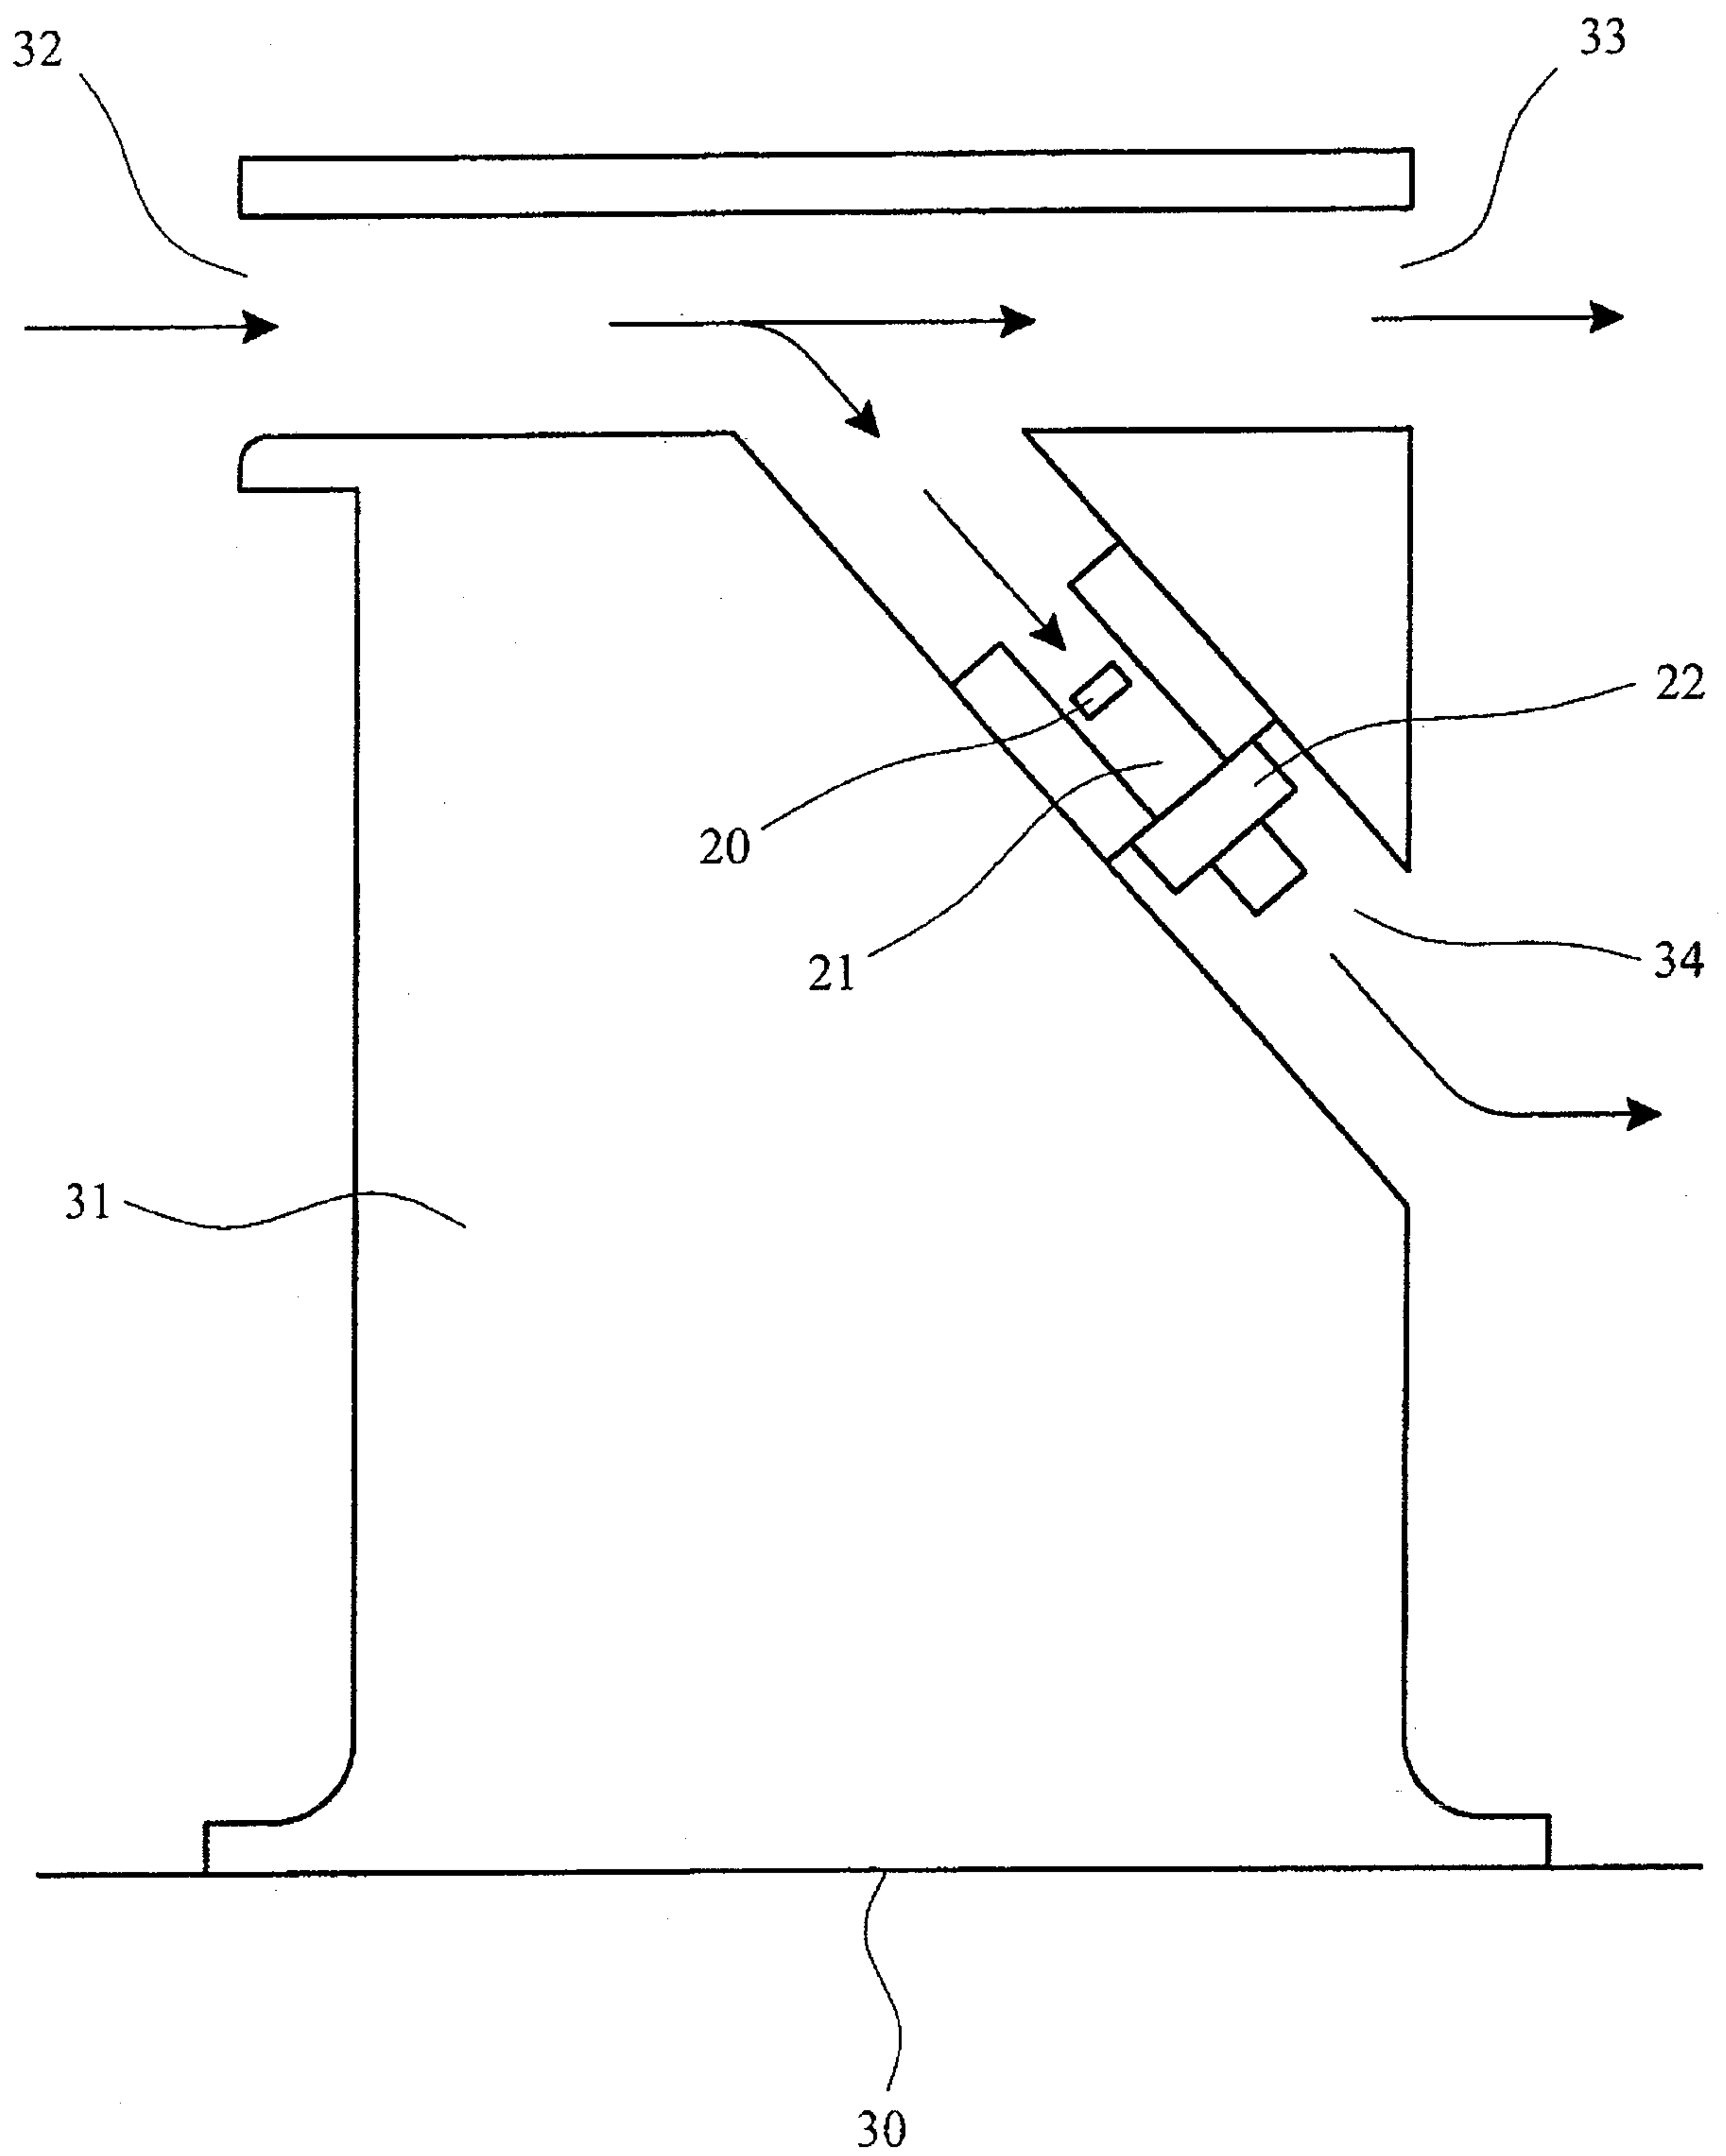
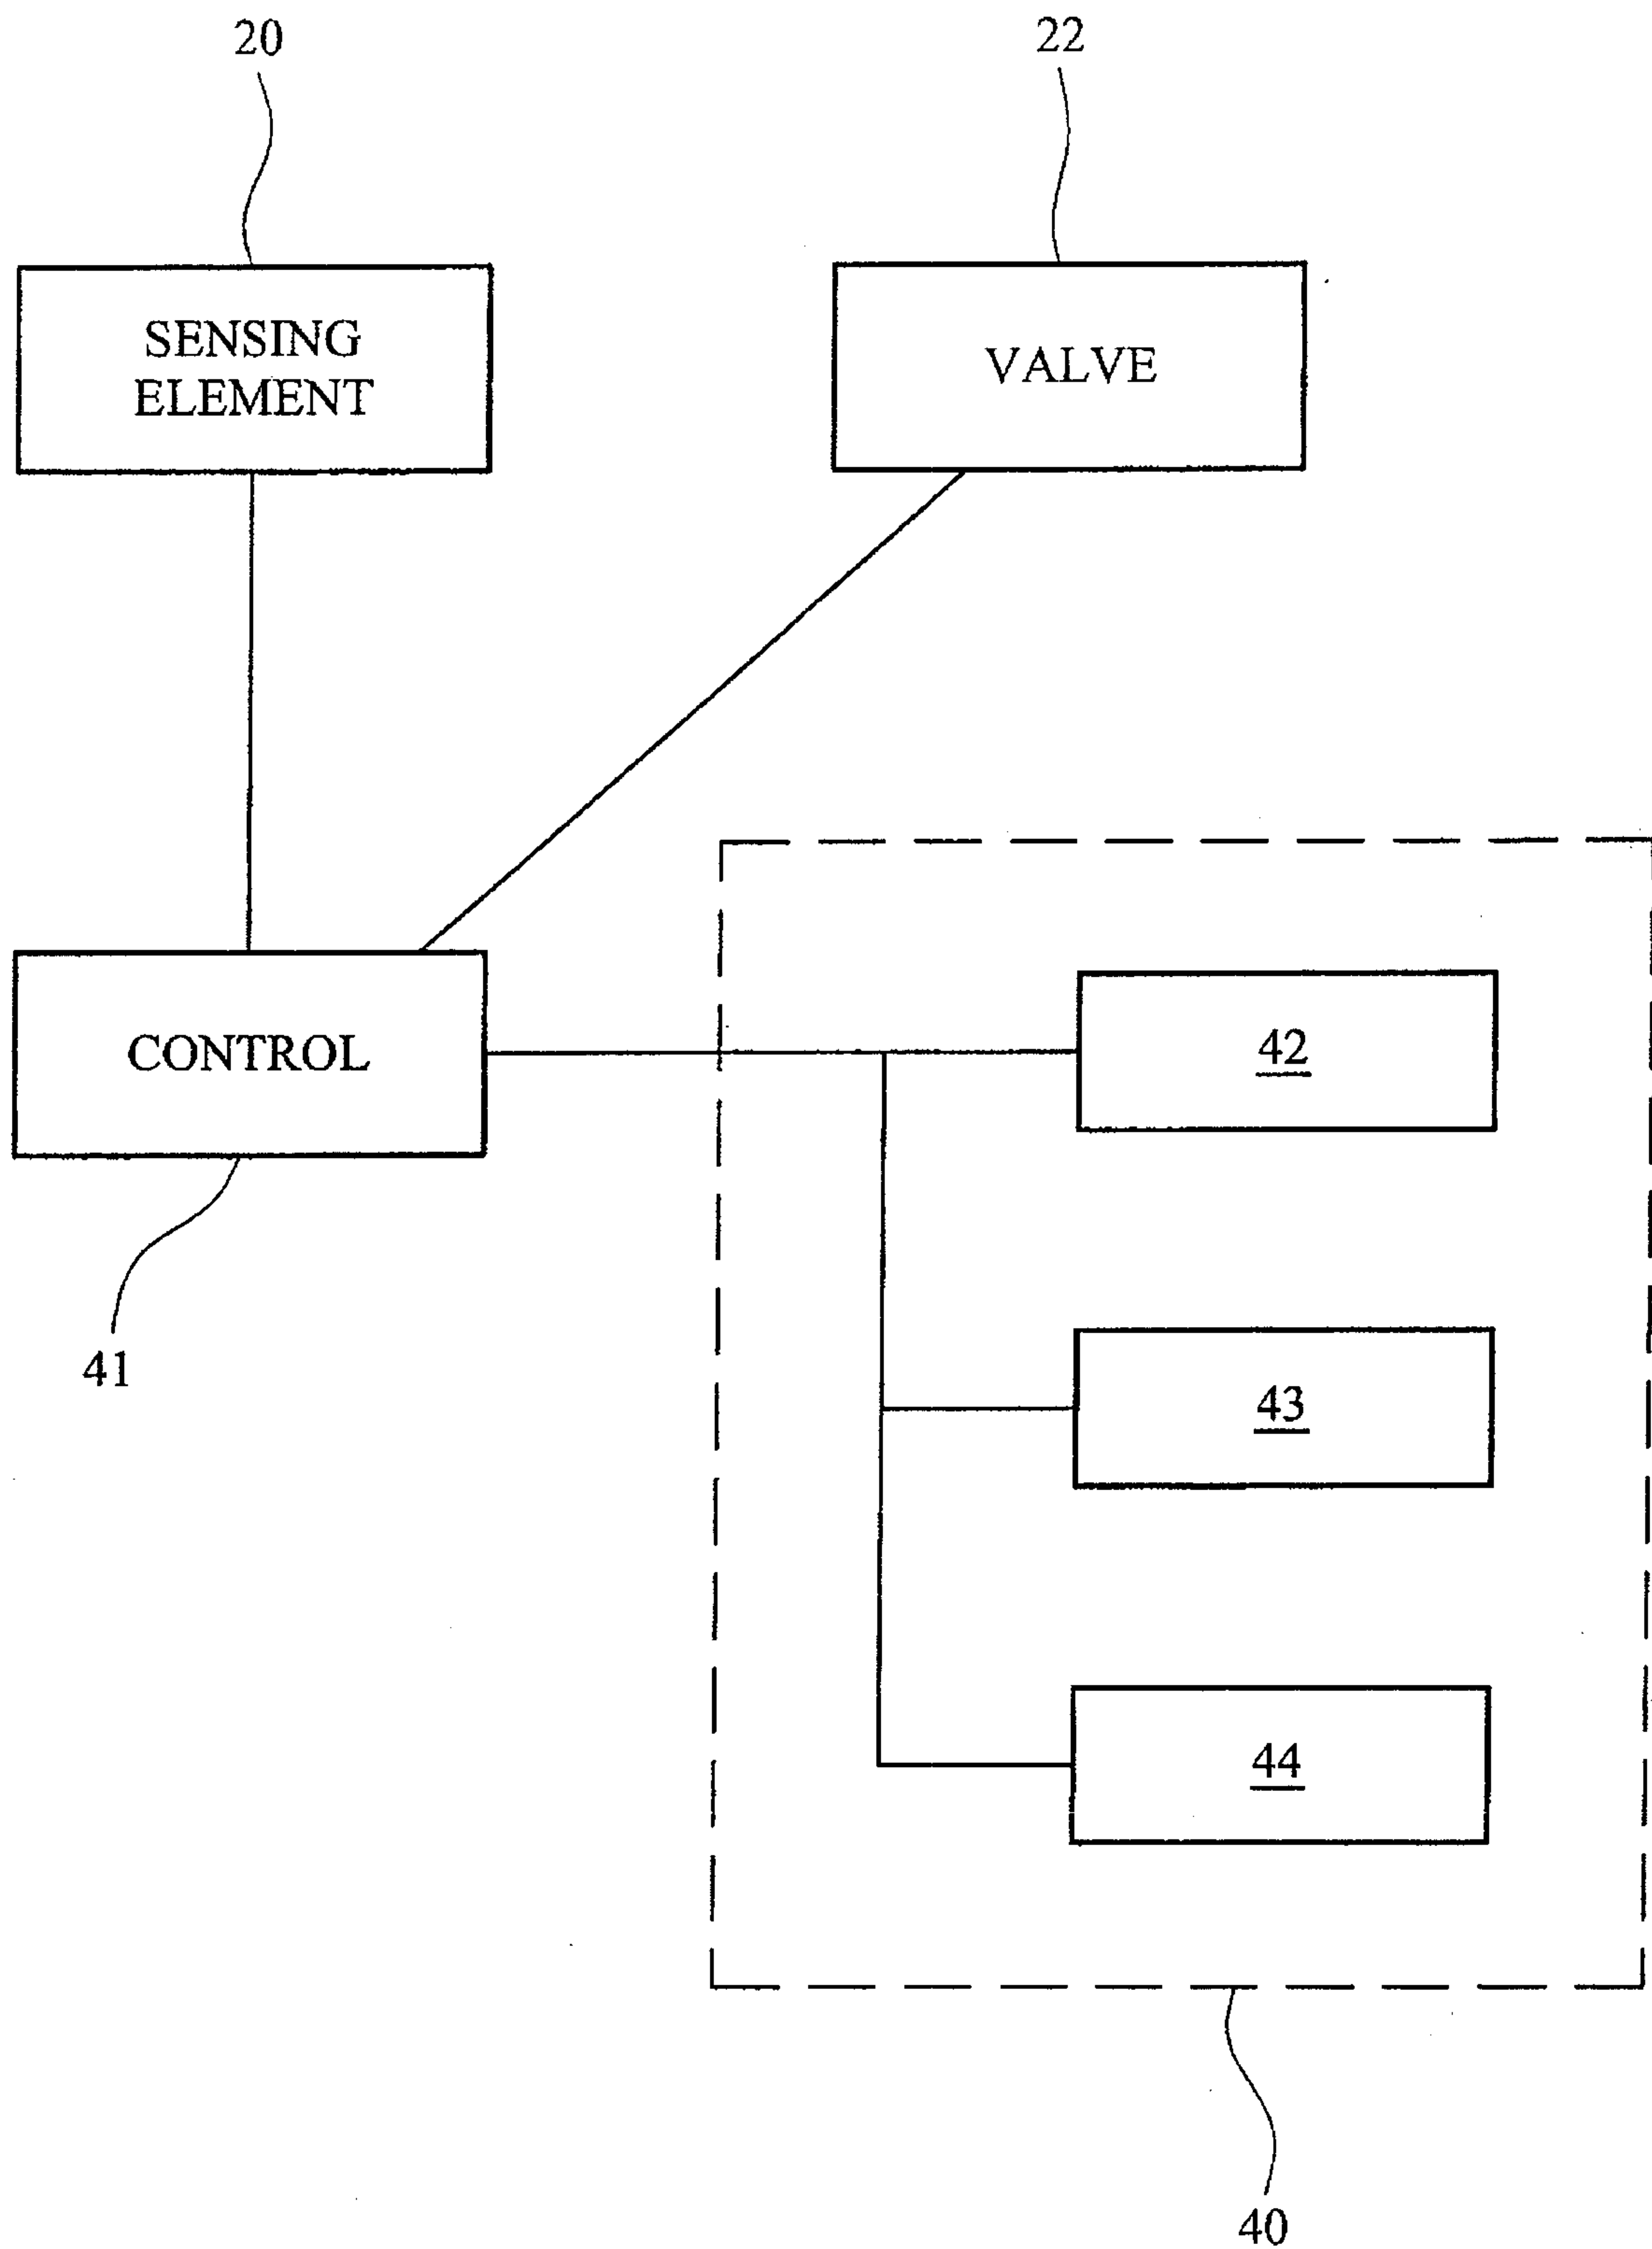
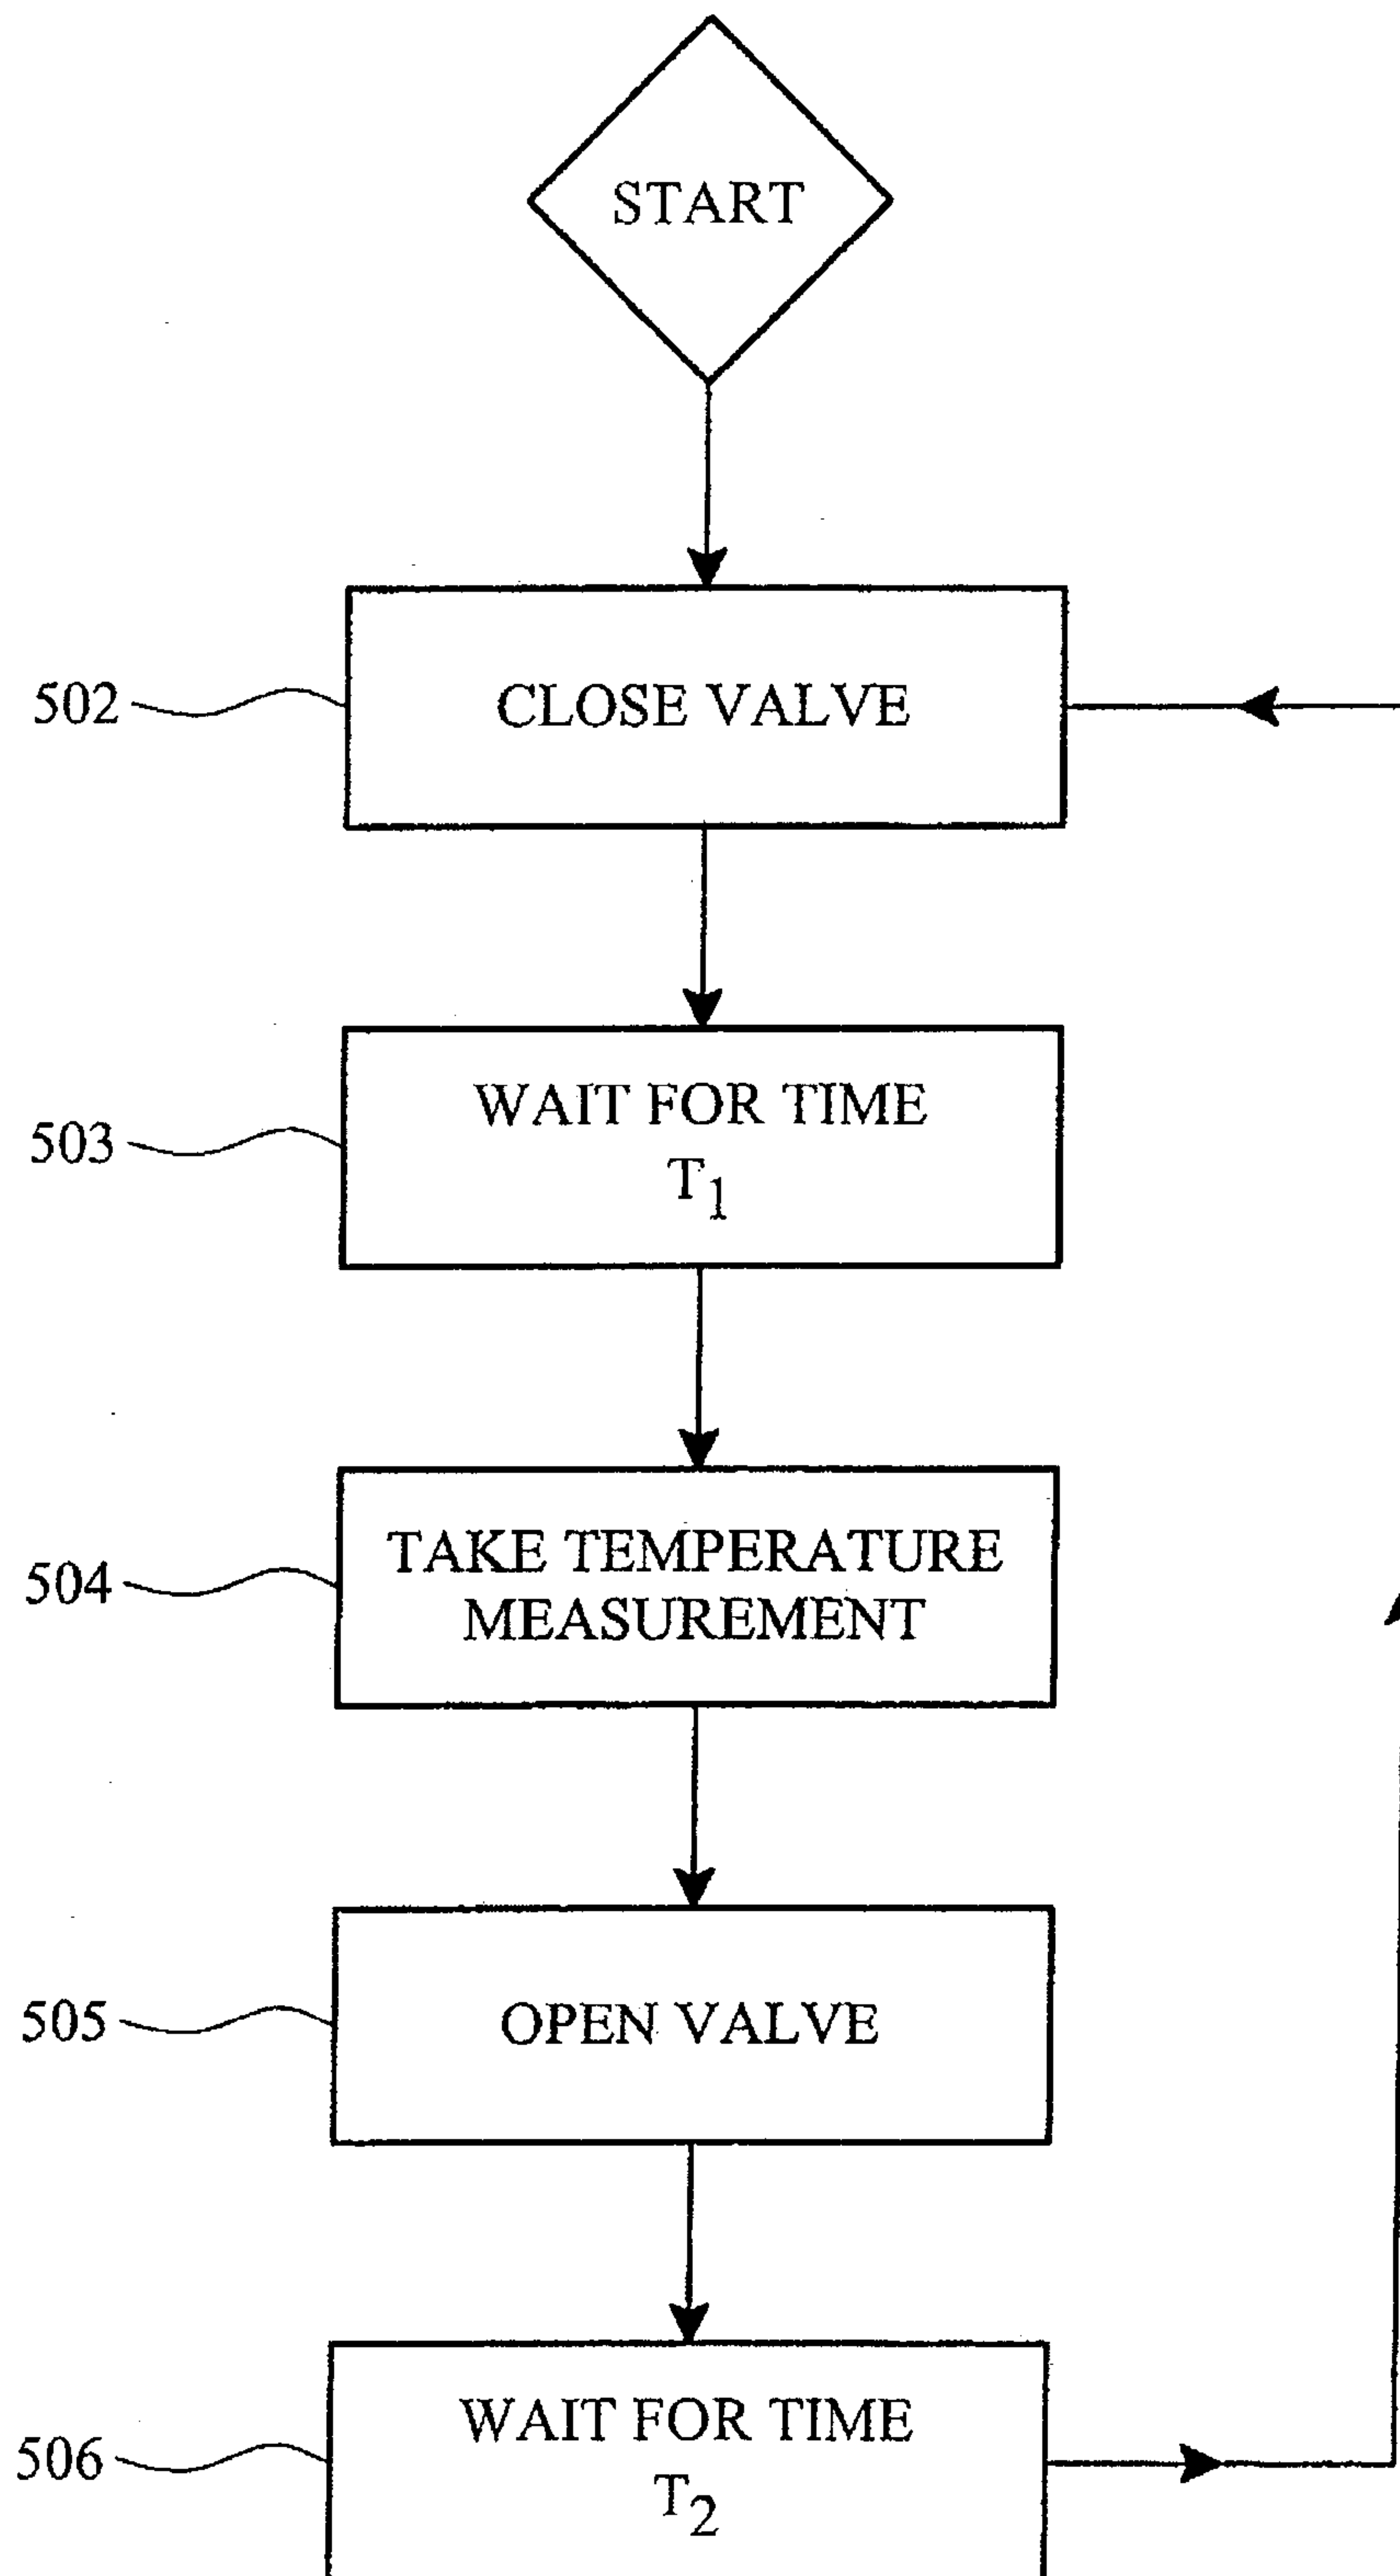


FIG. 3

-4/7-

FIG. 4

-5/7-

FIG. 5

-6/7-

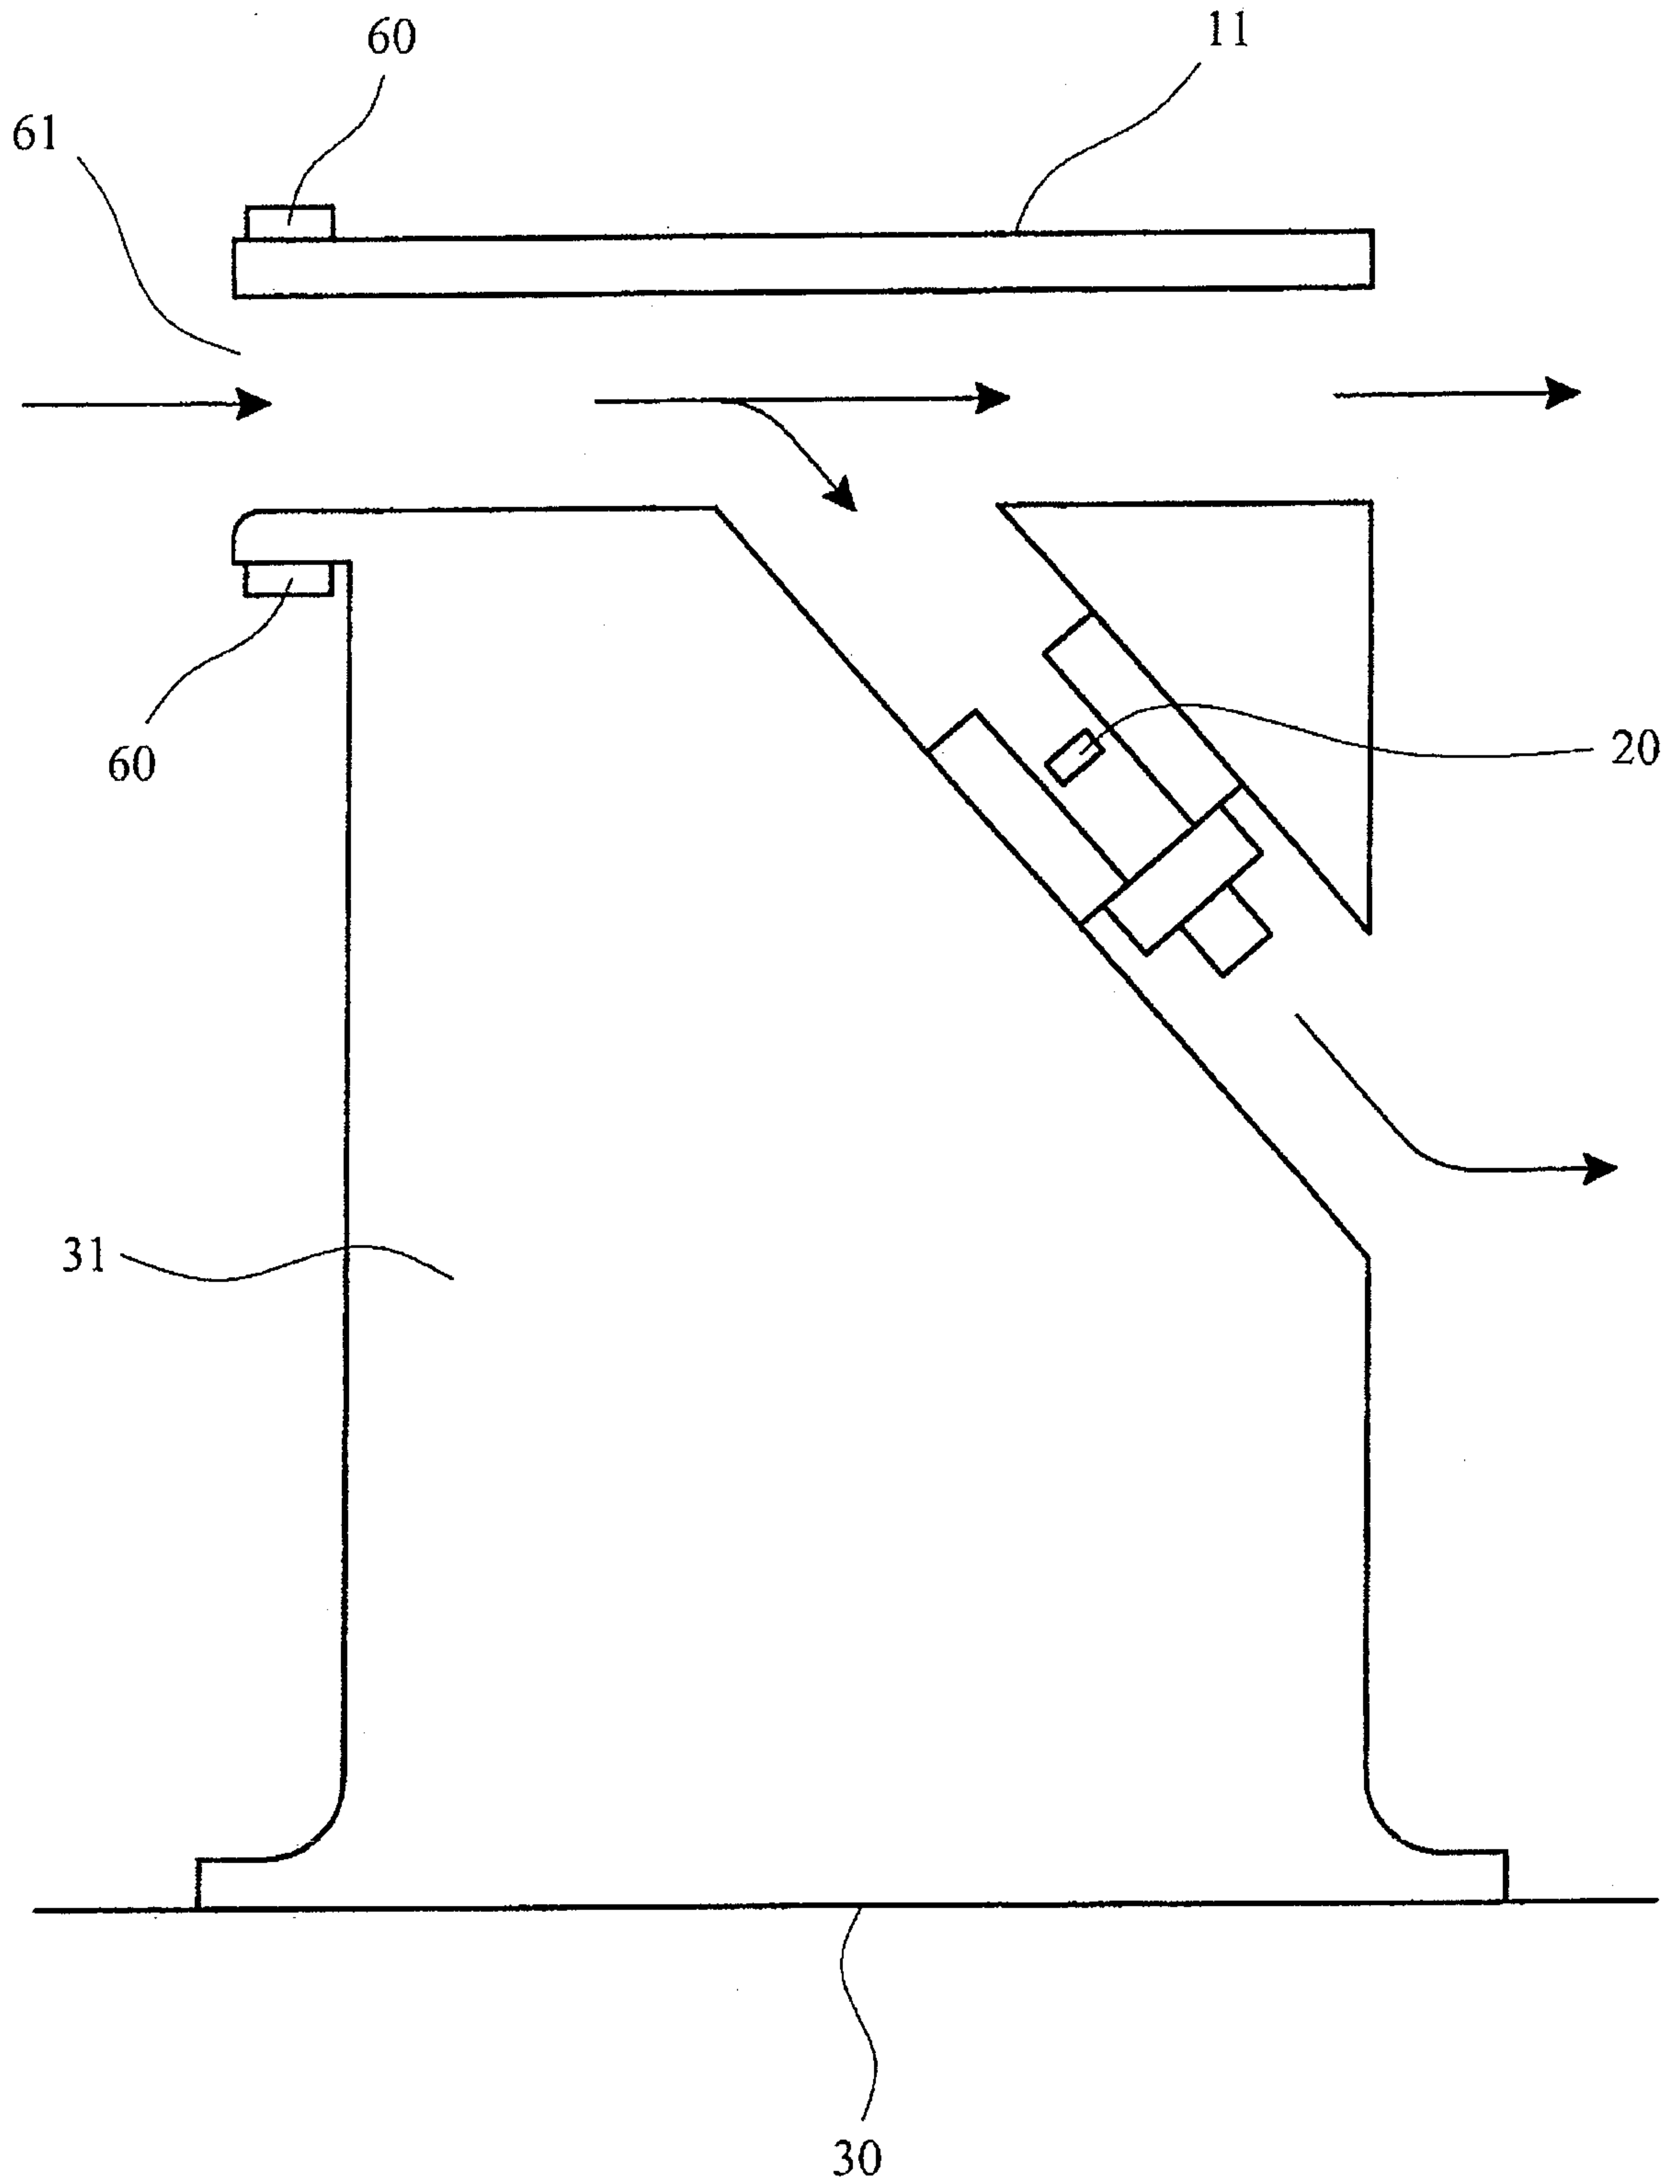


FIG. 6

-7/7-

