

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
5 February 2004 (05.02.2004)

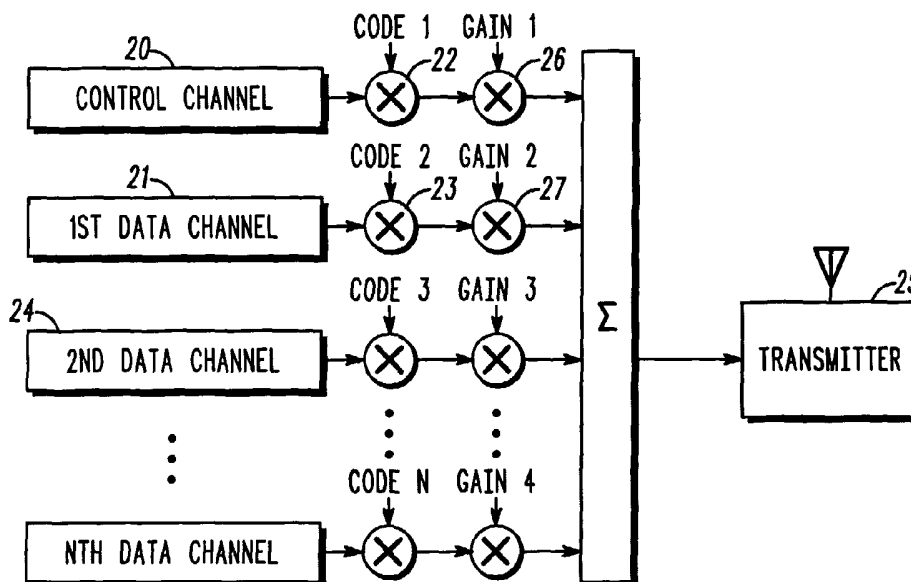
PCT

(10) International Publication Number
WO 2004/012360 A1

- (51) International Patent Classification⁷: **H04B 7/00**
- (21) International Application Number:
PCT/US2003/021181
- (22) International Filing Date: 7 July 2003 (07.07.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/210,142 31 July 2002 (31.07.2002) US
- (71) Applicant: **MOTOROLA, INC.** [US/US]; 1303 East Algonquin Road, Schaumburg, IL 60196 (US).
- (72) Inventors: **XIAO, Weimin**; 1840 Huntington Blvd., Apt 602, Hoffman Estates, IL 60195 (US). **RATASUK, Rapeepat**; 111 Kristin Circle, Apt #3, Schaumburg, IL 60195 (US). **GHOSH, Armitava**; 3240 Indian Creek Court, Buffalo Grove, IL 60089 (US).
- (74) Agents: **PACE, Lalita W.** et al.; MOTOROLA, INC., Intellectual Property Department, 1303 East Algonquin Road, Schaumburg, IL 60196 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: PILOT INFORMATION GAIN CONTROL METHOD AND APPARATUS



(57) Abstract: Various gain factors for pilot information (31) are used to determine a corresponding plurality of likely channel performance values (52) for a plurality of data channels (20, 21, 24) (and/or services). The resultant information is used to select a specific gain factor to apply when transmitting the pilot information (55). In one embodiment, the gain factor that correlates to the highest signal to interference plus noise ratio is used.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PILOT INFORMATION GAIN CONTROL METHOD AND APPARATUS

Technical Field

This invention relates generally to wireless communication systems and
5 more particularly to pilot information as used in such systems

Background

Wireless communication systems that use pilot information are well known in the art. Pilot information generally serves to facilitate an
10 assessment of the wireless channel by a receiving party. By providing pilot information having known characteristics, a receiver can utilize its knowledge of the differences (such as amplitude and phase differences) between the pilot information as it should have been received and the pilot information as it was received to ascertain and compensate for alterations that were occasioned by the
15 channel to thereby promote a more accurate recovery of other information as was also received by the receiver via that channel. Pilot information can also be used to effect other purposes as well.

Unfortunately, there are a variety of trade-offs that are ordinarily accepted when combining pilot information with a user payload. Such trade-
20 offs, in various ways, usually impact the usable bandwidth or user payload throughput capacity of the channel. For example, in a code division multiplexed wireless communication system that makes use of orthogonal variable spreading factor codes to permit differentiation of a number of data channels, a control

channel that includes pilot information will also have, or share, such a code.

Within the context of such a system, this means that some portion of overall available power must be allocated for the control channel/pilot information.

When less power than is necessary at any given moment is used to support the
5 pilot information, however, user information throughput capacity is negatively impacted.

Conversely, of course, the opposite can also occur. More power may be accorded the pilot information than is necessary to overcome the present vagaries of the channel. As a result, less power is available for the user payload
10 and this again can lead to a diminution of the receiver's ability to properly decode the user payload.

One prior art approach relies upon a simulated study of a channel for a given set of conditions (such as, for example, a given data rate and service overhead for the data payload). Running the simulation develops a set of
15 corresponding gain factors to be used with the data/control channel. By providing these results in a look-up table, the gain factor as corresponds to a given data rate and service can then be recovered and used during ordinary operations. One significant drawback of this approach is that this technique does nothing to assist a wireless communication unit that must use, for whatever
20 reason, a data rate that is not represented in the look-up table. Since new data rates are a common and frequent occurrence, this constitutes a considerable obstacle to effective use.

Brief Description of the Drawings

The above needs are at least partially met through provision of the pilot information gain control method and apparatus described in the following detailed description, particularly when studied in conjunction with the drawings,

5 wherein:

FIG. 1 comprises a block diagram depiction of a wireless communication system as configured in accordance with an embodiment of the invention;

FIG. 2 comprises a block diagram/schematic view of channel coding as
10 configured in accordance with an embodiment of the invention;

FIG. 3 comprises a schematic view of a control channel as configured in accordance with an embodiment of the invention;

FIG. 4 comprises a schematic view of a multiplexed data channel as configured in accordance with another embodiment of the invention;

15 FIG. 5 comprises a flow diagram as configured in accordance with an embodiment of the invention;

FIG. 6 comprises a detailed flow diagram as configured in accordance with an embodiment of the invention;

FIG. 7 comprises a graph depicting pilot information gain versus overall
20 data recovery as configured in accordance with an embodiment of the invention;
and

FIG. 8 comprises a graph depicting pilot information gain versus overall data recovery as configured in accordance with an embodiment of the invention.

Skilled artisans will appreciate that elements in the figures are illustrated for simplicity and clarity and have not necessarily been drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help to improve understanding of various embodiments of the present invention. Also, common but well-understood elements that are useful or necessary in a commercially feasible embodiment are typically not depicted in order to facilitate a less obstructed view of these various embodiments of the present invention.

10

Detailed Description

Generally speaking, these various embodiments determine likely channel performance characteristics for a plurality of data channels when using each of a plurality of different pilot information power transmission values. A particular power transmission value is then selected as based, at least in part, on these channel performance values. This configuration achieves a more effective trade-off between power allocated for the pilot information and for the user data payload. Further, this approach readily accommodates new data rates and new services. This approach is also compatible with, for example, spreading code-differentiated data channels alone or where at least some of the data channels are themselves time multiplexed.

In one embodiment, a control channel contains the pilot information. The power transmission value as ascertained above can be used for the entire

control channel if desired, or only a part thereof (provided the selected part includes the pilot information). When determining the likely channel performance value, signal to noise ratios can be considered and, in a preferred embodiment, signal to interference plus noise ratio values are used. In a preferred embodiment, selection of a particular power transmission value to use with the pilot information is based, at least in part, on a max-ratio combination of weighted sums that correspond to the channel performance values.

Such power transmission values can be determined at a base radio or at a mobile/portable radio and further can be used at the source of determination or transmitted elsewhere for remote usage.

Referring now to the drawings, and in particular to FIG. 1, a typical wireless communication system 10 includes one or more base units 11 and a plurality of mobile units 12 and 13. For purposes of providing a detailed description, this system 10 will be presumed to be a code division multiple access system using orthogonal variable spreading factor codes (such as, for example, Walsh codes) to aid in differentiating various channels from one another as they are co-transmitted on a radio frequency transport channel of choice. Such systems are generally well known, and no further description will be provided here except where occasionally useful to aid in further understanding one or more aspects of these embodiments.

Referring now to FIG. 2, a given base unit within such a system 10 can typically accommodate a plurality of information channels. In this embodiment, these channels include a control channel 20 and a plurality of data channels

(such as a first data channel 21). Such a control channel can support coding at, for example, a 15k bits/sec rate and will preferably (though not necessarily) include power control information (for purposes other than pilot information gain control), data packet information, and, of course, pilot information 31 as depicted in FIG. 3. (In this embodiment, for illustration purposes only, the pilot information is comprised of seven consecutive pilot symbols in accordance with well understood prior art technique. Also, as depicted in FIG. 3, the pilot symbols are shown as being positioned at the head of the control channel frame. Such positioning is for illustration purposes only. It is well understood in the art that pilot symbols can be positioned as a group elsewhere or can be separated from one another and interleaved with other data elements in the frame.)

Each data channel will typically include both a data payload and a corresponding data rate or other features to ensure compatibility with a given communications service. For purposes of this illustration, it will be presumed that the data rates for the data channels can be up to and including about 2M bits/sec. As shown in FIG. 2, each data channel represents a single data payload. If desired, however, one or more of these data channels can itself be time multiplexed as generally indicated in FIG. 4. For example, a single data channel 40 can be multiplexed with respect to time to create two data slots 41 and 42 (for purposes of simplicity, only two such slots are depicted in FIG. 4; those skilled in the art will appreciate that more such slots could be provided as desired and/or as appropriate to a given application). In addition, each such slot can accommodate a data rate or other service feature that is different than that

being used for the other data slot. Again, such configurations are known in the art and additional detail need not be provided here. (It will also be appreciated that, for many prior art systems, time multiplexed channels tend to characterize the forward link and non-time multiplexed channels as suggested in FIG. 2 tend to characterize the reverse link.)

Each channel (including both the control channel(s) and the data channels) are processed in a known manner with a unique corresponding spreading code such as, in this example, a Walsh code. For example, the control channel 20 is processed 22 using a first spreading code and the first data channel 21 is processed 23 using a second spreading code, such that each channel is processed with a separate code. As is known, by using codes that are orthogonal to one another, the different channels as coded can then be combined 24 and transmitted via a common transport channel transmitter 28 and then readily differentiated again upon receipt.

Pursuant to this embodiment, each data channel and control channel has a corresponding gain as well. For example, the control channel 20 has a first gain 26 and the first data channel 21 has a second gain 27 (in a preferred embodiment, all of the data channels will use an identical gain factor). This overall architecture comprises one way to realize a differential-gain amplifier that responds to the control messages of a power controller to differentially supply power to the control channel as compared to the power that is supplied to one or more of the data channels. As will be made more clear below, the power controller provides specific differential power control information as a function,

at least in part, of likely channel performance for each (or at least most) of the data channels as determined for a variety of gain factors for the pilot information itself. In fact, many transmitter units already have the capability to alter gain as described above and also represent a relatively flexible and
5 powerful programmable processing platform. Therefore additional description of the hardware aspects of the base unit will not be presented here in favor of a more detailed description of the programmed operation thereof.

Referring now to FIG. 5, the overall process begins with the provision
50 of pilot information and a plurality of data channels (for example, as
10 described above). A power transmission value for use with the pilot information is initialized 51 (for example, by setting the power transmission value to a predetermined known value, such as the lowest possible setting for such value).
A determination 52 then follows as to corresponding likely channel
performance for at least some and preferably all of the data channels when
15 using this initial power transmission value for the pilot information. This determination can be made with respect only to a given leg within the system or can include multiple legs as desired by the user. The channel performance can be estimated, for example, by determining a likely signal to noise ratio value or, in a preferred embodiment, a likely signal to interference plus noise ratio value.
20 Pursuant to one embodiment, such a value could conceivably be obtained through appropriate accessing of a look-up table. Since the requisite calculations are not especially complicated or processing resource intensive, for

most applications a preferred approach would be to calculate the values as needed.

Until this process is done 53, the pilot power transmission value is incremented 54 by a predetermined amount and the above process repeats with
5 the new pilot power transmission value. The process is done 53 when all candidate pilot power transmission values have been tested in this fashion and a plurality of corresponding likely channel performance values obtained for the data channels. A particular pilot power transmission value is then selected 55 as based, at least in part, upon these likely channel performance values. For
10 example, pursuant to one embodiment, one could simply identify the best likely channel performance value and select the pilot power transmission value that corresponds to that identified channel performance value. That selected pilot power transmission value can then be used in various ways. For example, it can be used immediately by the identifying platform when transmitting data and
15 pilot information. As another example it could be transmitted or otherwise provided by the identifying platform to a remotely located transmitter which then uses the value when transmitting data and pilot information. As yet another example, it could be stored for later use.

Referring now to FIG. 6, a more specific embodiment will be presented.
20 This embodiment serves in part to make clear that the described technique will work with multiplexed services by maximizing the sums of the weighted signal to interference plus noise ratios from each service. This feature is particularly useful because the number of rate-matched symbols for each service in such a

multiplexed context can vary significantly according to an assigned
 corresponding quality of service requirement. Such variations are a part of why
 many prior art approaches are less than fully satisfactory (for example, the sheer
 number of possible combinations of services and rate-matching parameters
 5 renders a table-based approach difficult at best).

In this particular embodiment, the wireless communication system is a
 so-called 3rd generation Universal Mobile Telecommunications System (UMTS)
 wideband code division multiple access system. The process begins, in this
 embodiment, with initialization 60. In addition to setting the pilot power
 10 transmission value β to a lowest possible value (in this example, zero) and
 initializing a signal to interference plus noise parameter SINR_{max} and a count
 variable C (where the count variable corresponds to the total number of
 candidate pilot power transmission values) to zero, this step also sees to the
 calculation of the number K of rate-matched symbols for each transport channel
 15 per power control group (note that in the case of multiplexed services each
 service is usually mapped to a distinct transport channel). K can be calculated
 as:

$$K_i = \left\lceil \frac{N_{i,j} + \Delta N_{i,j}}{NP} \right\rceil \quad \text{for } i = 1, \dots, I$$

where I is the number of time multiplexed services, $N_{i,j}$ is the number of bits in a
 20 radio frame before rate matching on the corresponding transport channel with
 transport format combination j , $\Delta N_{i,j}$ is the number of bits to be repeated or
 punctured in each radio frame, and NP is the number of power control groups in

a radio frame. (The calculation of $N_{i,j}$ and $\Delta N_{i,j}$ is well understood in the art and hence additional description of their ascertainment will not be provided here.)

The count C is checked to determine 61 if all candidate pilot power transmission values have been tried. When not true, the process proceeds to
 5 calculate 62 a ratio of control channel power to total power α via the relationship:

$$\alpha = \left(\frac{\beta_c / 15}{1 + \beta_c / 15} \right)^2$$

The pilot power transmission value β_c is then incremented to the next candidate for use during the next iteration of the process loop.

10 Next a corresponding signal to interference plus noise value is calculated 64 as follows. The signal to interference plus noise ratio for each transport channel is first calculated:

$$SINR_i = \frac{(1 - \alpha)\alpha K_i}{\alpha(K_i - 1) + 1} \quad \text{for } i = 1, \dots, I$$

The weighted signal to interference plus noise values for all transport channels
 15 are then summed as follows to yield the desired signal to interference plus noise ratio value $SINR$:

$$SINR = \sum_{i=1}^I w_i \times SINR_i$$

A comparison then determines 65 whether the resultant representative signal to interference plus noise ratio value $SINR$ is greater or less than a
 20 previous $SINR$ value that represents the largest $SINR$ value to so far result from this iterative process. When true, the present $SINR$ value is assigned 67 as the

new *SINR*_{max} value (and the corresponding pilot power transmission value β_c is similarly assigned as the new $\beta_{c, \max}$). The loop count *C* is then incremented 66 and the above-described process repeats until all candidate pilot power transmission values have been similarly tested.

5 When all candidate pilot power transmission values have been tested as described, the best power level is then easily identified 68 as $\beta_{c, \max}$. If necessary, a corresponding power offset value can be calculated 69 (for example, when the transmitter is configured to apply an offset value when changing power levels). The resultant power information is then provided
10 and/or used 70 as appropriate. If desired, the results can also be stored 71 in a memory.

FIG. 7 depicts various *SINR* values as result when using any of fifteen candidate pilot power transmission values β_c . In particular, it can be seen that different *SINR* values result when derived as a function of different services (in
15 particular, data services offering data transmission rates of 12.2 kbps, 32 kbps, 64 kbps, and 144 kbps). This graph aids in appreciating that, for any given service, there is a pilot power transmission level (such as the levels indicated by reference numerals 81 and 82) that yields a maximum attainable signal to interference plus noise ratio value, and further it can be seen that power values
20 less or greater than the optimum level tend to result in a reduced *SINR* value. Because the described process provides for recalculation of the pilot power transmission level on a regular and dynamic basis (as versus mere resort to a static look-up table) the process can readily accommodate newly introduced

services and in particular can identify an optimum pilot power transmission value for use when supporting such services.

FIG. 8 depicts various *SINR* values as result when using the candidate pilot power transmission values with various multiplexed services such as those supported by UMTS. In this example, three different services (having data rates of 12.2 kbps, 64 kbps, and 144 kbps respectively) are multiplexed together in varying respective proportions per frame. For example, a first series of results are obtained for a given set of multiplexed services where the 12.2 kbps service represents 250 RM (note: the rate matching attribute *RM* is unit-less), the 64 kbps service represents 23 RM, and the 144 kbps service represents 23 RM. Again, the embodiments described herein are readily applicable for use with these widely varying combinations of services such that a substantially optimized pilot power transmission value can again be calculated and used accordingly.

So configured, the described process and apparatus utilizes a pilot gain factor selection technique to automatically allocate power to the pilot information as a function of a predetermined analysis. The analysis is based on maximizing the received signal to interference plus noise ratio at the receiver (since the signal to noise plus interference ratio is inversely proportional to the frame error rate, maximizing the signal to noise plus interference ratio will tend to minimize frame error rates for the system).

Those skilled in the art will recognize that a wide variety of modifications, alterations, and combinations can be made with respect to the

above described embodiments without departing from the spirit and scope of the invention, and that such modifications, alterations, and combinations are to be viewed as being within the ambit of the inventive concept.

We claim:

1. A method comprising:
 - providing a plurality of data channels;
 - providing pilot information;
 - 5 - determining a likely channel performance value for at least a plurality of the plurality of data channels for each of a plurality of power transmission values as correspond to the pilot information to provide a plurality of corresponding channel performance values;
 - selecting a power transmission value to use with the pilot information as a
 - 10 function, at least in part, of the plurality of corresponding channel performance values.
2. The method of claim 1 wherein providing a plurality of data channels includes providing a plurality of code division multiple access (CDMA) data
- 15 channels wherein each data channel has a corresponding orthogonal variable spreading factor code.
3. The method of claim 1 wherein providing the pilot information includes providing a control channel.
- 20
4. The method of claim 3 wherein providing a control channel includes providing at least one pilot symbol.

5. The method of claim 3 wherein the control channel has a corresponding orthogonal variable spreading factor code.
6. The method of claim 1 wherein providing a plurality of data channels
- 5 includes providing at least one time multiplexed data channel.
7. The method of claim 1 wherein determining a likely channel performance value includes determining a signal to interference plus noise ratio value.
- 10 8. The method of claim 7 wherein determining a signal to interference plus noise ratio value includes determining a signal to interference plus noise ratio value for at least some of the data channels.
9. The method of claim 1 wherein selecting a power transmission value to use
- 15 with the pilot information as a function, at least in part, of the plurality of corresponding channel performance values includes selecting a power transmission value to use with the pilot information that most closely corresponds to a power transmission value that corresponds to a best one of the likely channel performance values.
- 20
10. The method of claim 9 wherein selecting a power transmission value to use with the pilot information as a function, at least in part, of the plurality of

corresponding channel performance values includes using a max-ratio combination of weighted sums.

11. The method of claim 1 and further comprising using the selected power
5 transmission value when transmitting the pilot information and the plurality of data channels.

12. The method of claim 1 and further comprising transmitting the selected power transmission value to subsequent use by a receiving unit.

10

13. The method of claim 1 wherein determining a likely channel performance value includes calculating the likely channel performance value.

14. The method of claim 1 wherein determining a likely channel performance
15 value for at least a plurality of the plurality of data channels for each of a plurality of power transmission values as correspond to the pilot information to provide a plurality of corresponding channel performance values includes determining a likely channel performance value for each of the plurality of data channels for each of a plurality of power transmission values as correspond to
20 the pilot information to provide a plurality of corresponding channel performance values.

15. An apparatus comprising:

- a wireless transmitter;
- a differential-gain amplifier operably coupled to the wireless transmitter;
- at least a first and second data channel operably coupled to the wireless
- 5 transmitter;
- a pilot information source operably coupled to the wireless transmitter;
- a power controller operably coupled to the differential-gain amplifier and
being arranged and configured to provide variable power to pilot information
from the pilot information source as a function, at least in part, of likely channel
- 10 performance for each of the data channels when transmitted by the wireless
transmitter.

16. The apparatus of claim 15 wherein the power controller includes means for:

- determining a likely channel performance value for each of the data channels
- 15 for each of a plurality of power transmission values as correspond to the pilot
information to provide a plurality of corresponding channel performance values;
- selecting a power transmission value to use with the pilot information as a
function, at least in part, of the plurality of corresponding channel performance
values.

20

17. The apparatus of claim 16 wherein the channel performance value
comprises a signal to interference plus noise value.

18. The apparatus of claim 15 wherein the apparatus comprises a portable wireless communication device.

19. A method comprising:

- 5 - providing a plurality of code division multiple access data channels;
- providing a code division multiple access control channel having pilot information;
- determining a likely channel performance value for each of the plurality of data channels for each of a plurality of power transmission values as correspond
- 10 to at least the pilot information to provide a plurality of corresponding channel performance values;
- selecting a power transmission value to use with at least the pilot information as a function, at least in part, of the plurality of corresponding channel performance values to provide a selected power transmission value.

15

20. The method of claim 19 wherein at least one of the plurality of code division multiple access data channels itself comprises a multiplexed plurality of data channels.

- 20 21. The method of claim 19 wherein determining a likely channel performance value includes determining a likely signal to noise ratio value.

22. The method of claim 21 wherein determining a likely signal to noise ratio value includes determining a likely signal to interference plus noise ratio value.

23. The method of claim 19 and further comprising using the selected power
5 transmission value when transmitting the pilot information.

24. The method of claim 23 wherein using the selected power transmission value when transmitting the pilot information includes using the selected power transmission value when transmitting at least portions of the control channel.

10

25. A method comprising:

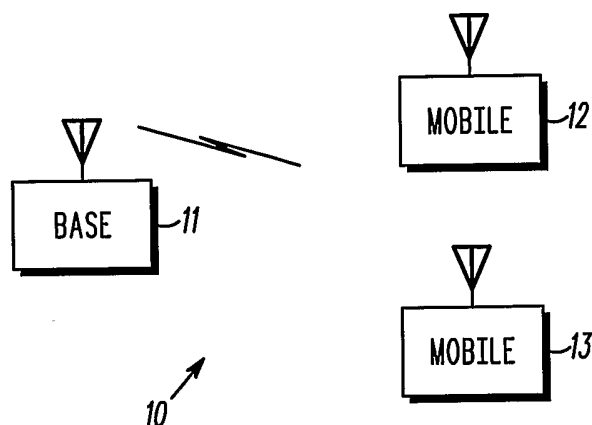
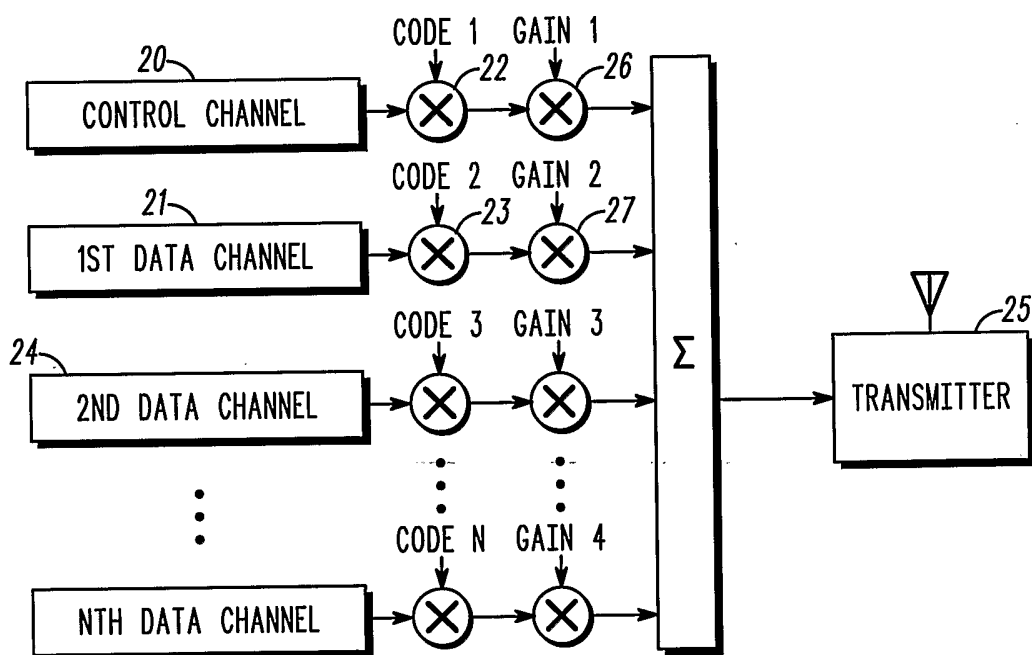
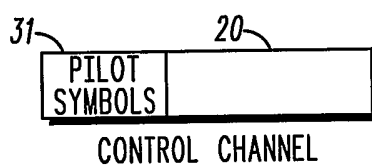
- providing a portable wireless communication device;
- providing a plurality of code division multiple access data channels;
- providing a code division multiple access control channel having pilot

15 information;

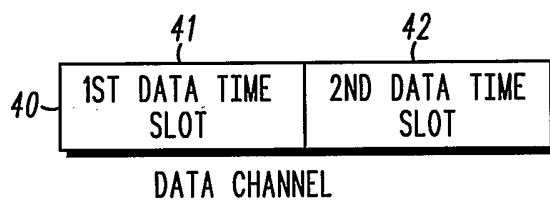
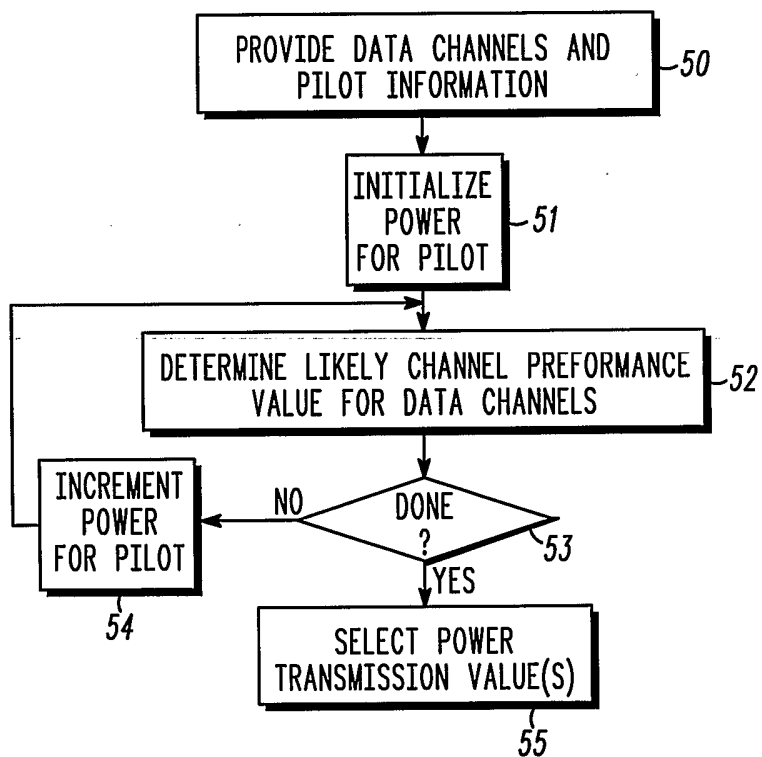
- at the portable wireless communication device, determining a likely channel performance value for each of the plurality of data channels for each of a plurality of power transmission values as correspond to at least the pilot information to provide a plurality of corresponding channel performance values;

20 - at the portable wireless communication device, selecting a power transmission value to use with at least the pilot information as a function, at least in part, of the plurality of corresponding channel performance values to provide a selected power transmission value.

1/5

**FIG. 1****FIG. 2****FIG. 3**

2/5

*FIG. 4**FIG. 5*

3/5

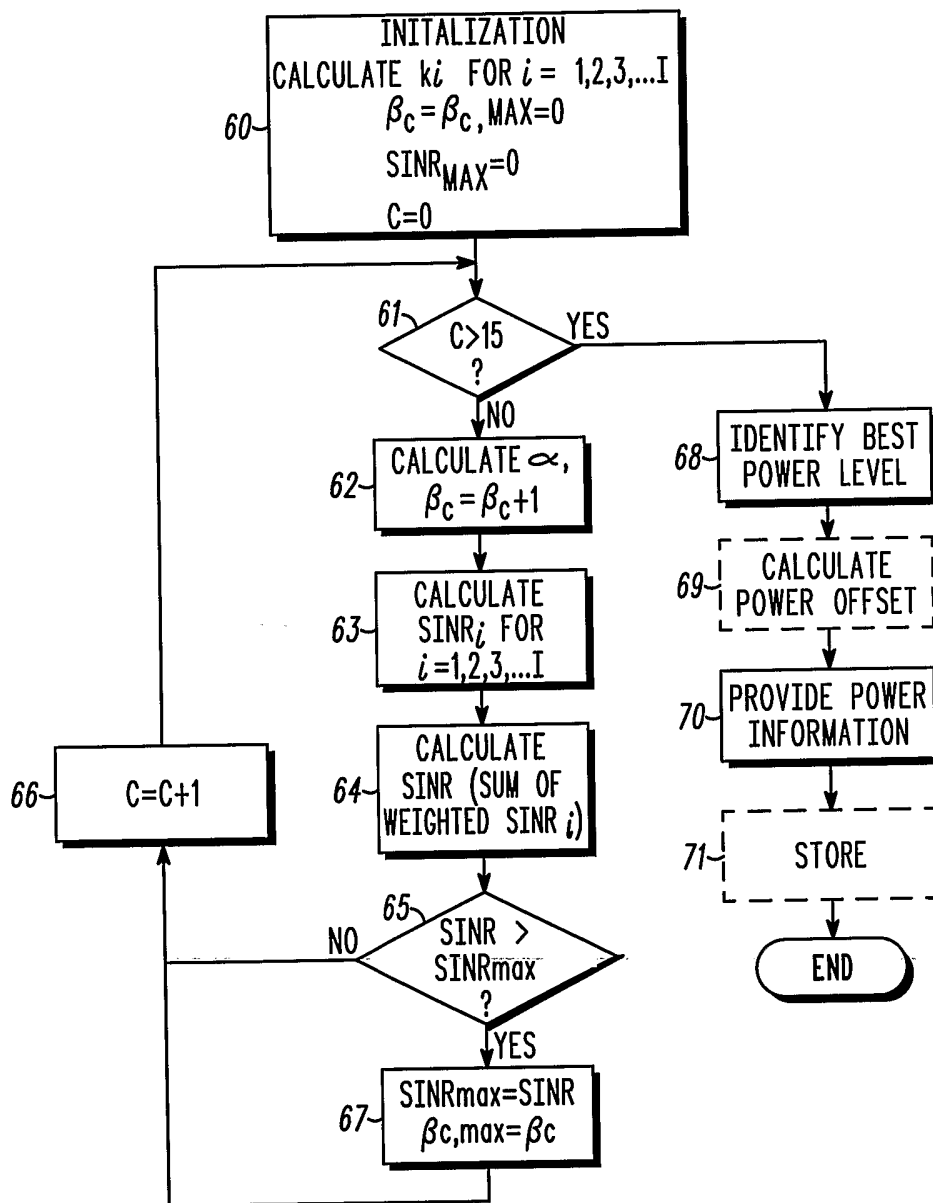
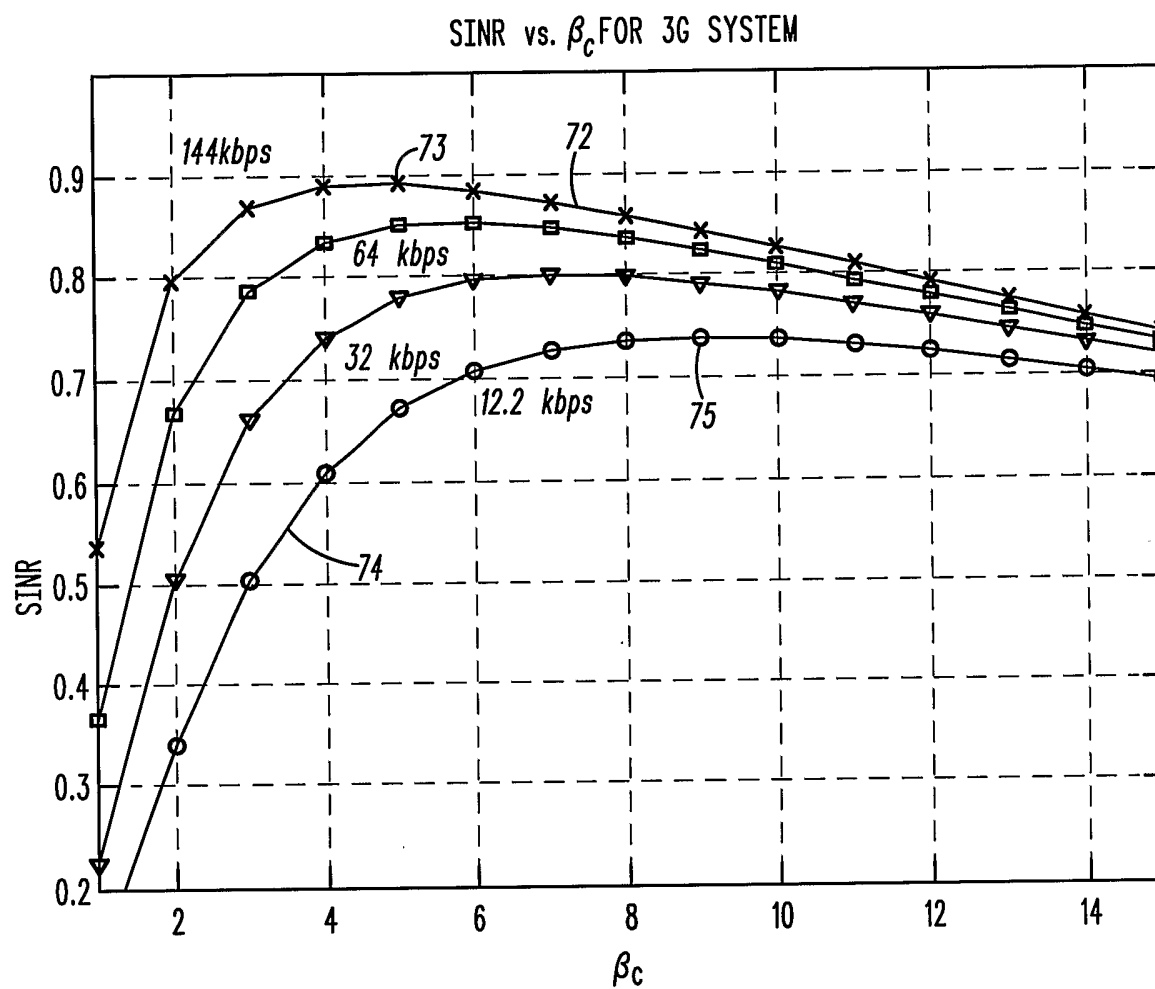
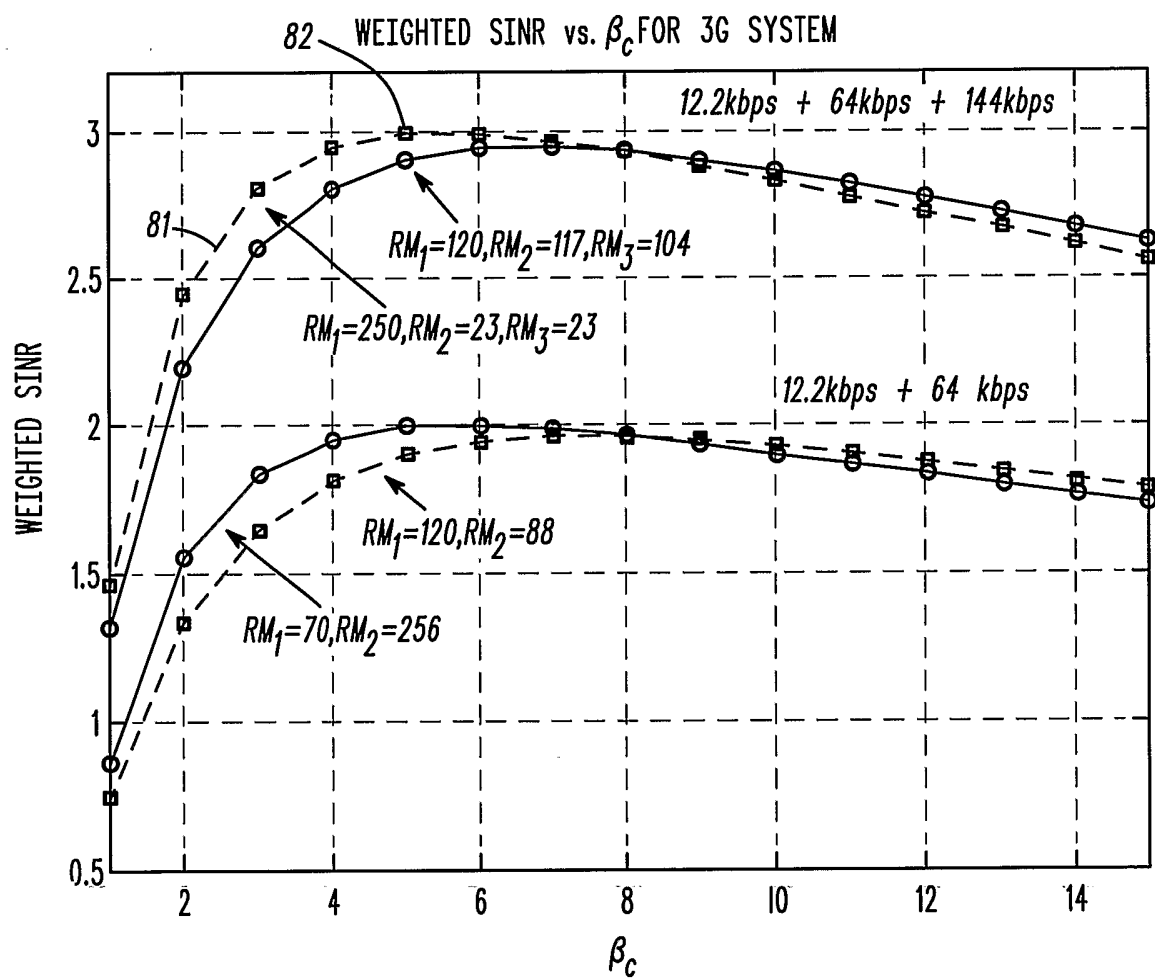


FIG. 6

4/5

**FIG. 7**

5/5

**FIG. 8**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/21181

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04B 7/00

US CL : 455/522

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Continuation Sheet

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
Please See Continuation Sheet**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6,377,555 B1 (LEE et al) 23 April 2002 (23.04.2002), column 6, lines 1-16, and Figure 1.	1-25
Y	US 5,901,354 A (MENICH et al) 04 May 1999 (04.05.1999), column 5, lines 33-45, and Figures 2-3.	1-25
A	US 5,737,327 A (LING et al) 07 April 1998 (07.04.1998), abstract and Figures 1-2, 4-5.	1-25

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

06 September 2003 (06.09.2003)

Date of mailing of the international search report

02 OCT 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US

Commissioner for Patents

P.O. Box 1450

Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

Eliseo Ramos-Feliciano

Telephone No. 703-305-3600

INTERNATIONAL SEARCH REPORT

PCT/US03/21181

Continuation of B. FIELDS SEARCHED Item 1:

455/522, 63.1, 65, 114.2, 114.3, 278.1, 296, 574, 127.1, 127.2, 343.1, 450; 370/335, 342, 320, 441, 318, 491, 480, 464, 500, 498

Continuation of B. FIELDS SEARCHED Item 3:

EAST text search:

Search Terms: cdma, pilot, power transmission, channel performance