

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
19 February 2009 (19.02.2009)

PCT

(10) International Publication Number  
**WO 2009/023250 A1**

(51) **International Patent Classification:**  
**A61F 2/30 (2006.01)**

(21) **International Application Number:**  
**PCT/US2008/009729**

(22) **International Filing Date:** 13 August 2008 (13.08.2008)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**  
60/964,703 13 August 2007 (13.08.2007) US

(71) **Applicant (for all designated States except US): ARCH DAY DESIGN, LLC [US/US];** 1802 Eastman Avenue, Suite 110, Ventura, CA 93003 (US).

(72) **Inventors; and**

(75) **Inventors/Applicants (for US only): MORRIS, Stephen [US/US];** 79 Aim Bluffs Drive, Chico, CA 95928 (US). **WEISEL, Thomas [US/US];** 3063 Grove Street, Ventura, CA 93003 (US). **PISARNWONGS, Roger [US/US];** 23824 West Brescia, Valencia, CA 91354 (US).

(74) **Agents: PATRICK, Steven, C. et al.;** 555 St. Charles Drive, Suite 107, Thousand Oaks, CA 91360 (US).


(81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW

(84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(54) **Title:** TISSUE POSITIONING DEVICE

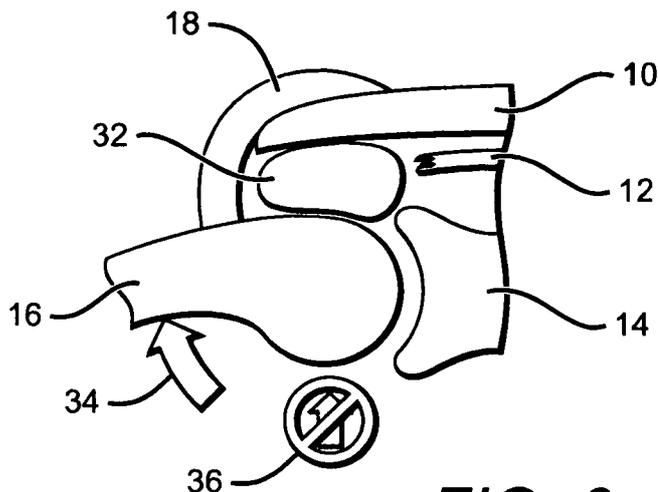

**FIG. 6**

(57) **Abstract:** A tissue positioning device comprising a biocompatible member having a size and shape suitable for placement within a space adjacent to a tissue to be positioned and which acts to maintain the tissue in a desired position. The member may be a rigid or flexible spacer having a defined shape, or a bladder capable of receiving and being at least partially expanded by a filler material. The device can be made from a variety of materials or a composite of materials as needed, and may include one or more attachment means by which it can be secured to nearby tissues such that it is maintained in a desired spatial location. The filler material can be any of a number of substances, including liquids, gases, a curable liquid such as bone cement or urethane foam, or a spring.

WO 2009/023250 A1

## TISSUE POSITIONING DEVICE

RELATED APPLICATIONS

[0001] This application claims the benefit of provisional patent application number 60/964,703 to s. Morris et al., filed August 13, 2007.

BACKGROUND OF THE INVENTIONField of the Invention

[0002] This invention relates generally to tissue positioning devices, and more particularly to devices for repositioning tissues that have been displaced due to injury or illness.

Description of the Related Art

[0003] Medical practitioners often see patients with ailments caused by soft or hard tissue displacements relative to the surrounding anatomy. Much effort is placed into repositioning the tissue and keeping it in the correct location. A common example is a broken bone, where the doctor repositions the bone and restricts its movement via a cast until the bones are healed.

[0004] A variety of different devices are used to reposition tissue, such as casts and splints, screws and plates, and spacers such as those used in the spine. These devices work fine for their indicated uses, but may be inadequate for a heavily articulatable joint such as the shoulder .

[0005] FIGs. 1-3 describe a situation that can arise in the shoulder. FIG. 1 depicts a simplified cross-sectional view of the shoulder joint. The acromium 10, rotator cuff tendons 12, the glenoid 14, the humerus 16, and the deltoid muscle 18 are shown. In a healthy shoulder, the rotator cuff tendons 12 hold

the head of the humerus 16 in the cup of the glenoid 14, so that even if muscles such as the deltoid 18 pull on the humerus, its head remains in the cup of the glenoid.

[0006] However, in FIG. 2, rotator cuff tendons 12 have been drastically reduced, such that they can no longer hold the head of the humerus 16 in the glenoid 14 as deltoid muscle 18 pulls on the humerus. FIG. 3 shows that as the person raises his arm, he utilizes his deltoid muscle 18, which rotates the humerus 16 in an upward direction 20. Since the rotator cuff tendons 12 are not holding humerus 16 in place, its head tends to lift (24) out of the cup of glenoid 14, creating a very painful movement for the patient and impairing the capacity for activities above shoulder level.

[0007] The most common methods of treatment for this condition are lengthy physical therapy, partial or total shoulder replacement surgery, reverse total shoulder arthroplasty, or doing nothing, in which case the patient continues to experience pain and loss of strength.

#### SUMMARY OF THE INVENTION

[0008] The present invention is directed to a tissue positioning device that addresses the issues noted above, in that it intervenes with minimal inconvenience to the patient, while allowing the performance of normal activities with reduced pain and increased strength.

[0009] The device consists of a biocompatible member having a size and shape suitable for placement within a space adjacent to a tissue to be positioned; the tissue, which may be hard or soft, forms a portion of an articulatable joint. Once placed within the space, the member acts to maintain the tissue in a desired position. The member may be a spacer having a defined shape, or a bladder capable of receiving and being at least partially expanded by a filler material.

[0010] When configured as a spacer, the member may be rigid or flexible, and has a size and shape suitable for placement within a space adjacent to a particular tissue. The spacer can be made from any of a number of different materials, such as silicone rubber and/or ultra high molecular weight polyethylene (UHMWPE), as well as super-elastic or shape-memory materials capable of being compressed for insertion into the space, and then reverting to a preformed shape.

[0011] When the member is a bladder, the bladder has an associated deflated state and is capable of receiving and being at least partially expanded by a filler material; a valve is provided by which a filler material can be delivered. The bladder is capable of insertion into the space adjacent to the tissue when in its deflated state, and acts to maintain the tissue in a desired position when at least partially expanded by the delivery of filler material.

[0012] The bladder may be arranged such that it continues to expand as long as additional filler material is delivered, or to only expand up to a predetermined limit. The bladder can be made in whole or part from a variety of materials, including, for example, silicone rubber, cross-linked polyethylene (PE), polyester (PET), metal, woven Kevlar, UHMWPE, stainless steel, and Nitinol. The filler material can be any of a number of substances, including liquids, gases, a curable liquid such as bone cement or urethane foam, or even a spring.

[0013] The present tissue positioning device may include an attachment means by which the member can be secured to one or more tissues such that it is maintained in a desired spatial location. Suitable attachment means include a tab affixed to or molded as part of the member, with the tab having a suture embedded within it or containing a hole through which a suture may be threaded. The bladder might also be arranged to

accommodate one or more attachment means such as bone anchors that can be inserted into adjacent hard or soft tissue.

[0014] These and other features, aspects, and advantages of the present invention will become better understood with reference to the following description and claims.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0015] FIGs. 1-3 are cross-sectional views of a shoulder joint which illustrate a typical tissue displacement condition which may be addressed by the present invention.

[0016] FIG. 4 is a cross-sectional view of a shoulder joint which illustrates the placement of a bladder-type tissue positioning device within a space adjacent to a tissue to be positioned.

[0017] FIGs. 5 and 6 are cross-sectional views of a shoulder joint which illustrate how expanding the bladder of FIG. 4 acts to maintain the tissue in a desired position.

[0018] FIGs. 7a and 7b are cross-sectional views of a bladder and valve.

[0019] FIG. 8 is a cross-sectional view of a bladder which uses a spring as a filler material.

[0020] FIG. 9 is a cross-sectional view of a bladder illustrating several possible attachment means.

[0021] FIG. 10 is a cross-sectional view of a bladder having a non-uniform thickness.

[0022] FIG. 11 is a cross-sectional view of a bladder in which a portion of the bladder comprises a reinforced material .

[0023] FIG. 12 is a cross-sectional view of a bladder to which a secondary plate has been affixed.

[0024] FIG. 13 is a cross-sectional view of a bladder composed of two or more different materials.

[0025] FIG. 14 is a cross-sectional views of a shoulder joint which illustrates the placement of a spacer-type tissue positioning device within a space adjacent to a tissue to be positioned.

[0026] FIGs. 15a-15c are plan and sectional views of one possible embodiment of a spacer-type tissue positioning device .

#### DETAILED DESCRIPTION OF THE INVENTION

[0027] The present tissue positioning device consists of a biocompatible member having a size and shape suitable for placement within a space adjacent to a tissue to be positioned. The tissue, which may be hard (such as bone, etc.) or soft (such as muscle or tendon) , forms a portion of an articulatable joint. Once deployed within the space, the member acts to maintain the tissue in a desired position. The use of the device within a shoulder joint is described below, but the device may also be used to address injuries within other articulating joints.

[0028] A simplified cross-sectional view of a shoulder joint which includes a tissue positioning device in accordance with the present invention is shown in FIG. 4. The acromium 10, rotator cuff tendons 12, the glenoid 14, the humerus 16, and the deltoid muscle 18 are shown. In a healthy shoulder, the rotator cuff tendons 12 hold the head of humerus 16 in the cup of glenoid 14, so that even if muscles such as deltoid 18 pull on the humerus, its head remains in the cup of the glenoid.

[0029] Here, however, due to illness or injury, rotator cuff tendons 12 have been significantly reduced such that they no longer act to hold the head of humerus 16 in the cup of glenoid 14. As noted above, this results in the head tending to lift out of the cup of the glenoid, creating a very painful

movement for the patient and limiting function above shoulder level .

[0030] The tissue positioning device is placed within a space adjacent to a tissue to be positioned. Here, the shortened rotator cuff tendons 12 leave an open space 30 adjacent to the tissue to be positioned, which in this example is humerus 16. The device 32 is placed within space 30, between acromium 10, humerus 16 and deltoid 18, preferably via an arthroscopic port (skin or cannula) with the aid of a scope, or through a larger skin incision with direct visualization .

[0031] Device 32 may be in the form of a spacer which has a generally defined shape when in place within the space, or a bladder which can be at least partially expanded when in place within the space. A bladder-type tissue positioning device is discussed first.

[0032] The method by which a bladder-type device might be used is illustrated in FIGs. 5 and 6. In FIG. 5, bladder 32 is shown in an expanded state, with the patient's arm hanging straight down. In FIG. 6, the patient lifts (34) his arm and humerus 16 with the aid of deltoid 18. Previously, this motion tended to cause the head of humerus 16 to lift out of the cup of glenoid 14. Now, however, there is no upward translation (36) , because expanded bladder 32 places a downward force on the head of humerus 16, with the aid of backing from acromium 10. This bladder can also be attached to one or multiple structures such as the glenoid or acromium, as discussed below.

[0033] Depending on the specific application, bladder 32 might be made to be expandable, expandable up to a predetermined limit, or not expandable at all if its fit within the space is proper without expansion. In the latter case, the bladder becomes more like a defined-sized spacer.

One advantage of using a bladder which is expandable is that the bladder can be placed in the shoulder via a small portal, and then expanded to a much larger size once positioned within the joint - thus minimizing patient trauma due to inserting a large fixed-size device.

[0034] Various details for possible bladder-type embodiments are illustrated in the cross-sectional views shown in FIGs. 7 to 13. In FIG. 7a, tissue positioning device 40 includes a bladder 32 and a valve 34 by which a filler material can be delivered into the bladder. Many different types of valves could be employed, including, for example, a needle-piercable rubber type or a spring-loaded ball type. The valve may be integral to the bladder, as shown in FIG. 7a, or tethered to the bladder via a communicating tube 42 as illustrated in FIG. 7b. The valve preferably enables bladder 32 to be easily filled, and then allow no leakage of the filler material. The valve may be a one-way valve which only allows filler material to be added to the bladder, or a two-way valve which would also allow for removal of the material from inside bladder 32, in order to deflate the bladder as required. The valve is preferably positioned just below the skin such that it can be easily accessed using, for example, a syringe .

[0035] The bladder cross-section shown in FIGs. 7a and 7b is slightly ovoid, but the shape and size can be almost anything that properly matches the anatomy in need of repair and which fits within the available space.

[0036] Bladder 32 is expanded by way of a filler material 44 delivered via valve 34. The filler material can be one substance or a combination of many different substances. The filler material's properties must allow for adequate expansion of bladder 32, and must adequately hold the head of humerus 16 in place during manipulation. Examples of suitable filler

materials include air or any other gas, silicone, saline or any other liquid, a gel such as hyaluronic acid, and cured (reacting) substances such as bone cement or urethane foams.

[0037] As shown in FIG. 8, filler material 44 might also take the form of a spring. Such a spring can be compressed while the bladder is being positioned, and allowed to expand once in place. The spring can be made of any appropriate metal or plastic material, such as Nitinol. The spring might also be a super-elastic or shape memory material capable of being compressed for insertion into the space, and then reverting to a preformed shape. For example, the spring could be made from a shape memory material that is temperature activated so that it expands once the device warms to body temperature. The spring could be made to be expandable in one, two or three dimensions, as needed.

[0038] The present tissue positioning device may include an attachment means by which the member can be secured to one or more anatomical structures such that it is maintained in a desired spatial location. Various possible attachment means are illustrated in FIG. 9. For example, tabs 50 can be affixed to or molded as part of member 52, which can be either a bladder or defined-shape spacer. The tab may have a suture 54 embedded within it, or contain a hole 56 through which a suture may be threaded; the suture could then be tied to, for example, a bone anchor, or directly to other hard or soft tissue (not shown) as appropriate.

[0039] Another possibility is to provide a tab 57 to which an anchor device 58 such as a bone anchor or tack has been affixed, or through which an anchor device can be routed. The anchor device or devices would then be attached to appropriate hard or soft tissue as needed.

[0040] Various possibilities related to the composition of the bladder are addressed in FIGS. 10-13. In the case of the

shoulder joint, there may be concern with wear on the side of the bladder that contacts the moving humeral head, or with retaining the general bladder structure. As such, a bladder with a uniform wall thickness and composition may have to be modified. One possible modification is illustrated in the cross-sectional view of bladder 60 in FIG. 10. Here, the side of the bladder which rubs against the humeral head will be thickened (62) to create a more durable wall.

[0041] Another possibility is shown in FIG. 11, in which at least a portion of the bladder 70 comprises a reinforced material 72, to reduce the degradation of the bladder due to its contact with the tissue to be positioned. A reinforced material could also be used to strengthen the attachment tabs referred to above. This material could be a non-easily abraded material such as a woven Kevlar, UHMWPE, stainless steel, Nitinol, etc. The reinforced material might also be in the form of a mesh affixed to the side of bladder 70, which contacts the tissue to be positioned and thereby protects the bladder.

[0042] In FIG. 12, a secondary plate 80 is affixed to the bottom of a bladder 82 to act as a buffer against abrasion. The plate's material, as with any of the materials that contact the tissue to be positioned, may have a lubricious quality such as UHMWPE. A thin layer of Nitinol which can be unfurled in the joint may also work as a buffer layer.

[0043] Another possibility is shown in FIG. 13, in which the member 90 is made from two or more different materials. For instance, the portion 92 that contacts the humeral head may be a hard lubricious plastic, with an expandable rubber bladder portion 94 overmolded onto portion 92 which can be properly filled to occupy the space in question. Portion 92 may also contain a molded-in lubricant, such as silicone oil, to help minimize wear. One consideration in choosing the

material (s) for this embodiment, as with all previously discussed embodiments, is the need to minimize wear on the tissue being positioned.

[0044] The material for the bladder can be flexible (e.g., silicone rubber) or relatively non-expanding (e.g., cross-linked PE). The bladder could also be made of metal, in the form of a bellows, for example, which can be inflated to the desired size. Other possible bladder materials include, but are not limited to, polyester (PET), metal, woven Kevlar, ultra high molecular weight polyethylene (UHMWPE), stainless steel, and Nitinol.

[0045] A tissue positioning device in accordance with the present invention may be either a bladder-type as described above, or a spacer-type, in which the member has a generally defined shape when in place within the space and acts to maintain a particular tissue in a desired position.

[0046] A cross-sectional view of a spacer-type tissue positioning device as might be used within a shoulder joint is shown in FIG. 14. As before, device 100 is placed within a space created by the degradation of rotator cuff tendons 12. Once in place, device 100 acts to maintain a particular tissue in a desired position - here, spacer 100 acts to maintain the head of humerus 16 in the cup of glenoid 14.

[0047] Device 100 can be rigid or flexible, or some portions may be rigid and others flexible, as needed. The device can be made from a wide variety of materials, such as silicone rubber and/or UHMWPE. A molded-in lubricant might also be used, to reduce friction between the spacer and the tissue being positioned. The device might also be made from a composite material, such that different portions of the member have different physical characteristics - for example, the spacer might be designed such that the surface that contacts the humerus is relatively hard, while the surface that

contacts the acromium is relatively soft. Some or all of a spacer-type tissue positioning device might also be made from a super-elastic or shape-memory material capable of being compressed for insertion into the space, and then reverting to a preformed shape.

[0048] As with bladder-type embodiments, the spacer may include one or more attachment means by which it can be secured to nearby tissues or anchor devices. For example, tabs 102 can be affixed to or molded as part of member 100; the tab could have a suture embedded within it, or contain a hole through which a suture may be threaded. An anchor device (not shown) such as a bone anchor or tack might also be affixed to or routed through one or more tabs. The sutures or anchor devices would then be attached to appropriate hard or soft tissue as needed.

[0049] The device is preferably designed to have a size and shape suitable for placement within a given space and for positioning a particular tissue. For example, a spacer-type device designed to maintain the head of humerus 16 in the cup of glenoid 14 may have a cup-like recess within the surface of the spacer that contacts the humerus. This is illustrated in FIGs. 15a (plan view), 15b (cut along section line A-A), and 15c (cut along section line B-B); here, the surface which contacts the acromium 10 is generally rounded, while the opposite surface includes a recessed space 104 to assist in maintaining the humeral head in the proper position.

[0050] In practice, it may be necessary to insert one or more trial devices, to make sure that the proper fit is achieved or the proper bladder or spacer is used. A measuring forceps might be employed to obtain the size of the space in which the device is to be placed, in order to choose the correct device size.

[0051] The embodiments of the invention described herein

are exemplary and numerous modifications, variations and rearrangements can be readily envisioned to achieve substantially equivalent results, all of which are intended to be embraced within the spirit and scope of the invention as defined in the appended claims.

## WE CLAIM:

1. A tissue positioning device, comprising:  
a biocompatible member having a size and shape suitable for placement within a space adjacent to a tissue to be positioned, said tissue forming a portion of an articulatable joint;  
such that, when placed within said space, said member acts to maintain said tissue in a desired position.
2. The device of claim 1, wherein said member is a spacer which has a defined shape when acting to maintain said tissue in said desired position.
3. The device of claim 2, wherein at least a portion of said spacer comprises a super-elastic or shape-memory material capable of being compressed for insertion into said space, and then reverting to a preformed shape.
4. The device of claim 2, wherein said member is rigid or flexible.
5. The device of claim 2, wherein said member comprises a material selected from the group consisting of silicone rubber and ultra high molecular weight polyethylene (UHMWPE).
6. The device of claim 2, wherein said member comprises a composite material such that different portions of said member have different physical characteristics.
7. The device of claim 2, said member arranged such that its size and shape are suitable for placement within a given space and for positioning a particular tissue.

8. The device of claim 1, wherein said member comprises :

a bladder having an associated deflated state and which is capable of receiving and being at least partially expanded by a filler material; and

a valve by which a filler material can be delivered into said bladder;

such that said bladder is capable of insertion into said space when in said deflated state and acts to maintain said tissue in said desired position when at least partially expanded by the delivery of filler material via said valve.

9. The device of claim 8, said bladder arranged such that it has a predetermined limit to which it can be expanded.

10. The device of claim 8, wherein said filler material is selected from a group consisting of a liquid, a gas, and a curable liquid.

11. The device of claim 1, wherein said tissue is hard or soft tissue.

12. The device of claim 1, wherein at least a portion of said device comprises a material selected from a group consisting of silicone rubber, cross-linked polyethylene (PE), polyester (PET), metal, woven Kevlar, ultra high molecular weight polyethylene (UHMWPE), stainless steel, and Nitinol.

13. The device of claim 1, wherein said space is between the acromium, deltoid muscle, and humerus, such that, while placed within said space, said member acts to maintain the head of said humerus within the cup of the glenoid.

14. The device of claim 1, further comprising an attachment means by which said member can be secured to one or more tissues such that it is maintained in a desired spatial location .

15. The device of claim 14, wherein said attachment means comprises a tab affixed to or molded as part of said member, said tab having a suture embedded within it or containing a hole through which a suture may be threaded.

16. The device of claim 15, further comprising one or more anchor devices inserted into hard or soft tissue to which said suture can be tied.

17. The device of claim 14, wherein said attachment means comprises a tab affixed to or molded as part of said member, said tab having an anchor device affixed to it or containing a hole through which an anchor device may be routed, said anchor arranged to be inserted into hard or soft tissue .

18. A tissue positioning device suitable for placement within a space adjacent to a tissue to be positioned, said tissue forming a portion of an articulatable joint, comprising :

a biocompatible bladder having an associated deflated state and which is capable of receiving and being at least partially expanded by a filler material; and

a valve by which a filler material can be delivered into said bladder;

a filler material which expands said bladder when delivered into said bladder via said valve;

such that said bladder is capable of insertion into said space when in said deflated state and acts to maintain

said tissue in a desired position when placed within said space and at least partially expanded by the delivery of filler material via said valve.

19. The device of claim 18, wherein said bladder is arranged such that its size and shape are suitable for placement within a given space and for positioning a particular tissue when at least partially expanded.

20. The device of claim 18, wherein said bladder has a generally ovoid cross-section.

21. The device of claim 18, wherein said bladder has a uniform or non-uniform thickness.

22. The device of claim 18, wherein said bladder is made from a material selected from a group consisting of silicone rubber, cross-linked polyethylene (PE), metal, woven Kevlar, ultra high molecular weight polyethylene (UHMWPE), stainless steel, and Nitinol.

23. The device of claim 18, wherein at least a portion of said bladder comprises a reinforced material to reduce the degradation of said bladder due to its contact with said tissue to be positioned.

24. The device of claim 23, wherein said reinforced material is selected from a group consisting of woven Kevlar, ultra high molecular weight polyethylene (UHMWPE), stainless steel, and Nitinol.

25. The device of claim 23, wherein said reinforced material is in the form of a mesh.

26. The device of claim 18, further comprising a secondary plate affixed to said bladder such that said plate provides a buffer between said bladder and said tissue to be positioned .

27. The device of claim 26, wherein said secondary plate comprises high molecular weight polyethylene (UHMWPE) or Nitinol .

28. The device of claim 18, wherein said bladder is made from two or more different materials selected from a group consisting of silicone rubber, cross-linked polyethylene, metal, woven Kevlar, ultra high molecular weight polyethylene (UHMWPE), stainless steel, and Nitinol.

29. The device of claim 28, wherein at least one of said materials includes a molded-in lubricant arranged to reduce the degradation of said bladder due to its contact with said tissue to be positioned.

30. The device of claim 18, wherein said valve comprises a needle-piercable rubber type or a spring-loaded ball type.

31. The device of claim 18, further comprising a communicating tube which tethers said valve to said bladder.

32. The device of claim 18, wherein said valve is positioned just below the skin when said bladder is placed within said space.

33. The device of claim 18, wherein said device is arranged such that said valve is integral to said bladder.

34. The device of claim 18, wherein said valve is a one-way valve or a two-way valve.

35. The device of claim 18, wherein said filler material is selected from a group consisting of air, saline, silicone, a gel, hyaluronic acid, bone cement, urethane foam, a plastic or metal spring, and Nitinol.

36. The device of claim 18, wherein said filler material is a spring which is expandable in one, two, or three dimensions .

37. A method for maintaining the position of a particular tissue an articulatable joint that would otherwise become displaced, comprising:

identifying an anatomical space adjacent to said tissue in which a biocompatible member having a size and shape suitable for placement within said space can be inserted; and  
inserting said member into said anatomical space such that said member acts to maintain said tissue in a desired position.

38. The method of claim 37, further comprising securing said member to one or more tissues such that it is maintained in a desired spatial location.

39. The method of claim 37, wherein said member has a defined shape.

40. The method of claim 37, wherein said member comprises :



a bladder having an associated deflated state and which is capable of receiving and being at least partially expanded by a filler material; and

a valve by which a filler material can be delivered into said bladder;

such that said bladder is capable of insertion into said space when in said deflated state and acts to maintain said tissue in said desired position when at least partially expanded by the delivery of filler material via said valve; further comprising the steps of:



delivering a filler material into said bladder.

**FIG. 1**

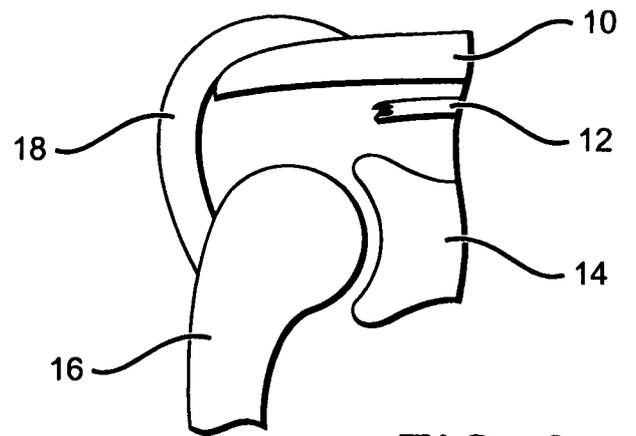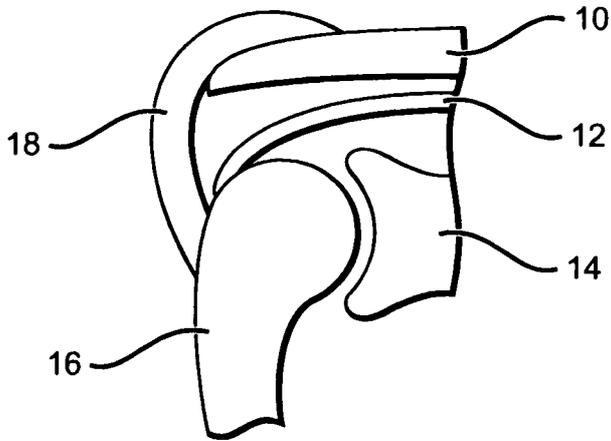



**FIG. 2**

**FIG. 3**

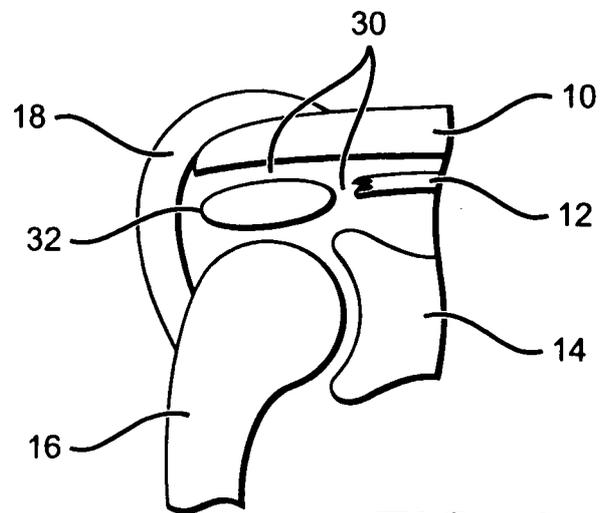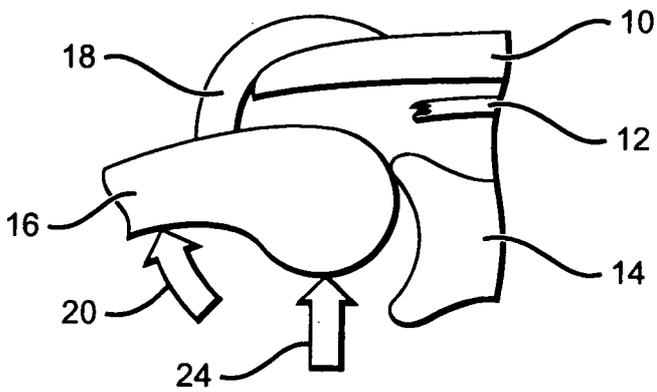


**FIG. 4**

**FIG. 5**

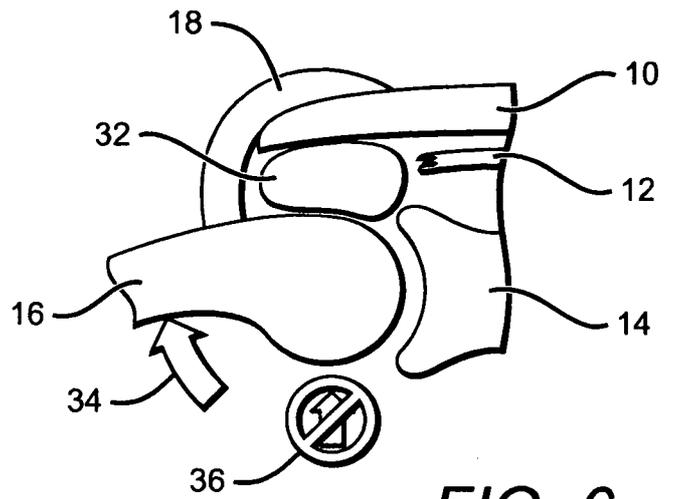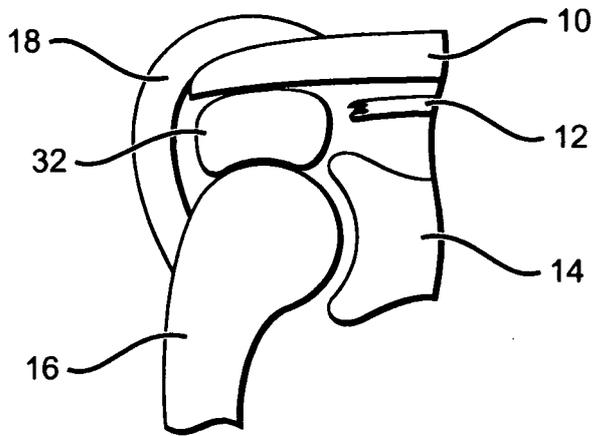


**FIG. 7a**

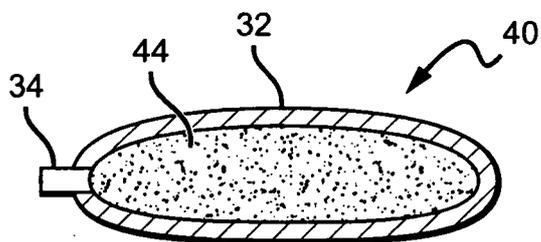







**FIG. 6**


**FIG. 7b**

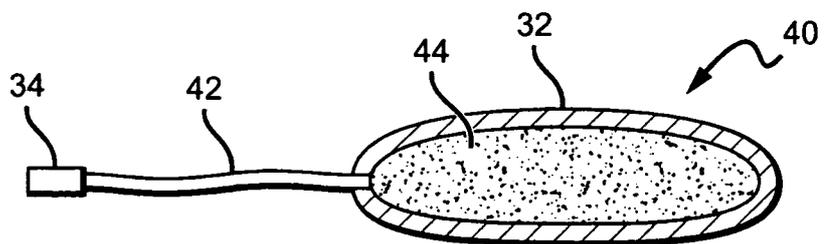


**FIG. 8**

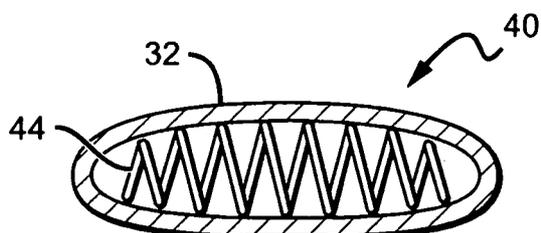

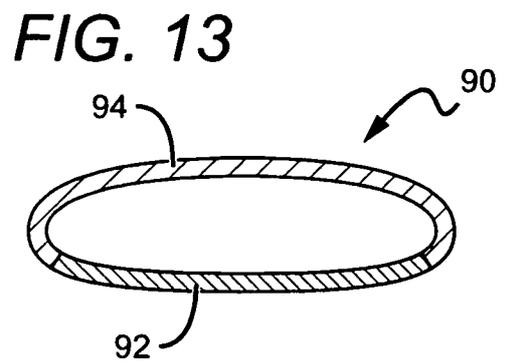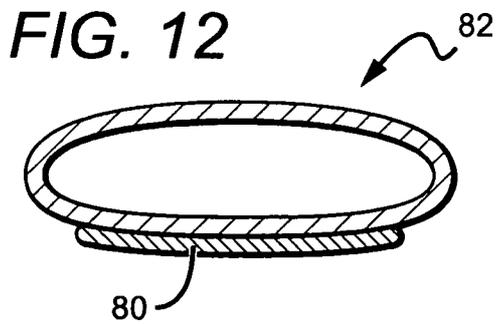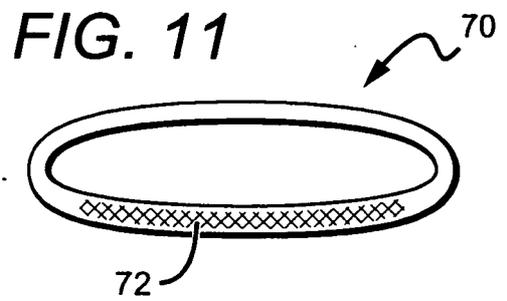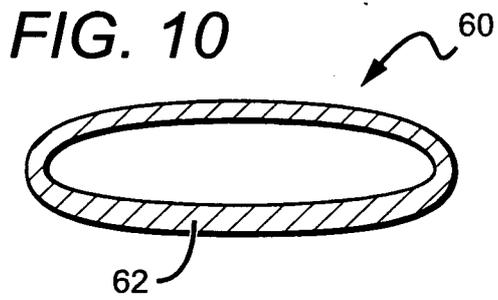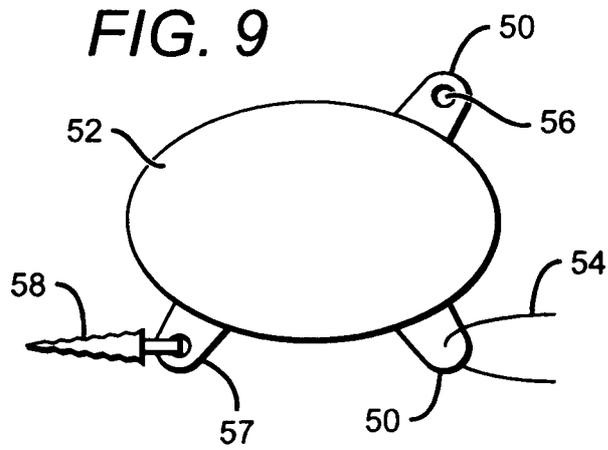


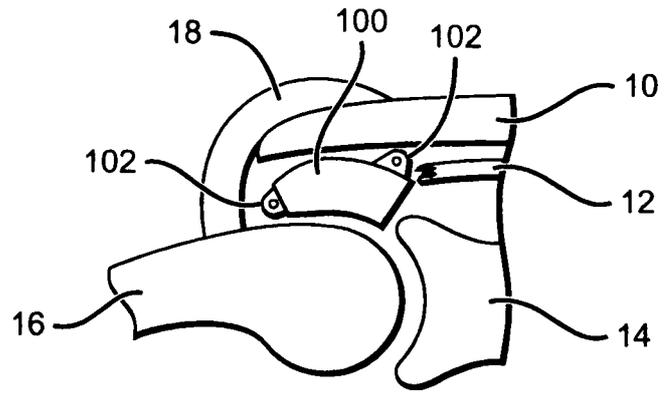

**FIG. 14**

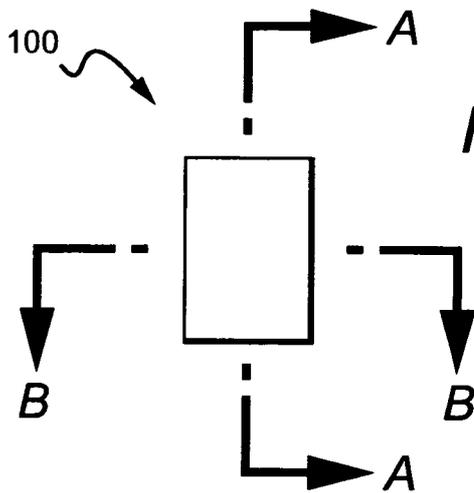


**FIG. 15a**

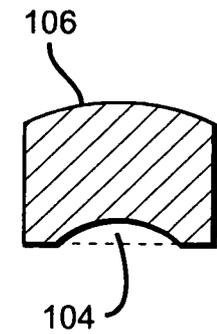

SECTION A-A

**FIG. 15b**

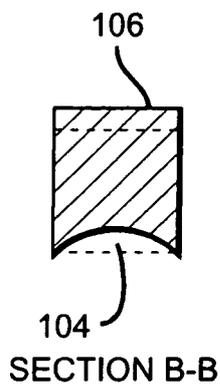

SECTION B-B

**FIG. 15c**

**INTERNATIONAL SEARCH REPORT**

International application No  
**PCT/US2008/009729**

**A. CLASSIFICATION OF SUBJECT MATTER**  
INV. A61F2/30

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**EPO-Internal**

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US k'005/229433 A1 (CACHIA VICTOR V [US]) 20 October 2005 (2005-10-20)  paragraph [0062] - paragraph [0066] paragraph [0071] paragraph [0074] - paragraph [0076] -----	1-4, 7-11, 14-20, 23,25, 31-34
A	US 2004/092948 A1 (STEVENS SHEILA S [US]) ET AL) 13 May 2004 (2004-05-13) paragraph [0107] -----	1,13
A	FR 2 803 191 A (WIRTH BERNARD [FR]) 6 July 2001 (2001-07-06) page 20, line 23 - page 21, line 5 ----- -/--	1

Further documents are listed in the continuation of Box C.

See patent family annex.

\* Special categories of cited documents :

- <sup>1</sup>A\* document defining the general state of the art which is not considered to be of particular relevance
- <sup>1</sup>E\* earlier document but published on or after the international filing date
- <sup>1</sup>L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- <sup>1</sup>O\* document referring to an oral disclosure, use, exhibition or other means
- <sup>1</sup>P\* document published prior to the international filing date but later than the priority date claimed

- <sup>1</sup>T\* later document publisher" after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- <sup>1</sup>X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- <sup>1</sup>Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- <sup>1</sup>&\* document member of the same patent family

Date of the actual completion of the international search

30 December 2008

Date of mailing of the international search report

12/01/2009

Name and mailing address of the ISA/  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer  
  
Korth , C

**INTERNATIONAL SEARCH REPORT**

International application No  
PCT/US2008/009729

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98/20939 A (ADVANCED BIO SURFACES INC [US]; FELT JEFFREY C [US]; RYDELL MARK A [US]) 22 May 1998 (1998-05-22) the whole document -----	1
A	US 2004/267277 A1 (ZANNIS ANTHONY D [US] ET AL) 30 December 2004 (2004-12-30) figures 33,34 -----	1

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US2008/009729

Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

- 1.  Claims Nos.: **37—40**  
because they relate to subject matter not required to be searched by this Authority, namely:  
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
- 2.  Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
- 3.  Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

- 1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
- 2.  As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of additional fees.
- 3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
- 4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees:

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2008/009729

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005229433	AI	20-10-2005	NONE
<hr/>			
US 2004092948	AI	13-05-2004	AT 364361 T 15-07-2007
		AU 2002336648	AI 30-07-2003
		AU 2002359386	AI 30-07-2003
		CA 2472594	AI 24-07-2003
		CN 1622792	A 01-06-2005
		DE 60220716	T2 04-10-2007
		EP 1463463	A2 06-10-2004
		EP 1463464	A2 06-10-2004
		ES 2302846	T3 01-08-2008
		ES 2288569	T3 16-01-2008
		HK 1070265	AI 05-10-2007
		JP 2005514160	T 19-05-2005
		WO 03059214	A2 24-07-2003
		US 2007299455	AI 27-12-2007
<hr/>			
FR 2803191	A	06-07-2001	NONE
<hr/>			
wo 9820939	A	22-05-1998	AU 7178698 A 03-06-1998
		EP 1230902	AI 14-08-2002
		EP 0873145	A2 28-10-1998
		JP 2002505592	T 19-02-2002
		US 2002156531	AI 24-10-2002
		US 2007038300	AI 15-02-2007
		US 2003195628	AI 16-10-2003
		US 2003220649	AI 27-11-2003
		US 2006253200	AI 09-11-2006
		US 6306177	BI 23-10-2001
<hr/>			
US 2004267277	AI	30-12-2004	NONE
<hr/>			