



(11) **EP 2 794 972 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
01.08.2018 Bulletin 2018/31

(51) Int Cl.:
D04H 1/724 ^(2012.01) **D04H 1/732** ^(2012.01)
D01D 5/18 ^(2006.01) **D04H 1/728** ^(2012.01)

(21) Application number: **12859669.9**

(86) International application number:
PCT/US2012/071047

(22) Date of filing: **20.12.2012**

(87) International publication number:
WO 2013/096672 (27.06.2013 Gazette 2013/26)

(54) **PROCESS FOR LAYING FIBROUS WEBS FROM A CENTRIFUGAL SPINNING PROCESS**

VERFAHREN ZUM VERLEGEN VON FASERSTOFFBAHNEN AUS EINEM
ZENTRIFUGALSPINNVERFAHREN

PROCESSUS DE POSE DE BANDES FIBREUSES À L'AIDE D'UN PROCESSUS DE FILATURE
CENTRIFUGE

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

- **CROFT, Jay J.**
Middletown, Delaware 19709 (US)
- **SAQUING, Carl**
Newark, Delaware 19713 (US)
- **CATLIN, Glenn Creighton**
Newark, Delaware 19711 (US)

(30) Priority: **21.12.2011 US 201161578278 P**

(43) Date of publication of application:
29.10.2014 Bulletin 2014/44

(74) Representative: **Heinemann, Monica**
Abitz & Partner
Patentanwälte mbB
Postfach 86 01 09
81628 München (DE)

(73) Proprietor: **E. I. du Pont de Nemours and Company**
Wilmington, DE 19805 (US)

(72) Inventors:

- **HUANG, Tao**
Downingtown, Pennsylvania 19335 (US)
- **ARMANTROUT, Jack Eugene**
Richmond, Virginia 23235 (US)
- **HARDING, Thomas William**
Wilmington, Delaware 19803 (US)
- **DALY, Thomas Patrick**
Aston, Pennsylvania 19014 (US)

(56) References cited:
WO-A1-2009/055413 KR-B1- 100 289 250
KR-B1- 100 780 346 KR-B1- 100 780 346
US-A1- 2006 290 031 US-A1- 2008 242 171
US-A1- 2009 127 748 US-A1- 2009 160 099
US-A1- 2010 072 674

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 794 972 B1

DescriptionTechnical Field

[0001] This invention relates to methods involving a fiber lay-down process for forming fibrous webs. In particular, very fine fibers can be made and collected into a fibrous web useful for selective barrier end uses such as in the fields of air and liquid filtration and battery and capacitor separators.

Background

[0002] Centrifugal atomization processes are known in the art for making metal, metal alloy and ceramics powders. Centrifugal spinning processes are known in the art for making polymer fibers, carbon pitch fibers and glass fibers, such as disclosed in U.S. Patents Nos. 3,097,085, 2,587,710 and 8,277,711

US 2008/0242171 A1 discloses an annular laydown process, in which a collector is disposed vertically around a rotating member. A first gas ring with gas nozzles at a disc is disclosed, wherein the nozzles are provided to direct a hot gas flow towards molten polymer ligaments, and wherein the nozzles may also act to guide the fibers towards the web collector. KR 100780346 B1 relates to a method for producing nanofibers. Figure 2 discloses a first air flow directing the nanofibers towards a collector, wherein the first air flow is perpendicular to the direction of discharge of the fibrils. A second air flow is disclosed, which is created by a suction device.

[0003] US 2010/0072674 A1 relates to a method for producing nanofibers. A second air flow directing the fibers towards a collector is disclosed, wherein this air flow is supplied by means of blowing blades or by means of a blowing fan.

[0004] WO 2009/055413 A1 discloses a method of fiber formation by electrical-mechanical spinning. A liquid starting material is fed to a rotating annular member such as a spinning cup. The liquid material is directed by centrifugal force to the periphery of the annular member where it is expelled in fibrous form. An electric charge is imposed on the liquid while on the annular member or while immediately being expelled from the annular member.

[0005] In order to produce useful webs from such fibers, however, there is a need to be able to lay down the fibers in a suitable configuration. In particular, the problem is complicated by the fact that fibers are being formed centrifugally from a rotating device, and the transition from a rotating fiber flow pattern to a flat sheet with desired properties such as configuration and uniformity can be difficult to achieve. A need thus remains for a method for easily forming webs of high quality and uniformity.

Summary

[0006] The present invention is directed to a method for laying down a web of nanofibers from a centrifugal spinning process comprising the steps of

(i) discharging fibrous streams in the form of fibrils or fibers of molten polymer or polymer solution from a rotating member into a first air flow field that is essentially parallel to the direction of discharge of fibrils at the point of discharge of the fibrils,

(ii) attenuating the fibrous streams, and

(iii) directing the attenuated fibrous streams by means of a second air flow field onto the surface of a collector to form a nanoweb, wherein the second air flow field is supplied by nozzles located on the underside of the rotating member, on the surface thereof facing the collector, wherein the fibrous streams are charged along all or at least a portion of their route from the point of discharge to the surface of the collector.

[0007] In one embodiment, the web laid down by the process may have a uniformity index in a range of about 0.1 to about 5 when measured on a sample size of 90 by 60 cm at 3000 by 2000 pixels.

[0008] The nanofibers may be directed to the collector by a shaping air flow that is essentially perpendicular to the collector surface.

[0009] The rotating member of the method may comprise a disk or cup and fibrils are discharged from the edge of the surface of said disk or cup or from orifices located in or on the surface or cup.

[0010] The fibrils or fibers may attain their electric charge relative to the collector by the application of an electric charge to the rotating member, the fibrils, the collector surface, a structure located in the vicinity of the collector surface, or any combination of these locations and the charge is relative to a ground located on rotating member, the fibrils, the collector surface, a structure located in the vicinity of the collector surface, or any combination of these locations. The charge may also be applied to the fibrils by an ion flow produced by a corona discharge or by other means such as a radio frequency discharge.

[0011] The invention is also directed to a method for laying down a web of nanofibers from a centrifugal spinning

process comprising the steps of:

- (i) ejecting a polymer melt in air or an inert gas from a surface of a spinning disk or cup rotating about an axis and located in a spinning head, wherein molten fibrils exit the surface in a direction essentially perpendicular to the axis of rotation of the disc or cup and into an electric field established between a fiber collector and the spinning head; and wherein the fibrils are attenuated by the centrifugal force and cool to form nanofibers that have a number average fiber diameter of less than 1,000 nm;
- (ii) applying a charge to the polymer melt, the molten fibrils, the nanofibers, or any combination of these three locations;
- (iii) directing the nanofibers with a shaping air flow towards a collector that has a charge opposite to the charge on the fibers in (ii) above;
- (iv) collecting the polymeric nanofibers on the collector,

wherein the turbulent motion of air located between the spinning head and the collector is suppressed by air jets, and wherein a region exists adjacent to and touching the collector where the motion of the fibers is governed by the potential difference between the nanofibers and the collector and is unaffected by the shaping air flow.

[0012] In this embodiment, a region exists adjacent to and touching the collector where the motion of the fibers is governed by the potential difference between the nanofibers and the collector and is unaffected by the shaping air flow.

[0013] The invention is also directed in a further embodiment to a nanoweb made by any of the processes described above.

[0014] In a still further embodiment, the invention is directed to a nanoweb comprising one or more regions in which nanofibers are laid down in a pattern with a uniformity index of less than 5.0 or even less than 1.0. In yet another embodiment, the invention is directed to a web having a uniformity index in a range of about 0.1 to about 5 when measured on a sample size of 90 by 60 cm at 3000 by 2000 pixels.

Brief Description of the Drawings

[0015]

Fig. 1 is an illustration of fiber twisting and swirling under a spin disk.

Fig. 2 is a cut-away cross-sectional view of a centrifugal fiber spinning apparatus suitable for use in laying fibrous web according to the present invention.

Fig. 3 is an illustration of the electrical field within the fiber spinning and web formation area of the apparatus of the present invention.

Fig. 4 is a cut-away side view of an illustration of the fiber pattern with charging but without the element of air management according to the present invention.

Fig. 5 is a cut-away side view of an illustration of a centrifugal fiber spinning apparatus with air management suitable for use in laying fibrous web according to the present invention.

Fig. 6 is a cut-away side view of an illustration of a centrifugal fiber spinning apparatus and air flow field with air management with the spin disk and anti-swirling hub rotating for use in laying fibrous web according to the present invention.

Fig. 7A is an illustration of the air flow field and fiber swirling pattern without air management. Fig. 7B is an illustration of the of the air flow field and fiber umbrella stream with air management and charging suitable for use in laying fibrous web according to the present invention.

Fig. 8A is an illustration of a cut-away side view of the fiber umbrella stream pattern and Figure 10B is an illustration of a top view of the fiber umbrella stream pattern with air management and charging suitable for use in laying fibrous web according to the present invention.

Fig. 9 is an illustration of a cut-away side view of laying web in a cylindrical configuration while the web laydown surface is moving upward or downward.

Fig. 10 and Fig. 11 are illustrations used in the web uniformity calculation in the present invention.

Fig. 12A shows the web image of a stationery laydown of a polypropylene fiber without a moving belt. Fig 12B shows the same laydown with a moving belt.

Fig. 13A shows an example of a laydown on a belt collector with a laydown distance of 90 cm without electrical field and air management. Fig. 13B shows the same laydown with a laydown distance of 15cm and with electrical field and air management applied.

Fig 14 shows examples of laydown of polypropylene webs with and without air.

Fig. 15 shows an example of laydown of a polypropylene web with air and with electrostatic field.

Fig. 16 shows examples of laydown of polyethylene terephthalate webs with and without air.

Fig. 17 shows an example of laydown of a polyethylene terephthalate web with air and with electrostatic field.

Fig. 18 shows examples of laydown of polybutene webs with and without air.

Fig 19 shows an example of laydown of a polybutene web with air and with electrostatic field.

Fig.20 shows an example of a web laid down from a solution spinning process.

5 Detailed Description

[0016] The present invention relates to methods and processes for the dual use of electrostatic charging and air management, in the centrifugal spinning of fibers, to produce uniform fibrous webs or nanowebs.

10 Definitions

[0017] The term "nonwoven" as used herein refers to a web including a multitude of essentially randomly oriented fibers where no overall repeating structure can be discerned by the naked eye in the arrangement of fibers. The fibers can be bonded to each other, or can be unbonded and entangled to impart strength and integrity to the web. The fibers can be staple fibers or continuous fibers, and can comprise a single material or a mixture of a plurality of materials, either as a mixture of fibers each being made from different materials, or as a group of similar fibers each being made from the same mixture of different materials.

[0018] The term "nanoweb" as used herein is synonymous with "nano-fiber web" or "nanofiber web" and refers to a nonwoven web constructed predominantly of nanofibers. "Predominantly" means that greater than 50% of the fibers in the web, by number count or by weight, are nanofibers, where the term "nanofibers" as used herein refers to fibers having a number average diameter less than 1000 nm, even less than 800 nm, even between about 50 nm and 500 nm, and even between about 100 and 400 nm. In the case of non-round cross-sectional nanofibers, the term "diameter" as used herein refers to the greatest dimension of a cross section of the fiber. The nanoweb of the invention can also have greater than 70%, or 90% or it can even contain 100% of nanofibers.

[0019] By "centrifugal spinning process" is meant any process in which fibers are formed by ejection of dissolved or melted polymer from a rotating member.

[0020] By "rotating member" is meant a spinning device that propels or distributes, away from itself, a material in the form of fibrous streams from which fibrils or fibers are formed by centrifugal force, whether or not another means such as air is used to aid in such propulsion.

[0021] By "fibril" is meant the elongated structure that may be formed as a precursor to fine fibers that form when the fibrils are attenuated. Fibrils are formed as fibrous streams of polymer are ejected at a discharge point of the rotating member. The discharge point may be an edge, as described for example in U.S. Patent 8,277,711, or an orifice through which fluid is extruded to form fibrils and fibers.

[0022] By "air flow field" is meant the vector field that describes the speed and direction at any point or physical location in the methods of this invention of the flow of air. The term "air" is used herein to mean air itself or any other inert gas or gaseous fluid, or mixtures of such.

[0023] By "charged" is meant that an object in the process has a net electric charge, positive or negative polarity, relative to uncharged objects or those objects with no net electric charge.

[0024] By "spinning fluid" is meant a thermoplastic polymer, in either melt or solution form, that is able to flow and be formed into fibers.

[0025] By "discharge point" is meant the location on a rotating member from which fibrous streams of polymer are ejected to form fibrils or fibers. The discharge point may, for example, be an edge, or an orifice through which fibrils are extruded.

45 Methods of Spinning

[0026] Considering first Fig. 1, a spinning process is shown that does not employ the process of the present invention. Fibers (102) are shown exiting a discharge point (101) in side view and plan view of a rotating member. The fibers are deposited on a collector (103). Typically, as illustrated schematically in Fig. 1, fibers do not flow in a controlled fashion towards the collector and do not deposit evenly on the collector. The process of the present invention remedies this situation by applying air and electrostatic charge to fibrils and fibers being formed by ejection of fibrous streams from a rotating member, with the objective of producing a particularly uniform web.

[0027] In one embodiment of the methods hereof, the rotating member is a spinning disk, but is not limited to such; and any member that has an edge or an orifice ("discharge point") from which fibrous streams can be discharged to form fibrils and fibers can be used. The process may then comprise the steps of supplying a spinning melt or solution of at least one thermoplastic polymer to an inner spinning surface of a heated rotating distribution disc, cup or other device having a forward surface fiber discharge point. The spinning melt or solution ("spinning fluid") is distributed along the inner spinning surface of such rotating member so as to distribute the spinning melt into a thin film and toward the

discharge point. The process may further involve a discharging step wherein continuous separate molten polymer fibrous streams are discharged from the forward surface discharge point, and the fibrous streams or fibrils formed thereby are attenuated (*i.e.* tapered and/or reduced in thickness or density) by centrifugal force to produce polymeric fibers. In one embodiment, the fibers formed in this manner may have mean fiber diameters of less than about 1,000 nm.

[0028] In a further embodiment, the discharged fibrous stream may also be attenuated by an air flow directed with a component radially away from the discharge point.

[0029] In yet other embodiments, the rotating member may have holes or orifices through which the polymer melt or solution is discharged; the rotating member can be in the form of a cup, or a flat or angled disk; and/or the fibrils or fibers formed by the rotating member may be attenuated by air, centrifugal force, electrical charge, or a combination thereof.

Methods of Charging

[0030] Any high voltage direct current (d.c.), or unipolar radio frequency high voltage, source may be used to supply an electrostatic field as used in the methods of this invention. An electric field is used to supply a charge, for example, to the spinning fluid. Spinning fluid may be charged while on the rotating member, or as it is discharged in the form of fibrous streams, fibrils or fibers, or even after fibers have been formed as a result of attenuation by air or an electrostatic field. The spinning fluid may be charged directly, such as by means of an ion current from a corona discharge produced by a charged entity proximate to the rotating member. One example of such a charged entity would be a ring carrying a current that is concentric with the rotating member and located proximate to the molten polymer or polymer solution, or to the fibrils or fibers as they are formed upon discharge of the fibrous streams.

[0031] The spinning fluid, fibrils or fibers may also or alternatively be charged by induction from a charge held on or near the collector.

[0032] The current drawn in the charging process is expected to be small (preferably less than 10mA). The source should have variable voltage settings (e.g. 0 kV to 80 kV), preferably -5 kV to -15kV for corona ring and +50 to +70kV for collection plate, and preferably (-) and (+) polarity settings to permit adjustments in establishing the electrostatic field.

[0033] The fibers formed by the methods hereof are therefore charged relative to a collector, such that an electric field is present between the fibers and the collector. The collector may be grounded or charged directly, or indirectly, via a charged plate or other entity in its vicinity, for example below it is charged relative to the rotating member.

[0034] Fibers as formed by the methods hereof may attain their charge by the application of a charge to the polymer melt or solution, the molten or solution fibrils (*i.e.* fibrous streams), the fibers as formed, or any combination of these three locations.

[0035] The fibers formed herein may be charged directly, such as by means of a corona discharge and resulting ion current caused by a charged entity proximate to the fibers. One example of such a charged entity would be a ring concentric with the rotating member and located proximate to the molten polymer or polymer solution, or to the fibrils or fibers as they are formed upon discharge of fibrous streams from the rotating member.

[0036] In various embodiments, a charge is applied to the collector only and the polymer is a polar polymer.

[0037] Fig. 2 schematically illustrates an apparatus that can be used to practice an embodiment of the invention. A spin pack comprises a rotating hollow shaft 201 for driving a spin disk 208. A spin disk air heat chamber 207 is mounted above the spin disk. A fiber stretching zone air heating ring 203 with a perforate air exit plate 205 is assembled around the spin disk air heating chamber 207. A shaping air ring 202 is mounted above the stretching zone air ring and passes air vertically downwards in the orientation of figure 2 in order to direct fiber towards the collector 211. A charged ring with needle assembly 204 is placed inside of stretching zone air heating ring 203 in order to charge the fiber stream 210. An air hub 209 is mounted below the spin disk 208 on the rotating shaft 201. A desired fiber stream 210 of umbrella shape carrying electric charge is formed by the air flow field from the combination of the air from the gap of spin disk and its heater, the stretching zone air, the shaping air and the air flow from the rotating air hub.

[0038] A vacuum box web laydown collector 212 may be placed under the whole spin pack. The spin pack to collector distance may be in a range of 10 cm to 15 cm. The collector may have a perforated surface. In the embodiment of Figure 2, there is a solid circle plate 213 having a diameter of slightly larger than the spin disk at the center of collector. There is a no charging zone 214 with a diameter about the air hub. Vacuum can be applied to the collector with the higher strength at the corners and the edges of the collector, and gradually reducing to zero when toward to the center of the collector. In various embodiments, therefore, vacuum can be applied in the shape of an annulus or ring such that there is no vacuum in the middle of the area of the collector.

[0039] Fig. 3 illustrates the electric field pattern that can be used to implement the methods of the invention and that is obtained with the implementation of the methods and apparatus as shown in Figure 2. With the present configuration of the combination of both dual charging and air management, the fiber stream will be formed in an umbrella shape, as shown as in Figure 3, and lay down as a uniform web.

[0040] Fig. 4 is a schematic cut-away side view of an illustration of the fiber pattern with charging but without the element of air management according to the present invention. Fiber (402) is expelled from a discharge point (401)

towards a collector (403). The lack of air management, however, results in turbulence (404) beneath the spin disk, and a web of inferior uniformity.

Method of Applying Air

[0041] The air flow field has two regions in which the direction and rate of air flow are characterized. The first region is at the point of discharge of fibrous streams from the rotating member to form fibrils or fibers. The direction of air flow in this first region is essentially perpendicular to the spinning axis of the rotating member. The direction of air flow is essentially perpendicular to the spinning axis if it is actually true perpendicular, or if it varies from true perpendicular by less than 20%, or less than 15%, or less than 10%, or less than 5%, or less than 1%.

[0042] The air flow may be along the radial direction of the rotating member or it may be at an angle to it. The air may be supplied from a plurality of nozzles located proximate to the rotating member, or it may be supplied from a slot, or otherwise in a continuous fashion around the edge of the rotating member. The air may be directed radially outwards from the spinning axis, or it may be directed at an angle to the radius at the point where the air leaves any particular nozzle.

[0043] In one embodiment, which is not encompassed by this invention, the air may therefore be supplied from a nozzle that has an opening that is located on a radius of the rotating member, and the air flow may be directed at an angle to the radius of between 0 and 60 degrees and in a direction opposite to the direction of rotation of the rotating member.

[0044] The second region of the air flow field is in the space proximate to the collector but that is distal from the periphery of the rotating member. In this region, the air flow is essentially perpendicular to the collector surface. The air therefore directs the fibers onto the surface of the collector where they are held in position by the electrostatic charge on the fibers and the electric field between the collector and the rotating member.

[0045] Air in this region may be supplied by nozzles located on the underside of the rotating member, on the surface thereof facing the collector. The nozzles may be directed towards the collector.

[0046] The air flow field may further include a flow of air into the collector that is essentially perpendicular to the collector from a region between the body of the rotating member and the collector surface.

[0047] In Fig. 5 is shown an embodiment of an apparatus that implements the air management element of the methods of the present invention. Fibrous streams (524) are ejected from the rim of a spinning disk, 528, to form fibers. The apparatus is provided with air flow inlets 521, 522 and 523. Air (529) is ejected through outlets fed from 522 and 523 in such a way as to direct the formed fiber towards a collector 525. A vacuum may also be applied under at least a portion of the collector to draw air through the collector surface. The collector may have a dead zone (526) through which no air flows.

[0048] Air may also be supplied to the fibers through a cup or hub (527) located underneath the spin disk and supplied from air inlet 521. As seen schematically in Figure 5, air may flow parallel (530) to or perpendicular (531) to or at an intermediate angle to (532) the direction of ejection of formed fibers from the discharge point. In various embodiments hereof, fibrous streams in the form of fibrils or fibers of molten polymer or polymer solution are discharged from a rotating member into an air flow field that is essentially parallel to the direction of discharge of fibrils at the point of discharge of the fibrils. The direction of air flow is essentially parallel to the direction of discharge of fibrils if it is actually true parallel, or if it varies from true parallel by less than 20%, or less than 15%, or less than 10%, or less than 5%, or less than 1%. In various other embodiments hereof, air is discharged, from one or more air discharge ports, in a direction that is essentially parallel to axis on which the rotating member rotates. The direction of air flow is essentially parallel to the rotating member axis if it is actually true parallel, or if it varies from true parallel by less than 20%, or less than 15%, or less than 10%, or less than 5%, or less than 1%.

[0049] Fig. 6 is an illustration of the air flow field that may be obtained by use of the apparatus shown in Figure 5. Air inlets 631, 632 and 633 generate an air flow field represented by 634, 635 and 636 that carry fiber stream 637 towards a collector. The turbulent behavior shown in Figure 4 is suppressed.

[0050] Figs. 7A and 7B show schematically a comparison between the air flow field that is obtained with and without the air flow management of the present invention. In the absence of air management, and in particular with no hub (which is shown at 527 in Figure 5), air tends to swirl under the spin disk and introduce instability in the lay down of the fiber. With center air directed from a hub, swirling is no longer evident.

[0051] The desired fiber flow pattern as fiber is formed upon ejection of fibrous streams from the discharge point is an umbrella with even fiber distribution at the disk edge and extending down onto the collector. This pattern is illustrated schematically in side view and plan view in Figures 8A and 8B.

Fiber Laydown

[0052] Multiple spin heads may be used to produce a fibrous web of the invention. A laying web arrangement is obtained from fiber umbrella streams from multiple spin heads while the web laydown surface is moving, as for example

on a conveyor belt.

[0053] For laying web on scrim, an unwinder and winder are placed on either sides of a web laydown collector. For laying stand-alone scrimless web, a moving circle belt surrounds the web laydown collector, and the top of the belt is contacted to the top surface of the web laydown collector. The web is laid down starting on a short leading scrim onto a winder, then laid down on the surface of the belt for continuous web laydown and winding up to winder to form a stand-alone web roll goods.

[0054] As another web laydown arrangement, Fig. 9 is an illustration of a cut-away side view of laying web in a cylindrical configuration while the web laydown surface is moving upward or downward. A spin pack 931 is placed in the center of a cylindrical vacuum collector 933 with charging surface 934. An air flow field represented by 935 carries fiber stream 937 towards to the cylindrical inner surface of the collector. A pair of forming horns 932 is used for converting flat belt to cylindrical shape when moving into the collector, and for converting the cylindrical shape to flat belt when moving out from the collector.

[0055] Fibers may be spun from any of the thermoplastic resins capable of use in centrifugal fiber or nanofiber spinning. These include polar polymers such as polyesters, polyethylene terephthalate (PET), polybutylene terephthalate (PBT), and polytrimethyl terephthalate (PTT), and nylon (polyamide); suitable non-polar polymers include polypropylene (PP), polybutylene (PB), polyethylene (PE), poly-4-methylpentene (PMP), and their copolymers (including EVA copolymer), polystyrenepolydimethylmethacrylate (PMMA), polytrifluorochloroethylene, polyurethanes, polycarbonates, silicones, and blends of these. With charging agents in non-polar polymers, the methods hereof will work better.

[0056] In various other embodiments, the methods hereof further include a step of fabricating an article from a nonwoven web as obtained herein. Fabrication steps can include cutting and stitching the non-woven web, and/or combining the non-woven web with other layers, such as fabrics or films, to form a multi-layer laminate or other structure. An article fabricated from a non-woven web as obtained herein can include a filter, a membrane in a fuel cell, or a separator for use to separate the electrodes in an electrolyte solution in a battery.

Apparatus

[0057] The invention is further directed to an apparatus for laying down a web from a centrifugal spinning process. A melt spinning apparatus, not encompassed by the invention, for making polymeric fibers, as disclosed herein, includes:

- a rotating member that rotates about an axis with an edge or orifices to allow flow of polymer melt or solution fibrils to exit therefrom;
- a means for directing an ion flow to the polymer melt or solution, or to the fibrils or both such that the ion flow generates a charge on the fibers;
- a collection belt that has a charge opposite to the charge on the fibers in (ii) above;
- nozzles located on the underside of the rotating member, on the surface facing the collector. The nozzles may be directed towards the collector;
- a nozzle that has an opening that is located on a radius of the rotating member, and the air flow is directed at an angle to the radius of between 0 and 60 degrees and in a direction opposite to the direction of rotation of the rotating member.

[0058] A plurality of nozzles may be located proximate to the rotating member, and may be directed radially outwards from the spinning axis, or it may be directed at an angle to the radius at the point where the air leaves any given nozzle.

Web Structure

[0059] The inventions hereof are further directed to a web with an exceptionally high uniformity index (UI) as defined herein. In a preferred embodiment, the web is a nanoweb. The possible levels of uniformity that can be achieved using the process of the invention will be explained below with reference to certain non limiting examples.

[0060] In various other embodiments, the inventions hereof include a method for laying down a web of fibers that includes the steps of (a) rotating a rotating member (i) to apply centrifugal force to a molten polymer or polymer solution contained within the rotating member, and (ii) to discharge from the rotating member fibrous streams of the molten polymer or polymer solution; (b) applying an air flow field that is essentially parallel to the fibrous streams to attenuate the fibrous streams and form fibrils and/or fibers therefrom; and (c) applying to the fibrils and/or fibers an air flow field and an electrical charge to direct them to the surface of a web collector.

[0061] In various other embodiments, the inventions hereof include a spinning apparatus for making a web of polymeric fibers, that includes (a) a rotating member that rotates on an axis and having one or more discharge points to discharge therefrom fibrous streams of molten polymer or a polymer solution; (b) one or more air discharge ports to discharge air in a direction that is essentially parallel to the direction of discharge of the fibrous streams, or is essentially parallel to

the axis of the rotating member, and/or is essentially perpendicular to the axis of the rotating member; (c) a voltage source to apply an electrical charge to fibrils or fibers formed from the fibrous streams; and (d) a collection surface to collect fibers and from a web therefrom wherein the collection surface has an electrical charge that is opposite in polarity to the charge on the fibrils or fibers.

Examples

[0062] The operation and effects of certain embodiments of the inventions hereof may be more fully appreciated from a series of examples, as described below. The embodiments on which these examples are based are representative only, and the selection of those embodiments to illustrate the invention does not indicate that materials, components, configurations, designs, conditions and/or techniques not described in the examples are not suitable for use herein, or that subject matter not described in the examples is excluded from the scope of the appended claims and equivalents thereof.

Measurement of Uniformity Index.

[0063] A web sample was placed on a lighting box providing uniform transmitted light from a lighting plate using arrays of LED's. A digital camera was used for taking images from different sizes of samples with desired megapixel numbers.

[0064] The calculation of uniformity index comprises the following steps:

(i) The pixel field is first divided into a series of 2X2 pixel blocks. This division is defined as layer 1.

(ii) Referring now to Figure 10 for layer 1, the percent difference ("PD") value for block AA' is calculated from:

$$PD(A, A') = 100 \sum \text{Abs}(L_i - L_j) / (6 \times 256)$$

where L_i is the luminosity value for pixel i and the summation is over $i < j$ for $j = 1$ to 4 so there are 6 terms in the sum and the luminosity has a scale range of 256.

(iii) The absolute luminosity ("AL") for block AA' is calculated from:

$$AL(A, A') = \sum L_i / 4$$

where the sum is over $i = 1$ to 4.

(iv) The PD and AL values are calculated for all of the 2x2 blocks in level 1, and the UI value for the layer 1 is then calculated from:

$$UI_1 = [\text{SD of all of the blocks' PD}(m, n)] \times \\ [\text{average of all the blocks' PD}(m, n)] \times \\ [\text{SD of all of the blocks' AL}(m, n)]$$

where SD refers to standard deviation.

[0065] Figure 10 shows how the block AA' in level 1 now becomes an element of a single block in level 2. The process steps above are then repeated for layers 2 up to the largest layer number that the image can support where the layer definitions are seen in Figure 11. For example, layer 1 consists of blocks that consist of the 2x2 pixel squares. Layer 2 consists of four blocks (2x2) where each block consists not of pixel squares but the 2x2 pixel blocks from layer 1. Layer 3 consists of the four blocks where each block consists of the 4x4 pixel blocks from layer 2, and so on until the image cannot accommodate any more levels.

[0066] The uniformity index (UI) is then defined as the average UI over all of the layers in the image, i.e.

$$UI = \sum UI_i / N$$

where the sum is over level numbers and N is the total number of layers in the image.

[0067] A lower uniformity index (UI) indicates a more uniform distribution of fibers.

[0068] Hereinafter the inventions hereof will be described in more detail in the following examples. The web images in the following examples were taken and measured on a sample size of 90 by 60 cm at 3000 by 2000 pixels.

Example 1 - No Electrostatic Field.

[0069] Continuous fibers were made using an apparatus as illustrated in Figure 2, from a low molecular weight (Mw) polypropylene (PP) homopolymer, Metocene MF650Y from LyondellBasell. It is of Mw= 75,381 g/mol, and melt flow rate = 1800 g/10 min (230°C/2.16kg). A PRISM extruder with a gear pump was used to deliver the polymer melt to the rotating spin disk through the supply tube. The temperature of the spinning melt from the melt supply tube was set to 240°C. The disk heating air was set at 260°C. The stretching zone heating air was set at 150°C. The shaping air was set at 30°C. The rotation speed of the spin disk was set to a constant 10,000 rpm. There was no center air through the hollow rotating shaft and no anti-swirling hub used. There was no upward air flow at the center from web collector under the spin disk. No electrical field or ion charging was used during this test.

[0070] Nanofiber web was layed down on a belt collector with a laydown distance of 15 cm. The fiber size was measured from an image using scanning electron microscopy (SEM) and the fibers were determined to have an average fiber diameter of about mean = 430 nm and median = 381 nm. Figure 12 (A) shows the web image of a stationery laydown without a moving belt. A fiber swirling pattern appeared in the center of the web under the spin disk. The web uniformity index was UI=70.0935. Under the same condition, Figure 12 (B) shows the web image of a web laydown with the belt moving at 22.5 cm/min. A fiber swirling pattern appeared along the center region of the web. The web uniformity index was UI=10.8841.

Example 2

[0071] With the same spinning conditions as in Example 1, a nanofiber web shown in Figure 13 (A) was laid on a belt collector with a laydown distance of 90 cm with no electrical field or electric charge. The belt speed was 22.5 cm/min. Figure 13 (A) shows the resulting web. The web uniformity index was UI=10.4638.

[0072] Figure 13 (B) shows the web image of a web with a laydown distance of 15 cm and with electrostatic charging under the same spinning conditions. Center air was applied through the hollow rotating shaft and an anti-swirling hub (527 in figure 5) was used. The web uniformity index was UI=0.15294.

Example 3

[0073] Continuous fibers were made using an apparatus as illustrated in Figure 2, from a polypropylene (PP) 50% / 50% blend of a high Mw PP and a low Mw PP. The high Mw PP was Marlex HGX-350 from Phillips Sumika. It had Mw= 292,079 g/mol, and melt flow rate = 35 g/10 min (230°C/2.16kg). The low Mw PP is Metocene MF650Y used in Example 1 from LyondellBasell. It was of Mw= 75,381 g/mol, and melt flow rate = 1800 g/10 min (230°C/2.16kg).

[0074] A PRISM extruder with a gear pump was used to deliver the polymer melt to the rotating spin disk through the supply tube. The temperature of the spinning melt from the melt supply tube was set to 260°C. The gear pump speed was set to a melt feed rate of about 5 g/min with the pressure at a constant 12 psi. The disk heating air was set at 280°C. The stretching zone heating air was set at 180°C. The shaping air was set at 30°C and 15 SCFM. The rotation speed of the spin disk was set to a constant 10,000 rpm. The speed of the belt was 22.5 cm/min.

[0075] A nanofiber web was laid down on a belt collector with a laydown distance of 14cm. The fiber size was measured from an image using scanning electron microscopy (SEM) and the fibers were determined to have an average fiber diameter of about mean = 640 nm and median = 481 nm.

[0076] The center air through the rotating shaft to hub was set at 30°C, and, without charging, Figure 14 (A) shows the web image of web uniformity index UI=17.6782. Fiber bundles appeared in the web.

[0077] With dual high voltage charging of +50kV and 0.6 mA on collector belt, -12kV and 0.6mA on corona ring, without air management, Figure 14 (B) shows that the web uniformity index is UI=5.07558. There was a stripe of a fiber swirling pattern still appearing in the center of the web under the spin disk. With dual charging and air management, Figure 15 shows that the web uniformity index is UI=2.36221.

Example 4

[0078] Continuous fibers were made using an apparatus as illustrated in Figure 1, from a polyethylene terephthalate (PET) homopolymer, PET F61, from Eastman Chemical. A PRISM extruder with a gear pump was used to deliver the polymer melt to the rotating spin disk through the supply tube. The temperature of the spinning melt from the melt supply tube was set to 260°C. The gear pump speed was set to a melt feed rate of about 5 g/min with the pressure at a constant 12 psi. The disk heating air was set at 280°C. The stretching zone heating air was set at 180°C. The shaping air was

set at 30°C. The rotation speed of the spin disk was set to a constant 10,000 rpm. The laydown belt was moving at 22.5 cm/min.

[0079] A nanofiber web was laid down on a belt collector with a laydown distance of 14 cm. The fiber size was measured from an image using scanning electron microscopy (SEM) and the fibers were determined to have an average fiber diameter of about mean = 730 nm and median = 581 nm.

[0080] The center air through the rotating shaft was set at 30°C, with center upward air flow, and, without charging implemented. Figure 16 (A) shows the web image with web uniformity index is UI=11.2202. Fiber bundles appeared in the web.

[0081] With dual high voltage charging of +50kV and 0.6 mA on collector belt, -12kV and 0.6mA on the corona ring, and without air management, Figure 16 (B) shows that the web uniformity index is UI=7.4186. There was a stripe of fiber swirling pattern in the center of the web under the spin disk. With dual charging and air management, Figure 17 shows that the web uniformity index is UI=0.66408.

Example 5

[0082] Continuous fibers were made using an apparatus as illustrated in Figure 1, from a polybutylene (PB) homopolymer, PB 0801M, from LyondellBasell. A PRISM extruder with a gear pump was used to deliver the polymer melt to the rotating spin disk through the supply tube. The temperature of the spinning melt from the melt supply tube was set to 210°C. The gear pump speed was set to a melt feed rate of about 5 g/min with the pressure at a constant 12 psi. The disk heating air was set at 240°C. The stretching zone heating air was set at 110°C. The shaping air was set at 30°C. The rotation speed of the spin disk was set to a constant 10,000 rpm. The laydown belt was moving at a speed of 22.5 cm/min.

[0083] Nanofiber web was laid down on a belt collector with a laydown distance of 14 cm. The fiber size was measured from an image using scanning electron microscopy (SEM) and the fibers were determined to have an average fiber diameter of 530 nm and median of 481 nm.

[0084] With the center air through the rotating shaft set at 30°C and 2 SCFM, and with center upwardly air flow, and without charging, Figure 18(A) shows the web image with a web uniformity index of UI=19.93854. Fiber bundles appeared in the web.

[0085] With dual high voltage charging of +50kV and 0.6 mA on collector belt, -12kV and 0.6mA on corona ring, and without air management, Figure 18(B) shows that the web uniformity index is UI=15.5067. There was a fiber swirling pattern stripe in the center of the web under the spin disk. With dual charging and air management, Figure 19 (C) shows that the web uniformity index is UI=0.74313.

Example 6

[0086] Continuous fibers were made using a standard ITW TurboDisk atomizer with a special 20 hole turbine plate, and control enclosure for high voltage and turbine speed control from ITW Automotive Finishing Group. The Pulse Track System was used to maintain constant speed of the rotary atomizer during the spinning process. The solution viscosity was 12.5 PaS at 25° C. A 30 cm flat spin disk was used. A spin solution of 12.0% poly(ethylene oxide) with an Mw of about 300,000 and 88.0% water was used. The flow rate of the spin solution was 200 cc/min, and the disk rotation speed was 21,000 rpm. High voltage was provided from a Voltage Master power supply. The high voltage was operated at about 73 kV during this test. The shaping air was set at 25°C. The laydown belt was moving at 20 inch/min.

[0087] The fiber size was measured from SEM images and the fiber was determined to have an average fiber diameter of 254 nm with a median value of 222 nm. Figure 20 shows that the web uniformity index was UI=2.02494.

[0088] In this specification, unless explicitly stated otherwise or indicated to the contrary by the context of usage, where an embodiment of the subject matter hereof is stated or described as comprising, including, containing, having, being composed of or being constituted by or of certain features or elements, one or more features or elements in addition to those explicitly stated or described may be present in the embodiment. An alternative embodiment of the subject matter hereof, however, may be stated or described as consisting essentially of certain features or elements, in which embodiment features or elements that would materially alter the principle of operation or the distinguishing characteristics of the embodiment are not present therein. A further alternative embodiment of the subject matter hereof may be stated or described as consisting of certain features or elements, in which embodiment, or in insubstantial variations thereof, only the features or elements specifically stated or described are present.

[0089] Where a range of numerical values is recited or established herein, the range includes the endpoints thereof and all the individual integers and fractions within the range, and also includes each of the narrower ranges therein formed by all the various possible combinations of those endpoints and internal integers and fractions to form subgroups of the larger group of values within the stated range to the same extent as if each of those narrower ranges was explicitly recited. Where a range of numerical values is stated herein as being greater than a stated value, the range is nevertheless

finite and is bounded on its upper end by a value that is operable within the context of the invention as described herein. Where a range of numerical values is stated herein as being less than a stated value, the range is nevertheless bounded on its lower end by a non-zero value.

[0090] In this specification, unless explicitly stated otherwise or indicated to the contrary by the context of usage,

(a) lists of compounds, monomers, oligomers, polymers and/or other chemical materials include derivatives of the members of the list in addition to mixtures of two or more of any of the members and/or any of their respective derivatives;

(b) amounts, sizes, ranges, formulations, parameters, and other quantities and characteristics recited herein, particularly when modified by the term "about", may but need not be exact, and may also be approximate and/or larger or smaller (as desired) than stated, reflecting tolerances, conversion factors, rounding off, measurement error and the like, as well as the inclusion within a stated value of those values outside it that have, within the context of this invention, functional and/or operable equivalence to the stated value;

(c) the term "essentially" is defined to mean that, if a parameter is described as being "essentially" in a stated condition or at a stated value, then conditions or numerical values for that parameter that are different from the stated condition or value but that do not affect the functioning of the invention are to be considered within the scope of the description of the parameter as "essentially" at the stated condition or value.

Claims

1. A method for laying down a web of nanofibers from a centrifugal spinning process comprising the steps of

(i) discharging fibrous streams in the form of fibrils or fibers of molten polymer or polymer solution from a rotating member into a first air flow field that is essentially parallel to the direction of discharge of fibrils at the point of discharge of the fibrils,

(ii) attenuating the fibrous streams, and

(iii) directing the attenuated fibrous streams by means of a second air flow field onto the surface of a collector to form a nanoweb, wherein the second air flow field is supplied by nozzles located on the underside of the rotating member, on the surface thereof facing the collector,

wherein the fibrous streams are charged along all or at least a portion of their route from the point of discharge to the surface of the collector.

2. The method of claim 1 in which the web has a uniformity index range 0.1 to 5 when measured on a sample size of 90 by 60 cm at 3000 by 2000 pixels.

3. The method of claim 1 wherein the attenuation of step (ii) is caused by the centrifugal force of ejection of fibrils from the point of discharge.

4. The method of claim 1 in which the nanofibers are directed to the collector by a shaping air flow that is essentially perpendicular to the collector surface.

5. The method of claim 1 in which the rotating member comprises a disk or cup and fibrils are discharged from the edge of the surface of said disc or cup or from orifices located in or on the surface or cup.

6. The method of claim 1 in which the spinning process further comprises the step of attenuating the fibrils with centrifugal force and cooling the attenuated fibrils or allowing the attenuated fibrils cool and form nanofibers.

7. The method of claim 1 in which the fibrils attain their charge relative to the collector by the application of a charge to the rotating member, the fibrils, the collector surface, a structure located in the vicinity of the collector surface, or any combination of these locations and the charge is relative to a ground located on rotating member, the fibrils, the collector surface, a structure located in to the vicinity of the collector surface, or any combination of these locations.

8. The method of claim 1 wherein a charge is applied to the collector only and the polymer is a polar polymer.

9. The method of claim 7 in which the charge is applied to the fibrils by an ion flow produced by a corona discharge.

10. The method of claim 1 further comprising a step of fabricating an article from the web as obtained therein.

11. The method of claim 10 wherein the article comprises a battery separator.

12. The method of any one of claims 1 to 11, wherein the method comprises the steps of:

- (i) ejecting a polymer melt in air or an inert gas from a surface of a spinning disk or cup rotating about an axis and located in a spinning head, wherein molten fibrils exit the surface in a direction essentially perpendicular to the axis of rotation of the disc or cup and into an electric field established between a fiber collector and the spinning head; and wherein the fibrils are attenuated by the centrifugal force and cool to form nanofibers that have a number average fiber diameter of less than 1,000 nm;
- (ii) applying a charge to the polymer melt, the molten fibrils, the nanofibers, or any combination of these three locations;
- (iii) directing the nanofibers with a shaping air flow towards a collector that has a charge opposite to the charge on the fibers in (ii) above;
- (iv) collecting the polymeric nanofibers on the collector,

wherein the turbulent motion of air located between the spinning head and the collector is suppressed by air jets, and wherein a region exists adjacent to and touching the collector where the motion of the fibers is governed by the potential difference between the nanofibers and the collector and is unaffected by the shaping air flow.

Patentansprüche

1. Verfahren zum Verlegen einer Bahn aus Nanofasern aus einem Zentrifugalspinnvorgang, umfassend die Schritte des

- (i) Abgebens faseriger Ströme in Form von Fibrillen oder Fasern aus geschmolzenem Polymer oder Polymerlösung von einem rotierenden Element in ein erstes Luftströmungsfeld, das im Wesentlichen parallel zu der Abgaberrichtung der Fibrillen an der Abgabestelle der Fibrillen liegt,
- (ii) Verringerns der faserigen Ströme und
- (iii) Leitens der verringerten faserigen Ströme durch ein zweites Luftströmungsfeld auf die Oberfläche eines Sammlers, um eine Nanobahn zu bilden, wobei das zweite Luftströmungsfeld durch Düsen beliefert wird, die sich auf der Unterseite des rotierenden Elements, auf der Oberfläche davon, die dem Sammler zugewandt ist, befindet,

wobei die faserigen Ströme den gesamten oder mindestens einen Teil ihres Wegs von der Abgabestelle bis zur Oberfläche des Sammlers entlang geladen werden.

2. Verfahren nach Anspruch 1, wobei die Bahn einen Gleichförmigkeitsindexbereich von 0,1 bis 5 aufweist, wenn er an einer Probengröße von 90 auf 60 cm bei 3000 auf 2000 Pixeln gemessen.

3. Verfahren nach Anspruch 1, wobei das Verringern von Schritt (ii) durch die Zentrifugalkraft des Ausstoßens von Fibrillen aus der Abgabestelle verursacht wird.

4. Verfahren nach Anspruch 1, wobei die Nanofasern zu dem Sammler durch eine Gestaltungsluftströmung geleitet werden, die im Wesentlichen senkrecht zu der Sammleroberfläche liegt.

5. Verfahren nach Anspruch 1, wobei das rotierende Element eine Scheibe oder einen Becher umfasst und die Fibrillen von der Kante der Oberfläche der Scheibe oder des Bechers oder aus Öffnungen abgegeben werden, die sich in oder auf der Oberfläche oder dem Becher befinden.

6. Verfahren nach Anspruch 1, wobei der Spinnvorgang ferner den Schritt des Reduzierens der Fibrillen durch Zentrifugalkraft und Kühlens der reduzierten Fibrillen oder Gestattens, dass die reduzierten Fibrillen gekühlt werden und Nanofasern bilden, umfasst.

7. Verfahren nach Anspruch 1, wobei die Fibrillen ihre Ladung vom Sammler abhängig durch Aufbringen einer Ladung auf das rotierende Element, die Fibrillen, die Sammleroberfläche, eine Struktur, die sich in der Nähe der Sammleroberfläche befindet, oder irgendeine Kombination dieser Stellen erreichen und die Ladung von einer Erdung

abhängt, die sich auf dem rotierenden Element, den Fibrillen, der Sammleroberfläche, einer Struktur, die sich in der Nähe der Sammleroberfläche befindet oder irgendeiner Kombination dieser Stellen befindet.

8. Verfahren nach Anspruch 1, wobei eine Ladung nur auf den Sammler aufgebracht wird und das Polymer ein polares Polymer ist.

9. Verfahren nach Anspruch 7, wobei die Ladung auf die Fibrillen durch einen Ionenfluss aufgebracht wird, der durch eine Koronaentladung erzeugt wird.

10. Verfahren nach Anspruch 1, ferner einen Schritt des Fertigens eines Artikels aus der Bahn, wie sie darin erhalten wird, umfasst.

11. Verfahren nach Anspruch 10, wobei der Artikel einen Batterieseparator umfasst.

12. Verfahren nach einem der Ansprüche 1 bis 11, wobei das Verfahren die Schritte umfasst des:

(i) Emittierens einer Polymerschmelze in Luft oder einem inerten Gas aus einer Oberfläche einer Tellerdüse oder eines Spinntopfs, die/der um eine Achse rotiert und sich in einem Spinnkopf befindet, wobei geschmolzene Fibrillen die Oberfläche in einer Richtung, die im Wesentlichen senkrecht zu der Rotationsachse des Tellers oder Topfs liegt, und in ein elektrisches Feld hinein verlassen, das zwischen einem Fasersammler und dem Spinnkopf eingerichtet ist; und wobei die Fibrillen durch die Zentrifugalkraft reduziert werden und sich abkühlen, um Nanofasern zu bilden, die einen zahlendurchschnittlichen Faserdurchmesser von weniger als 1.000 nm aufweisen;

(ii) Aufbringens einer Ladung auf die Polymerschmelze, die geschmolzenen Fibrillen, die Nanofasern oder irgendeine Kombination dieser drei Stellen;

(iii) Richtens der Nanofasern mit einer Gestaltungsluftströmung auf einen Sammler zu, der eine der Ladung aufweist, die der Ladung der Fasern in (ii) oben entgegengesetzt ist;

(iv) Sammeln der polymeren Nanofasern auf dem Sammler,

wobei die turbulente Bewegung einer Luft, die sich zwischen dem Spinnkopf und dem Sammler befindet, durch Luftdüsen unterdrückt wird und wobei eine Region an dem Sammler anliegend und diesen berührend vorliegt, wobei die Bewegung der Fasern durch den Potenzialunterschied zwischen den Nanofasern und dem Sammler reguliert wird und von der Gestaltungsluftströmung unbeeinflusst bleibt.

Revendications

1. Procédé de dépôt d'un voile de nanofibres à partir d'un procédé centrifuge de filage comprenant les étapes de

(i) décharge d'écoulements fibreux sous la forme de fibrilles ou de fibres de polymère fondu ou de solution polymère à partir d'un élément de rotation dans un premier champ d'écoulement d'air qui est essentiellement parallèle au sens de décharge des fibrilles au point de décharge des fibrilles,

(ii) atténuation des écoulements fibreux, et

(iii) orientation des écoulements fibreux atténués à l'aide d'un second champ d'écoulement d'air sur la surface d'un collecteur pour former un nano voile, le second champ d'écoulement d'air étant alimenté par des buses localisées sur le côté inférieur de l'élément de rotation, sur sa surface faisant face au collecteur,

les écoulements fibreux étant chargés le long de l'ensemble ou d'au moins une partie de leur chemin depuis le point de décharge vers la surface du collecteur.

2. Procédé selon la revendication 1, dans lequel le voile présente une plage d'indices d'uniformité de 0,1 à 5 lorsque mesurés sur une taille d'échantillon de 90 par 60 cm à 3 000 par 2 000 pixels.

3. Procédé selon la revendication 1, l'atténuation de l'étape (ii) étant causée par la force centrifuge d'éjection des fibrilles depuis le point de décharge.

4. Procédé selon la revendication 1, dans lequel les nanofibres sont orientées vers le collecteur par un écoulement d'air de mise en forme qui est sensiblement perpendiculaire à la surface du collecteur.

5. Procédé selon la revendication 1, dans lequel l'élément de rotation comprend un disque ou une coupe et les fibrilles sont déchargées du bord dudit disque ou de ladite coupe ou depuis des orifices localisés à l'intérieur ou sur la surface ou coupe.

6. Procédé selon la revendication 1, dans lequel le procédé de filage comprend en outre l'étape d'atténuation des fibrilles avec une force de centrifugation et le refroidissement des fibrilles atténuées ou le fait de permettre aux fibrilles atténuées de refroidir et de former des nanofibres.

7. Procédé selon la revendication 1, dans lequel les fibrilles atteignent leur charge par rapport au collecteur par l'application d'une charge à l'élément de rotation, aux fibrilles, à la surface du collecteur, à une structure localisée à proximité de la surface du collecteur, ou à n'importe quelle combinaison de ces emplacements et la charge existe par rapport à une masse localisée sur l'élément de rotation, les fibrilles, la surface du collecteur, une structure localisée à proximité de la surface du collecteur, ou sur n'importe quelle combinaison de ces emplacements.

8. Procédé selon la revendication 1, une charge étant appliquée au collecteur uniquement et le polymère étant un polymère polaire.

9. Procédé selon la revendication 7, dans lequel la charge est appliquée aux fibrilles par un écoulement d'ions produit par une décharge couronne.

10. Procédé selon la revendication 1 comprenant en outre une étape de fabrication d'un article depuis le voile tel qu'obtenu à l'intérieur.

11. Procédé selon la revendication 10, l'article comprenant un séparateur de batterie.

12. Procédé selon l'une quelconque des revendications 1 à 11, le procédé comprenant les étapes de:

(i) éjection d'une masse fondue de polymère dans de l'air ou un gaz inerte depuis une surface d'un disque ou d'une coupe de filage tournant autour d'un axe et localisée dans une tête de filage, les fibrilles fondues sortant de la surface dans un sens sensiblement perpendiculaire à l'axe de rotation du disque ou de la coupe et dans un champ électrique créé entre un collecteur de fibres et la tête de filage; et les fibrilles étant atténuées par la force de centrifugation et refroidissant pour former des nanofibres qui présentent un diamètre de fibre moyen en nombre inférieur à 1 000 nm;

(ii) application d'une charge à la masse fondue de polymère, aux fibrilles fondues, aux nanofibres, ou à n'importe quelle combinaison de ces trois emplacements;

(iii) orientation des nanofibres avec un écoulement d'air de mise en forme vers un collecteur qui présente une charge opposée à la charge sur les fibres au point (ii) ci-dessus;

(iv) recueil des nanofibres polymères sur le collecteur,

le mouvement turbulent de l'air localisé entre la tête de filage et le collecteur étant supprimé par les jets d'air, et une région existante adjacente à et touchant le collecteur où le mouvement des fibres est gouverné par la différence de potentiel entre les nanofibres et le collecteur et n'étant pas affecté par l'écoulement d'air de mise en forme.

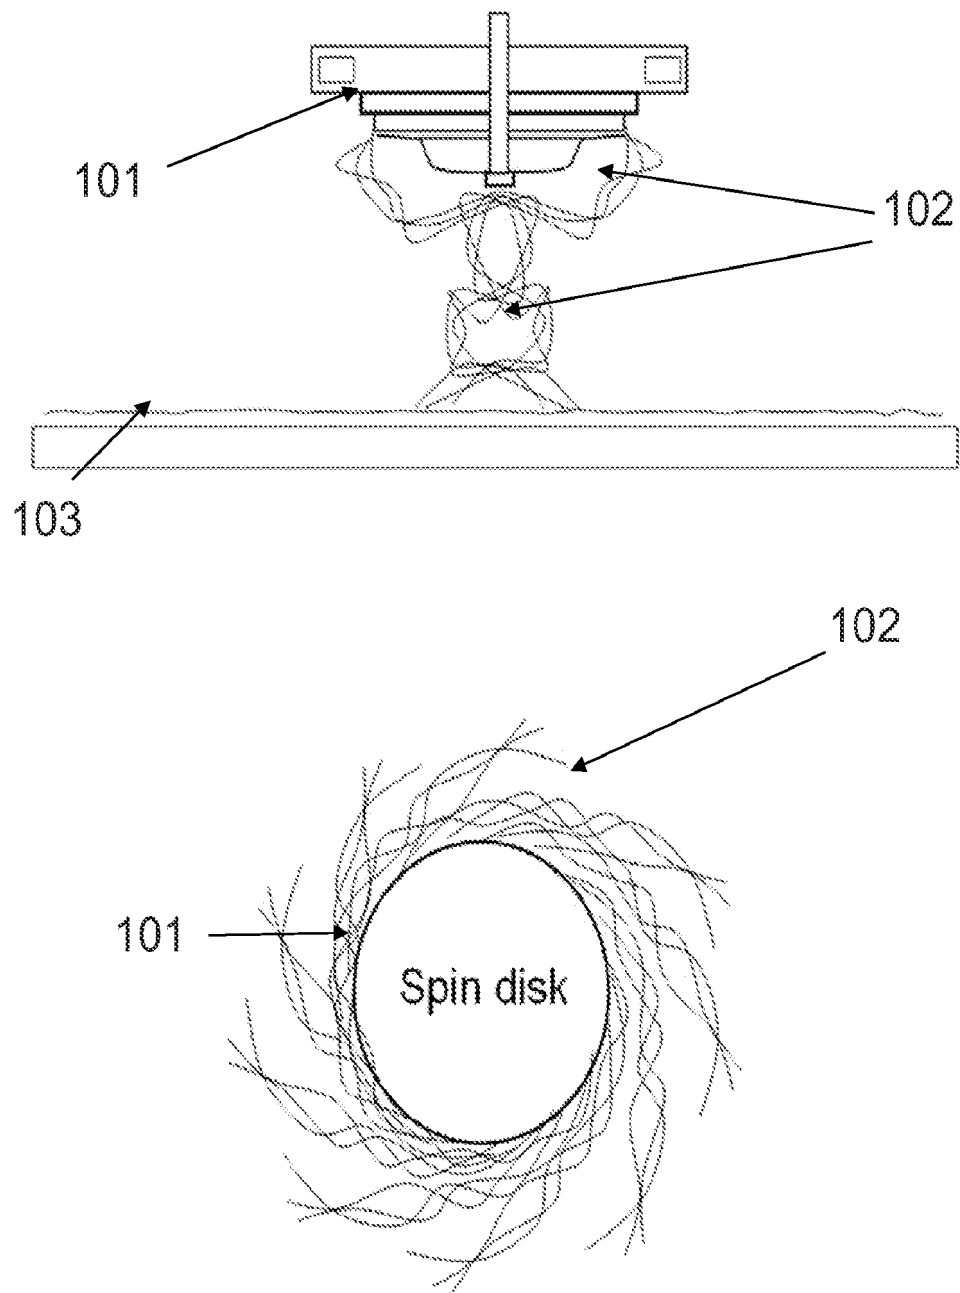


Fig. 1

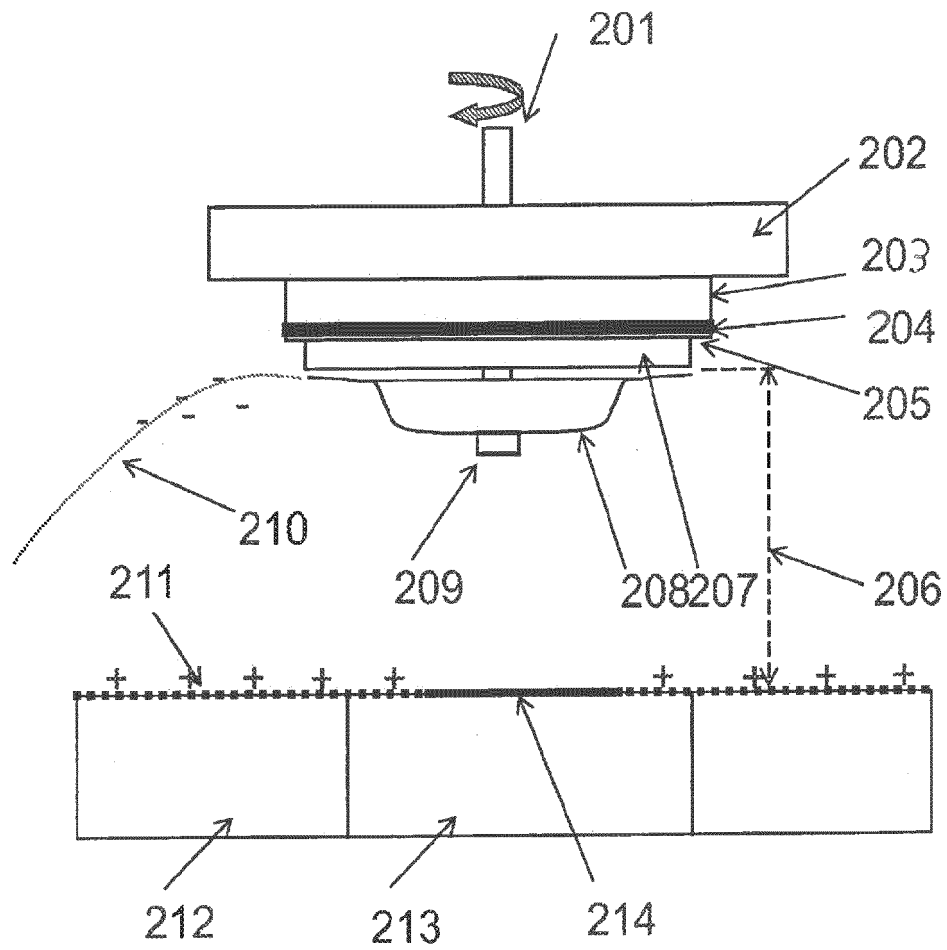


Fig.2

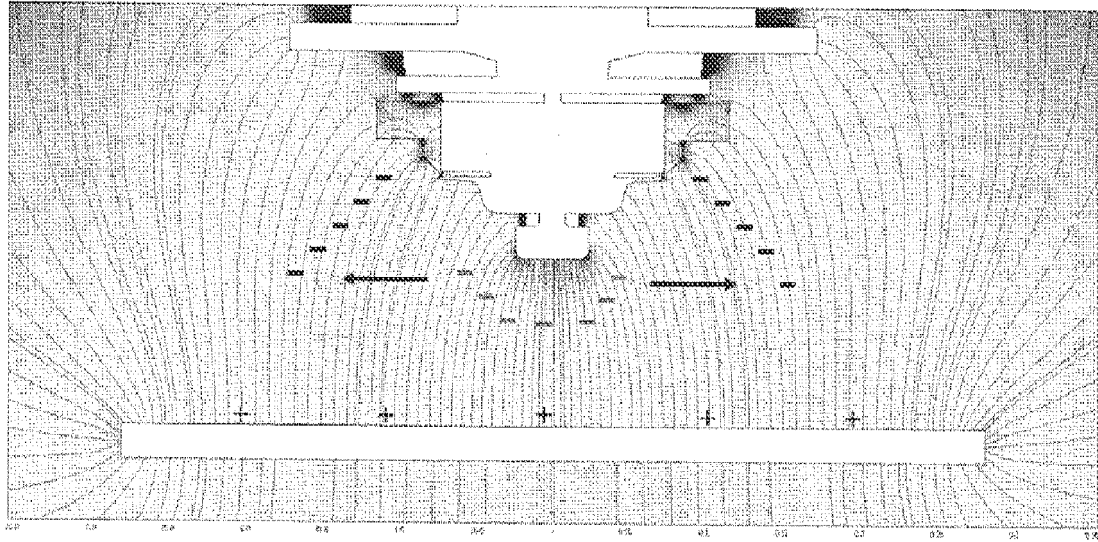


Fig.3

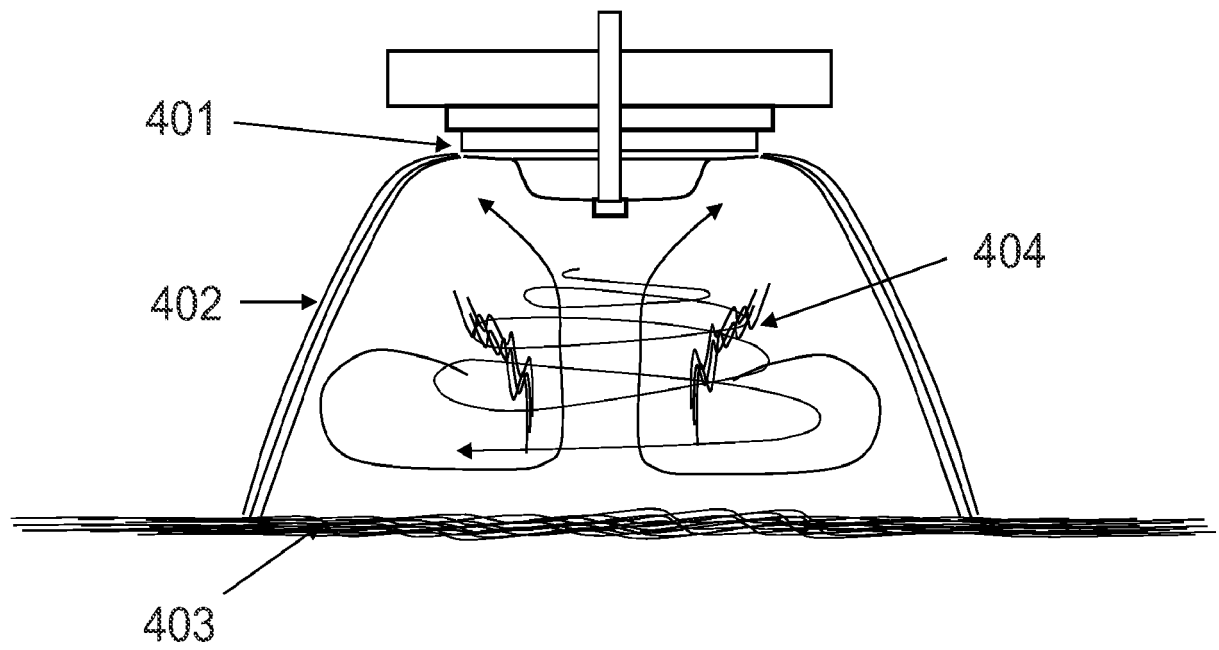


Fig. 4

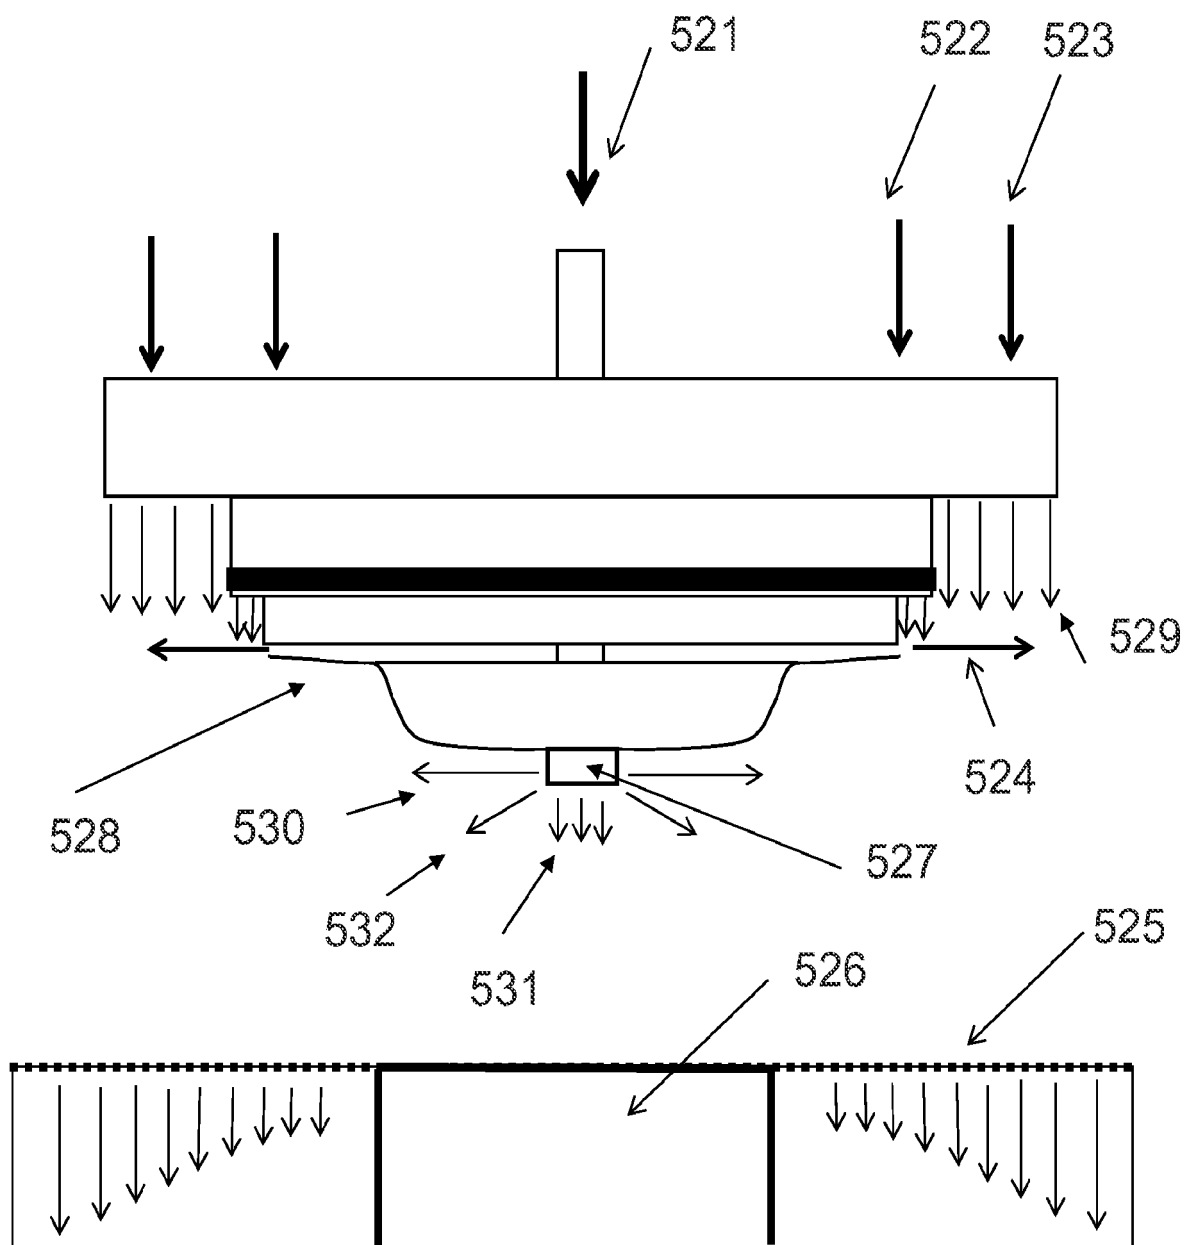


Fig.5

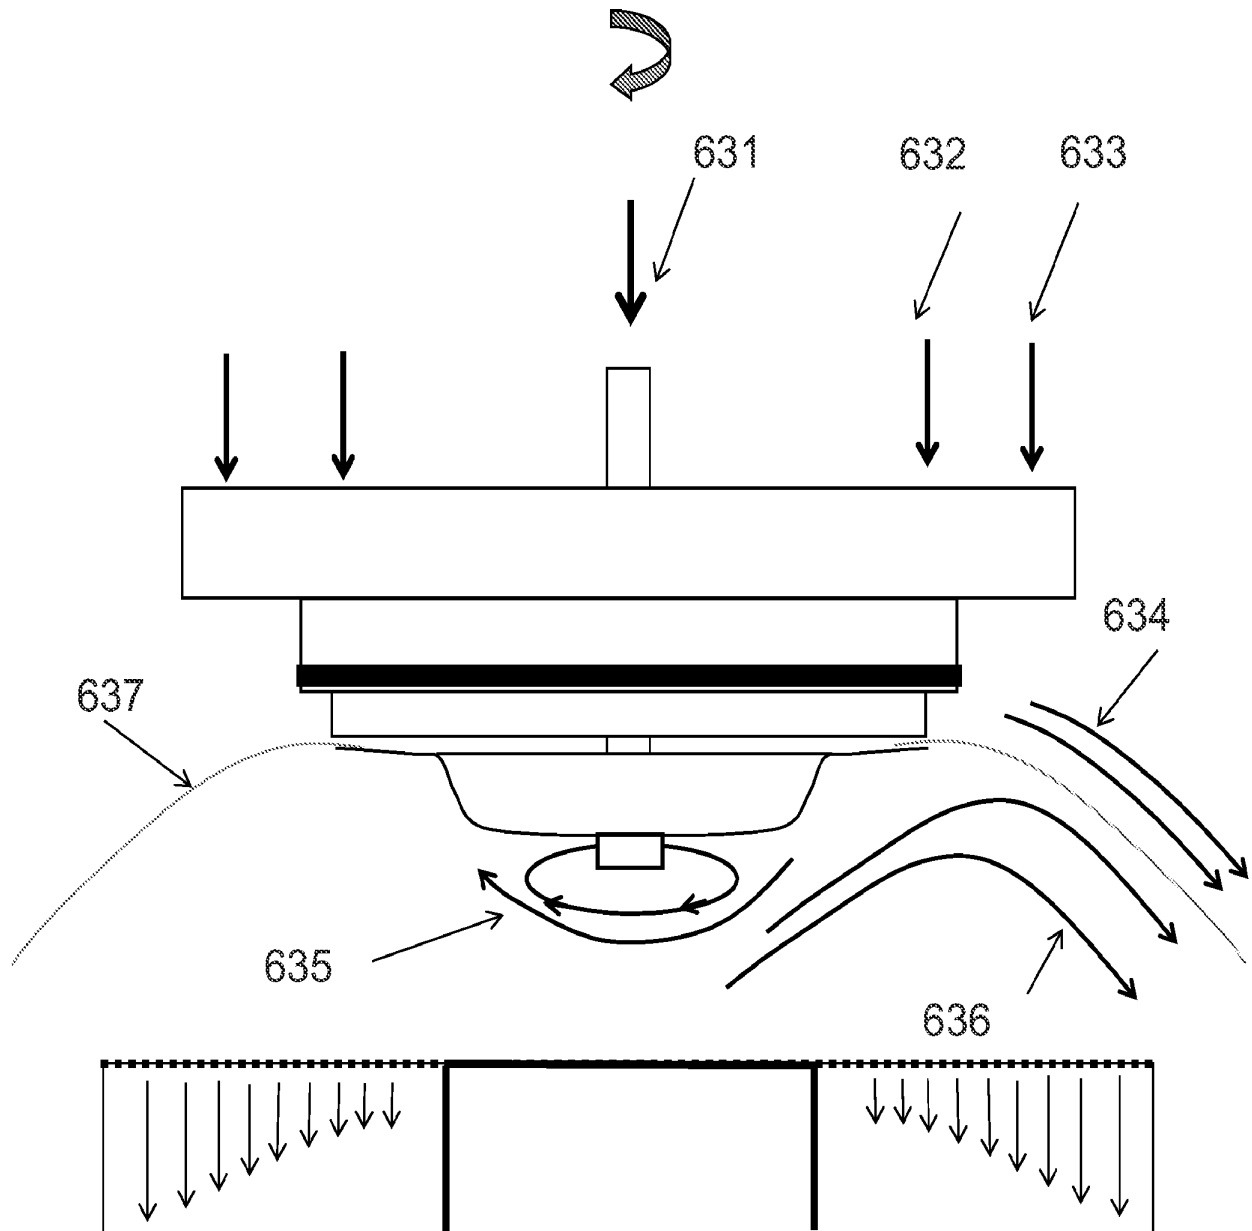


Fig.6

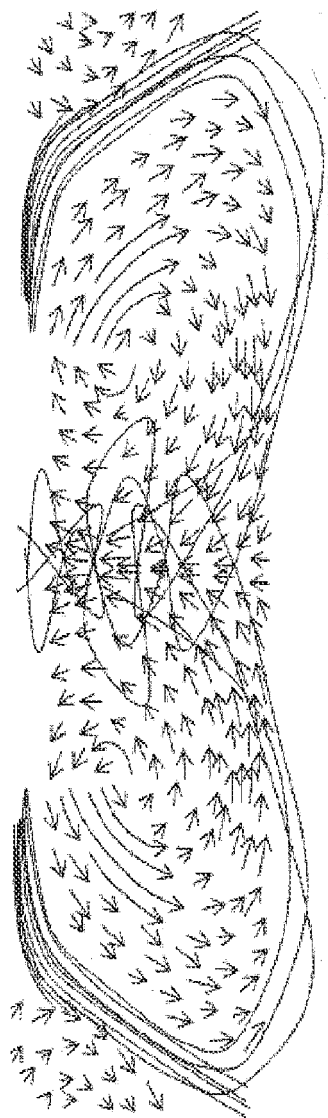


FIG. 7A

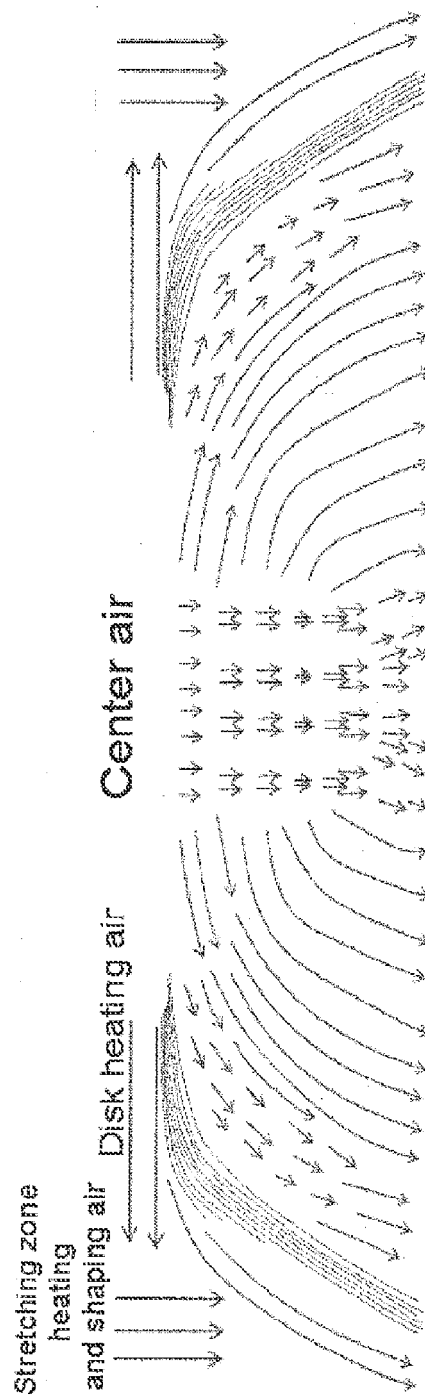


FIG. 7B

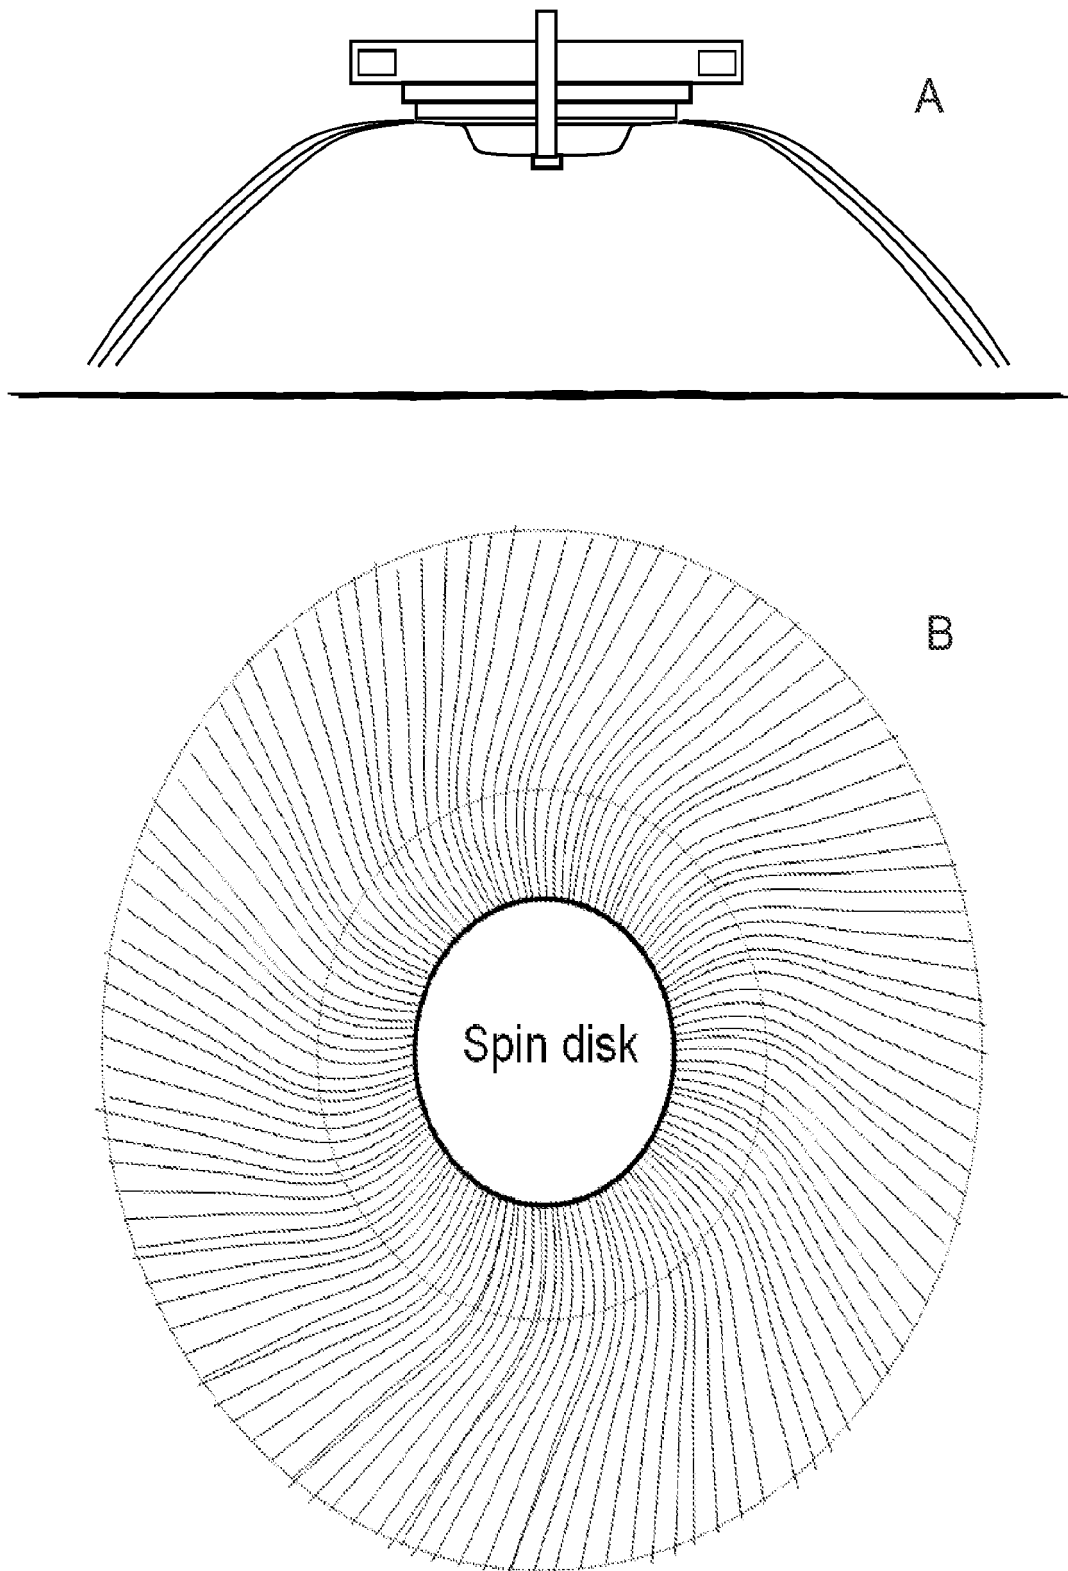


Fig. 8

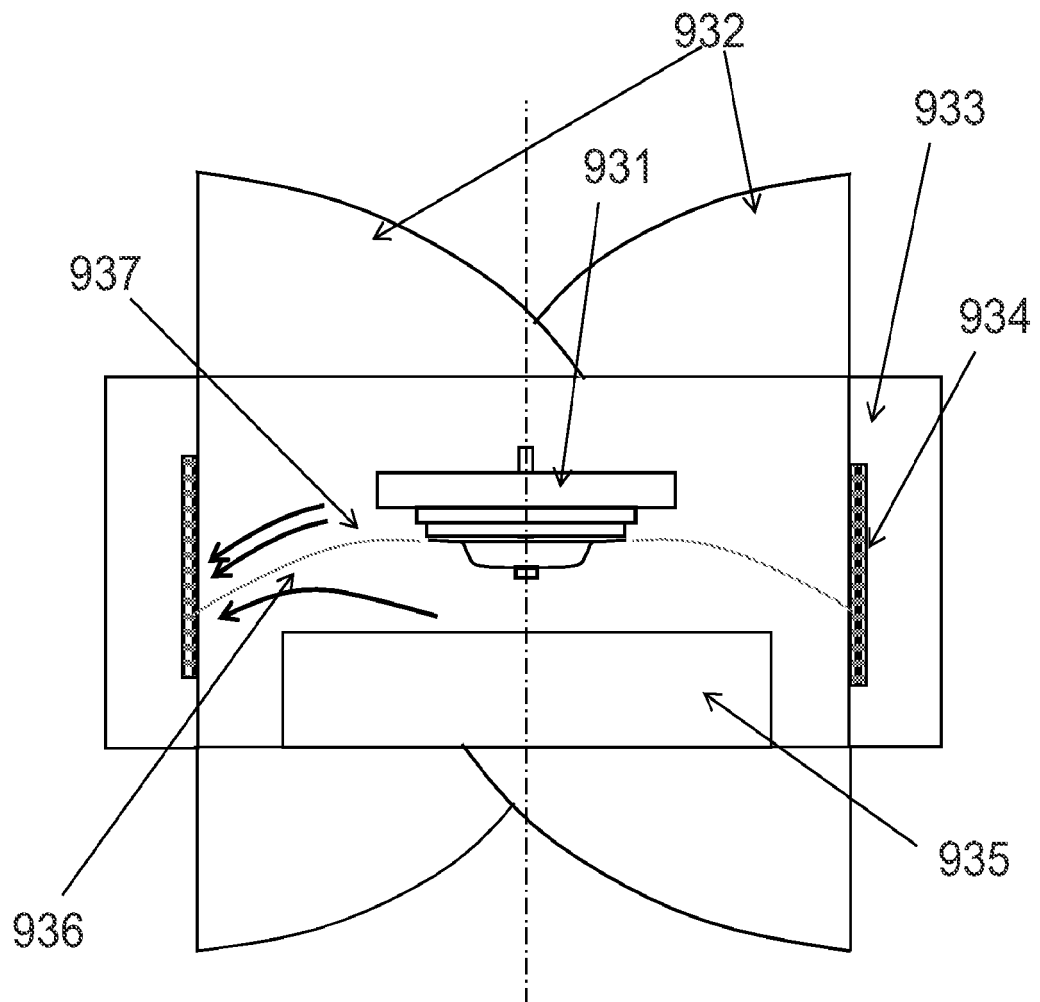


Fig.9

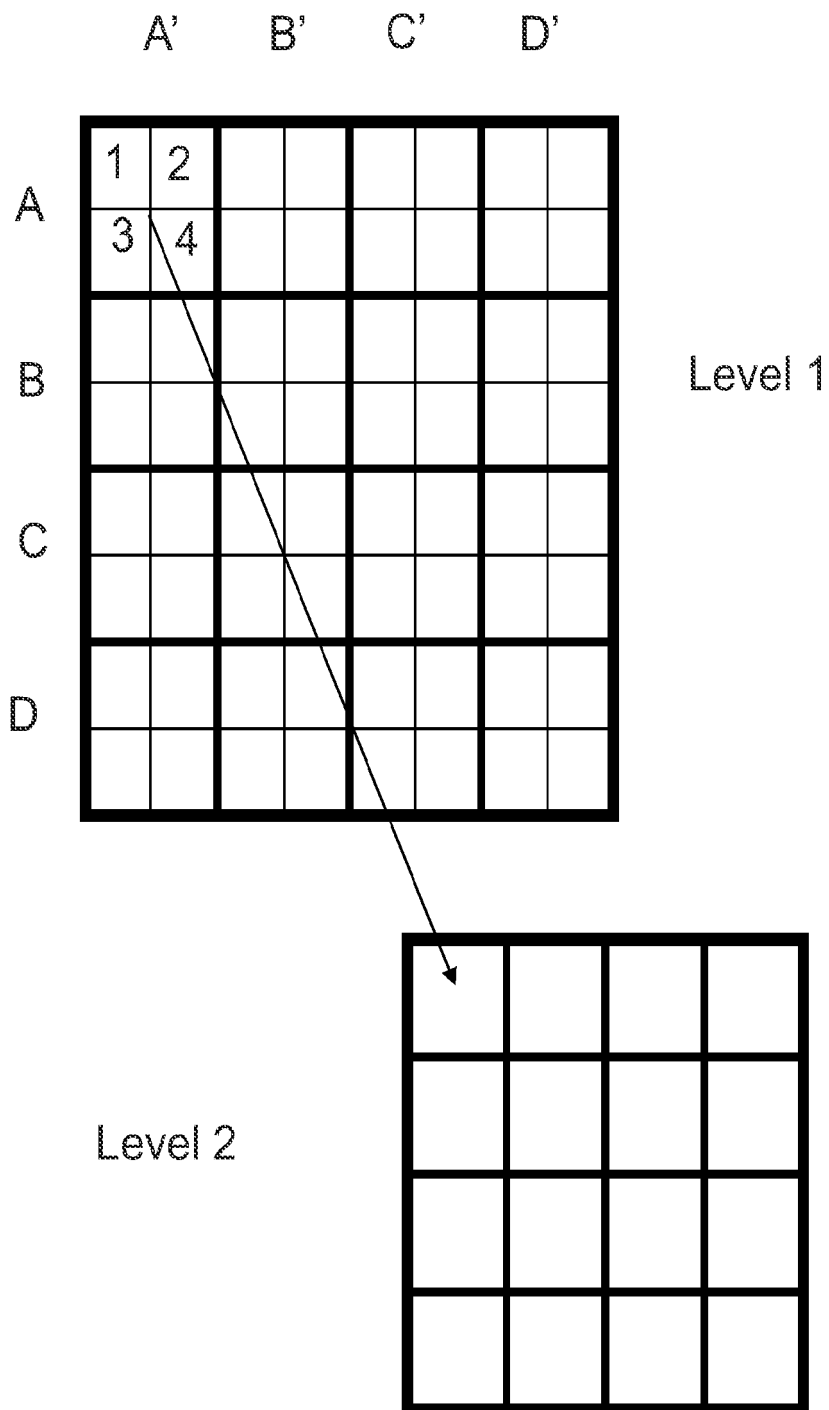


Fig. 10

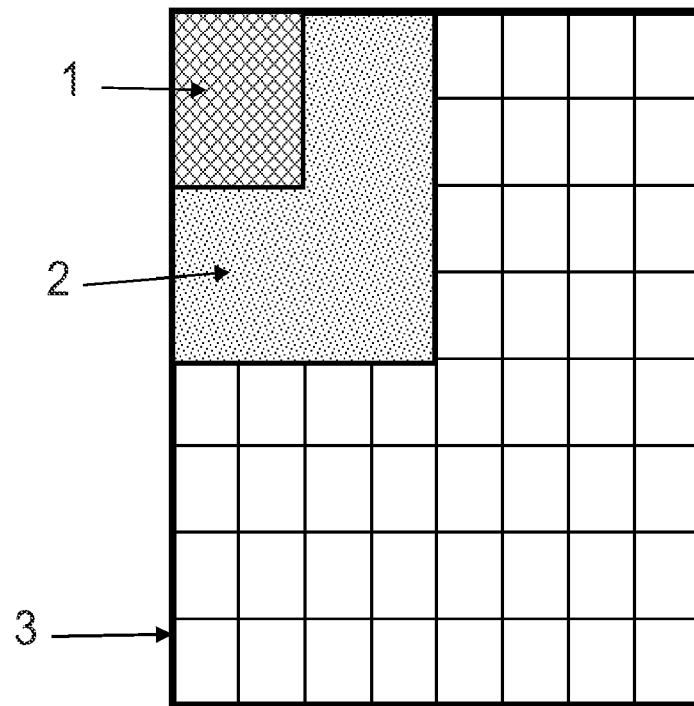


Fig. 11

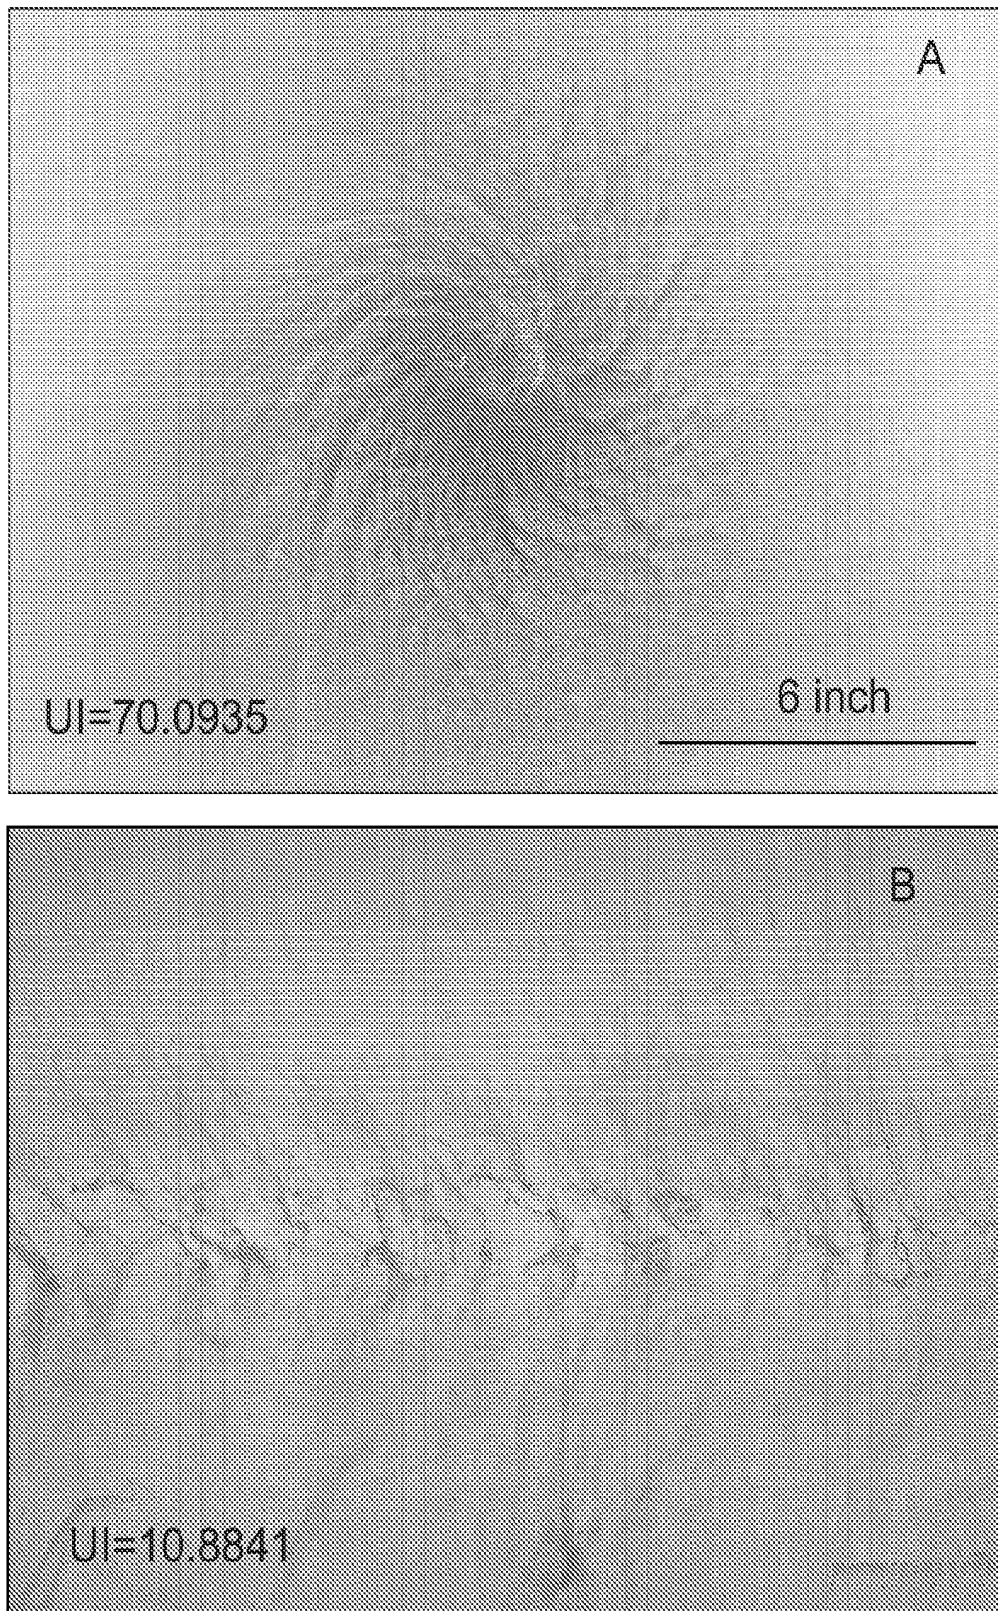


Fig. 12

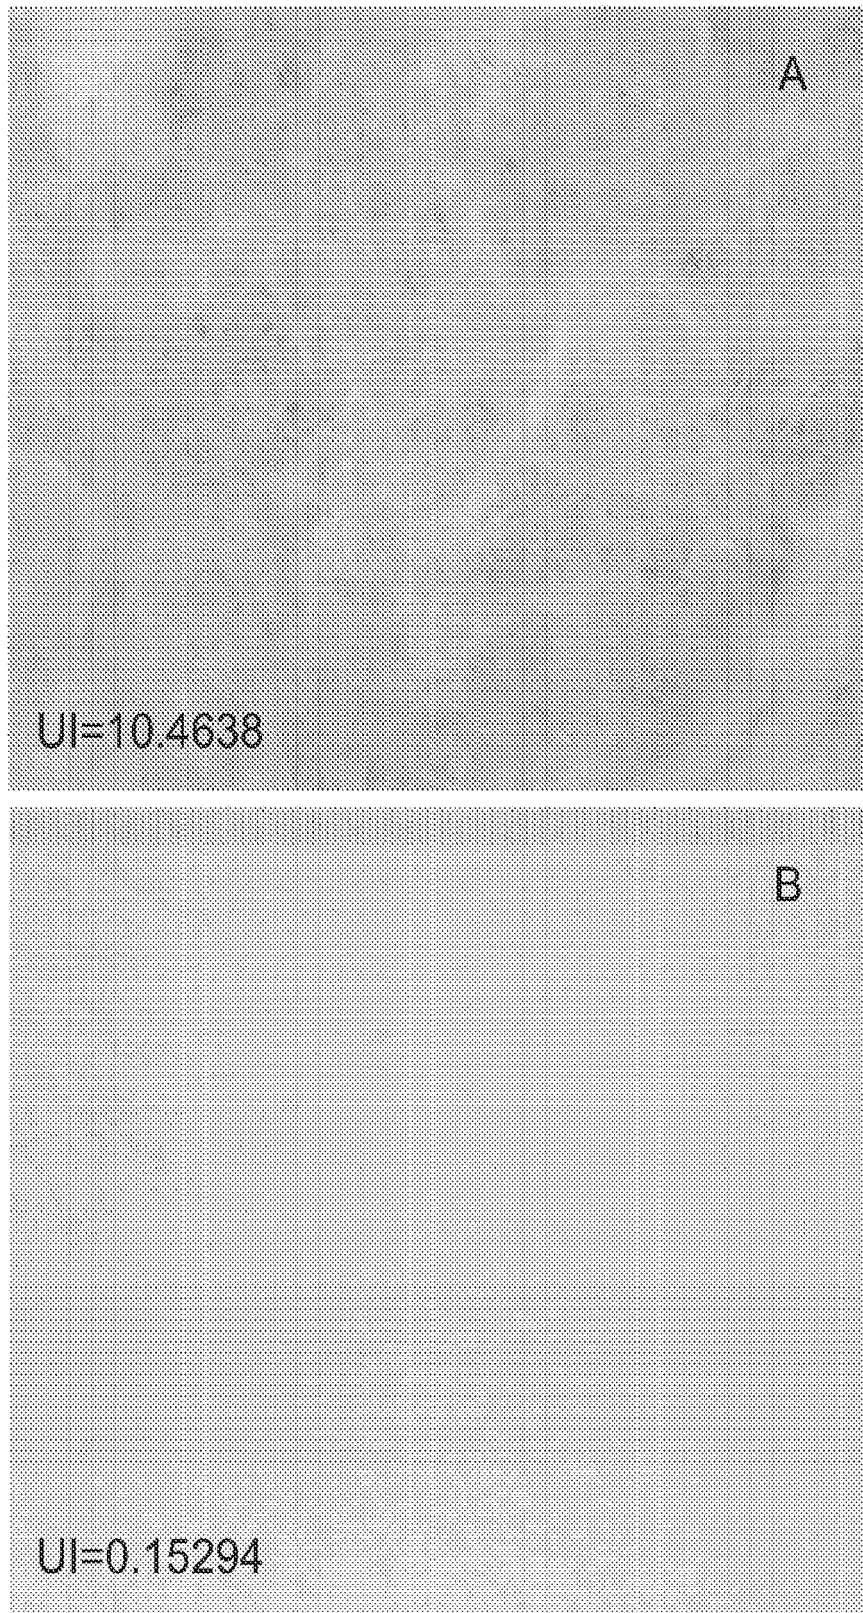


Fig. 13

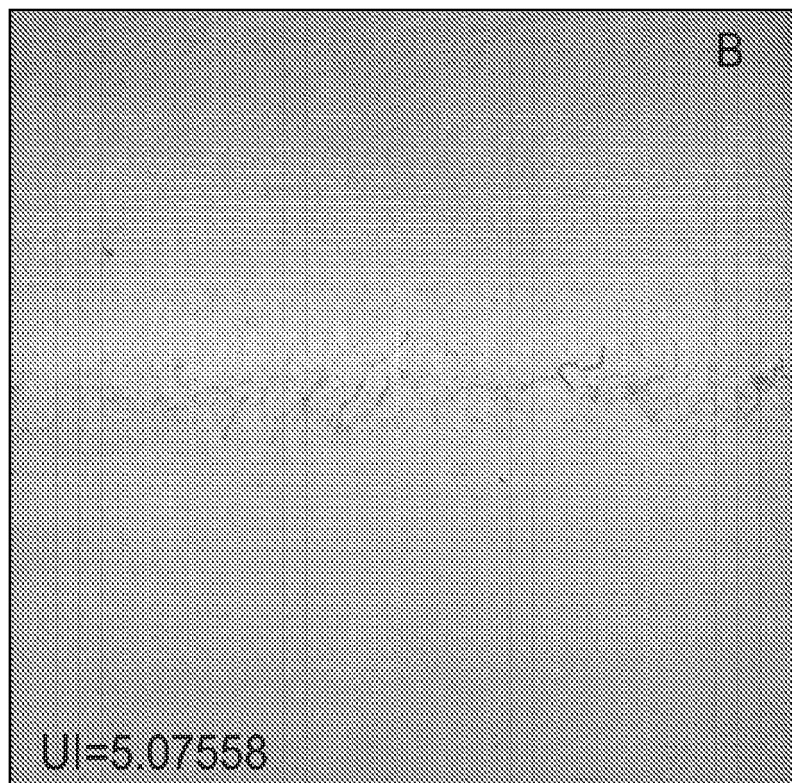
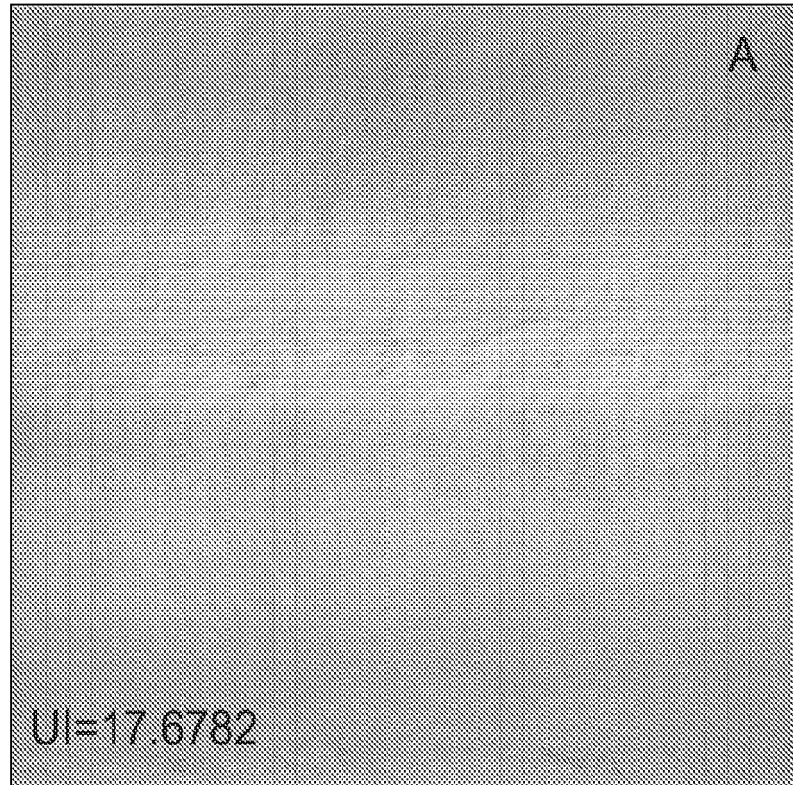


Fig. 14

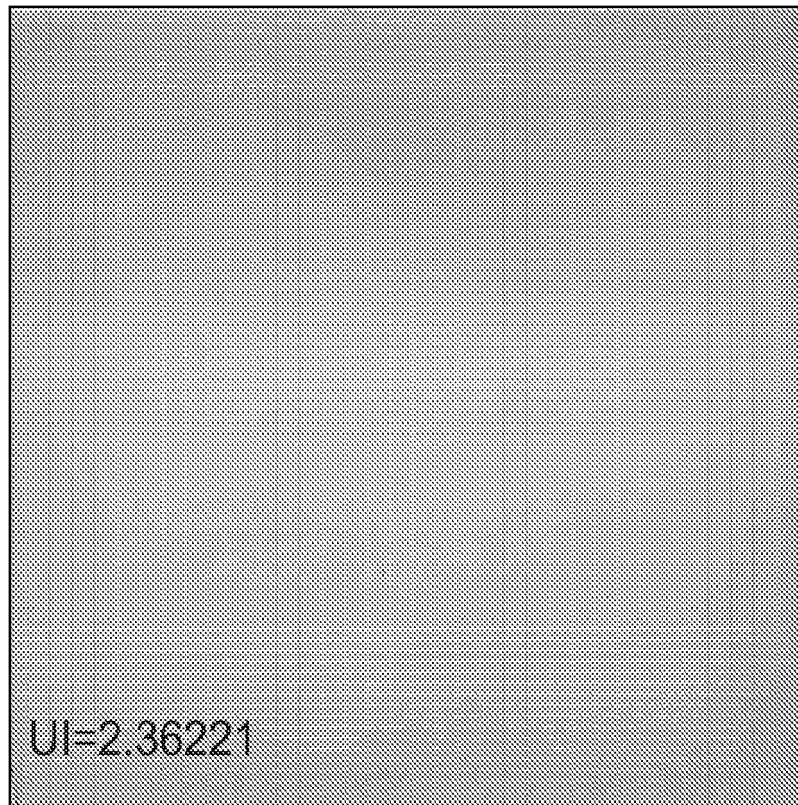


Fig. 15

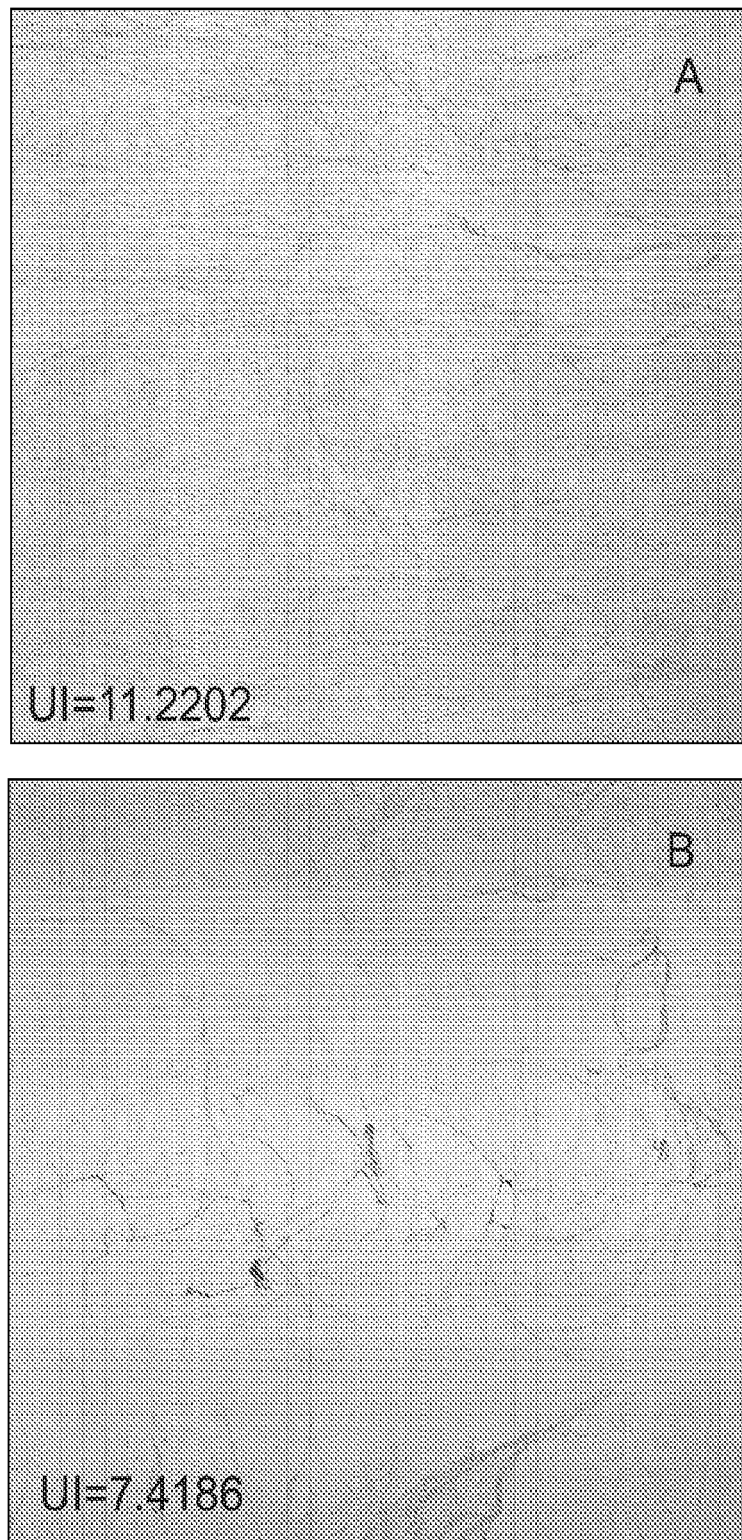


Fig. 16



Fig. 17

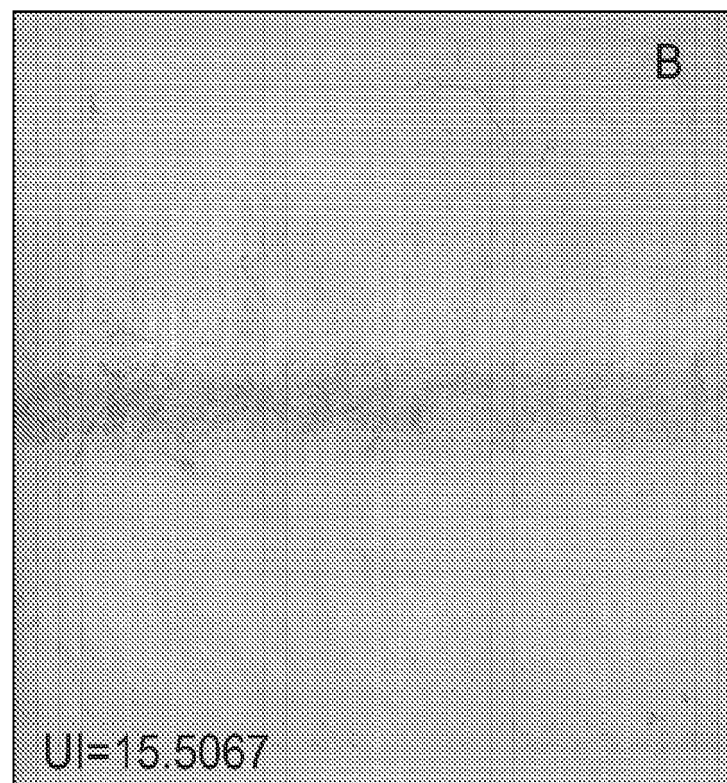
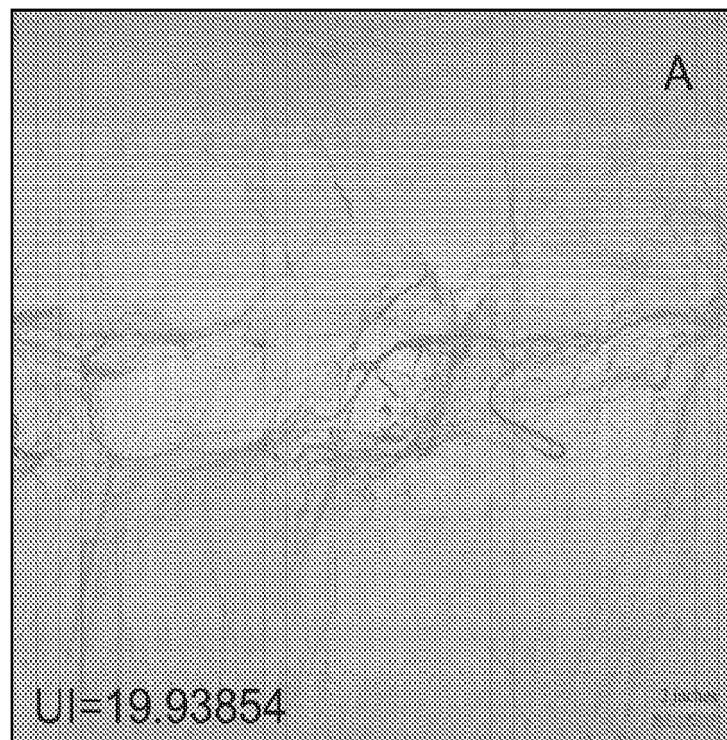


Fig. 18

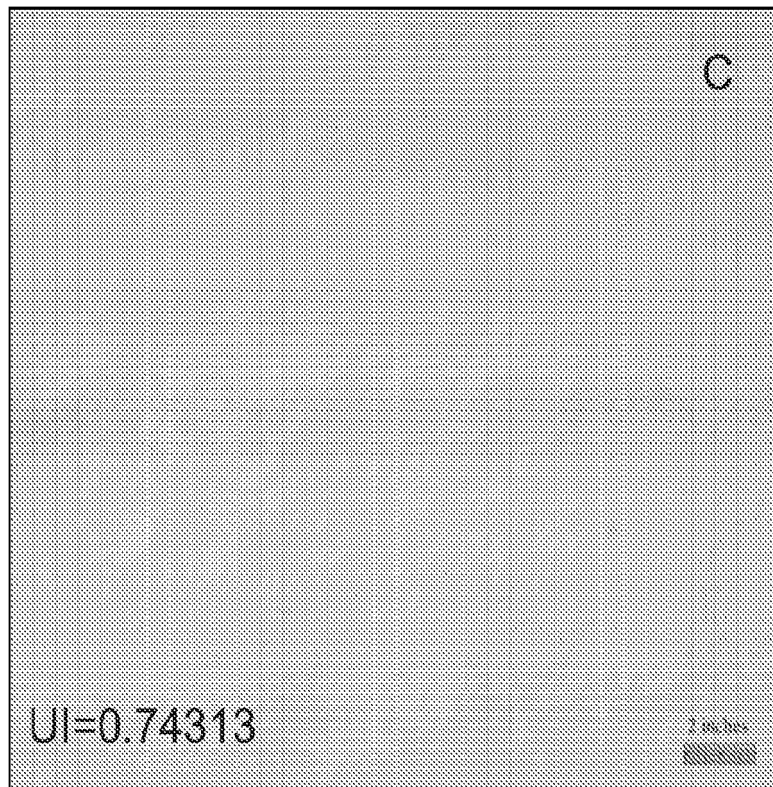


Fig. 19

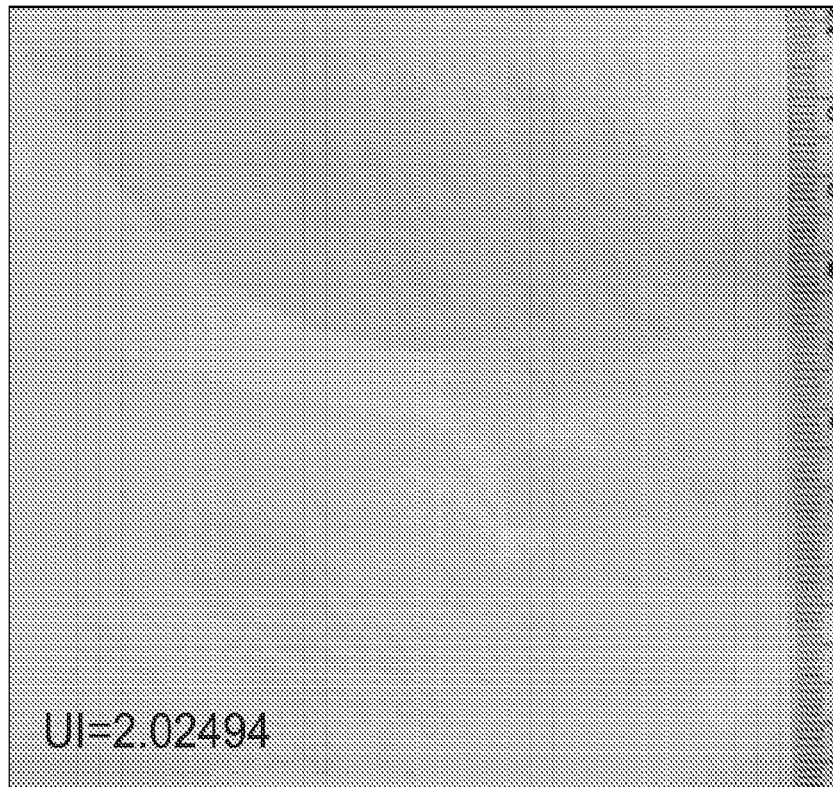


Fig. 20

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 3097085 A [0002]
- US 2587710 A [0002]
- US 8277711 B [0002] [0021]
- US 20080242171 A1 [0002]
- KR 100780346 B1 [0002]
- US 20100072674 A1 [0003]
- WO 2009055413 A1 [0004]