



(51) International Patent Classification:

G08B 13/196 (2006.01) H04N 7/18 (2006.01)
G03B 17/00 (2006.01)

(21) International Application Number:

PCT/US2014/012906

(22) International Filing Date:

24 January 2014 (24.01.2014)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/810,322 10 April 2013 (10.04.2013) US
13/944,142 17 July 2013 (17.07.2013) US

(71) Applicant: **SENSORMATIC ELECTRONICS, LLC**
[US/US]; 1501 Yamato Road, Boca Raton, Florida 33431 (US).

(72) Inventors: **DEJESUS, Carlos E.**; 9645 Cobblestone Creek Drive, Boynton Beach, Florida 33472 (US).
MCBRIDE, Frederick Michael; 3, Aberfoyle Park, Belfast BT10 ODY (GB).

(74) Agent: **HOUSTON, Grant, J.**; Houston & Associates, LLP, 1666 Massachusetts Avenue, Suite 12, Lexington, MA 02420 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: INDOOR BUBBLE ADAPTER

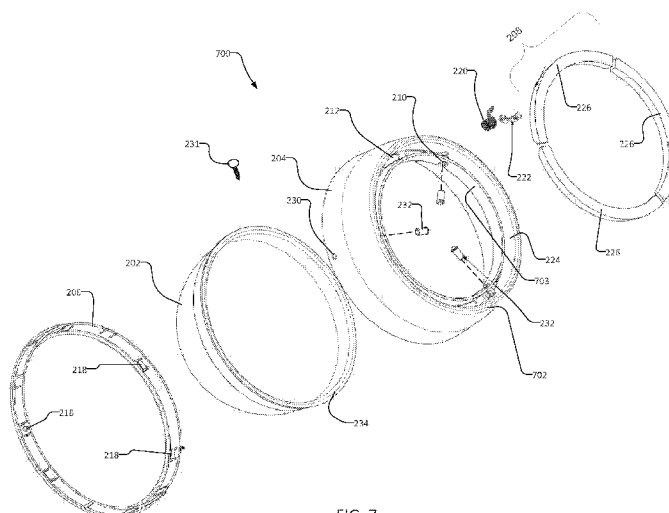


FIG. 7

(57) Abstract: A bubble adapter for installed security cameras, such as Pan/Tilt/Zoom ("PTZ") security cameras fits over the head of the PTZ camera, and attaches to a mounting region of a base of the security camera via a field-deployable attachment mechanism. The bubble of the bubble adapter protects and conceals the head of the PTZ camera and its components. Using the bubble adapter, service personnel add bubbles to existing PTZ camera installations that are lacking bubbles in the field. This avoids the expense and downtime associated with the current method for adding bubbles to PTZ camera installations lacking bubbles. The current method requires removing the installed PTZ cameras, and replacing them with PTZ cameras having factory-installed bubbles. In addition, the bubble adapter provides an integrated airflow system that allows the security camera to maintain thermal control when the bubble adapter is attached to the security cameras.

INDOOR BUBBLE ADAPTER

RELATED APPLICATIONS

[0001] This application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Application No. 61/810,322, filed on April 10, 2013, and claims priority to U.S. Patent Application Number 13/944,142, filed on July 17, 2013, both of which are incorporated herein by reference in their entirety.

BACKGROUND OF THE INVENTION

[0002] Security cameras, such as pan/tilt/zoom ("PTZ") video cameras, are an integral part of security solutions for protecting people, premises, and reducing risk. Within a premises or building, business owners install PTZ cameras at egress points, at the point of sale, and in other locations that require monitoring and tracking of people, goods and services. Another common application is at casinos. The PTZ video cameras are used to monitor employees and players.

[0003] PTZ cameras typically include a base region or portion that mounts to a surface such as a wall or ceiling or mounting bracket within the premises. PTZ cameras also mount in a recessed fashion within ceilings similar to recessed lighting. The base of the PTZ cameras typically includes the majority of non-moving components such as electronics and motors for powering and controlling the camera, network and video interfaces, and cooling fans for thermal considerations.

[0004] The PTZ cameras also typically include a head with a panning portion that turns left and right with respect to the base region, and a tilting portion that rotates up and down with respect to the base region. The cameras' optical components are typically housed within the tilting portion.

[0005] Manufacturers of PTZ cameras offer different options that enhance the capabilities and utility of the cameras. The manufacturers require that the customer order some of the options at the time of purchase, and not as an "add-on" option or accessory after purchase and delivery of the PTZ camera. This is because these options require the manufacturers to design and assemble the PTZ cameras and the options in a specific fashion, requiring quality controls and procedures that only the manufacturers provide. The

manufacturers require these controls to assure proper operation of the cameras, to address safety and design concerns, and to maintain warranty status.

[0006] One of the options that customers purchase is a dome or bubble that covers the cameras. Bubbles not only provide extra protection of the cameras and lenses, but also conceal the visual behavior of the moving portions of the cameras, and the presence of the camera itself within a room.

[0007] Bubbles for interior PTZ cameras are important in establishments such as casinos. Security personnel at casinos seek to minimize awareness of the cameras by their patrons. Bubbles with a dark or “smoked” appearance also conceal the otherwise visible panning and tilting operations of the cameras, which prevents patrons from seeing the direction the cameras are pointing.

SUMMARY OF THE INVENTION

[0008] Manufacturers of current PTZ cameras offer bubbles as a factory-installed option. The bubbles are a permanent part of the PTZ camera assemblies, and normally cannot be removed. A major reason for this is because PTZ cameras require built-in fans for cooling the cameras, and the bubbles must be designed for and integrated with the cameras’ thermal design characteristics. As a result, an attempted retrofit to an existing PTZ camera installation might restrict or compromise the airflow to the camera, causing overheating or damage to the camera and its components.

[0009] This creates a problem for customers with an installed base of PTZ cameras that wish to add a bubble to the cameras. Customers must remove the cameras from the walls and ceilings, and return them to the manufacturer for factory-installed bubble upgrades, or purchase new replacement cameras that include the integrated bubbles.

[0010] Both options are expensive and require significant labor. Moreover, the downtime created by removing and replacing the cameras compromises the security of the premises that the cameras were purchased to protect.

[0011] The invention provides a field-upgradeable bubble adapter for existing indoor PTZ camera installations lacking bubbles. The bubble adapter is secured to a mounting region of the base of the existing PTZ cameras.

[0012] The bubble adapter has airflow characteristics that seamlessly integrate with the airflow design and characteristics of the PTZ cameras. These features enable customers and field service personnel to install the bubble adapters to an in situ PTZ camera installation within the customer premises.

[0013] In addition, the invention provides manufacturers with the ability to sell bubble adapters separately from the security cameras to which they attach. Customers order and attach the bubble adapters to their existing cameras on an "as-needed" basis. This reduces the need for customers to have a priori knowledge of how many cameras, with and without bubbles, are required for a security installation.

[0014] In general, according to one aspect, the invention features a security camera system comprising a Pan/Tilt/Zoom ("PTZ") head of a security camera, a base of the security camera on which the PTZ head is held, the base comprising a mounting region, and a bubble adapter that fits over the PTZ head. The bubble adapter includes a housing that attaches to the base at the mounting region via a field-deployable attachment mechanism, and a bubble attached to the housing that encloses the PTZ head.

[0015] In one example, the field-deployable attachment mechanism comprises an interference fit system. In a preferred embodiment, the interference fit system comprises spring plungers disposed in pockets within the housing of the bubble adapter, and a detent in the mounting region of the base which accepts the spring plungers. Typically, the pockets within the housing extend radially outward from an inside surface of an outer rim of the housing.

[0016] According to another example, the field-deployable attachment mechanism comprises a set screw system. Using a set screw, an installer tightens the set screw within a set screw hole in the housing to secure the housing to the base of the security camera.

[0017] According to another aspect, the housing includes an air intake channel formed within the housing that includes air intake openings that accept air from outside the housing to enable airflow into the security camera. The air intake channel accepts an air filter placed before the air intake openings. Preferably, the air intake openings of the housing provide the airflow for air inlets of the PTZ head of the security camera for cooling the security camera.

[0018] According to yet another aspect, the base of the security camera includes one or more fans which draw the airflow provided by the air intake openings of the housing into air inlets of the PTZ head of the security camera to cool the security camera, and air exhaust openings which allow the airflow to exit the security camera.

[0019] In another implementation, the housing accepts a trim ring that secures a lip of the bubble to the housing for fastening the bubble to the housing. Preferably, the trim ring fastens the bubble to the housing using an interference fit. In yet another implementation, the housing further comprises a tamper resistant bracket which discourages tampering of the bubble adapter by unauthorized personnel.

[0020] In another embodiment, the housing comprises a cover ring that mounts to the air intake channel, which conceals the base of the security camera after the housing is attached to the base of the security camera. Preferably, the cover ring includes a safety lanyard that fastens to the base of the security camera, which protects the bubble adapter from dropping during attachment and removal.

[0021] According to yet another aspect, the bubble has a smoked appearance which provides the concealment of the security camera and its components.

[0022] In general, according to another aspect, the invention features a bubble adapter for an installed security camera comprising a housing that attaches to the security camera. The housing includes an airflow system that allows airflow to the security camera for thermal control when the housing is attached to the security camera. In addition, the housing includes a bubble fastened to the housing that encloses at least a head of the security camera for protecting and concealing the security camera.

[0023] According to another aspect, the bubble adapter further comprises an interference fit system for securing the bubble adapter to the security camera. In the preferred embodiment, the interference fit comprises spring plungers disposed in pockets within the housing of the bubble adapter, and a detent in the mounting region of a base of the security camera which accepts the spring plungers.

[0024] According to another embodiment, the bubble adapter comprises a set screw system for securing the bubble adapter to the security camera.

[0025] According to yet another aspect, the housing includes an air intake channel formed within the housing that includes air intake openings that accept air from outside the housing to enable the airflow to the security camera.

[0026] In general, according to yet another aspect, the invention features a method for upgrading an installed security camera in the field to have a bubble. The method comprises placing a bubble adapter over a head of the security camera, pushing the bubble adapter towards a mounting region of a base of the security camera on which the head is held, and attaching the bubble adapter to the base at the mounting region via a field deployable attachment mechanism.

[0027] The above and other features of the invention including various novel details of construction and combinations of parts, and other advantages, will now be more particularly described with reference to the accompanying drawings and pointed out in the claims. It will be understood that the particular method and device embodying the invention are shown by way of illustration and not as a limitation of the invention. The principles and features of this invention may be employed in various and numerous embodiments without departing from the scope of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] In the accompanying drawings, reference characters refer to the same parts throughout the different views. The drawings are not necessarily to scale; emphasis has instead been placed upon illustrating the principles of the invention. Of the drawings:

[0029] Fig. 1 is a schematic diagram showing a room with pan/tilt/zoom ("PTZ") cameras installed with different mounting configurations, wherein the PTZ cameras accept the inventive bubble adapter;

[0030] Fig. 2 is a scale plan view of a PTZ camera that accepts the bubble adapter, according to the invention, and further illustrating the basic portions and movement of the PTZ camera;

[0031] Fig. 3 is a perspective scale view of a preferred embodiment of the bubble adapter;

[0032] Fig. 4 is a scale cross-sectional view of the bubble adapter secured to the PTZ camera showing the airflow through the bubble adapter and PTZ camera assembly for cooling the PTZ camera;

[0033] Fig. 5 is a cross-sectional view of the bubble adapter;

[0034] Fig. 6 is a top view of the bubble adapter;

[0035] Fig. 7 is a partially-exploded view of the bubble adapter showing its components;

[0036] Fig. 8 is a partially-exploded view of another embodiment of the bubble adapter showing its components, which includes a cover ring;

[0037] Fig. 9 is a cross-sectional view of the bubble adapter for the embodiment shown in Fig. 8; and

[0038] Fig. 10 provides a method for installing a bubble adapter to an existing security camera in the field that currently lacks a bubble.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0039] Fig. 1 displays an exemplary room 100 with PTZ cameras 102 installed in different configurations for security monitoring of the room 100 and the individuals 110 in the room 100. The PTZ cameras 102 are not equipped with factory-installed bubbles 202. The example room 100 is part of a retail or gaming (casino) establishment where an employee 110-3 interacts with customers 110-1 and 110-2 at a point of sale terminal or game console 112, in specific examples.

[0040] PTZ cameras 102-1 and 102-2 are mounted to ceiling 120 above the point of sale terminal or game console 112. PTZ camera 102-3 is mounted to wall 122 via wall bracket 106. The wall bracket 106 effectively moves the field of view for PTZ camera 102-3 beyond objects in the room 100 that would otherwise obstruct the field of view of the PTZ camera 102-3. Objects that obstruct the field of view of the PTZ cameras 102 include furniture such as cabinet 108.

[0041] Bubble adapters 104 attach to the installed PTZ cameras 102 within the room 100. The bubble adapters 104 secure to the PTZ cameras 102 as a field-upgradeable solution in the preferred embodiment.

[0042] When field service personnel secure the bubble adapters 104 to the PTZ cameras 102, there is no need to remove the installed PTZ cameras 102 or adjust their mountings in the illustrated embodiment. In addition, no modifications to the PTZ cameras 102 are required. The bubble adapters 104 utilize a field-deployable attachment mechanism such as an interference fit with the installed PTZ cameras 102, while also enabling proper airflow and cooling to the PTZ camera 102 and its internal components in the embodiments disclosed herein.

[0043] Fig. 2 shows the PTZ camera 102 according to one implementation. The PTZ camera 102 includes a base 512, a PTZ head 514 that moves about the pan axis 520 of the base 512 according to arrow 560, and a tilting region 562 that moves with respect to the pan axis 520 according to arrow 562. The tilting region 516 is included within the PTZ head 514 and moves independently of the PTZ head 514.

[0044] The camera lens 610 is included within the tilting region 516, which captures video images of the room 100 and provides the ability to zoom in and out of features of interest within the room 100 in one implementation. As a result, the PTZ camera 102 provides independent panning, zooming, and tilting of the field of view of the PTZ camera 102 in accordance with the security objectives of the operator.

[0045] The base 512 includes power and data cabling interfaces, electronics, fans for cooling, and control systems and motors for controlling the pan, tilt, and zoom features of the PTZ cameras 102. Field service personnel secure the PTZ cameras 102 to surfaces such as walls 122, ceilings 120, or wall brackets 122 via screw holes provided in the underside 564 of the base 512. The base 512 also includes air exhaust openings 508, and a mounting region 515.

[0046] The illustrated PTZ camera 102 requires active cooling throughout its internal components in accordance with thermal design requirements. As a result, the PTZ camera 102 has integrated cooling paths and channels to provide airflow to its internal components. Air enters the PTZ camera 102 through air inlets 510 in the tilting region 516,

from the camera side 566 of the PTZ camera 102. Cooling fans within the base 512 draw outside air through the air inlets 510. The air drawn in from the air inlets 510 flows across the internal components of the PTZ camera 102, cooling the components in the process. The air then exits the PTZ camera 102 via the air exhaust openings 508 of the base 512.

[0047] The mounting region 515 of the base 512 also includes a recessed channel or detent 604 that encircles the base 512, orthogonal to the pan axis 520.

[0048] Fig. 3 show a perspective scale view of the bubble adapter 104 that shows additional detail of its components. In one embodiment, the bubble adapter 104 has a transparent or translucent bubble 202 that attaches to housing 204. Spring plungers 232 fastened to pockets 210 within the housing 204 provide an interference fit between the housing 204 and the detent 604 of the base 512 of the PTZ camera 102. The spring plungers 232 are spring-loaded, and are normally in a fully-released or "at rest" position.

[0049] The pockets 210 are openings in the housing 204 that accept the spring plungers 232. The pockets 210 extend radially out from the inside of the outer rim 702 of the housing 204, through an air intake channel 224 of the housing 204, and to the inner rim 703. The spring plungers 232 seat within the pockets 210, such that the surfaces of the spring plungers 232 extend slightly beyond the edge of the inner rim 703 of the housing 204 when the spring plungers 232 are at rest.

[0050] The air intake channel 224 encircles the housing 204. The air intake channel 204 preferably is recessed with respect to the inner rim 703 and the outer rim 702 of the housing 204. The air intake channel 224 accepts a replaceable air filter 208 that preferably press-fits within the air intake channel 224. The air intake channel 224 has Fig. 6 air intake openings 212 for drawing air into the bubble adapter 104, and down toward the air inlets 510 of the PTZ camera 102. The air intake openings 212 cannot be seen in Fig. 3 because the air filter 208 is installed and blocks the view of the air intake openings 212.

[0051] The spring plungers 232 secure the bubble adapter 104 to the detent 604 of the PTZ camera 102. When the installer pushes the bubble adapter 104 down over the PTZ head 514 towards the base 512 of the PTZ camera 102, the spring plungers 232 initially compress when they come in contact with the base 512. The spring plungers 232 compress inward towards the outer rim 702 of the housing 204.

[0052] When the installer continues to push the bubble adapter 104 further onto the mounting region 515 of the base 512, the spring plungers 232 release their tension when the spring plungers 232 encounter the detent 604 within the mounting region 515. As a result, the bubble adapter 104 is secured to the PTZ camera 102.

[0053] The surfaces of the spring plungers 232 are preferably spherical, allowing the spring plungers 232 to "snap" in and out of place within the detent 604 in response to adjustment of the bubble adapter 104 about the base 512 of the PTZ camera 102 by the installer. Because the detent 604 encircles the entirety of the base 512, the installation of the bubble adapter 104 to the PTZ camera 102 does not require special alignment considerations between the bubble adapter 104 and the PTZ camera 102. Moreover, once the bubble adapter 104 is installed, the action of the spring plungers 232 allow installers to easily detach and reattach the bubble adapter 104 from the base 512 without the aid of tools, in one example.

[0054] In one implementation, the housing 204 has three spring plungers 232, the pockets 210 of which are equally spaced apart within the housing 204. This provides optimal load balancing of the bubble adapter 104 when connected to the PTZ camera 102. The housing 204 includes a safety lanyard 220 that the installer optionally fastens to the base 512 via a Fig. 8 thumb screw 804 during the installation of the bubble adapter 104.

[0055] The safety lanyard 220 prevents the bubble adapter 104 from dropping during installation, which protects the bubble adapter 104 from damage and the installer from potential injury during the installation process. The housing 204 also includes a tamper resistant bracket 222 to discourage patrons and non-security personnel from tampering with the bubble adapter 104.

[0056] Fig. 4 displays the airflow 502 through the combined bubble adapter 104 and PTZ camera 102 assembly for cooling the PTZ camera 102. The base 512 of the PTZ camera 102 is typically mounted to a ceiling 120. The combined bubble adapter 104 and PTZ camera 102 assembly is shown relative to the plane 513 of the ceiling 120. The integrated airflow design of the bubble adapter 104 enables cooling of the PTZ camera 102 when the bubble adapter 104 is attached to the PTZ camera 102. Preferably, the bubble 202

of the bubble adapter 104 attaches to the housing 204 via an interference fit provided by a trim ring 206.

[0057] Fans within the base 512 of the PTZ camera 102 draw outside air into the PTZ camera 102 via the air intake channel 224 of the housing 204. The airflow 502 passes through the air filter 208, and down the Fig. 6A air intake openings 212, which are obscured by the air filter 208 in Fig. 4. The airflow 502 is drawn up through the air inlets 510 of the PTZ camera 102, across the internal components (which are not shown for clarity) of the PTZ camera 102, and exits out through the air exhaust openings 508 of the base 512 of the PTZ camera 102.

[0058] Fig. 5 is a cross-sectional view 530 of the bubble adapter 104 that shows how the bubble 202 fastens to housing 204. The trim ring 206 slides over the lip 234 of the bubble 202. The trim ring 206 then fastens to the housing 204, which secures the lip 234 of the bubble 202 to the housing 204. To achieve this, the trim ring 206 has integrated tabs 218 that lock into place within tab openings 219 of the housing 204. This is illustrated in more detail in Fig. 6B. When the tabs 218 are fully seated within the tab openings 219, the bubble 202 is secured to the housing 204 of the bubble adapter 104.

[0059] The cross-sectional view 530 also provides a “head-on” view of spring plunger 232-1, and a side view of spring plunger 232-2 through the air intake channel 224.

[0060] Fig. 6 shows the top view 400 of the bubble adapter 104, which is the view when the bubble 202 is closest to the viewer. The air filter 208 is removed in this view to show the air intake openings 212 and the pockets 210 within the air intake channel 224 of the housing 204. The tabs 218 of the trim ring 206 are shown through the tab openings 219 of the housing 204. The tab openings 219 in the housing 204 accept the tabs 218 of the trim ring 206. The trim ring 206 slips around the lip 234 of the bubble 202. When the tabs 218 of the trim ring 206 are pushed to their full extent into the tab openings 219, the tabs 218 lock into place within the tab openings 219. This secures the trim ring 206 to the housing 204, and therefore, the bubble 202 to the housing 204.

[0061] Fig. 7 is a partially-exploded view 700 of the bubble adapter 104. The trim ring 206 slips over the lip 234 of the bubble 202. When the tabs 218 of the trim ring 206

are fully seated within the Fig. 6A and Fig. 6B tab openings 219, the bubble 202 is securely fastened to the housing 204.

[0062] The partially-exploded view 700 provides more detail of the spring plungers 232 and their pockets 210, an unobstructed view of the air intake openings 212, and more detail of the air filter 208. The air filter 208 has filter sections 226 that preferably press-fit into place within the air intake channel 224. In one example, the filter sections 226 snugly fit between the spring plungers 232 that protrude through the air intake channel 224.

[0063] In the preferred embodiment, the bubble 202 has a darkened or “smoked” finish or appearance that hides where the camera lens 610 is pointing. This hides the camera lens 610 from the view of patrons. The finish does not otherwise affect the operation of the PTZ camera 102. In another example, the bubble 202 has a frosted or milky appearance, as in Fig. 3.

[0064] In one example, the bubble 202 is made of glass. In another example, the bubble 202 is made of high-impact plastic. The housing 204 also includes a set screw hole 230 that accepts a set screw 231. The installer tightens the set screw 231 within the set screw hole 230 until the set screw 231 fastens the housing 204 of the bubble adapter 104 to the base 512 of the PTZ camera 102. This permanently attaches the bubble adapter 104 to the PTZ camera 102 after the bubble adapter 104 is attached to the PTZ camera 102 via the interference fit provided by the combination of the spring plungers 232 and the detent 604.

[0065] In yet another example, the bubble adapter 104 is attached to the PTZ camera using only the aforementioned permanent set screw mechanism, by tightening the set screw 231 within the set screw hole 230 until the housing 204 is attached to the base 512 of the PTZ camera 102.

[0066] Fig. 8 is a partially-exploded view 800 of another embodiment of the bubble adapter 104. The bubble adapter 104 in Fig. 8 is nearly identical to the bubble adapter 104 in Fig. 7, with Fig. 8 including an additional cover ring 806 that attaches to the housing 204 via a screw 802. In general, the cover ring 806 functions as a cosmetic cover which hides the standard black body of the PTZ camera 102 when used with a non-black bubble adapter 104. The air filter 208 is omitted from Fig. 8 to permit view of the cover ring 806.

[0067] Instead of the safety lanyard 220 attaching to the housing 204 as shown in Fig. 3 and Fig. 7, the safety lanyard 220 attaches to the cover ring 806 in Fig. 8. The cover ring 806 seats within the air intake channel 224 and is secured to the housing 204 via screw 802. In one implementation, the screw 802 is made of plastite material.

[0068] Once the bubble adapter 104 is attached to the PTZ camera 102, the installer attaches the safety lanyard 220 to the base 512 of the PTZ camera 102 via thumbscrew 804.

[0069] Fig. 9 is a cross-sectional view 900 of the bubble adapter 104 according to the embodiment of Fig. 8. The cross-sectional view 900 is substantially similar to the cross-sectional view 530 in Fig. 5, with the main differences being that the tamper resistant bracket 222 is not included in Fig. 9, and the safety lanyard 220 attaches to the cover ring 806.

[0070] The cover ring 806 seats within the air intake channel 224 and is secured to the housing 204 by screw 802. The included thumbscrew 804 provides for convenient attachment of the safety lanyard 220 to the base 512 of the PTZ camera 102 for added safety during installation of the bubble adapter 104 to the PTZ camera 102. The tamper resistant bracket 222 discourages tampering of the bubble adapter 104 once attached to the PTZ camera 102.

[0071] Fig. 10 presents a method for attaching a bubble adapter 104 to an installed PTZ camera 102 in the field, such as a PTZ camera 102 mounted in a ceiling 120. In step 1002, an installer places the bubble adapter 104 over the head 514 of an installed security camera 102 in the field which currently lacks a bubble 202. Then, according to step 1004, the installer attaches the safety lanyard 220 of the cover ring 806 of the bubble adapter 104 to the base 512 of the PTZ camera 102 with a thumbscrew 804 to prevent the bubble adapter 104 from dropping during the installation.

[0072] The installer then pushes the bubble adapter 104 towards the mounting region 515 of the base 512 of the PTZ camera 102, until the spring plungers 232 within the housing 204 of the bubble adapter 104 deploy within the detent 604 of the base 512 of the security camera 102, according to step 1006.

[0073] Then, according to step 1008, the installer tightens a set screw 231 within the set screw hole 230 of the housing 204 to permanently secure the bubble adapter 104 to the base 512 of the PTZ camera 102.

[0074] While this invention has been particularly shown and described with references to preferred embodiments thereof, it will be understood by those skilled in the art that various changes in form and details may be made therein without departing from the scope of the invention encompassed by the appended claims.

CLAIMS

What is claimed is:

1. A security camera system, comprising:
 - a Pan/Tilt/Zoom ("PTZ") head of a security camera;
 - a base of the security camera on which the PTZ head is held, the base comprising a mounting region; and
 - a bubble adapter that fits over the PTZ head, the bubble adapter including a housing that attaches to the base at the mounting region via a field-deployable attachment mechanism, and a bubble attached to the housing that encloses the PTZ head.
2. The system of claim 1, wherein the field-deployable attachment mechanism comprises an interference fit system.
3. The system of claim 2, wherein the interference fit system comprises:
 - spring plungers disposed in pockets within the housing of the bubble adapter;
 - and
 - a detent in the mounting region of the base which accepts the spring plungers.
4. The system of claim 3, wherein the pockets extend radially outward from an inside surface of an outer rim of the housing.
5. The system of claim 1, wherein the field-deployable attachment mechanism comprises a set screw system.
6. The system of claim 1, wherein the housing includes an air intake channel formed within the housing that includes air intake openings that accept air from outside the housing to enable airflow into the security camera.
7. The system of claim 6, wherein the air intake channel accepts an air filter placed before the air intake openings.

8. The system of claim 6, wherein the air intake openings of the housing provide the airflow for air inlets of the PTZ head of the security camera for cooling the security camera.
9. The system of claim 6, wherein the base of the security camera includes:
 - one or more fans which draw the airflow provided by the air intake openings of the housing into air inlets of the PTZ head of the security camera to cool the security camera; and
 - air exhaust openings which allow the airflow to exit the security camera.
10. The system of claim 1, wherein the housing accepts a trim ring that secures a lip of the bubble to the housing for fastening the bubble to the housing.
11. The system of claim 10, wherein the trim ring fastens the bubble to the housing using an interference fit.
12. The system of claim 1, wherein the housing further comprises a tamper resistant bracket which discourages tampering of the bubble adapter.
13. The system of claim 1, wherein the housing further comprises a cover ring that mounts to the air intake channel, which conceals the base of the security camera after the housing is attached to the base of the security camera.
14. The system of claim 13, wherein the cover ring includes a safety lanyard that fastens to the base of the security camera, which protects the bubble adapter from dropping during attachment and removal.
15. The system of claim 1, wherein the bubble has a smoked appearance which provides the concealment of the security camera and its components.
16. A bubble adapter for an installed security camera, comprising:
 - a housing that attaches to the security camera, including:
 - an airflow system that allows airflow to the security camera for thermal control when the housing is attached to the security camera; and
 - a bubble fastened to the housing that encloses at least a head of the security camera for protecting and concealing the security camera.

17. The bubble adapter of claim 16, further comprising an interference fit system for securing the bubble adapter to the security camera.
18. The bubble adapter of claim 17, wherein the interference fit comprises:
spring plungers disposed in pockets within the housing of the bubble adapter, a detent in a mounting region of a base of the security camera accepts the spring plungers.
19. The bubble adapter of claim 16, further comprising a set screw system for securing the bubble adapter to the security camera.
20. The bubble adapter of claim 16, wherein the housing includes an air intake channel formed within the housing that includes air intake openings that accept air from outside the housing to enable the airflow to the security camera.
21. A method for upgrading an installed security camera in the field to have a bubble, comprising:
placing a bubble adapter over a head of the security camera;
pushing the bubble adapter towards a mounting region of a base of the security camera on which the head is held; and
attaching the bubble adapter to the base at the mounting region via a field deployable attachment mechanism.

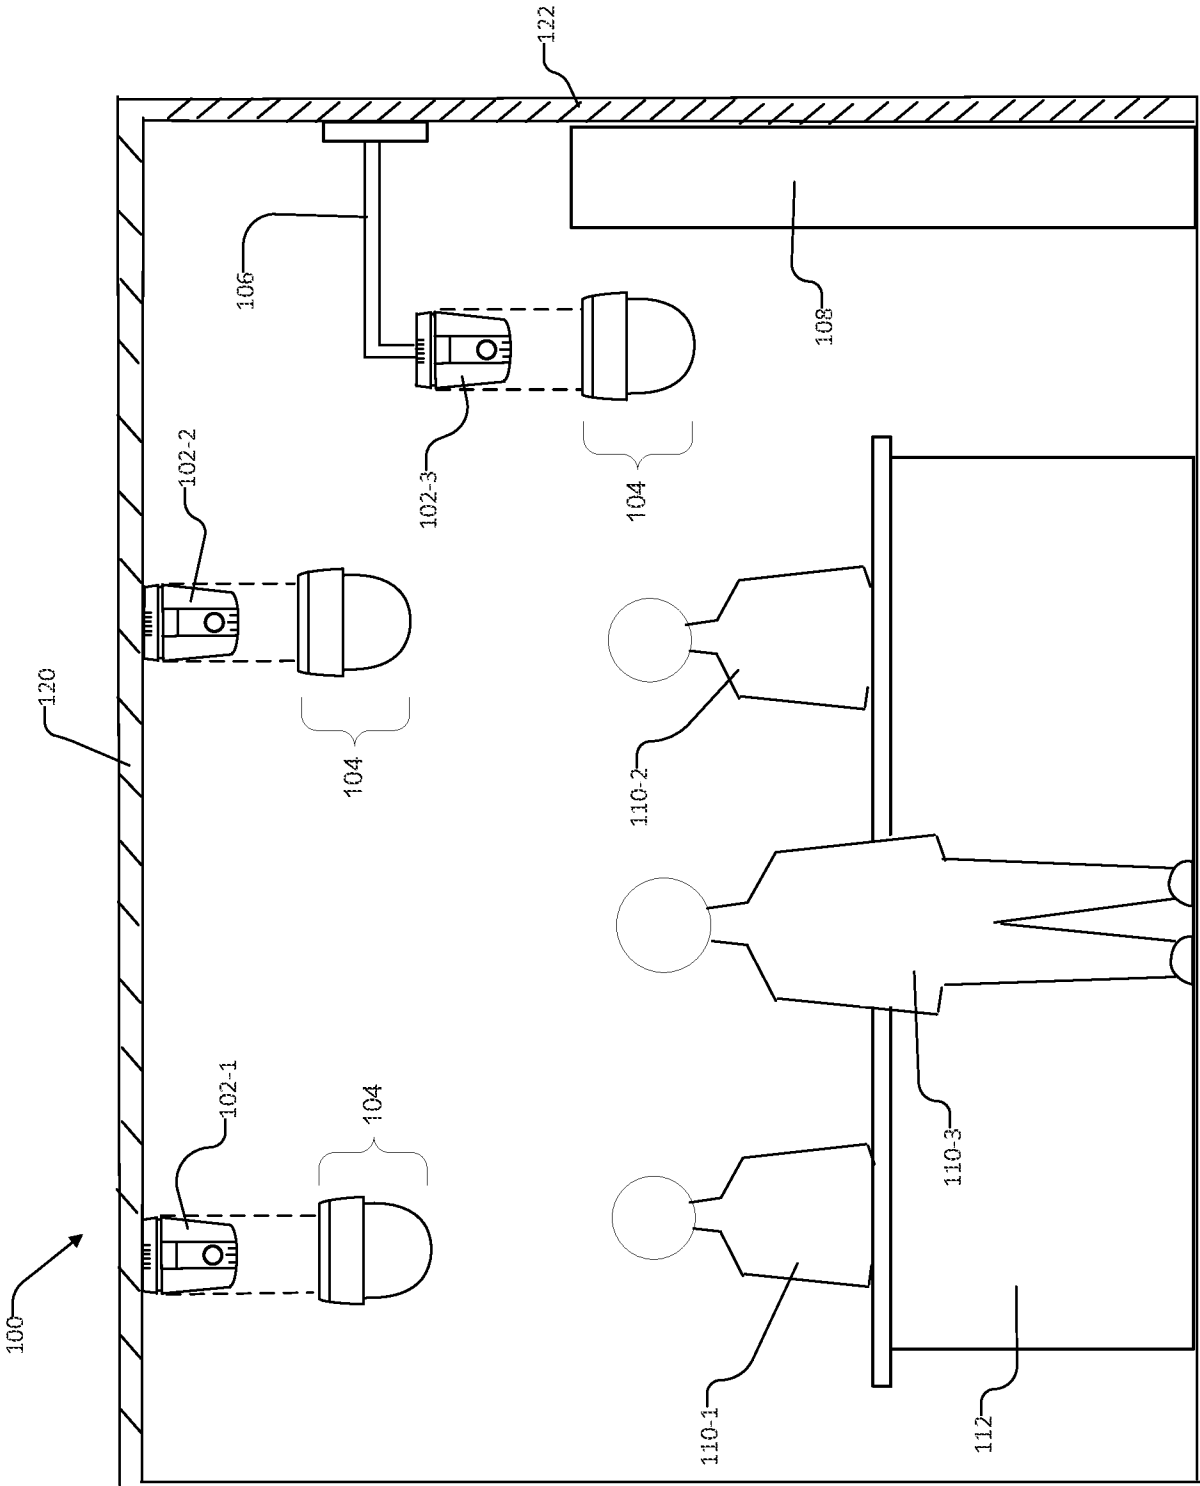


FIG. 1

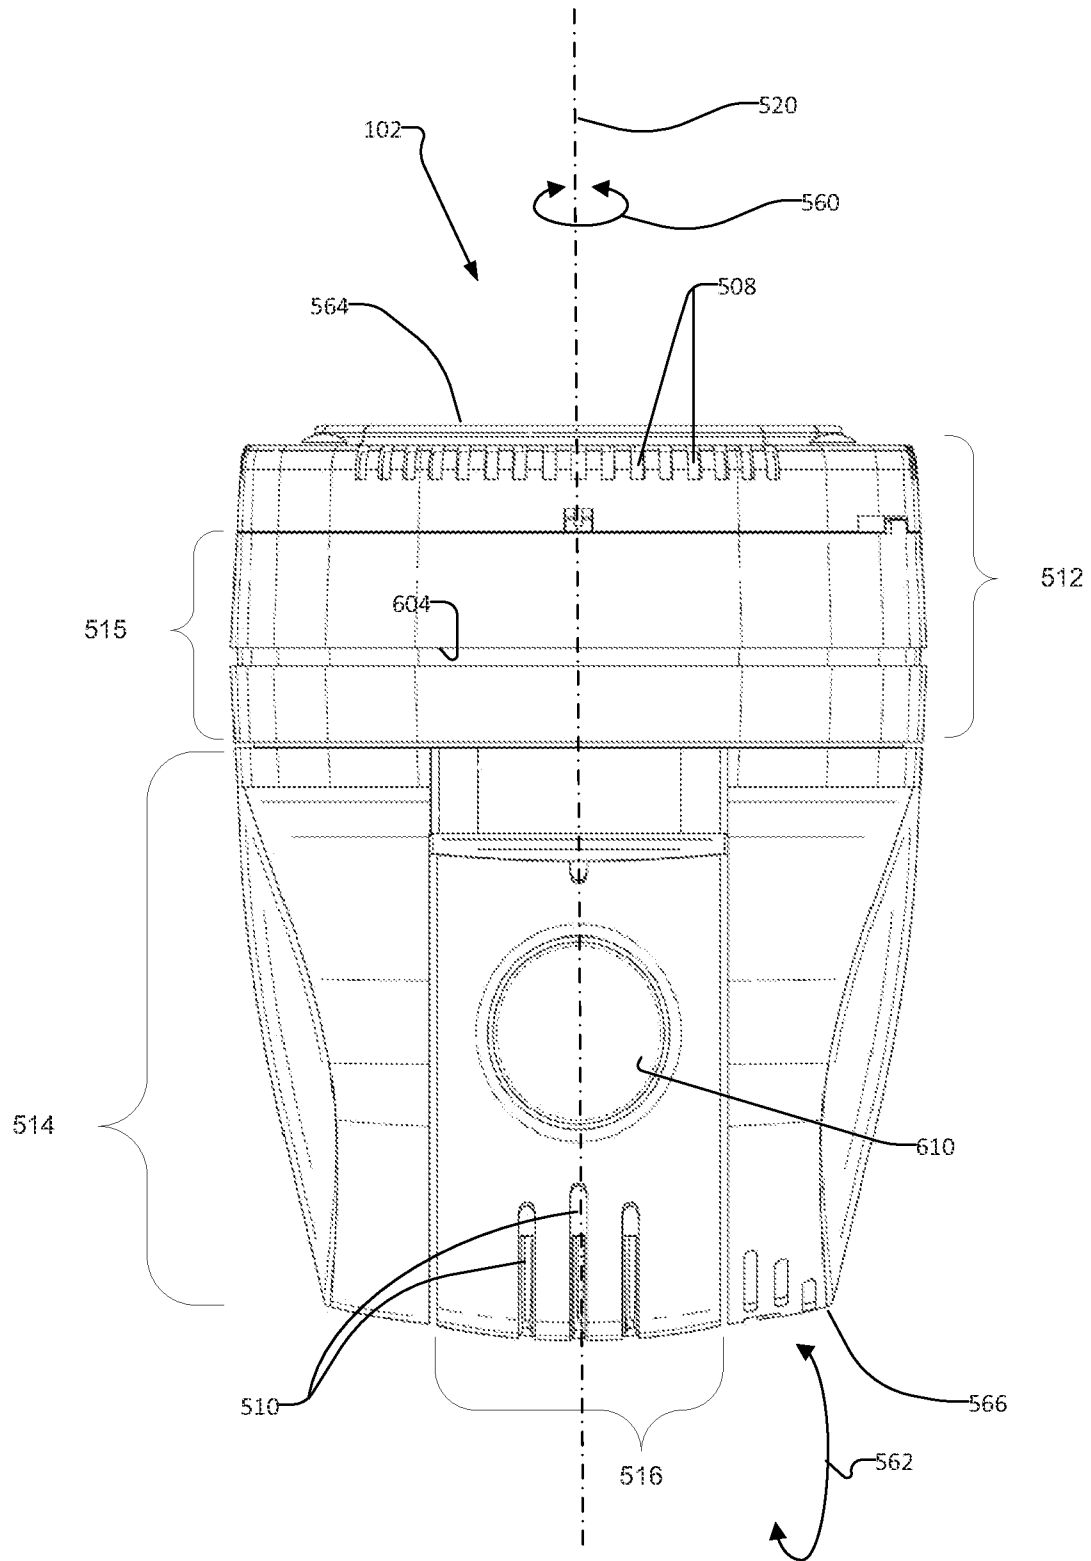


FIG. 2

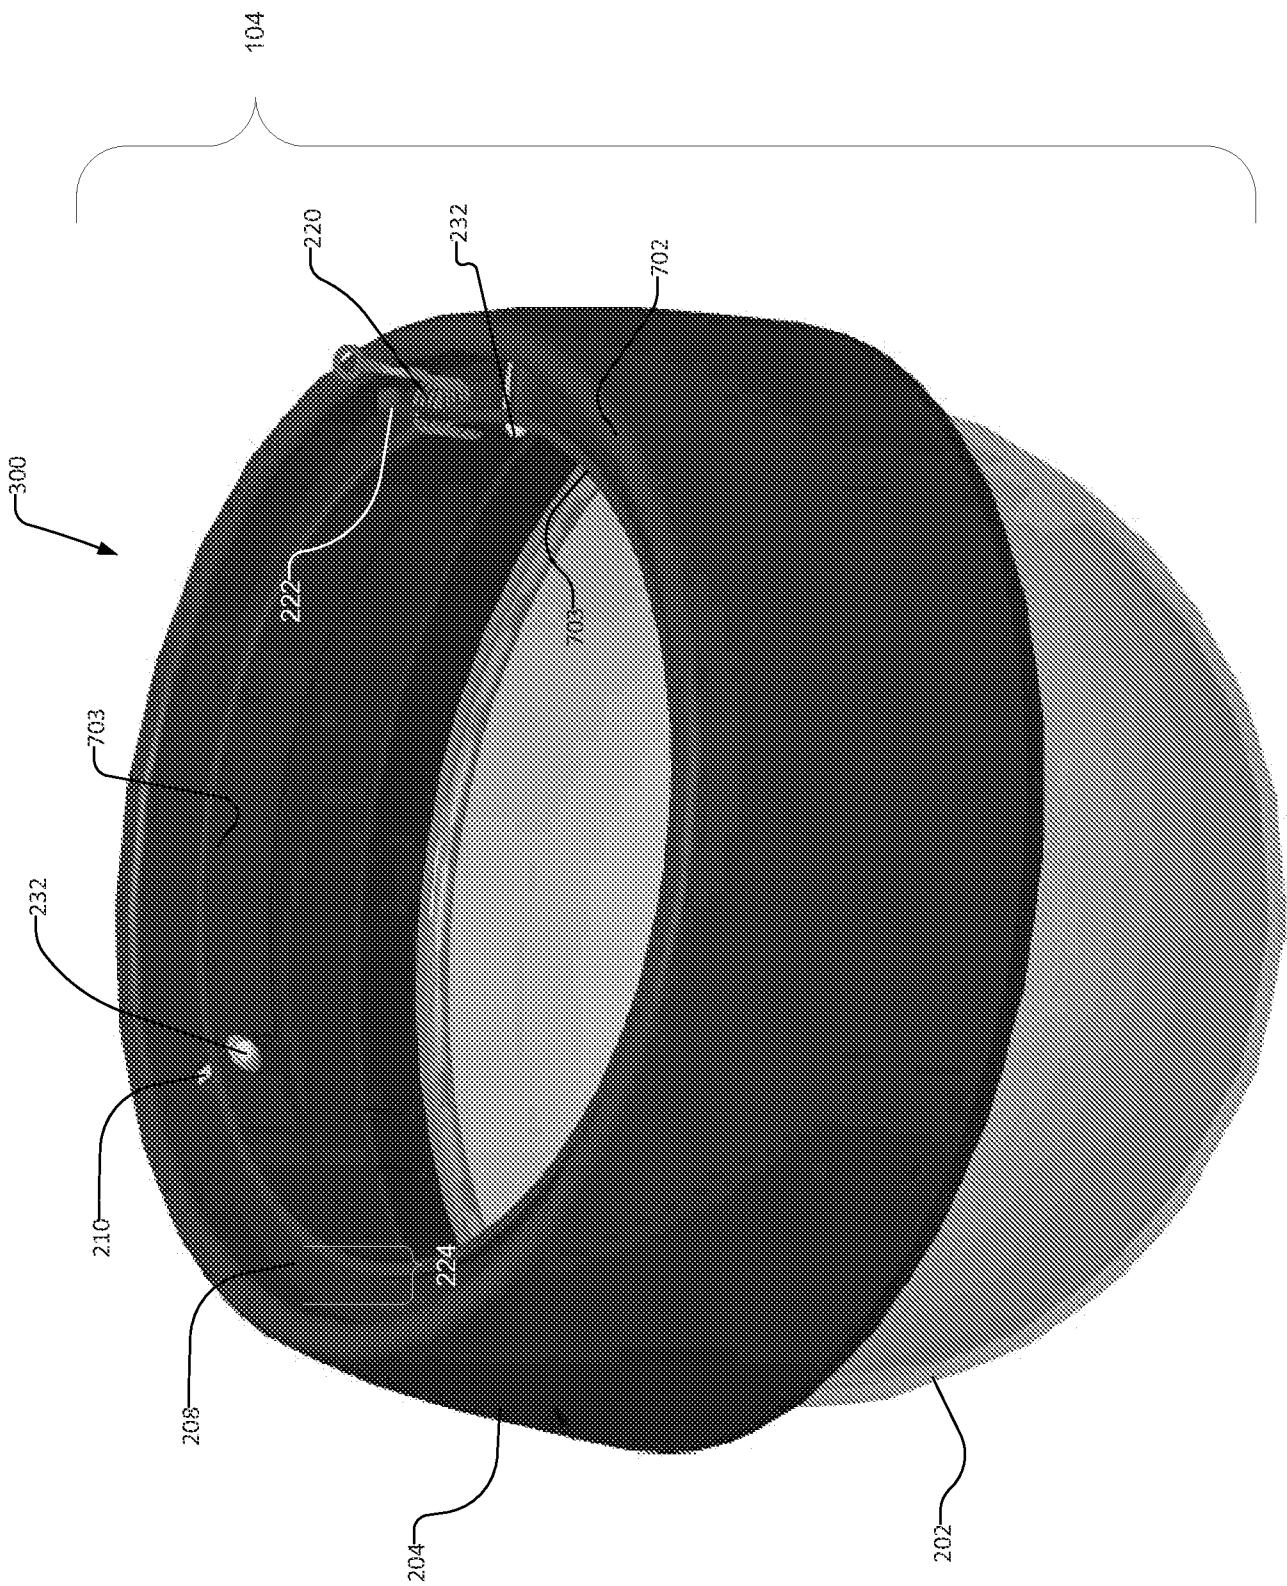


FIG. 3


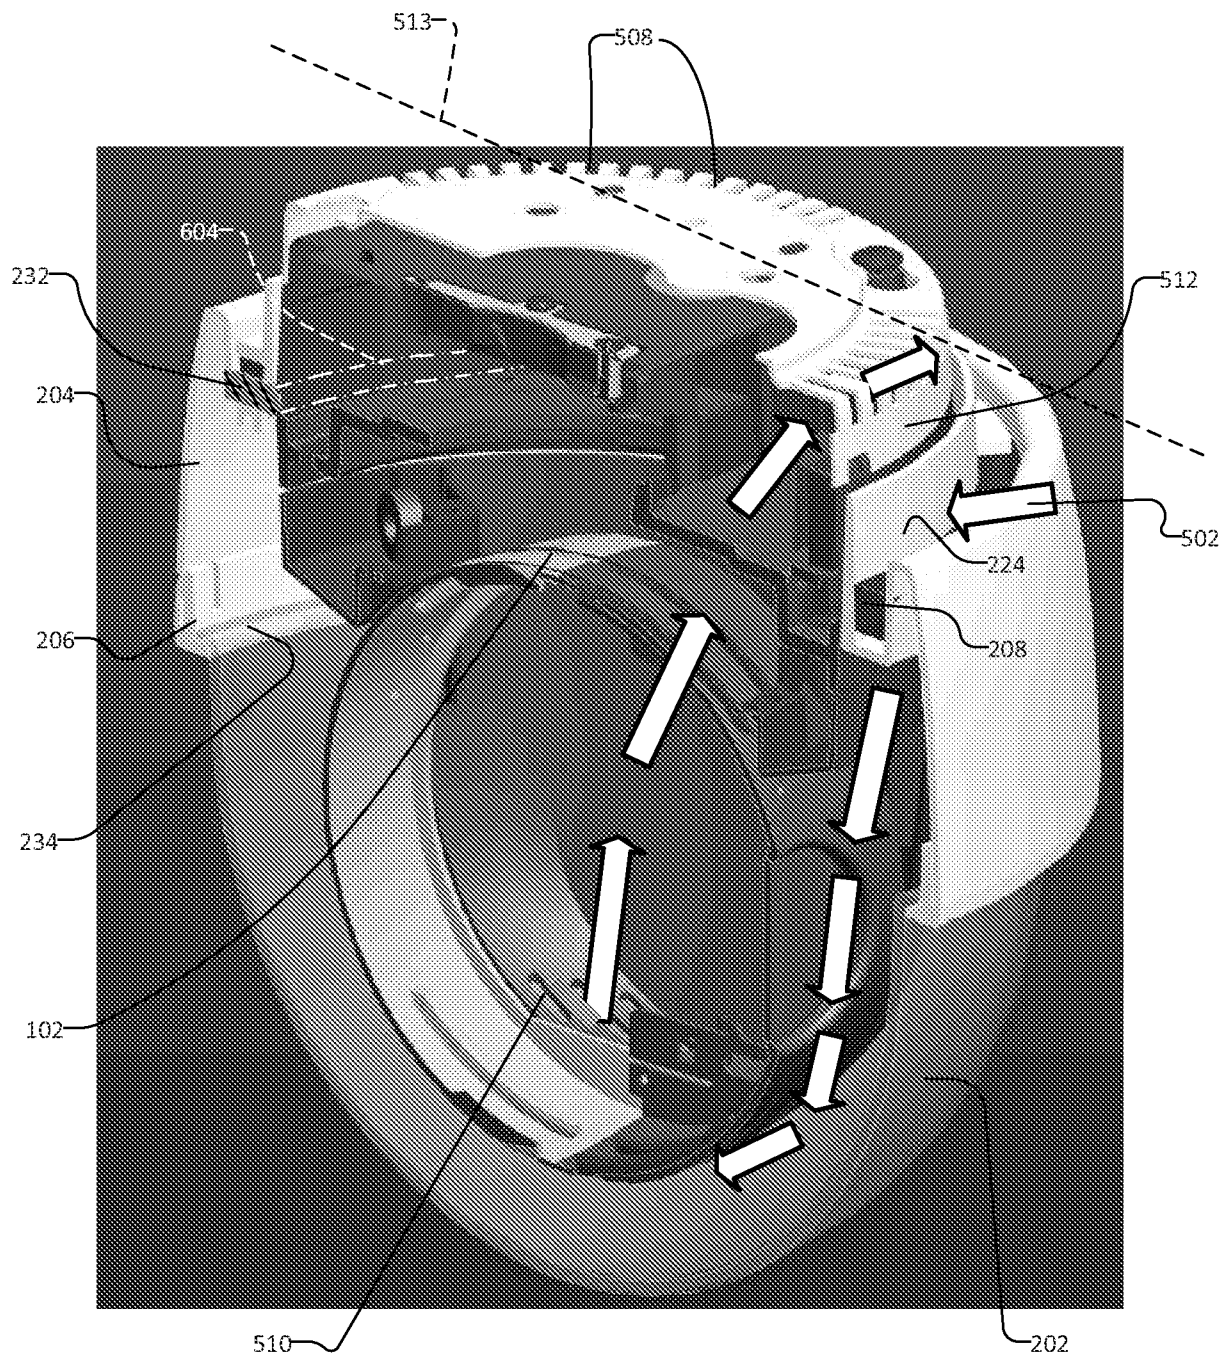


FIG. 4

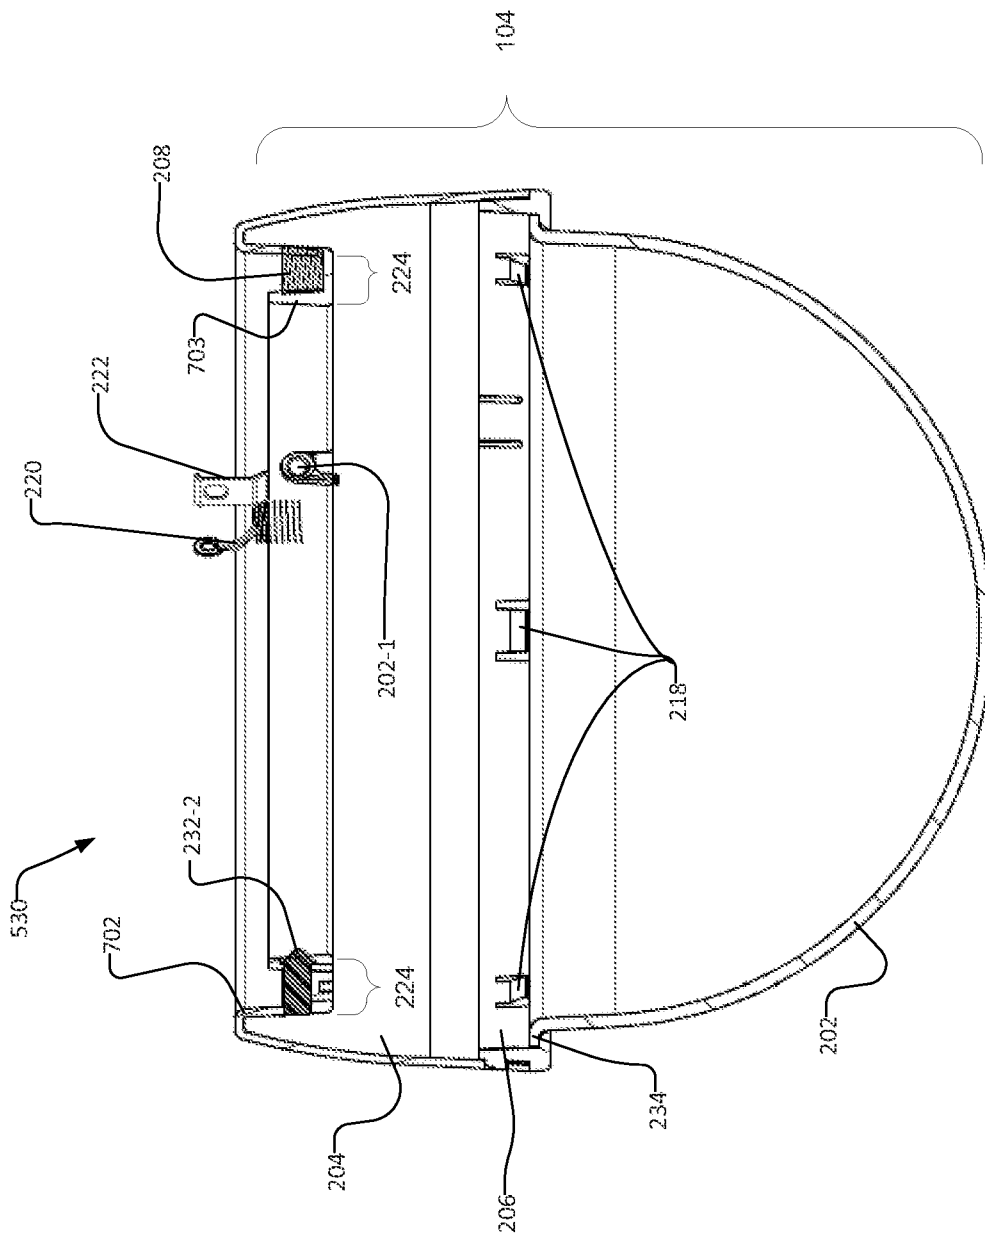

၆၄၂

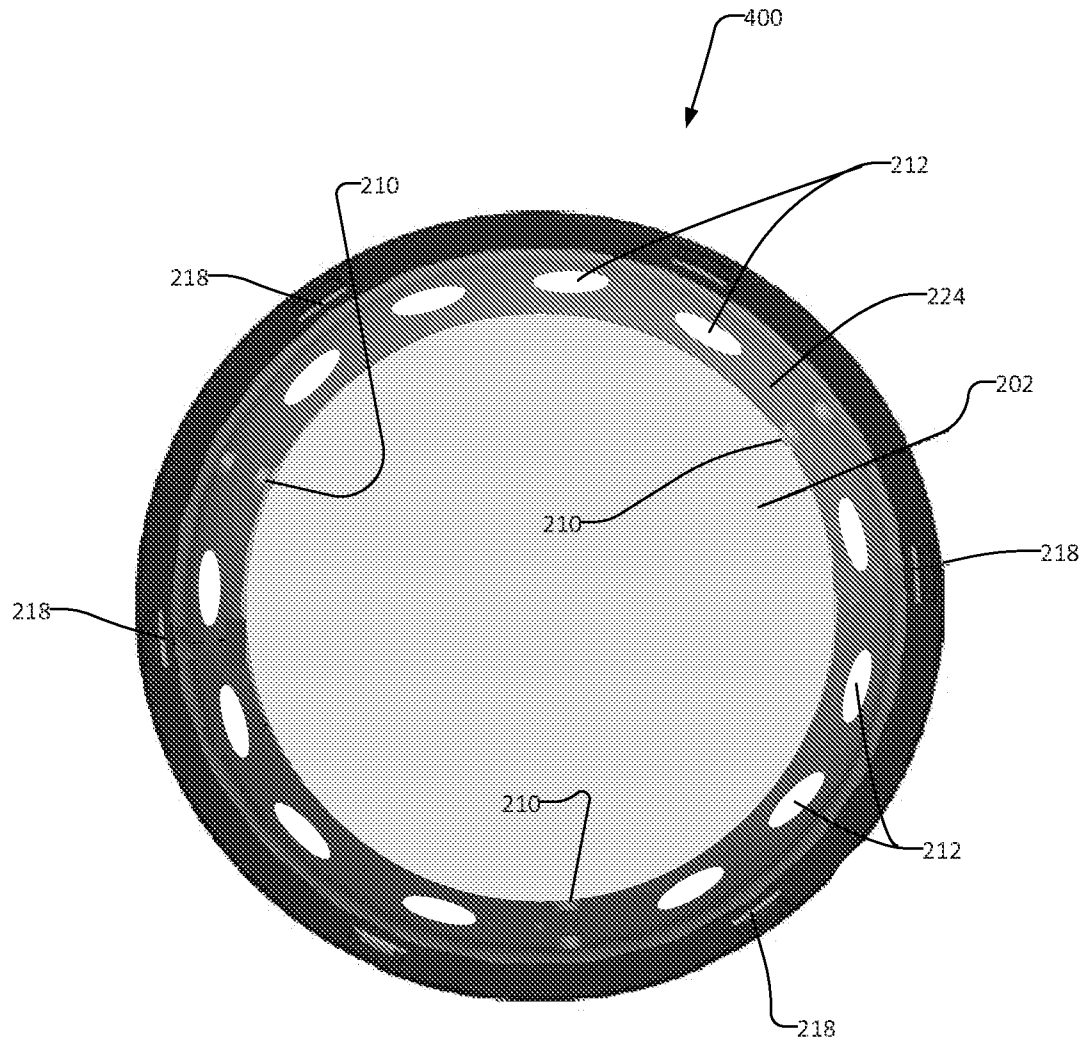


FIG. 6

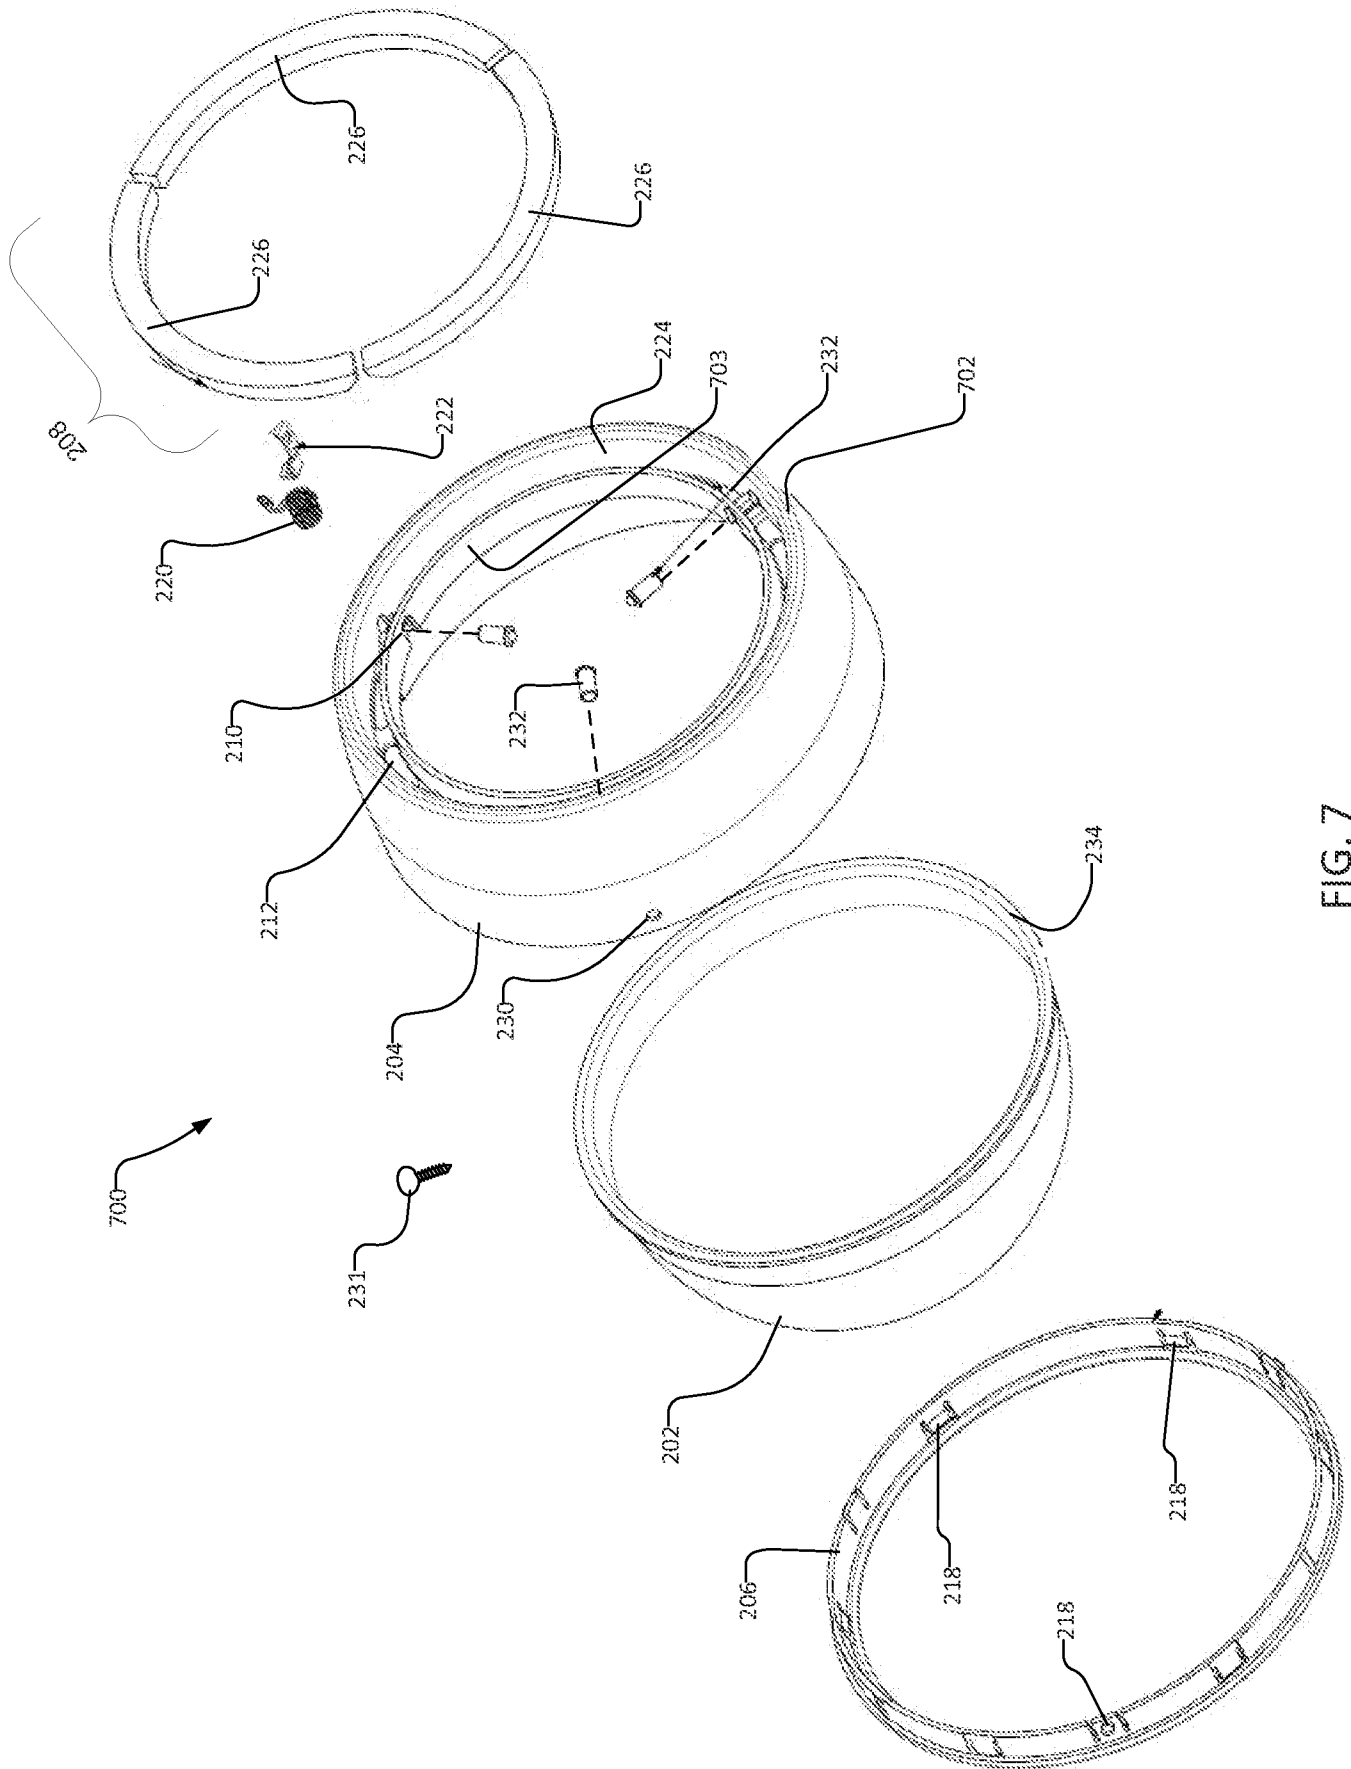


FIG. 7


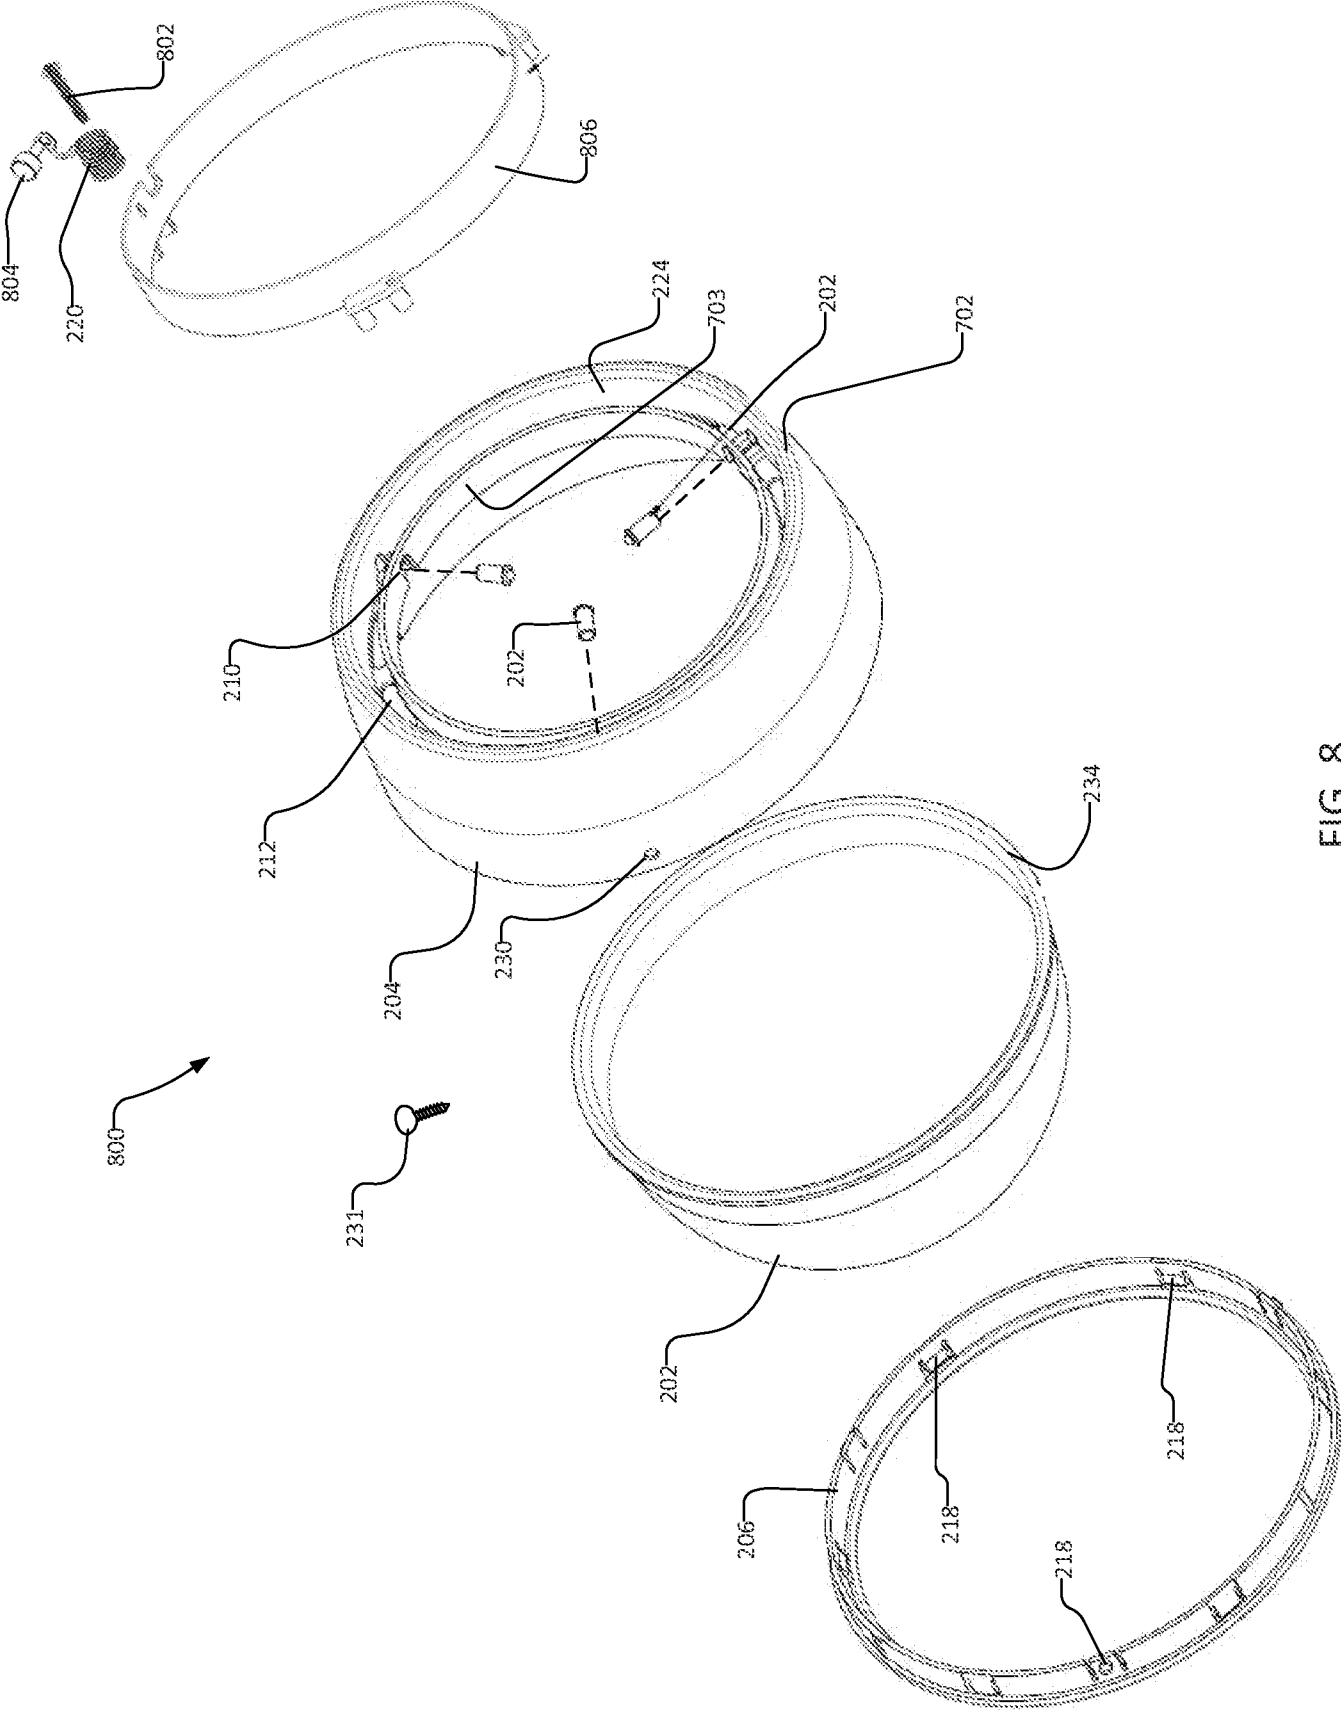


FIG. 8

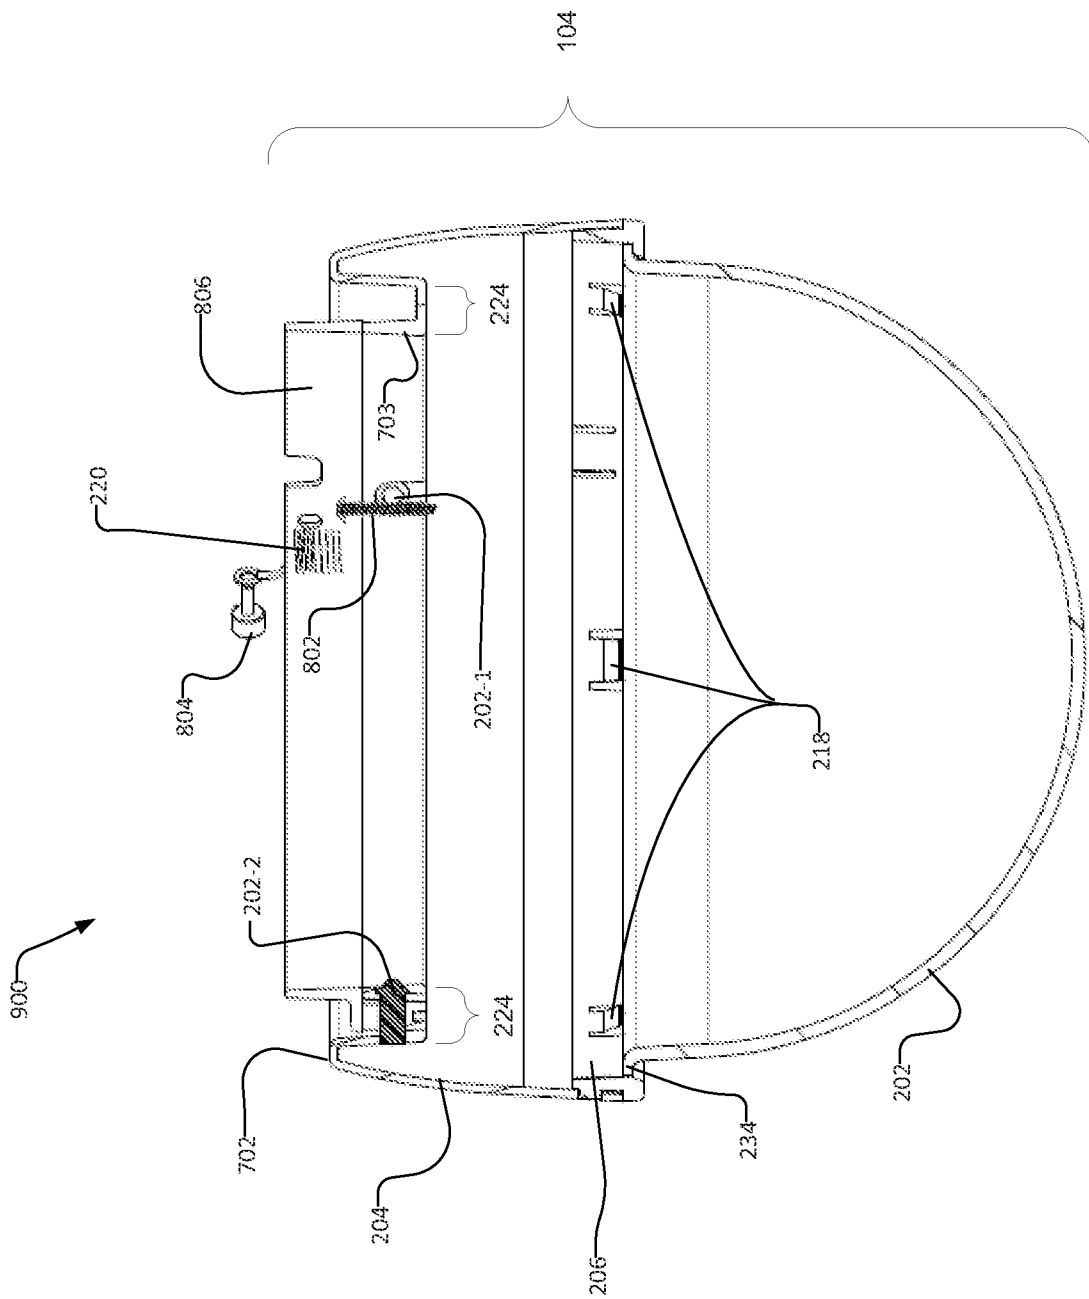

9
3
G
L

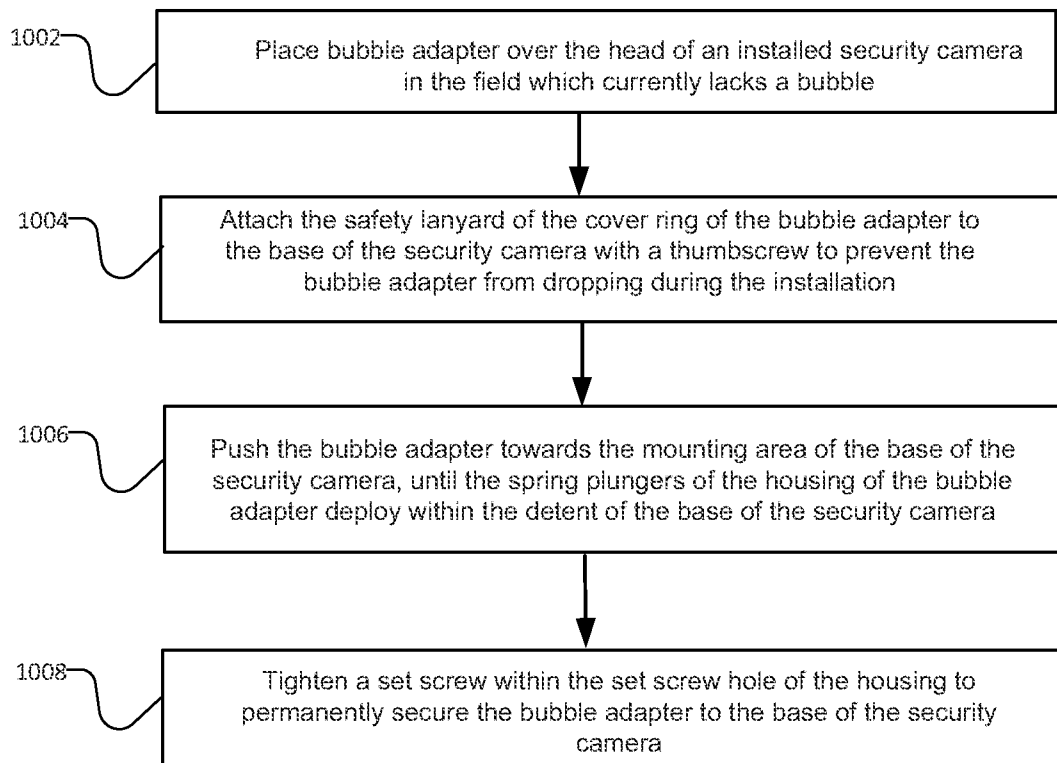


FIG. 10

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2014/012906

A. CLASSIFICATION OF SUBJECT MATTER
INV. G08B13/196 G03B17/00 H04N7/18
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G08B G03B H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00/04720 A1 (SENSORMATIC ELECTRONICS CORP [US]) 27 January 2000 (2000-01-27)	1-6, 8-13, 15-21
Y	page 8, line 29 - page 12, line 17; figures 1-4	7
X	WO 02/03701 A2 (SENSORMATIC ELECTRONICS CORP [US]) 10 January 2002 (2002-01-10)	1-6, 8-13, 15-21
Y	page 4, line 15 - page 5, line 9; figures 1,2 page 6, line 20 - page 7, line 16; figures 5-7	7
Y	US 4 984 089 A (STIEPEL NORBERT M [US] ET AL) 8 January 1991 (1991-01-08) column 2, line 29 - line 37 column 4, line 9 - line 62; figure 3	7
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

8 May 2014

Date of mailing of the international search report

26/05/2014

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

La Gioia, Cosimo

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2014/012906

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2003/185556 A1 (STIEPEL NORBERT [US] ET AL) 2 October 2003 (2003-10-02) paragraph [0013] - paragraph [0014] -----	1,16,21
A	US 2001/022627 A1 (BERNHARDT RAINER [DE]) 20 September 2001 (2001-09-20) paragraph [0051] - paragraph [0059]; figures 1-3 -----	1,16,21

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2014/012906

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0004720	A1	27-01-2000	AR 019411 A1 20-02-2002
		AU 755045 B2 28-11-2002	
		AU 4853799 A 07-02-2000	
		BR 9912055 A 03-04-2001	
		CA 2337067 A1 27-01-2000	
		EP 1104625 A1 06-06-2001	
		JP 4309585 B2 05-08-2009	
		JP 2003527758 A 16-09-2003	
		US 6061087 A 09-05-2000	
		WO 0004720 A1 27-01-2000	
WO 0203701	A2	10-01-2002	AU 7164901 A 14-01-2002
		BR 0111967 A 01-07-2003	
		CA 2411391 A1 10-01-2002	
		EP 1295479 A2 26-03-2003	
		JP 4493270 B2 30-06-2010	
		JP 2004502384 A 22-01-2004	
		US 6992723 B1 31-01-2006	
		WO 0203701 A2 10-01-2002	
US 4984089	A	08-01-1991	AR 246831 A1 30-09-1994
		BR 9100030 A 22-10-1991	
		CA 2025850 A1 09-07-1991	
		DE 69029721 D1 27-02-1997	
		DE 69029721 T2 14-08-1997	
		EP 0436797 A2 17-07-1991	
		JP 2628225 B2 09-07-1997	
		JP H03217175 A 24-09-1991	
		US 4984089 A 08-01-1991	
US 2003185556	A1	02-10-2003	NONE
US 2001022627	A1	20-09-2001	DE 10013780 C1 23-05-2001
		EP 1136964 A2 26-09-2001	
		US 2001022627 A1 20-09-2001	