



(43) International Publication Date
13 September 2012 (13.09.2012)

(51) International Patent Classification:
B23Q 3/154 (2006.01)

(21) International Application Number:
PCT/IB2011/054957

(22) International Filing Date:
7 November 2011 (07.11.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11157202.0 7 March 2011 (07.03.2011) EP

(71) Applicant (for all designated States except US): **C.R.F. SOCIETÀ CONSORTILE PER AZIONI** [IT/IT]; Strada Torino 50, I-10043 Orbassano (Torino) (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **INNOCENTI, Daniela** [IT/IT]; C.R.F. Società Consortile per Azioni, strada Torino 50, I-10043 Orbassano (Torino) (IT). **HERRMANN, Anja** [IT/IT]; C.R.F. Società Consortile per Azioni, strada Torino 50, I-10043 Orbassano (Torino) (IT).

(74) Agent: **NOTARO, Giancarlo**; c/o Buzzi, Notaro & Antonielli d'Oulx, via Maria Vittoria 18, I-10123 Torino (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: MAGNETIC DEVICE FOR GRIPPING AND CLAMPING A WORKPIECE IN A MACHINING UNIT OR MACHINING LINE

FIG. 4

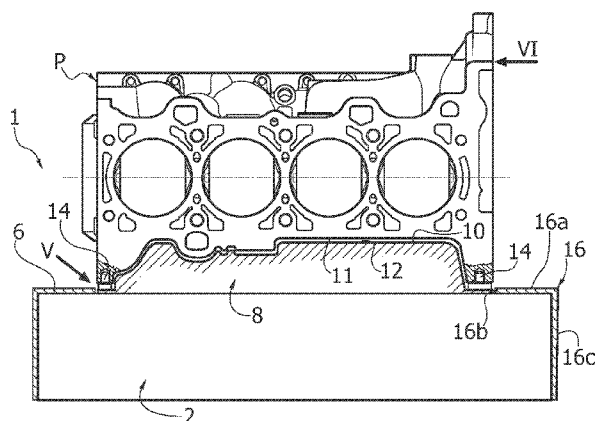

(57) Abstract: A magnetic device for gripping and clamping a workpiece in a machining unit or on a machining line comprises a magnetic plate (2) of the type including a distribution of high-energy permanent-magnet modules (3), which can be electrically activated. The device further comprises an auxiliary workpiece-holder plate made of ferromagnetic material, which rests on a main surface of the magnetic plate and has a top surface (10) shaped in a way complementary to a surface of the workpiece (P) that rests thereon. The workpiece (P) rests on the top surface (10) of the auxiliary workpiece-holder plate (8) only in points corresponding to some supporting pads (13), whilst the facing surfaces of the workpiece (P) and auxiliary workpiece-holder plate (8) are kept slightly set apart from one another for most of their extension. Precise referencing in the plane of the main surface (6) of the magnetic plate (2) between the workpiece (P) and the auxiliary workpiece-holder plate (8) is obtained by means of two locating pins (14) projecting from the auxiliary plate (8) and received within respective seats (15) of the workpiece (P). There may be provided a protective shroud (16) above the magnetic plate (2), having an opening (16b) from which the aforesaid auxiliary workpiece-holder plate (8) projects.

**"Magnetic device for gripping and clamping a workpiece in a machining unit
or machining line"**

5 The present invention relates to magnetic devices for gripping and clamping workpieces in a machining unit or on a machining line, of the type comprising a magnetic plate including a distribution of high-energy permanent-magnet modules, which can be electrically activated, said magnetic plate having two plane and opposite main surfaces, giving out onto which are the poles of said permanent-magnet modules.

10 Magnetic plates of the type referred to above are, for example, illustrated in EP-A-0 211 329, EP-A-0 254 939, EP-A-0 311 865, EP-A-0 345 554, WO-A-09/034425, WO-A-09/130721, WO-A-09/130722, and WO-A-10/125592.

15 Magnetic plates of this type constitute permanent electromagnetic systems in which the electrical energy is used only for a few seconds in the MAG (activation) and DEMAG (deactivation) steps. The magnetic plate has a distribution of permanent-magnet modules arranged according to an orderly array and having their North/South poles oriented alternately to generate a high concentration of force through a grid of multiple magnetic stitches that enable a horizontal and flattened circulation of the magnetic flux. The anchoring force
20 generated enables a workpiece set on the magnetic plate to be withheld irrespective of the direction of the forces to which the workpiece is subject during machining and also when small thicknesses are involved. The force of attraction is uniformly distributed over the entire surface of contact with the workpiece, without any compression and deformation of the workpiece, unlike what occurs
25 with traditional mechanical clamping devices. The magnetic plate leaves the workpiece free except for just the side of contact with the plate, which favours a better exploitation of the machining unit.

A device as set forth in the preamble of claim 1 is known from document US 4 777 463 A.

30 The object of the present invention is to improve the flexibility of use of magnetic devices of the type referred to above, with simple and low-cost means, in particular guaranteeing the possibility of use also with workpieces of a complex conformation, and without jeopardizing the precision of positioning of the workpiece.

35 With a view to achieving said purpose, the subject of the invention is a

magnetic device for gripping and clamping a workpiece in a machining unit or on a machining line, which has the characteristics of claim 1.

In the device according to the invention, the aforesaid auxiliary workpiece-holder plate, which is made of ferromagnetic material, is magnetised automatically when the magnetic plate set underneath it is activated so as to carry out clamping of the workpiece-holder plate 8 on the magnetic plate 2 and clamping of the workpiece on the workpiece-holder plate. At the same time, the auxiliary plate functions as adapter, thanks to the conformation of its top surface, which follows the corresponding conformation of the surface of the workpiece. In this way, it is possible to obtain clamping on the magnetic plate of workpieces having a complex shaped surface. Precise referencing in the plane of the magnetic plate between the workpiece and the workpiece-holder plate is obtained via locating pins, whilst positioning in the direction perpendicular to the plane of the magnetic plate is defined in a precise way by the aforesaid supporting pads of the auxiliary plate. Except for said supporting pads, the top surface of the auxiliary workpiece-holder plate is not in contact with the workpiece, but rather is kept slightly set apart therefrom, which prevents in a simple way the risk of an incorrect resting of the workpiece on the workpiece-holder table, without requiring very restricted machining tolerances.

Of course, the invention can be applied with any orientation of the magnetic plate, in particular both with the magnetic plate set horizontally and with the magnetic plate set vertically. In the present description, the terms "top" and "bottom" are used with reference to a horizontal orientation of the magnetic plate, but are not to be interpreted in a limiting sense. For example, in the case of vertical orientation of the magnetic plate, by "top surface" and "bottom surface" of the workpiece-holder plate is to be meant the opposite surfaces of the workpiece-holder plate that are, respectively, furthest from and closest to the magnetic plate.

In the case where a magnetic plate of dimensions larger than those of the auxiliary workpiece-holder plate is used, the device can further comprise a protective shroud and cover, which covers the aforesaid magnetic plate and has a plane top surface, resting on the main top surface of the magnetic plate and having an opening that follows the profile of the base surface of the auxiliary workpiece-holder plate to enable the latter to project through said opening. In this way, the magnetic plate is protected in a simple and efficient way from the swarf produced during machining of the workpiece.

Further characteristics and advantages of the invention will emerge from the ensuing description with reference to the annexed drawings, which are provided purely by way of non-limiting example and in which:

Figure 1 is a perspective view of an example of embodiment of the device
5 according to the invention;

Figure 2 and 3 are a side view in elevation and a plan view of the device of Figure 1;

Figure 4 is a view in elevation, partially sectioned according to the line IV of Figure 3, which shows a workpiece, specifically an internal-combustion engine block, clamped on the device according to the invention;
10

Figure 5 is a view at an enlarged scale of the detail indicated by the arrow V in Figure 4; and

Figure 6 is a view in elevation, partially sectioned according to the line VI of Figure 3.

15 In the drawings, the number 1 designates as a whole a magnetic device for gripping and clamping a workpiece in a machining unit or on a machining line. The example illustrated here regards the case of a device that is to be used in a machine for machining with removal of stock of an internal-combustion engine block.

20 The device 1 comprises a magnetic plate 2 of the type already described above, which has, in a way in itself known, an array of permanent-magnet modules 3. The magnetic plate 2 has a main plane base surface 5 and a main top plane surface 6 parallel to the surface 5. The permanent-magnet modules 3 have North/South poles facing the main surfaces 5, 6 and oriented alternately, in a way
25 in itself known, in order to give rise, when activated, to a high concentration of force through a grid of multiple magnetic stitches that enable a horizontal and flattened circulation of the magnetic flux. The magnetic plate 2 is provided, on a lateral surface thereof, with a connector 7 for an electrical-supply cable. According to the technique known in the sector of said magnetic plates, the
30 electrical energy is used only for a few seconds in the step of activation and in the step of deactivation of the permanent magnets.

The device according to the invention further comprises an auxiliary workpiece-holder plate 8 made of ferromagnetic material, which in the example illustrated is constituted by a steel casting. The auxiliary workpiece-holder plate 8
35 has a plane base surface 9, which rests on the main top surface 6 of the magnetic

plate 2, and a top surface 10, formed and shaped according to the corresponding conformation of the surface of a workpiece P (in the case illustrated an engine block) that is to rest thereon. Figures 4 and 6 of the annexed drawings show the workpiece P resting on the magnetic plate 2 and on the auxiliary workpiece-holder plate 8. As may be clearly seen in Figure 1, the top surface 10 of the auxiliary workpiece-holder plate 8 is shaped with reliefs and cavities engaging within which are corresponding cavities and reliefs of the surface 11 (Figures 4, 6) of the workpiece P that rests on the auxiliary plate 8.

As may be clearly seen from Figures 4 and 6, the top surface 10 of the auxiliary workpiece-holder plate 8 and the surface 11 of the workpiece P that rests thereon remain slightly set apart from one another for most of their extension, creating a gap 12 that prevents the risk of an incorrect coupling of the workpiece P with the auxiliary workpiece-holder plate 8, without requiring the adoption of particularly restricted production tolerances. The workpiece P rests on the auxiliary workpiece-holder plate 8 only in points corresponding to a plurality of supporting pads 13 (see Figure 3 and Figure 6), which define in a precise way the vertical position (with reference to the figures) of the workpiece P with respect to the magnetic plate 2 and to the auxiliary workpiece-holder plate 8. The precise positioning of the workpiece P on the auxiliary plate 8 in the plane of the main top surface of the magnetic plate is guaranteed by a pair of locating pins 14 (see Figures 3, 4, 6 and the detail of Figure 5), which project at the top from the auxiliary workpiece-holder plate 8, each with an axis 14a orthogonal to the plane of the main top surface 6 of the magnetic plate 2, and which are received within respective seats 15 made in the workpiece P.

Preferably, the device 1 further comprises a protective shroud 16, constituted by a metal sheet made of non-ferromagnetic material, for example aluminium, comprising a top plane wall 16a that covers the top main surface 6 of the magnetic plate 2 and that has an opening 16b, the boundary of which follows the profile of the base surface of the auxiliary workpiece-holder plate 8 in such a way that the auxiliary workpiece-holder plate 8 can project through said opening 16b, whilst the remaining part of the magnetic plate 2 remains protected from the swarf that drops thereon during machining. The protective shroud 16 has side walls 16c that cover the side walls of the magnetic plate 2 (the protective shroud 16 is illustrated in cross section in Figures 4 and 6, whereas it has been removed in Figures 1-3, for convenience of illustration).

As emerges clearly from the foregoing description, the device according to the invention enables exploitation of the magnetic plate 2 for gripping and clamping workpieces having non-plane surfaces. This is obtained in a simple and efficient way by providing the auxiliary workpiece-holder plate 8. Precise
5 referencing in the three orthogonal directions is obtained thanks to the locating pins 14 and to the supporting pads 13, whilst the provision of the gap 12 along the majority of the extension of the facing surfaces of the auxiliary plate 8 and of the workpiece P guarantees proper coupling of the workpiece P to the plate 8, without requiring adoption of restricted production tolerances throughout the extension of
10 the coupling surfaces of the workpiece P and of the auxiliary workpiece-holder plate 8.

In use, the magnetic plate 2 is activated by means of temporary electrical supply whenever a workpiece P is received on the workpiece-holder plate 6 and on the magnetic plate 2 and is to be clamped thereon. Activation of the magnetic
15 plate causes magnetization of the workpiece-holder plate 8 and consequent clamping of the workpiece P. The gap 12 between the facing surfaces of the workpiece-holder plate 8 and of the workpiece P does not jeopardize mutual magnetic clamping, given that it is of a small size. During machining of the workpiece P in a machine tool, the workpiece P is referenced in position in a
20 precise and rigorously determined way so that there exists the certainty that the control system of the machine tool is able to govern the machining operations in an equally precise and determined way. Upon completion of the machining process, the magnetic plate 2 is demagnetized, once again by means of a temporary electrical supply so that the machined workpiece P can be unloaded.

25 Of course, the invention can be applied with any orientation of the magnetic plate, in particular both with the magnetic plate set horizontally and with the magnetic plate set vertically. In the present description, the terms "top" and "bottom" are used with reference to a horizontal orientation of the magnetic plate, but are not to be interpreted in a limiting sense. For example, in the case of
30 vertical orientation of the magnetic plate, by "top surface" and "bottom surface" of the workpiece-holder plate is meant the opposite surfaces of the workpiece-holder plate that are, respectively, furthest from and closest to the magnetic plate.

Finally, it is evident that, without prejudice to the principle of the invention, the details of construction and the embodiments may vary widely with
35 respect to what is described and illustrated herein purely by way of example,

without thereby departing from the scope of the present invention as defined in the annexed claims.

CLAIMS

1. A magnetic device for gripping and clamping a workpiece in a machining unit or on a machining line, said device comprising a magnetic plate (2) of the type including a distribution of high-energy permanent-magnet modules (3), which can be electrically activated, said plate (2) having two plane and opposite main surfaces (5, 6), giving out onto which are the poles of said permanent-magnet modules (3),

wherein said magnetic device further comprises:

- an auxiliary workpiece-holder plate (8), made of ferromagnetic material, having a base surface (9) resting on a main surface (6) of the magnetic plate (2) and a top surface (10) for receiving the workpiece (P) thereon; and

- means for precise referencing in position of the workpiece (P) on the auxiliary workpiece-holder plate (8),

characterized in that said referencing means comprise:

- at least two locating pins (14) carried by said workpiece-holder plate (8) and having axes (14a) orthogonal to said main surface (6) of the magnetic plate (2), said locating pins being prearranged for being received within seats (15) formed in the workpiece (P) so as to enable a precise referencing of the position of the workpiece (P) with respect to the auxiliary workpiece-holder plate (8) in the plane of the main surface (6) of the magnetic plate (2),

said device being further characterized in that:

said auxiliary workpiece-holder plate (8) has a top surface (10) shaped in a way complementary to the surface (11) of the workpiece (P) that is to rest thereon;

and

said top surface (10) of the auxiliary workpiece-holder plate (8) has a plurality of supporting pads (13) for resting of corresponding portions of the bottom surface (11) of the workpiece (P) in such a way that the bottom surface (11) of the workpiece (P) and the top surface (10) of the auxiliary workpiece-holder plate (8) are kept slightly set apart from one another for most of their extension.

2. The magnetic device according to Claim 1, characterized in that it comprises a covering shroud (16) for protection of the magnetic plate (2), having a metal-sheet structure made of non-ferromagnetic material, with a top wall (16a) resting on the main top surface (6) of the magnetic plate (2) and having an

opening (16b), the boundary of which follows the perimeter of the base surface of said auxiliary workpiece-holder plate (8) so as to enable said auxiliary workpiece-holder plate (8) to project through said opening (16b).

FIG. 1

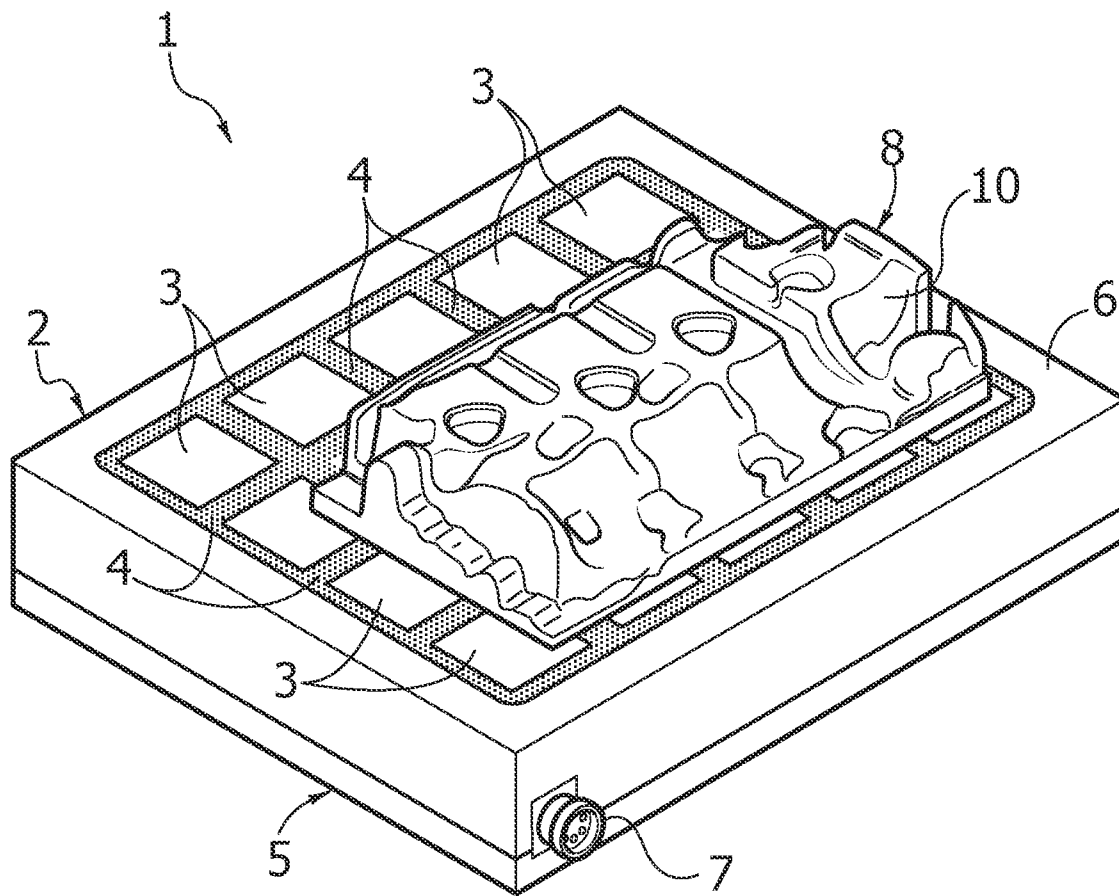


FIG. 2

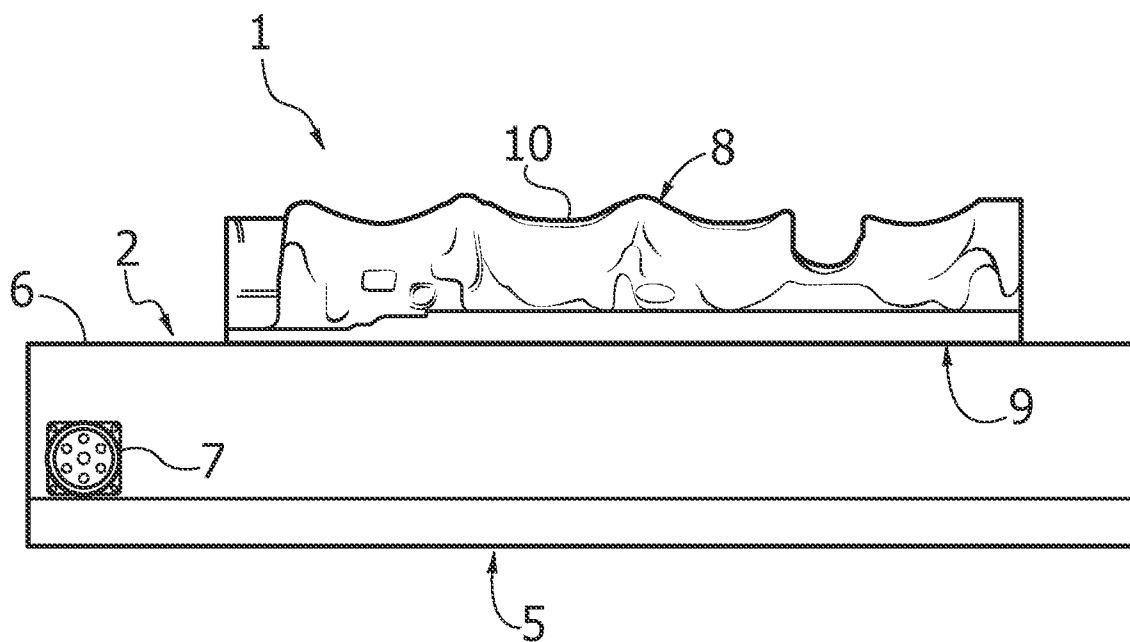


FIG. 3

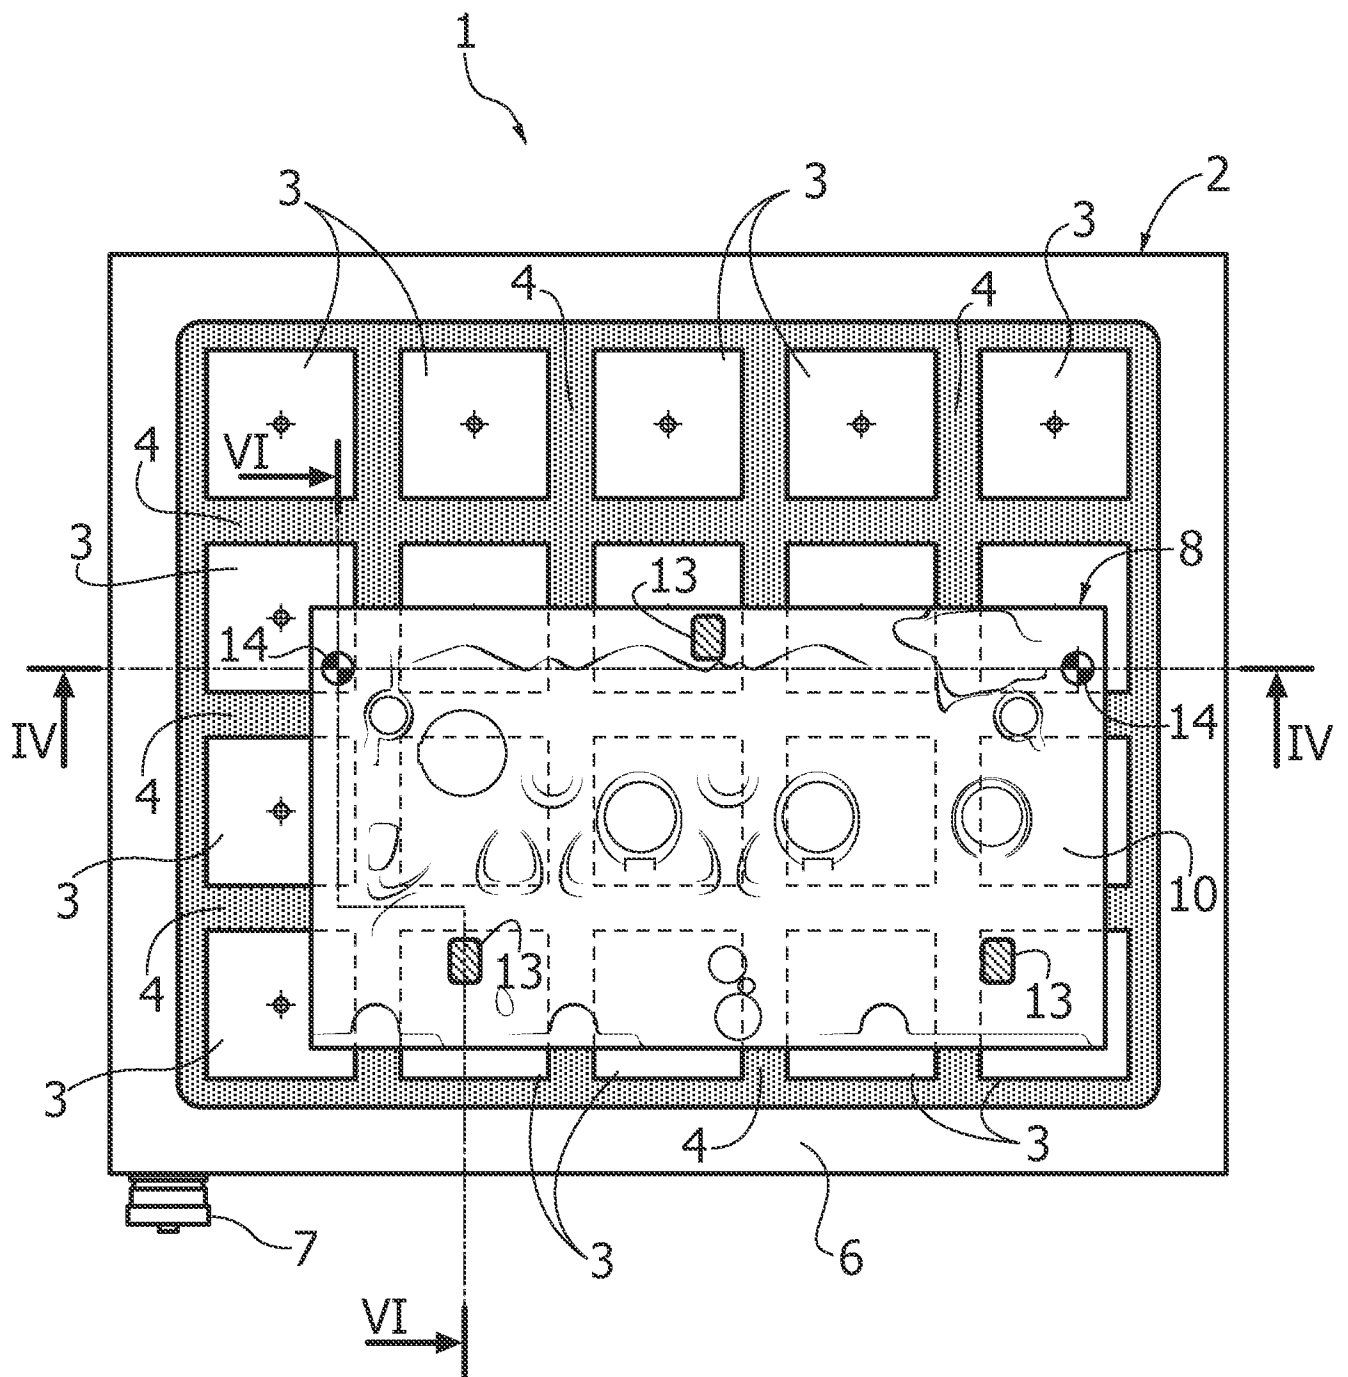


FIG. 4

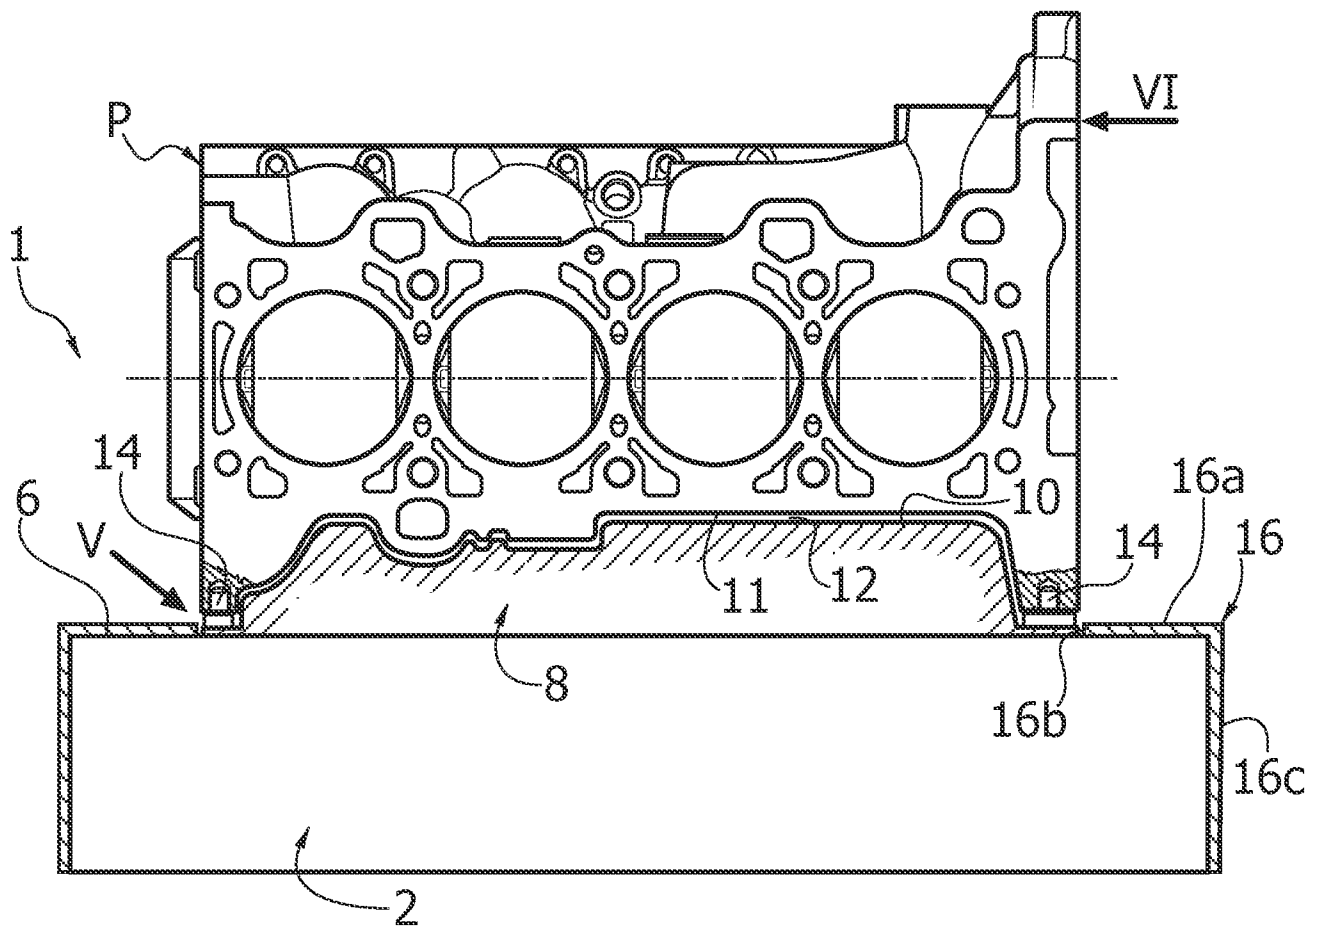


FIG. 5


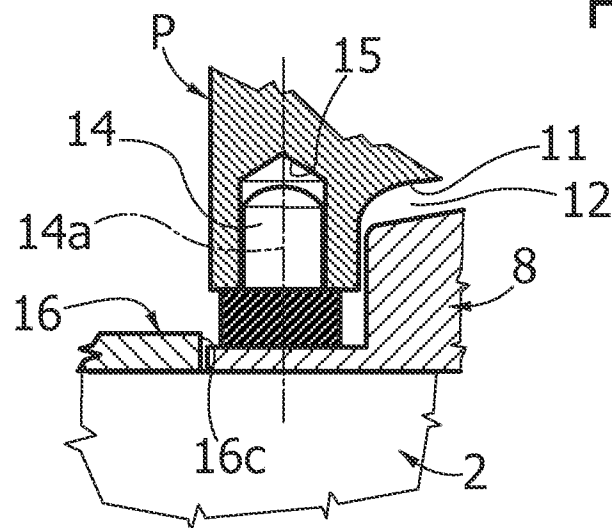


FIG. 6

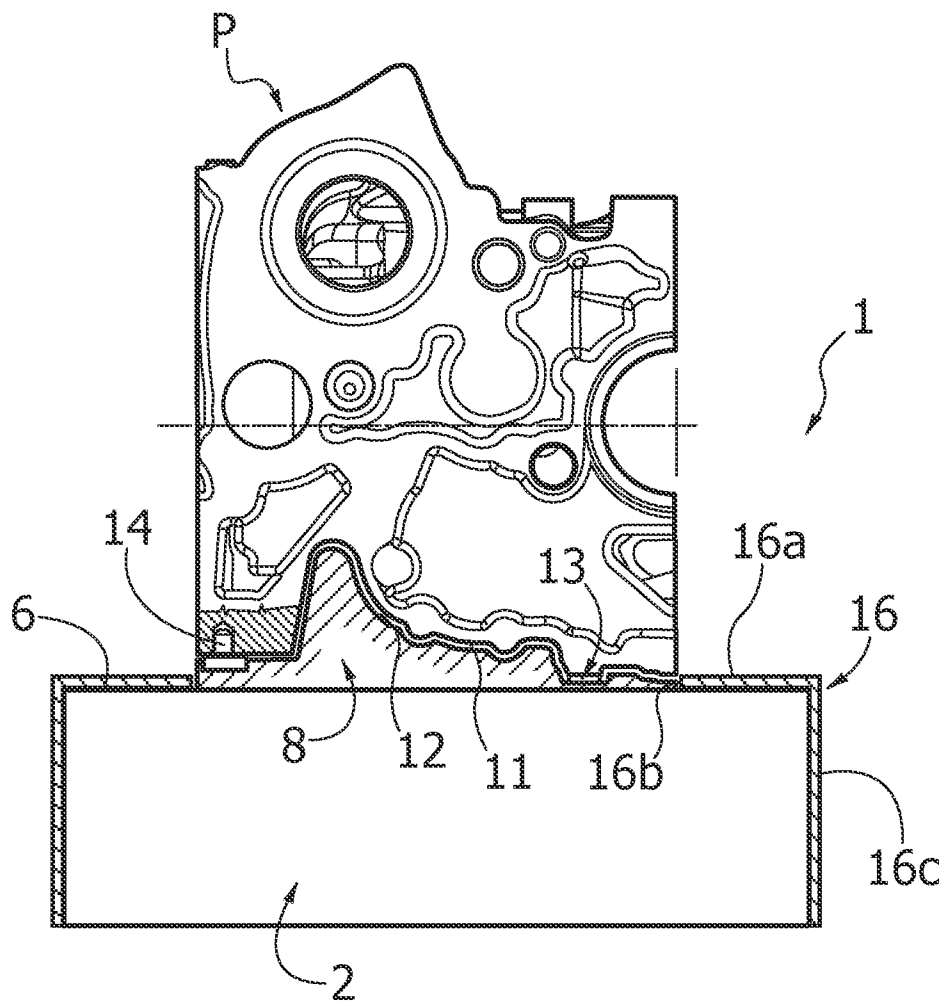

INTERNATIONAL SEARCH REPORT

International application No

PCT/IB2011/054957

A. CLASSIFICATION OF SUBJECT MATTER

INV. B23Q3/154

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B23Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 777 463 A (CORY MICHAEL L [US] ET AL) 11 October 1988 (1988-10-11) figure 1	1,2
A	----- US 3 837 274 A (ZACCARD E) 24 September 1974 (1974-09-24) figures 2,3,4 -----	1,2



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

17 January 2012

Date of mailing of the international search report

25/01/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Müller, Andreas

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2011/054957

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4777463	A	11-10-1988	CA 1273370 A1 28-08-1990
			DE 3829814 A1 06-04-1989
			DE 8811101 U1 20-10-1988
			FR 2620957 A1 31-03-1989
			GB 2210509 A 07-06-1989
			IT 1229835 B 13-09-1991
			JP 1109037 A 26-04-1989
			JP 2853858 B2 03-02-1999
			US 4777463 A 11-10-1988

US 3837274	A	24-09-1974	NONE
