



(86) Date de dépôt PCT/PCT Filing Date: 1999/11/04
(87) Date publication PCT/PCT Publication Date: 2000/05/18
(85) Entrée phase nationale/National Entry: 2001/05/04
(86) N° demande PCT/PCT Application No.: SE 99/01982
(87) N° publication PCT/PCT Publication No.: WO 00/28253
(30) Priorité/Priority: 1998/11/06 (98850172.2) EP


(51) Cl.Int.⁷/Int.Cl.⁷ F16L 21/035

(71) Demandeur/Applicant:
LINDAB AB, SE

(72) Inventeurs/Inventors:
PERSSON, TOMAS, SE;
LENNARTSSON, KENNETH, SE;
ANDERSSON, PONTUS, SE;
MATTSSON, LARS-AKE, SE

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : ELEMENT TUBULAIRE AVEC DISPOSITIF D'ETANCHEITE ET SON PROCEDE DE FABRICATION
(54) Title: TUBULAR ELEMENT WITH SEALING MEANS AND A METHOD FOR MANUFACTURING THE TUBULAR ELEMENT

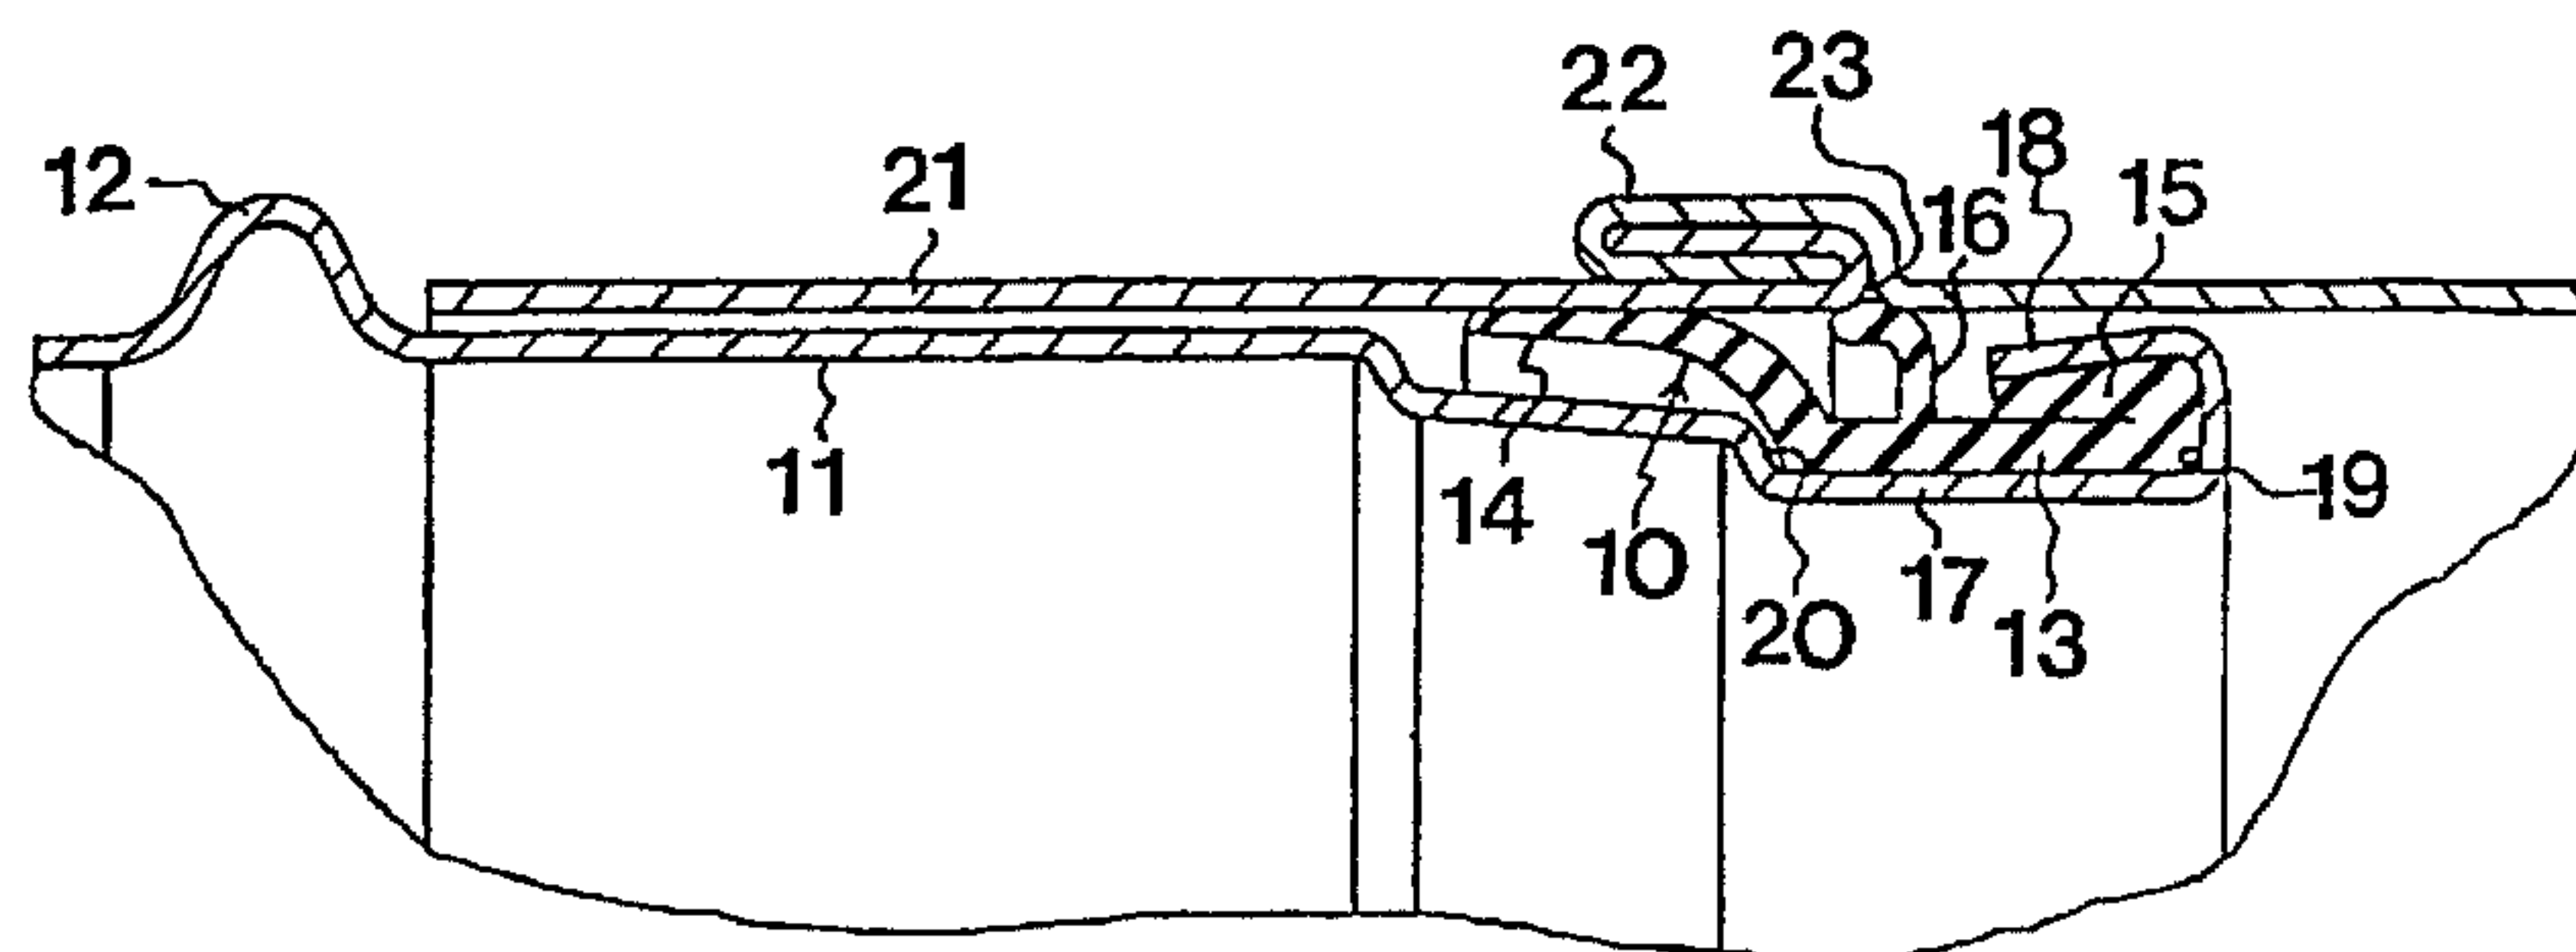

(57) **Abrégé/Abstract:**

A tubular element has a sealing ring (10) mounted at an end of the tubular element (11). The sealing ring has a base (13) clamped against the outer surface of the tubular element. Further, the sealing ring has a sealing lip (14) adapted to seal against an inner surface of an outer tube (21), in which the tubular element is inserted. The base (13) is disposed in a groove (17) which is formed in the wall of the tubular element (11). The sealing ring (10) has a further lip (15) which is positioned adjacent to the end of the tubular element (11) and which is bent down and clamped against the base (13) by means of the end portion (18), thereby providing secure fastening of the sealing ring (10). The sealing ring (10) is fastened by a method involving bending of the end portion (18) of the tubular element (11) together with the further lip (15).



**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : F16L 21/035	A1	(11) International Publication Number: WO 00/28253 (43) International Publication Date: 18 May 2000 (18.05.00)
---	-----------	--

(21) International Application Number: PCT/SE99/01982

(22) International Filing Date: 4 November 1999 (04.11.99)

(30) Priority Data:
98850172.2 6 November 1998 (06.11.98) EP(71) Applicant (for all designated States except US): LINDAB AB
[SE/SE]; S-269 82 Båstad (SE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): MATTSSON, Lars-Åke
[SE/SE]; Pl 6099, S-269 96 Båstad (SE). ANDERSSON,
Pontus [SE/SE]; Pollengatan 22, S-262 54 Ängelholm
(SE). LENNARTSSON, Kenneth [SE/SE]; Junkersgatan
14, S-260 93 Torekov (SE). PERSSON, Tomas [SE/SE];
Flädersgatan 2, S-266 31 Munka Ljungby (SE).(74) Agent: AWAPATENT AB; P.O. Box 5117, S-200 71 Malmö
(SE).


(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

With amended claims.

(54) Title: TUBULAR ELEMENT WITH SEALING MEANS AND A METHOD FOR MANUFACTURING THE TUBULAR ELEMENT

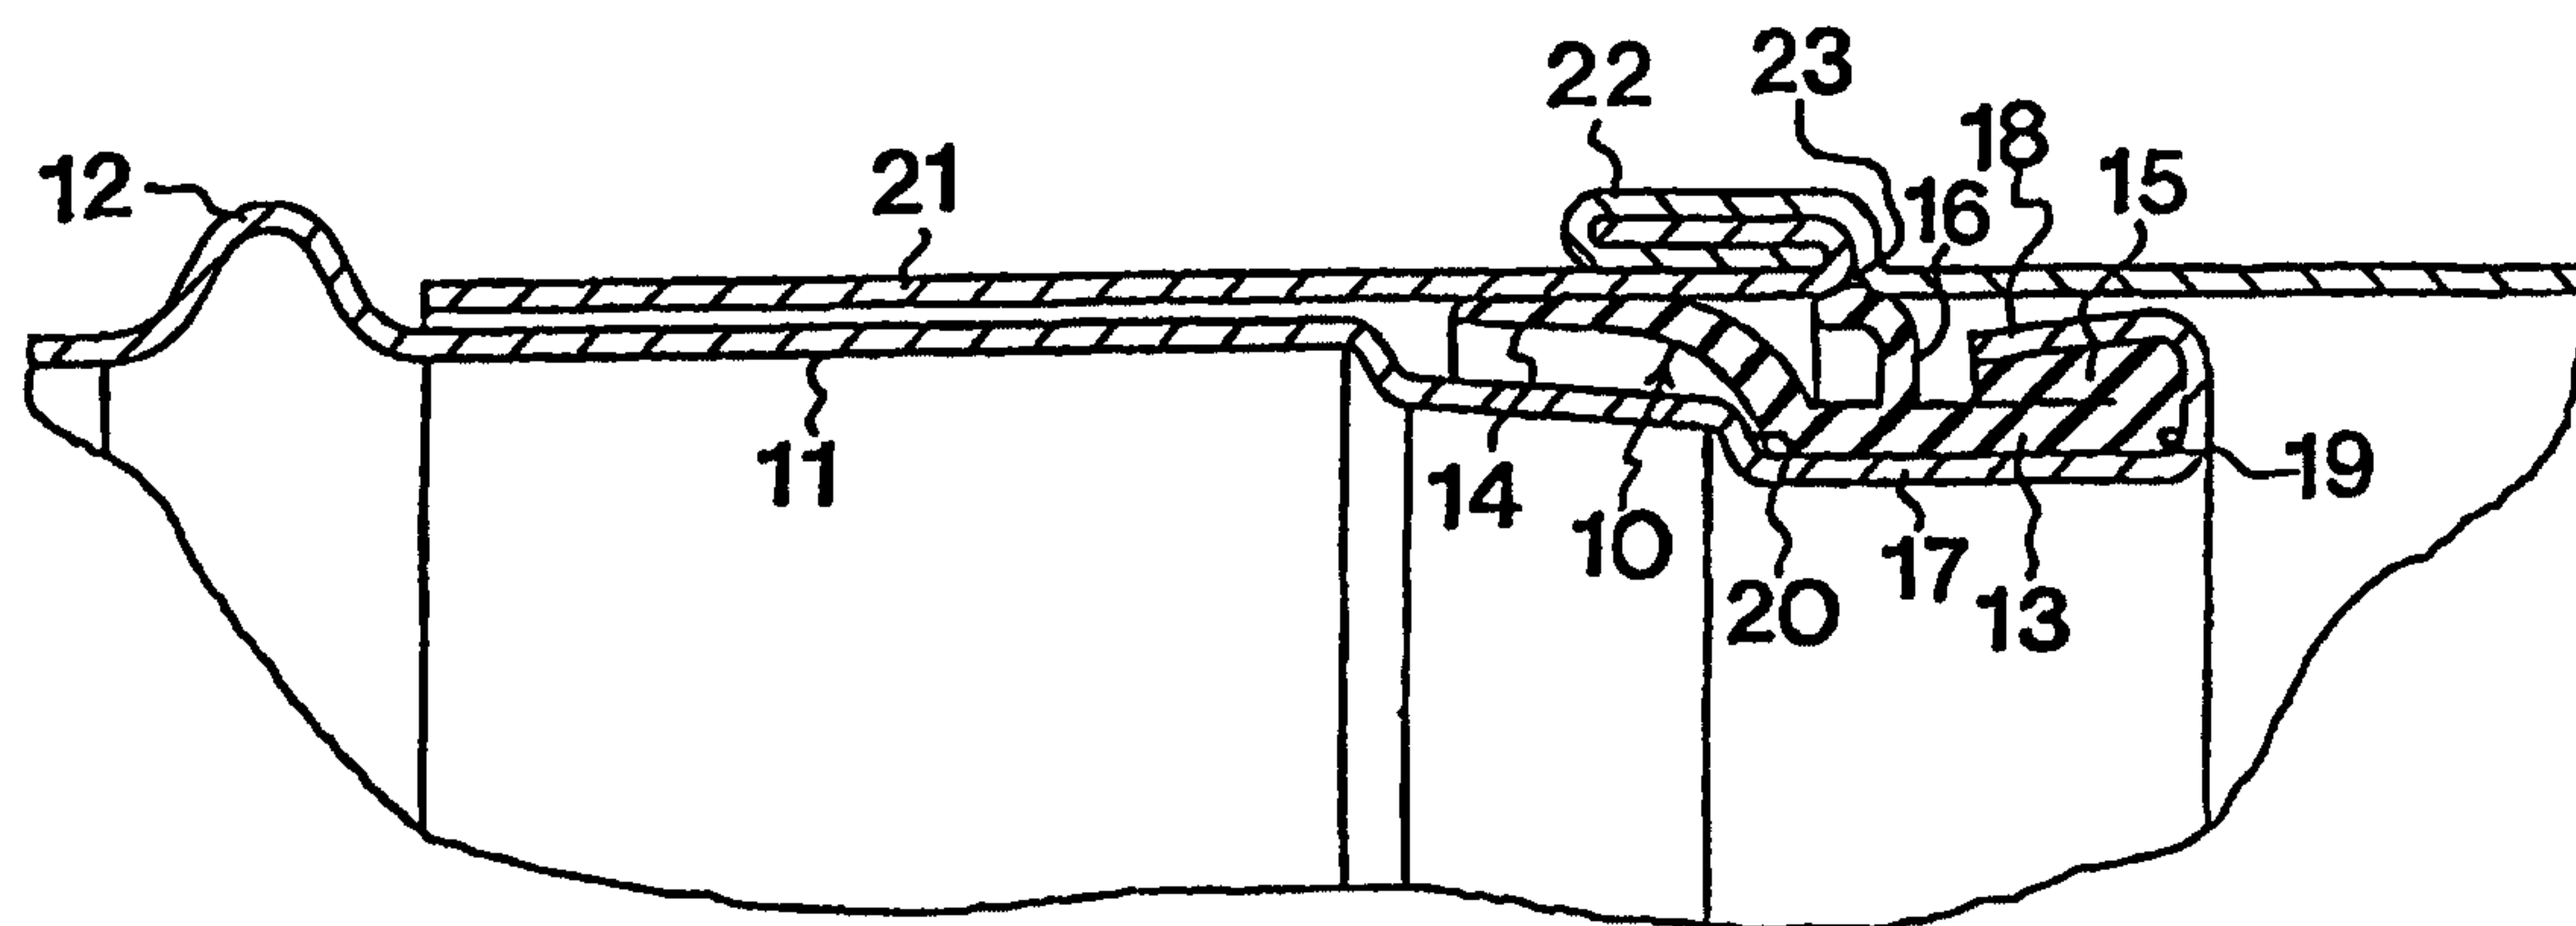

(57) Abstract

A tubular element has a sealing ring (10) mounted at an end of the tubular element (11). The sealing ring has a base (13) clamped against the outer surface of the tubular element. Further, the sealing ring has a sealing lip (14) adapted to seal against an inner surface of an outer tube (21), in which the tubular element is inserted. The base (13) is disposed in a groove (17) which is formed in the wall of the tubular element (11). The sealing ring (10) has a further lip (15) which is positioned adjacent to the end of the tubular element (11) and which is bent down and clamped against the base (13) by means of the end portion (18), thereby providing secure fastening of the sealing ring (10). The sealing ring (10) is fastened by a method involving bending of the end portion (18) of the tubular element (11) together with the further lip (15).

TUBULAR ELEMENT WITH SEALING MEANS AND A METHOD FOR
MANUFACTURING THE TUBULAR ELEMENT

Technical Field

The present invention relates to a tubular element for use in a fluid-conducting duct system, in particular a ventilation duct system, and a method for manufacturing
5 the tubular element.

Background Art

When connecting fluid-conducting duct elements, especially in ventilation duct systems, it is important that the joints between the tubular elements be sufficiently sealed. US-A-3,955,834 discloses various modes
10 of providing sealing means in the joint between a tube connector inserted in and interconnecting two tubes. Figs 3-9 and 13-15 of this US patent of 1976 show how an external, circumferential, flexible sealing ring having
15 L-shaped cross-section is mounted at the end of a tubular element. The sealing ring is placed with its base abutting the outer surface of the tubular element, whereupon the free end portion of the tubular element is bent rearwardly outwards and turned back towards the wall of the
20 tubular element. The sealing ring has a sealing lip radially extending away from the base and adapted to seal against an inner surface of an outer tube, in which the tubular element is inserted (see Fig. 8).

This basic method of mounting the sealing ring at
25 the end of a tubular element is still used in practice, as is shown in the Swedish-language catalogue "Veloduct[®], Cirkulärt kanalsystem" issued in 1997 by ABB Ventilation Products AB, Division Veloduct. On p. 2 of this catalogue, there is shown how a sealing ring with L-shaped
30 cross-section is fastened by the bending and clamping operation described above. This known technique, which is schematically shown in Fig. 1 of the appended draw-

ings, has however several disadvantages which will be related below.

The base of the L-shaped sealing ring is placed on an annular, circumferential step which protrudes radially outwards. This step leads to various drawbacks related to the mounting of the sealing ring as well as the structure of the sealing ring and its manufacture. When mounting the sealing ring on the tubular body, it is difficult to put the base on the raised step. Normally, this is a manual operation and the person mounting the ring often has to adjust the sealing ring on the raised step before the bending operation. Due to the raised step, the sealing ring has a tendency to slide inwardly on the tubular body during the bending of the end portion of the tubular body. This sliding movement may jeopardise the bending and clamping operation and thereby prevent safe fastening of the sealing ring. The bulge on the front end of the sealing ring base is normally not enough to prevent this sliding, especially in cases where the sealing ring material is relatively soft.

In practice, it has also been found that this known L-shaped sealing ring has special drawbacks for tubes of a large diameter, say exceeding about 300 mm. For tubular elements of such a large diameter, the radial dimension of the sealing lip is larger than the axial dimension of the base. Such sealing rings have a tendency to "tilt" about 90°, which means that the sealing ring is abutting the wall of the tubular body whereas the sealing ring base is directed radially outwards from the tubular wall. This misplacement has to be corrected manually in mounting.

The bulge at the free end of the sealing ring base makes it difficult to produce the sealing ring which consists of rubber. Due to the bulge, special tooling has to be used which involve specific drawbacks. The bulge makes it hard to achieve proper release from the mould. Espe-

cially when the sealing ring is injection moulded, the bulge is disadvantageous.

Thus, there is a need for a tubular element having improved sealing means, as well as a new method for manufacturing such a tubular element.

Summary of the Invention

An object of the present invention is to eliminate the disadvantages mentioned above and to provide a tubular element with improved sealing means.

10 A further object of the invention is to provide a method of manufacturing such an improved tubular element.

A specific object of the invention is to provide an improved technique for reliable fastening of the sealing means on the tubular body.

15 These and other objects, which will appear from the following, have now been achieved by a tubular element having the features defined in appended claim 1. The objects have also been achieved by a method comprising the steps defined in appended claim 20.

20 Preferred embodiments and variants of the invention are recited in the appended subclaims.

Since the sealing ring of the invention is disposed in a groove, it is far more easy to fix the same before the fastening operation compared to the known sealing ring placed on a raised step. Should the sealing ring of the invention for some reason be placed inaccurately before the bending operation, that is partially outside the groove, this is easily remedied. The misplaced sealing ring is only to be somewhat rotated, whereby the sealing ring base automatically finds its way into the groove.

30 The sealing ring base is disposed in the groove between defined shoulders of the same, which means that the sealing ring is safely kept in place during the fastening operation.

Thanks to the placement of the sealing ring base in the groove as well as the presence of the further lip,

the improved sealing ring has no tendency to "tilt" as has been the case with known sealing rings. The design of the further lip as well as its connection to the sealing ring base further promote this advantage.

5 Since the further lip is bent down and firmly clamped against the sealing ring base by means of the end portion of the tubular element, a very reliable fastening of the sealing ring is achieved.

10 The base of the new sealing ring has no bulge, which makes the ring easier to manufacture than the known sealing ring discussed above.

15 In a preferred embodiment, the bent end portion of the tubular element and the bottom of the groove define an annular, circumferential space filled with the further lip and a portion of the sealing ring base. These features makes the clamping of the sealing ring base so strong that it is almost impossible to remove the sealing ring from the bent portion by manual power.

20 Preferably, said space has a radial width which decreases axially inwards from the end of the tubular element. This feature further enhances the reliable fastening of the sealing ring.

25 It is preferred that the sealing ring has a substantially U-shaped cross-section, the flanges of which form the sealing lip and the further lip, respectively. This design of the sealing ring enhances the stiffness of the same, which in turn contributes to secure fastening of the sealing ring in the groove.

30 In a further preferred embodiment, the sealing ring has at least one intermediate sealing lip which is disposed between the sealing lip and the further lip and which is intended to provide an additional sealing against the inner surface of the outer tube, into which the tubular element is inserted.

35 Corresponding advantages are achieved by the method of the invention compared to the known methods discussed by way of introduction. The mode of manufacturing a tubu-

lar element having an improved sealing means can be reduced into practice by means of inexpensive positioning and folding equipment which makes it possible to automate the fastening operations.

5 Brief Description of the Drawings

The invention and its many advantages will now be further described, reference being made to the accompanying schematic drawings showing some presently preferred, exemplifying embodiments.

10 Fig. 1 is a partial cross-section of a wall of a tubular element having a prior-art sealing ring.

Figs 2-5 illustrate, in cross-sections corresponding to Fig. 1, the mounting of a sealing ring on a tubular element according to a first embodiment of the invention.

15 Fig. 6 shows, on a larger scale, a partial section of a tubular element provided with improved sealing means of the invention and inserted in an outer tube.

Figs 7-8 show a tubular element with a sealing ring according to the first embodiment of the invention.

20 Fig. 9 shows the sealing ring of the first embodiment separately and in perspective.

Fig. 10 shows, on a larger scale, a cross-section of the sealing ring of Fig. 9.

25 Fig. 11 shows separately and in perspective a sealing ring according to a second embodiment of the invention.

Fig. 12 shows, on a larger scale, a cross-section of the sealing ring of Fig. 11.

30 Figs 13-16 illustrate, in cross-sections corresponding to Figs 2-5, the mounting of a sealing ring according to a third embodiment of the invention.

Description of Preferred Embodiments

35 Fig. 1 shows a wall portion 1 of a tubular element and a known L-shaped sealing ring having a radial sealing lip 2 and a base 3. The wall portion 1 has a raised step 4 on which the base 3 is placed. The base 3 has at its free end a bulge 5, around which an end portion 6 of the

wall 1 is bent in a manner known per se. This sealing means 2, 3 has the drawbacks mentioned above.

Figs 2-5 show how a sealing ring generally designated 10 is mounted on a tubular element 11 having a radial, circumferential bead 12. The sealing ring 10 of this first embodiment has a base 13 and three lips 14-16 radially extending outwardly away from the base 13. The inner lip is a sealing lip 14 adapted to seal against an inner surface of an outer tube, in which the tubular element 11 is inserted (see Fig. 6). The outer projection or lip 15 is lower than the sealing lip 14 and takes part in the fastening of the sealing ring 10 as will be described below. The intermediate sealing lip 16 provides for additional sealing against the inner surface of the outer tube (Fig. 6).

In manufacturing the tubular element 11 with improved sealing means, a circumferential groove 17 is formed in the wall of the tubular element 11 (Fig. 3). A free end portion of the tubular element 11 is bent to form a radially extending flange 18 which defines a shoulder 19 which together with an opposite, spaced shoulder 20, forms the groove 17.

In a following step, the sealing ring 10 is axially displaced along the outside of the tubular element 11 (arrow A) from its initial position (Fig. 2) and placed in the groove 17. The axial displacement of the sealing ring 10 is promoted by an inclined portion 11a of the wall of the tubular element 11, and the sealing ring base 13 is securely set in the groove 17. The wall portion 11a is inclined towards the groove 17. The axial width of the groove 17 matches the axial width of the sealing ring base 13.

The opposite shoulders 19, 20 of the groove 17 axially abut the transitions between the sealing ring base 13 and the sealing lip 14 and the further lip 15, respectively. The sealing ring base 13 has no bulge as has the prior-art sealing ring shown in Fig. 1, but has a

planar surface in abutment with the planar bottom of the groove 17. In this position (Fig. 4), the further lip 15 extends adjacent to and substantially in parallel with the flange 18.

5 In a final step, the flange 18 is bent further back towards the wall of the tubular element 11 so that the further lip 15 is bent down together with the flange 18 and clamped against the sealing ring base 13 (Fig. 5). The radial height of the further lip 15 is calculated in
10 such a way that the free end of the same is approximately radially flush with the free end of the bent flange 18 in the clamped position. The further lip 15 must not interfere with the intermediate lip 16 in the clamped position. Further, the bent flange 18 preferably extends over
15 approximately half of the axial width of the groove 17 in the clamped position. This structure results in a very secure mounting of the sealing ring 10 at the end of the tubular element 11.

 The section of Fig. 6 shows how the sealing lip 14
20 seals against the inside of an outer tube 21, in which the tubular element 11 is inserted and the free end of which is stopped by the bead 12. The outer tube 21 is a so-called helically wound lock-seam tube having a helical lock seam 22. Such tubes are commonly used in ventilation
25 duct systems.

 Due to the helical lock seam 22, there is a small helical groove 23 on the inside of the outer tube 21. The intermediate sealing lip 16 seals against the inside of the outer tube 21 and is particularly adapted to seal the
30 helical groove 23, which in certain cases may cause leakage if not sealed. Indeed, the main sealing function is of course provided by the larger sealing lip 14.

 As is clearly seen in Fig. 6, and also in Fig. 5, the bent flange 18 and the bottom of the groove 17 define
35 an annular, circumferential space filled with the further lip 15 clamped on a portion of the sealing ring base 13. This firm clamping of the further lip 15 guarantees

reliable fastening of the sealing ring 10. Preferably, as can be seen in Figs 5 and 6, the space between the flange 18 and the bottom of the groove 17 has a radial width which decreases axially inwards from the end of the tubular element 11. In other words, the space has a frustocoidal shape with its smallest radial width approximately in the middle of the groove 17 and its largest radial width adjacent to the end of the tubular element 11.

Figs 7-8 show the tubular element 11 with the sealing means 10 in accordance with the first embodiment of the invention.

Fig. 9 shows the sealing ring 10 separately, and the details of the sealing ring 10 can be seen in the cross-section of Fig. 10.

Fig. 11 shows in a view corresponding to Fig. 9 a sealing ring generally designated 30. In accordance with this second embodiment of the invention, the sealing ring 30 has two intermediate lips 16a and 16b (Fig. 12) which extend radially away from the sealing ring base 13 and which both are intended to seal against the inside of the outer tube 21 (cf. Fig. 6). The two intermediate lips 16a, 16b are parallel and mainly intended to seal the helical groove 23 on the inside of the outer tube 21. The sealing lip 14 and the further lip 15 of the sealing ring 30 are of the same design as the corresponding lips of the sealing ring 10 in the first embodiment. To provide room for the two parallel intermediate lips 16a, 16b, however, the axial dimension of the sealing ring base 13 of the modified sealing ring 30 is somewhat greater than that of the sealing ring base 13 in the first embodiment.

In Figs 13-16 which basically correspond to Figs 2-5, still another modified sealing ring 40 is shown, as well as its fastening on the tubular element 11. The sealing ring 40 in accordance with this third embodiment is a so-called double-lip sealing ring with no intermediate lip. Since the sealing ring 40 has no intermediate lip, the flange 18 can be bent in such a way that it

extends over somewhat more than half of the groove 17 as is shown in Fig. 16. This enhances the clamping effect.

All sealing rings 10, 30, 40 described herein have shown excellent results in practical tests. The drawbacks encountered when using prior-art techniques for fastening sealing rings, for instance an L-shaped sealing ring as shown in Fig. 1, are eliminated by the present invention. In these tests, certain features have been noticed. For instance, it has been found that the design of the transition between the sealing ring base 13 and the further lip 15 is of interest. This transition should define a corner portion by means of which the further lip 15 achieves a certain radial stiffness adjacent to the transition. This design guarantees that the sealing ring 10, 30, 40 is safely maintained in the groove 17 during the fastening operation as shown in Figs 2-5 and Figs 13-16, respectively. Correspondingly, it has been found that the transition between the sealing ring base 13 and the sealing lip 14 preferably defines a corner portion, by means of which the sealing lip 14 has a certain radial stiffness adjacent to the transition.

The tests have also produced good results when the further lip 15 has a thickness greater than that of the sealing lip 14. As to proper stiffness and sealing effect, it has also been observed that the thickness of the sealing lip 14 and the further lip 15, respectively, should decrease radially away from the sealing ring base 13. Since the sealing lip 14 and the further lip 15, respectively, are relatively thick adjacent to the base 13, the stiffness of the sealing ring 10, 30, 40 is promoted. Further, it is preferred that the two lips 14, 15 diverge radially away from the sealing ring base 13, which in particular makes the sealing ring 10, 30, 40 easy to produce.

Preferably, the sealing ring 10, 30, 40 is substantially U-shaped in cross-section, the flanges of which form the sealing lip 14 and the further lip 15,

respectively, and the web of which forms the base 13. The U-shaped design of the sealing ring 10, 30, 40 with its main lips 14 and 15 enhances the stiffness of the sealing ring 30 and thereby promotes secure fixing of the ring 30 in the groove 17. The base 13 of the U-shaped sealing ring 10, 30, 40 has no bulge, but is planar which makes the ring easier to manufacture than the known sealing ring shown in Fig. 1.

As to the radial height of the lips 14-16, it has been found advantageous that the further lip 15 is lower than the sealing lip 14 with respect to the sealing ring base 13. In certain applications, however, the lips 14 and 15 may also have substantially the same radial height. Further, it is preferred that the intermediate lip 16 or the intermediate lips 16a, 16b be lower than the sealing lip 14 with respect to the sealing ring base 13. In order to seal the helical groove 23 of the outer tube 21, the intermediate sealing lip(s) 16, 16a, 16b should preferably have a thickness which is less than that of the sealing ring 14. Alternatively, the thickness of the intermediate lips 16, 16a, 16b may also be substantially the same as that of the sealing lip 14, or in certain cases also somewhat thicker (not shown). Preferably, the intermediate lip(s) 16, 16a, 16b should also have a radial height with respect to the sealing ring base 13 that is substantially the same as the radial height of the further lip 15.

The sealing lip 14 is shown somewhat inclined away from the base 13, but alternatively the lip 14 may also be orthogonal to the base 13 or even somewhat inclined inwards with respect to the base (not shown). The further lip 15 may also be orthogonal as an alternative (not shown).

The sealing ring 10, 30, 40 consists of a flexible polymer material, for instance EPDM rubber. The tubular element 11 is for instance of sheet metal, as is the outer tube 21.

Finally, it should be emphasised that the invention is by no means restricted to the embodiments described above, and modifications are feasible within the scope of the invention defined by the appended claims. In particular, it should be mentioned that the number of lips of the sealing ring is not crucial and that the tubular element of the invention may be used in various applications, although ventilation duct systems are the main field of the invention. The tubular element may for instance be a connector, a bend, a T-piece or any other fitting used in a ventilation duct system.

CLAIMS

1. A tubular element for use in a fluid-conducting duct system, in particular a ventilation duct system, comprising an external, circumferential, flexible sealing ring (10; 30; 40) mounted at an end of the tubular element (11), the sealing ring having a base (13) which is clamped against the outer surface of the tubular element by means of the free end portion (18) of the tubular element, which is bent radially outwards and turned back towards the wall of the tubular element, the sealing ring further having a sealing lip (14) extending substantially radially away from said base (13) and adapted to seal against an inner surface of an outer tube (21), in which the tubular element (11) is inserted, characterised in that the base (13) of the sealing ring (10; 30; 40) is disposed in a circumferential groove (17), which is formed in the wall of the tubular element (11) and which has an axial width matching the axial width of said base (13); and that the sealing ring (10; 30; 40) has a further lip or projection (15) which is positioned adjacent to the end of the tubular element (11) and which is axially spaced from the sealing lip (14), said further lip or projection (15) extending substantially radially away from said base (13) before said turning-back of the end portion (18) of the tubular element (11), and said further lip or projection (15) being bent down and clamped against said base (13) by means of said end portion (18) by said turning-back.

2. A tubular element as claimed in claim 1, wherein said bent end portion (18) and the bottom of the groove (17) define an annular, circumferential space filled with said further lip/projection (15) and a portion of the sealing ring base (13).

06 -02- 2001

13

3. A tubular element as claimed in claim 2, wherein said space has a radial width decreasing axially inwards from the end of the tubular element (11).

4. A tubular element as claimed in any one of the preceding claims, wherein said groove (17) is defined by axially spaced shoulders (19, 20) which axially abut the transitions between the sealing ring base (13) and the further lip/projection (15) and the sealing lip (14), respectively.

5. A tubular element as claimed in any one of the preceding claims, wherein the bent end portion (18) of the tubular element (11) in the clamped position extends over approximately half of the axial width of the groove (17).

6. A tubular element as claimed in any one of the preceding claims, wherein the further lip/projection (15) is radially lower than the sealing lip (14) with respect to the sealing ring base (13) before said clamping.

7. A tubular element as claimed in any one of the preceding claims, wherein the transition between the sealing ring base (13) and the further lip/projection (15) defines a corner portion by means of which the further lip/projection (15) has a certain radial stiffness adjacent to said transition.

8. A tubular element as claimed in any one of the preceding claims, wherein the transition between the sealing ring base (13) and the sealing lip (14) defines a corner portion by means of which the sealing lip (14) has a certain radial stiffness adjacent to said transition.

9. A tubular element as claimed in any one of the preceding claims, wherein the further lip/projection (15) has a thickness greater than that of the sealing lip (14).

10. A tubular element as claimed in any one of the preceding claims, wherein the thickness of the further lip/projection (15) is decreasing radially away from the sealing ring base (13).

06 -02- 2001

14

11. A tubular element as claimed in any one of the preceding claims, wherein the thickness of the sealing lip (14) is decreasing radially away from the sealing ring base (13).

5 12. A tubular element as claimed in any one of the preceding claims, wherein the sealing lip (14) and the further lip/projection (15) diverge radially away from the sealing ring base (13) before said clamping.

10 13. A tubular element as claimed in any one of the preceding claims, wherein the surface of the sealing ring base (13) that is disposed in said groove (17) is planar, the groove (17) having a corresponding planar bottom.

15 14. A tubular element as claimed in any one of the preceding claims, wherein the sealing ring (10; 30; 40) is substantially U-shaped in cross-section before said clamping, the flanges of which form the sealing lip (14) and the further lip/projection (15), respectively.

20 15. A tubular element as claimed in any one of the preceding claims, wherein the sealing ring (10; 30; 40) has at least one intermediate sealing lip (16; 16a, 16b), which is disposed between said sealing lip (14) and said further lip/projection (15) and which extends radially away from the sealing ring base (13), said intermediate sealing lip (16; 16a, 16b) being adapted to seal against
25 the inner surface of said outer tube (21).

16. A tubular element as claimed in claim 15, wherein said intermediate sealing lip or lips (16; 16a, 16b) is/are radially lower than said sealing lip (14) with respect to the sealing ring base (13).

30 17. A tubular element as claimed in claim 15 or 16, wherein said intermediate sealing lip or lips (16; 16a, 16b) has/have a thickness which is less than that of said sealing lip (14).

35 18. A tubular element as claimed in any one of claims 15-17, wherein the sealing ring has two intermediate sealing lips (16a, 16b) which are parallel and

15

which have substantially the same radial height with respect to the sealing ring base (13).

19. A tubular element as claimed in any one of claims 15-18, wherein said intermediate lip or lips (16; 16a, 16b) has/have a radial height with respect to the sealing ring base (13) that is substantially the same as the radial height of the further lip/projection (15) before said clamping.

20. A method of manufacturing a tubular element for use in a fluid-conducting duct system, in particular a ventilation duct system; in which an external, circumferential, flexible sealing ring (10; 30; 40) is applied to the outer surface of a tubular body (11), said sealing ring having a base (13) and a sealing lip (14) extending substantially radially away therefrom; and in which the sealing ring is fastened to the tubular body by bending the free end portion (18) of the tubular body radially outwards and backwards towards the wall of the tubular body, thereby clamping the base (13) of the sealing ring (10; 30; 40) between said bent end portion (18) and said outer surface of the tubular body (11); c h a r a c - t e r i s e d in that a circumferential groove (17) is formed in the wall of the tubular body (11), said end portion (18) of the tubular body (11) being first bent to form a radially extending flange (18); that the sealing ring (10; 30; 40) is placed in said groove (17) which matches the sealing ring base (13), the sealing ring (10; 30; 40) having a further lip or projection (15) which extends substantially radially from said base (13) and which in this position extends adjacent to and substantially in parallel with the radial flange (18); and that the flange (18) is then bent further back towards the wall of the tubular body (11) so that the further lip or projection (15) is bent down together with the flange (18) and clamped against the sealing ring base (13).

21. A method as claimed in claim 20, wherein the sealing ring (10; 30; 40) is axially displaced from its

16

initial position on the tubular body (11) to its position in the groove (17).

22. A method as claimed in claim 20 or 21, wherein an annular, circumferential space is defined by the bent clamping flange (18) and the bottom of the groove (17), said space being filled with said further lip/projection (15) and a portion of the sealing ring base (13).

23. A method as claimed in claim 22, wherein said space is formed with a radial width which decreases axially inwards from the end of the tubular element (11).

24. A method as claimed in any one of claims 20-23, wherein said flange (18) is bent to such an extent that in the clamped position it extends over approximately half of the axial width of the groove (17).

25. A tubular element for use in a ventilation duct system, comprising an external, circumferential, flexible sealing ring (10; 30; 40) mounted at an end of the tubular element (11), the sealing ring having a base (13) which is clamped against the outer surface of the tubular element by means of the free end portion (18) of the tubular element, which is bent radially outwards and turned back towards the wall of the tubular element, the sealing ring having a main sealing lip (14) extending substantially radially away from said base (13) and adapted to seal against an inner surface of an outer tube (21), in which the tubular element (11) is inserted, characterised in that the base (13) of the sealing ring (10; 30; 40) is disposed in a circumferential groove (17) which is formed in the wall of the tubular element (11); that the sealing ring (10; 30; 40) has a further lip or projection (15) which is positioned adjacent to the end of the tubular element (11) and which is axially spaced from the main sealing lip (14), said further lip or projection (15) being clamped by means of said end portion (18) by said turning-back; and that the sealing ring (10; 30; 40) has at least one intermediate sealing lip (16; 16a, 16b), which is disposed between

SECRET

18

extends substantially radially away from the base (13) of the sealing ring before said turning-back of the end portion (18) of the tubular element (11).

34. A tubular element as claimed in any one of
5 claims 25-33, wherein said further lip/projection (15) is bent down and clamped against the base (13) of the sealing ring by means of said end portion (18) of the tubular element (11) by said turning-back.

35. A ventilation duct system, c h a r a c t e r -
10 i s e d in that it comprises tubular elements according to claims 1-19 or claims 25-34.

36. A sealing ring to be mounted on the outside of a tubular element (11) for use in a fluid-conducting duct system, said sealing ring (10; 30) having a base (13)
15 comprising a fastening section which is adapted to be clamped by an end portion (18) of the tubular element, and a sealing section having at least one sealing lip (14; 16; 16a, 16b) adapted to seal against the inner surface of an outer tube (21), in which the tubular
20 element is inserted, c h a r a c t e r i s e d in that the sealing section comprises a main sealing lip (14) extending substantially radially away from the base (13) of the sealing ring, and at least one intermediate sealing lip (16; 16a, 16b) which is disposed between the
25 main sealing lip (14) and the fastening section and which extends substantially radially away from the base (13) of the sealing ring, said intermediate sealing lip (16; 16a, 16b) being adapted to seal against the inner surface of the outer tube (21).

30 37. A sealing ring as claimed in claim 36, wherein said intermediate sealing lip (16) or sealing lips (16a, 16b) have a thickness that is less than the thickness of the main sealing lip (14).

38. A sealing ring as claimed in claim 36 or 37,
35 wherein the sealing ring has two intermediate sealing lips (16a, 16b) which are parallel.

19

39. A sealing ring as claimed in claim 38, wherein the two intermediate sealing lips (16a, 16b) have essentially the same radial height with respect to the base (13) of the sealing ring.

5 40. A sealing ring as claimed in any one of claims 36-39, wherein the base (13) of the sealing ring is adapted to be placed in a groove (16) extending circumferentially and formed in the wall of the tubular element (11).

10 41. A sealing ring as claimed in claim 40, wherein the base (13) of the sealing ring has an axial width corresponding to the axial width of the groove (15).

FIG. 1

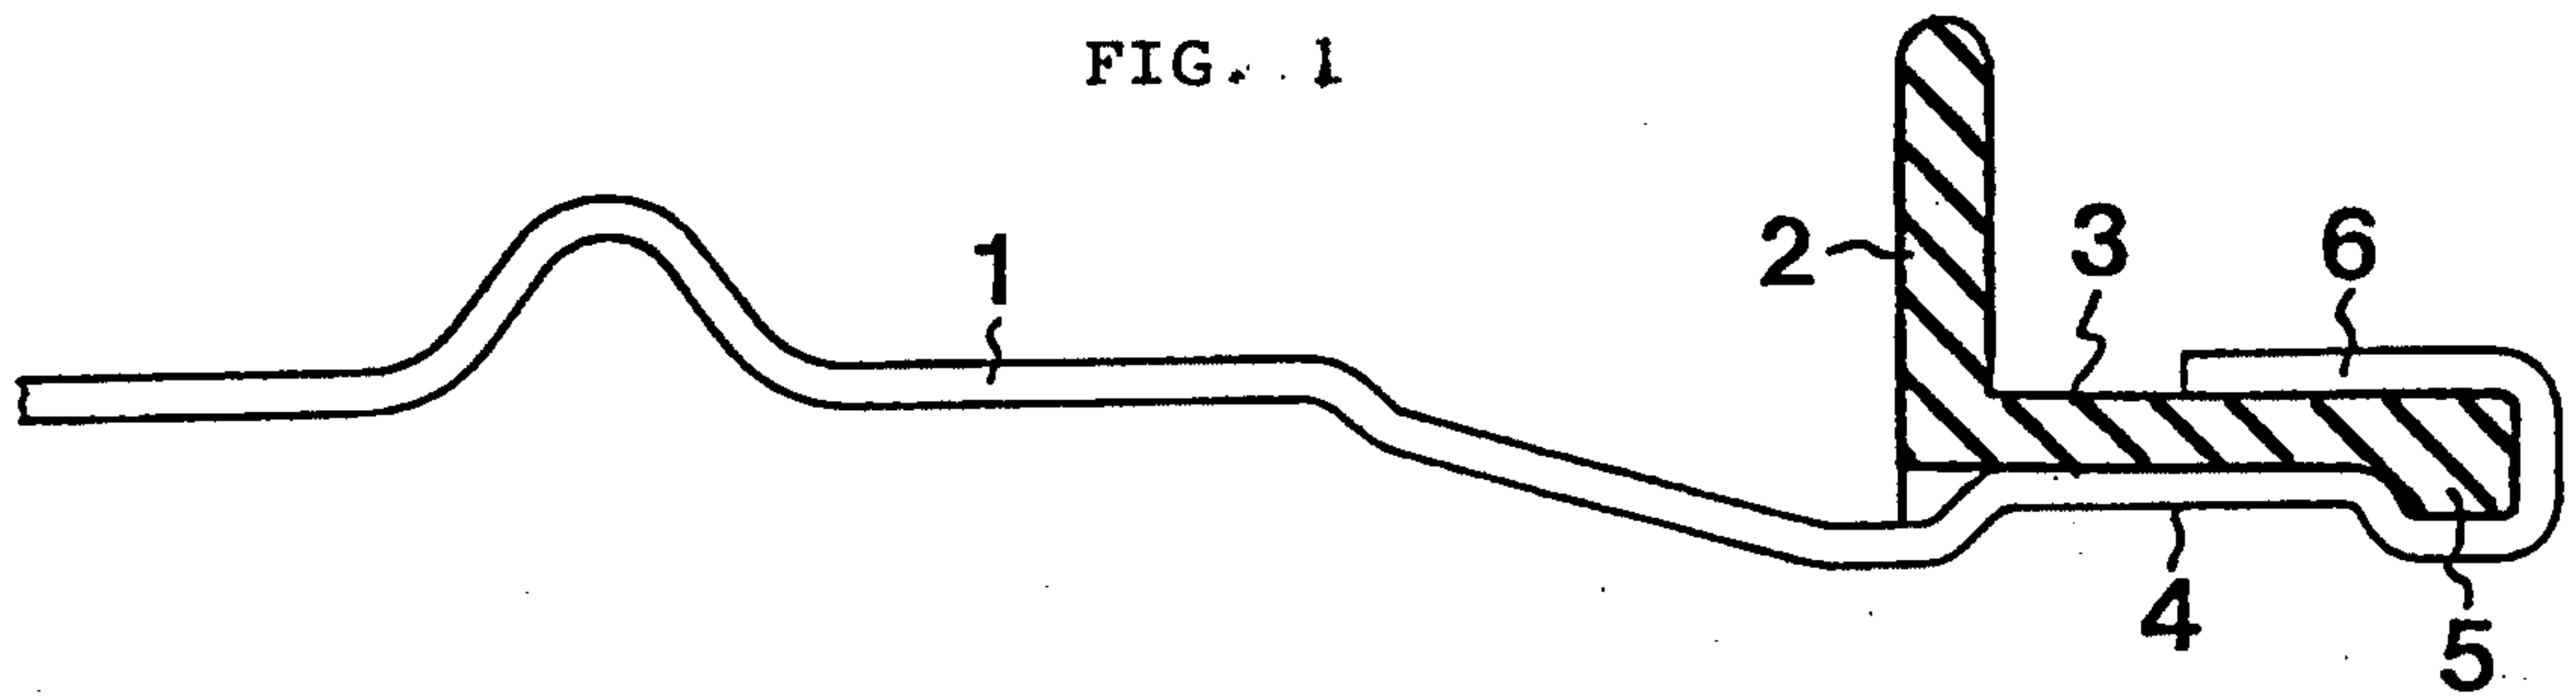


FIG 2

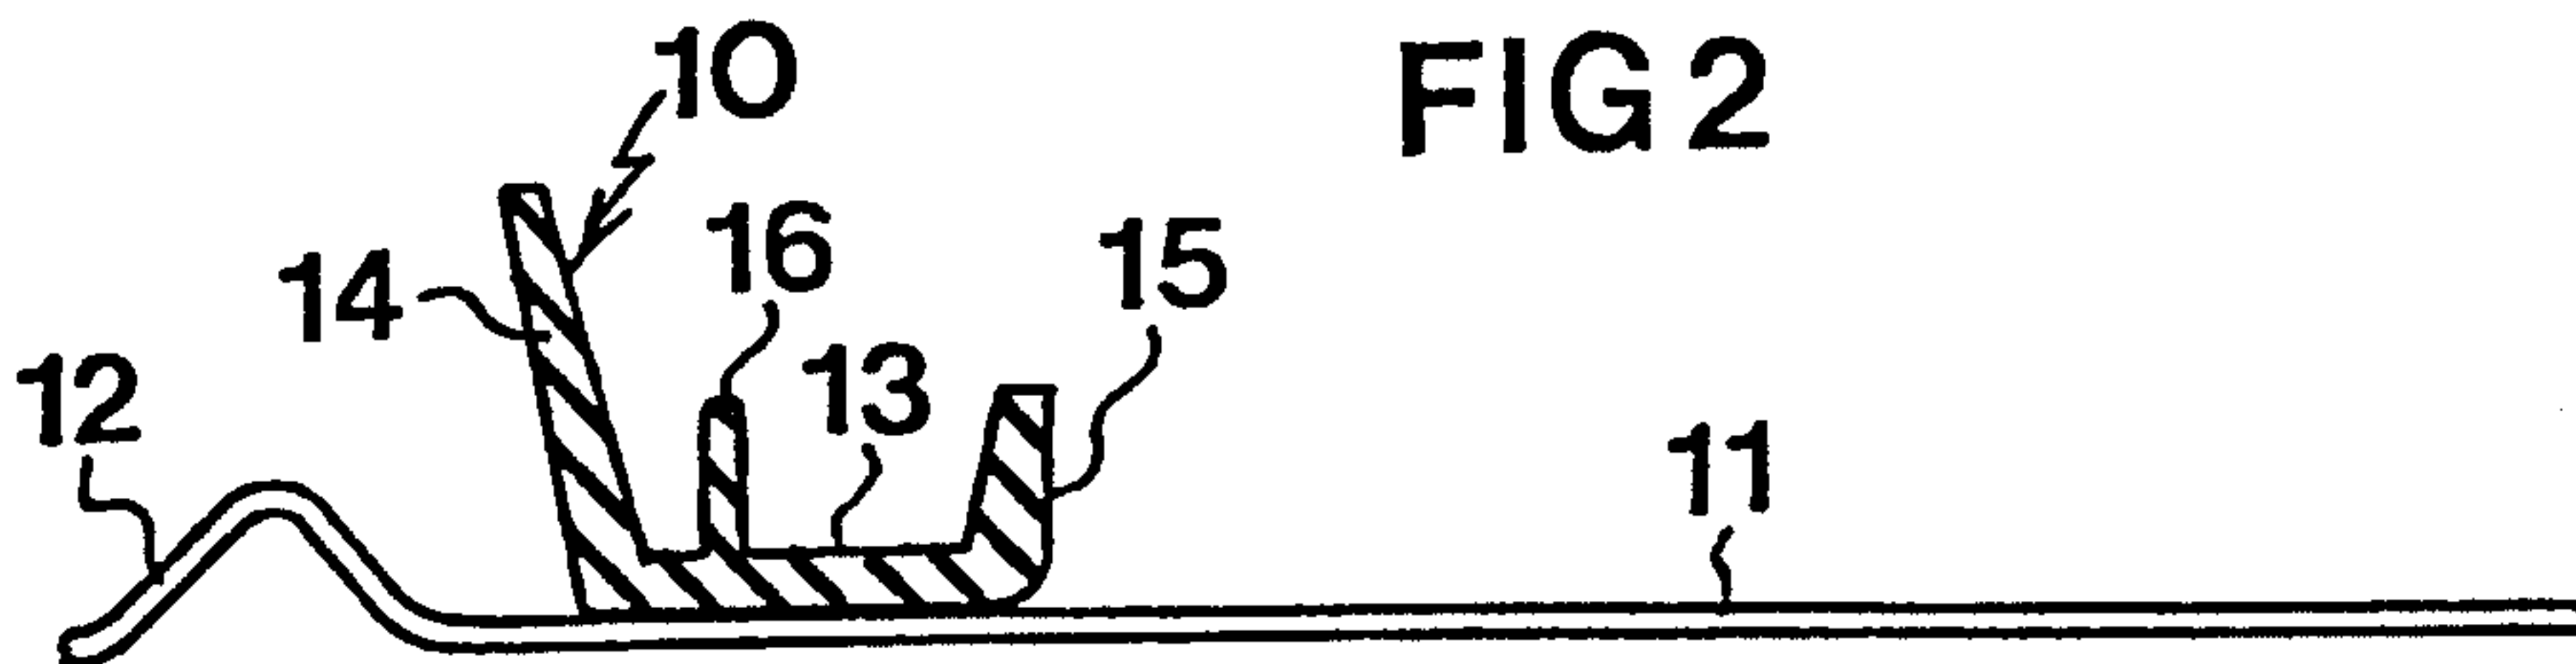


FIG 3

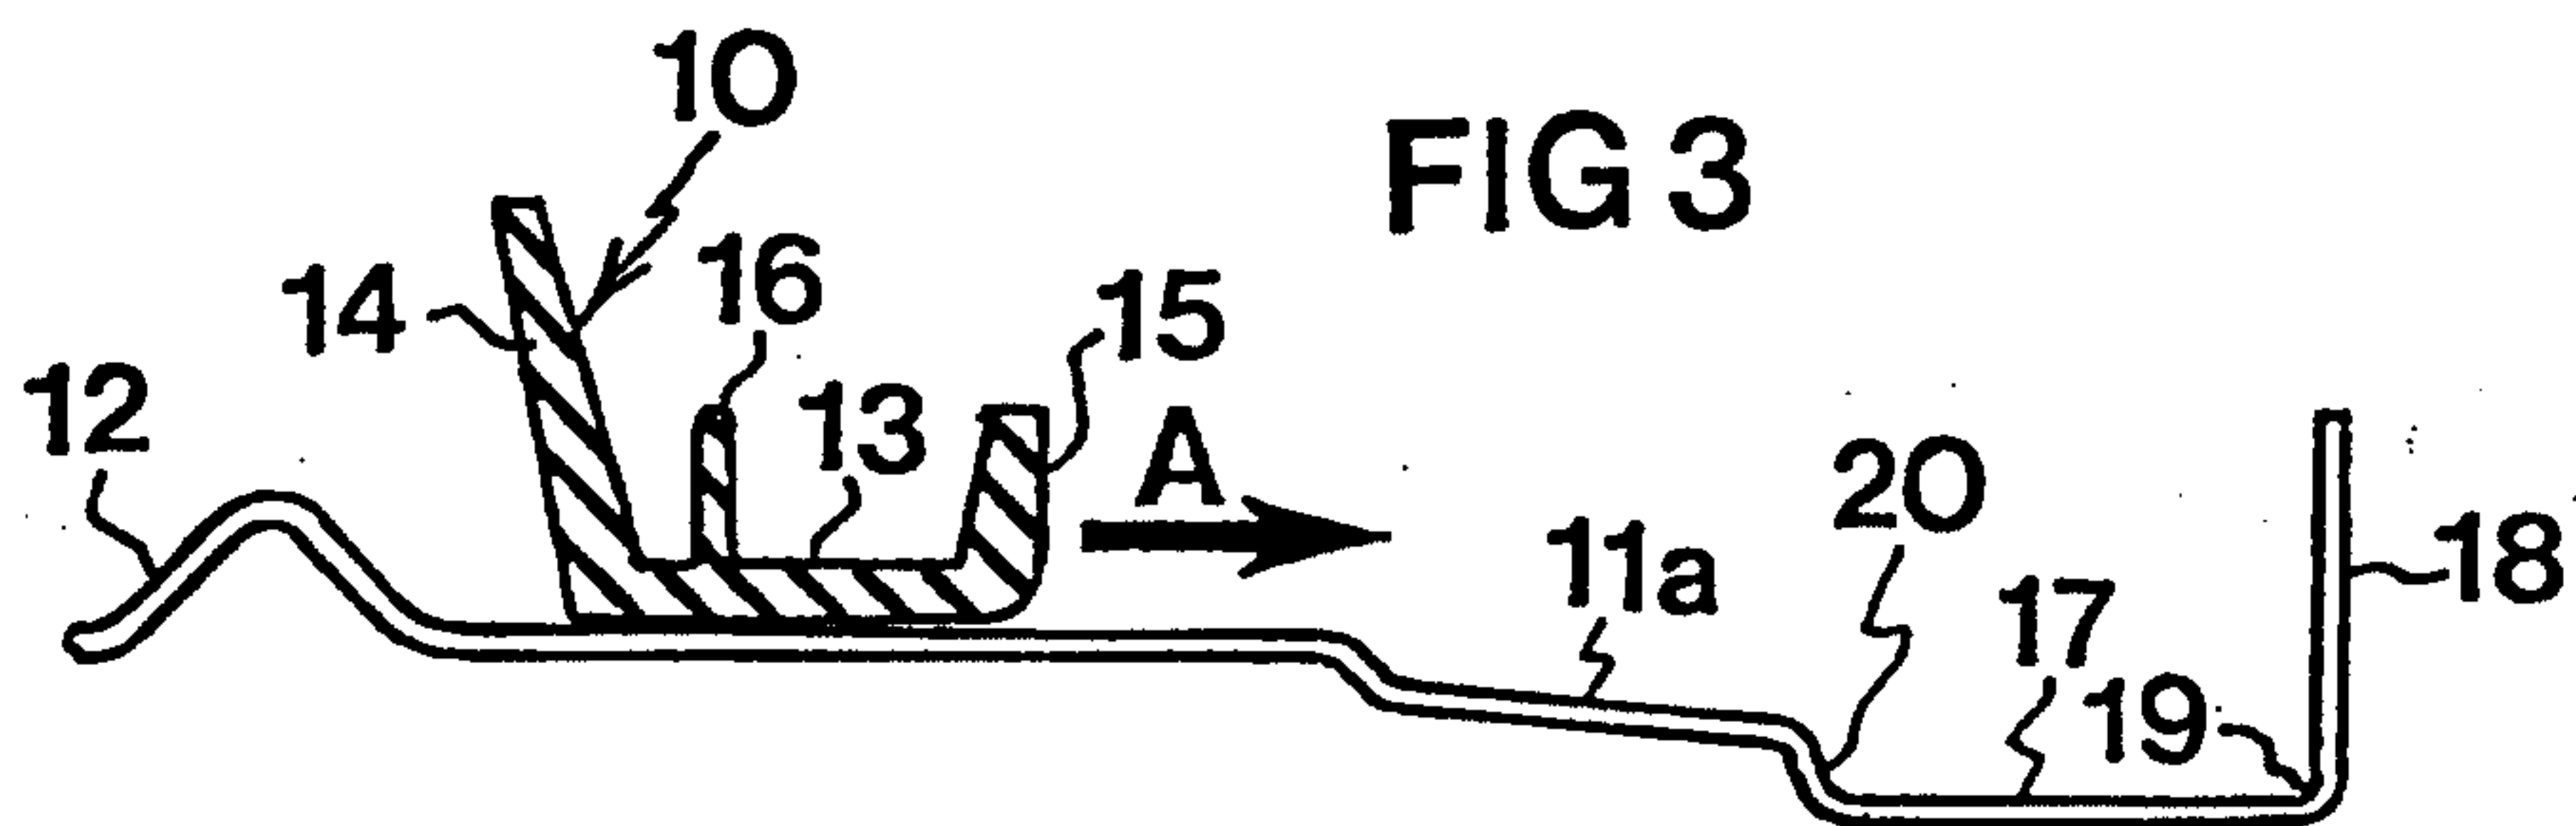


FIG 4

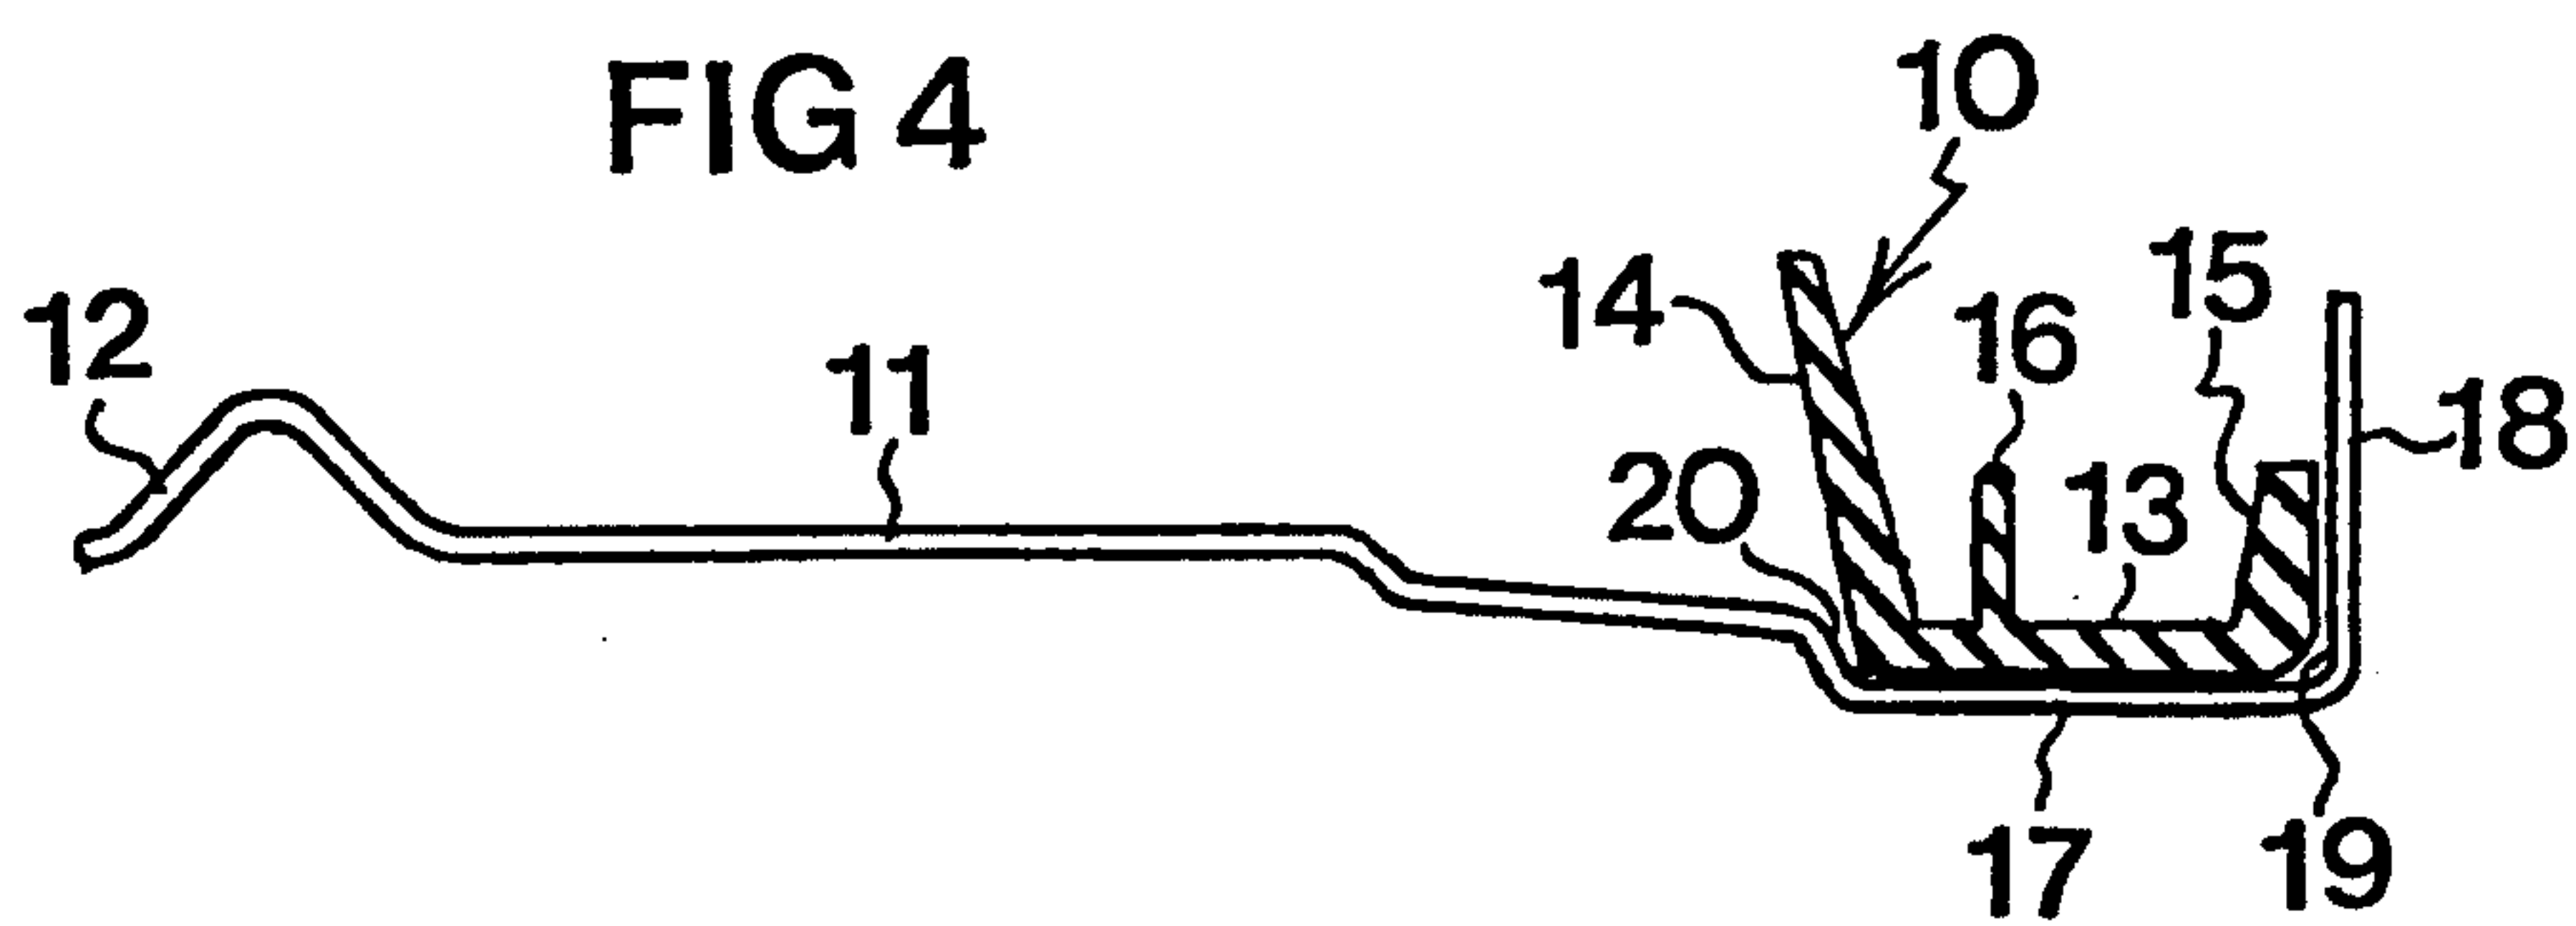


FIG.5

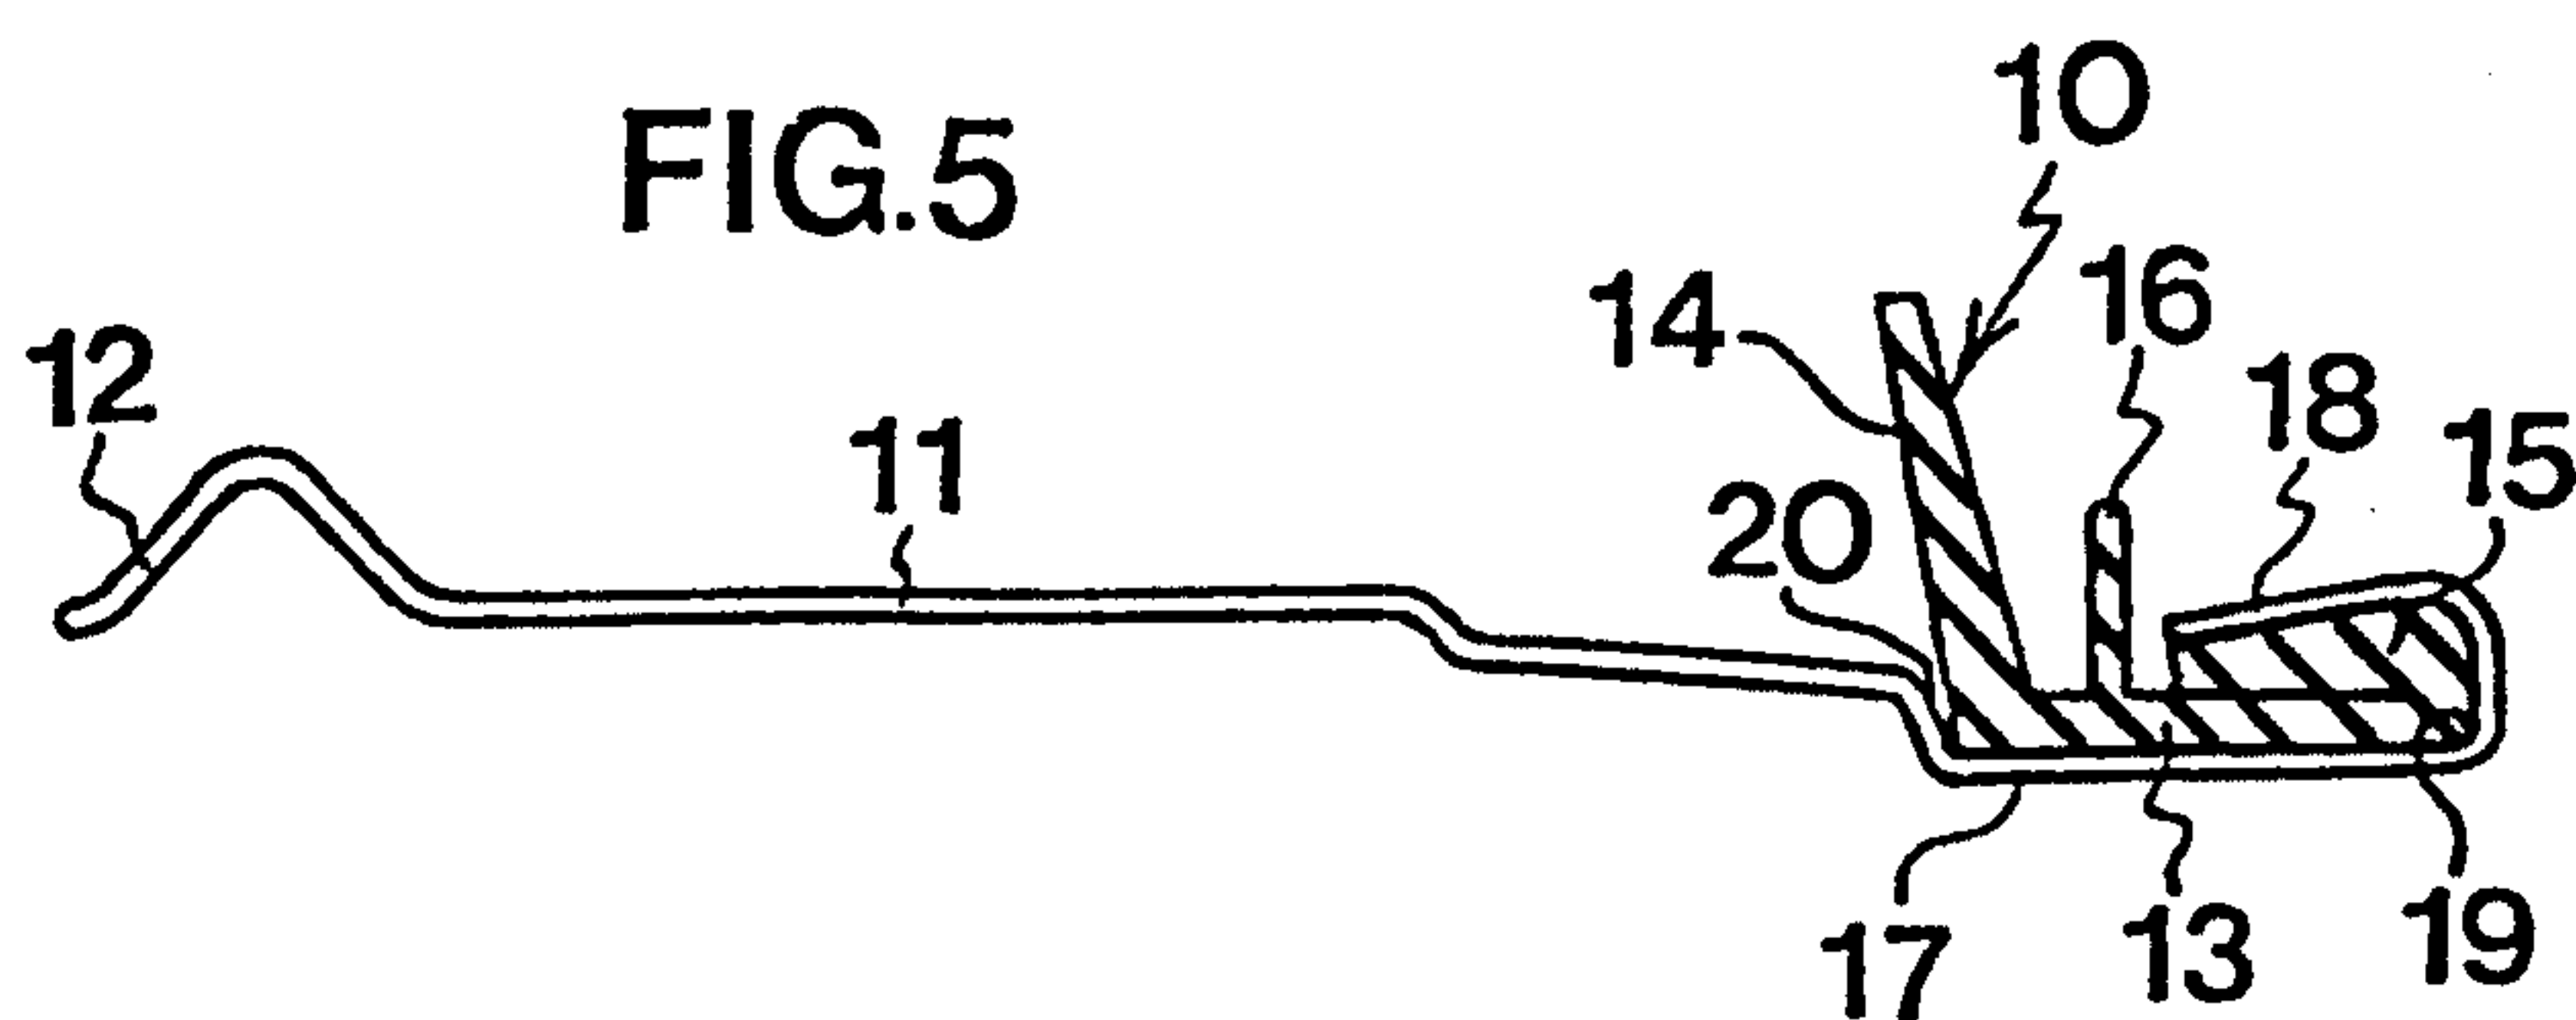


FIG6

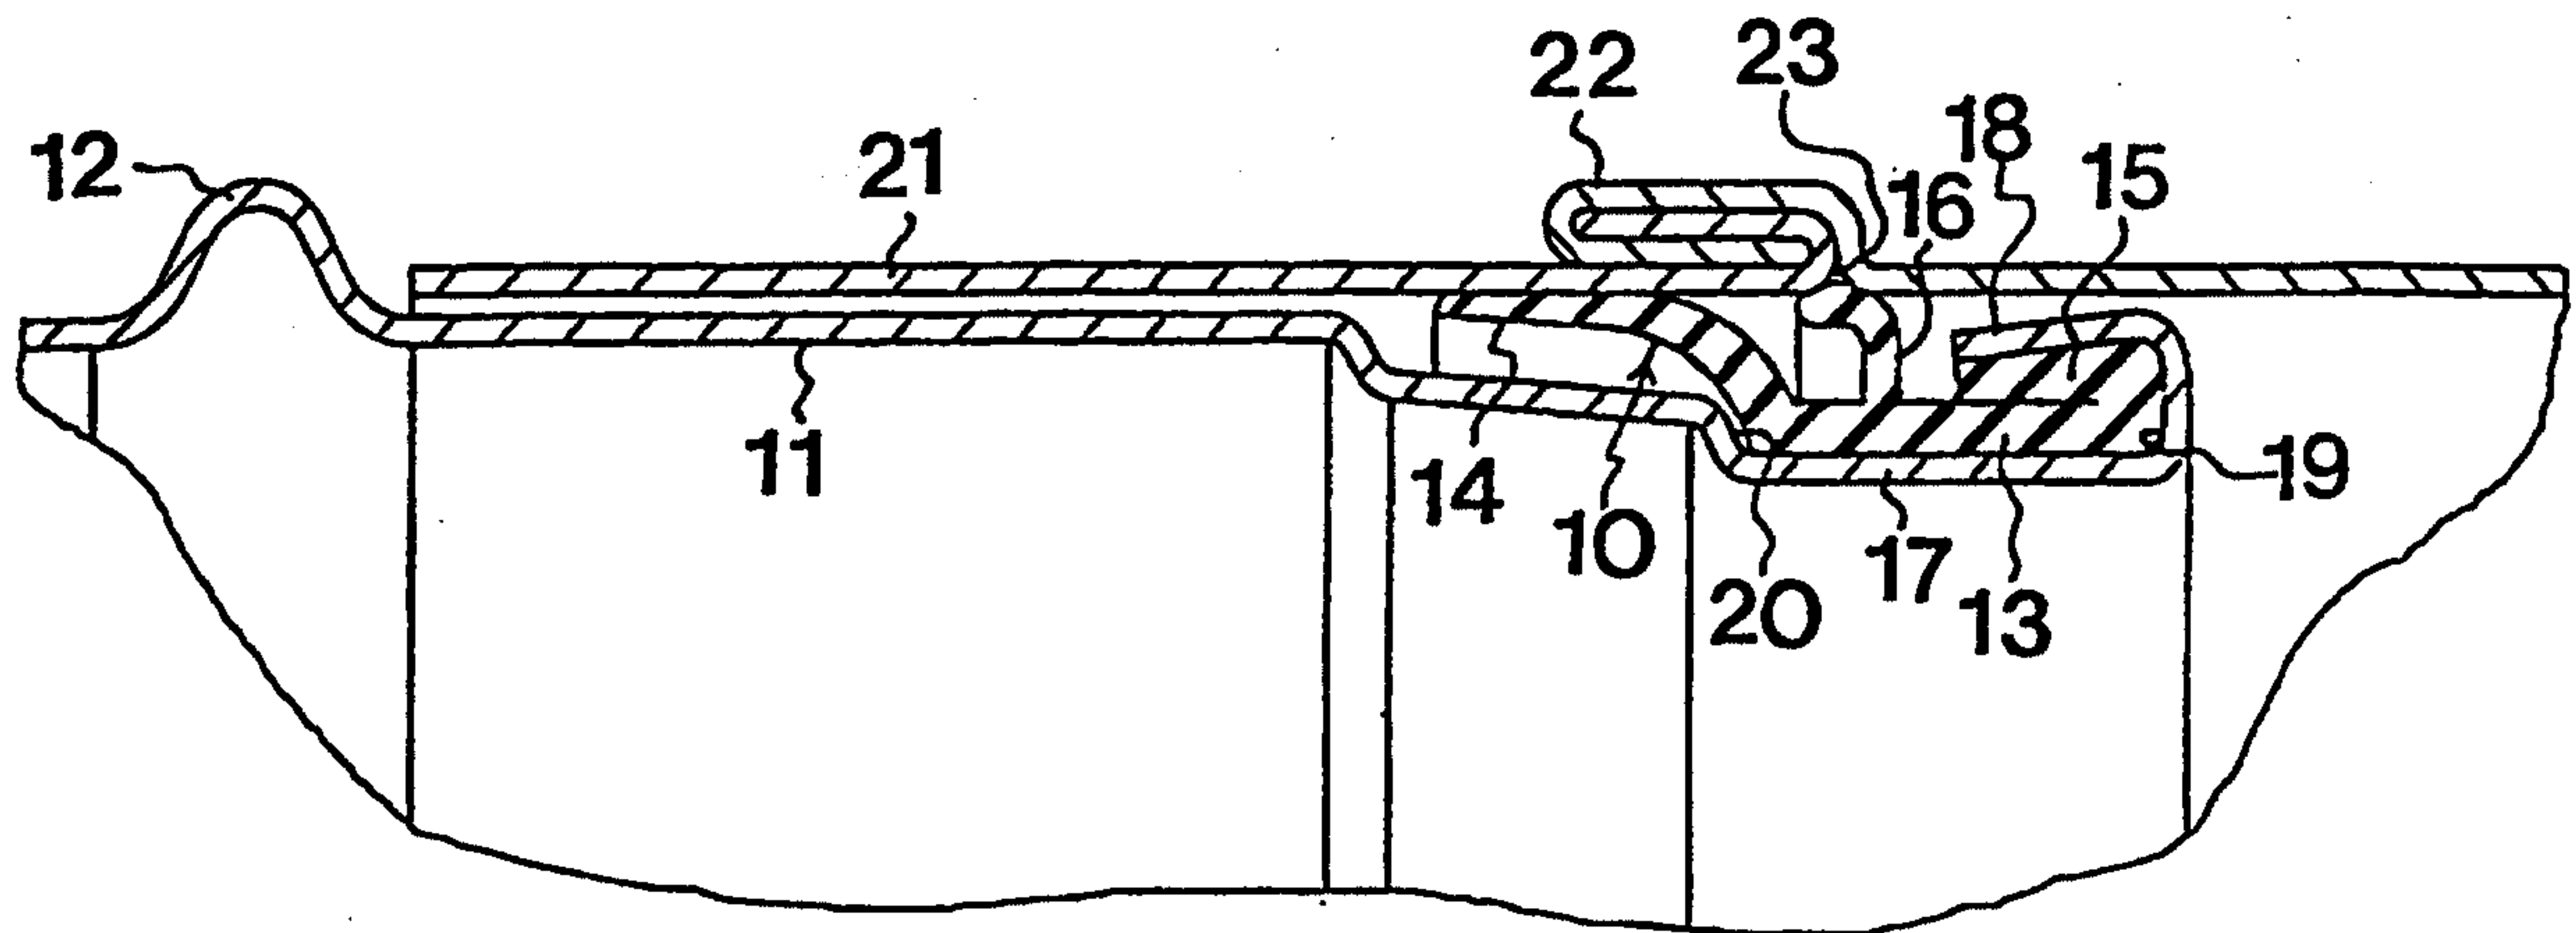


FIG7

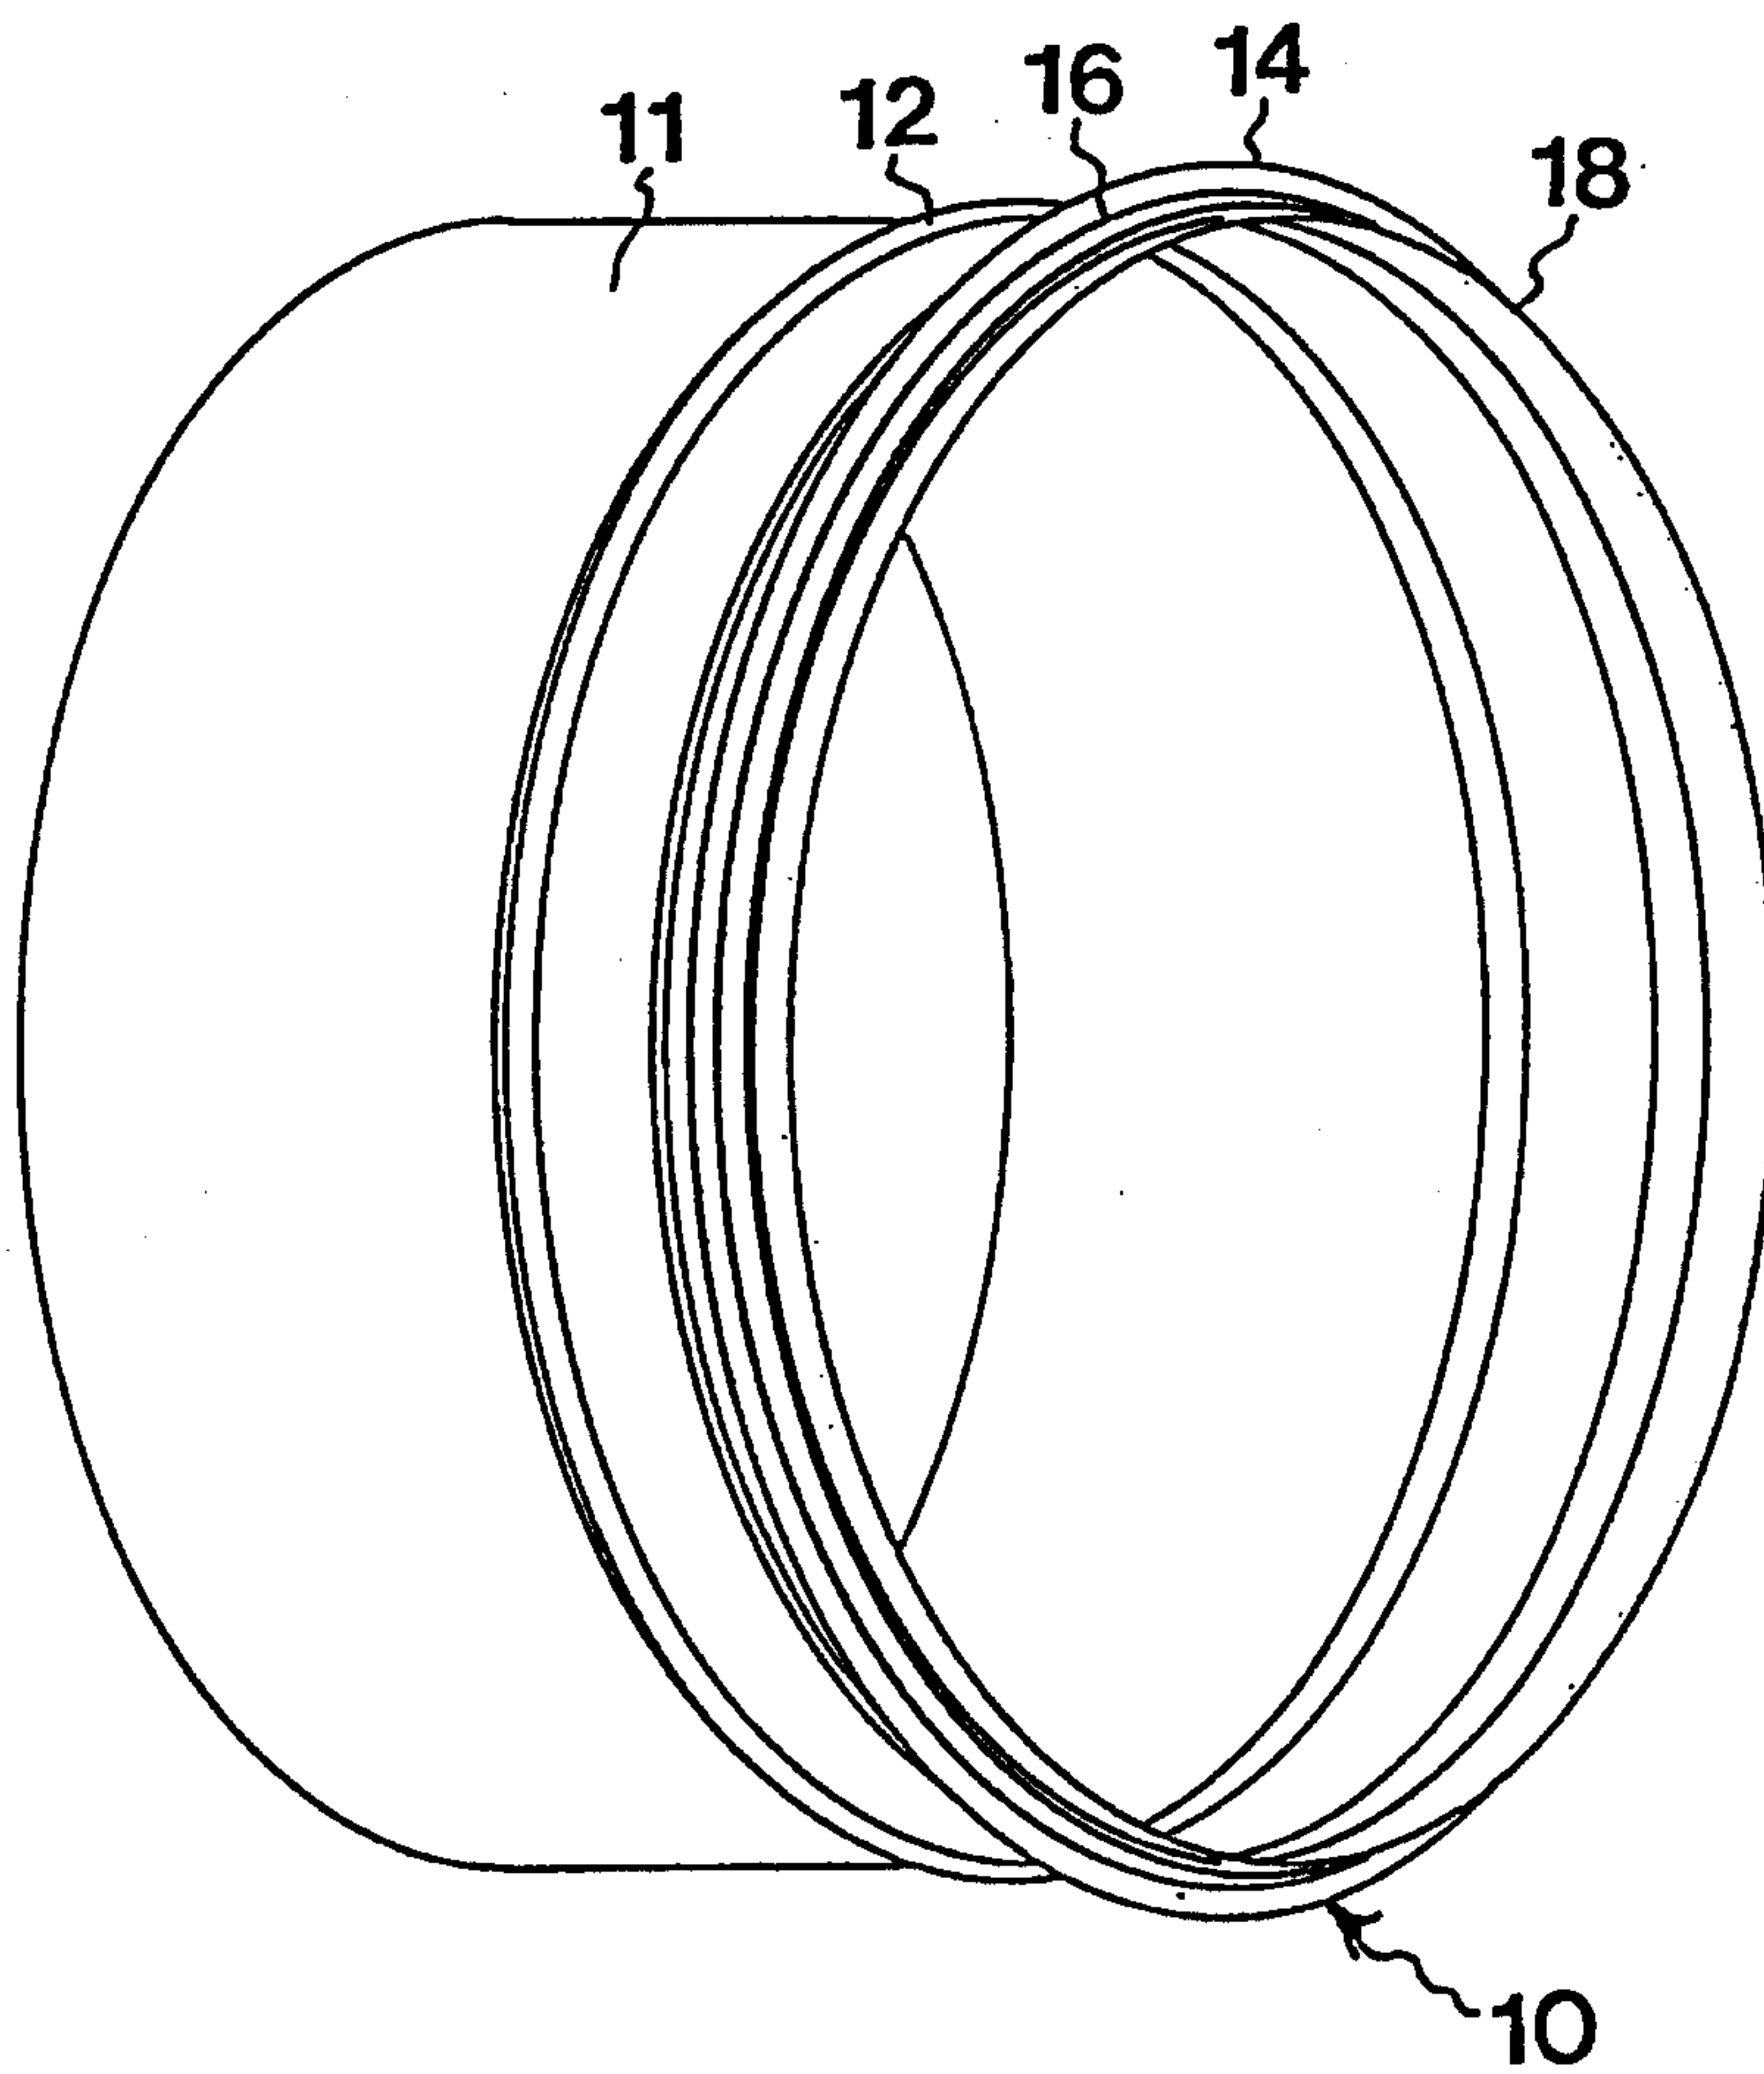


FIG8

