



(51) International Patent Classification:

C08G 18/76 (2006.01) *C08G 18/40* (2006.01)
C08G 18/08 (2006.01) *C08G 18/48* (2006.01)
C08G 18/22 (2006.01) *C08G 18/24* (2006.01)
C08G 18/38 (2006.01) *C08G 18/32* (2006.01)

(21) International Application Number:

PCT/EP2016/069536

(22) International Filing Date:

17 August 2016 (17.08.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15181476.1 18 August 2015 (18.08.2015) EP

(71) Applicant: **PCC ROKITA SA** [PL/PL]; ul. Sienkiewicza 4, 56-120 Brzeg Dolny (PL).

(72) Inventors: **TOMCZAK, Marcin**; ul. Niedzwiedzia 20/21, 54-233 Wrocław (PL). **WUILAY, Herve**; Altenbachstrasse 17b, 8832 Wollerau (CH). **SALASA, Michal**; Nr domu 143, 23-114 Jablonna (PL). **MAKULA, Lukasz**; ul. Okrzei 14/6, 58-500 Jelenia Gora (PL). **PICKIN, Kevin**; Lodge House, Southham Ladbroke CV47 2DF (GB). **STORZER, Uwe**; Im Schönblick 60, 72076 Tübingen (DE).

(74) Agent: **COHAUSZ & FLORACK**; Bleichstraße 14, 40211 Düsseldorf (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: FLAME-RESISTANT POLYMER POLYOL DISPERSION

(57) Abstract: The invention relates to a process for preparing a flame-resistant polymer-modified polyol having a solids content of 1 to 65 wt.% wherein (i) at least one polyisocyanate and (ii) an olamine are reacted in (iii) a base polyol having at least two active hydrogen containing groups of which more than 50% are primary active hydrogen containing groups and wherein the olamine has at least one phosphonic ester group attached to a tertiary nitrogen atom and contains at least two hydroxyl groups. The invention further relates to a flame-resistant polymer-modified polyol obtainable with the process of the invention, to a process for preparing optionally foamed plastics using the polymer-modified polyol of the invention, and to the use of a polymer-modified polyol for the preparation of flexible polyurethane foams.



Flame-resistant polymer polyol dispersion

The invention relates to a process for preparing a flame-resistant polymer-modified polyol dispersion, to the polymer-modified polyol dispersion obtainable according to this process, and to the use of the dispersion in the manufacture of flame-resistant polyurethane plastics, preferably flexible polyurethane foams.

Organophosphorus compounds have been used as flame retardants in plastics for many years. Compounds comprising phosphorus in high oxidation states are especially suitable for conferring flame resistance on foamed polyurethanes because in the event of a fire said compounds react with the polymer to form a glassy crosslinked structure to inhibit air ingress and prevent the egress from the substrate of pyrolysis gases that are combustible.

Halogenated flame retardants such as the tris(2-chloroethyl) phosphate (TCEP) formerly used in flexible PU foams form highly corrosive hydrohalic acids in the event of a fire and are also toxicologically concerning. These flame retardants therefore cannot be registered under the REACH process and hence can no longer be used within the European Union.

An improvement is the advent of reactive flame retardants which, in the case of polyurethane plastics chemically react during the polyaddition reaction together with the polyol component and the polyisocyanate and thus become embedded in the PU matrix. Reactive flame retardants of this type have a lower tendency to migrate and therefore are superior to the traditional flame retardants like tris(2-chloropropyl) phosphate (TCPP), since these are merely dissolved physically in the foam.

DE 1 143 022 B1 describes the preparation of reactive flame retardants on the basis of phosphonic ester derivatives, which are obtained by reaction of hydro

primary or secondary amines and/or polyamines with dialkyl phosphites and then optionally oxyalkylated. In these phosphorus-containing olamines, the phosphonic ester group containing the phosphorus is not an internal constituent of the main chain of the olamine component which contains the active hydrogen containing groups.

5 Rather, the phosphonic ester group is linked to the main chain by a side chain.

Similar phosphorus-containing olamines are known for example from US 3 076 010 A and US 3 235 517 A.

10 However, for a given equivalents ratio between the active hydrogen containing groups in the olamine or polyol and the isocyanate groups in the polyisocyanate, the mass fraction of the polyisocyanate in the polyurethane increases as the OH number of the polyol component increases. In the case of multiply functional polyol components, moreover, the degree of crosslinking of the polyurethane macromolecules also
15 increases. Both reduces the structural flexibility of the polyurethane molecules and hence has an adverse effect on the foamability as well as the mechanophysical properties of elastic foams. The known phosphorus-containing olamines have a high OH number and so can only be used in rigid or semi-rigid foam systems.

20 Flexible or semi-flexible foam systems are typically endowed with flame resistance by using reactive oligomeric phosphoric or phosphonic esters as described in EP 0 658 561 A. These oligomeric compounds have a substantially linear construction and therefore have a comparatively low OH number as compared with monomeric reactive flame retardants. However, it is disadvantageous here that, following the
25 integration of the phosphoric esters in the polyurethane matrix, the polymer chain contains PO bonds that are readily cleavable by hydrolysis or by transesterification. Cleavage of these bonds accordingly degrades the integrity of the polymer chain and leads to a gradual degradation of the foam. It is especially the combination of heat and moisture in typical flexible or moulded foam applications such as mattresses which
30 has particularly adverse consequences for foam systems rendered flame resistant with such phosphoric esters.

The chain degradation triggered by hydrolysis of the PO bonds also liberates chain fragments capable of migration, which lead to "fogging" and, in addition, may also be toxicologically concerning, depending on the flame retardant.

5

It is further disadvantageous that the reactive oligomeric flame retardants do not react in full in the course of the very fast and high-enthalpy polyaddition reaction between the polyol component and the polyisocyanate. Flame retardant molecules capable of migration are accordingly left in the final foam and can lead to the

10

problems described above.

Flexible polyurethane (PU) foams, also called high resilience (HR) foams, having high elasticity and compression load deflection, which are desirable in mattress manufacture for example, are produced using polyether polyols modified with long-chain polyols, and these polyether polyols can be subdivided into three classes of chemistries:

15

1. styrene-acrylonitrile polyether dispersions (SAN-PE), which are obtained by grafting polyether (PE) with suitable monomers such as styrene and acrylonitrile,
2. polyurea dispersions (PUD), which are obtained by addition reaction of isocyanates and diamines in the presence of PE,
3. polyisocyanate polyaddition (PIPA) polyol dispersions, which are obtained by addition of alkanolamines such as triethanolamine and isocyanates in the presence of polyether.

20

25

WO 1992/02567 A1 discloses the preparation of a polymer-modified polyol dispersion wherein olphosphines and olphosphine oxides are reacted with a polyisocyanate in a polyol component. One disadvantage with this, however, is the strong odour of the phosphines/phosphine oxides, which is attributable to the high vapour pressure of these low molecular weight compounds. This also results in

30

elevated VOC values which are very concerning on account of the high toxicological and ecotoxicological potential of these compounds.

The preparation of the olphosphines and olphosphine oxides described in WO 1992/02567 A1 is also very inconvenient and costly. A further disadvantage is that the recited olphosphines and olphosphine oxides form part of the main chain of the polymer-modified polyol. In these compounds, the phosphorus may be further oxidized to the phosphinate, phosphonate or phosphate by loss of the P-C bonds, which leads to chain degradation and hence to the release of migration-capable chain fragments with toxicological potential.

There accordingly continues to be a need for flame-resistant polyol systems for flexible PU foam manufacture which avoid the disadvantages described above.

SUMMARY OF THE INVENTION

By using the present invention, some or all of the difficulties and drawbacks of the prior art can be overcome by a process for preparing a flame-resistant polymer-modified polyol having a solids content of 1 to 65 wt.% wherein (i) at least one polyisocyanate and (ii) an olamine are reacted in (iii) a base polyol having at least two active hydrogen containing groups of which more than 50% are primary active hydrogen containing groups and wherein the olamine has at least one phosphonic ester group attached to a tertiary nitrogen atom and contains at least two hydroxyl groups.

25

Active hydrogen containing groups can particularly be functional groups that have a deprotonable hydrogen atom bonded to an atom that is not a hydrogen atom, for example oxygen, nitrogen, or sulfur. Examples for active hydrogen containing groups are primary amines (RNH_2), secondary amines (NHR_2), hydroxyl (OH), and thiol (SH). Active hydrogen containing groups can particularly react with isocyanate groups.

30

Examples for primary active hydrogen containing groups are primary amines, primary hydroxyl groups, and primary thiol groups.

5 The invention further provides a polymer-modified polyol obtainable by the aforementioned process.

The invention further provides a process for preparing flame-resistant, optionally foamed polyurethane plastics, in particular flexible foams, by reacting polyisocyanates with the polymer-modified polyols thus obtained, optionally in the presence of water
10 and/or volatile organic substances as blowing agents and also further optionally by co-use of catalysts, foaming auxiliaries and additives, chain-extending and/or crosslinking agents, organic or inorganic filling materials, flame retardants and/or synergists.

15 The polymer-modified polyols obtained according to the invention are preferably used in the manufacture of flexible polyurethane foams.

The invention rests on the finding that the above-described disadvantages can surprisingly be overcome at least in part by using the unique combination of a
20 polyisocyanate, a base polyol having at least two active hydrogen containing groups of which more than 50% are primary active hydrogen containing groups, and an olamine component, for example, an ethanolamine substituted by diethyl methylenephosphonate, wherein the phosphorus-containing groups are not present within the olamine scaffold containing the active hydrogen containing groups, but are
25 attached to the olamine scaffold by a side chain for the preparation of a polymer-modified polyol with a solid content of 1 to 65 wt.%, similar to the preparation of the known PIPA polyol dispersions.

These commercially available, reactive, halogen-free flame retardants based on
30 phosphorus in a high oxidation state will already be familiar to a person skilled in the art from the flame retardation of rigid polyurethane foam systems. Their preparation

and use are described for example in DE 11 43 022 B, US 3 076 010 A and US 3 235 517 A.

The familiar PIPA polyol dispersions, described for example in US 4 296 213, US 4 452 923, US 4 518 778 and US 4 554 306, provide a way in the present invention to integrate reactive flame retardants firmly in the polymer scaffold of the solid fraction of the polyol dispersion, in a process step prior to foaming. After the subsequent foaming by reaction of the flame-resistant PIPA polyol dispersion with further polyisocyanate, the flame retardant thus incorporated has undergone at least two polyaddition reactions, substantially raising the overall conversion of the flame retardant and substantially reducing the amount of migration-capable flame retardant in the final foam.

Since the phosphonic ester group of the olamine component attaches via a side chain to the main chain of the olamine scaffold featuring the active hydrogen containing groups, the phosphonic ester group does not become integrated in the polyurethane main chain in the course of the polyaddition reactions either during the preparation of PIPA polyol dispersion or in the course of the final foaming. The result is a higher thermal and oxidative stability as compared with the polyurethane foams of WO 1992/002567 A1, which were obtained using PIPA polyol dispersions based on olphosphines or olphosphine oxides.

Because the phosphonic ester groups are outside the polyurethane main chain, it is also not disadvantageous that the flame retardants used according to the present invention contain phosphorus in higher oxidation states. In contrast to the oligomeric phosphate esters described in EP 0 658 561 A, any hydro- or thermolysis does not lead to chain degradation. On the contrary only an alcohol is formed in the event of a, for example, hydrolytic cleavage of the PO bonds, leaving the integrity of the polyurethane main chain completely intact.

The polyaddition reaction between the flame retardant component and the polyisocyanate in the base polyol may be carried out in one or more successive steps. The overall conversion of the flame retardant component becomes nearly quantitative as a result, as reflected inter alia in very low VOC values.

5

Flexible polyurethane foams obtained using the polymer-modified polyols of the present invention do not just have the advantages that are already familiar from PIPA polyol dispersions, such as a high compression load deflection combined with low weight. They also do not need additional metering lines in the foaming operation and hence also no additional stocking vessels for the flame retardants.

10

The polymer-modified polyol of the present invention is at the same time compatible with all common organic and inorganic filling materials used for attaining high compression load deflections and also with further flame retardants in order to meet very high flame resistance requirements. For example, formulating the polymer-modified polyol of the present invention with melamine and foaming up said formulation with polyisocyanate is sufficient to pass flame retardancy tests as per BS 5852 Part 2 Crib Ignition Source V.

15

20 DETAILED DESCRIPTION OF THE INVENTION

To prepare a flame-resistant polymer-modified polyol of the present invention, (i) at least one polyisocyanate and (ii) an olamine are reacted in (iii) a base polyol having at least two active hydrogen containing groups of which more than 50 % are primary active hydrogen containing groups in a manner similar to the preparation of the known PIPA polyol dispersions. According to the invention, the olamine has at least one phosphonic ester group attached to a tertiary nitrogen atom and contains at least two hydroxyl groups.

25

30 The reaction is preferably carried out at a temperature of 30°C to 170°C.


The polymer-modified polyol dispersion thus obtained has a solids content of 1 to 65 wt.%, preferably of 2 to 50 wt.%, as polymer fraction.

A polyol dispersion having a solids content of 3 to 25 wt.% is particularly preferable and of 5 to 15 wt.% is very particularly preferable. The solid content is preferably based on the total weight of the dispersion. The solid content can be in the form of polyurethane particles, in particular in the form of PIPA particles. The weight of the polyurethane particles, in particular of the PIPA particles, may be a calculated weight determined according to methods known in the art.

The solid content (in wt.%) of the polymer-modified polyol may be calculated by dividing the sum of amounts (wt.) of olamines (including phosphorous-containing olamines, if any), polyisocyanates, and, if present, crosslinking agents, and, if present, other isocyanates (including, but not limited to, e.g. monoisocyanates), by the total amount (wt.) of starting materials and multiplying the result with 100.




The phosphorus-containing olamine used according to the invention may be a polyhydroxy compound as described for example in DE 11 43 022 B. These compounds are obtainable by condensation of hydroxyl-containing primary or secondary aliphatic, cycloaliphatic, aromatic, araliphatic or heterocyclic mono- and/or polyamines with carbonyl compounds and dialkyl phosphites with or without subsequent oxyalkylation.

The phosphorus-containing olamine preferably conforms to the following general formula (I):

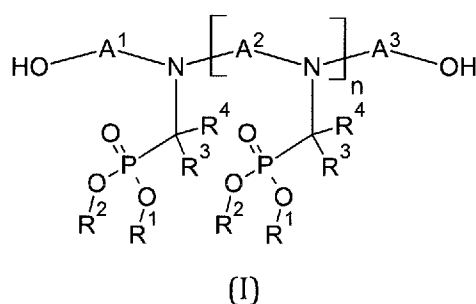

where R¹ and R² are each independently an alkyl moiety of 1 to 18 carbon atoms, R³ and R⁴ are hydrogen atoms or any desired hydrocarbon moieties and A¹ and also A³ are identical or different moieties of the formulae

5

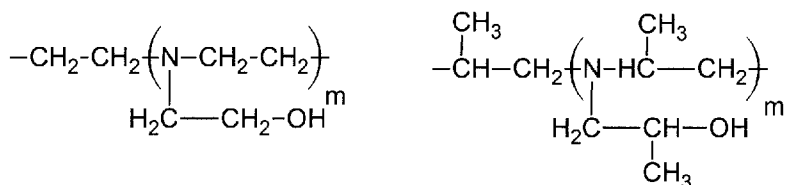

10


where m is an integer from 1 to 10, and

A² is an alkylene or aralkylene moiety of 2 to 12 carbon atoms, an arylene moiety or an A¹ or A³ moiety, and

15

n is an integer from 0 to 10.

It is particularly preferable for the phosphorus-containing olamine to conform to the following general formula (II):



(II)

20

where R^1 and R^2 are the same or different and are each independently alkyl of 1 to 18 carbon atoms, preferably 1 to 4 carbon atoms, aryl or aralkyl.

Very particularly preferred is diethyl N,N-

- 5 bis(hydroxyethyl)aminomethylphosphonate; (CAS: 2781-11-5), which is marketed by PCC-Rokita under the name Roflam® 6.

The phosphorus-containing olamine used according to the invention may be present in the reaction mixture in an amount of from 1 to 25 g/100 g flame-resistant polymer-
10 modified polyol, preferably from 3 to 22 g/100 g flame-resistant polymer-modified polyol, more preferably from 5 to 20 g/100 g flame-resistant polymer-modified polyol, even more preferably from 7 to 17 g/100 g flame-resistant polymer-modified polyol.

- 15 The reaction with the phosphorus-containing olamines (ii) and the base polyol components (iii) to obtain the polyol dispersions of the present invention and the conversion thereof into polyurethane plastics may utilize not only monoisocyanates, such as phenyl isocyanate or stearyl isocyanate, but also aliphatic, cycloaliphatic, araliphatic, aromatic and heterocyclic polyisocyanates having at least two NCO
20 groups, described for example by W. Siefken in Justus Liebigs Annalen der Chemie, 562 (1949), pages 75 - 136.

Useful polyisocyanates include, for example, ethylene diisocyanate, 1,4-tetramethylene diisocyanate, 1,6-hexamethylene diisocyanate, 1,12-dodecane
25 diisocyanate, cyclobutane 1,3-diisocyanate, cyclohexane 1,3-diisocyanate, cyclohexane 1,4-diisocyanate and also any desired mixtures of these isomers, 1-isocyanato-3,3,5-trimethyl-5-isocyanatomethylcyclohexane, 2,4- and/or 2,6-hexahydrotolylene diisocyanate and also any desired mixtures of these isomers, hexahydro-1,3- and/or -
1,4-phenylene diisocyanate, perhydro-2,4'- and/or -4,4'-diphenylmethane
30 diisocyanate, 1,3- and/or 1,4-phenylene diisocyanate, 2,4- and/or 2,6-tolylene diisocyanate and also any desired mixtures of these isomers, diphenylmethane 2,4'-

and/or 4,4'-diisocyanate, naphthylene 1,5-diisocyanate, triphenylmethane 4,4',4"-triisocyanate.

5 Suitable polyisocyanates further include polyphenyl polymethylene polyisocyanates of the type obtainable by aniline-formaldehyde condensation and subsequent phosgenation.

10 Further examples are polyisocyanates comprising carbodiimide groups, polyisocyanates comprising allophanate groups, polyisocyanates comprising urethane groups, polyisocyanates comprising acylated urea groups, polyisocyanates comprising biuret groups, polyisocyanates obtained by telomerisation reactions, polyisocyanates comprising ester groups and reaction products of the abovementioned isocyanates with acetals.

15 Suitable diisocyanates include not only aliphatic diisocyanates, such as hexamethylene diisocyanate and tetramethylene diisocyanate, but also cycloaliphatic diisocyanates such as, for example, hexahydro-p-phenylene diisocyanate, and especially aromatic diisocyanates such as, for example, tolylene diisocyanate, 4,4'-diphenylmethane diisocyanate, 1,5-naphthylene diisocyanate and p-phenylene diisocyanate.

20

Particular preference is generally given to the industrially readily accessible polyisocyanates such as 2,4- and/or 2,6-tolylene diisocyanate and any desired mixtures of these isomers ("TDI"), polyphenyl polymethylene polyisocyanates of the type obtainable by aniline-formaldehyde condensation and subsequent phosgenation
25 ("crude MDI") and polyisocyanates comprising carbodiimide groups, urethane groups, allophanate groups, isocyanurate groups, urea groups or biuret groups ("modified polyisocyanates").

The polyisocyanate may be used singly or in admixture with other polyisocyanates.
30 The polyisocyanate may further be in a mixture with up to 40 mol% of a monoisocyanate.

The polyisocyanate used according to the invention may be present in the reaction mixture in an amount of from 1 to 20 g/100 g flame-resistant polymer-modified polyol, preferably from 2 to 18 g/100 g flame-resistant polymer-modified polyol, more preferably from 3 to 15 g/100 g flame-resistant polymer-modified polyol, even more preferably from 4 to 14 g/100 g flame-resistant polymer-modified polyol.

The equivalents ratio NCO:OH between the OH groups of the phosphorus-containing olamine (ii) and the NCO groups of the at least one polyisocyanate (i) and also optionally of the monoisocyanate is preferably in the range from 0.5 to 1.5. The equivalents ratio NCO:OH is more preferably in the range from 0.85 to 1.2 and even more preferably in the range from 0.9 to 1.15.

The base polyol (iii) used for preparing the polymer-modified polyol dispersion of the present invention has at least two active hydrogen containing groups of which more than 50% are primary active hydrogen containing groups and preferably a weight average molecular weight Mw in the range from 2000 g/mol to 15000 g/mol.

The weight average molecular weight Mw of the base polyol is more preferably in the range from 2500 to 12000 and yet more preferably in the range from 3000 to 7000 g/mol.

It is particularly preferable for the base polyol to be a polyether polyol (poly(oxyalkylene) polyol) having an OH functionality in the range from 2 to 8 and a weight average molecular weight of Mw=2000 to 15 000 g/mol.

If desired, mixtures of two or more polyols are also usable as base polyol.

The base polyol may be in the form of a homopolymer, a copolymer or block copolymer.

The poly(oxyalkylene) polyols used with preference are commercially available or are obtainable in a conventional manner by polyaddition of alkylene oxides such as ethylene oxide, propylene oxide, butylene oxide and styrene oxide, optionally mixed or in succession onto polyfunctional starting compounds. The choice of alkylene oxide
5 can influence the presence of primary or secondary hydroxyl groups in the resulting polyether polyol as is known in the art.

Examples of preferred starter compounds are water, alcohols or amines but especially molecules having two to six primary or secondary amine groups or hydroxyl groups
10 per molecule such as triethanolamine, 1,2-ethanediol, 1,2-propanediol, 1,3-propanediol, diethylene glycol, dipropylene glycol, triethylene glycol, tripropylene glycol, 1,2-butanediol, 1,3-butanediol, 1,4-butanediol, 1,2-hexanediol, 1,4-hexanediol, 1,5-hexanediol, 1,6-hexanediol, glycerol, trimethylolpropane, pentaerythritol, mannitol or sorbitol, 4,4'-dihydroxy-diphenylpropane, aniline, mono- and
15 diethanolamine, ethylenediamine and diethylenetriamine. Sucrose polyethers and also formitol- or formose-started polyethers also come into consideration for the purposes of the present invention. The choice of starter molecule can influence the functionality of the resulting polyether polyol as is known in the art.

20 For the base polyol, particular preference is given to such polyethers where the predominant proportion, preferably more than 50%, more preferably more than 70%, even more preferably up to 85%, of all the OH groups present in the polyether are primary OH groups. Polybutadienes comprising OH groups or hydroxyl-functional polymers of tetrahydrofuran are also suitable for the purposes of the present
25 invention.

Suitable base polyols for the applications in flexible foams preferably have a hydroxyl number of 20 to 100 mg/KOH and/or a dynamic viscosity in the range from 400 to 6000 mPa·s.

The base polyol used according to the invention may be present in the reaction mixture in an amount from 35 to 99 g/100 g flame-resistant polymer-modified polyol, preferably from 50 to 95 g/100 g flame-resistant polymer-modified polyol, more preferably from 60 to 95 g/100 g flame-resistant polymer-modified polyol, even more preferably from 65 to 90 g/100 g flame-resistant polymer-modified polyol.

According to an embodiment of the invention, the reaction is carried out in the presence of a cross-linking agent having a weight average molecular weight from 200 to 1000 g/mol. Conducting the reaction in the presence of a cross-linking agent with a weight average molecular weight in the above range can help to obtain polymer-modified polyols that yield flexible foams with improved mechanical properties. Without wishing to be bound by theory, it is believed that the use of a cross-linking agent as described herein improves the miscibility and/or the compatibility in the resulting polymer-modified polyol.

Preferably, the cross-linking agent may have a weight average molecular weight from 400 to 900 g/mol and more preferably from 500 to 800 g/mol.

According to another embodiment of the invention, the cross-linking agent has a functionality of 2 to 8, in particular 3 to 6, active hydrogen containing groups, capable of reacting with isocyanate functions. It has been found that a functionality of the cross-linking agent in this range yields a polymer-modified polyol that can be used to prepare flexible foams with good mechanical properties.

The functionality can in particular mean the number of functional groups, in particular the number of a specific functional group, in a molecule. For example, a cross-linking agent with a functionality of 2 to 8 active hydrogen containing groups can be a cross-linking agent in which each molecule of the cross-linking agent has 2 to 8 active hydrogen containing groups.

According to another embodiment of the invention, the cross-linking agent contains hydroxyl functions. Cross-linking agents with hydroxyl groups have been found to yield polymer-modified polyols with very good properties for flexible foams.

- 5 According to another embodiment of the invention, the cross-linking agent is a polyether polyol. Polyether polyol cross-linking agents have been found to be particularly beneficial for the compatibility and the miscibility of the resulting polymer-modified polyol.
- 10 Advantageously, the cross-linking agent, when used, is present in the reaction in an amount of from 0.1 to 11 g/100 g flame-resistant polymer-modified polyol, in particular from 0.2 to 7 g/100 g flame-resistant polymer-modified polyol, more particularly from 0.5 to 6 g/100 g flame-resistant polymer-modified polyol. Practical experiments have shown that the use of more than substantially 11 g cross-linking
- 15 agent per 100 g flame-resistant polymer-modified polyol resulted in polymer-modified polyols that yielded foams with bad properties, in particular a bad resilience and a high rigidity. On the other hand, it has been found that the use of less than 0.1 g cross-linking agent per 100 g flame-resistant polymer-modified polyol did not have any effect on the properties of foams prepared from the resulting flame-resistant
- 20 polymer-modified polyols.

The details mentioned above for the preparation, the functionality, and/or the type of hydroxyl groups (that is, primary or secondary hydroxyl groups) of the base polyol preferably also apply for the cross-linking agent.

25

- The reaction of the polyisocyanate (i) with the phosphorus-containing olamine (ii) in the base polyol (iii) may be carried out in the presence of water at not more than 0.25 wt.% and/or low molecular weight hydroxyl- or amino-containing compounds having a molecular weight of below 400 g/mol at not more than 5 wt.% and/or catalysts
- 30 and/or further flame retardants and/or synergists, and/or organic and inorganic fillers and/or further auxiliaries.

By way of low molecular weight hydroxy compounds there may be used ethylene glycol, 1,2-propylene glycol, 1,3-propylene glycol, 1,4-butylene glycol, 2,3-butylene glycol, 1,6-hexanediol, 1,8-octanediol, neopentyl glycol, 1,4-bis-
5 hydroxymethylcyclohexane, 2-methyl-1,3-propanediol, glycerol, trimethylolpropane, 1,2,6-hexanetriol, 1,2,4-butanetriol, trimethylolpropane, pentaerythritol, quinitol, mannitol and sorbitol, formitol, methylglycoside, diethylene glycol, triethylene glycol, tetraethylene glycol and higher polyethylene glycols, dipropylene glycol and higher polypropylene glycols and also dibutylene glycol and higher polybutylene glycols at a
10 maximum molecular weight of 400 g/mol.

Examples of suitable low molecular weight amines are ethylenediamine, diethylenetriamine, N,N-dimethylethylenediamine, piperazine, 4-aminobenzylamine, 4-aminophenylethylamine, o-, m- and p-phenylenediamine, 2,4- and/or 2,6-
15 tolylenediamine, 4,4'-diaminodiphenylmethane and/or olamines such as ethanolamine, di- and triethanolamine, propanolamine, di- and tripropanolamine, butanolamine and di- and tributanolamine.

Suitable catalysts are organometallic compounds such as dibutyltin oxide and
20 dibutyltin dichloride and/or catalysts based on Sn(+II), Sn(+IV), Bi(+III), Zn(+II) or Zr(+IV) salts of carboxylic acids such as tin(II) acetate, tin(II) octoate, tin(II) ethylhexoate, tin(II) laurate, tin(II) palmitate, tin(II) stearate, tin(II) oleate, dibutyltin diacetate, dibutyltin dilaurate, dibutyltin maleate, dioctyltin diacetate, bismuth(III) neodecanoate, zinc(II) octoate, zinc(II) ricinoleate, zinc(II) neodecanoate and
25 zirconium(IV) ethylhexoate.

The catalyst used according to the invention may be present in the reaction mixture in an amount of from 0.01 to 1.5 g/100 g flame-resistant polymer-modified polyol, preferably from 0.03 to 1 g/100 g flame-resistant polymer-modified polyol, more
30 preferably from 0.05 to 0.5 g/100 g flame-resistant polymer-modified polyol, even more preferably from 0.08 to 0.2 g/100 g flame-resistant polymer-modified polyol.

As supplementary, preferably halogen-free flame retardants there may be used phosphorus compounds such as tert-butylphenyl diphenyl phosphate, isopropylphenyl diphenyl phosphate, tricresyl phosphate and dimethyl
5 methanephosphonate and/or nitrogen compounds such as melamine, in each case alone or combined with further synergists such as zinc borate, and zinc stannate.

It is additionally possible to use known organic and/or inorganic filling materials such as CaCO_3 and also further auxiliaries such as emulsifiers, colour pastes and stabilizers.

10 The process which the present invention provides for preparing the polymer-modified polyol by reacting the at least one polyisocyanate (i) with the phosphorus-containing olamines (ii), which have phosphonic ester groups attached to tertiary nitrogen atoms and at least two hydroxyl groups, in base polyol (iii) may be carried out in a batch
15 operation or in a continuous operation.

In the batch operation, the base polyol may be initially charged together with the phosphorus-containing olamine at temperatures between 10°C and 100°C and the polyisocyanate added. It is also possible to initially charge the base polyol only and to
20 add the phosphorus-containing olamine and also the polyisocyanates into the base polyol in synchronous fashion, in which case the heat of reaction is optionally removed by cooling in both scenarios.

However, a continuous or semi-continuous procedure is advantageous where the
25 mixing of the polyisocyanate with the phosphorus-containing olamine and the polyether polyols is effected synchronously, for example in a fast-rotating mixing head, and the more or less converted reaction mixture, depending on the average residence time in the mixing head, is transferred into a stirred tank or agitated stock reservoir tank for further reaction. In this form of reaction management, the reaction
30 mixture may also undergo subsequent reaction in two or more stirred tanks serially

connected in the form of a cascade, at temperatures between 50°C – 150°C, in which case the heat of reaction is optionally removed by cooling in either scenario.

It is preferable to maintain an equivalents ratio of NCO:OH groups between 0.85 and 1.20, yet more preferably between 0.95 and 1.10.

The concentration of the solid polyaddition products in the polyether polyols may be adjusted to values between 1 and 65 wt.% in the final polyol dispersion. However, preference is given to a solids content between 3 and 25 wt.%, very particularly between 5 and 15 wt.%.

The polymer-modified polyols according to the invention can also be prepared using a seeding process. When using a seeding process, a polymer-modified polyol with a low solid content, for example from 0.01 to 5 wt.%, based on the amount of polymer-modified polyol, is used as the base polyol and further polyisocyanate as well as olamine and optionally cross-linking agent and optionally catalyst are added. In this mixture, the solid content already present in the mixture in the form of polymer particles act as nuclei that grow as the reaction proceeds. In this way, the solid content can be easily adjusted to the desired value. Further, it is also possible to conduct an “in situ seeding”, wherein a first amount of the polyisocyanate is added to the mixture of base polyol and optionally a catalyst followed by addition of the olamine with at least one phosphonic ester group attached to a tertiary nitrogen atom and at least two hydroxyl groups, in a second step. The reaction can then be allowed to react before in a third step, a second amount of polyisocyanate is added. Using either of the seeding processes, bimodal particle distributions can be obtained. This can help to tailor the properties of the resulting plastics, in particular the foams.

The amount of dispersed polyaddition product required for foams to have optimum physicommechanical as well as flame-retardant properties is from 5 to 15 wt.%. It will be appreciated that such dispersions of low solids content are obtainable directly according to the present invention. However, a multi-step procedure is preferred

where a dispersion having a high solids content between 25 and 65 wt.% is prepared in the first step and is then adjusted to the desired solids concentration with any desired polyol, for example the polyether polyol already used in the first step, some other of the polyether polyols mentioned above, a polyester polyol, a further polyol dispersion such as, for example, a further polyisocyanate polyaddition polyol dispersion (PIPA) prepared with an olamine in a conventional manner and/or a styrene-acrylonitrile polyether dispersion (SAN-PE) and/or polyurea dispersion (PUD) or mixtures of all the polyols referred to here. This is a simple way to expand the property profiles of the polymer-modified polyol dispersions of the present invention.

The polymer-modified polyol dispersions of the present invention are advantageously processible into flexible polyurethane foams having improved properties, such as enhanced tensile strength and hardness. The dispersions are likewise useful for producing elastomers, coatings and overcoatings. To this end, the polymer-modified polyol dispersions of the present invention are reacted, optionally in the presence of other customary polyols, with aliphatic, cycloaliphatic, araliphatic, aromatic and heterocyclic polyisocyanates, optionally in the presence of known auxiliaries and additives.

Known auxiliaries and additives are, in particular, water and/or volatile organic substances as blowing agents which may optionally be used together with catalysts, foaming auxiliaries and additives, chain-extending and/or crosslinking agents, organic or inorganic filling materials, flame retardants and/or synergists.

This provides flame-resistant, optionally foamed polyurethane plastics, in particular flexible foams, having good mechanical and physical properties, thermal and hydrolytic stability and no components with a tendency to migrate.

EXAMPLES

I) Flame resistant (FR) polyol synthesis

5 Apparatuses used:

T 50 ULTRA-TURRAX®	High-performance dispersing instrument.
Hennecke Labfoam®	Semi continuous operating laboratory plant for test series and laboratory purposes.

10

Chemicals used:

15	Polyol A	Glycerin started polyoxypropylene polyol capped with ethylene oxide with a functionality of approximately 3, and LOH of 33-38 mg KOH/g and a weight average molecular weight of Mw=4800 g/mol.
20	Polyol B	Reactive polymer modified polyol with a solid content of 10%, a functionality of approximately 3, and LOH of 47-52 mg KOH/g and a weight average molecular weight of Mw=4850 g/mol.
25	Polyol C	Reactive polymer modified polyol with a solid content of 20%, a functionality of approximately 3, and LOH of 50-57 mg KOH/g and a weight average molecular weight of Mw=4850 g/mol.
30	Polyol D	Reactive styrene-acrylonitrile copolymer modified polyol with a solid content of 40%, a functionality of approximate 3, and LOH of 20-23 mgKOH/g and a weight average molecular weight of Mw=4800 g/mol.

5	Polyol E	Polyoxyalkylene triol with a weight average molecular weight of Mw=3000 g/mol and an LOH of 53-59 mg KOH/g.
	Crosslinker A	Sorbitol started polyoxyalkylene polyol with a LOH of 400-440 mg KOH/g and a weight average molecular weight of Mw=600.
10	FR olamine	Diethyl N,N-bis(hydroxyethyl)aminomethylphosphonate (CAS: 2781-11-5); with a functionality of approximately 2, and LOH of app. 450 mg KOH/g
15	Triethanolamine (TEA)	Tris(2-hydroxyethyl)amine (CAS: 102-71-6)
	Ongronat®1080	Toluenediisocyanate (TDI) – mixture consisting of 80 wt.% 2,4- und 20 wt.% 2,6- isomer (CAS 584-84-9)
20	Kosmos® 19	Gelling catalyst (Dibutyltindilaurate (DBTDL), Evonik)
	Kosmos® 54	Gelling catalyst (Zinc ricinoleate, Evonik)
25	Bicat 4130M	Gelling catalyst (Zirconium neodecanoat mixture, Shepherd)
	Bicat ZM	Gelling catalyst (Zinc dineodecanoate, Shepherd).

Chemical physical properties of the polyols listed were determined in accordance with following standards, internal audit procedures and measurement methods:

Table 1

Water Content	in wt. %	DIN 51777
Hydroxyl Number (LOH)	in mg KOH/g	DIN 53240
Acid Number	in mg KOH/g	DIN EN ISO 3682
Dynamic Viscosity (25°C)	in mPa·s	DIN 51 550
Color (Pt/Co)	in Hazen	DIN ISO 6271

The solid content (in wt. %) of the polymer-modified polyol was calculated by dividing the sum of amounts (wt.) of olamines (including phosphorous-containing olamines, if any), organic polyisocyanates, and, if present, crosslinking agents, and, if present, other isocyanates (including, but not limited to, e.g. monoisocyanates), by the total amount (wt.) of starting materials and multiplying the result with 100.

Example No. 1-11

General procedure for manufacturing of 10kg FR-Polyol:

The base polyol is transferred together with the FR olamine and the gelling catalyst in a dried 15l glass reactor, equipped with a stirrer, a dispersing device (Ultraturrax T50), a thermometer and a dropping funnel. After exclusion of air and moisture by purging with nitrogen, the reaction mass is thoroughly mixed for 10 minutes whereby the temperature increases to 35-45°C.

Then the Ongronat®1080 is added slowly during a period 30 minutes and the temperature rises to 55-75°C while the reaction mixture starts immediately to whiten. The resulting polyol dispersion is then slowly stirred for another two hours and finally stored for 24 hours with exclusion of air and moisture.

Example No. 1a-1d

FR-Polyols with different molar ratios (equivalents ratios) NCO:OH

Table 2

Example No.	1a	1b	1c	1d
Polyol A [g]	8419,71	8352,71	8285,72	8218,72
Fr olamine [g]	1000,00	1000,00	1000,00	1000,00
Kosmos® 19 [g]	10,84	10,84	10,84	10,84
Ongronat®1080 [g]	569,45	636,45	703,44	770,44
Molar Ratio NCO:OH	0,85	0,95	1,05	1,15
T50 mixing [rpm]	5000	5000	5000	5000
Solid Content [wt.%]	15,7	16,4	17,0	17,7
P - Content [wt.%]	1,21	1,21	1,21	1,21
N - Content [wt.%]	1,54	1,65	1,75	1,86
Dynamic Viscosity [mPa·s]	2097	2774	3786	9436
LOH [mgKOH/g]	36,6	34,8	30,4	25,6

Example No. 2a-2d

5

FR polyols with different solid contents:

Table 3

Example No.	2a	2b	2c	2d
Polyol A [g]	8806,13	8299,12	7623,10	7285,09
FR olamine [g]	700,00	1000,00	1400,00	1600,00
Kosmos® 19 [g]	10,84	10,84	10,84	10,84
Ongronat®1080 [g]	483,03	690,04	966,06	1104,07
Molar Ratio NCO:OH	1,03	1,03	1,03	1,03
T50 mixing [rpm]	5000	5000	5000	5000
Solid Content [wt.%]	11,8	16,9	23,7	27,0

P - Content [wt.%]	0,85	1,21	1,70	1,94
N - Content [wt.%]	1,21	1,73	2,43	2,77
Dynamic Viscosity [mPa·s]	2795	3341	5225	6563
LOH [mgKOH/g]	32,8	30,7	30,4	28,5

Example No. 3a-3d FR polyols, prepared with different gelling catalysts:

5 Table 4

Example No.	3a	3b	3c	3d
Polyol A [g]	8489,12	8489,12	8489,12	8489,12
FR olamine [g]	887,57	887,57	887,57	887,57
Kosmos® 19 [g]	10,84	0,00	0,00	0,00
Kosmos® 54 [g]	0,00	10,84	0,00	0,00
Bicat® 4130 M [g]	0,00	0,00	10,84	0,00
Bicat® ZM [g]	0,00	0,00	0,00	10,84
Ongronat®1080 [g]	612,47	612,47	612,47	612,47
Molar Ratio NCO:OH	1,03	1,03	1,03	1,03
T50 mixing [rpm]	5000	5000	5000	5000
Solid Content [wt.%]	15,0	15,0	15,0	15,0
P - Content [wt.%]	1,08	1,08	1,08	1,08
N - Content [wt.%]	1,54	1,54	1,54	1,54
Dyn. Viscosity [mPa·s]	3065	4652	5225	3057
LOH [mgKOH/g]	32,8	30,7	30,4	34,3

The Zn(II)neodecanoate catalyst Bicat®ZM exhibits comparable performance regarding viscosity and stability of the resulting dispersions to the DBTDL catalyst Kosmos ®19.

Example No. 4a – 5c

General procedure for manufacturing of 10kg FR-Polyol with in situ seeding (TEA):

5

The base polyol is transferred together with the olamine (TEA) and the gelling catalyst in a dried 15l glass reactor, equipped with a stirrer, a dispersing device (Ultraturrax T50), a thermometer and a dropping funnel. After exclusion of air and moisture by
10 purging with nitrogen, the reaction mass is thoroughly mixed for 10 minutes whereby the temperature increases to 35-45°C.

Then the first amount of Ongronat®1080 is added slowly during a period of 10 minutes. The reaction mixture is thoroughly mixed for 10 minutes, then the FR
15 olamine is added and mixing proceeds for another 10 minutes. The remaining amount of Ongronat®1080 is added slowly during a period of 10 minutes and the temperature rises to 55-75°C while the reaction mixture starts immediately to whiten. The resulting polyol dispersion is then slowly stirred for another two hours and finally stored for 24 hours with exclusion of air and moisture.

20

Table 5

Example No.	4a	4b	4c	5a	5b	5c
Polyol A [g]	8796,12	8289,10	7275,08	8786,10	8279,09	7265,06
Triethanolamin [g]	3,57	3,57	3,57	7,14	7,14	7,14
Ongronat®1080 1st [g]	6,44	6,44	6,44	12,88	12,88	12,88
FR olamine [g]	700,00	1000,00	1600,00	700,00	1000,00	1600,00
Ongronat®1080 2nd [g]	483,03	690,04	1104,07	483,03	690,04	1104,07
Kosmos® 19 [g]	10,84	10,84	10,84	10,84	10,84	10,84
Molar Ratio NCO:OH	1,03	1,03	1,03	1,03	1,03	1,03

T50 mixing [rpm]	5000	5000	5000	5000	5000	5000
Solid Content [wt.%]	11,9	17,0	27,1	12,0	17,1	27,2
P - Content [wt.%]	0,85	1,21	1,94	0,85	1,21	1,94
N - Content [wt.%]	1,21	1,73	2,77	1,21	1,73	2,77
Dynamic Viscosity [mPa·s]	2795	3341	6563	2648	3522	4945
LOH [mgKOH/g]	32,8	30,7	28,5	31,9	32,6	29,4

Example No. 6a-7c

General procedure for manufacturing of 10kg FR-Polyol with seeding:

- 5 The polyol components consisting of the base polyol and the seeding polyol are transferred together with the FR olamine and the gelling catalyst in a dried 15l glass reactor, equipped with a stirrer, a dispersing device (Ultraturrax T50), a thermometer and a dropping funnel. After exclusion of air and moisture by purging with nitrogen, the reaction mass is thoroughly mixed for 10 minutes whereby the temperature
- 10 increases to 35-45°C. Then the Ongronat®1080 is added slowly during a period 30 minutes and the temperature rises to 55-75°C while the reaction mixture starts immediately to whiten. The resulting polyol dispersion is then slowly stirred for another two hours and finally stored for 24 hours with exclusion of air and moisture.

15 Table 6

Example No.	6a	6b	6c	7a	7b	7c
Polyol A [g]	7291,79	7191,79	7091,79	8176,75	8076,75	7976,75
Polyol B [g]	100,00	200,00	300,00	100,00	200,00	300,00
FR olamine [g]	1600,00	1600,00	1600,00	1000,00	1000,00	1000,00
Ongronat® 1080 [g]	997,37	997,37	997,37	712,41	712,41	712,41
Kosmos® 19 [g]	10,84	10,84	10,84	10,84	10,84	10,84
Molar Ratio NCO:OH	1,03	1,03	1,03	1,03	1,03	1,03

T50 mixing [rpm]	5000	5000	5000	5000	5000	5000
Solid Content [wt.%]	26,07	26,17	26,27	17,22	17,32	17,42
P - Content [wt.%]	1,93	1,93	1,93	1,93	1,93	1,93
N - Content [wt.%]	2,37	2,37	2,37	2,37	2,37	2,37
Dynamic Viscosity [mPa·s]	5675	4587	4997	2950	3602	3381
LOH [mgKOH/g]	33,70	34,20	32,90	35,40	33,90	31,20

Example No. 8-11

Discontinuous preparation of FR polyol with a high solid content in terms of a master
 5 batch and subsequent dilution with different polymer modified and standard polyols:

First, a FR Polyol with a final solid content of 27% and containing 16% FR olamine is
 prepared according to the general procedure without seeding described above. This
 FR polyol is then blended before the final 24 hour storage, with a second polyol and
 10 intensely mixed for 10 minutes. The resulting polyol dispersion is then slowly stirred
 for another two hours and finally stored for 24 hours with exclusion of air and
 moisture.

Table 7

Example No.	8	9	10	11	12
Polyol A [g]	6223,79	6223,79	6223,79	6223,79	5169,30
Polyol B [g]	62,50	62,50	62,50	62,50	43,75
FR olamine [g]	1000,00	1000,00	1000,00	1000,00	700,00
Ongronat® 1080 [g]	623,75	623,75	623,75	623,75	436,63
Kosmos® 19 [g]	6,78	6,78	6,78	6,78	4,74
Polyols used for blending					
Polyol A [g]	2083,19	0,00	0,00	0,00	0,00
Polyol B [g]	0,00	2083,19	0,00	0,00	0,00

Polyol C [g]	0,00	0,00	2083,19	0,00	0,00
Polyol D [g]	0,00	0,00	0,00	2083,19	0,00
Polyol E [g]	0,00	0,00	0,00	0,00	3645,58
Molar Ratio NCO:OH	1,03	1,03	1,03	1,03	1,03
T50 mixing [rpm]	5000,00	5000,00	5000,00	5000,00	5000,00
Solid Content [wt.%]	16,30	18,38	20,47	24,63	11,41
Dynamic Viscosity [mPa·s]	2847	3226	3845	4775	5631
LOH [mgKOH/g]	39,90	44,20	41,70	45,40	39,50

Example No. 13a-c

Continuous preparation of FR polyol, also in the presence of a crosslinker:

5

Polyol A, Polyol B, the crosslinking agent, and FR olamine are fed simultaneously via a mixing head together with the gelling catalyst at ambient temperature to a post reaction vessel, equipped with a stirrer under exclusion of air and moisture under a nitrogen blanket, where the reaction mass is slowly stirred for further 48 hours with exclusion of air and moisture.

10

Table 8

Example No.	13a	13b	13c
Polyol A [kg/min]	80,47	69,69	78,49
Crosslinker A [kg/min]	0	0	1,89
Polyol B [kg/min]	1,64	1,42	1,64
FR olamine [kg/min]	10	16	10
Ongronat® 1080 [kg/min]	6,2	10,18	7,37
Kosmos® 19 [g/min]	67,6	108,4	67,6
Molar Ratio NCO:OH	0,95	0,95	0,95
Solid Content [wt.%]	19,5	30,3	22,6

Dynamic Viscosity [mPa·s]	3912	9874	3 553
LOH [mgKOH/g]	37,3	34,8	35

II) Foam Preparation

Apparatuses used:

5

Hennecke Labfoam® Semi continuous operating laboratory plant for test series and laboratory purposes.

10

Pendraulik®31832 Laboratory mixer for application of high shear forces

Foamat® Foam rise height measurement testing device for determination of rise profiles

15

Zwick Roell®Z010 Static materials testing machines for determination of foam hardness, foam density and SAG factor

Chemicals used:

Water Chemical blowing agent.

20 DEOA 90% 90% solution of diethanolamine in water.

ORTEGOL® 204 Crosslinker with a delayed reaction (Evonik).

B 8783 LF2 Surfactant - efficient HR silicone (Evonik).

DABCO BLV Amine catalyst (Air products).

NiAx A1 Amine Catalyst (Momentum).

25 KOSMOS® 29 Gelling catalyst (stannous octoate, Evonik).

NiAx A300 Reactive amine catalyst (Momentum).

NiAx A400 Reactive amine catalyst (Momentum).

NiAx A-33 Amine catalyst (Momentum).

NiAx L-3002 Silicone Surfactant (Momentum).

Ongronat®1080 Toluenediisocyanate (TDI) – mixture consisting of 80%wt 2,4- and 20%wt 2,6- Isomer (CAS 584-84-9).

Ongronat® TR 4040 2,2'/2,4' and 4,4'- Methylene diphenyl diisocyanate. MDI is an aromatic isocyanate.

5

Physical mechanical properties:

The physical mechanical properties and the flame retardance of the foam samples listed were determined in accordance with the following standards, internal audit procedures and measurement methods:

10

Table 9

Hardness	in kPa	DIN EN ISO 3386-1
Air Flow	in L/sec	DIN EN ISO 7231
Resilience	in %	DIN EN ISO 8307
SAG-Factor		ASTM D-1564-64T
Compression Set (22 h, 70°C, 50 %) (CS dry, 50 %)	in %	DIN EN ISO 1856
Cal 117		TECHNICAL BULLETIN 117-A
FMVSS 302		EN ISO 3795
CRIB 5		BS 5852:2006 Crib ignition source 5

General procedure for manufacturing of flexible high resilience foams:

15

All components except the gelling catalyst and the isocyanate are thoroughly mixed at 2800 rpm with the help of the Pendraulik dispergator in a 1 liter plastic bucket for 20 seconds.

After addition of the gelling catalyst the reaction mixture is first stirred under the same conditions for another 10 seconds and then, after quick addition of the whole

20

amount of Ongronat®1080, the whole reaction mixture is mixed for another 7 seconds at 3500 rpm.

The reaction mass is then quickly dropped into a paper box and the foam evolution is monitored via the Foamat® Apparatus.

5

Examples 15a-15g-: Foams with Polyol A

Table 10

Example No.	15a	15b	15c	15d	15e	15f	15g
Ongronat®1080 [g]	52,42	40,85	39,74	39,73	31,76	31,77	32,88
FR Polyol Ex. No. 4b [g]	100	100	-	-	100	-	-
FR Polyol Ex. No. 7a [g]	-	-	100	-	-	100	-
FR Polyol Ex. No. 7b [g]	-	-	-	100	-	-	100
water add [g]	3,475	2,625	2,675	2,675	1,875	1,875	1,825
water total [g]	4	3,1	3,1	3,1	2,3	2,3	2,3
DABCO BLV [g]	0,1	0,15	0,15	0,15	0,18	0,18	0,18
DEOA 90% [g]	1,5	1	0,5	0,5	0,5	0,5	1
Ortegol®204 [g]	1,5	1,5	1,5	1,5	1,5	1,5	1,5
B 8783 LF2 [g]	0,3	0,3	0,3	0,3	0,3	0,3	0,3
Kosmos®29 [g]	0,15	0,15	0,15	0,13	0,15	0,18	0,18
Rise Time [sec]	90	108	114	118	138	128	123

10 Foam Properties

Table 11

Example No.	15g	15a	15b	15c	15d	15e	15f
Density [kg/m ³]	24,5	31,1	29,6	32,3	40,9	42,1	41,1
Hardness [kPa]	1,6	1,8	2,1	2	2,1	2,2	1,9
SAG	2,9	3	2,9	2,9	3,1	3,2	3,3
Airflow [L/sec]	1,04	1	0,4	0,53	0,9	0,95	1,07
CS dry 50, %	9,9	6,7	8,8	9,6	7,5	8,7	12,8
Resilience, %	52	55	47	47	54	53	53

Cal 117	Pass	Pass	Pass	Pass	Pass	Pass	Pass
FMVSS	SE/NBR	SE	SE	SE	DNI	DNI	DNI

Examples 16a-16i: Foams without melamine part 1

Table 12

Example No.	16a	16b	16c	16d	16e	16f	16g	16h	16i
Ongronat®1080 [g]	39,70	39,73	39,70	39,16	39,01	38,46	30,46	30,48	48,24
FR Polyol Ex. No. 6a [g]	100	100	-	-	-	-	100	-	100
FR Polyol Ex. No. 6b [g]	-	-	100	100	-	-	-	100	-
FR Polyol Ex. No. 6c [g]	-	-	-	-	100	100	-	-	-
water add [g]	2,65	2,65	2,65	2,675	2,78	2,8	2	2	3,425
water total [g]	3,1	3,1	3,1	3,1	3,1	3,1	2,3	2,3	3,9
DABCO BLV [g]	0,2	-	-	-	-	-	-	-	-
Niax A1 [g]	-	0,2	0,2	0,2	0,2	0,2	0,2	0,25	0,15
DEOA 90% [g]	0,75	0,75	0,75	0,5	0,75	0,5	0,5	0,5	1
Ortegol®204 [g]	1,5	1,5	1,5	1,5	1	1	1	1	1,5
B 8783 LF2 [g]	0,3	0,3	0,3	0,3	0,3	0,3	0,3	0,3	0,3
Kosmos®29 [g]	0,1	0,15	0,1	0,12	0,12	0,12	0,12	0,12	0,1
Rise Time [sec]	140	100	114	112	120	120	150	130	100

Foam Properties

Table 13

Example No.	16a	16b	16c	16d	16e	16f	16g	16h	16i
Density [kg/m ³]	33,1	30,8	33,7	31,0	29,9	30,2	40,6	40,6	25,9
Hardness [kPa]	3,6	3,4	3,8	3,4	3,3	3,4	4,5	4,4	3,3
SAG	3,3	3,1	3,6	3,2	3,2	2,9	3,2	3,2	3,0
Airflow [L/sec]	1,1	1,4	1,2	1,3	0,9	1,4	1,0	1,1	1,0
CS dry 50, %	5,1	5,9	7,4	5,9	5,8	5,4	8,2	8,0	8,9
Resilience, %	52,0	50,0	54,0	50,0	48,5	52,0	52,0	50,5	48,5
Cal 117	pass	pass	pass	pass	pass	pass	pass	pass	pass
FMVSS	SE	DNI	DNI	DNI	SE	DNI	DNI	DNI	SE

Examples 17a-17h: Foams without melamine part 2

5

Table 14

Example No.	17a	17b	17c	17d	17e	17f	17g	17h
Ongronat®1080 [g]	41,31	40,20	40,76	32,23	32,23	32,22	49,27	49,28
FR Polyol Ex. No. 6a [g]	70	-	-	70	-	-	70	-
FR Polyol Ex. No. 6b [g]	-	70	-	-	70	-	-	70
FR Polyol Ex. No. 6c [g]	-	-	70	-	-	70	-	-
Polyol C [g]	30	30	30	30	30	30	30	30
water add [g]	2,625	2,675	2,65	1,875	1,875	1,875	3,425	3,425
water total [g]	3,1	3,1	3,1	2,3	2,3	2,3	3,9	3,9
DABCO BLV [g]	0,16	0,18	0,18	0,25	0,3	0,2	0,1	0,12
DEOA 90% [g]	1	0,5	0,75	0,5	0,5	0,5	1	1
Ortegol®204 [g]	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
B 8783 LF2 [g]	0,3	0,3	0,3	0,3	0,3	0,3	0,3	0,3
Kosmos®29 [g]	0,12	0,12	0,12	0,12	0,1	0,12	0,1	0,1
Rise Time [sec]	143	120	131	150	140	153	112	111

Foam Properties

Table 15

Example No.	17a	17b	17c	17d	17e	17f	17g	17h
Density [kg/m ³]	30,4	31,6	30,8	41,6	42,0	42,6	25,3	25,5
Hardness [kPa]	2,6	3,0	2,7	3,6	3,3	3,4	2,6	2,6
SAG	3,0	2,9	3,1	3,2	3,3	3,2	2,7	2,7
Airflow [L/sec]	1,9	1,3	1,5	1,5	1,5	1,5	1,4	1,2
CS dry 50, %	6,8	7,9	6,2	6,9	6,3	7,8	9,0	9,5
Resilience, %	54,0	52,0	51,5	53,0	52,5	48,0	51,0	50,0
Cal 117	pass	pass	pass	pass	pass	pass	pass	pass
FMVSS	DNI	DNI	DNI	DNI	DNI	DNI	SE	DNI

Examples 18a-18i: Foams without melamine part 3

5

Table 16

Example No.	18a	18b	18c	18d	18e	18f	18g	18h	18i
Ongronat®1080 [g]	40,92	40,90	40,89	42,00	34,06	34,02	32,92	49,99	49,98
FR Polyol Ex. No. 6a [g]	50	-	-	50	50	-	-	50	-
FR Polyol Ex. No. 6b [g]	-	50	-	-	-	50	-	-	50
FR Polyol Ex. No. 6c [g]	-	-	50	-	-	-	50	-	-
Polyol C [g]	50	50	50	50	50	50	50	50	50
water add [g]	2,675	2,675	2,675	2,625	1,825	1,825	1,875	3,425	3,425
water total [g]	3,1	3,1	3,1	3,1	2,3	2,3	2,3	3,9	3,9
DABCO BLV [g]	0,16	0,16	0,14	0,14	0,25	0,2	0,2	0,12	0,12
DEOA 90% [g]	0,5	0,5	0,5	1	1	1	0,5	1	1
Ortegol®204 [g]	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5
B 8783 LF2 [g]	0,3	0,3	0,3	0,3	0,3	0,3	0,3	0,3	0,3
Kosmos®29 [g]	0,12	0,12	0,12	0,12	0,16	0,12	0,12	0,12	0,1
Rise Time [sec]	110	113	117	120	120	150	146	100	115

Foam Properties

Table 17

Example No.	18a	18b	18c	18d	18e	18f	18g	18h	18i
Density [kg/m ³]	34,0	33,9	33,9	33,3	40,7	41,2	41,8	25,0	25,0
Hardness [kPa]	3,7	3,6	3,7	3,4	3,3	3,2	3,6	2,9	2,8
SAG	3,0	3,1	3,1	3,2	3,5	3,0	3,3	2,7	2,8
Airflow [L/sec]	0,2	0,5	0,3	0,6	1,0	1,2	1,3	0,7	0,7
CS dry 50, %	9,2	9,1	8,9	8,4	7,6	7,3	6,5	6,2	6,8
Resilience, %	33,0	45,5	42,5	46,0	52,5	53,0	51,0	48,0	49,5
Cal 117	pass	pass	pass	pass	pass	pass	pass	pass	pass
FMVSS	DNI	DNI	DNI	DNI	DNI	DNI	DNI	SE	SE

5 Examples 19a-20b: Foams with Melamine

Table 18

Example No.	19a	19b	20a	20b
Ongronat®1080 [g]	31,25	33,31	41,15	32,92
FR Polyol Ex. No. 6b [g]	45	45	45	45
Polyol C [g]	-	-	55	55
Polyol A [g]	55	-	-	-
Polyol E [g]	-	55	-	-
Melamine [g]	15	15	15	15
water add [g]	1,93	1,93	2,73	1,93
water total [g]	2,3	2,3	3,1	2,3
DABCO BLV [g]	0,18	0,18	0,12	0,18
Ortegol®204 [g]	1,5	1,5	1,5	1,5
B 8783 LF2 [g]	0,3	0,3	0,3	0,2
Kosmos®29 [g]	0,15	0,15	0,15	0,12
Rise Time [sec]	125	145	105	128

Foam Properties

Table 19

Example No.	19a	19b	20a	20b
Density [kg/m ³]	37,8	40,1	31,1	39
Hardness [kPa]	3,4	3,6	4,9	5,1
SAG	2,8	2,9	2,8	3,3
Airflow [L/sec]	0,3	0,36	0,11	0,53
CS dry 50, %	5,3	5	6,5	5,6
Resilience, %	45	47	29	49
Cal 117	Pass	Pass	Pass	Pass
FMVSS	DNI	DNI	SE	DNI
CRIB 5	Pass	Pass	Pass	Pass

Examples 21a-22b: Foams with Melamine

5

Table 20

Example No.	21a	21b	21c	21d	21e	22a	22b
Ongronat®1080 [g]	45,67	37,68	37,13	37,03	56,68	38,67	57,28
FR Polyol Ex. No. 6a [g]	-	-	60	-	60	-	-
FR Polyol Ex. No. 6b [g]	60	60	-	-	-	70	70
FR Polyol Ex. No. 6c [g]	-	-	-	60	-	-	-
Polyol C [g]	40	40	40	40	40	30	30
Melamine [g]	25	25	25	25	25	25	25
water add [g]	3,03	2,23	2,25	2,26	3,91	2,46	3,83
water total [g]	3,5	2,7	2,7	2,7	4,45	2,9	4,45
DABCO BLV [g]	0,16	0,2	0,2	0,2	0,1	0,2	0,1
DEOA 90% [g]	1	1	0,75	0,7	1,7	0,7	2

Ortegol®204 [g]	1,5	1,5	1,5	1,5	1,5	1,5	1,7
B 8783 LF2 [g]	0,3	0,3	0,3	0,3	0,3	0,3	0,3
Kosmos®29 [g]	0,15	0,14	0,14	0,16	0,13	0,16	0,13
Rise Time [sec]	120	140	140	150	120	123	122

Foam Properties

5 Table 21

Example No.	21a	21b	21c	21d	21e	22a	22b
Density [kg/m3]	34,5	46,1	46,2	47,1	27,5	39,7	28,1
Hardness [kPa]	5,68	6,8	7,07	6,74	4,45	4,84	3,87
SAG	3,19	3,82	3,63	3,48	2,76	3,43	2,98
Airflow [L/sec]	0,56	0,53	0,65	0,94	0,42	1,2	0,55
CS dry 50, %	28,7	24,7	28,4	30,4	19	12,3	30,1
Resilience, %	44	51	49	51	45	51	48
Cal 117	Pass	Pass	Pass	Pass	Pass	Pass	Pass
FMVSS	DNI	DNI	DNI	DNI	DNI	DNI	SE
CRIB 5	Pass	Pass	Pass	Pass	Pass	Pass	Pass

Examples 23a-23e: Moulded Foams

10 Table 22

Example No.	23a	23b	23c	23e
Ongronat®1080 [g]	39,73	39,74	31,77	32,88
FR Polyol Ex. No. 7b [g]	100	-	100	-
FR Polyol Ex. No. 13 [g]	-	100	-	100
Melamine [g]	15	15	15	15
water add [g]	2,675	2,675	1,875	1,825
water total [g]	3,1	3,1	2,3	2,3

DABCO BLV [g]	0,15	0,15	0,18	0,18
DEOA 90% [g]	0,5	0,5	0,5	1
Ortegol®204 [g]	1,5	1,5	1,5	1,5
B 8783 LF2 [g]	0,3	0,3	0,3	0,3
Kosmos®29 [g]	0,13	0,15	0,18	0,18
Rise Time [sec]	100	100	109	106

Foam Properties


Table 23

Example No.	23a	23b	23c	23e
Density [kg/m³]	30,4	30,4	40,9	39,7
Hardness [kPa]	2,4	2,6	2,8	2,5
SAG	3,1	3,1	3,4	3,5
Airflow [L/sec]	0,68	0,46	0,56	0,65
CS dry 50, %	9,1	7,5	6,6	7,5
Resilience, %	51	51	55	55
Cal 117	Pass	Pass	Pass	Pass
FMVSS	DNI	SE	DNI	DIN
CRIB 5	Pass	Pass	Pass	Pass

Claims


1. Process for preparing a flame-resistant polymer-modified polyol having a solids content of 1 to 65 wt.% wherein (i) at least one polyisocyanate and (ii) an
5 olamine are reacted in (iii) a base polyol having at least two active hydrogen containing groups of which more than 50% are primary active hydrogen containing groups and wherein the olamine has at least one phosphonic ester group attached to a tertiary nitrogen atom and contains at least two hydroxyl groups.
- 10 2. Process according to claim 1 **characterized in that** the base polyol has a molecular weight from 2000 g/mol to 15000 g/mol, in particular from 2500 g/mol to 12000 g/mol, more particularly from 3000 g/mol to 7000 g/mol, and/or an OH-functionality of 2 to 8, in particular of 2 to 6.
- 15 3. Process according to claim 1 or 2 **characterized in that** the base polyol used is a polyether polyol having preferably more than 50%, more preferably more than 70%, even more preferably up to 85%, primary hydroxyl groups.
- 20 4. Process according to any of the preceding claims **characterized in that** the at least one polyisocyanate is present in a mixture with up to 40 mol% of a monoisocyanate.
- 25 5. Process according to any of the preceding claims **characterized in that** the equivalents ratio NCO:OH between the OH groups of the olamine and the NCO groups of the at least one polyisocyanate and also optionally of the monoisocyanate is in the range from 0.5 to 1.5.

6. Process according to claim 5 **characterized in that** the equivalents ratio NCO:OH is in the range from 0.85 to 1.2.
7. Process according to claim 5 **characterized in that** the equivalents ratio NCO:OH is in the range from 0.9 to 1.15.
8. Process according to any of the preceding claims **characterized in that** the
- olamine conforms to the following general formula (I):

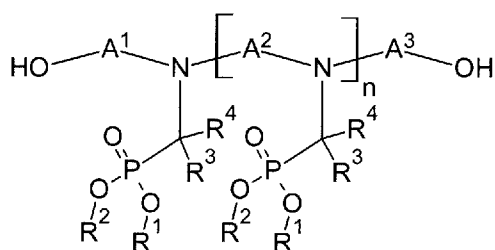

(I)

where R^1 and R^2 are each independently an alkyl moiety of 1 to 18 carbon atoms, R^3 and R^4 are hydrogen atoms or any desired hydrocarbon moieties and A^1 and also A^3 are identical or different moieties of the formulae

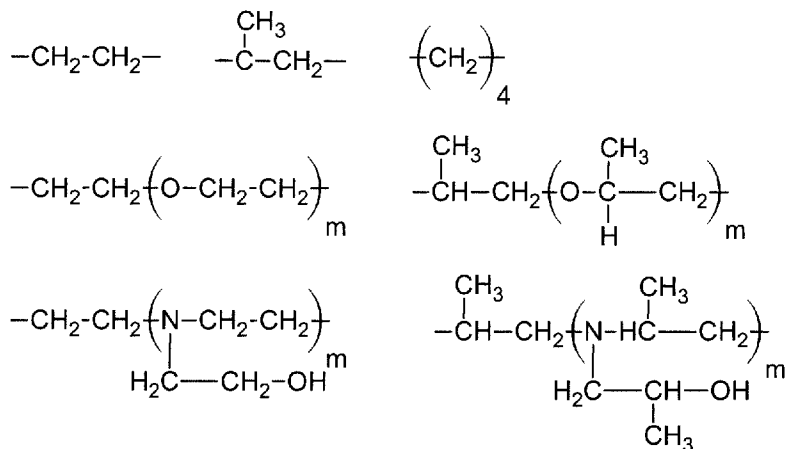


where m is an integer from 1 to 10, and

A^2 is an alkylene or aralkylene moiety of 2 to 12 carbon atoms, an arylene moiety or an A^1 or A^3 moiety, and

n is an integer from 0 to 10.

9. Process according to any of the preceding claims **characterized in that** the olamine conforms to the following general formula (II):



(II)

- 5 where R¹ and R² are the same or different and are each independently alkyl of 1 to 18 carbon atoms, preferably 1 to 4 carbon atoms, aryl or aralkyl.
10. Process according to any of the preceding claims **characterized in that** the reaction is carried out in the presence of a cross-linking agent having a weight average molecular weight from 200 to 1000 g/mol, in particular from 400 to 900 g/mol, more particularly from 500 to 800 g/mol.
- 10 11. Process according to claim 10 **characterized in that** said cross-linking agent has a functionality of 2 to 8, in particular 3 to 6, active hydrogen containing groups, capable of reacting with isocyanate functions.
- 15 12. Process according to any of claims 10 or 11 **characterized in that** said cross-linking agent contains hydroxyl functions.
- 20 13. Process according to any of claims 10 to 12 **characterized in that** said cross-linking agent is a polyether polyol.
- 25 14. Process according to any of claims 10 to 13 **characterized in that** said cross-linking agent is present in the reaction in an amount of from 0.1 to 11 g/100 g polymer-modified polyol, in particular from 0.2 to 7 g/100 g polymer-modified polyol, more particularly from 0.5 to 6 g/100 g polymer-modified polyol.

15. Process according to any of the preceding claims **characterized in that** the reaction is carried out in the presence of water, low molecular weight hydroxyl- or amino-containing compounds, catalysts, further flame retardants and/or synergists, organic and inorganic fillers and/or further auxiliaries.

5

16. Process according to any of the preceding claims **characterized in that** the reaction is carried out at a temperature of 30°C to 170°C.

10

17. Process according to any of the preceding claims **characterized in that** the reaction is carried out in a continuous manner.

18. Polymer-modified polyol dispersion obtainable by a process according to the preceding claims.

15

19. Process for preparing flame-resistant, optionally foamed polyurethane plastics, in particular flexible foams, wherein at least one polyisocyanate is reacted with a polymer-modified polyol according to claim 18, optionally in the presence of water and/or volatile organic substances as blowing agents and also further optionally by co-use of catalysts, foaming auxiliaries and additives, chain-extending and/or crosslinking agents, organic or inorganic filling materials, flame retardants and/or synergists.

20

20. Use of a polymer-modified polyol according to claim 18 in the manufacture of flexible polyurethane foams.

25

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2016/069536

A. CLASSIFICATION OF SUBJECT MATTER		
INV.	C08G18/76	C08G18/08
	C08G18/48	C08G18/24
		C08G18/32
		C08G18/22
		C08G18/38
		C08G18/40
ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) C08G		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 92/02567 A1 (POLYOL INT BV [NL]) 20 February 1992 (1992-02-20) cited in the application claims 1,2	1-20
A	WO 2013/101524 A1 (DOW GLOBAL TECHNOLOGIES LLC [US]) 4 July 2013 (2013-07-04) paragraph [0057]; claim 1	1-20
A	US 3 076 010 A (BECK THOMAS M ET AL) 29 January 1963 (1963-01-29) cited in the application example 5	1-20
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 19 October 2016		Date of mailing of the international search report 10/11/2016
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Lanz, Sandra

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2016/069536

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9202567	A1	20-02-1992	AU 8233091 A 02-03-1992
		CA 2048129 A1 01-02-1992	
		WO 9202567 A1 20-02-1992	

WO 2013101524	A1	04-07-2013	CN 104245771 A 24-12-2014
			EP 2797976 A1 05-11-2014
			KR 20140108534 A 11-09-2014
			US 2014329925 A1 06-11-2014
			WO 2013098744 A2 04-07-2013
			WO 2013101524 A1 04-07-2013

US 3076010	A	29-01-1963	NONE
