



(19) **United States**
(12) **Patent Application Publication**
Hinman et al.

(10) **Pub. No.: US 2023/0188198 A1**
(43) **Pub. Date: Jun. 15, 2023**

(54) **WI-FI HOTSPOT REPEATER**

Publication Classification

(71) Applicant: **AIRSPAN IP HOLDCO LLC**, Boca Raton, FL (US)
(72) Inventors: **Brian Hinman**, Los Gatos, CA (US); **Mustafa Rangwala**, Sunnyvale, CA (US); **Jaime Fink**, San Francisco, CA (US)

(51) **Int. Cl.**
H04B 7/155 (2006.01)
H04B 7/0413 (2006.01)
H04B 7/026 (2006.01)
(52) **U.S. Cl.**
CPC *H04B 7/15507* (2013.01); *H04B 7/026* (2013.01); *H04B 7/0413* (2013.01)


(21) Appl. No.: **18/107,455**
(22) Filed: **Feb. 8, 2023**

(57) **ABSTRACT**

Related U.S. Application Data

WiFi repeater devices described provided herein. An example device includes an enclosure that is configured to be mounted to a window that divides an outdoor area from an indoor area. The enclosure houses a 5 GHz WiFi client radio coupled with a high order MIMO (multiple input, multiple output) antenna, the high order MIMO antenna transmitting and receiving data from a 5 GHz access point located in the outdoor area, and a 2.4 GHz WiFi access point radio coupled with a MIMO (multiple input, multiple output) antenna, the MIMO antenna transmitting and receiving data from 2.4 GHz UEs located in the indoor area.

(63) Continuation of application No. 17/176,880, filed on Feb. 16, 2021, now Pat. No. 11,626,921, which is a continuation of application No. 14/848,202, filed on Sep. 8, 2015, now Pat. No. 10,958,332.
(60) Provisional application No. 62/047,640, filed on Sep. 8, 2014.

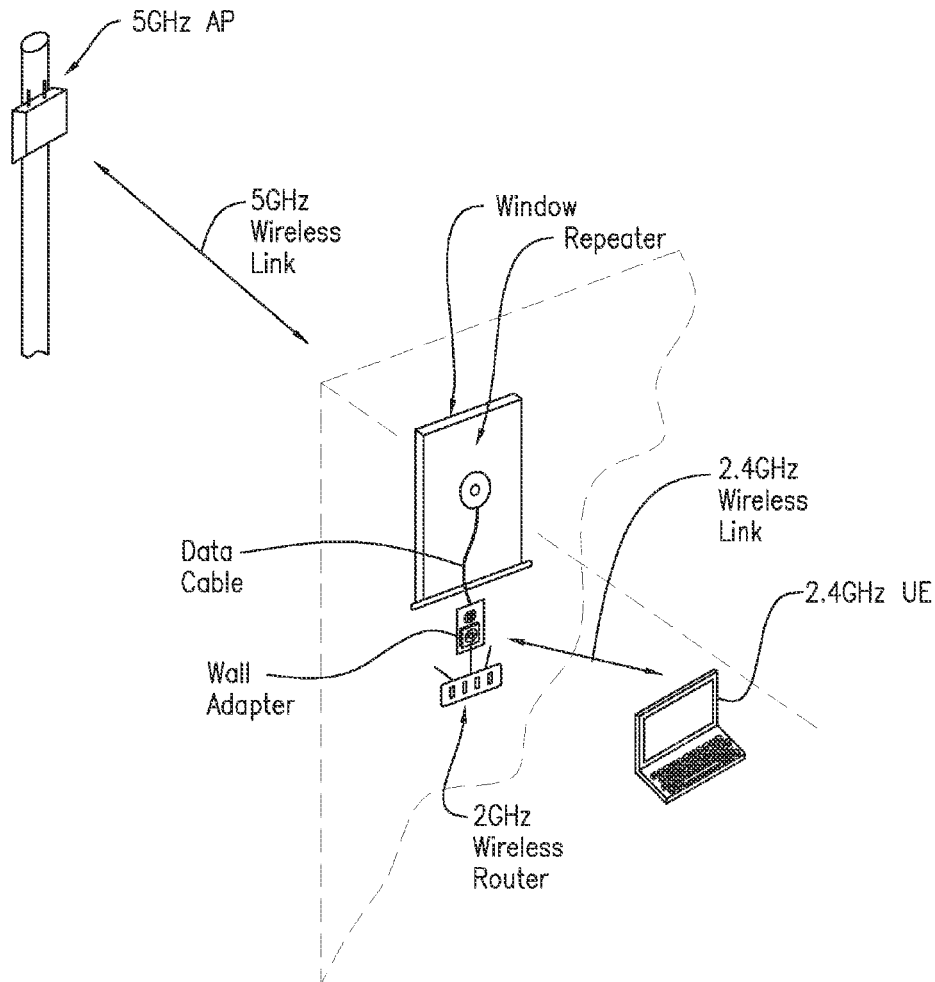

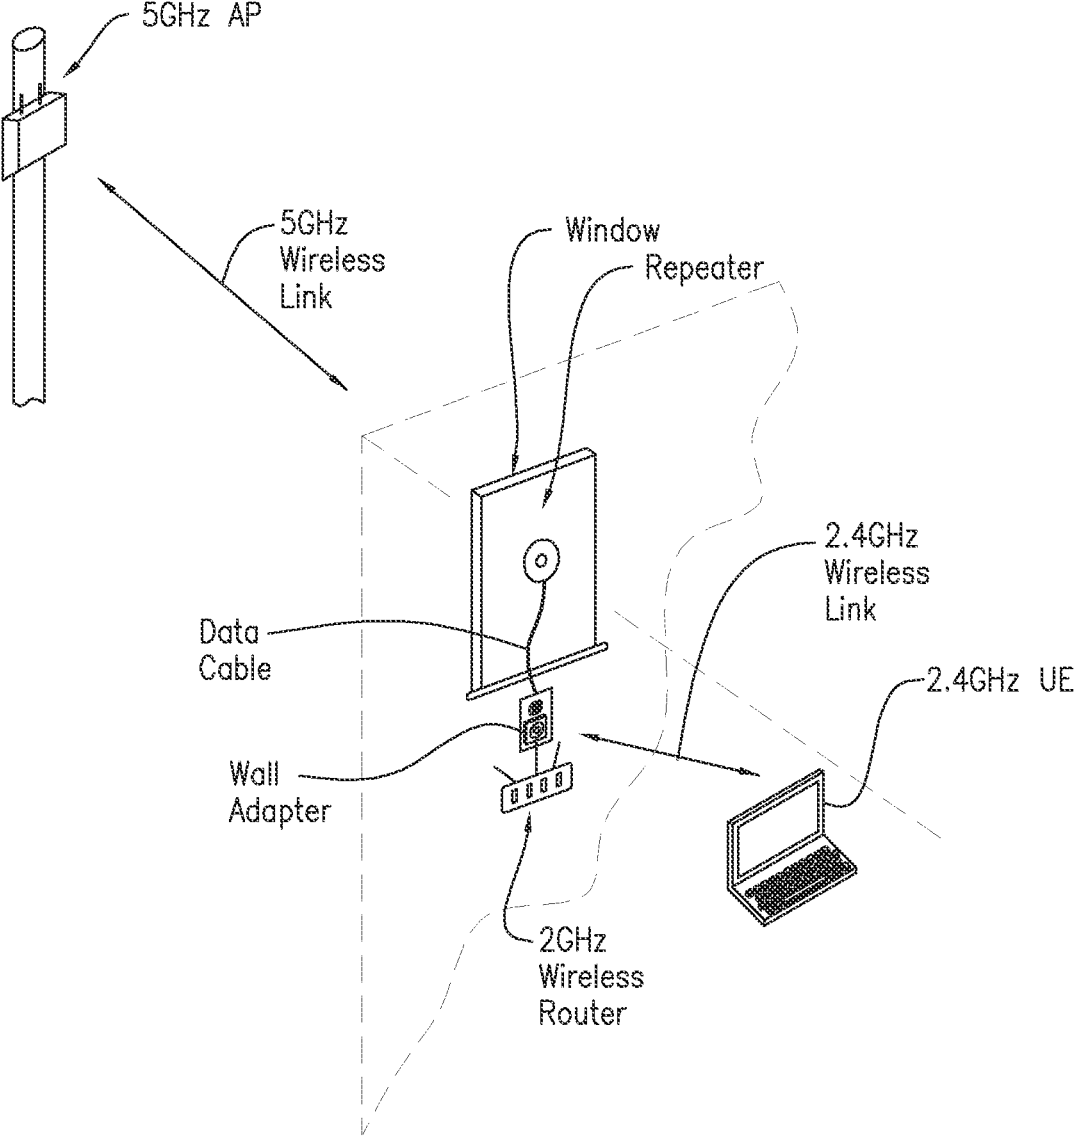


FIG. 1

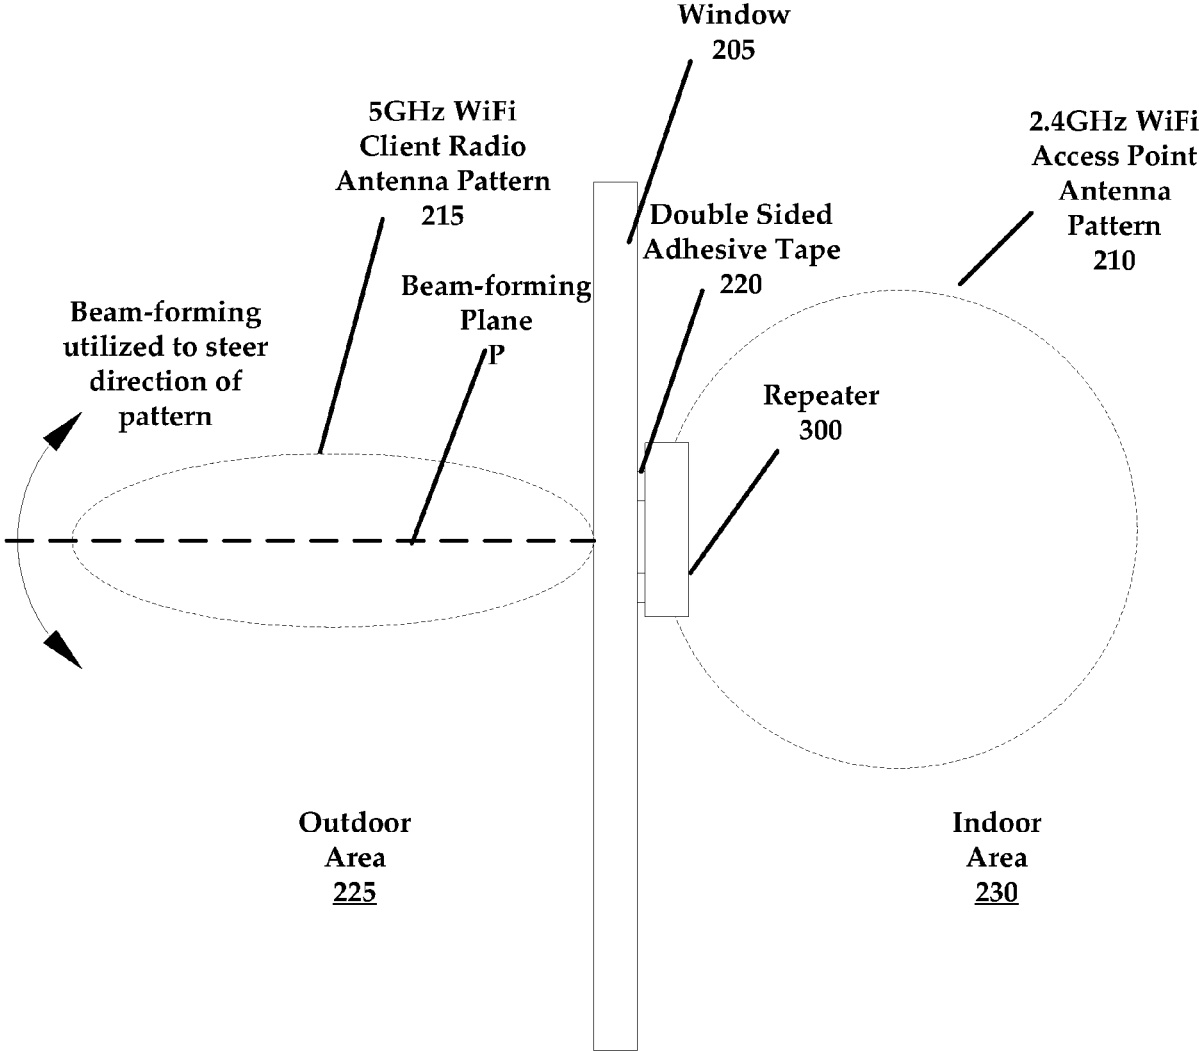


FIG. 2

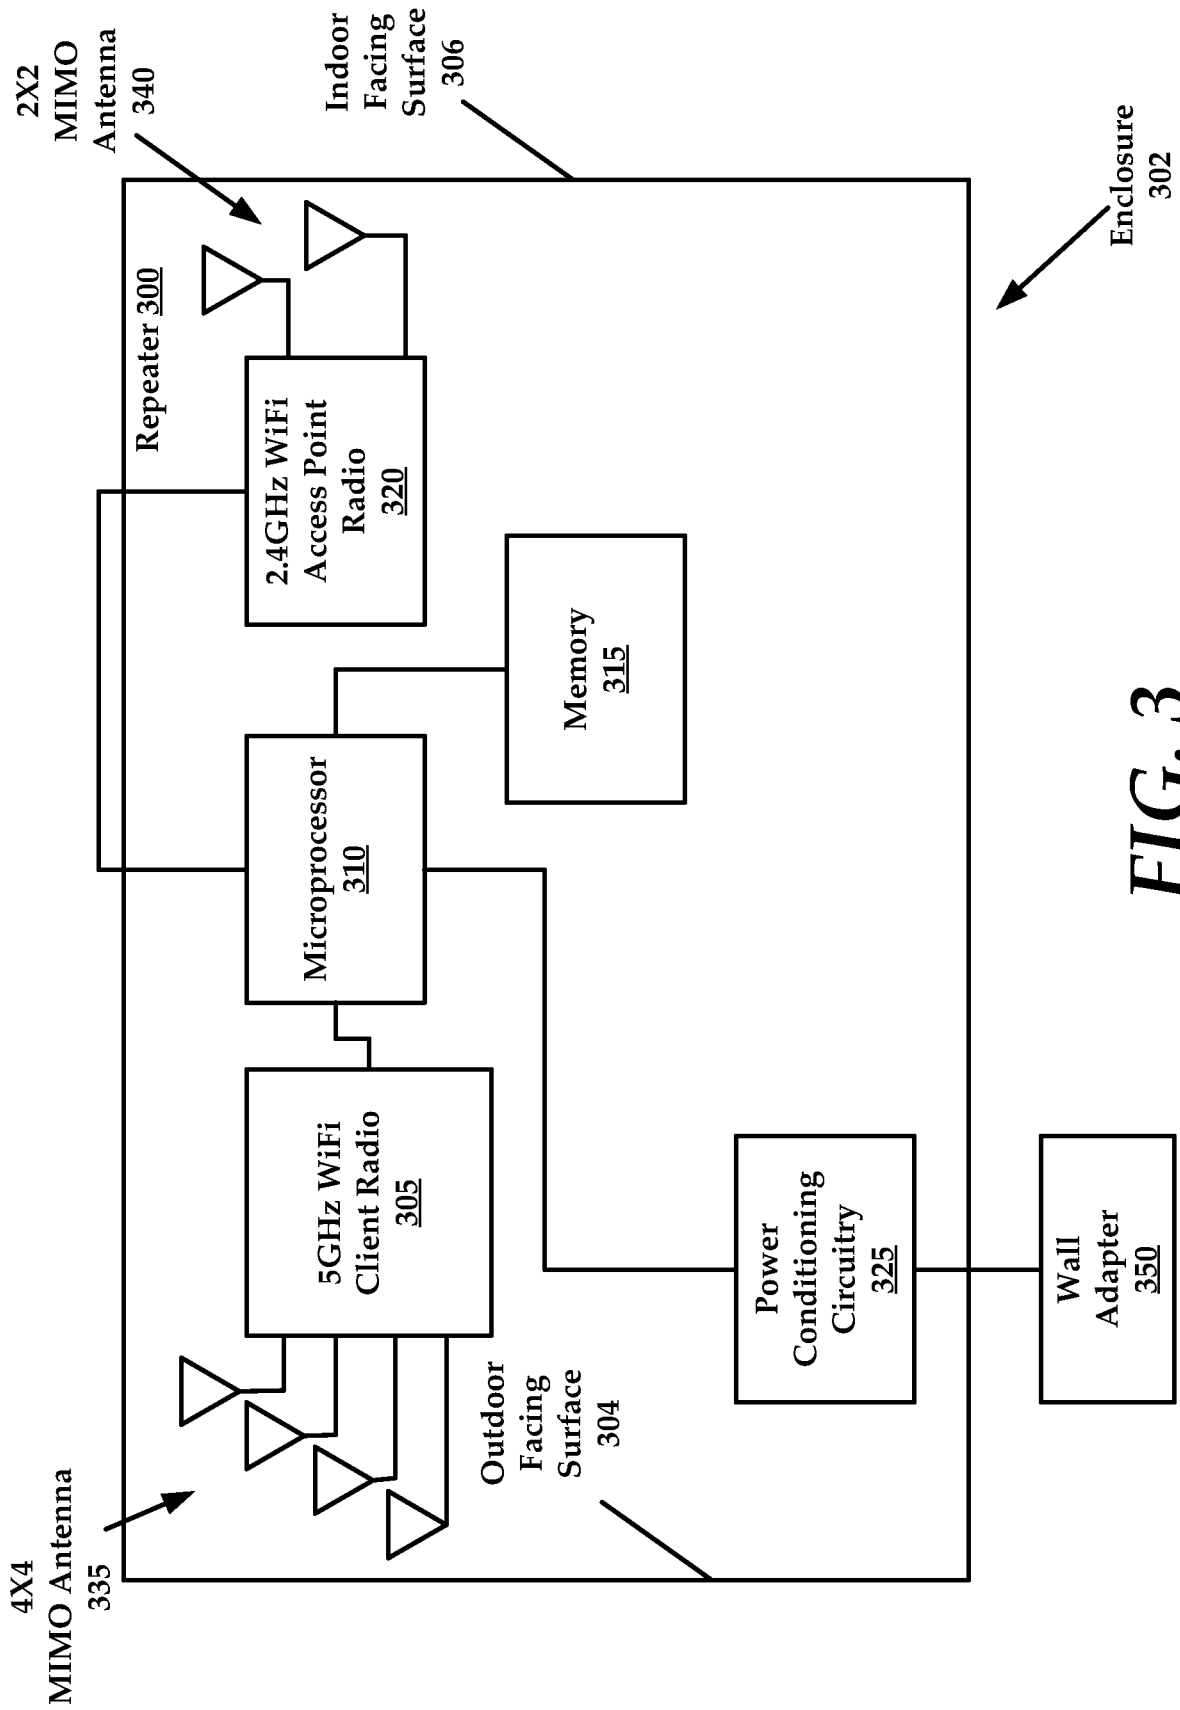


FIG. 3

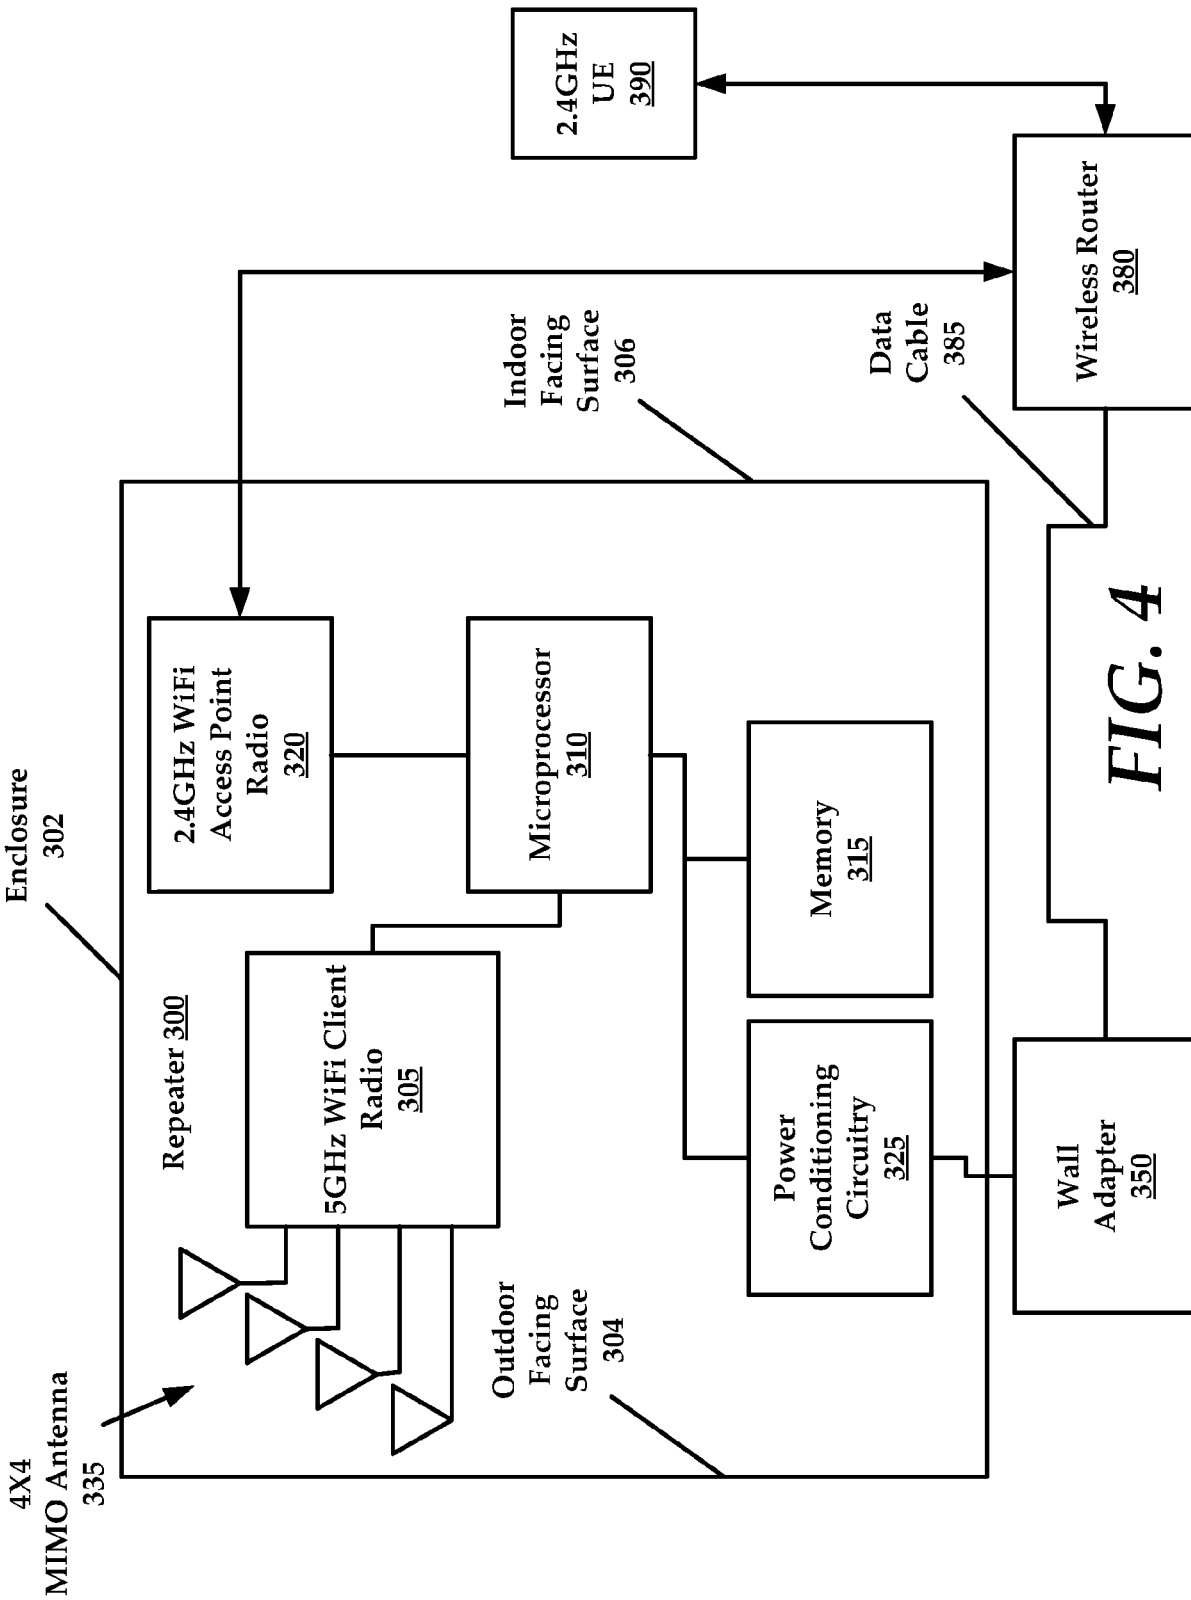


FIG. 4

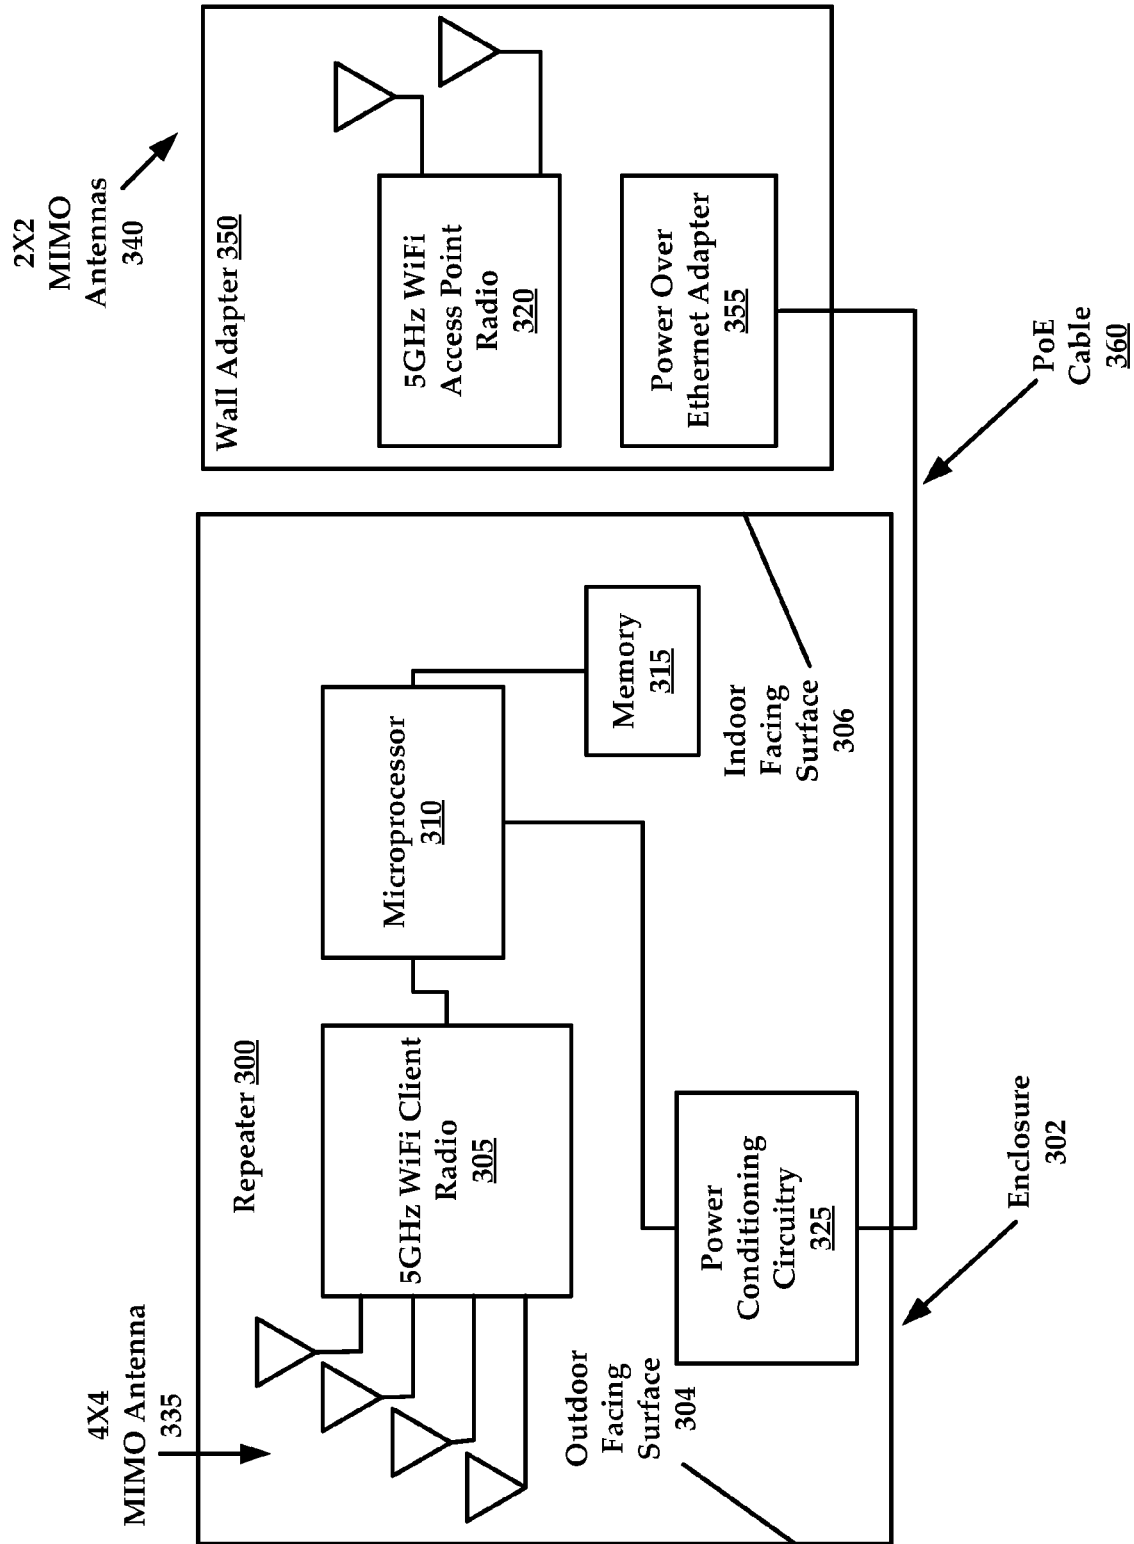


FIG. 5

WI-FI HOTSPOT REPEATER

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This application is a continuation of U.S. Application Serial No. 17/176,880, titled “Systems and Methods of a Wi-Fi Repeater Device”, filed on Feb. 16, 2021, which is a continuation of U.S. Application Serial No. 14/848,202, titled “Wi-Fi HOTSPOT REPEATER”, filed on Sep. 8, 2015, now U.S. Pat. No. 10,958,332, issued on Mar. 23, 2021, which claims the priority benefit of U.S. Provisional Pat. Application Serial No. 62/047,640, filed on Sep. 8, 2014, titled “Wi-Fi HOTSPOT REPEATER”, all of which are hereby incorporated by reference herein in their entirety, including all references cited therein.

FIELD OF THE INVENTION

[0002] The present technology is generally related to a wireless networking, and more specifically, but not by way of limitation to a wireless repeater that is configured to be positioned on a window. The wireless repeater provides an access point/interface between outdoor hotspots that broadcast in 5 GHz frequency and indoor clients that use 2.4 GHz frequency.

SUMMARY

[0003] According to some embodiments, the present technology is directed to a repeater device, comprising: (a) an enclosure that is configured to be mounted to a window that divides an outdoor area from an indoor area, the enclosure housing: (b) a 5 GHz WiFi client radio coupled with a high order MIMO (multiple input, multiple output) antenna, the high order MIMO antenna transmitting and receiving data from a 5 GHz access point located in the outdoor area; and (c) a 2.4 GHz WiFi access point radio coupled with a MIMO (multiple input, multiple output) antenna, the MIMO antenna transmitting and receiving data from 2.4 GHz UEs located in the indoor area.

[0004] According to other embodiments, the present technology is directed to a repeater device, comprising: (a) an enclosure that is configured to be mounted to a window that divides an outdoor area from an indoor area, the enclosure housing: (b) a first radio operating on a first frequency, the radio coupled with a first antenna, the first antenna transmitting and receiving data from an outdoor access point located in the outdoor area; and (c) an access point radio coupled with a second antenna, the second antenna transmitting to and receiving data from UEs located in the indoor area using a second frequency.

[0005] According to other embodiments, the present technology is directed to a repeater device, comprising: (a) an enclosure that is configured to be mounted to a window that divides an outdoor area from an indoor area, the enclosure housing: (b) a first radio operating on a first frequency, the radio coupled with a first antenna, the first antenna receiving data from an outdoor access point located in the outdoor area; (c) a microprocessor that converts the data from the first frequency to a second frequency and data from the second frequency to the first frequency; (d) an interface for coupling with a wireless router, the wireless router transmitting the converted data to UEs located in the indoor area using the second frequency.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006] Certain embodiments of the present technology are illustrated by the accompanying figures. It will be understood that the figures are not necessarily to scale and that details not necessary for an understanding of the technology or that render other details difficult to perceive may be omitted. It will be understood that the technology is not necessarily limited to the particular embodiments illustrated herein.

[0007] FIG. 1 is a perspective view of a repeater device of the present technology, as well as an outdoor access point and indoor UEs.

[0008] FIG. 2 is a side view of the repeater device of FIG. 1 mounted on a window.

[0009] FIG. 3 is a schematic diagram of an example repeater device, constructed in accordance with the present technology.

[0010] FIG. 4 is a schematic diagram of an example repeater device that couples with an indoor wireless router.

[0011] FIG. 5 is a schematic diagram of another example repeater device that couples with an indoor wireless router.

DETAILED DESCRIPTION

[0012] In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the disclosure. It will be apparent, however, to one skilled in the art, that the disclosure may be practiced without these specific details. In other instances, structures and devices are shown at block diagram form only in order to avoid obscuring the disclosure.

[0013] In general, the present technology is directed to a repeater device that functions as a communications gateway between outdoor hotspots, which operate at 5 GHz, and indoor UEs that utilize 2.4 GHz frequency for communication. Broadly, the present technology functions as a WiFi-to-home network gateway.

[0014] This repeater device provides a communications gateway that comprises a first radio that operates a first frequency and a second radio that operates on a second frequency. The repeater device includes a microprocessor that is configured to receive and convert data packets having the first frequency into the data packets having the second frequency. The repeater device then transmits the converted packets to 2.4 GHz UEs in an indoor area.

[0015] Broadly, the microprocessor is configured to convert data packets from 5 GHz to 2.4 GHz and from 2.4 GHz to 5 GHz as needed. For example, data packets received from the 5 GHz WiFi hotspot are converted into 2.4 GHz data packets that are transmitted to UEs in the indoor area.

[0016] Similarly, data packets received from the UEs in 2.4 GHz frequency are converted into 5 GHz data packets that are transmitted to the 5 GHz WiFi hotspot. Again, the 5 GHz and 2.4 GHz frequencies are merely example frequencies that can be used. The repeater device can be configured to convert data packets between any two different frequencies and facilitate transmission of the converted data packets between outdoor hotspots and indoor UEs.

[0017] With increasing deployment of Metro Wi-Fi hotspots in outdoor settings, it is desirable to leverage that infrastructure for indoor use. In the past, attempts to connect from indoor clients to outdoor access points have been marginally successful. This lack of success is due, in part, to low

power clients having low gain antennas that have difficulty coupling with outdoor Wi-Fi hotspots. These connectivity issues are compounded when the path between the indoor client and the outdoor access point is obstructed. For example, obstructions can cause a SNR (signal to noise) in the wireless that is marginal, resulting in a slow transmission speed and high latency due to excessive packet re-transmission. That is, when the SNR is marginal to low, packets transmitted between the indoor clients and outdoor access points are lost and must be re-transmitted.

[0018] Referring now to FIGS. 1-3 collectively, the present technology, in one embodiment, comprises a window-mounted Wi-Fi repeater **300** that is configured to leverage outdoor hotspots for indoor use.

[0019] In one embodiment, the repeater **300** comprises a 5 GHz Wi-Fi client (e.g., node) radio **305**, a microprocessor **310**, memory **315**, a 2.4 GHz Wi-Fi access point radio **320**, power conditioning circuitry **325**, a 4X4 MIMO (multiple input, multiple output) antenna **335**, and a 2X2 MIMO antenna **340**.

[0020] The 5 GHz Wi-Fi client radio **305** comprises a directional antenna that is positioned toward the outside of the window to pick-up the signal from the 5 GHz access point. A high-order MIMO radio, such as the 4X4 MIMO antenna **335** is desirable in the 5 GHz WiFi client radio **305**, as antenna beam-forming provided by a high order MIMO radio allows the maximum gain to be steered in a direction that is advantageous for the 5 GHz access point to which the repeater **300** is coupled. The maximum gain point need not be fixed necessarily normal to the window plane.

[0021] FIG. 2 illustrates antenna beam-forming relative to a beam-forming plane that is normal N to the window **205**. The radiation of the antenna **335** can be translated upwardly and/or downwardly (as well as side-to side) to direct the antenna radiation as needed. In one instance, the 5 GHz access point is not to be located in a direction that is perfectly linear to the repeater **300**. For example, the 5 GHz access point can be position above, below, and/or to the side of the repeater **300**. Beam-forming steers the antenna radiation towards the 5 GHz access point so as to maximize signal strength.

[0022] Data packets received by the 5 GHz WiFi client radio **305** are processed through a microprocessor **310**, and then relayed to a 2.4 GHz Wi-Fi access point radio **320**.

[0023] With antenna gain toward the inside of the home or office, the 2.4 GHz Wi-Fi access point radio **320** re-transmits the data packets to wireless devices, such as 2.4 GHz User Equipment (UE) that have 2.4 GHz client radios. In the reverse direction, upstream packets from the 2.4 GHz UEs are received by the 2.4 GHz Wi-Fi access point radio **320** of the repeater, over the 2.4 GHz wireless link, processed through the microprocessor **310**, and re-transmitted to the 5 GHz access point over the 5 GHz wireless link.

[0024] Logic for converting the 5 GHz data packets to 2.4 GHz data packets, and vice-versa is stored in memory **315**, as well as beam-forming logic. The microprocessor **310** executes the logic stored in memory **315** to accomplish functions such as beam-forming and data packet conversion, as needed.

[0025] In one embodiment, the repeater **300** is enclosed in a plastic enclosure **302** that allows the 2.4 GHz signals (2.4 GHz WiFi Access Point Antenna Pattern **210**) and 5 GHz signals (5 GHz WiFi Client Radio Antenna Pattern **215**) to reach the respective radios with minimal loss. It is

mounted to a window using double-sided adhesive tape **220**, allowing it to be removed later, but providing adequate strength for reliable attachment. Other suitable methods for attaching the repeater **300** to a window or other portion of a structure are also likewise contemplated for use in accordance with the present technology.

[0026] In one embodiment, the window separates an outdoor area **225** from an indoor area **230**. The 5 GHz access point is position in the outdoor area and the 2.4 GHz UEs are positioned in the indoor area. The 4X4 MIMO antenna **335** transmits and receives data from a 5 GHz access point located in the outdoor area, while the 2X2 MIMO antenna **340** transmits and receives data from a 2.4 GHz UEs located in the indoor area. In one embodiment, the repeater **300** is positioned on the inside of the window within the indoor area. For example, the 5 GHz access point is located in an outside area such as a street lamp, an antenna tower, a building top or other common outdoor location/structure.

[0027] The 4X4 MIMO antenna **335** is disposed proximate an outdoor facing surface **304** of the enclosure of the repeater **300**. Also, the 2X2 MIMO antenna **340** is disposed proximate an indoor facing surface **306** of the enclosure of the repeater **300**.

[0028] As illustrated in FIG. 3, the 5 GHz WiFi client radio **305** transmits and receives data packets through an outdoor oriented surface of the enclosure. The outdoor oriented surface of the enclosure is positioned proximate to and facing the window. The 2.4 GHz WiFi access point radio **320** transmits and receives data packets through an indoor oriented surface of the enclosure. The indoor oriented surface is positioned opposite the outdoor oriented surface.

[0029] A data cable such as CAT5E is used to connect the repeater **300** to a power-over-Ethernet wall adapter, such as wall adapter **350**, which adapts AC power to low-voltage DC power to operate one or more radios. The data cable coupling the repeater with the wall adapter can comprise a PoE (power over Ethernet) cable. For context, PoE uses an 8-conductor cable that carries both power and Ethernet over four twisted pairs.

[0030] The data cable from the repeater **300** could alternatively be a simple two-conductor version and the wall adapter can be a simple AC power converter such as those used for other DC-powered devices. The repeater **300** can use the power conditioning circuitry **325** to adapt the AC power to DC power.

[0031] Referring now to FIG. 4, in one embodiment, the repeater **300** can be communicatively coupled with a wireless router **380** that functions as an indoor access point for 2.4 GHz devices located indoors, such as in a home, office, or other building. Thus, the repeater **300** may not require the 2.4 GHz Wi-Fi access point radio **320**, but may use a 2.4 GHz Wi-Fi access point radio of the wireless router **380**. The repeater **300** can couple with the wireless router also using another data cable **385** that extends from the wall adapter **350**. In another embodiment, rather than using a physical data cable **385**, the repeater **300** can communicate with the wireless router **380** using the 2.4 GHz Wi-Fi access point radio **320** such that the repeater can be coupled with an existing wireless router **380** in a building. The wireless router **380** will then transmit and receive data from 2.4 GHz UEs in the building.

[0032] In some embodiments, the repeater can couple with a dual-band wireless router (e.g., both 2.4 GHz and 5 GHz).

The distance between the repeater and the wireless router allows a 5 GHz client and a 5 GHz access point to coexist, without synchronization, provided they are on different channels and far enough apart. This would not be feasible when the client and access point are within the same enclosure though.

[0033] In some embodiments, the repeater device **300** (and more specifically the microprocessor) can be configured to provide firewall or other similar security features. That is, the repeater device **300** provides the ability to create a private network within the indoor area using the 2.4 GHz Wi-Fi access point radio **320**. Indeed, there may be numerous 2.4 GHz UEs that are joined to the private network created by the repeater device **300**. Thus, the repeater device **300** employs network security features to prevent access to the private network from other users that may be using the 5 GHz access point. Similarly, the repeater device **300** can selectively prevent network traffic created on the private network from being transmitted over the 5 GHz network of the 5 GHz access point. Therefore, the repeater device **300** is advantageously capable of providing network address translation functionality to bridge communications between the 5 GHz network of the 5 GHz access point and the private network created for the UEs.

[0034] FIG. 5 illustrates another embodiment of a repeater system **300** where portions are divided between an enclosure **302** and a wall adapter **350**. For example, the enclosure **302** can include the microprocessor **310** and 5 GHz Wi-Fi Client Radio **305**, as well as power conditioning circuitry **325** and memory **315**. The 5 GHz Wi-Fi access point radio **320** and power over Ethernet adapter **355** are positioned in a wall adapter **350**. In some embodiments, the 5 GHz Wi-Fi access point radio **320** can include a dual band radio that utilizes both 2.4 GHz and 5 GHz frequencies.

[0035] The 5 GHz Wi-Fi access point radio **320** can therefore electrically and communicatively couple with the components positioned within the enclosure **302**, such as the microprocessor **310** using a power over Ethernet cable **360**, or other similar physical power and data connection that would be known to one of ordinary skill in the art. The wall adapter **350** that comprises the 5 GHz Wi-Fi access point radio **320** and power over Ethernet adapter **355** can be referred to as a PoE gateway.

[0036] According to some embodiments, the repeaters described herein can be configured to reduce or eliminate interference on 5 GHz channels. For example, the repeaters can implement a PoE gateway as described above which coordinates with the 5 GHz outdoor access point a roof of a house, to coordinate 5 GHz channels so as to not cause interference. For example, the microprocessor of the repeater can be configured to pick a new channel when instructed by the 5 GHz access point and dynamically maintaining this function as the outdoor access point may change channels over time.

[0037] This methodology is distinguished from clear channel selection methods where an AP or other wireless networking device will scan for an optimal clear channel upon boot up or initialization and/or periodically.

[0038] In one embodiment, the 5 GHz Wi-Fi Client Radio **305** receives data from the 5 GHz access point on a first channel. The microprocessor **310** will utilize the first channel and instruct the 5 GHz Wi-Fi access point radio **320** to utilize the first channel until instructed to change channels.

[0039] According to some embodiments, the 5 GHz access point may determine to select a new channel. For example, if another outdoor access point or other wireless AP in the area begins to utilize portions of the frequency spectrum currently utilized by the 5 GHz outdoor access point, the outdoor access point may selectively change the portion of the spectrum that it utilizes by selecting a new or updated channel.

[0040] The outdoor access point transmits a channel change signal that is received by the repeater **300**. The repeater **300** receives the channel change signal using the 5 GHz Wi-Fi Client Radio **305**. The microprocessor **310** detects the channel change request and then transmits a request to change of the first channel used by the first radio (5 GHz Wi-Fi Client Radio **305**) and the 5 GHz Wi-Fi access point radio **320** (also referred to as an access point radio) to a second channel. The UEs communicating with the 5 GHz Wi-Fi access point radio **320** will detect the channel change and adjust their communication procedures as necessary. In sum, the channel change process includes propagation of a channel change request from the outdoor access point to the window mounted repeater that includes a 5 GHz Wi-Fi Client Radio. The 5 GHz Wi-Fi Client Radio propagates the channel change request to a second 5 GHz Wi-Fi access point radio disposed in a wall adapter. The channel change request is then propagated out to the UEs that are communicatively coupled with the 5 GHz Wi-Fi access point radio.

[0041] To be sure, the 5 GHz Wi-Fi Client Radio **305** can be collocated in the same enclosure with the 5 GHz Wi-Fi access point radio **320**, such as in enclosure **302**. In other embodiments, the 5 GHz Wi-Fi Client Radio **305** can be disposed with the enclosure **302** while the 5 GHz Wi-Fi access point radio **320** is disposed within the wall adapter **350**.

[0042] In another example embodiment, the wall adapter **350** of FIG. 5 could comprise a 2.4 GHz Wi-Fi access point radio, rather than a 5 GHz Wi-Fi access point radio **320**. The microprocessor **310** can be utilized to control the 2.4 GHz Wi-Fi access point radio **320** as required.

[0043] In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular embodiments, procedures, techniques, etc. in order to provide a thorough understanding of the present invention. However, it will be apparent to one skilled in the art that the present invention may be practiced in other embodiments that depart from these specific details.

[0044] Reference throughout this specification to “one embodiment” or “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the present invention. Thus, the appearances of the phrases “in one embodiment” or “in an embodiment” or “according to one embodiment” (or other phrases having similar import) at various places throughout this specification are not necessarily all referring to the same embodiment. Furthermore, the particular features, structures, or characteristics may be combined in any suitable manner in one or more embodiments. Furthermore, depending on the context of discussion herein, a singular term may include its plural forms and a plural term may include its singular form. Similarly, a hyphenated term (e.g., “on-demand”) may be occasionally interchangeably used with its non-hyphenated version (e.g., “on demand”), a capitalized entry (e.g., “Software”) may be interchangeably used with its non-capitalized

version (e.g., “software”), a plural term may be indicated with or without an apostrophe (e.g., PE’s or PEs), and an italicized term (e.g., “N+1”) may be interchangeably used with its non-italicized version (e.g., “N+1”). Such occasional interchangeable uses shall not be considered inconsistent with each other.

[0045] Also, some embodiments may be described in terms of “means for” performing a task or set of tasks. It will be understood that a “means for” may be expressed herein in terms of a structure, such as a processor, a memory, an I/O device such as a camera, or combinations thereof. Alternatively, the “means for” may include an algorithm that is descriptive of a function or method step, while in yet other embodiments the “means for” is expressed in terms of a mathematical formula, prose, or as a flow chart or signal diagram.

[0046] The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, the singular forms “a”, “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “comprises” and/or “comprising,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0047] It is noted at the outset that the terms “coupled,” “connected”, “connecting,” “electrically connected,” etc., are used interchangeably herein to generally refer to the condition of being electrically/electronically connected. Similarly, a first entity is considered to be in “communication” with a second entity (or entities) when the first entity electrically sends and/or receives (whether through wireline or wireless means) information signals (whether containing data information or non-data/control information) to the second entity regardless of the type (analog or digital) of those signals. It is further noted that various figures (including component diagrams) shown and discussed herein are for illustrative purpose only, and are not drawn to scale.

[0048] While various embodiments have been described above, it should be understood that they have been presented by way of example only, and not limitation. The descriptions are not intended to limit the scope of the invention to the particular forms set forth herein. To the contrary, the present descriptions are intended to cover such alternatives, modifications, and equivalents as may be included within the spirit and scope of the invention as defined by the appended claims and otherwise appreciated by one of ordinary skill in the art. Thus, the breadth and scope of a preferred embodiment should not be limited by any of the above-described exemplary embodiments.

What is claimed is:

1. A device, comprising:
 - a microprocessor that controls a 5 GHz radio and a 2.4 GHz radio, the microprocessor being configured to:
 - receive a channel change signal transmitted to the 5 GHz radio by an outdoor access point;
 - request a change of a first channel used by the 5 GHz radio and the 2.4 GHz radio to a second channel;
 - transmit a signal change signal to a 5 GHz User Equipment (UE) informing the 5 GHz UE of the change to the second channel;

- convert 5 GHz data received by the 5 GHz radio into 2.4 GHz data; and

- convert 2.4 GHz data received by the 2.4 GHz radio into 5 GHz data.

2. The device according to claim 1, further comprising an enclosure that is configured to be mounted to a window that divides an outdoor area from an indoor area, the enclosure having the microprocessor, the 5 GHz radio, and the 2.4 GHz radio disposed therein.

3. The device according to claim 1, wherein the 5 GHz radio is coupled with a high order MIMO (multiple input, multiple output) antenna, the high order MIMO antenna transmitting and receiving data from the outdoor access point.

4. The device according to claim 3, wherein the microprocessor is configured to implement beam-forming to direct radiation of the high order MIMO antenna in a direction that is parallel and relative to a beam-forming plane that is normal N to a window onto which the device is installed.

5. The device according to claim 4, wherein the microprocessor can adjust the beam-forming so as to achieve maximum gain for radiation produced by the high order MIMO antenna to be steered in a direction that is advantageous for communicating with the outdoor access point.

6. The device according to claim 3, wherein the high order MIMO antenna is disposed proximate a window and a second antenna associated with 2.4 GHz radio is disposed away from the window.

7. The device according to claim 1, wherein the 2.4 GHz radio is coupled with a MIMO (multiple input, multiple output) antenna, the MIMO antenna transmitting and receiving data from a 2.4 GHz UE located in an indoor area.

8. The device according to claim 1, further comprising a data cable coupled to a wall adapter providing power over Ethernet.

9. The device according to claim 1, wherein the microprocessor is configured to implement firewall policies to secure a private network.

10. The device according to claim 1, further comprising a wireless interface that is disposed within a wall adapter that can electrically couple with an electrical outlet.

11. The device according to claim 10, wherein the wall adapter comprises a power over Ethernet adapter that electrically and communicatively couples the wireless interface with the microprocessor and high order MIMO antenna using a power over Ethernet connection.

12. A method comprising:

- receiving, by a microprocessor, a channel change signal transmitted to a 5 GHz radio by an outdoor access point;
- requesting a change of a first channel used by the 5 GHz radio and the 2.4 GHz radio to a second channel;
- transmitting a signal change signal to a 5 GHz User Equipment (UE) informing the 5 GHz UE of the change to the second channel;

- converting 5 GHz data received by the 5 GHz radio into 2.4 GHz data; and
- converting 2.4 GHz data received by the 2.4 GHz radio into 5 GHz data.

13. The method according to claim 12, further comprising providing an enclosure that is configured to be mounted to a window that divides an outdoor area from an indoor area, the enclosure having the microprocessor, a 5 GHz radio, and a 2.4 GHz radio disposed therein.

14. The method according to claim 12, further comprising transmitting and receiving data from the outdoor access point

using the 5 GHz radio that is coupled with a high order MIMO (multiple input, multiple output) antenna.

15. The method according to claim 14, further comprising beam-forming to direct radiation of the high order MIMO antenna in a direction that is parallel and relative to a beam-forming plane that is normal N to a window.

16. The method according to claim 15, further comprising adjusting the beam-forming so as to achieve maximum gain for radiation produced by the high order MIMO antenna to be steered in a direction that is advantageous for communicating with the outdoor access point.

17. The method according to claim 16, further comprising transmitting and receiving data from a 2.4 GHz UE located in an indoor area using the 2.4 GHz radio, wherein the 2.4 GHz radio is coupled with a MIMO (multiple input, multiple output) antenna.

18. The method according to claim 12, further comprising implementing firewall policies to secure a private network.

19. A method comprising:

receiving a channel change signal from a first radio, the channel change signal being transmitted by an outdoor access point;

requesting a change of a first channel used by the first radio and a second radio to a second channel;

transmitting a signal change signal to a User Equipment (UE) informing the UE of the change to the second channel; and

transmitting converted data to the UE located in an indoor area using a second frequency.

20. The method according to claim 19, wherein the converted data is created by:

converting 5 GHz data received by the first radio into 2.4 GHz data; and

converting 2.4 GHz data received by the second radio into 5 GHz data.

* * * * *