



- (51) **International Patent Classification:**
H04W 24/02 (2009.01) *H04W 52/02* (2009.01)
- (21) **International Application Number:**
PCT/EP2012/056512
- (22) **International Filing Date:**
11 April 2012 (11.04.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
11305445.6 14 April 2011 (14.04.2011) EP
- (71) **Applicant (for all designated States except US):** **ALCATEL LUCENT** [FR/FR]; 3 avenue Octave Gréard, F-75007 Paris (FR).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **BALAGEAS, Carine** [FR/FR]; Alcatel-Lucent France, Centre de Villard-
ceaux, Route de Villejust, F-91620 Nozay (FR). **KUMAR, Vinod** [IN/FR]; Alcatel-Lucent Bell Labs France, Centre
de Villardceaux, Route de Villejust, F-91620 Nozay (FR).
- (74) **Agent:** **SCIAUX, Edmond**; Alcatel-Lucent International,
32 avenue Kléber, F-92700 Colombes (FR).


(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) **Title:** METHOD FOR MANAGING THE STATE OF MICRO BASE STATIONS BY FOLLOWING THE VARIATIONS OF TRAFFIC REQUIREMENTS, AND ASSOCIATED CONTROLLER DEVICE

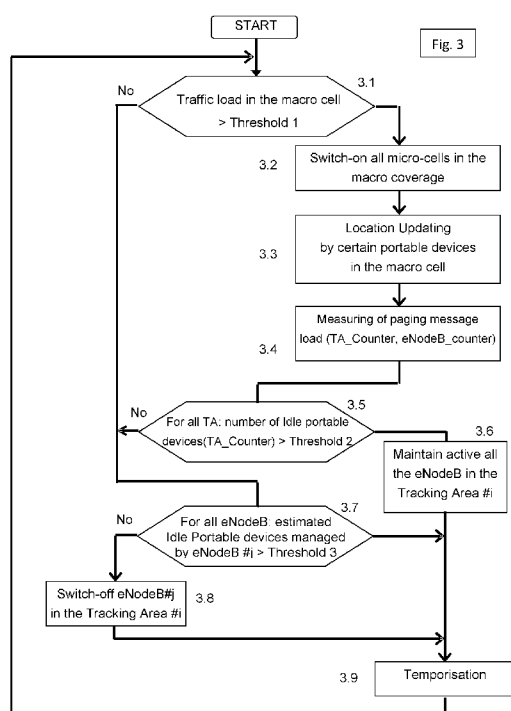

(57) **Abstract:** A method manages the state of a plurality of micro base stations inside a mobile communication network. The network comprises at least a macro cell containing at least one Tracking Area covering a plurality of micro cells each one associated with a micro base station. The method to manage the states of micro cells comprises the steps of: switching on of all the micro base stations contained in said Tracking Area of the macro cell, counting of the messages of paging to determine the number of portable devices in Idle mode inside said Tracking Area, and switching off at least one micro base station in the Tracking Area when the number of portable devices in Idle mode in the said Tracking Area is lower than a first determined value. According to an improvement, the switching on of all the micro base stations contained in a Tracking Area is triggered when the current load of the macro cell exceeds a second determined value.

Method for managing the state of micro base stations by following the variations of traffic requirements, and associated controller device.

FIELD OF THE INVENTION

5 The invention relates generally to telecommunication systems and in particular to a method for energy saving at the level of base station, and associated controller device. Specifically, in case of cellular networks, it is proposed to switch on/off selected cells to follow the variations in traffic load.

10 **BACKGROUND OF THE INVENTION**

 A mobile communication network comprises portable devices, such as cell phone, in radio communication with fixed base stations. These base stations comprise in particular antennas having a more or less large coverage. The coverage areas depend amongst other things on the emission power. The
15 macro cell covers a broad area and may communicate with a large number of portable devices, whereas the micro cell cover a small cover and can manage a small number of portable devices. The radio network is thus arranged hierarchically: the macro cell ensures the coverage of a large area and the micro cell ensures a high capacity of communication with the cell phones.
20 According to the characteristics of the area and in particular of the population density and it is advantageous to increase the number of micro cells in order to offer a better capacity in this area.

 The radio coverage of each micro cell is managed by a device called “eNodeB” in the Long Term Evolution (LTE) technology. This device consumes
25 energy. In certain cases, the eNodeB is switched on but does not manage any communication with portable device, for example during the night in residential zone, when the activity of the portables is very limited. Most of time and power of the eNodeB are thus consumed for nothing.

 To save energy during low load period, it seems relevant to switch
30 off cells - for example one or multiple micro cells are switched-off while the macro cells remain intact in order to avoid any coverage holes. In dense deployments, the number of unused micro cells being high, such solutions can

lead to substantial energy savings. This will introduce a decrease of available network capacity. An important issue is to decide which micro cells to switch off such that coverage areas with mobile subscribers do not suffer from an undue reduction of capacity. Inversely, when the need for capacity increases, we need
5 also to decide which micro cell to switch on to provide required capacity.

A solution consists in the macro cell managing all the portable devices when the traffic is low. However, the capacity of the macro cell can very quickly become insufficient when the portable devices in Idle mode become active, i.e. when they enter into communication.

10 Another solution consists in switching on uniformly one micro cell out of two, one out of three etc..., proportionally to the actual traffic load. But this empirical method may cause call drops and low quality of service in the radio communication network. The problem when choosing the cell to switch off using actual traffic load generated by the "active users" is that the reduced
15 capacity may be not enough to serve portable devices in Idle mode already attached to this cell that when such UEs become active.

When the portable device is in Idle mode, it is difficult to locate it because it does not emit signal. It is easy to count the number of cell phones in active mode, but it is difficult to determine the number of portable device in Idle
20 mode per base station... In fact, the idle mode procedure implemented in the LTE standard does not permit to know how many terminals in idle mode are under the coverage of a given eNodeB. In fact the portable device is registered to the MME and the eNodeB has no context information. The only geographical information we have on the terminal is at the granularity of the Tracking Area,
25 as the portable device performs Tracking Area updates when moving and also periodically when not moving. The radio network cannot decide optimum number of switched on micro cell in order to offer a sufficient capacity for the active portable devices and the portable devices in Idle mode which could wake-up

30

This granularity of the Tracking Areas doesn't give enough information of the number of UEs in idle mode under the coverage of an eNodeB.

The present invention allows among others advantages of estimating the number of portable devices within a zone and of determining the number of switched on micro cells to ensure the potential requests for traffic

5 SUMMARY OF THE INVENTION

An aspect of the invention relates to a method to manage the state of a plurality of micro base stations inside a mobile communication network is provided. The network comprises at least a macro cell containing at least one Tracking Area covering a plurality of micro cells associated with a micro base station. The method includes the steps of:

- switching on of all the micro base stations contained in said Tracking Area of the macro cell,
- counting of the messages of paging to determine the number of portable devices in Idle mode inside said Tracking Area,
- 15 – switching off at least one micro base station in the Tracking Area when the number of portable devices in Idle mode in the said Tracking Area is lower than a first determined value.

With this manner, the number of micro base stations in active mode is optimized, and thus the global power consumption of all micro base stations inside a macro cell is decreased and the time of use of micro base station is limited. The method allows taking switch on/off decisions of micro cells based on potential needs for traffic information. Typically, the number of user terminals in idle mode in a given geographical area permits to evaluate what would be the potential needs for traffic. The present invention uses location area update and paging activity information to predict cell by cell traffic requirements. Hence, information of location and number of idle mode terminals becomes useful to simply anticipate needs for traffic.

According to another aspect of the present invention, the switching on of all the micro base stations contained in said Tracking Area of the macro cell is triggered when the current load of the macro cell exceeds a second determined value. It happens when the macro is detecting an increase of traffic, e.g. high number of connection requests, typically when lot of terminals are attached to the macro if most of micros are switched off.

According to another aspect of the present invention, the switching off of at least one micro base station is performed when the estimated number of portable devices in Idle mode managed by this micro base station is lower than a third determined value. This way, only micro cells with less probable traffic will be switched off for energy reasons. Then, even if the capacity is reduced, it will not impact the service quality. Similarly, this information on paging activity can also be used to switch on a cell expected to have a large number of terminal in Idle modes, which could “potentially” wake up and need for traffic.

According to another aspect of the present invention, the number of portable devices managed by this micro base station takes into account the information of localization provided by applicative servers in communication with the portable devices located in the micro cell. With this manner, the portable devices are better located and the number of portable devices in Idle mode in each micro cell is better estimated.

According to another aspect of the present invention, the macro cell contains only one Tracking Area. With this manner, the processing for determining the number of portable device per micro base station is only based on estimation at the micro base station level.

According to a variant of the present invention, the macro cell contains several Tracking Areas; the step of switching on all the micro base stations contained in the Tracking Areas is successively performed for each Tracking Area. With this manner, the processing for determining the number of portable device has a better granularity.

According to a variant of the present invention, the switching on of all the micro base stations contained in said Tracking Area is periodically performed, spaced by a regular time interval. With this manner, it is possible to periodically update the number of switched-on micro base station.

The present invention also relates to a controller of mobile communication network controlling the traffic inside a macro cell comprising means of communication with a plurality of micro base stations associated with

a micro cell, the macro cell containing at least one Tracking Area covering a plurality of micro cell, characterized in that said controller comprises:

- means of emission of a first signal to switch on all micro base stations in said Tracking Area,

5 - a counter of messages of paging to determine the number of portable devices in Idle mode inside said Tracking Area of the macro cell,

- means of emission of a second signal to switch off at least one micro base station of said Tracking Area when the number of portable devices in Idle mode inside said Tracking Area is lower than a first determined value.

10

The present invention also relates to a computer program product comprising instructions for performing the steps of the method as claimed when the program is executed on a network controller.

15

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will become more fully understood from the detailed description given herein below and the accompanying drawings, wherein like elements are represented by like reference numerals, which are given by way of illustration only and thus are not limiting of the present invention and wherein:

20

FIG. 1 illustrates a set of three zones of Paging, called "Tracking Area" or TA in LTE technology.

FIG.2 illustrates the structure of the communication network to control the activity of each micro cell within a given macro cell.

25

FIG.3 is a flowchart illustrating example operation of steps to optimize the number of switched-on eNodeBs in a communication network.

FIG.4 illustrates a first structure of a macro cell comprising a plurality of Tracking Area

30

FIG. 5 illustrates a second structure of a macro cell comprising only one Tracking Area

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS

Figure 1 - 5 and the following description depict specific exemplary embodiments of the invention to teach those skilled in the art how to make and use the invention. For the purpose of teaching inventive principles, some conventional aspects of the invention have been simplified or omitted. Those skilled in the art will appreciate variations from these embodiments that fall within the scope of the invention. Those skilled in the art will appreciate that the features described below can be combined in various ways to form multiple variations of the invention. As a result, the invention is not limited to the specific embodiments described below, but only by the claims and their equivalents.

In particular, the invention is applicable to several radio access technologies such as: GSM, WCDMA, LTE. According to each technology, a radio base station (or radio access node), such as a Base Transceiver Station (BTS) for the Global System Mobility (GSM) standard, or a NodeB for Universal Mobile Telephone System (UMTS) standard, or an eNodeB for Long Term Evolution (LTE) standard, communicates with portable devices, such as mobile phones, PDAs or laptops equipped with radio module. The portable device communicates with a macro base station located within a range of a few kilometers; the area covered by such a base station is referred to as a macro cell. In a macro cell, the micro base stations associated with the micro cells ensures a high capacity of communication with the portable devices. After this paragraph, we detail this invention by using the LTE technology.

Figure 1 illustrates a set of three zones of Paging, called "Tracking Area" or TA in LTE technology. The Tracking Area comprises a plurality of micro cells. Three micro cells by Tracking Area are represented in the figure 1, this number may be variable per Tracking Area. A network element called Mobile Management Entity 2 (or MME) communicates with each micro cell and manages in its memory the identity of the portable device present in each Tracking Area, among other information.

Standard LTE paging procedure gives only information at the granularity of the Tracking Area. To have information at the micro base station level (i.e. at an eNodeB level in LTE technology), we use Random Access

messages sent by the terminals that exit idle mode when having been paged for an incoming call, or when performing a Tracking Area Update during mobility in idle mode. These messages are sent toward a given eNodeB and thus can be used as more accurate location information than the classical
5 paging messages, i.e. at the eNodeB granularity instead of Tracking Area granularity

When a portable device leaves or enters in a given Tracking Area (TA), a communication arises with the micro cell and the portable device can be located at this time. LTE specification well defines "Random Access messages"
10 sent by the portable devices in Idle mode when they become active because of incoming call or when they change Tracking Area. The LTE random access procedure is used when there is a transition from RRC_IDLE to RRC_CONNECTED, to achieve UL time synchronization for a UE.

MME centralizes all the communications informing that a portable
15 device changes Tracking Area. In this way, MME can at all times determine the estimated number of portable devices in Idle mode, called "TA_Counter", within each Tracking Area. For updating the value TA_counter, the MME updates the number of portable devices in Idle mode under this Tracking Area taking into account the number of Tracking Area.

20

Figure 2 illustrates the structure of the various elements making it possible to control the activity of each micro cell 1 within a given macro cell 3. This activity depends in particular on the presence of portable devices 4 within each micro cell. A controller 5 is able to enter in communication with each
25 eNodeB. This controller 5 may send a message of wake-up to a switched-off eNodeB, and a message of switch off. Controller 5 is also connected to the MME 2 and thus receives the number of portable devices in Idle mode present in each Tracking Area. the controller 5 may be for example a part of Radio Controller Network (RNC) or Serving GPRS Support Node (SGSN) or Home
30 NodeB Gateway (HNB-GW) for WCDMA technology, or a part of MME or Home enhanced NodeB Gateway (HeNB-GW) for LTE technology.

Controller 5 is also connected to one or more applicative databases
6. These databases are hosted in one or more servers making it possible to

deliver a service to users. These services are mainly local, for example: delivering of a ticket of transport within a station, indicating of the road traffic at a certain location, supplying of product within a store, use of the Global Positioning System (GPS) function, etc. These services proposed to the owner
5 of the portable device are related to a determined location, so that when the service is required or delivered by the portable device, it is located with precision. This permits to have location information for both active and portable devices.

The controller 5 receives from MME information about the total
10 number of portable devices in Idle mode within each Tracking Area, but the MME doesn't provide the number of portable devices in Idle mode within a micro cell. The estimation of number of portable devices in Idle mode sent by the eNodeB and the information provided by applicative databases 6 improve the reliability of this number at the level of each micro cell (eNodeB_counter).

15 When a portable device 4 moves, it need to ensure the continuity of its management so that it can constantly receive incoming calls and that it can possibly send some. So, the portable device in idle mode has to respect criteria of "cell reselection" to be attached to a new Tracking Area. When a cell
20 reselection toward a micro cell has been decided, the portable device transmits a message of "location update" towards the micro cell. At the time of this message, the portable device performs a random request for access (UL random access attempt) towards the micro cell. Each micro cell counts the number of portable device having required to be relocated towards the
25 Tracking Area comprising this micro cell and sends this number to controller 5. To improve the estimate of the number of portable devices in Idle mode by micro cell, the network may use an applicative server of geolocalisation which counts the number of portable devices in Active and Idle mode according to given areas. This number is transmitted to the controller 5 to update the
30 counter (eNodeB_counter) of portables devices in idle mode for each micro cell.

Thus, by using the number of portable devices in Idle mode in the Tracking Area provided by MME, the estimation of number of portable devices in Idle mode and information from the applicative databases, controller 5 is able to roughly determine the number of portable devices in Idle mode in each micro cell. The system described above according to a preferred embodiment will now be discussed in terms of function. A method making it possible to optimize the number of switched-on eNodeBs is illustrated by the flowchart of figure 3.

Initially (step 3.1), the activity at the level of a macro cell is estimated. This estimation is performed by comparing the load of current traffic of the macro cell with a determined value THRESHOLD 1. If this threshold is exceeded, then it needs to wake-up more micro cells to carry out the traffic.

At step 3.2, all the micro cells which were switched off in each Tracking Area are switched on. According to a variant, the method is performed one tracking Area after the other, and at each loop, all the micro cells of a determined Tracking Area are switched on. This switching on is advantageously triggered by a message broadcast to all the micro cells of the macro cell, those which are switched on does not change state. At the switching on, the eNodeB emits a radio signal called "Beacons signal". The portable devices detect the emission of new Beacon signal and determine this one getting the best level of quality. During step 3.3, so by receiving the Beacon signals, if the conditions of cell reselection are met, then the portable devices in Idle mode perform a "location update" towards new Tracking Area by carrying out a random access towards the micro cell. The procedures of cell reselection are well described by specifications "LTE Random Access procedure" and it is useless to explain them more. Other devices remain on the same Tracking Area because the conditions of cell reselection are not met.

At step 3.4, the controller determines for each micro cell the estimated number of portable devices in Idle mode : value eNodeB_counter. After the switching-on, the eNodeB counts the number of portable devices which request to be managed by it. The controller 5 also takes into account the information provided by the applicative database 6 for determining the number of portable devices in Idle mode in each micro cell. The MME updates TA_counter counting the number of portable devices which have selected each

TA. The values eNodeB_Counter and TA_counter are transmitted to the controller 5.

Here how is calculated the eNodeB_counter value:

5 According to the statistical analysis of the network, one can determine $a > 1$, such as the number of portable devices in Idle mode by micro cell is equal to: $a \times (\text{number of UL RACH attempts})$,

 and according to the use of the application; one can determine a second number $b < 1$ such as number of portable devices in Idle mode by micro
10 cell = $b \times (\text{number of portable devices either in active or in Idle mode determined by the application})$. At the end, the value eNodeB_counter is equal to the average of the numbers ($a \times \text{nb\_UL\_RACH\_attempt}$, $b \times \text{nb\_users\_application}$).

15 Then, the controller 5 of network compares the number of portable devices 4 in Idle mode in each Tracking Area (TA_counter) with a threshold value THRESHOLD 2 (step 3.5). If this number is higher than the threshold, it is necessary to maintain switched-on all the eNodeB of corresponding Tracking Area so that all micro cells remain in an active state. In this case, the method
20 does not optimize the number of wake-up eNodeBs because the current traffic requires leaving the eNodeB switching-on. At the step 3.6, all the eNodeBs in the corresponding Tracking Area remain switched-on.

 On the other hand, if the value THRESHOLD 2 is not exceeded, it is possible to shutdown some eNodeBs. At step 3.7, for each micro cell of the
25 Tracking Area, the estimation of number of portable devices in Idle mode (eNodeB_counter) is compared with a threshold value THRESHOLD 3. If the value THRESHOLD 3 is not exceeded, then the eNodeB can be shutdown because the potential need for traffic is not sufficient. If portable devices are in communication mode in the micro cell, then they perform a handover towards
30 the macro cell which ensures the coverage for the hierarchical network.

 At step 3.8, at least one eNodeB is switched-off. The corresponding Beacons Signal is not emitted more, then the few portables which were managed by it will search another Beacons signal and another corresponding

micro cell or they will directly manage by the macro cell. At the end of these steps, the numbers of micro cells in active and inactive state are adapted to the current needs for traffic.

5 This situation lasts only a time and it is necessary to update this state at the end of a certain duration to periodically follow the evolutions of the requests for traffic. The method comprises a temporization step (step 3.9) at the end of which all the steps previously described (3.1 to 3.8) are re-run.

 According to a first variant of embodiment illustrated by figure 4, the
10 macro cell contains a plurality of Tracking Area (TA). MME manages the information of the number of portable devices 4 in Idle mode in each TA. According to another variant of embodiment, illustrated by figure 5, all micro cells of the macro cell belong to the same Tracking Area. Then, MME contains only one number of portable devices in Idle mode for this macro.

15 Where a component is referred to above, unless otherwise indicated, reference to that component (including a reference to a "means") should be interpreted as a reference to any component which performs the function of the described component (i.e. is functionally equivalent to the
20 described component), including components which are not structurally equivalent to the disclosed structure which performs the function in the illustrated exemplary embodiments of the invention.

 Where a step in a method is referred to above, unless otherwise indicated, reference to that step should be interpreted as a reference to any
25 step which achieves the same result as the step (i.e. is functionally equivalent to the described step), including steps which achieve a stated result in different ways from those disclosed in the illustrated exemplary embodiments of the invention. As will be apparent to those skilled in the art in the light of the foregoing disclosure, many alterations and modifications are possible in the
30 practice of this invention

CLAIMS

1. Method to manage the energy mode of a plurality of micro base station inside a mobile communication network, the network comprising at least one macro cell (3) containing at least one Tracking Area (TA) covering a plurality of micro cells (1) each one associated with a micro base station, the method being characterized in that it comprises the steps:

- switching on of all the micro base stations contained in said Tracking Area (TA) of the macro cell,
- counting of the messages of paging to determine the number of portable devices (4) in Idle mode inside said Tracking Area,
- switching off at least one micro base station in the Tracking Area when the number of portable devices (4) in Idle mode in the said Tracking Area is lower than a first determined value (THRESHOLD 2).

15

2. The method according to claim 1 characterized in that the switching on of all the micro base station contained in said Tracking Area (TA) of the macro cell is triggered when the current load of the macro cell exceeds a second determined value (THRESHOLD 1).

20

3. The method according to claim 1 or 2 characterized in that the switching off of at least one eNodeB is performed when the number of portable devices (4) managed by this micro base station is lower than a third determined value (THRESHOLD 3).

25

4. The method according to claim 3 characterized in that the number of idle and active portable devices (4) managed by this micro base station takes into account the information of localization provided by applicative servers in communication with the portable devices (4) located in the micro cell.

30

5. The method according to any one of claims 1 to 4 characterized in that the macro cell contains only one Tracking Area.

6. The method according to any one of claims 1 to 4 characterized in that the macro cell contains several Tracking Areas, the step of switching on of all the micro base stations contained in the Tracking Areas is successively performed for each Tracking Area.

5

7. The method according to any one of claims 1 to 6 characterized in that the switching on of all the micro base stations contained in said Tracking Area is periodically performed, spaced by a regular time interval.

10

8. Controller (5) of mobile communication network controlling the traffic inside a macro cell (3) comprising means of communication with a plurality of micro base stations associated with a micro cell (1), the macro cell containing at least a Tracking Area (TA) covering a plurality of micro cell, characterized in that said controller (5) comprises

15

- means of emission of a first signal to switch on of all micro base stations in said Tracking Area,

- a counter of messages of paging to determine the number of portable devices (4) in Idle mode inside said Tracking Area of the macro cell,

20

- means of emission of a second signal to switch off at least one micro base station of said Tracking Area when the number of portable devices in Idle mode inside said Tracking Area is lower than a first determined value (THRESHOLD 2).

25

9. Controller (5) of network according to claim 8 comprising a means of comparison between the current load of the macro cell and a second determined value (THRESHOLD 1), to trigger the emission of the first signal when the current load of the macro cell exceeds the second determined value.

30

10. Controller (5) of network according to claim 8 or 9 characterized in that it comprises a means of comparison between the number of portable devices managed by said micro base station and a third determined value (THRESHOLD 3), to trigger the emission of the second signal to switch off said

micro base station when the number of portable devices managed by this micro base station is lower than the third determined value.

11. Controller (5) of network according to claim 10, characterized in
5 that it comprises means of communication towards applicative servers adapted to locate portable devices (4) in each micro cell, the number of idle and active portable devices managed in a given micro base station taken into account the information of locating provided by said applicative servers.

10 12. Controller (5) of network according to any one of claims 8 to 11, characterized in that the macro cell managed by the controller contains only one Tracking Area (Tai).

13. Controller (5) of network according to any one of claims 8 to 11,
15 characterized in that the macro cell managed by the controller contains several Tracking Area, means of emission of a first signal to switch on all micro base stations of a Tracking Area being successively triggered for each Tracking Area.

20 14. Controller (5) of network according to any one of claims 8 to 13, characterized in that the means of emission of the first signal sends periodically said first signal, spaced by a regular time interval.

15. computer program comprising computer-executable instructions
25 for performing a method when the program is run on a network controller, the method comprising the steps according to the claims 1 to 7.

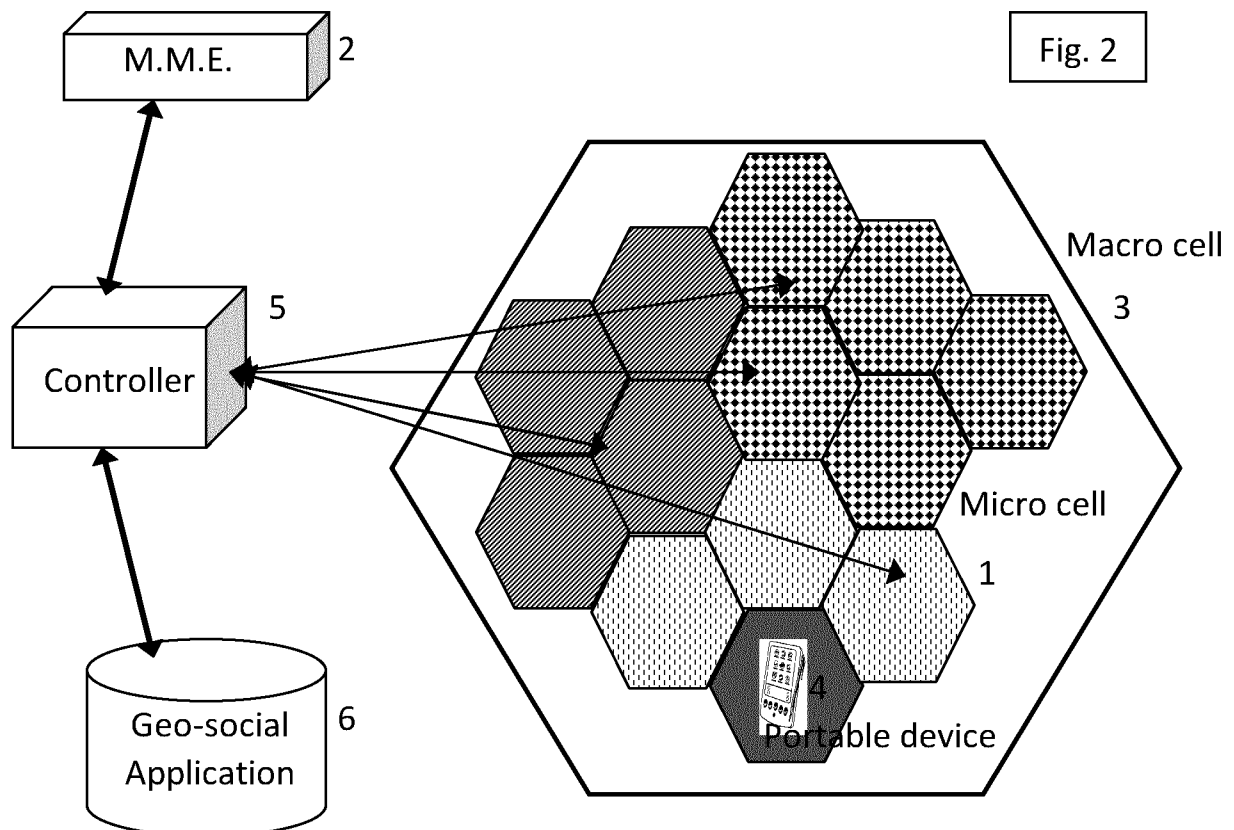
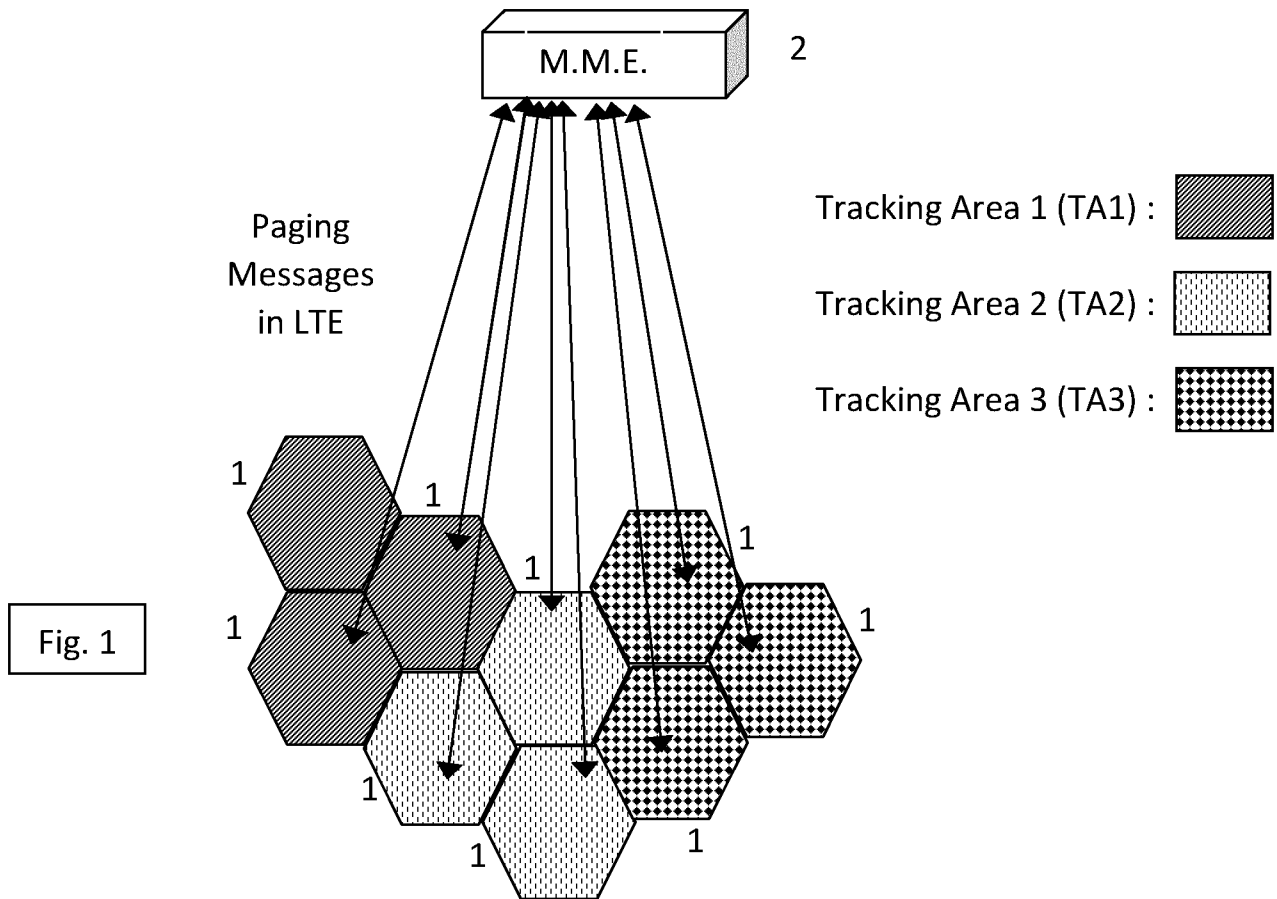
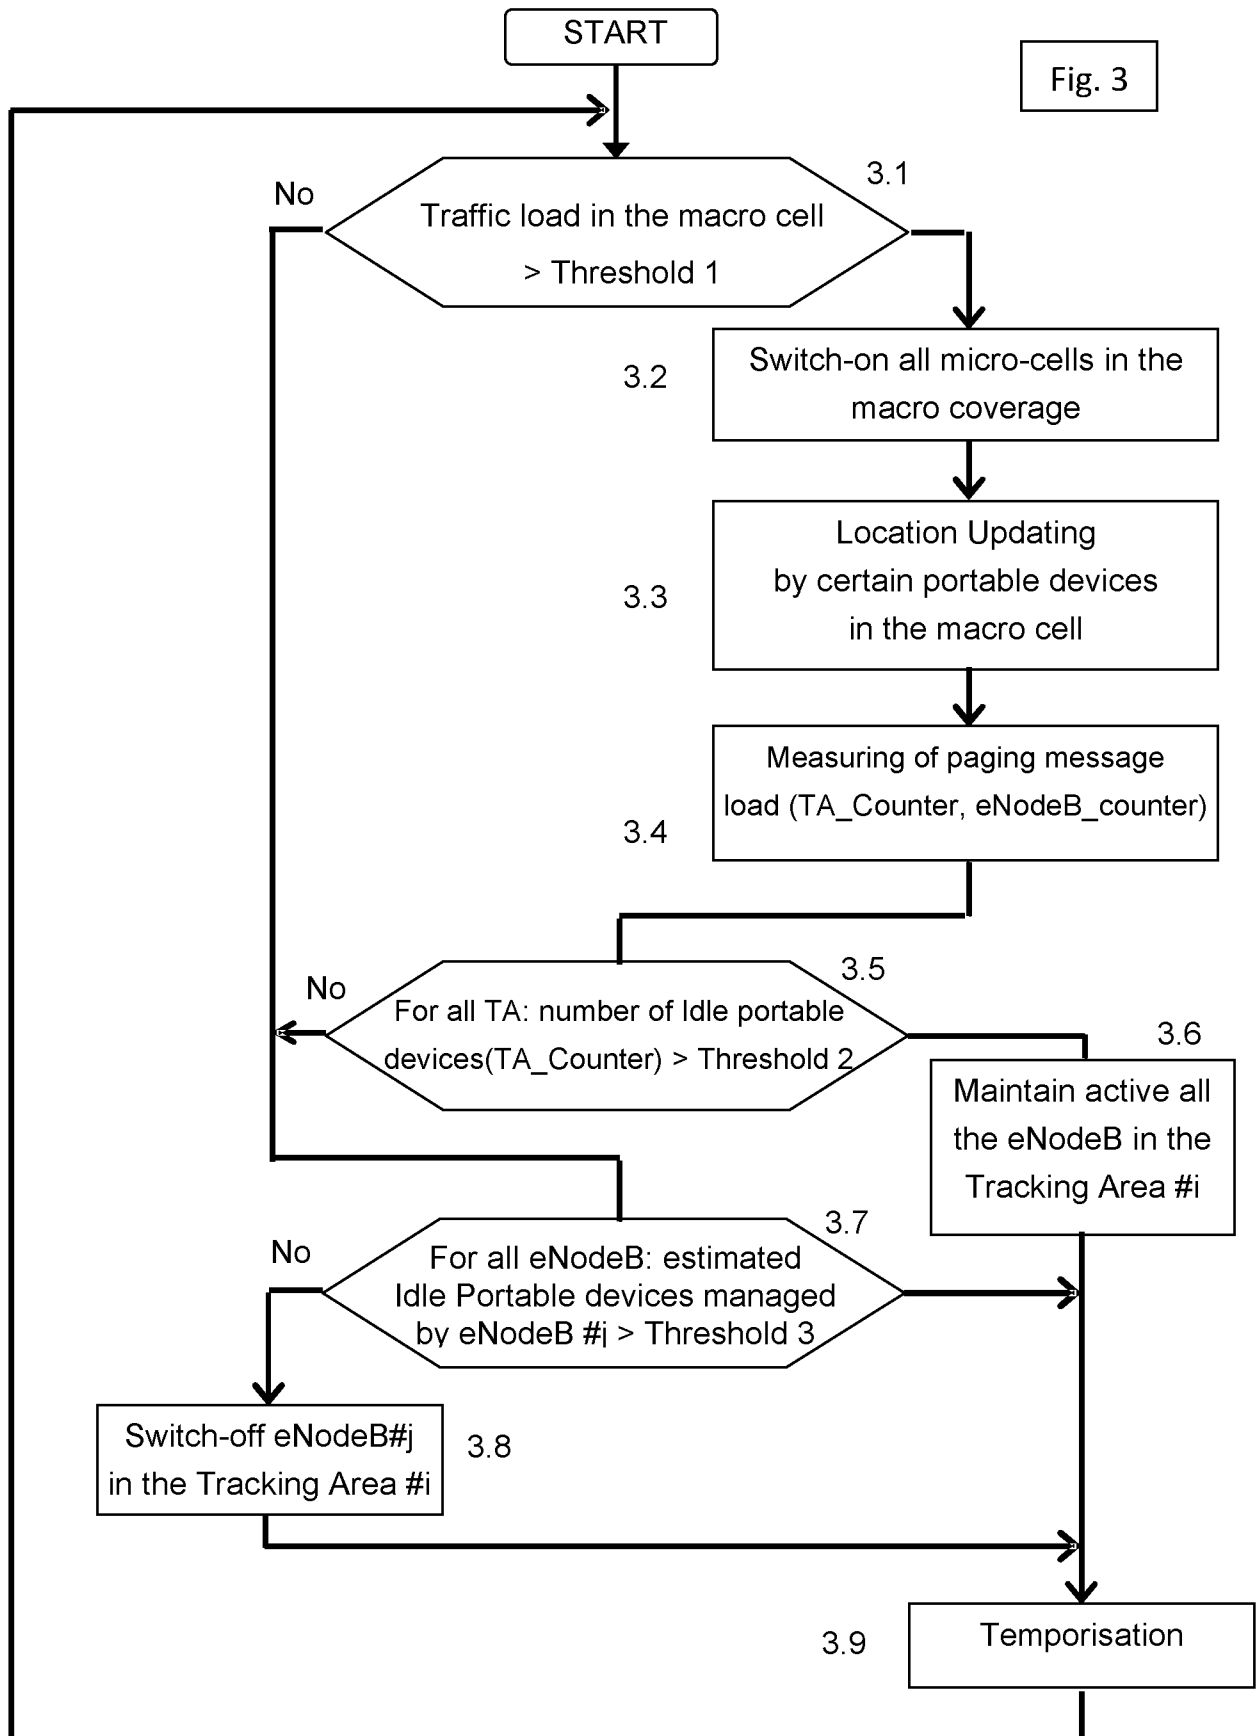


Fig. 3



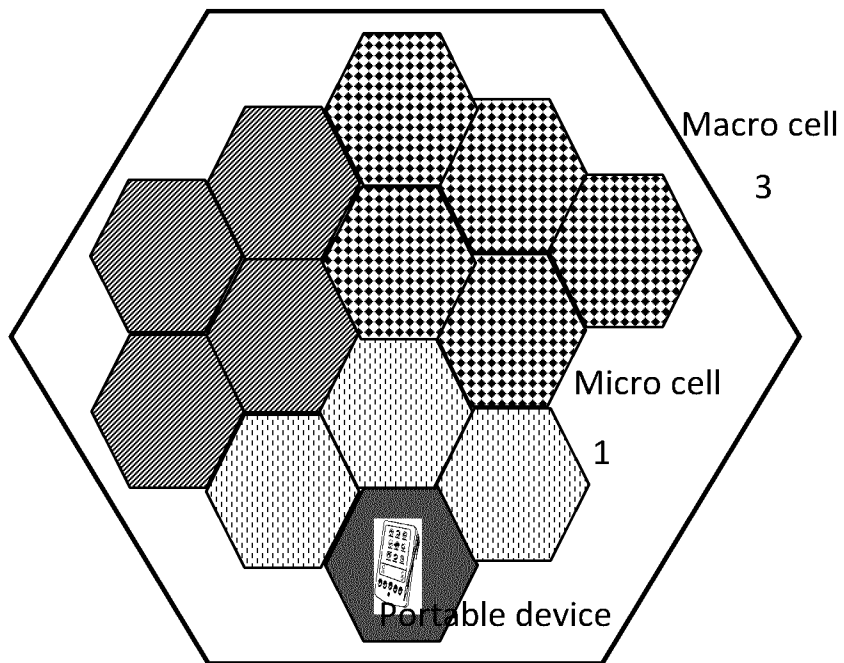


Fig. 4

Micro cells of the macro cell are in different Tracking Areas

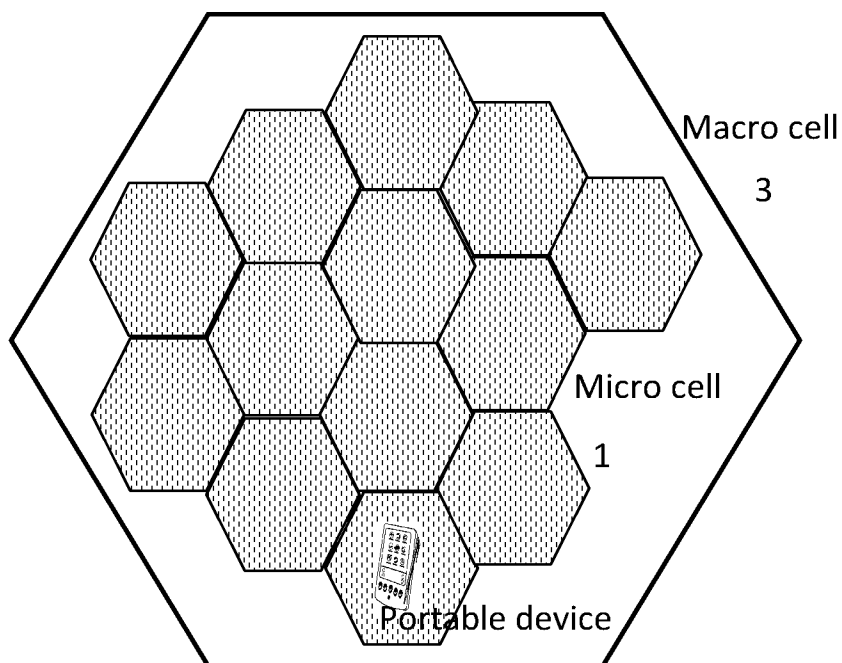


Fig. 5

All micro cells of the macro cell are in the same Tracking Area

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/056512

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04W24/02 H04W52/02
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

H04W

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	"3rd Generation Partnership Project; Technical Specification Group Services and System Aspects; Telecommunication management; Study on Energy Savings Management (ESM) (Release 9)", 3GPP DRAFT; 32826-200, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, vol. SA WG5, no. Xiamen; 20100301, 15 March 2010 (2010-03-15), XP050440209, paragraph [04.2] paragraph [06.3] figure 6.3.2 ----- -/-	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

23 May 2012

Date of mailing of the international search report

30/05/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Lombardi, Giuseppe

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2012/056512

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 2010/151186 A1 (ERICSSON TELEFON AB L M [SE]; RUNE JOHAN [SE]; VIKBERG JARI [SE]; NYLA) 29 December 2010 (2010-12-29) abstract page 4, line 16 - page 6, line 6 page 9, line 1 - line 20 page 10, line 30 - page 11, line 12 page 13, line 26 - page 14, line 10 page 23, line 10 - page 27, line 21 figure 2 -----	1-15
A	GB 2 378 089 A (MOTOROLA INC [US]) 29 January 2003 (2003-01-29) abstract page 4, line 1 - page 6, line 26 -----	1-15
A	WO 2009/115554 A1 (NOKIA SIEMENS NETWORKS OY [FI]; DOETTLING MARTIN [DE]; FAERBER MICHAEL) 24 September 2009 (2009-09-24) abstract page 17, line 30 - page 22, line 25 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/056512

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2010151186 A1	29-12-2010	EP 2446673 A1 US 2012106423 A1 WO 2010151186 A1	02-05-2012 03-05-2012 29-12-2010
GB 2378089 A	29-01-2003	NONE	
WO 2009115554 A1	24-09-2009	CN 102037768 A EP 2120493 A1 EP 2266353 A1 US 2011096687 A1 WO 2009115554 A1	27-04-2011 18-11-2009 29-12-2010 28-04-2011 24-09-2009