



(43) International Publication Date  
30 August 2012 (30.08.2012)

- (51) International Patent Classification:  
*F03D 7/02* (2006.01) *F03D 11/00* (2006.01)
- (21) International Application Number:  
PCT/DK2012/050058
- (22) International Filing Date:  
21 February 2012 (21.02.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
PA 2011 70100 24 February 2011 (24.02.2011) DK  
61/446,165 24 February 2011 (24.02.2011) US
- (71) Applicant (for all designated States except US): VESTAS  
WIND SYSTEMS A/S [DK/DK]; Hedeager 44, DK-8200  
Aarhus N (DK).

- (72) Inventors; and  
(75) Inventors/Applicants (for US only): HAMMERUM,  
Keld [DK/DK]; Jupitervej 12, DK-8370 Hadsten (DK).  
THØGERSEN, Morten [DK/DK]; Præstevangen 18,  
Søften, DK-8382 Hinnerup (DK).
- (81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,  
CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,  
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR,  
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,  
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,  
OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,  
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,  
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU,  
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

[Continued on next page]

(54) Title: A SAFETY SYSTEM FOR A WIND TURBINE

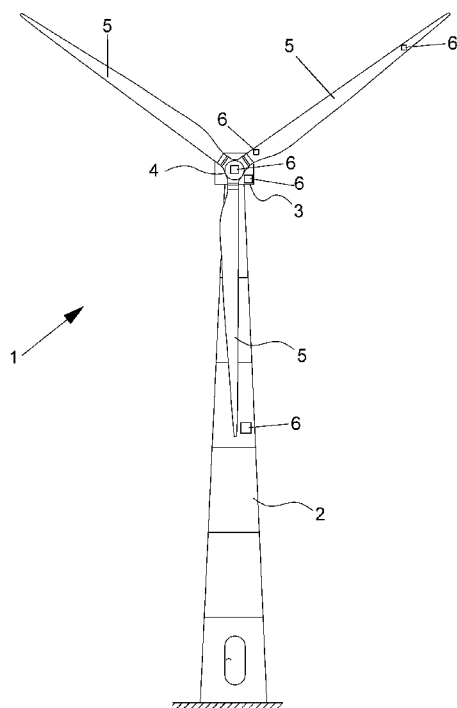


FIG. 1

(57) Abstract: The invention provides a safety system for a wind turbine comprising a tower with a nacelle, and a rotor with blades and a connected drive train. The safety system comprises at least one load sensing system for providing a load signal significant for a load on the tower or rotor, and an electronic system which based on the load signal brings the wind turbine to a safe condition.



DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT,  
LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE,  
SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA,  
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments (Rule 48.2(h))*

**Published:**

— *with international search report (Art. 21(3))*

## A SAFETY SYSTEM FOR A WIND TURBINE

### Field of the invention

The present invention relates to a safety system for a wind turbine and a wind turbine comprising a safety system.

### 5 Background of the invention

Most modern wind turbines are controlled and regulated continuously most often with the purpose of ensuring maximum power extraction from the wind under the current wind, and weather, while at the same time ensuring that the loads on the different components of the wind turbine are at any time kept within acceptable limits. Desirably, the wind turbine may  
10 also be controlled to account for fast sudden changes in the wind velocity – the so-called wind gusts, and take into account the dynamic changes in the loads on the individual blades due to e.g. the passing of the tower, or the actual wind velocity varying with the distance to the ground (the wind profile or shear).

To this purpose a number of parameters are collected and monitored by the controllers in a  
15 wind turbine, such as for instance the current wind speed and direction, the rotational speed of the rotor, the pitch angle of each blade, the yaw angle, information on the grid system, and measured parameters (e.g. stresses or vibrations) from sensors placed e.g. on the blades, the nacelle, or on the tower.

Based on these and following some control strategy the optimal control parameters of the  
20 turbine in order to perform optimally under the given conditions are determined. The current performance, and thereby the power production and the load situation of the wind turbine is primarily controlled by controlling the pitch angles of the blades, but may further include adjusting for instance any different active aerodynamic devices for changing the aerodynamic surfaces of the blades such as flaps or vortex generating means, adjusting the power, and/or  
25 adjusting the rotational speed of the rotor.

Wind turbines are traditionally constructed and controlled according to standards and according to wind maps and incorporating the trade-off of maximizing the annual energy production by the wind turbine while on the same time ensuring a certain life time of the turbine i.e. keeping the loads on the different components of the wind turbine within  
30 acceptable limits at all times and over time. Wind turbines are therefore typically designed according to a certain (high) turbulence but will most often be operating at a lower

turbulence level and may in some conditions be controlled too conservative, while in some conditions not conservative enough resulting in undesired fatigue or extreme loads on the wind turbine components, especially the blades, nacelle and tower.

5 Traditional wind turbines are designed for a specific maximum load, e.g. calculated from a specific wind speed at which the wind turbine is stopped. The tower, nacelle, blades and other structures of the wind turbine are designed for this maximum load which means that the structures are sufficiently strong with regard to this maximum wind speed – calculated with a safety margin.

10 This typically requires increased reinforcement of the heavy turbine parts such as the tower, and the result is increased costs related to manufacturing, handling, maintenance, inspection etc.

#### Summary of the invention

It is an object of the present invention to provide a safety system for a wind turbine and to provide an improved wind turbine comprising a safety system.

15 Thus, in a first aspect, the invention provides a safety system for a wind turbine comprising a tower with a nacelle, and a rotor with blades and a connected drive train, the safety system comprising at least one load sensing system for providing a load signal significant for a load on the tower or rotor, and an electronic system which based on the load signal brings the wind turbine to a safe condition.

20 Since the safety system according to the invention brings the wind turbine to a safe condition based on actually measured load signals and not based on a maximum wind speed or similar predetermined limiting weather conditions, the system according to the invention is capable of ensuring a better match between the actual loads and when to bring the turbine to a safe condition. The risk of overloading of the turbine is thereby reduced, and the heavy  
25 components of the turbine may therefore be designed with a smaller safety margin. Accordingly, the invention provides a safer and/or more cost efficient turbine.

It should be understood that by bringing the wind turbine to a safe condition is meant, that the rotor speed is lowered to a speed which is less than half the nominal speed.

The safe condition may comprise a condition where the wind turbine is brought to a standstill. Alternatively, the safe condition may comprise a condition where the wind turbine is brought to an idle mode. The safe condition may dependent on the load signal provided.

In one embodiment, the electronic system comprises load data describing a critical load condition and bringing the wind turbine to a safe condition may thus be based on a comparison between the provided load signal and the load data. As an example, the load data may comprise critical loads for the tower, such as a load at which the tower may bend too much or may actually break. Bringing the wind turbine to a safe condition may thus be initiated when the load signal is e.g. 70% or more of the load data. Other ratios may be used for the comparison dependent of the load data used.

The load data may also comprises critical loads for the blades, such as a load at which bending of the blades is so high that they may hit the tower or a load at which they may break. Consequently, bringing the wind turbine to a safe condition may also be initiated when the load signal is at a certain percentage of one of these blade loads. The percentage may e.g. depend on the size of the wind turbine and thus the size of the blades.

In order to control of the situation at which the wind turbine is brought to a safe condition dependent on the actual load situation for the wind turbine, the electronic system may receive load signals from the load sensing system while initiating the safe condition. Thereby, is may be ensured that bringing the wind turbine to a safe condition is carried out as requested. Furthermore, is may be controlled that a critical load does not arise at another part of the wind turbine while the wind turbine is at the safe condition.

The load signal may be significant for torsion or bending of the tower or rotor. As an example, the load signal may be signification for bending of the tower or significant for the nacelle to break off the tower. Likewise, the load signal may be significant for bending of at least one of the blades, such as significant for the load at which the at least one blade may break or the load at which the at least one blade may hit the tower during rotation.

As critical loads may arise from different load situations, the load sensing system may be capable of detecting load caused by at least one of ice formation on the rotor, mass unbalance, de-lamination, lightning, and excessive rotor speed. In one embodiment, different load sensing systems may be provided for different load situations. Each of the load sensing systems may thus provide a load signal significant for an associated load.

Additional to the load signals, the safety system may further be adapted to bring the wind turbine to a safe condition based on weather conditions, such as wind speed, wind direction,

pressure, temperature, rainfall, fog, etc. This may especially be an advantage in relation to load situations which may be increased during certain weather conditions. As an example, it may be an advantage to bring the wind turbine to a safe condition at a higher speed based on a load signal significant for ice formation on the rotor if the air temperature is below a certain predefined temperature. Similarly, it may be an advantage to faster bring the wind turbine to a safe condition based on excessive rotor speed if the wind speed is above a certain predefined wind speed.

As it is of great importance that failures are minimized or even avoided, the safety system may further comprise a validation sensor providing additional load data. The additional data may be collected in parallel to the load signal. The electronic system may be capable of validating the load signal based on a comparison between the load signal and the additional load data, thereby providing an indication of a failure in case the difference between the load signal and the additional load data is too high.

The safety system may further be adapted to bring the wind turbine to a safe condition if the difference between the load signal and the load data is above a pre-defined validation value. The pre-defined value may depend on the load sensing system in use. A number of pre-defined validation values may be used in the safety system so that e.g. a pre-defined validation value exists for each sensing system.

The pre-defined validation value may be variable, e.g. so that it depends on weather conditions and/or the time of the day.

Furthermore, validation of the load signal may be a model-based validation which is not limited to measurements of loads. Instead, the model-based validation may be based on weather data.

Additionally, validation of the load signal may be done based on another load signal. As an example, a load signal significant for bending of the tower may be validated by use of a load signal significant for tower top acceleration.

Dependent on the position used for the at least one load sensing system, different sensor may be used. Thus, the at least one load sensing system may be selected from a group consisting of: electrical sensors, optical sensors, acoustic sensor, GPS based sensors, accelerometers, gyro sensors, and Terahertz based sensors. It should however be understood, that more than one sensing system may be applied and that the selected sensors may be different or may be of the same type.

In one embodiment, the load sensing system may be positioned on at least one of the wind turbine blades, whereby the load sensing system may be responsible for providing load data, e.g. in the form of bending of the blade and/or rotational speed of the blade. A load sensing system positioned at the tower may be responsible for providing load data, e.g. in the form of bending of the tower and/or vibrations of the tower. Thus, a number of different and/or identical sensing systems may be used, each providing a load signal significant for a certain load. By increasing the number of sensing systems with identical or different failure modes it may be possible to increase reliability of the safety system.

In one embodiment, the load sensing system may be a single-channel sensor with a probability of dangerous failure per hour (PFH) of at most  $10^{-6}$ , and a safe failure fraction above 90%.

As an alternative, the load sensing system may be a dual-channel system with a probability of dangerous failure per hour (PFH) of at most  $10^{-6}$ , and a safe failure fraction above 60%.

In a second aspect, the invention provides a wind turbine comprising a safety system according to the first aspect of the invention.

It should be understood, that the above-mentioned features of the first aspect of the invention may also be applicable in relation to the wind turbine according to the second aspect of the invention. Thus, the second aspect may comprise any combination of features and elements of the first aspect of the invention.

## Brief description of the drawings

Embodiments of the invention will now be further described with reference to the drawings, in which:

Fig. 1 illustrates different load sensing systems positioned at different locations of a wind turbine.

## Detailed description of the drawings

It should be understood that the detailed description and specific examples, while indicating embodiments of the invention, are given by way of illustration only, since various changes

and modifications within the spirit and scope of the invention will become apparent to those skilled in the art from this detailed description.

Fig. 1 illustrates a wind turbine 1 comprising a tower 2 with a nacelle 3 at the top of the tower. The nacelle 3 houses machine components, such as gearbox, generator etc. (not shown). At one end of the nacelle 3, a hub section 4 supports a three wind turbine blades 5. The rotor of the wind turbine 1 includes the blades 5 and possibly other rotating parts.

The wind turbine 1 further comprises a safety system (not shown). The safety system comprises a number of load sensing systems 6 for providing a load signal significant for a load on the tower 2 or rotor. Furthermore, the safety system comprises an electronic system (not shown) which based on the load signal brings the wind turbine 1 to a safe condition.

As an example, the load signals are significant for an acceleration of a component of the wind turbine 1, a load of a component of the wind turbine 1, bending of a component of the wind turbine, e.g. the tower or a blade, a load caused by ice formation on the rotor, mass unbalance, de-lamination, lightning, excessive rotor speed, etc.

Furthermore, the load signal may be significant for torque measured at the hub or stress in a blade root.

The at least one load sensing system may as an example comprise one of the following: electrical sensors, optical sensors, acoustic sensor, GPS based sensors, accelerometers, gyro sensors, and Terahertz based sensors. Thus, acceleration measurements may be performed by means of an accelerometer arranged within the hub section, on the nacelle, or on the main shaft. Bending measurements may be performed e.g. by an angle measurement device. The RPM measurements may conveniently be performed on the main shaft of the turbine or on a rotatable part within the hub section, to measure the rotational speed of the rotor. Alternatively, it may be performed by an instrument, which is independent of access to the main shaft of the wind turbine.



## CLAIMS

1. A safety system for a wind turbine comprising a tower with a nacelle, and a rotor with blades and a connected drive train, the safety system comprising at least one load sensing system for providing a load signal significant for a load on the tower or rotor, and an  
5 electronic system which based on the load signal brings the wind turbine to a safe condition.
2. A safety system according to claim 1, wherein the safe condition comprises a condition where the wind turbine is brought to a standstill.
3. A safety system according to claim 1, wherein the safe condition comprises a condition where the wind turbine is brought to an idle mode.
- 10 4. A safety system according to any of the preceding claims, wherein the electronic system comprises load data describing a critical load condition and wherein bringing the wind turbine to a safe condition is based on a comparison between the provided load signal and the load data.
- 15 5. A safety system according to any of the preceding claims, wherein the electronic system receives load signals from the load sensing system while bringing the wind turbine to a safe condition.
6. A safety system according to any of the preceding claims, wherein the load signal is significant for torsion or bending of the tower or rotor.
- 20 7. A safety system according to any of the preceding claims, wherein the load sensing system is capable of detecting load caused by at least one of ice formation on the rotor, mass unbalance, de-lamination, lightning, and excessive rotor speed.
8. A safety system according to any of the preceding claims, wherein bringing the wind turbine to a safe condition is further based on weather conditions.
- 25 9. A safety system according to any of the preceding claims, further comprising a validation sensor providing additional load data, and wherein the electronic system is capable of validating the load signal based on a comparison between the load signal and the additional load data.

10. A safety system according to any of the preceding claims, wherein the at least one load sensing system is selected from a group consisting of: electrical sensors, optical sensors, acoustic sensor, GPS based sensors, accelerometers, gyro sensors, and Terahertz based sensors.

5 11. A safety system according to any of the preceding claims, wherein the load sensing system is positioned on at least on of the blade.

12. A safety system according to any of the preceding claims, wherein the load sensing system is a single-channel sensor with a probability of dangerous failure per hour (PFH) of at most  $10^{-6}$ , and a safe failure fraction above 90%.

10 13. A safety system according to any of the claims 1-11, wherein the load sensing system is a dual-channel system with a probability of dangerous failure per hour (PFH) of at most  $10^{-6}$ , and a safe failure fraction above 60%.

14. A wind turbine comprising a safety system according to any of claims 1-13.

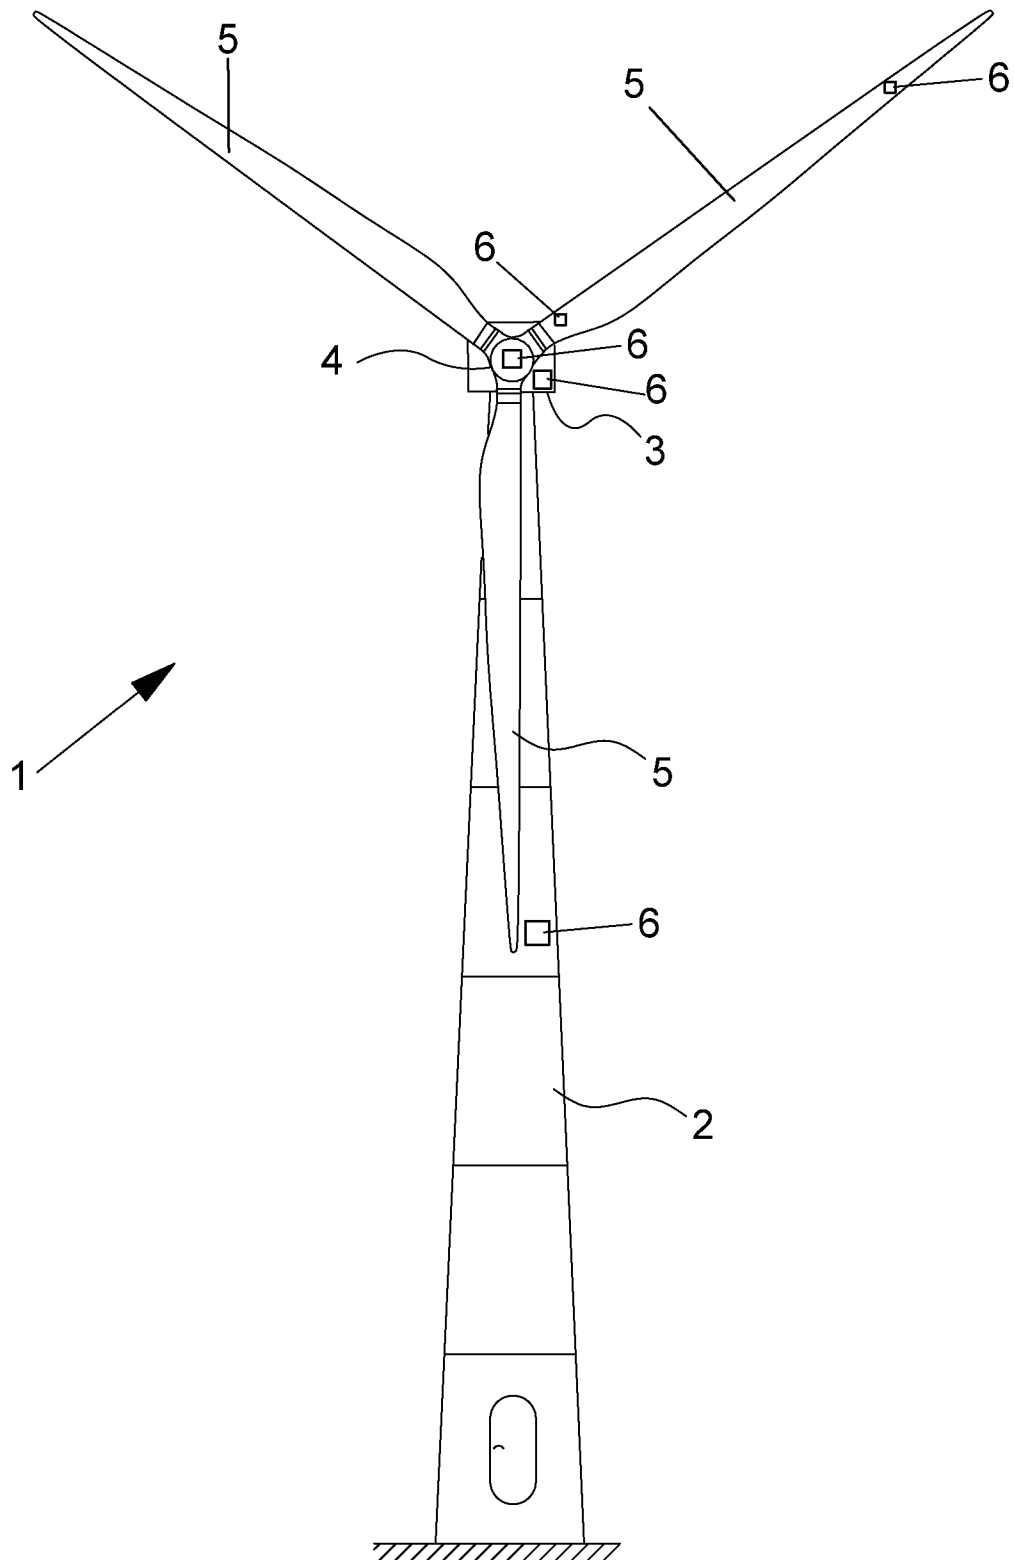


FIG. 1

# INTERNATIONAL SEARCH REPORT

International application No

PCT/DK2012/050058

## A. CLASSIFICATION OF SUBJECT MATTER

INV. F03D7/02 F03D11/00  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

F03D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 2 159 418 A2 (NORDEX ENERGY GMBH [DE]) 3 March 2010 (2010-03-03) paragraph [0029] - paragraph [0032]; claims 1-5, 11-18, 23; figure 1 -----	1-14
X	DE 10 2005 034899 A1 (REPOWER SYSTEMS AG [DE]) 1 February 2007 (2007-02-01) paragraph [0033] - paragraph [0043] paragraphs [0050], [0051], [0053]; claims 1, 8, 12, 18, 26, 27; figures 1-7 -----	1-14
X	US 2007/018457 A1 (LLORENTE GONZALEZ JOSE I [US] LLORENTE GONZALEZ JOSE IGNACIO [ES]) 25 January 2007 (2007-01-25) paragraph [0051] paragraph [0114] - paragraph [0154]; claims 20-30; figures 1-9 ----- -/-	1-14

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 June 2012

Date of mailing of the international search report

04/07/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Balice, Marco

# INTERNATIONAL SEARCH REPORT

International application No

PCT/DK2012/050058

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 195 28 862 A1 (WOB BEN ALOYS [DE]) 6 February 1997 (1997-02-06) column 4, line 54 - column 5, line 68; claims 1,7; figures 1-4 -----	1-14
X	WO 2009/043352 A2 (VESTAS WIND SYS AS [DK]; HARAGUCHI YOSHIKI [SG]) 9 April 2009 (2009-04-09) page 9 - page 16; claims 1, 13, 14; figures 1-5 -----	1-14

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/DK2012/050058

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 2159418 A2	03-03-2010	DE 102008044652 A1	04-03-2010
		EP 2159418 A2	03-03-2010
		US 2010052321 A1	04-03-2010
-----			
DE 102005034899 A1	01-02-2007	AT 539258 T	15-01-2012
		CA 2616502 A1	01-02-2007
		CN 101248269 A	20-08-2008
		DE 102005034899 A1	01-02-2007
		EP 1910670 A1	16-04-2008
		ES 2377442 T3	27-03-2012
		US 2008290664 A1	27-11-2008
		WO 2007012487 A1	01-02-2007
-----			
US 2007018457 A1	25-01-2007	CN 1900513 A	24-01-2007
		DE 102006034106 A1	12-04-2007
		FR 2889722 A1	16-02-2007
		GB 2428748 A	07-02-2007
		GR 20060100428 A	15-02-2007
		PT 103534 A	31-01-2007
		US 2007018457 A1	25-01-2007
-----			
DE 19528862 A1	06-02-1997	AT 198370 T	15-01-2001
		CA 2228145 A1	20-02-1997
		CZ 9800314 A3	15-07-1998
		DE 19528862 A1	06-02-1997
		DK 842360 T3	19-03-2001
		EP 0842360 A1	20-05-1998
		NO 980487 A	04-02-1998
		WO 9706367 A1	20-02-1997
-----			
WO 2009043352 A2	09-04-2009	AT 521806 T	15-09-2011
		CA 2701223 A1	09-04-2009
		CN 101821500 A	01-09-2010
		EP 2198156 A2	23-06-2010
		ES 2371988 T3	12-01-2012
		US 2010189560 A1	29-07-2010
		WO 2009043352 A2	09-04-2009
-----			