



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
17.05.2023 Bulletin 2023/20

(51) International Patent Classification (IPC):
C10M 103/02 ^(2006.01) **C10M 169/00** ^(2006.01)
C10M 125/02 ^(2006.01)

(21) Application number: **22206178.0**

(52) Cooperative Patent Classification (CPC):
C10M 169/00; C10M 103/02; C10M 125/02;
C10M 2201/041; C10M 2227/04; C10N 2020/06;
C10N 2020/061; C10N 2020/09; C10N 2030/12;
C10N 2040/20; C10N 2050/015; C10N 2050/02;
C10N 2050/025

(22) Date of filing: **08.11.2022**

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC ME MK MT NL
NO PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA
Designated Validation States:
KH MA MD TN

(72) Inventors:
• **POTEET, Steven**
Ashland, 01721 (US)
• **SMITH, Blair A.**
South Windsor, 06074 (US)
• **GAGE, Marc E.**
Feeding Hills, 01030 (US)
• **PUJAR, Vijay V.**
San Diego, 92127 (US)

(30) Priority: **12.11.2021 US 202117525438**

(74) Representative: **Dehns**
St. Bride's House
10 Salisbury Square
London EC4Y 8JD (GB)

(71) Applicant: **Hamilton Sundstrand Corporation**
Charlotte, NC 28217-4578 (US)

(54) **CORROSION-RESISTANT GREASES AND WET LUBRICANTS**

(57) A corrosion-resistant wet film lubricant composition includes a lubricating pigment, an oil, and a thickener. The lubricating pigment comprises graphene platelets and is dispersed in the oil, and the thickener thickens the wet film lubricant. The graphene platelets are oxidized and functionalized with a silane. In another example, a method of producing a corrosion-resistant lubricant includes oxidizing exfoliated graphene to produce oxidized graphene platelets, functionalizing the oxidized graphene platelets with a silane to produce functionalized graphene platelets, and dispersing the functionalized graphene platelets in a lubricant composition, wherein the lubricant composition comprises an oil and a thickener.

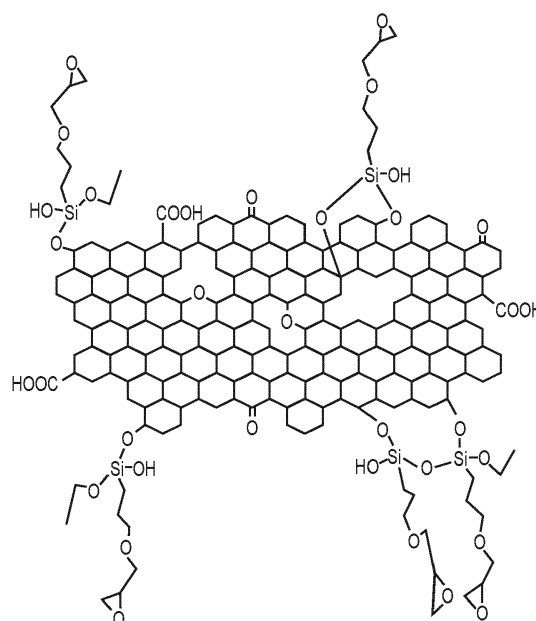


FIG. 1

Description

BACKGROUND

[0001] The present disclosure relates to lubricants having improved corrosion resistance, and more particular to wet film lubricants having improved resistance to galvanic or bimetallic corrosion.

[0002] Some wet film lubricants can facilitate galvanic or bimetallic corrosion between lubricated components. In particular, wet film lubricants that include graphite can increase the rate of galvanic corrosion. Chromate-based anti-corrosion agents can be added to wet film lubricants to reduce the rate of galvanic corrosion of metals such as aluminum, copper, cadmium, zinc, magnesium, tin, silver, iron, and their alloys to reduce and slow the rate of galvanic corrosion. Chromate-based anti-corrosion agents, which contain hexavalent chromium, may pose a number of environmental and health risks, and for this reason hexavalent chromium is heavily regulated in, for example, the U.S. and the E.U.

SUMMARY

[0003] In one example, a corrosion-resistant wet film lubricant composition includes a lubricating pigment, an oil, and a thickener. The lubricating pigment comprises graphene platelets and is dispersed in the oil, and the thickener thickens the wet film lubricant. The graphene platelets are oxidized and functionalized with a silane.

[0004] In another example, a lubricated article includes a surface and a coating on the surface of a corrosion-resistant wet film lubricant according to another example of this disclosure.

[0005] In yet a further example, a method of producing a corrosion-resistant lubricant includes oxidizing exfoliated graphene to produce oxidized graphene platelets, functionalizing the oxidized graphene platelets with a silane to produce functionalized graphene platelets, and dispersing the functionalized graphene platelets in a lubricant composition, wherein the lubricant composition comprises an oil and a thickener.

BRIEF DESCRIPTION OF THE DRAWINGS

[0006]

FIG. 1 is a structural formula of an example of a graphene platelet functionalized with a silane.

FIG. 2 is a schematic drawing of an example of a surface coated with a corrosion-resistant wet film lubricant including a functionalized graphene platelet. FIG. 3 is a structural formula of an example of a silane suitable for functionalizing a graphene platelet.

FIG. 4 is a reaction schematic for making an example of a graphene platelet functionalized with a silane.

FIG. 5 is flow diagram of an example of a method of producing a corrosion-resistant wet film lubricant in-

cluding a functionalized graphene platelet.

DETAILED DESCRIPTION

[0007] The present disclosure includes functionalized graphene platelets and lubricants containing functionalized graphene platelets. The functionalized graphene platelets disclosed herein function as anti-corrosive agents and allow for the preparation of lubricants that do not include chromate-based anti-corrosive agents. Further, the functionalized graphene platelets disclosed herein function as lubricating pigments.

[0008] FIG. 1 is a structural formula of an example of a graphene platelet functionalized with a silane. Graphene is a single layer of carbon atoms arranged in a two dimensional and generally hexagonal lattice. Graphite is composed of many layers of graphene. Graphene can be advantageously used as a lubricant pigment due to the ability of individual graphene layers to slide relative to one another. Graphite, similarly, can be used as a lubricant pigment due to the ability of graphene layers of the graphite to shear under friction force and slide relative to one another.

[0009] The graphene platelet depicted in FIG. 1 is an oxidized graphene platelet (e.g., a graphene oxide or a reduced graphene oxide) including oxygen-containing functional groups, such as hydroxyl groups, and is functionalized with silane groups via a condensation reaction. As used herein, "surface oxygen" and "surface oxides" refer to the oxygen-containing functional groups that extend away from a planar surface of an oxidized graphene platelet and are suitable for functionalization with silanes. As is shown in FIG. 1, the silane forms silyl ether linkages with the graphene platelet. Each silane can form single or multiple silyl ether linkages with the graphene platelet. The silane can be, for example, an alkoxy silane, such as a monoalkoxy-, dialkoxy-, or trialkoxy silane. Further, the alkoxy group can be selected based on steric properties and ability of the alkoxy silane to form linkages with the graphene platelet. For example, the alkoxy silane can be a methoxy silane or an ethoxy silane. As will be explained in more detail, especially with respect to FIGS. 2-3, the silane also includes a functional group that is selected based on its interaction with other lubricant components and/or the surface of a lubricated article.

[0010] In the depicted example, the graphene platelet is functionalized with (3-glycidyloxypropyl)triethoxy silane. However, the graphene platelet can be functionalized with other suitable silanes, such as (3-glycidyloxypropyl)trimethoxy silane or (3-aminopropyl)trimethoxy silane. The oxidized graphene can be, for example, graphene oxide (GO), reduced graphene oxide (rGO), or hydroxy graphene. As used herein, "graphene", "graphene oxide", "reduced graphene oxide," and "hydroxy graphene" refer to graphene platelets. The diameter of the graphene platelet can be selected to optimize lubricity. As used herein, the "diameter" of a graphene platelet refers to an average diameter of the two-dimensional lat-

tice of the graphene platelet. For example, the graphene platelet can have an average diameter of between 1 and 25 μm . The "thickness" of a graphene platelet refers to the average width of the graphene platelets in a direction normal to the lattice of the graphene platelet.

[0011] The graphene platelet depicted in FIG. 1 is depicted as a single layer of carbon for illustrative purposes. The graphene platelet can also be, for example, a graphene nanoplatelet (GNP) having multiple graphene layers. GNPs including multiple layers can be similarly oxidized and functionalized to produce functionalized GNPs having advantageously lubrication and anti-corrosion properties. For example, the functionalized GNPs can have an average thickness of between one and twenty graphene layers, with the exterior layers including functionalized silanes.

[0012] Graphite platelets have desirable properties for increasing the lubricity of lubricants, but are conductive and can act as conduits to facilitate galvanic corrosion. For this reason, graphite-containing lubricants usually contain an additional corrosion inhibitor, such as a chromate-based inhibitor or is similarly restricted on certain metals, such as aluminum, as the graphite may induce galvanic corrosion. Graphene platelets also have desirable properties for increasing the lubricity of lubricants and provide improved resistance to galvanic corrosion as compared to graphite platelets. Advantageously, graphenes inhibit, rather than facilitate, galvanic corrosion. Functionalized graphene platelets provide improved dispersion into a lubricant matrix and have reduced agglomeration as compared to unfunctionalized graphenes. As such, functionalized graphenes advantageously function both to prevent corrosion and to increase lubricity, reducing the need for chromate-based substances. The functionalized graphenes can be used as lubricant pigments and allow for the creation of corrosion-resistant lubricants that do not include chromate-based inhibitors. Although the graphene platelet

[0013] FIG. 2 is a schematic drawing of lubricated article 100, which is an example of a surface coated with a corrosion-resistant wet film lubricant including a functionalized graphene platelet. Lubricated article includes wet film lubricant 102 and article 104.

[0014] Wet film lubricant 102 is a corrosion-resistant wet film lubricant and coats a surface of article 104. Wet film lubricant 102 includes a lubricant pigment, an oil, and a thickener. The lubricating pigment includes silane-functionalized graphene platelets to provide lubricity to wet film lubricant 102. The oil facilitates the dispersion of the lubricating pigment and promotes homogeneity of the lubricant composition. The thickener functions to thicken the wet film lubricant to an appropriate viscosity and/or consistency.

[0015] Article 104 is an article requiring lubrication, such as a fastener, a valve component, a slide, or another part that functions by sliding relative to a separate structure. Article 104 is formed of a metal material that is susceptible to galvanic corrosion. For example, article 104

can be formed from an aluminum material. In operational conditions, article 104 is disposed adjacent to a second metallic component and wet film lubricant 102 provides lubricity between article 104 and the second metallic component, allowing article 104 and the second metallic component to slide relative to one another.

[0016] Existing graphite-based lubricants can facilitate galvanic corrosion between, for example, article 104 and the second metallic component or article 104 and a component of dry film lubricant 102, requiring an additional corrosion inhibitor to prevent galvanic corrosion. As described previously, chromate-based corrosion inhibitors are often added to existing graphite-based lubricants to prevent galvanic corrosion. Chromate-based compounds may pose a number of environmental and health risks, and are heavily regulated in, for example, the U.S. and the E.U. Advantageously, the silane-functionalized GNPs in wet film lubricant 102 both increase lubricity and prevent corrosion without the need for an additional corrosion inhibitor. As such, in some examples, wet film lubricant 102 does not include a chromate compound and is, therefore, substantially chromate-free.

[0017] Although the anti-corrosion properties of silane-functionalized graphene platelets have previously been characterized in paint and coating primers, the ability of silane-functionalized graphene platelets to function both as anti-corrosives and as lubricant pigments was unknown. In particular, at high concentrations, silane functionalized graphene platelets can cause the viscosity of a lubricant composition to increase substantially, which is undesirable for lubricant function. However, adding functionalized graphene platelets at a relatively low concentration in the lubricant composition confers substantial anti-corrosion and lubricity properties to the lubricant composition without substantially increasing the viscosity of the lubricant composition. For example, adding functionalized graphene at a concentration between 0.1 wt% and 0.5 wt% in the lubricant composition provides both sufficient lubricity and anti-corrosion properties while maintaining acceptable viscosity. In some examples, the resultant lubricant composition has acceptable viscosity with up to 5 wt% of functionalized graphene platelets. Advantageously, lubricant compositions that include functionalized graphene at a concentration of 0.1 wt% - 5 wt% do not require additional lubricant pigments to achieve sufficient lubricity and similarly do not require additional anti-corrosives, such as chromate compounds or other anti-corrosion compounds, to prevent galvanic corrosion.

[0018] As will be described in more detail with respect to FIG. 3, the silane used to functionalize the oxidized graphene can further be selected to improve dispersibility. For example, the silane can be selected to increase interactions between the functionalized graphene lubricant pigment of wet film lubricant 102 and the surface of article 104, and further to decrease interactions between the functionalized lubricant graphene pigment and other components of the wet film lubricant 102, including ad-

jacent functionalized graphene pigments, allowing for improved lubricity over conventional graphite lubricant pigments. Notably, unfunctionalized graphenes may exhibit poor dispersion in lubricant compositions. The functionalized graphenes disclosed herein have substantially improved dispersion as compared to unfunctionalized graphenes, improving the lubricity of lubricant compositions containing the functionalized graphenes disclosed herein as compared to lubricant compositions containing only unfunctionalized graphenes. To this extent, lubricant compositions including a functionalized graphene described herein offer a number of advantages relating to lubricity and galvanic corrosion over conventional lubricant compositions.

[0019] Although additional components that confer lubricity or anti-corrosive properties are not required for the function of wet film lubricant 102, wet film lubricant 102 can include additional lubricating and/or anti-corrosive agents in some examples. For example, wet film lubricant 102 can also include MoS_2 , WS_2 , and/or BN to improve lubricity. Similarly, in some examples dry film lubricant 102 can include chromate-based corrosion inhibitors or another suitable corrosion inhibitor, such as magnesium silicate, praseodymium hydroxide, a zinc salt, a rare earth trivalent chromium (RECRO_3) compound, or another suitable compound. RECRO_3 compounds include trivalent chromium and at least one rare earth cation. Example rare earth cations include cerium (Ce), dysprosium (Dy), erbium (Er), europium (Eu), gadolinium (Gd), holmium (Ho), lanthanum (La), lutetium (Lu), neodymium (Nd), praseodymium (Pr), promethium (Pm), samarium (Sm), scandium (Sc), terbium (Tb), thulium (Tm), ytterbium (Yb) and yttrium (Y) and the alkaline earth element precursor includes at least one of magnesium (Mg), calcium (Ca), strontium (Sr), and barium (Ba). RECRO_3 compounds are substantially less toxic than hexavalent chromium-based corrosion inhibitors.

[0020] FIG. 3 is a structural formula of an example of a silane suitable for functionalizing a graphene platelet. FIG. 3 includes a silicon atom covalently bonded to three R groups ($\text{R}_1\text{-R}_3$) and one X group. R groups represent positions that can be occupied by leaving groups. X represents a position that is not occupied by a leaving group and instead is occupied by a functional group for affecting the lubricity of a functionalized graphene platelet. As used herein, "leaving groups" refer to functional groups that retain an electron pair following heterolytic bond cleavage between the silicon atom and the leaving group. The leaving group can be, for example, a weak Lewis base. In some examples, the leaving groups at $\text{R}_1\text{-R}_3$ are ethers, such as ethoxy- or methoxy- moieties, or alcohols. At least one of $\text{R}_1\text{-R}_3$ is a leaving group to facilitate the formation of a covalent bond between the silane and an oxidized graphene platelet. However, the others of $\text{R}_1\text{-R}_3$ can be non-leaving groups. For example, one or more of $\text{R}_1\text{-R}_3$ can be an alkane, such as methyl- or ethyl- moieties, or a hydrogen. $\text{R}_1\text{-R}_3$ can be the same or different from one another.

[0021] X can include one or more an alkane, a haloalkane, a perhaloalkane, an ester, an ether, an amide, an amine, and an epoxy. For example, X can include an alkane chain, an ether, and an epoxy group. The chemical composition and structure of X is selected to improve lubricity of the functionalized graphene. For example, the structure of X can be selected to improve interlaminar spacing between adjacent functionalized graphene platelets in wet lubricant film 102 and improve the ability of adjacent functionalized graphene platelets to slide relative to each another. As a specific example, including a perfluoro group in X can increase interlaminar spacing, improving lubricity, as well as impart greater hydrophobic properties to the lubricant. Advantageously, improving the ability of adjacent functionalized graphene platelets to slide relative to one another improves the lubricity of wet film lubricant 102.

[0022] Similarly, the chemical composition and structure of X can be selected to improve dispersion in wet lubricant film 102. For example, X can be selected based on the chemistry of an oil for a wet film lubricant, such that there is an unfavorable interaction between the oil and the functionalized graphene that increases the propensity of the functionalized graphene to localize adjacent to the surface of article 104. As a specific example, X can include a perfluoro group to cause the functionalized graphene to repel from other hydrocarbons in wet film lubricant 102. As a further example, the chemical composition and structure of X can be selected to improve adhesion between the functionalized graphene platelets and article 104, thereby increasing the propensity of the functionalized graphene platelets to localize adjacent to the surface of article 104. Advantageously, choosing a chemical composition and structure of X that increases the propensity of the functionalized graphene to localize adjacent to the surface of article 104 improves the lubricity of wet film lubricant 102.

[0023] The identities of $\text{R}_1\text{-R}_3$ and X can further be selected based on their impact on the efficiency or rate of functionalization of an oxidized graphene platelet. For example, one or more of $\text{R}_1\text{-R}_3$ and X can be selected based on their steric properties, as sufficiently bulky groups can inhibit functionalization of oxidized graphene platelets.

[0024] FIG. 4 is a reaction schematic for making an example of a graphene platelet functionalized with a silane. According to the reaction schematic shown in FIG. 4, graphite is exfoliated and oxidized to form oxidized graphene. The graphite can be exfoliated using, for example, high-shear mixing, ball milling, sonication, chemical exfoliation, use of exfoliating surfactants, or a combination of the foregoing techniques, among other options. High-shear mixing can also be used to enhance dispersion of the graphene platelets in solution. In some examples, exfoliation and oxidation occurs substantially simultaneously. For example, exfoliation can be performed in oxidizing conditions, such as via a chemical exfoliation technique, to produce exfoliated and oxidized

graphene. Chemical reduction of the graphene can be performed to reduce the number of surface oxides produced by oxidation.

[0025] Following exfoliation and oxidation, the oxidized graphene is silanized to yield functionalized graphene. The oxidized graphene is silanized by a condensation reaction between a silane and a surface oxygen of the oxidized graphene, yielding a functionalized graphene and a free leaving group. The silane is one having the chemical formula described previously with respect to FIG. 3. As at least one of R_1 - R_3 of the structural formula shown in FIG. 3 is a leaving group, at least one of R_1 - R_3 is covalently bonded to a graphene platelet.

[0026] The silanization reaction can be conducted by first dispersing graphene platelets in a reaction solvent. The concentration of graphene platelets in the solvent can be 10-30 wt% of the reaction. The reaction solvent can be, for example, a polar solvent. In some examples, the polar solvent can be an alcohol, such as ethanol. In some examples, the silanes functionalize up to 15 wt% of surface oxygen of the oxidized graphene platelets.

[0027] Although the disclosures herein refer generally to functionalizing graphene platelets with silanes, other suitable compounds can be used to functionalize graphenes to reduce corrosion and/or improve lubricity. In these examples, the reaction schematic shown in FIG. 4 can be modified to include an alternative reaction step to functionalize the oxidized graphene in place of the depicted silanization reaction.

[0028] FIG. 5 is flow diagram of method 500, which is an example of a method of producing a corrosion-resistant wet film lubricant including a functionalized graphene platelet. Method 500 includes steps of oxidizing exfoliated graphene platelets (step 502), functionalizing the oxidized graphene platelets (step 504), and dispersing the functionalized graphene platelets in a lubricant composition (step 506).

[0029] Oxidizing the exfoliated graphene platelets (step 502) and functionalizing the oxidized graphene platelets (step 504) can be performed in substantially the same manner as described previously with respect to the reaction schematic of FIG. 4. In step 506, the functionalized graphene platelets are dispersed in a lubricant composition, such as wet film lubricant 102. The functionalized graphene platelets are added to an oil and a thickener to create a lubricant composition. The functionalized graphene platelets are dispersed in the lubricant composition by sonication, high-shear mixing, or another suitable method to create a homogeneous mixture. The resultant lubricant composition is a corrosion-resistant lubricant composition.

[0030] As described previously, at high concentrations, the functionalized graphene platelets can cause the viscosity of the lubricant composition to increase substantially, which is undesirable for lubricant function. However, adding functionalized graphene platelets at a relatively low concentration in the lubricant composition, such as 0.1 wt% and 0.5 wt%, confers substantial anti-

corrosion and lubricity properties to the lubricant composition without substantially increasing the viscosity of the lubricant composition. In some examples, the resultant lubricant composition has acceptable viscosity with up to 5 wt% of functionalized graphene platelets.

[0031] Advantageously, lubricant compositions that include a functionalized graphene platelet described herein at a concentration of 0.1 wt% - 5 wt% do not require additional lubricant pigments to achieve sufficient lubricity and similarly do not require additional anti-corrosives to prevent galvanic corrosion. To this extent, lubricant compositions that include a functionalized graphene described herein do not require, for example, a chromate-based corrosion inhibitor and are, therefore, substantially chromate-free. Further, the functionalized graphene platelets described herein offer improved lubricity over conventional graphite and graphene lubricant pigments.

Discussion of Possible Embodiments

[0032] The following are non-exclusive descriptions of possible embodiments of the present invention.

[0033] An embodiment a corrosion-resistant wet film lubricant composition includes a lubricating pigment, an oil, and a thickener. The lubricating pigment comprises graphene platelets and is dispersed in the oil, and the thickener thickens the wet film lubricant. The graphene platelets are oxidized and functionalized with a silane.

[0034] The corrosion-resistant wet film lubricant composition of the preceding paragraph can optionally include, additionally and/or alternatively, any one or more of the following features, configurations and/or additional components:

[0035] A corrosion-resistant wet film lubricant composition according to an exemplary embodiment of this disclosure includes, among other possible things, a lubricating pigment, an oil, and a thickener. The lubricating pigment comprises graphene platelets and is dispersed in the in the oil, and the thickener thickens the wet film lubricant. The graphene platelets are oxidized and functionalized with a silane.

[0036] A further embodiment of the foregoing corrosion-resistant wet film lubricant, wherein the graphene platelets have a concentration of 0.1 wt% to 0.5 wt% in the lubricant composition.

[0037] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the silane forms at least one silyl ether linkage with the graphene platelets.

[0038] A further embodiment of any of the foregoing corrosion-resistant dry film lubricants, wherein the silane comprises an alkoxysilane.

[0039] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the silane is selected from a group consisting of a monoalkoxysilane, a dialkoxysilane, and a trialkoxysilane.

[0040] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the silane

is selected to increase the propensity of the graphene platelets to localize adjacent to a surface of an article.

[0041] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the wet film lubricant composition does not include chromate.

[0042] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the graphene platelets are graphene nanoplatelets.

[0043] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the graphene nanoplatelets have average diameters between 1 micrometer and 25 micrometers.

[0044] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the silanes functionalize up to 15 wt% of oxygen of the graphene platelets.


[0045] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the graphene platelets have a concentration of less than 5 wt% in the lubricant composition.

[0046] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the silane is selected to improve lubricity.

[0047] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the wet film lubricant composition does not include chromate.

[0048] The graphene platelets have average diameters between 1 micrometer and 25 micrometers.

[0049] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein the silane is represented by the following formula:



[0050] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein R_1 is selected from a group consisting of ethers and alcohols.

[0051] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein R_2 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen.

[0052] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein R_3 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen.

[0053] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein X includes one or more of an alkane, a haloalkane, a perhaloalkane, an ester, an ether, an amide, an amine, and an epoxy.

[0054] A further embodiment of any of the foregoing corrosion-resistant wet film lubricants, wherein at least

one of R_1 , R_2 , and R_3 is covalently bonded to the graphene platelets.

[0055] An embodiment of a lubricated article includes a surface and a corrosion-resistant wet film lubricant. The coating of the corrosion-resistant dry lubricant is on the surface.

[0056] The lubricated article of the preceding paragraph can optionally include, additionally and/or alternatively, any one or more of the following features, configurations and/or additional components:

[0057] A lubricated article according to an exemplary embodiment of this disclosure includes, among other possible things, a surface and a corrosion-resistant wet film lubricant according to another embodiment of this disclosure. The coating of the corrosion-resistant dry lubricant is on the surface.

[0058] A further embodiment of the foregoing lubricated article, wherein the surface comprises an aluminum material.

[0059] An embodiment of a method of producing a corrosion-resistant lubricant includes oxidizing exfoliated graphene to produce oxidized graphene platelets, functionalizing the oxidized graphene platelets with a silane to produce functionalized graphene platelets, and dispersing the functionalized graphene platelets in a lubricant composition, wherein the lubricant composition comprises an oil and a thickener.

[0060] The method of the preceding paragraph can optionally include, additionally and/or alternatively, any one or more of the following features, configurations and/or additional components:

[0061] A method of producing a corrosion-resistant lubricant includes according to an exemplary embodiment of this disclosure includes, among other possible things, oxidizing exfoliated graphene to produce oxidized graphene platelets, functionalizing the oxidized graphene platelets with a silane to produce functionalized graphene platelets, and dispersing the functionalized graphene platelets in a lubricant composition, wherein the lubricant composition comprises an oil and a thickener.

[0062] A further embodiment of the foregoing method, wherein functionalizing the oxidized graphene platelets with a silane comprises functionalizing up to 15 wt% of oxygen of the oxidized graphene platelets.


[0063] A further embodiment of any of the foregoing methods, wherein dispersing the functionalized platelets in the lubricant composition comprises adding the functionalized graphene platelets at a concentration of 0.1 wt% to 0.5 wt% in the lubricant composition.

[0064] A further embodiment of any of the foregoing methods, wherein the silane forms at least one silyl ether linkage with the oxidized graphene platelets.

[0065] A further embodiment of any of the foregoing methods, wherein the silane is selected from a group consisting of a monoalkoxysilane, a dialkoxysilane, and a trialkoxysilane.

[0066] A further embodiment of any of the foregoing methods, wherein the silane is represented by the fol-

lowing formula:



[0067] A further embodiment of any of the foregoing methods, wherein R_1 is selected from a group consisting of ethers and alcohols.

[0068] A further embodiment of any of the foregoing methods, wherein R_2 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen.

[0069] A further embodiment of any of the foregoing methods, wherein R_3 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen.

[0070] A further embodiment of any of the foregoing methods, wherein X includes one or more of an alkane, a haloalkane, a perhaloalkane, an ester, an ether, an amide, an amine, and an epoxy.

[0071] A further embodiment of any of the foregoing methods, wherein at least one of R_1 , R_2 , and R_3 is covalently bonded to the graphene platelets.

[0072] A further embodiment of any of the foregoing methods, wherein the silane is selected to increase the propensity of the functionalized graphene platelets to localize adjacent to a surface of an article.

[0073] While the invention has been described with reference to an exemplary embodiment(s), it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention. In addition, many modifications may be made to adapt a particular situation or material to the teachings of the invention without departing from the essential scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment(s) disclosed, but that the invention will include all embodiments falling within the scope of the appended claims.

Claims

1. A corrosion-resistant wet film lubricant composition comprising:

- a lubricating pigment comprising graphene platelets, wherein the graphene platelets are partially oxidized and functionalized with a silane;
- an oil, wherein the lubricating pigment is dispersed in the oil; and
- a thickener for thickening the wet film lubricant.


2. The corrosion-resistant wet film lubricant composi-

tion of claim 1, wherein the silanes functionalize up to 15 wt% of oxygen of the graphene platelets, and/or wherein the graphene platelets have a concentration of 0.1 wt% to 5 wt% in the lubricant composition.

3. The corrosion-resistant wet film lubricant composition of any preceding claim, wherein the silane forms at least one silyl ether linkage with the graphene platelets, or wherein the silane comprises an alkoxysilane.

4. The corrosion-resistant wet film lubricant composition of any preceding claim, where in the silane is selected from a group consisting of a monoalkoxysilane, a dialkoxysilane, and a trialkoxysilane.

5. The corrosion-resistant wet film lubricant composition of any preceding claim, wherein the silane is represented by the following formula:



wherein:

R_1 is selected from a group consisting of ethers and alcohols;

R_2 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen;

R_3 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen;


X includes one or more of an alkane, a haloalkane, a perhaloalkane, an ester, an ether, an amide, an amine, and an epoxy; and at least one of R_1 , R_2 , and R_3 is covalently bonded to the graphene platelets.

6. The corrosion-resistant wet film lubricant composition of any preceding claim, wherein the silane is selected to increase the propensity of the graphene platelets to localize adjacent to a surface of an article, and/or wherein the wet film lubricant composition does not include chromate, or further comprising an additional corrosion inhibitor.

7. The corrosion-resistant wet film lubricant composition of any preceding claim, wherein the graphene platelets have average diameters between 1 micrometer and 25 micrometers.

8. The corrosion-resistant wet film lubricant composition of any preceding claim, wherein:

the silanes functionalize up to 15 wt% of oxygen of the graphene platelets;
 the graphene platelets have a concentration of less than 5 wt% in the lubricant composition;
 the silane is selected to improve lubricity;
 the wet film lubricant composition does not include chromate;
 the graphene platelets have average diameters between 1 micrometer and 25 micrometers; and
 the silane is represented by the following formula:



wherein:

R_1 is selected from a group consisting of ethers and alcohols;
 R_2 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen;
 R_3 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen;
 X includes one or more of an alkane, a haloalkane, a perhaloalkane, an ester, an ether, an amide, an amine, and an epoxy; and
 at least one of R_1 , R_2 , and R_3 is covalently bonded to the graphene platelets.

9. A lubricated article comprising:

a surface;
 a coating of the corrosion-resistant wet film lubricant composition of claim 1 on the surface.

10. A method of producing a corrosion-resistant lubricant, the method comprising:

oxidizing exfoliated graphene to produce oxidized graphene platelets;
 functionalizing the oxidized graphene platelets with a silane to produce functionalized graphene platelets; and
 dispersing the functionalized platelets in a lubricant composition, wherein the lubricant composition comprises an oil and a thickener.


11. The method of claim 10, wherein functionalizing the oxidized graphene platelets with a silane comprises functionalizing up to 15 wt% of oxygen of the oxidized graphene platelets.

12. The method of claim 10 or 11, wherein dispersing

the functionalized platelets in the lubricant composition comprises adding the functionalized graphene platelets at a concentration of 0.1 wt% to 0.5 wt% in the lubricant composition.

13. The method of any of claims 10 to 12, wherein the silane forms at least one silyl ether linkage with the graphene platelets, or where in the silane is selected from a group consisting of a monoalkoxysilane, a dialkoxysilane, and a trialkoxysilane.

14. The method of any of claims 10 to 13, wherein the silane is represented by the following formula:



wherein:

R_1 is selected from a group consisting of ethers and alcohols;
 R_2 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen;
 R_3 is selected from a group consisting of alcohols, ethers, alkanes, and hydrogen;
 X includes one or more of an alkane, a haloalkane, a perhaloalkane, an ester, an ether, an amide, an amine, and an epoxy; and
 at least one of R_1 , R_2 , and R_3 is covalently bonded to the graphene platelets.

15. The method of any of claims 10 to 14, wherein the silane is selected to increase the propensity of the functionalized platelets to localize adjacent to a surface of an article.

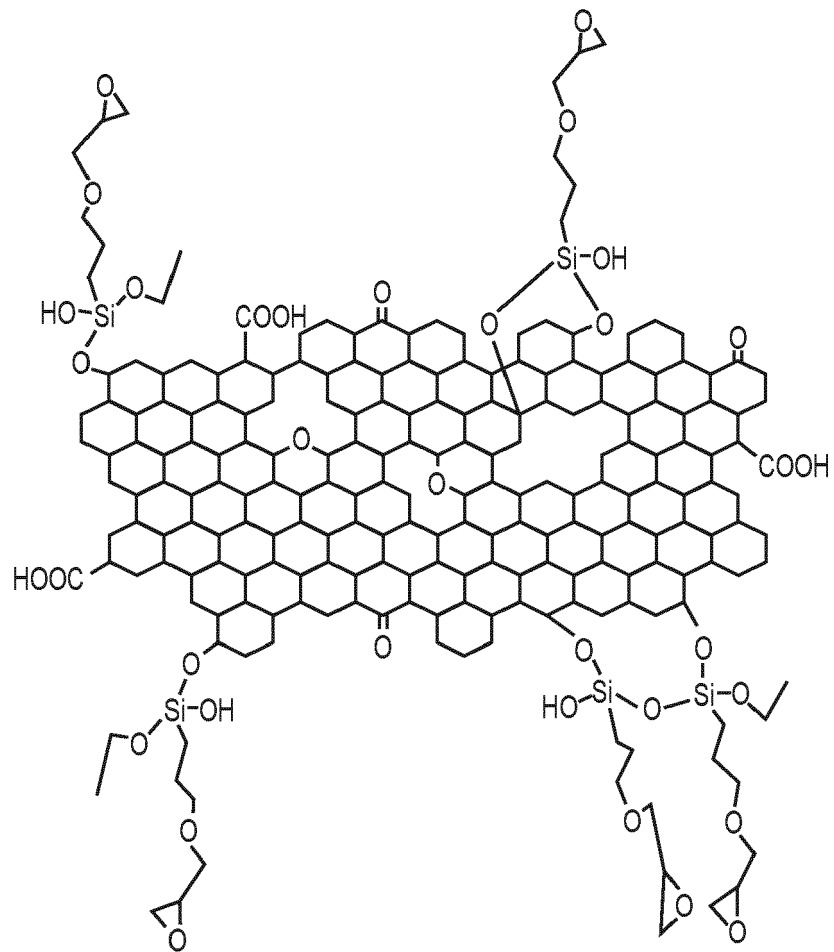


FIG. 1

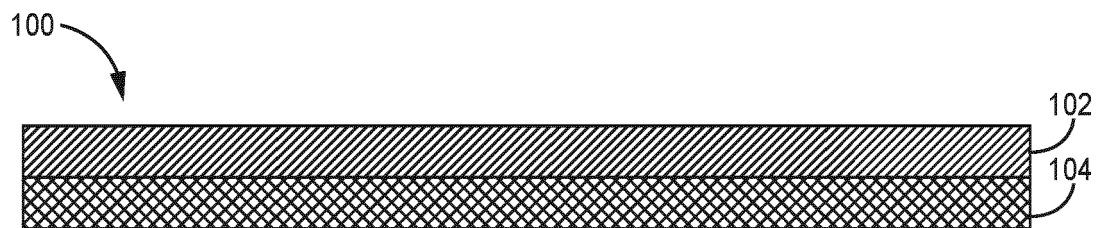


FIG. 2

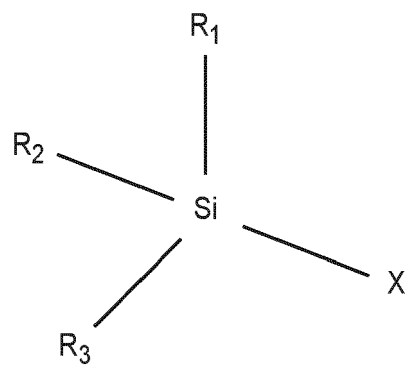


FIG. 3

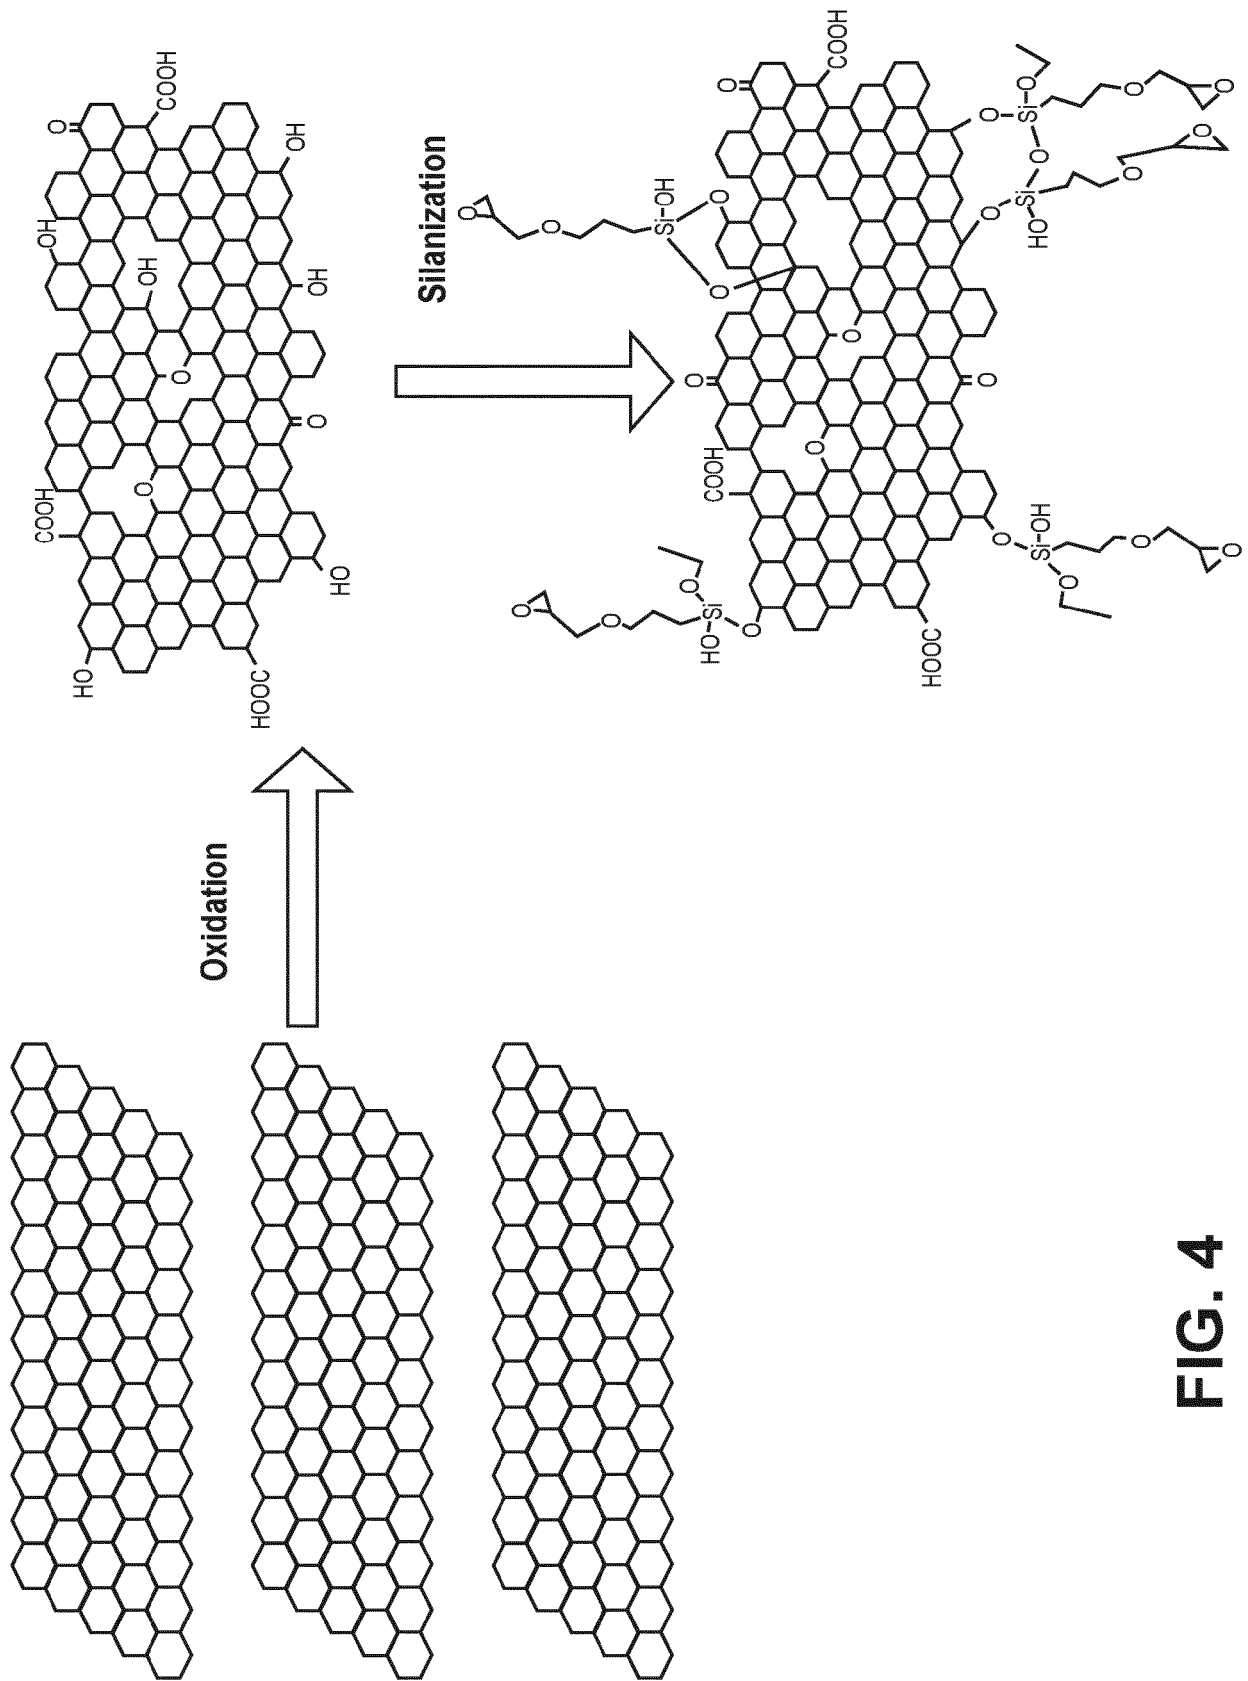


FIG. 4

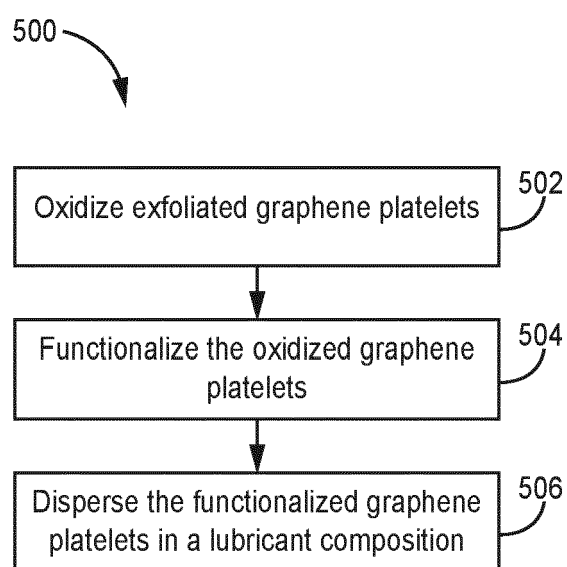


FIG. 5



EUROPEAN SEARCH REPORT

Application Number

EP 22 20 6178

5

10

15

20

25

30

35

40

45

50

55

2

EPO FORM 1503 03:82 (P04C01)

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X,P	WO 2022/139853 A1 (P&S GLOBAL HOLDINGS LLC [US]) 30 June 2022 (2022-06-30) * paragraph [0036] - paragraph [0044]; examples 1, CaNGO-001, AmGO-05, 3, Formula 3; tables 3, 4 * * paragraph [0044] - paragraph [0045]; example 4; table 5 *	1-4, 6, 7, 9	INV. C10M103/02 C10M169/00 C10M125/02
X	----- DATABASE WPI Week 2020003 2020 Thomson Scientific, London, GB; AN 2020-28248B XP002808870, & CN 110 951 515 A (CHANGSHA ERDAO NEW ENERGY TECHNOLOGY CO) 3 April 2020 (2020-04-03)	1, 3, 6, 9	
Y	* claims 1, 2; examples 1-3 *	2, 7, 10-12, 15	
Y	----- WO 2021/168394 A1 (XG SCIENCES INC [US]) 26 August 2021 (2021-08-26) * paragraph [0019]; claims 1, 2, 6, 10, 13, 15, 16, 24, 26; table 1 *	1-15	TECHNICAL FIELDS SEARCHED (IPC) C10M C10N
Y	----- US 2021/102075 A1 (POTEET STEVEN [US] ET AL) 8 April 2021 (2021-04-08) * claims 1, 7 *	1-15	
Y	----- US 2019/169443 A1 (POTEET STEVEN [US]) 6 June 2019 (2019-06-06) * claims 16-18 *	1-15	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 20 March 2023	Examiner Pöllmann, Klaus
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 22 20 6178

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-03-2023

10

15

20

25

30

35

40

45

50

55

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2022139853 A1	30-06-2022	NONE	
CN 110951515 A	03-04-2020	NONE	
WO 2021168394 A1	26-08-2021	NONE	
US 2021102075 A1	08-04-2021	EP 3800225 A1	07-04-2021
		US 2021102075 A1	08-04-2021
US 2019169443 A1	06-06-2019	EP 3492533 A1	05-06-2019
		US 2019169443 A1	06-06-2019

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82